



Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

Annex for BLE

Test Report No.:CTL2506182071-WF02

TABLE OF CONTENTS

1. Bandwidth	3
1.1 Test Result	3
1.1.1 OBW	3
1.1.2 6dB BW	3
1.2 Test Graph	4
1.2.1 OBW	4
1.2.2 6dB BW	7
2. Maximum Conducted Output Power	10
2.1 Test Result	10
2.1.1 Power	10
3. Maximum Power Spectral Density	11
3.1 Test Result	11
3.1.1 PSD	11
3.2 Test Graph	12
3.2.1 PSD	12
4. Unwanted Emissions In Non-restricted Frequency Bands	15
4.1 Test Result	15
4.1.1 Ref	15
4.1.2 CSE	15

FCCID: 2AUARTKMU8A

4.2 Test Graph	16
4.2.1 Ref	16
4.2.2 CSE	19

FCCID: 2AUARTKMU8A

1. Bandwidth

1.1 Test Result

1.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.034	/	Pass
		2440	1	1.036	/	Pass
		2480	1	1.034	/	Pass
2M	SISO	2402	1	2.062	/	Pass
		2440	1	2.065	/	Pass
		2480	1	2.060	/	Pass


1.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.665	≥ 0.5	Pass
		2440	1	0.666	≥ 0.5	Pass
		2480	1	0.663	≥ 0.5	Pass
2M	SISO	2402	1	1.194	≥ 0.5	Pass
		2440	1	1.236	≥ 0.5	Pass
		2480	1	1.226	≥ 0.5	Pass


FCCID: 2AUARTKMU8A

1.2 Test Graph


1.2.1 OBW

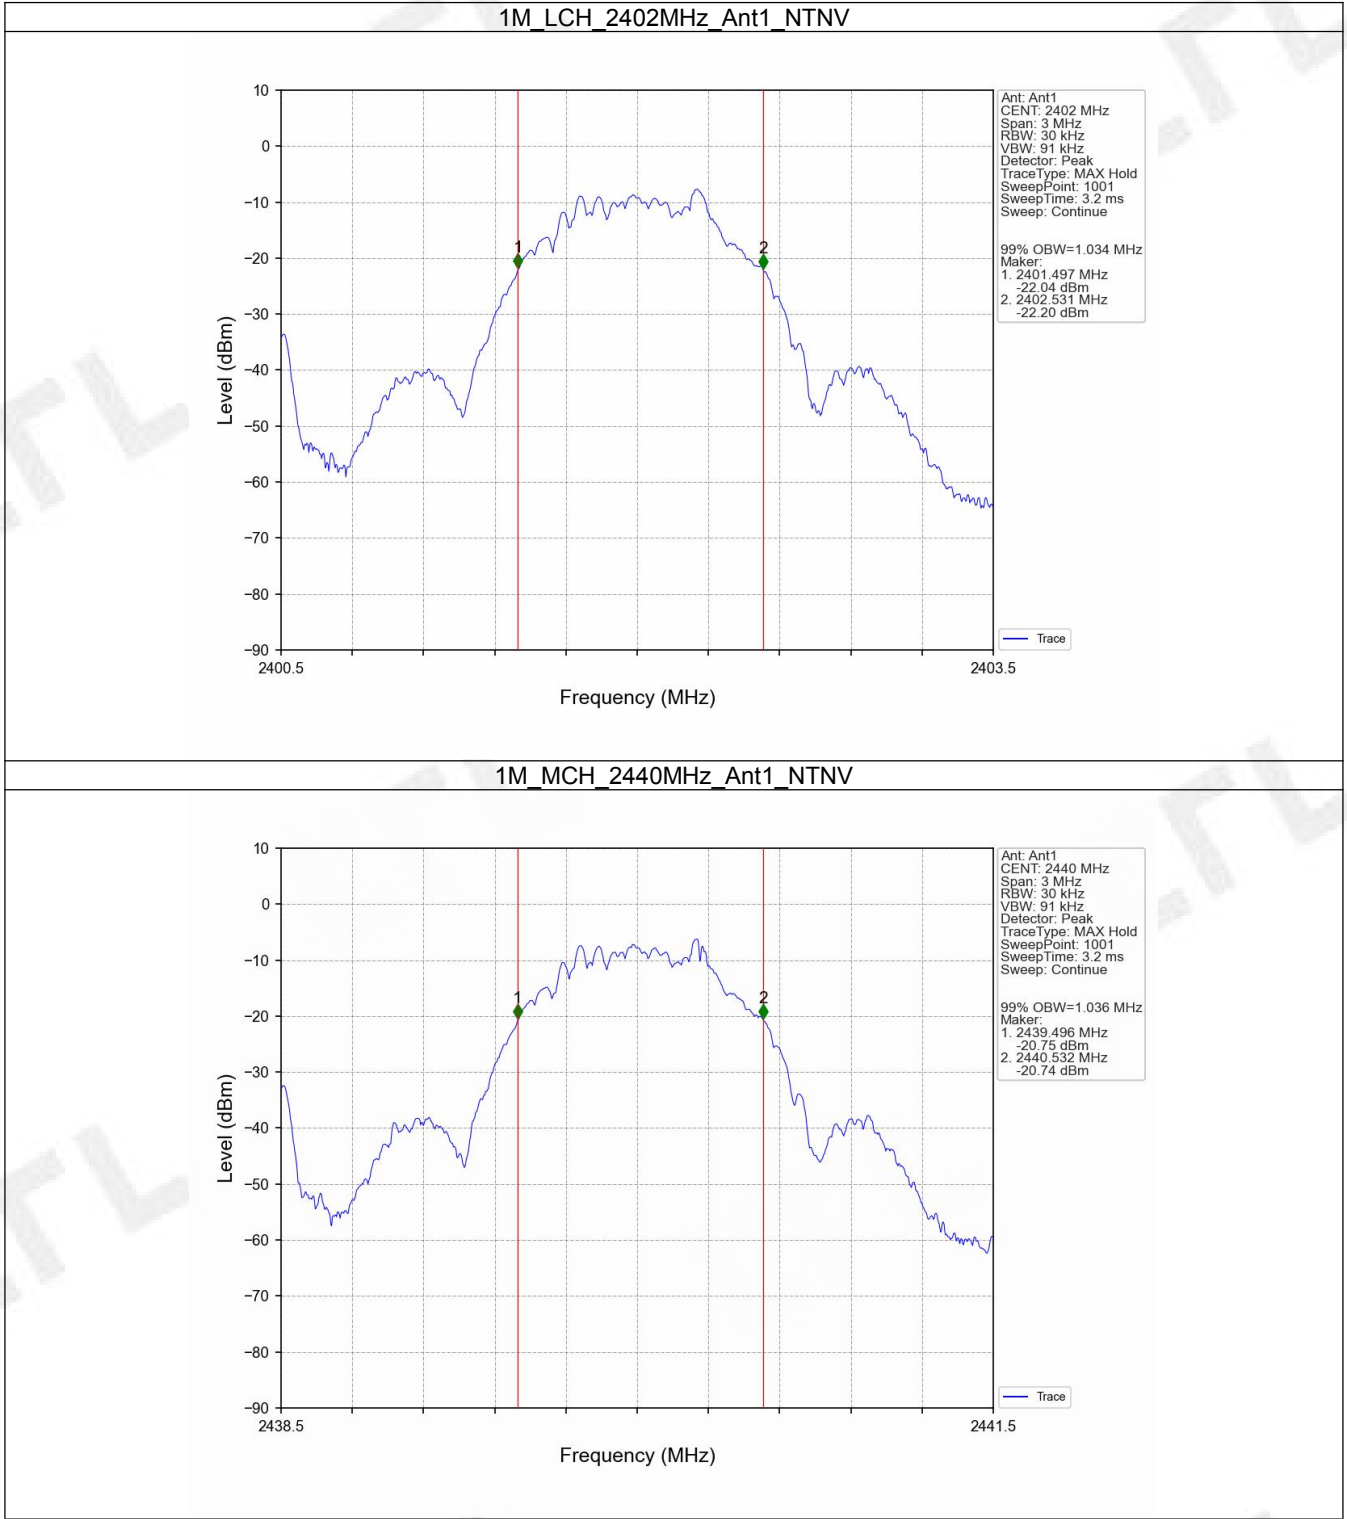

FCCID: 2AUARTKMU8A

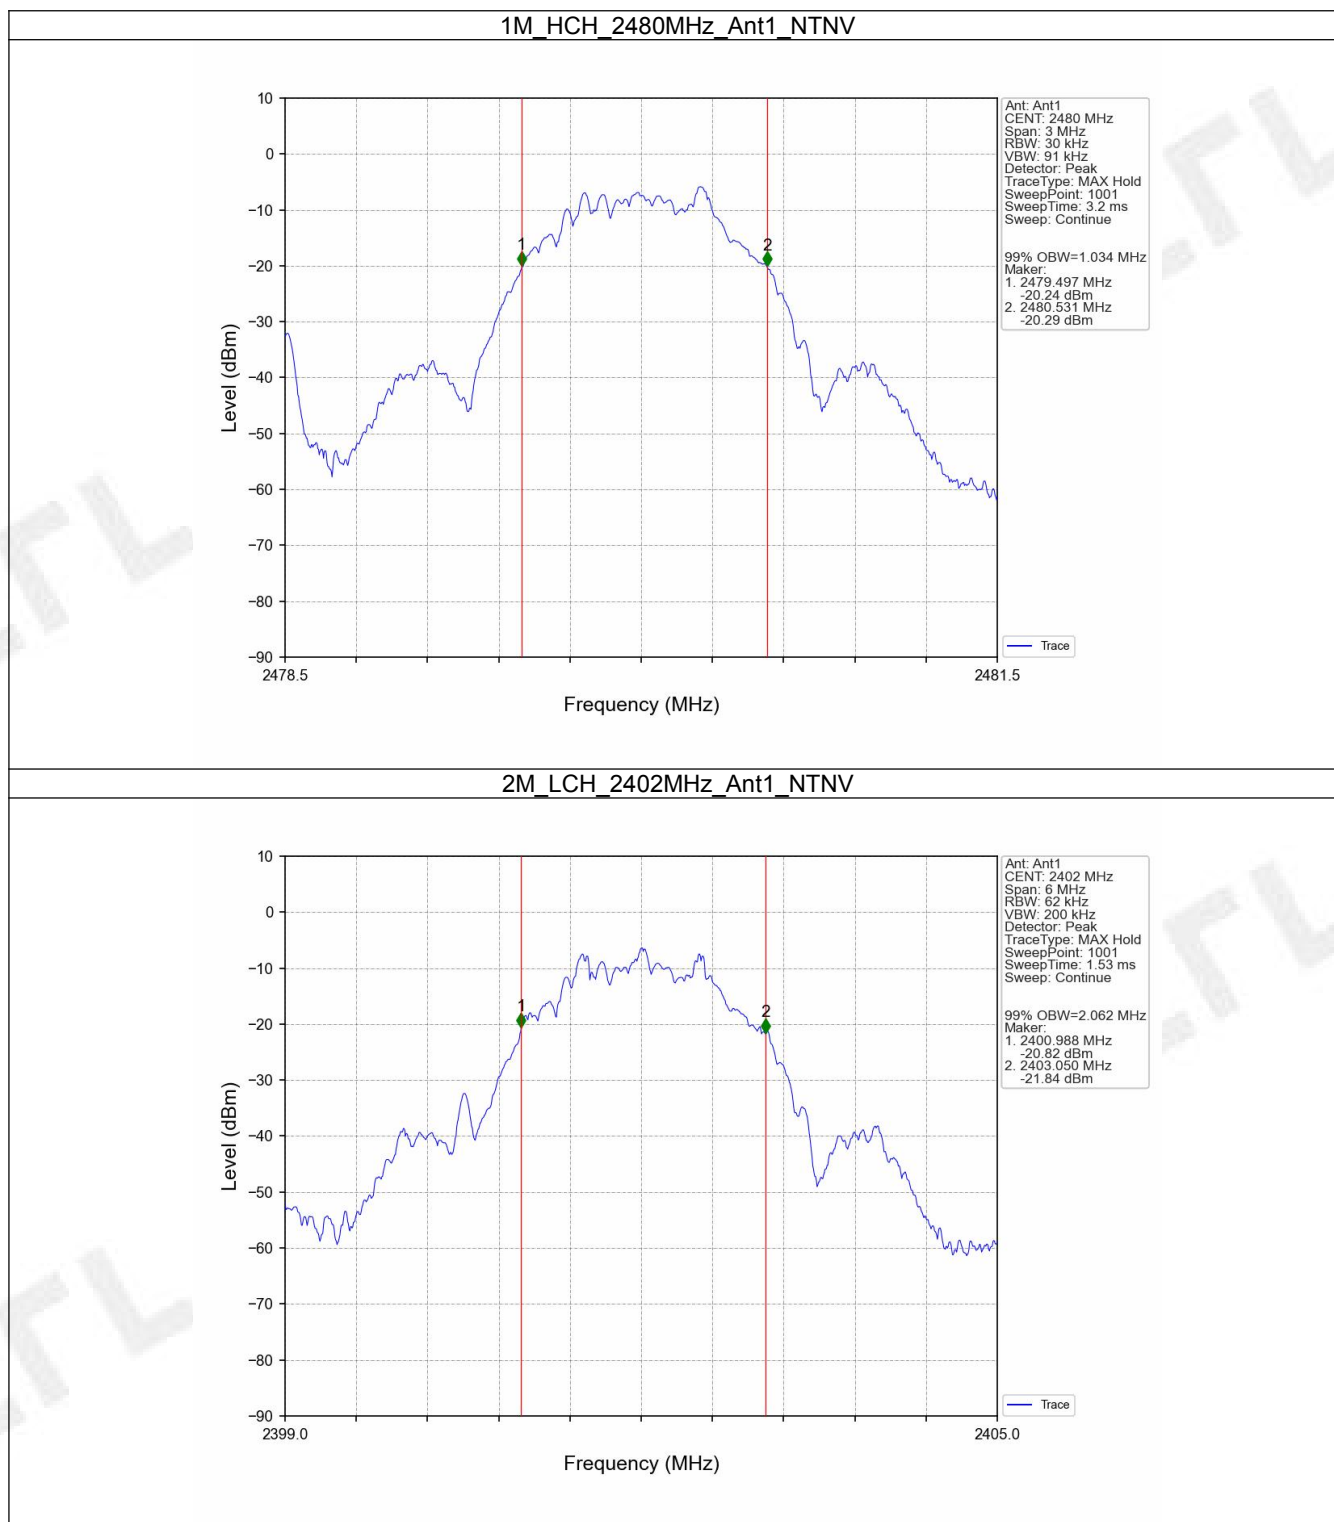


FCCID: 2AUARTKMU8A

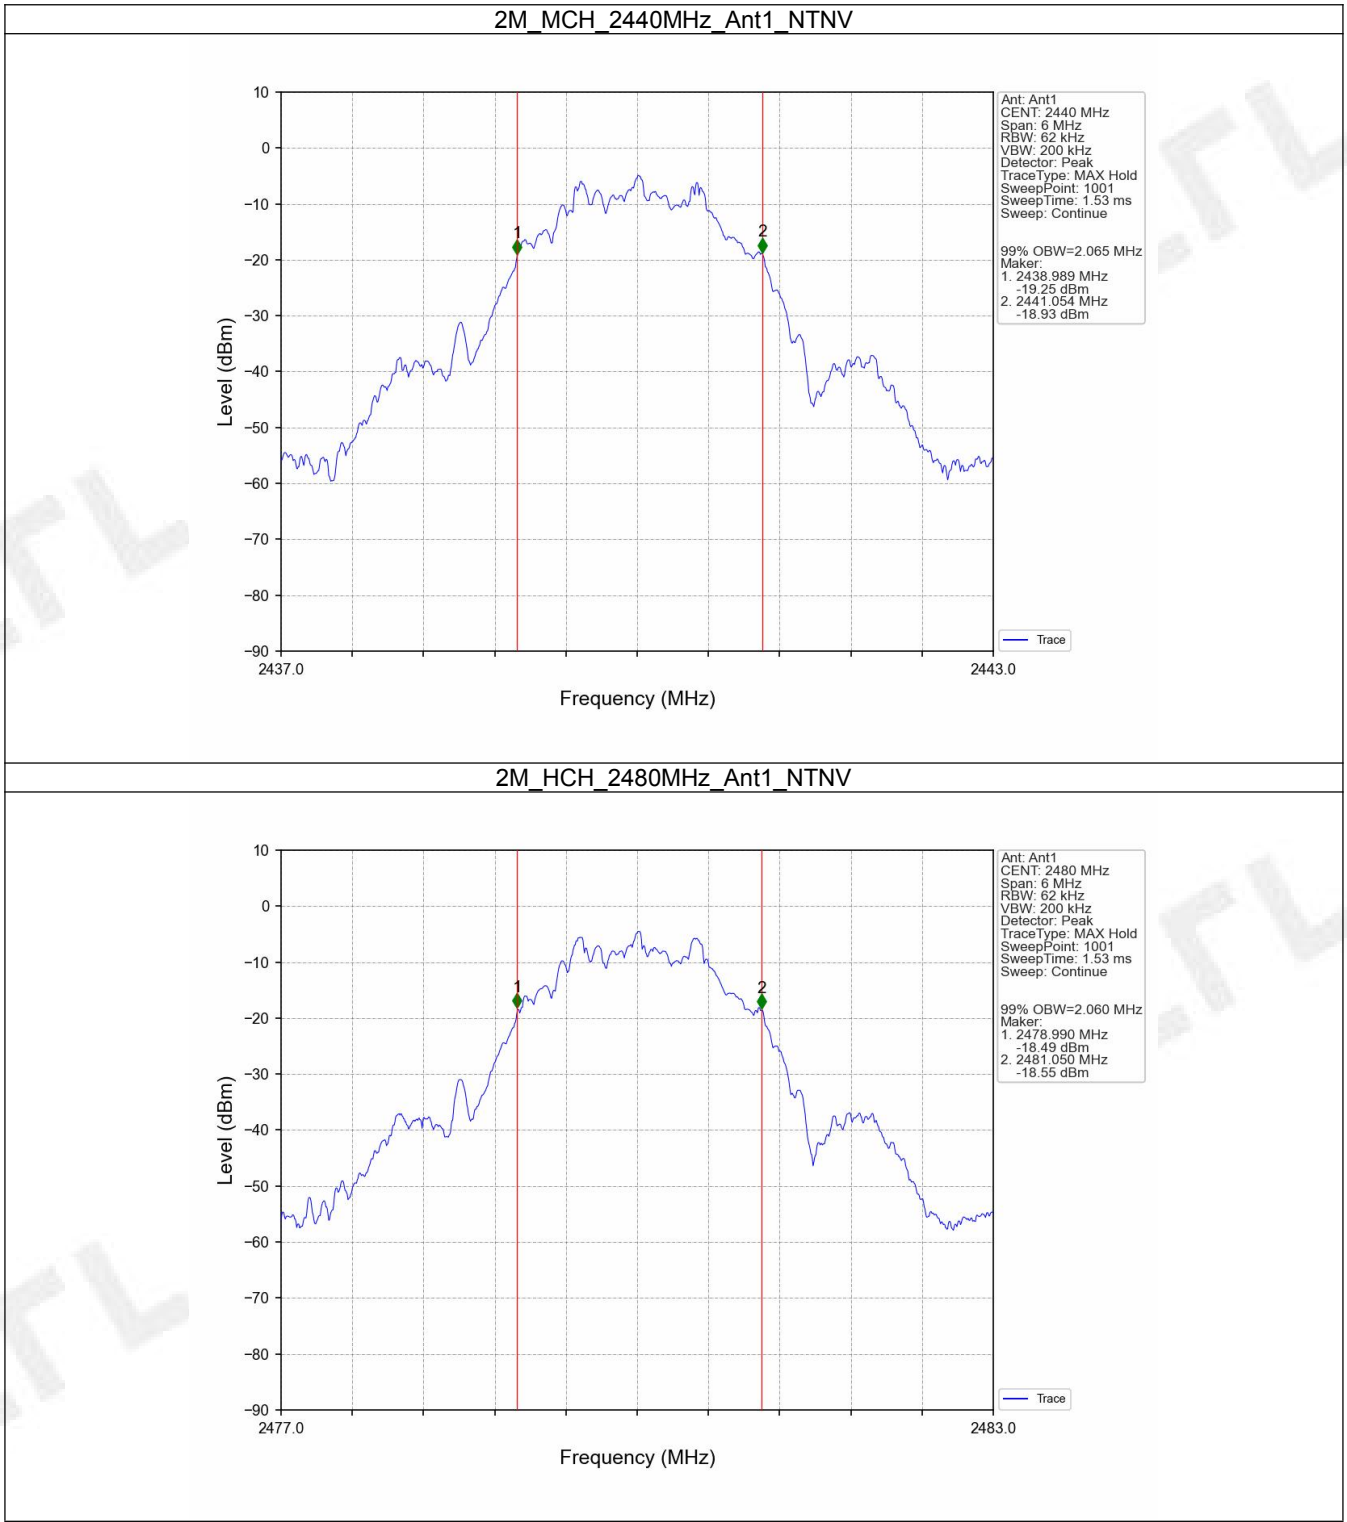


FCCID: 2AUARTKMU8A


1.2.2 6dB BW

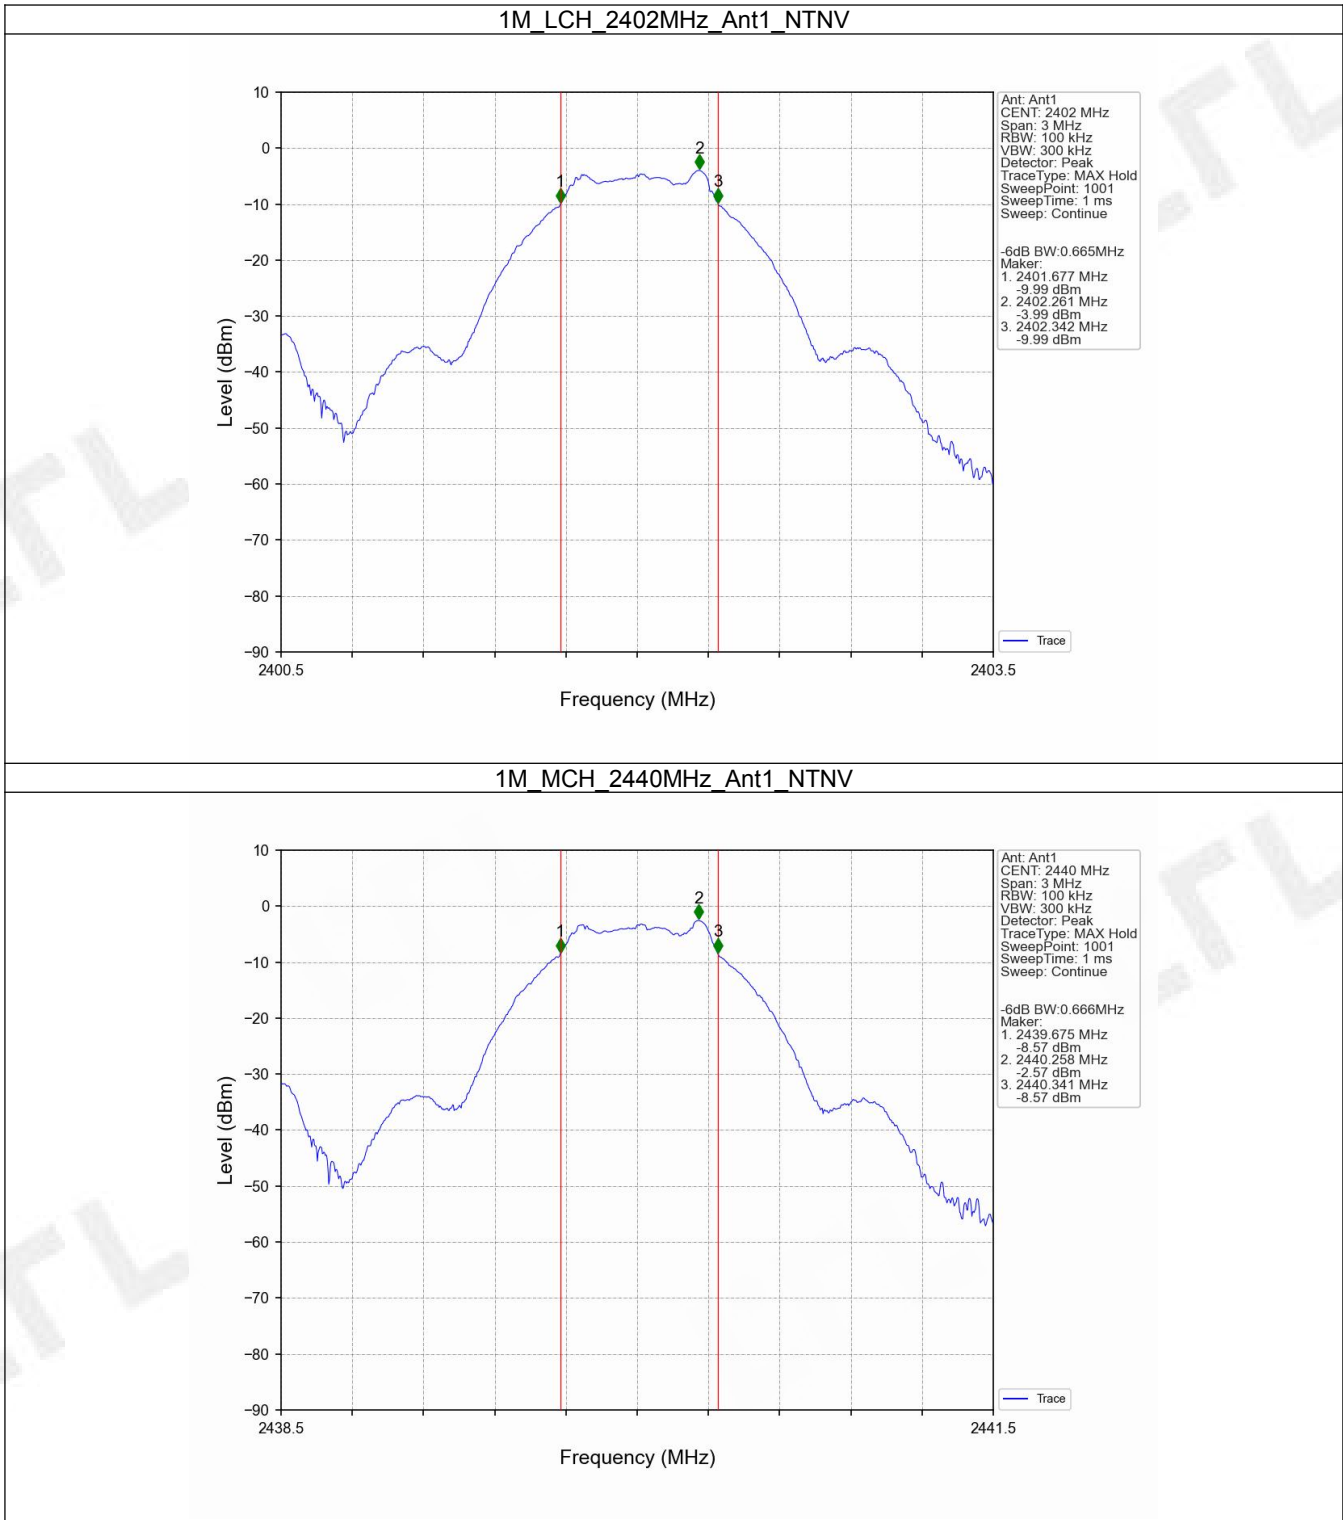

FCCID: 2AUARTKMU8A

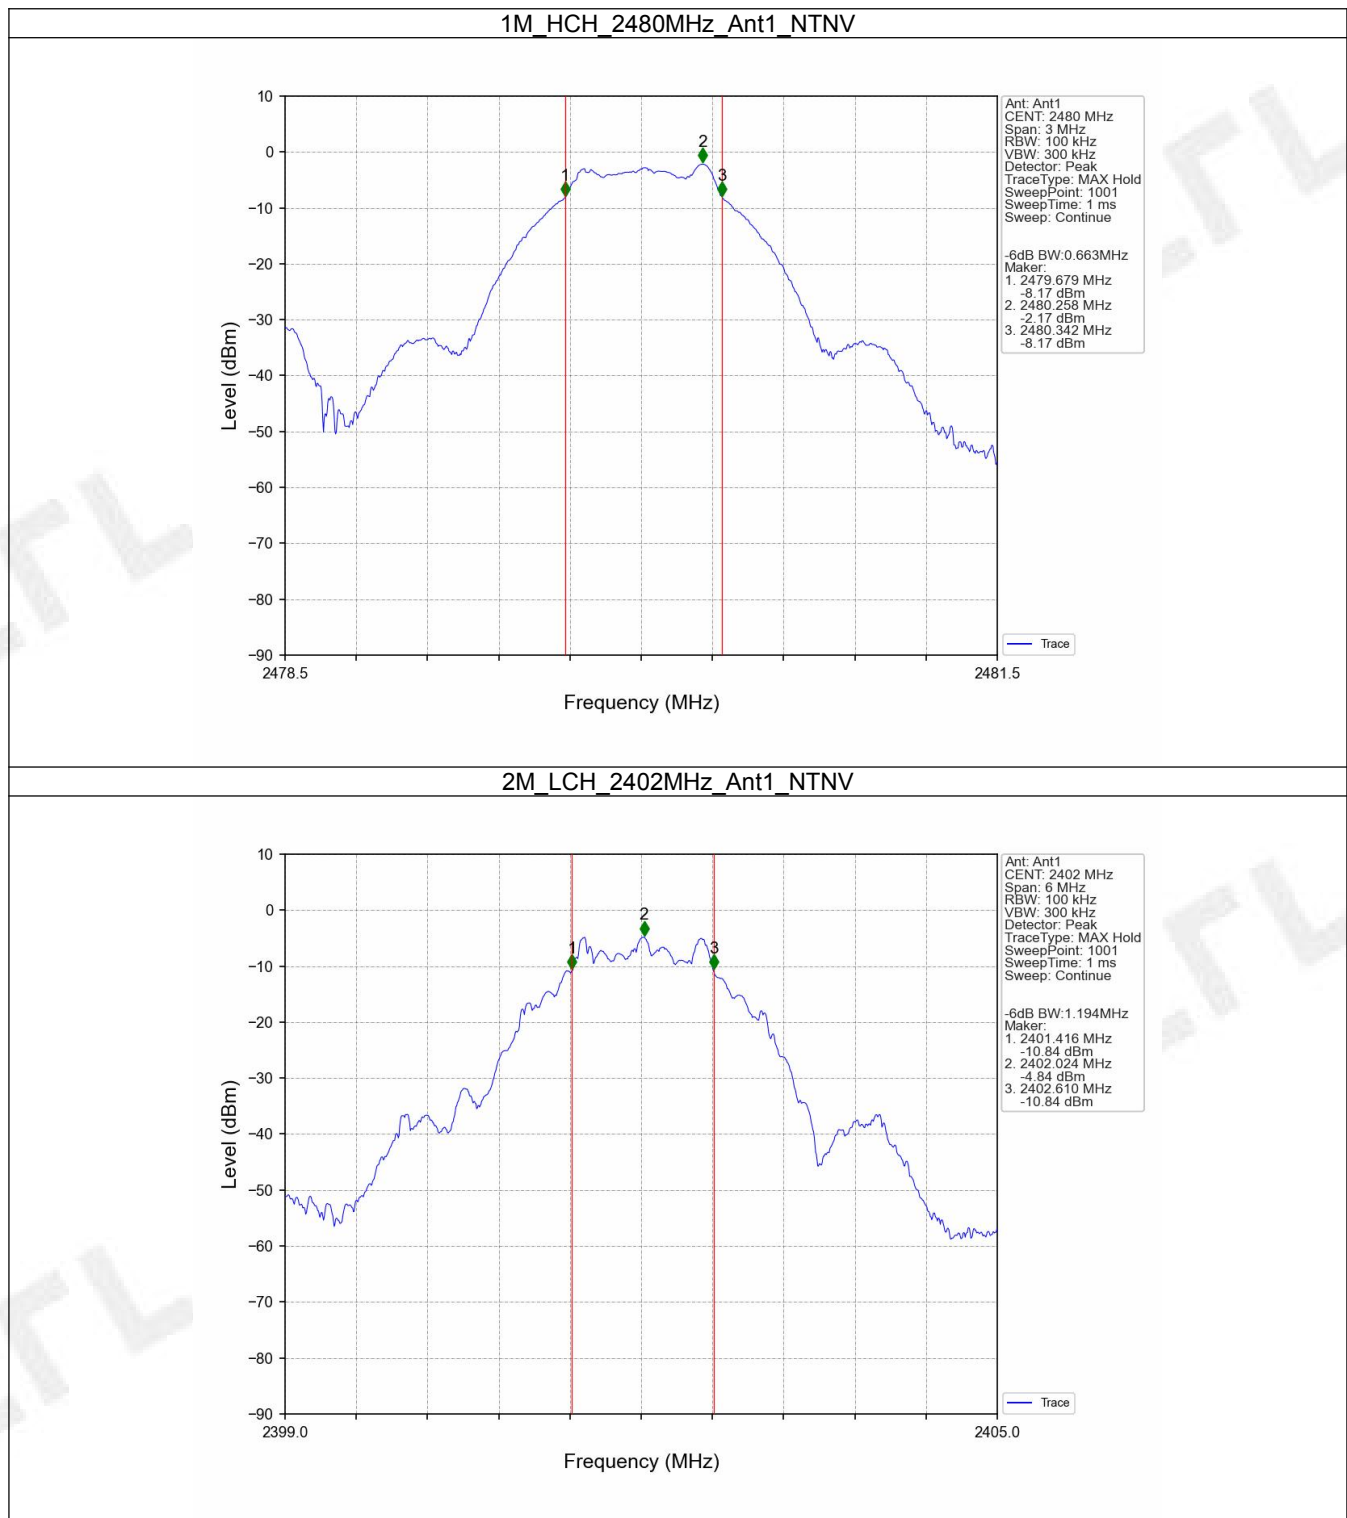

FCCID: 2AUARTKMU8A

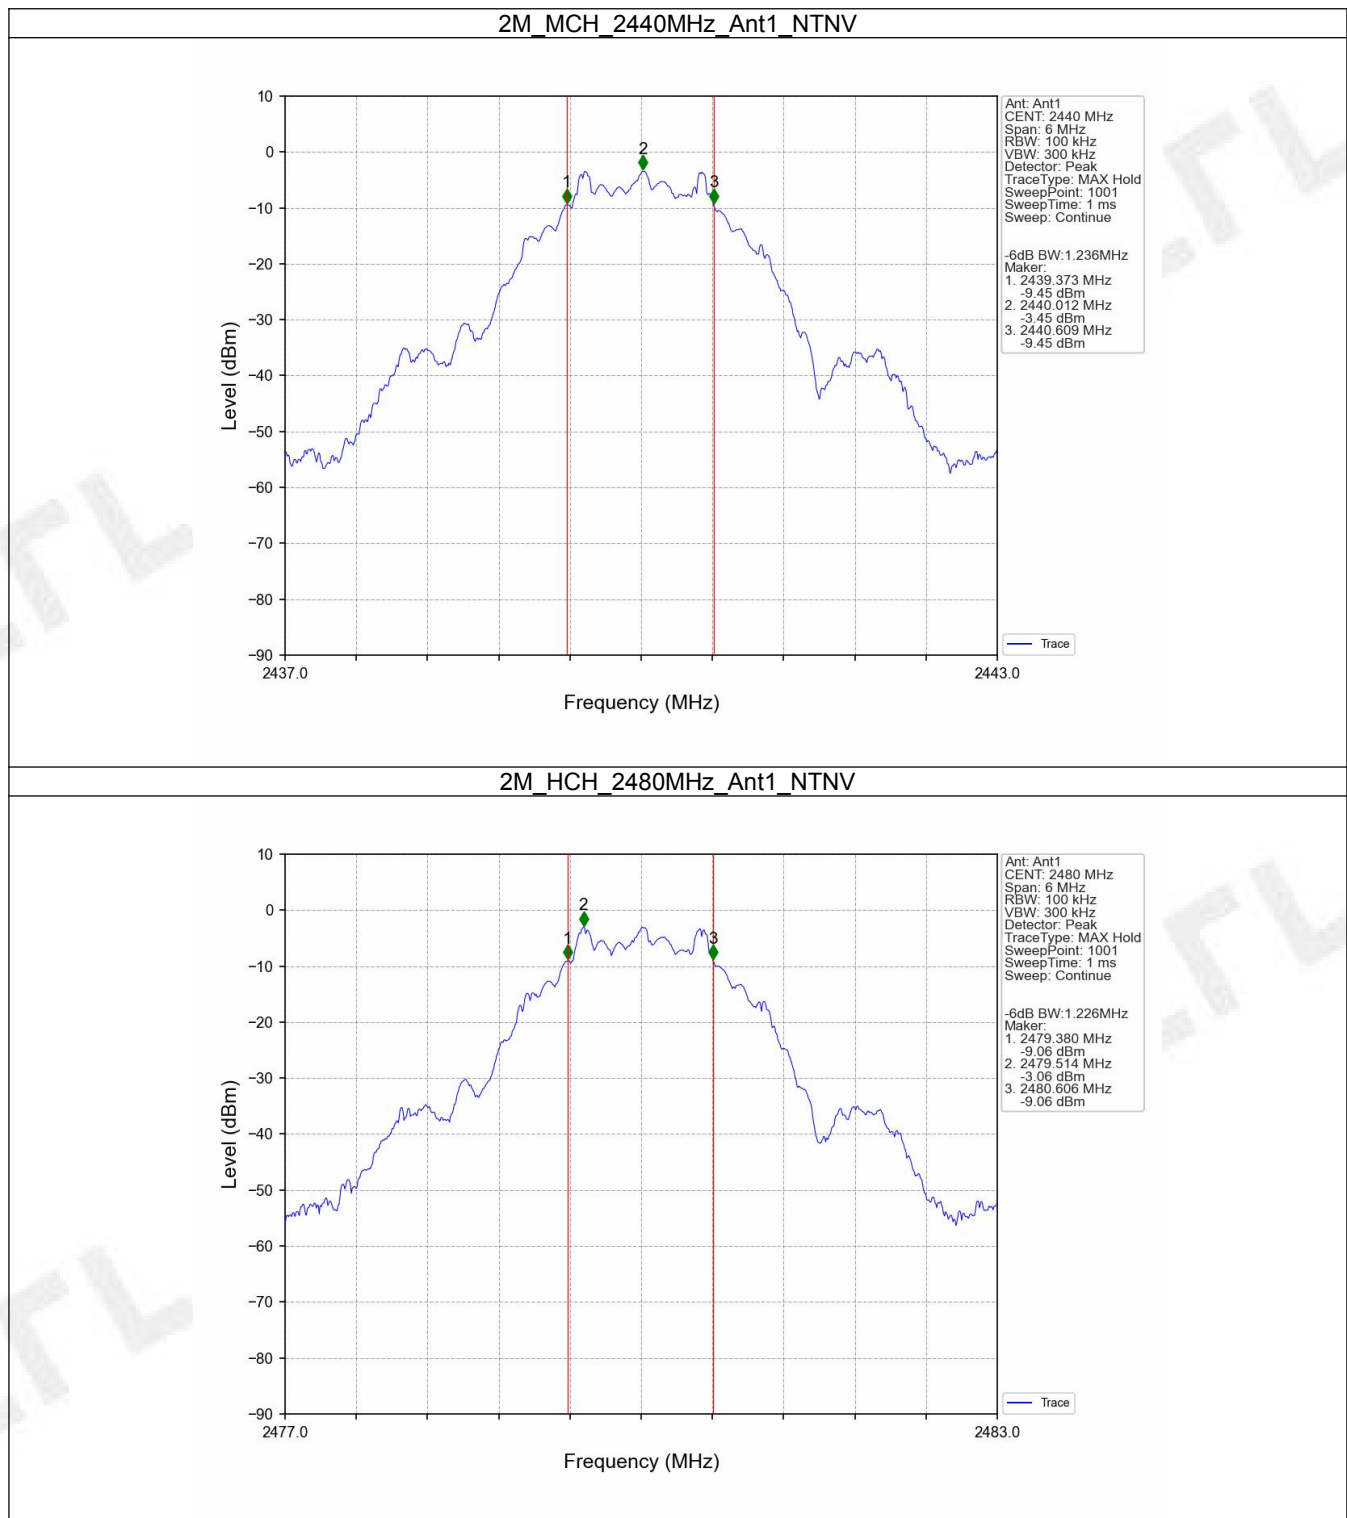

FCCID: 2AUARTKMU8A

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-3.80	<=30	Pass
		2440	-2.39	<=30	Pass
		2480	-1.98	<=30	Pass
2M	SISO	2402	-3.51	<=30	Pass
		2440	-2.12	<=30	Pass
		2480	-1.68	<=30	Pass

Note1: Antenna Gain: Ant1: 4.81dBi;

FCCID: 2AUARTKMU8A

3. Maximum Power Spectral Density

3.1 Test Result

3.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-19.92	<=8	Pass
		2440	-18.46	<=8	Pass
		2480	-18.14	<=8	Pass
2M	SISO	2402	-23.24	<=8	Pass
		2440	-22.26	<=8	Pass
		2480	-21.52	<=8	Pass

Note1: Antenna Gain: Ant1: 4.81dBi;


FCCID: 2AUARTKMU8A

3.2 Test Graph


3.2.1 PSD

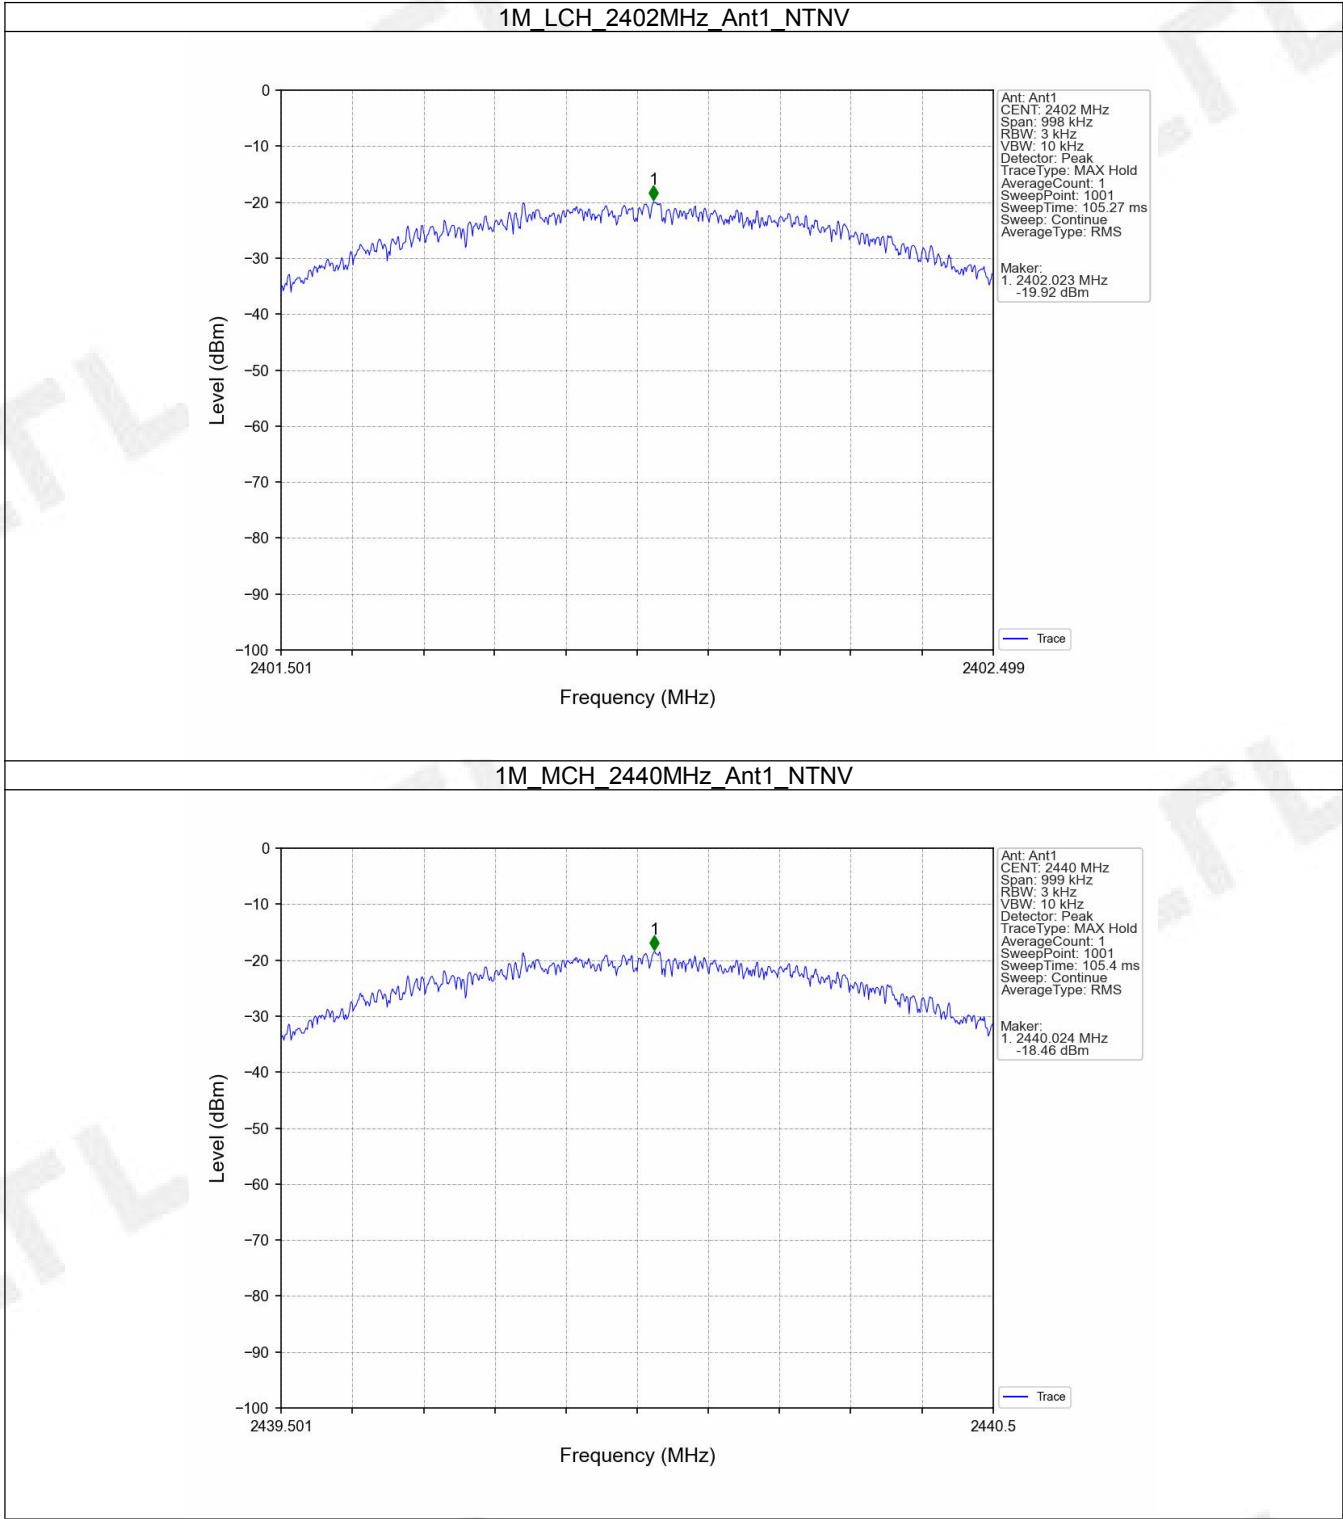

FCCID: 2AUARTKMU8A

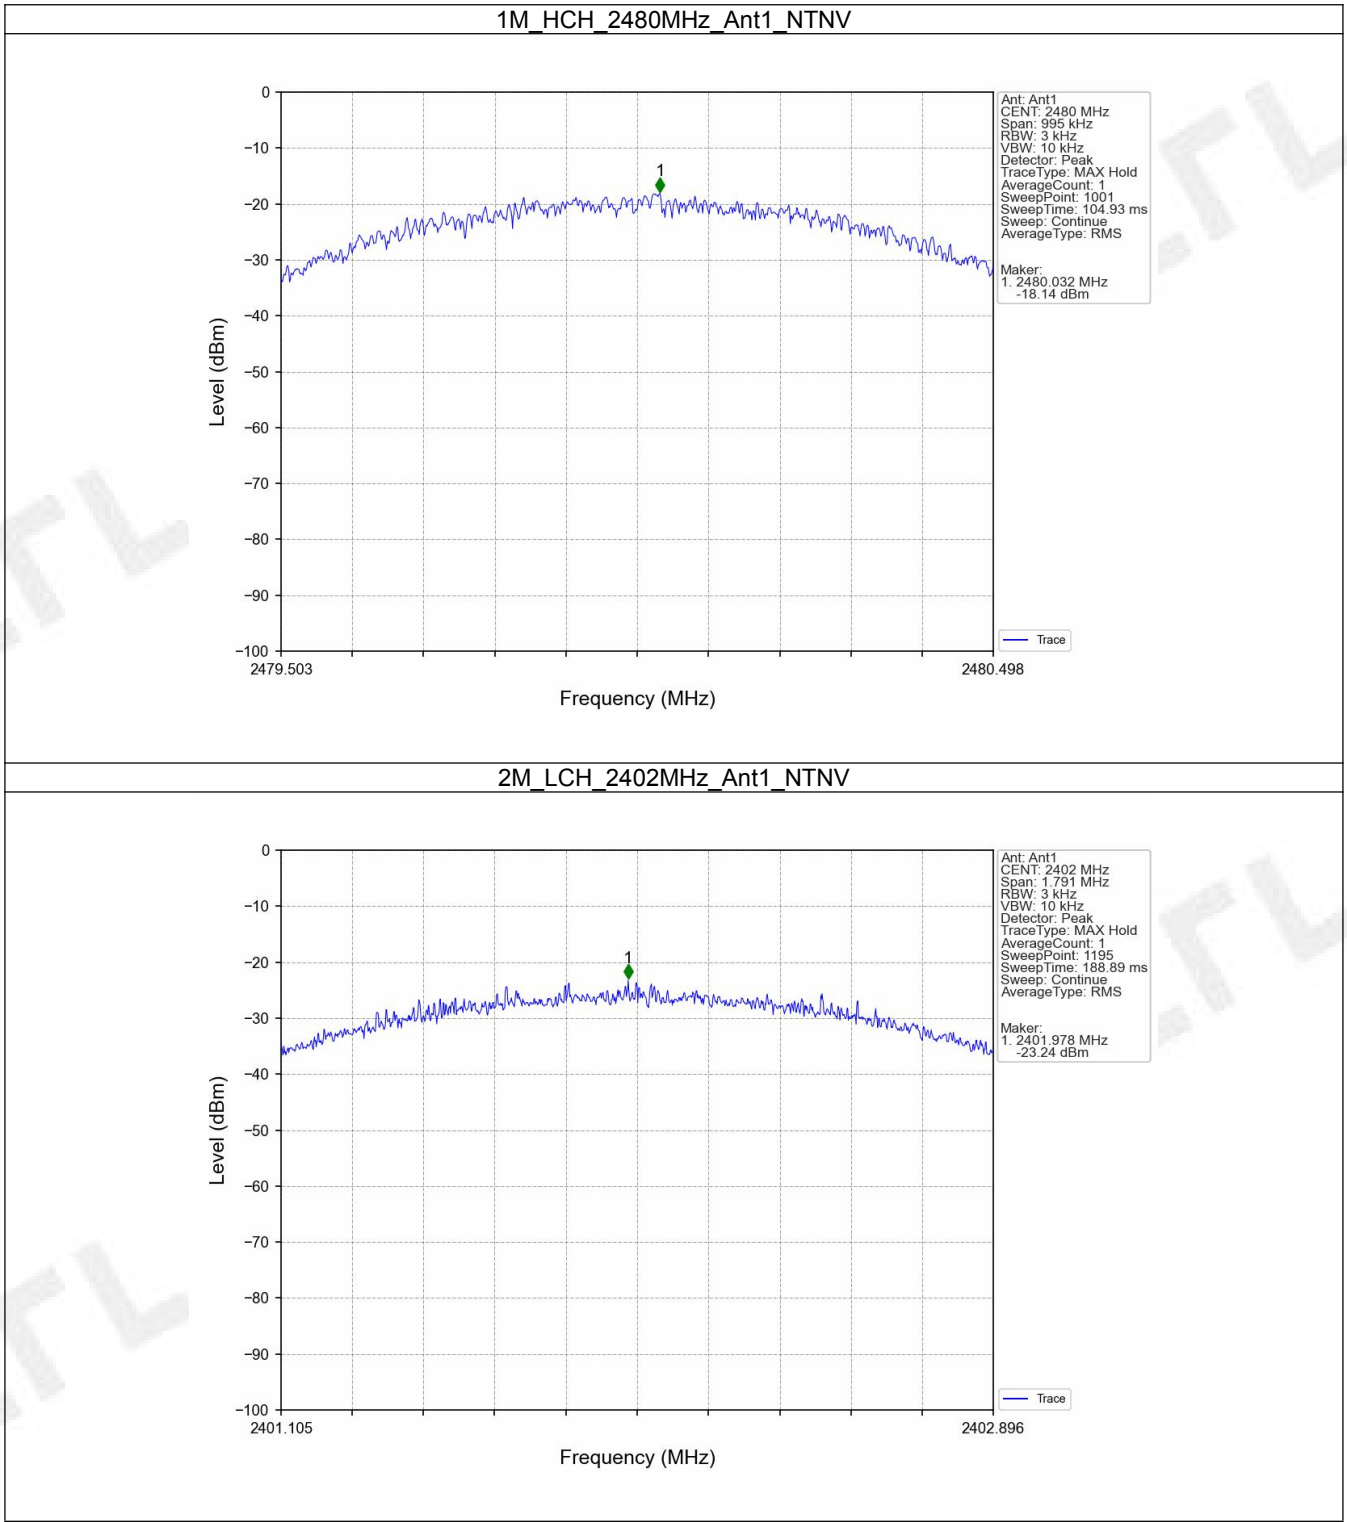

FCCID: 2AUARTKMU8A

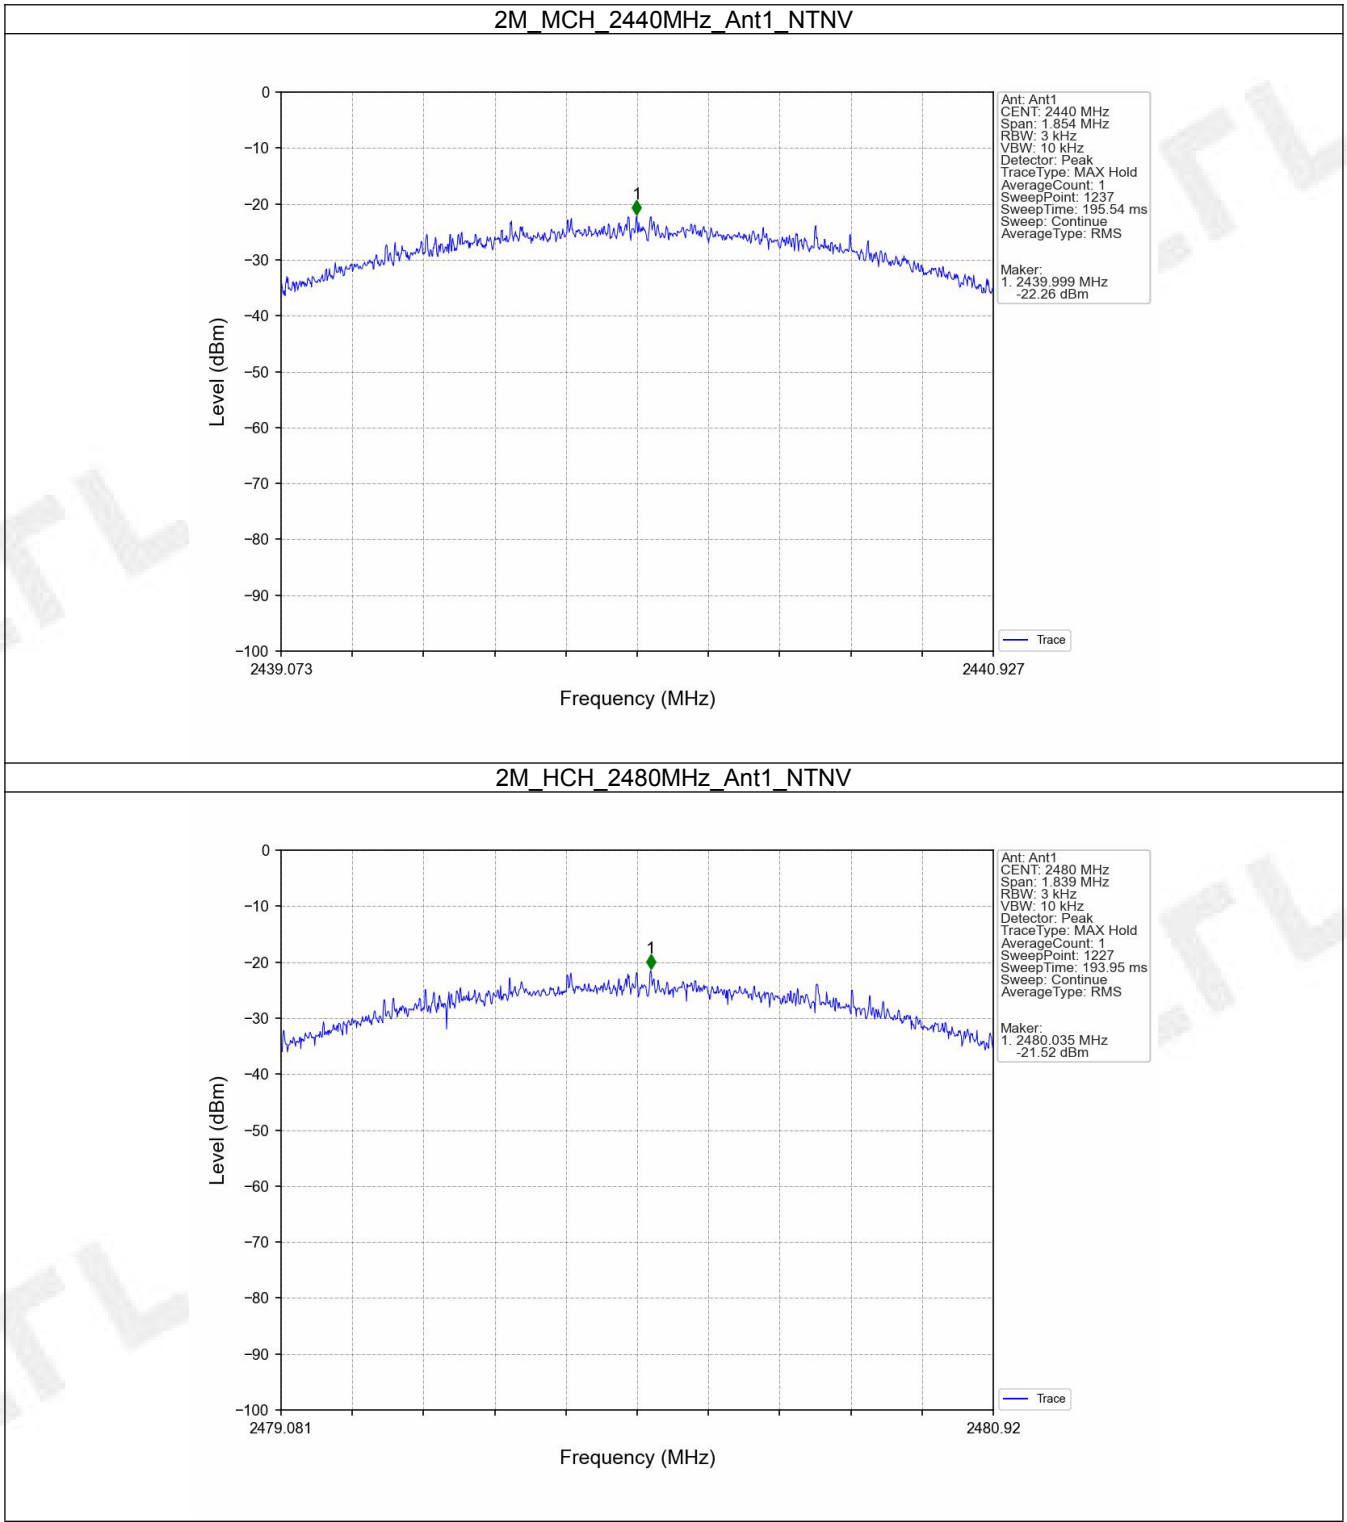

FCCID: 2AUARTKMU8A

4. Unwanted Emissions In Non-restricted Frequency Bands

4.1 Test Result

4.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-3.99
		2440	1	-2.57
		2480	1	-2.15
2M	SISO	2402	1	-4.65
		2440	1	-3.36
		2480	1	-2.85

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

4.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-2.15	-22.15	Pass
		2440	1	-2.15	-22.15	Pass
		2480	1	-2.15	-22.15	Pass
2M	SISO	2402	1	-2.85	-22.85	Pass
		2440	1	-2.85	-22.85	Pass
		2480	1	-2.85	-22.85	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


FCCID: 2AUARTKMU8A

4.2 Test Graph


4.2.1 Ref

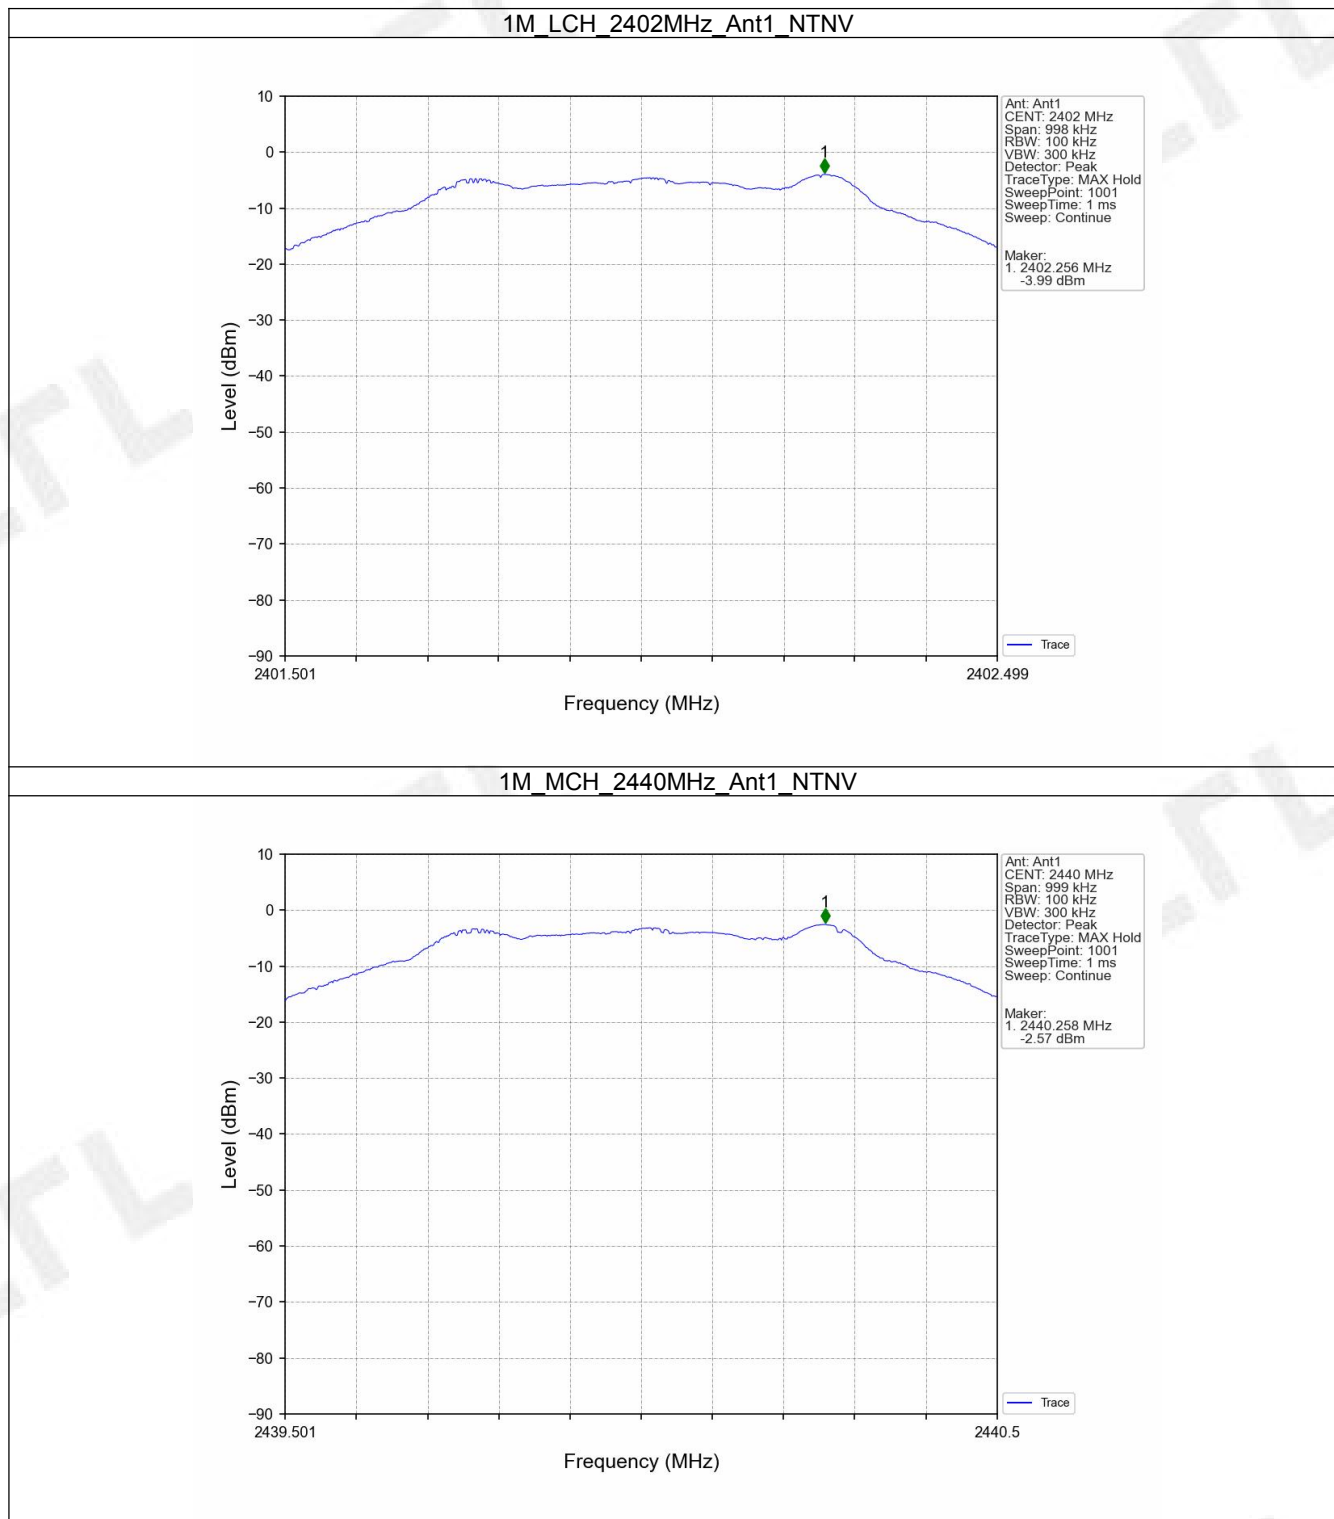

FCCID: 2AUARTKMU8A

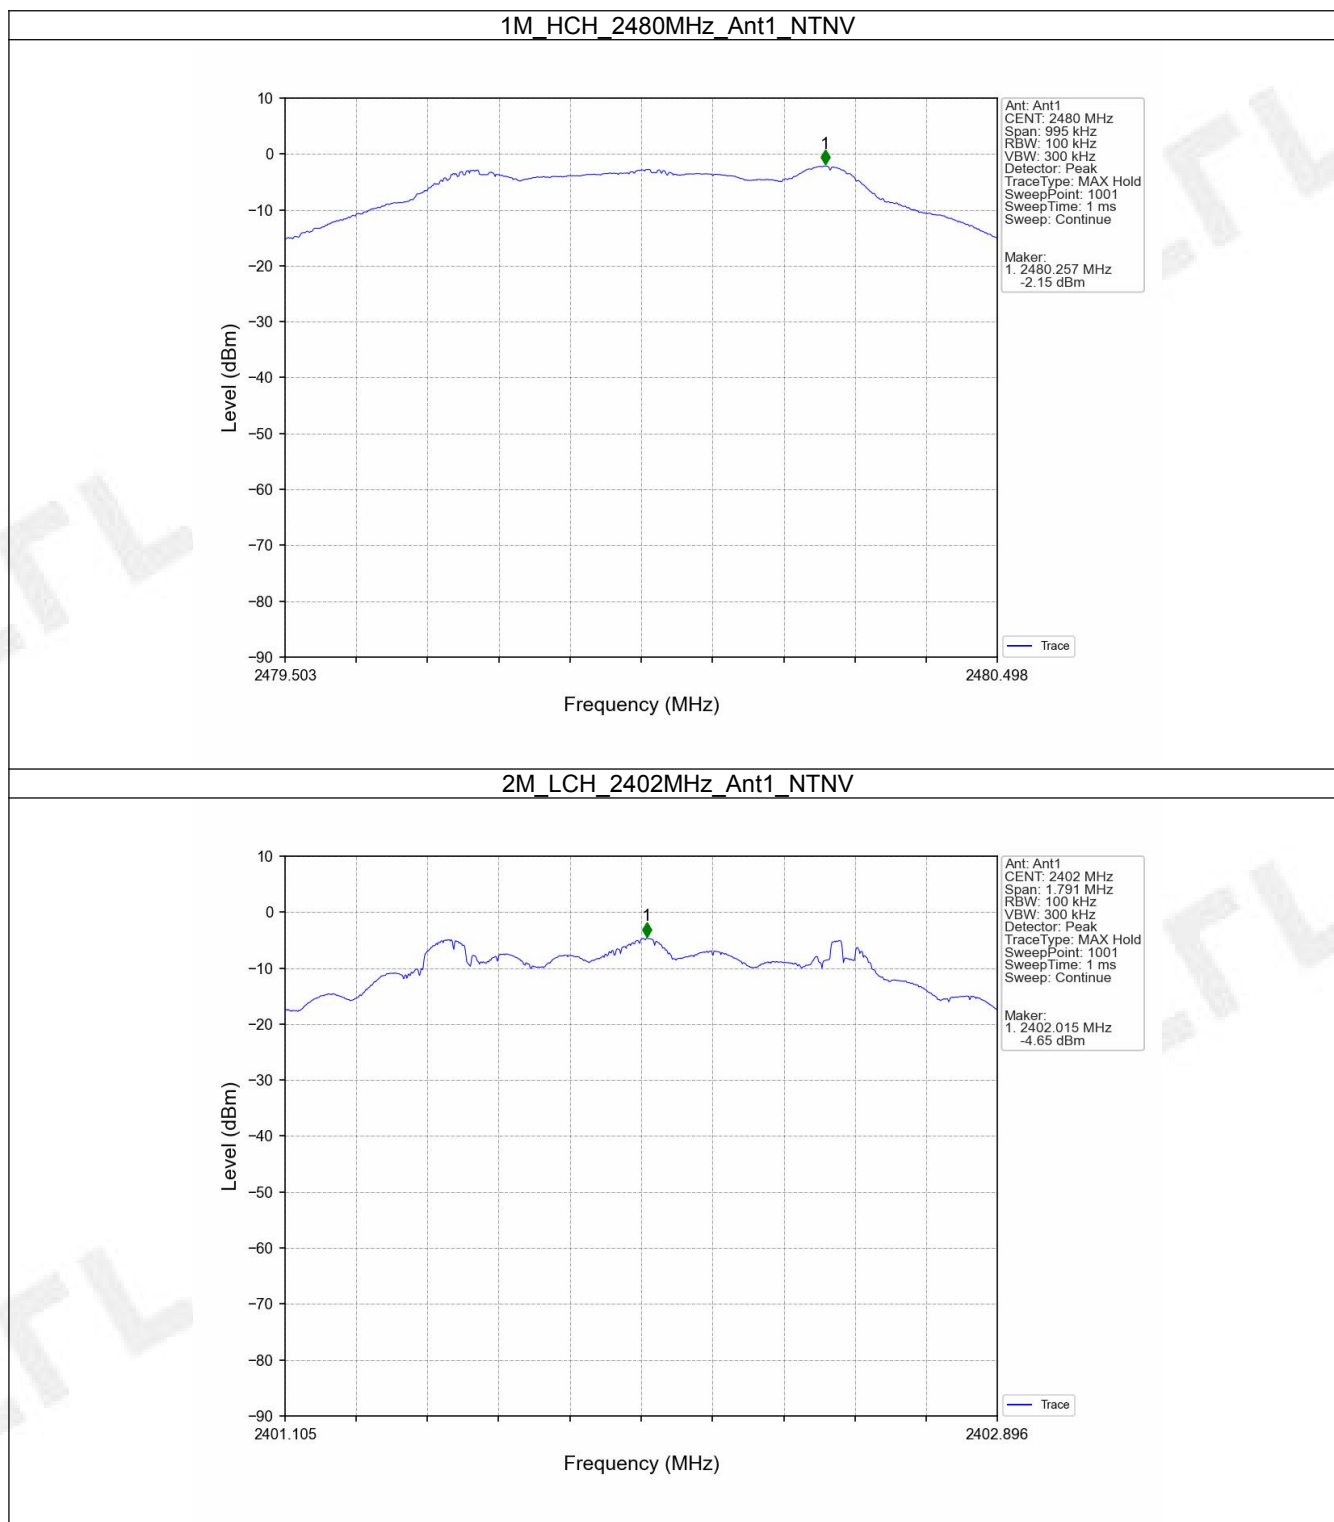


FCCID: 2AUARTKMU8A

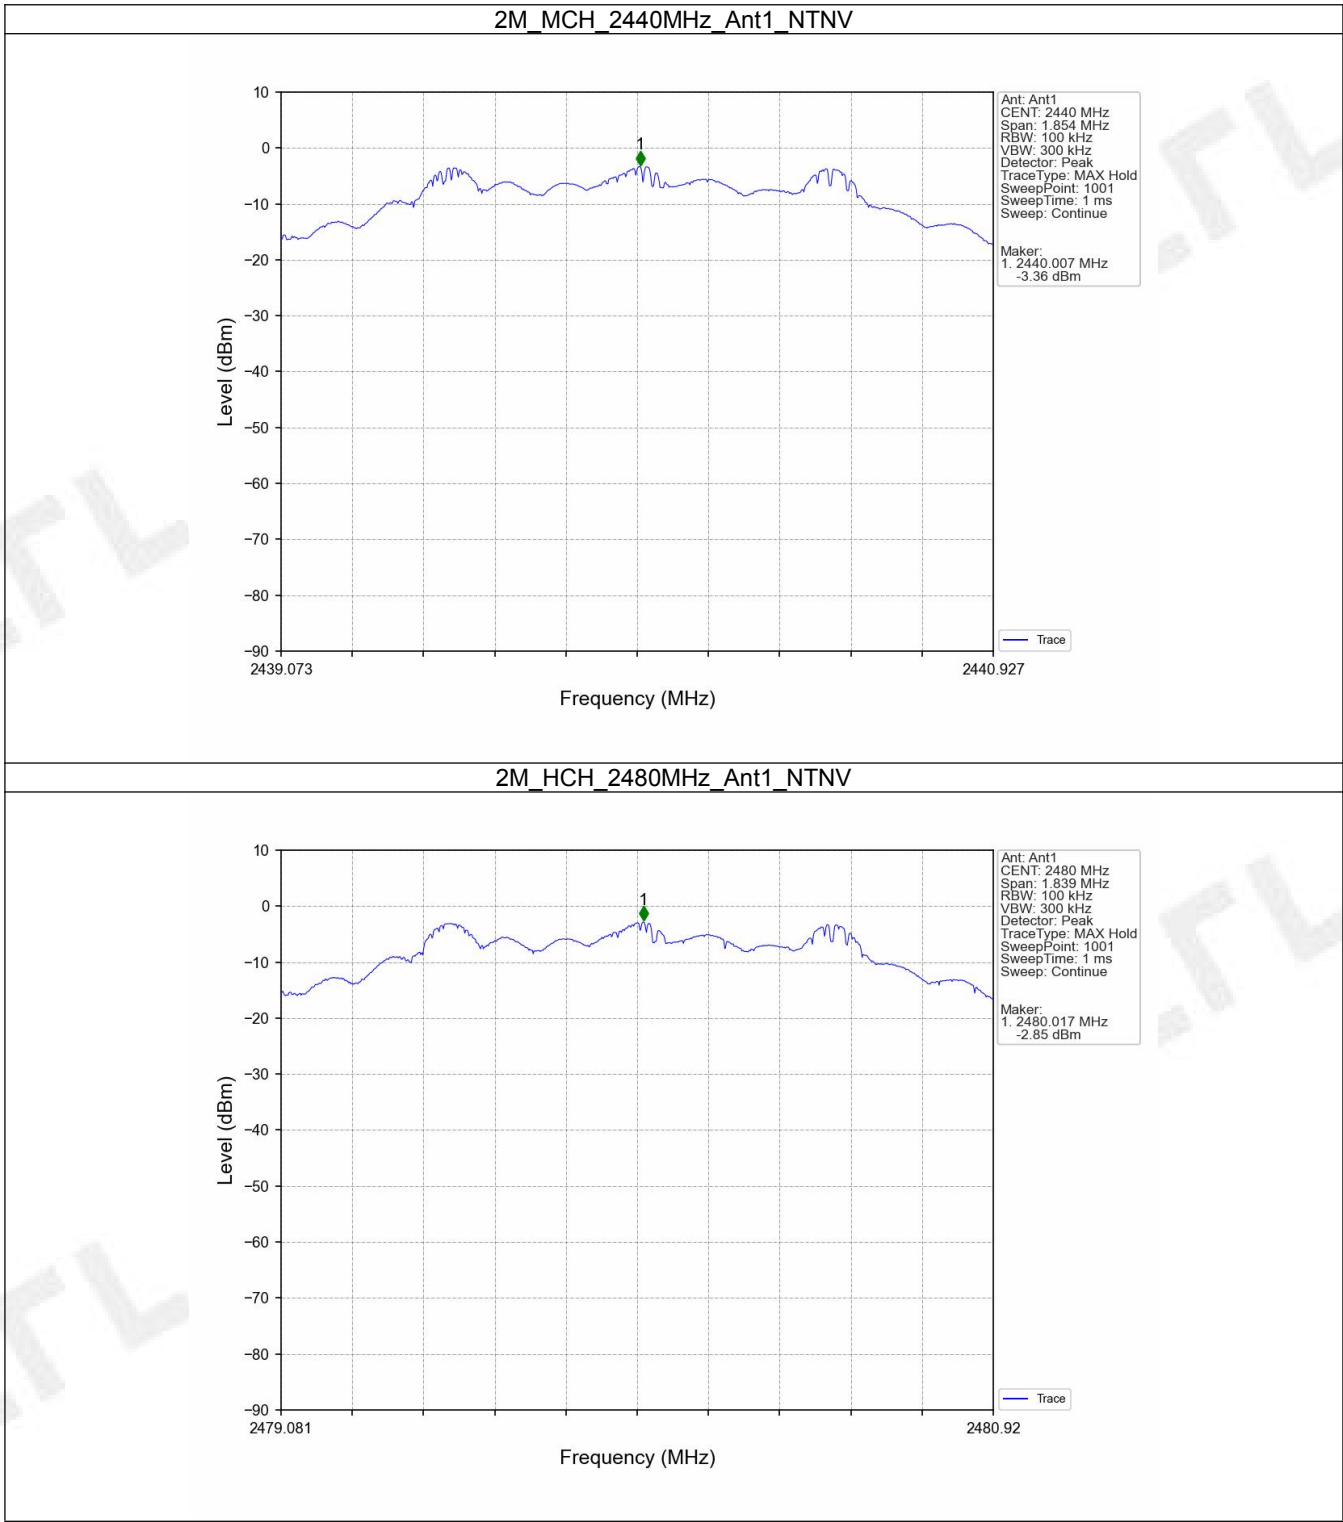


FCCID: 2AUARTKMU8A


4.2.2 CSE

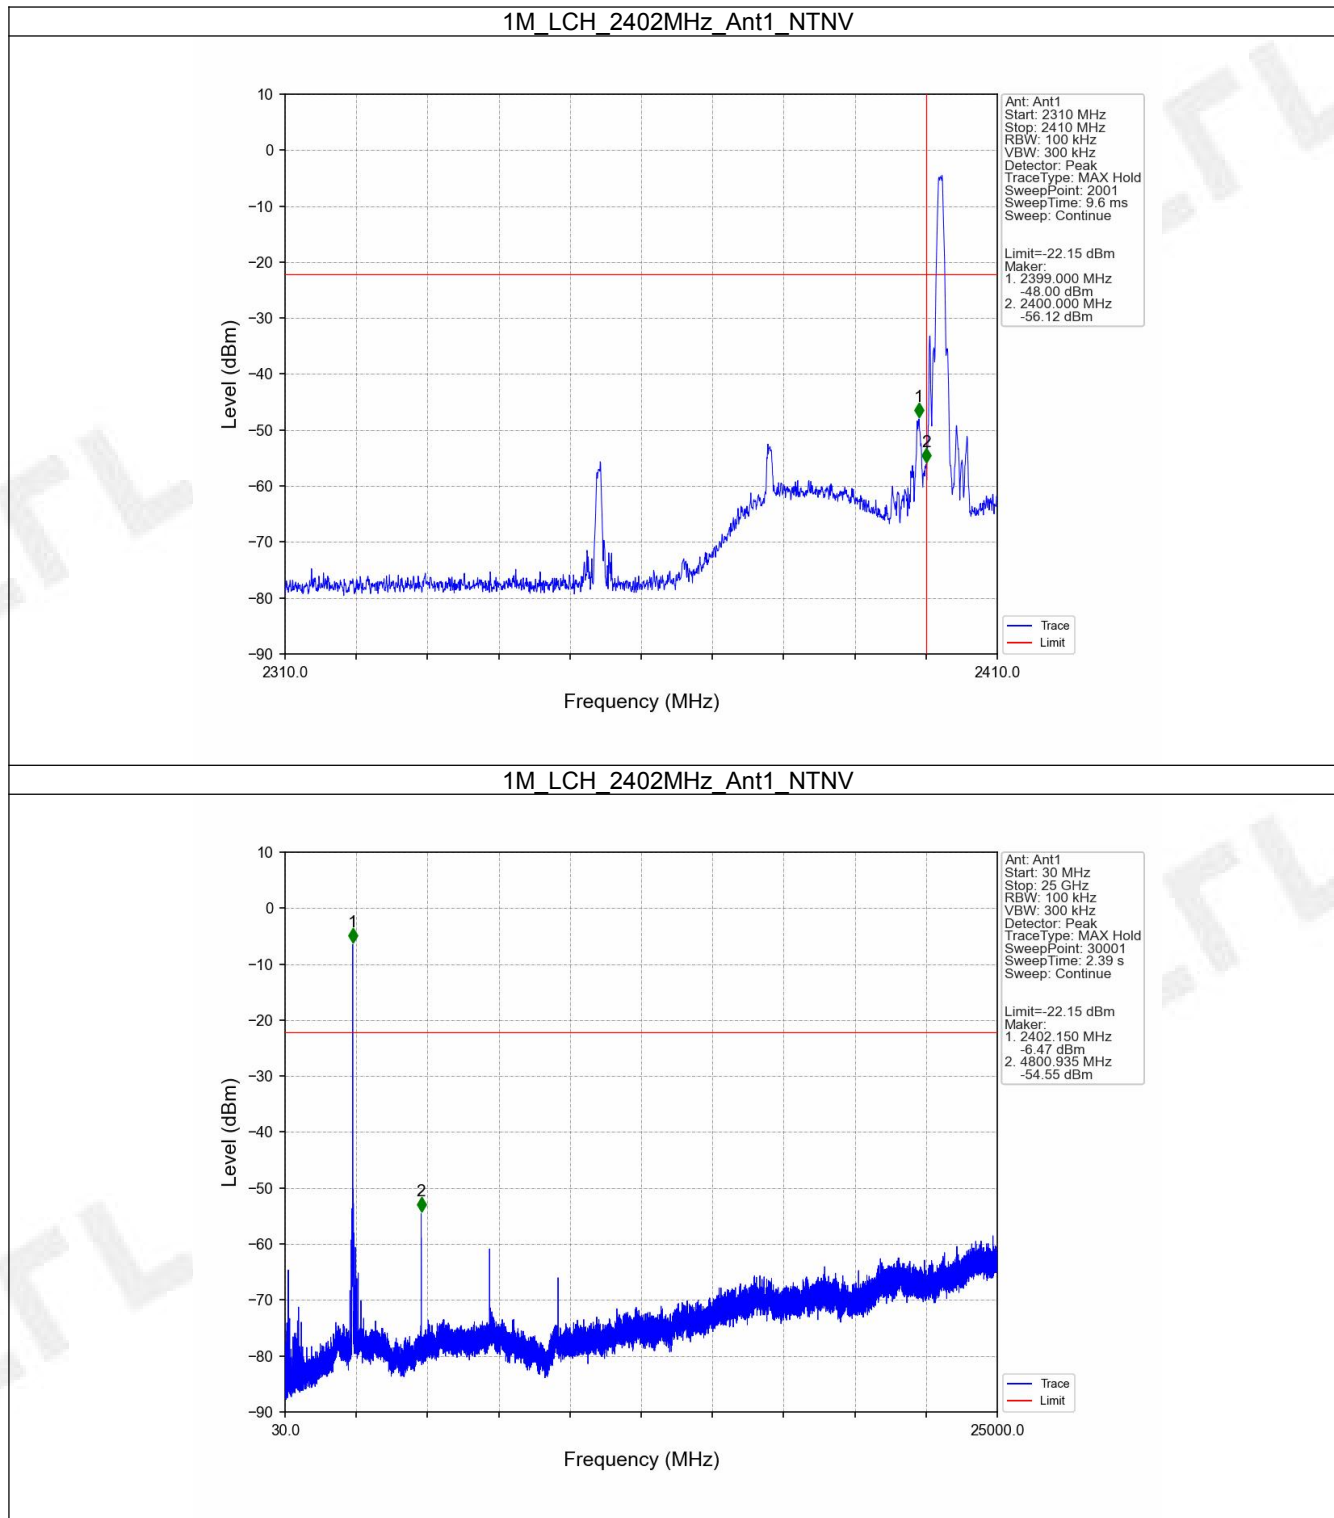


FCCID: 2AUARTKMU8A

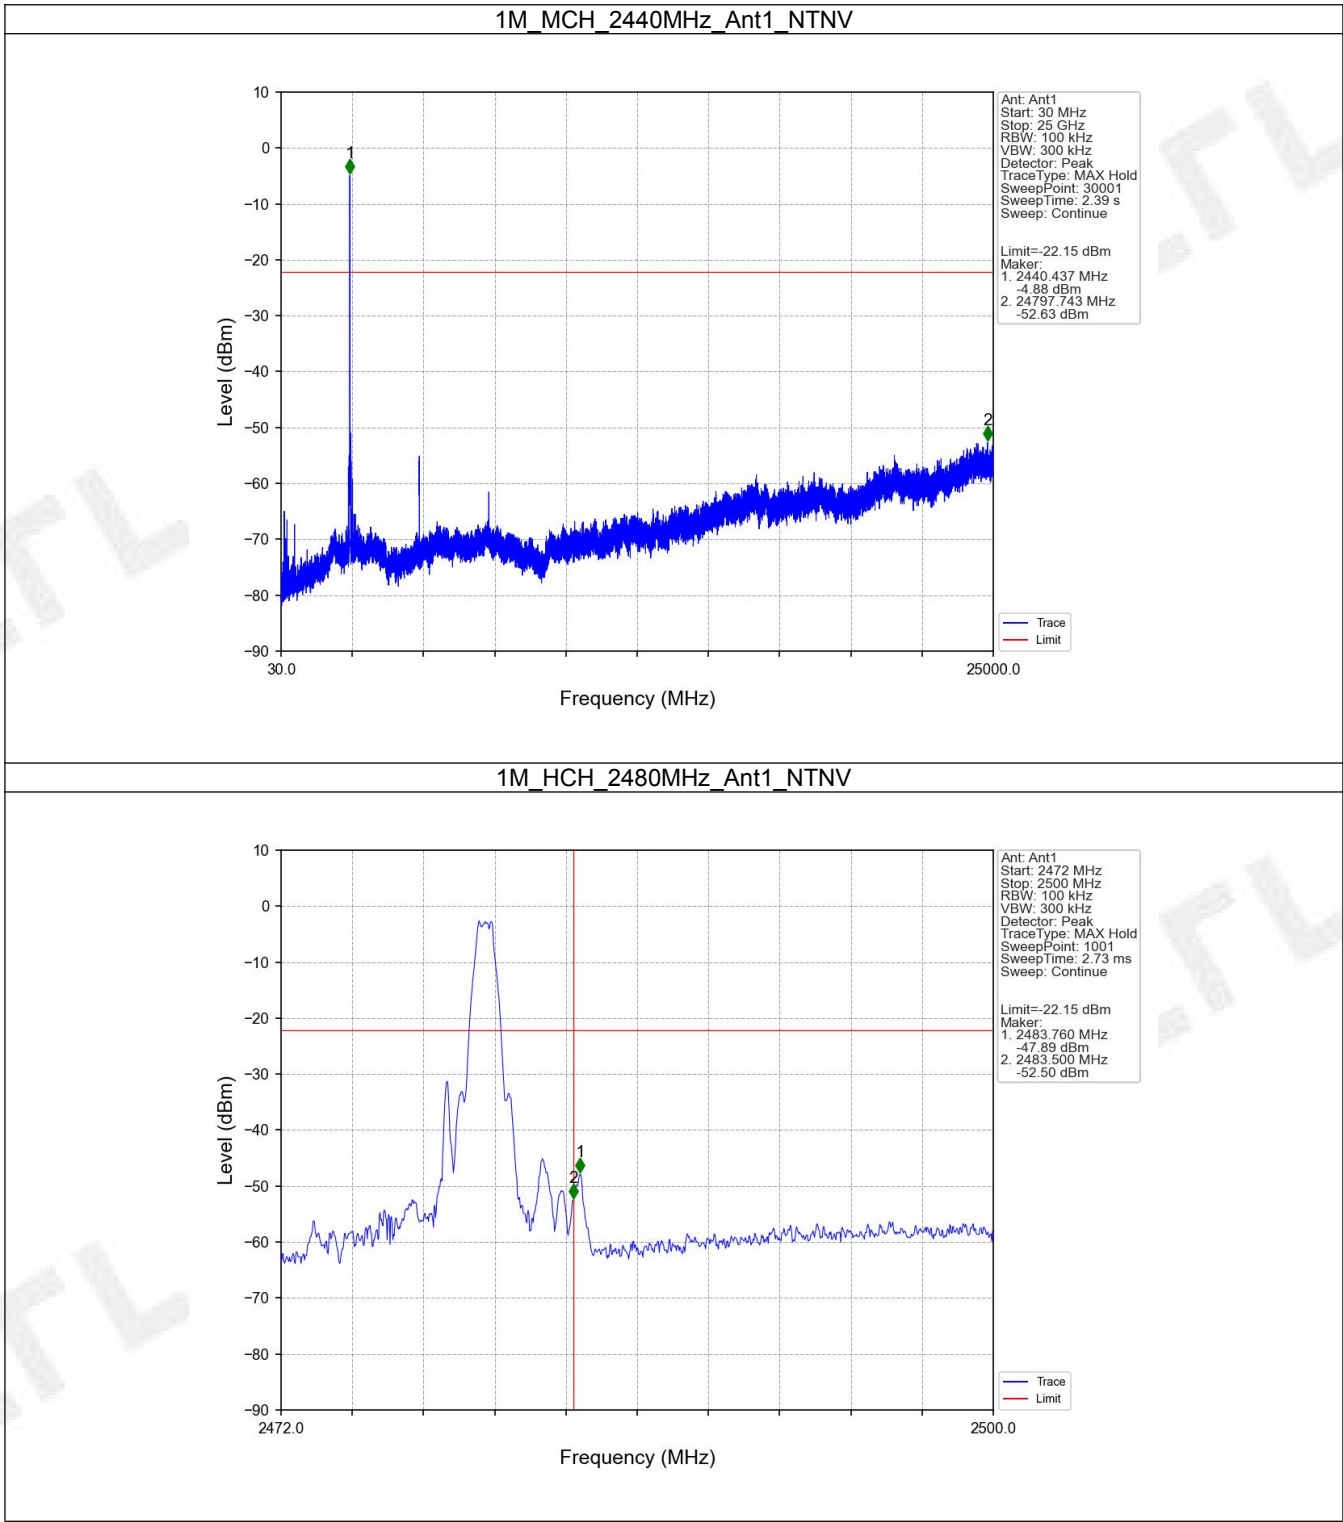

FCCID: 2AUARTKMU8A

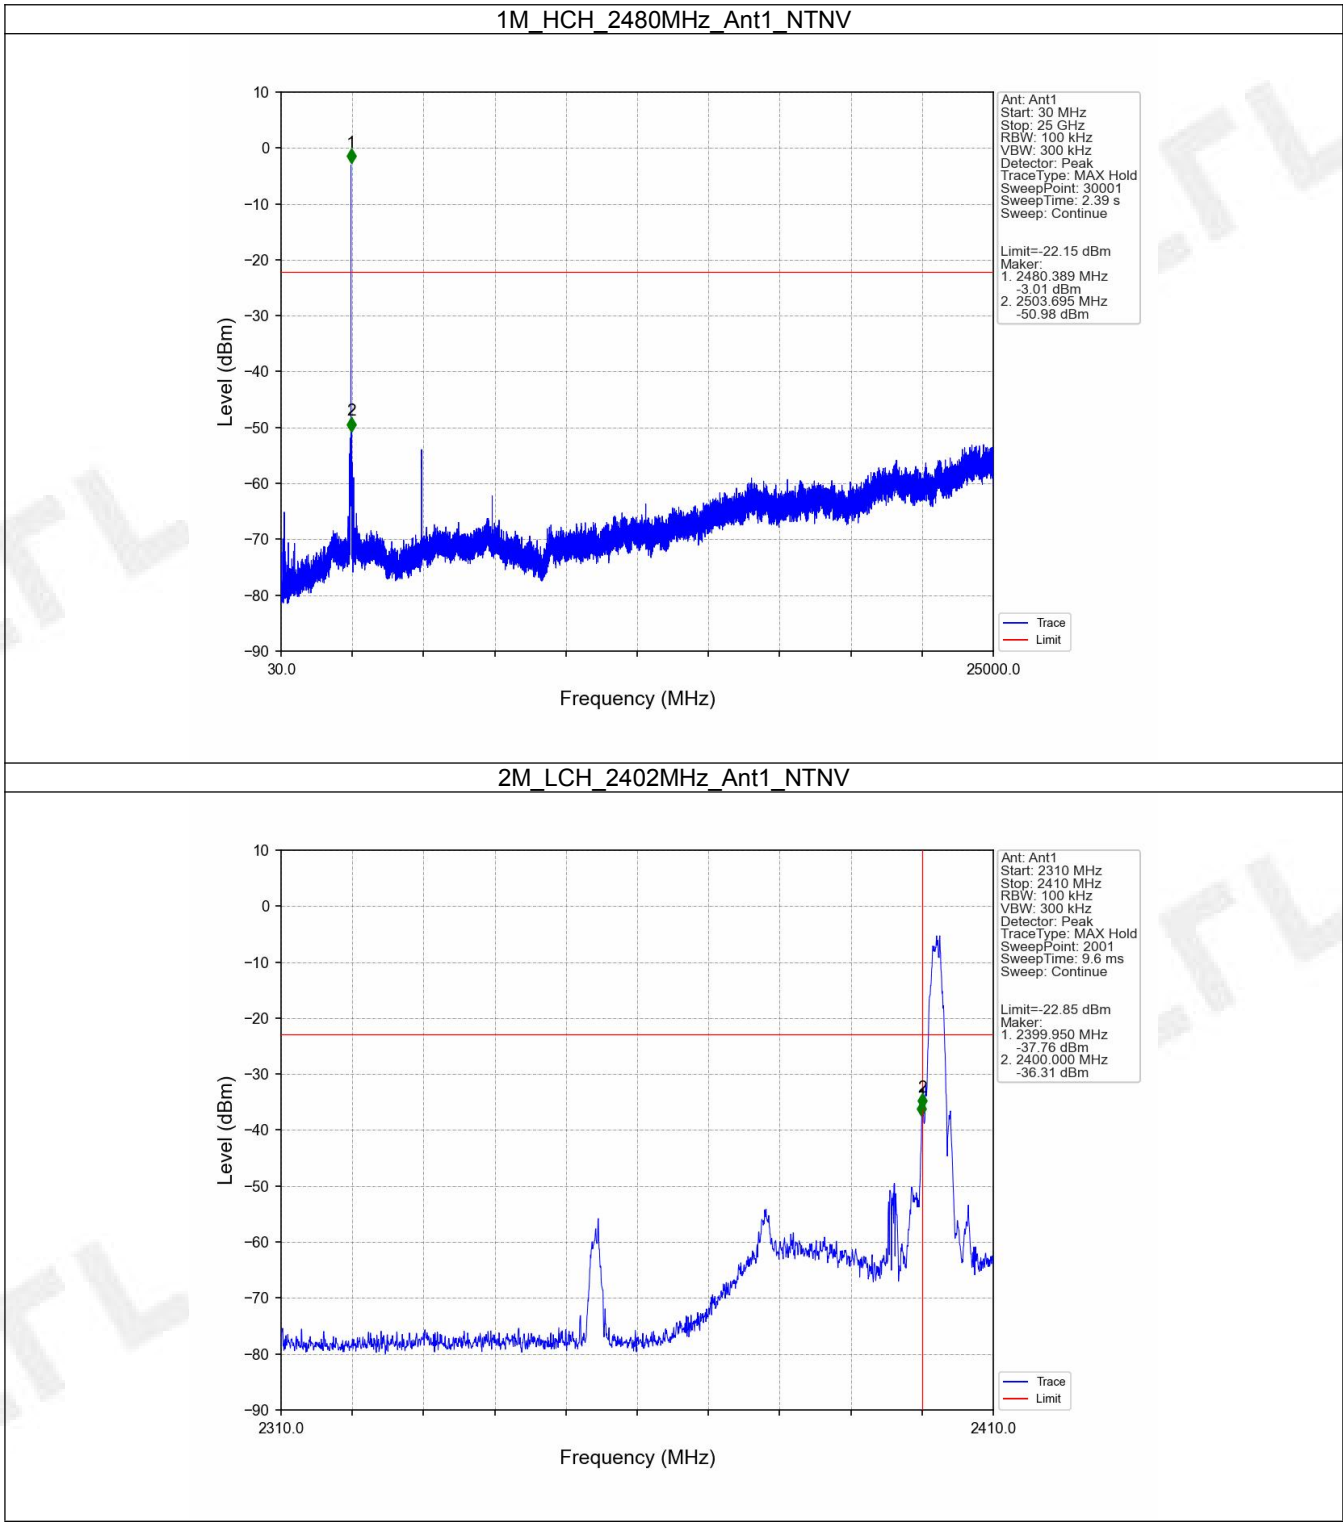

FCCID: 2AUARTKMU8A

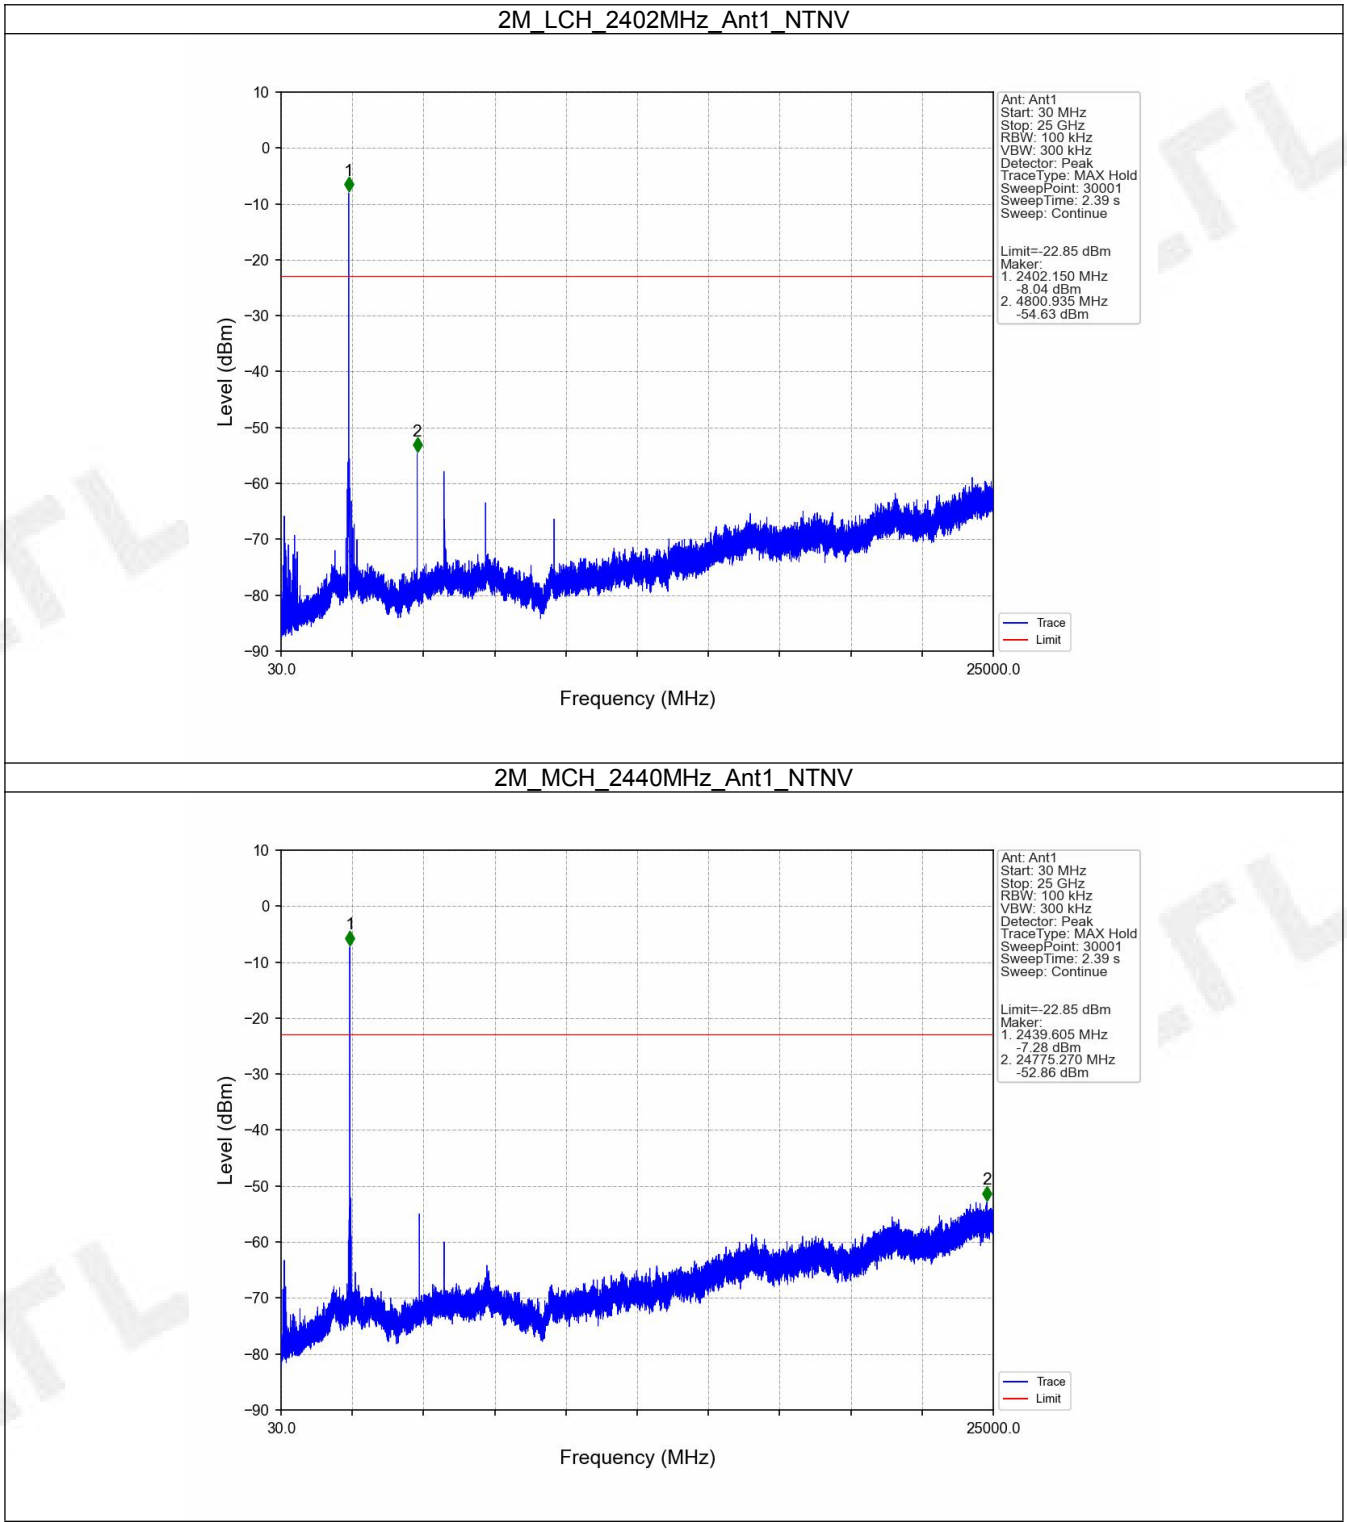

FCCID: 2AUARTKMU8A

