

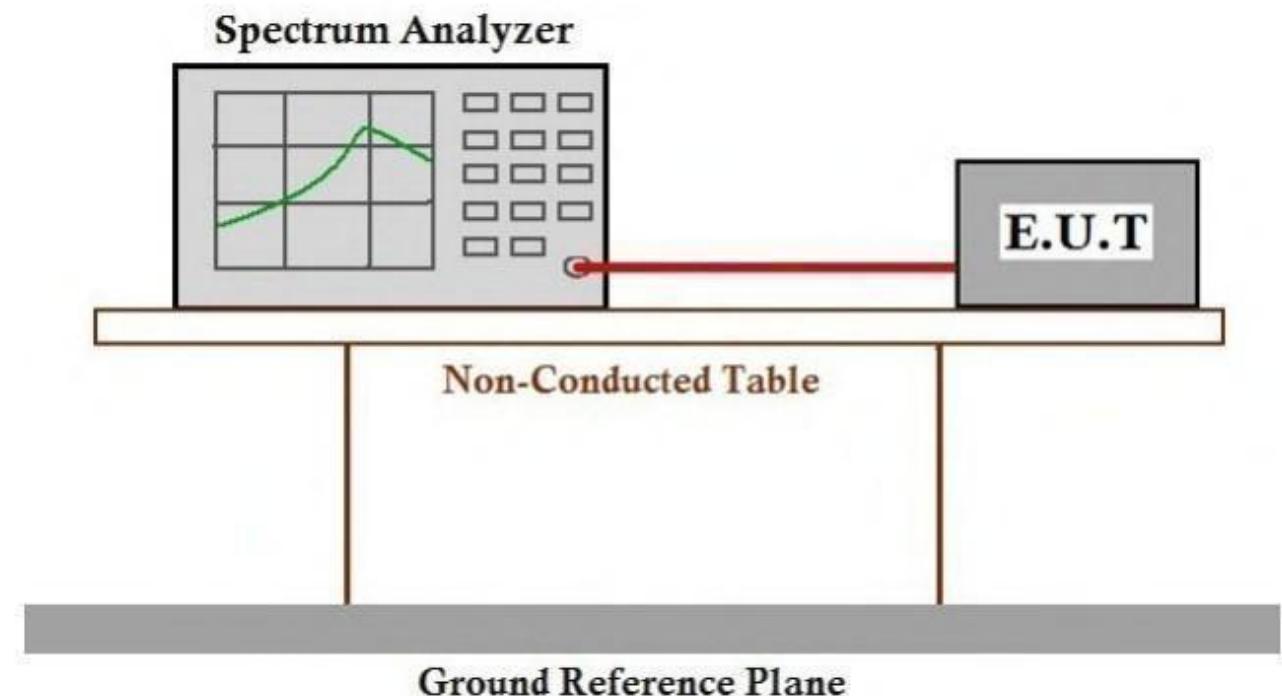
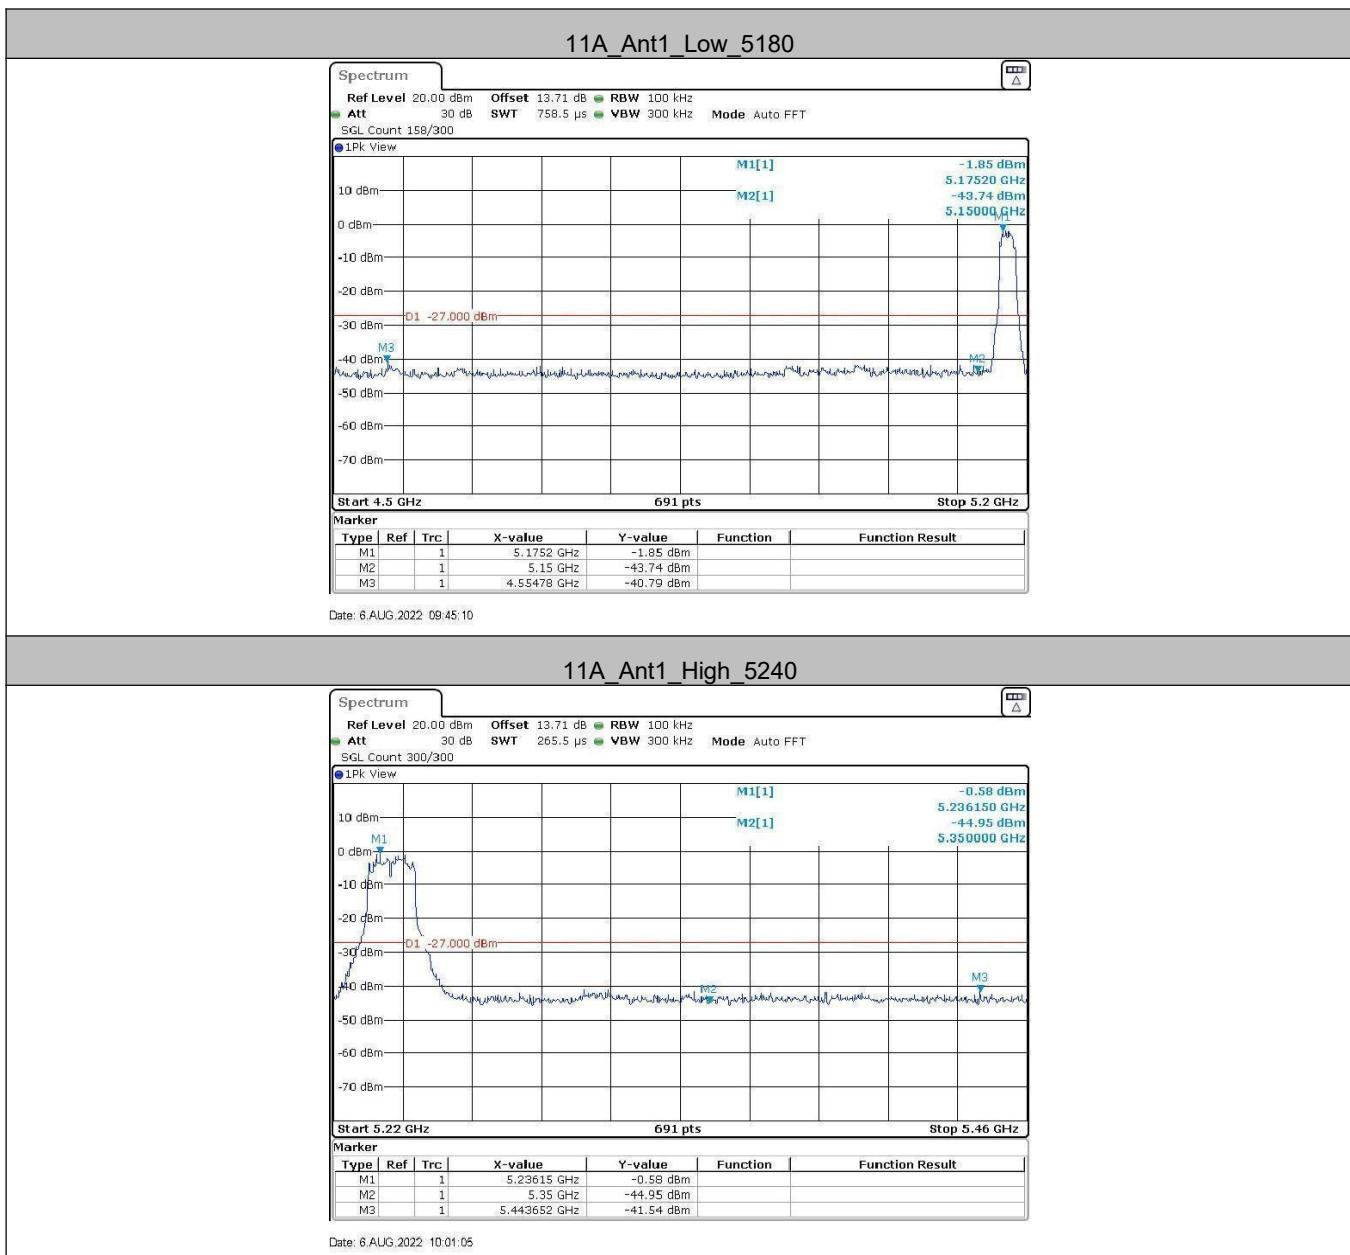



Test Setup Diagram


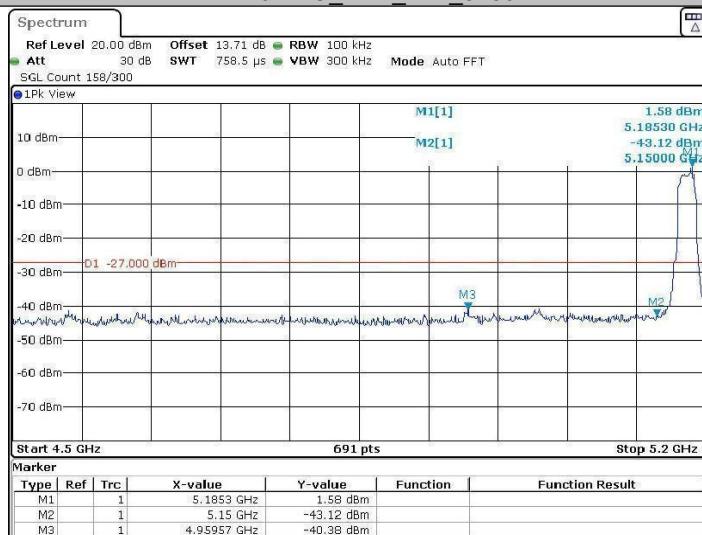



Test Graphs

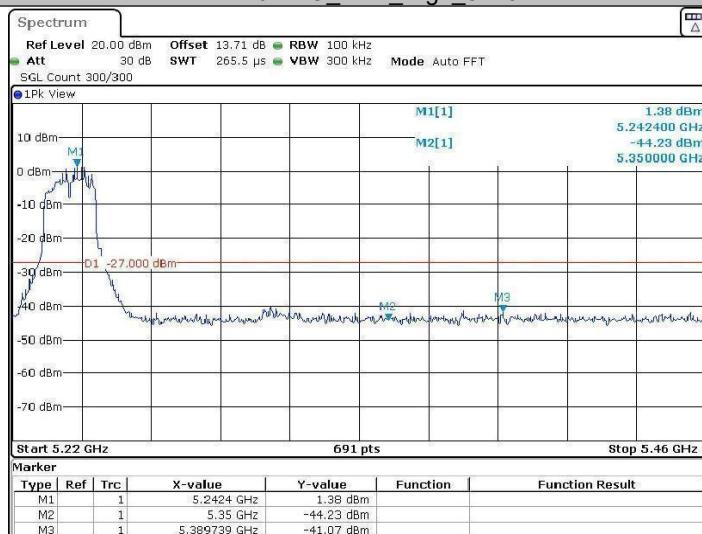


11N20SISO_Ant1_Low_5180

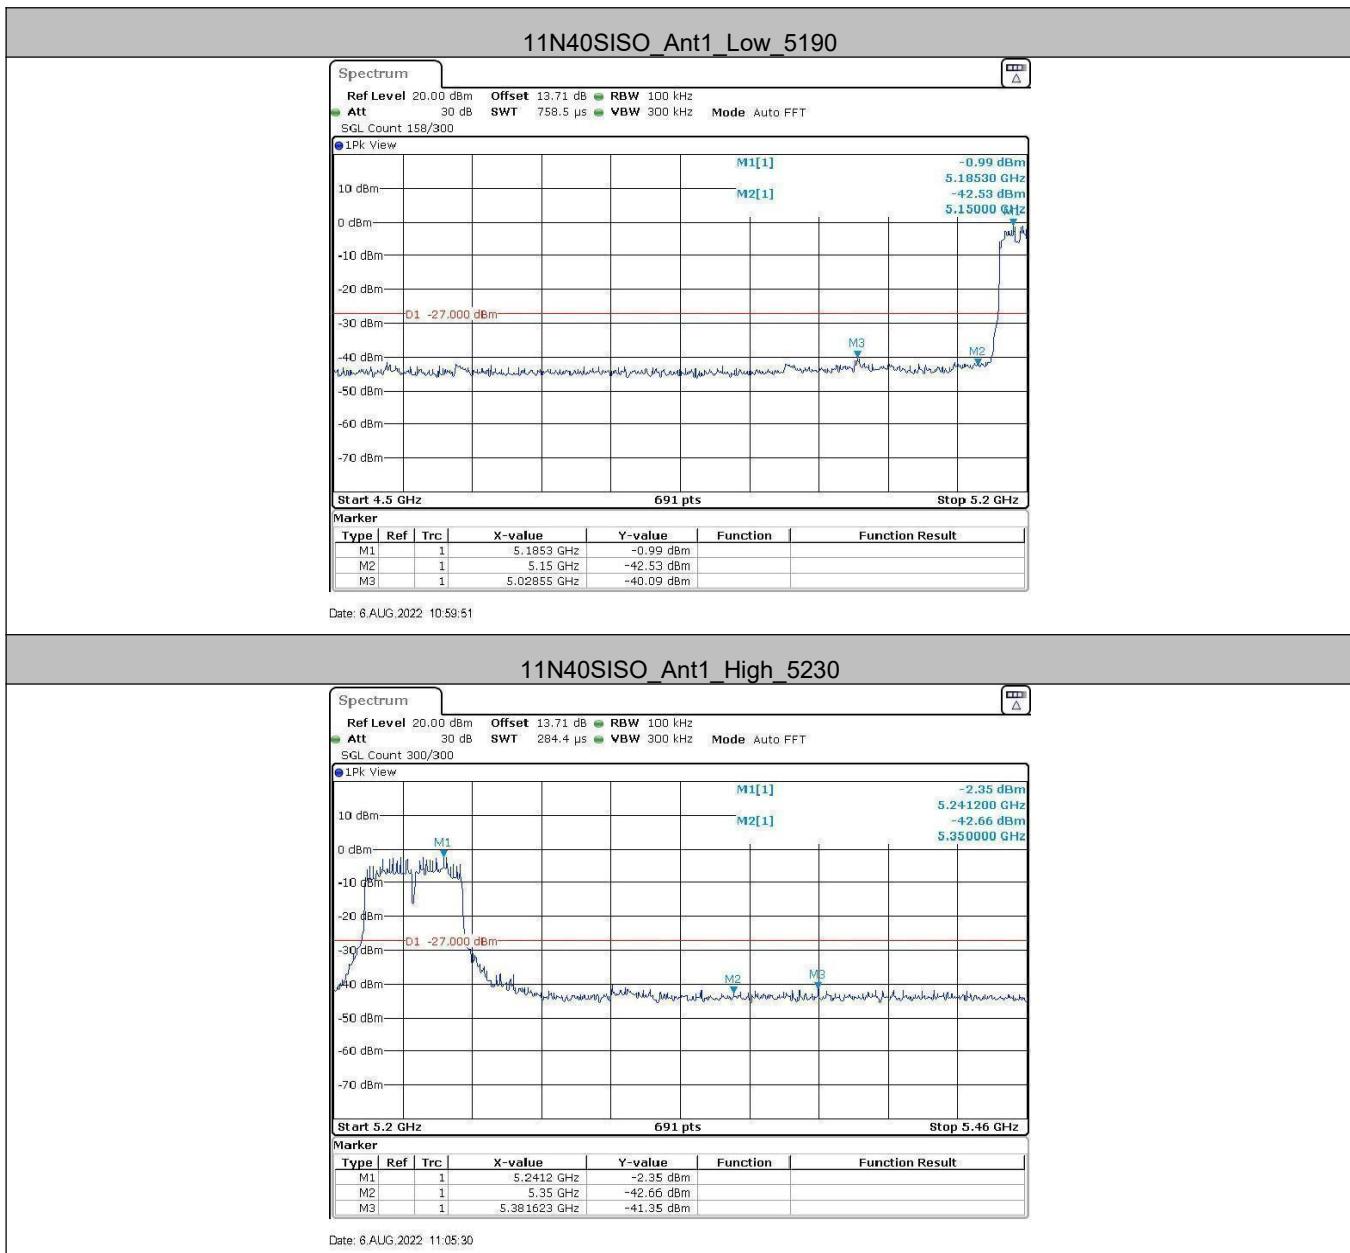11N20SISO_Ant1_High_5240

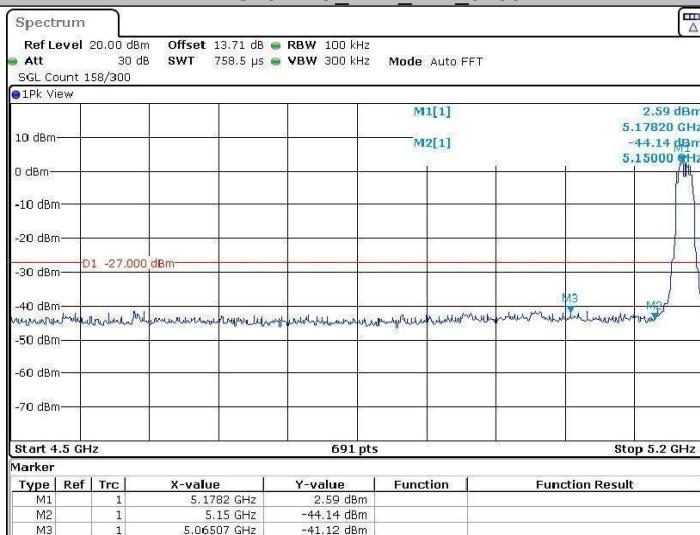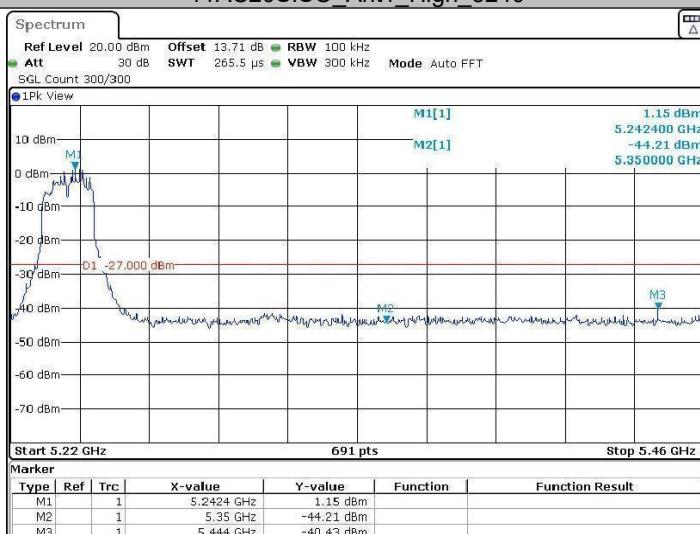

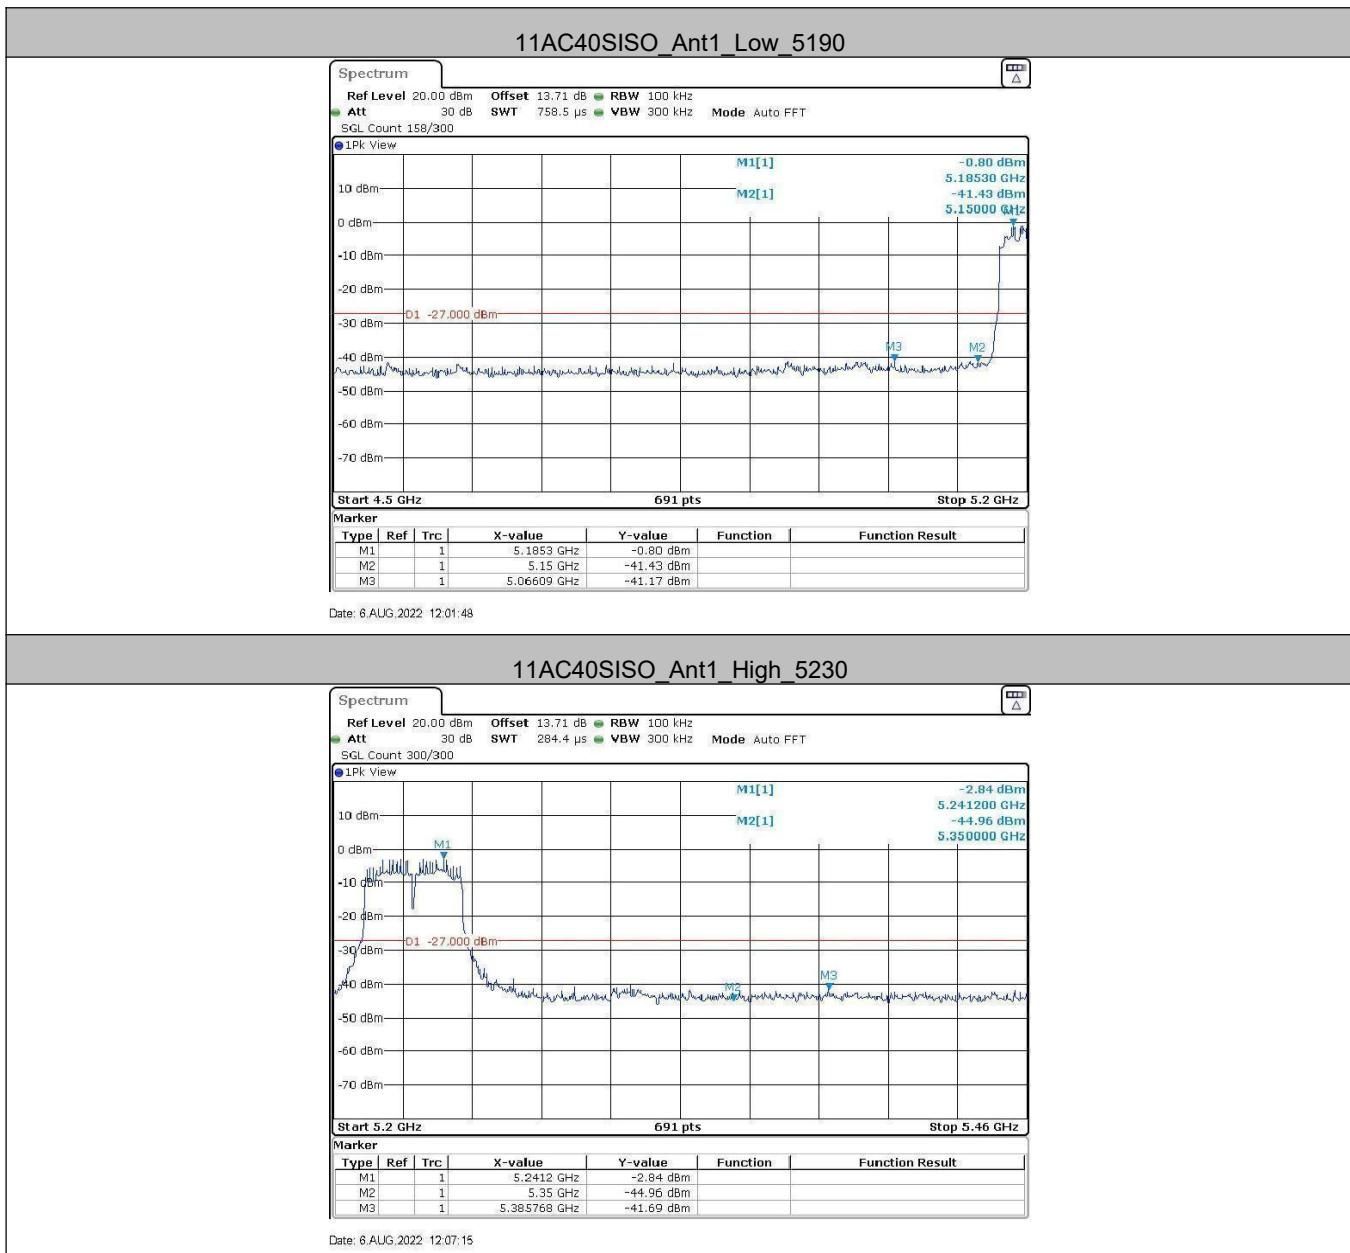
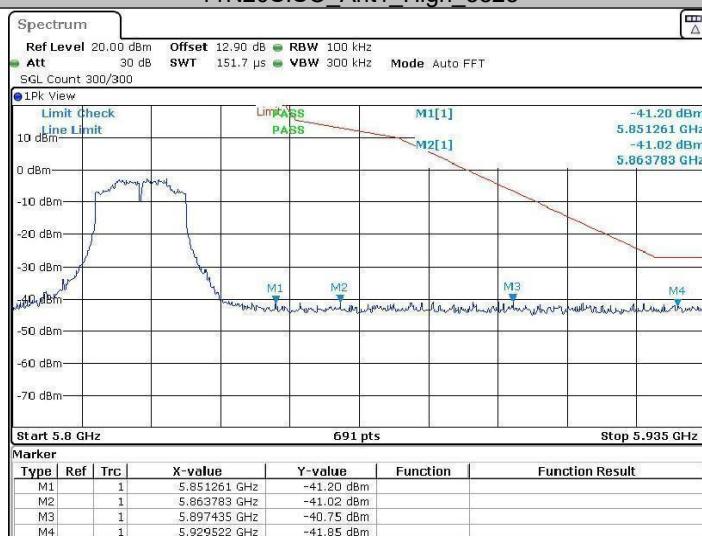
11AC20SISO_Ant1_Low_5180

11AC20SISO_Ant1_High_5240

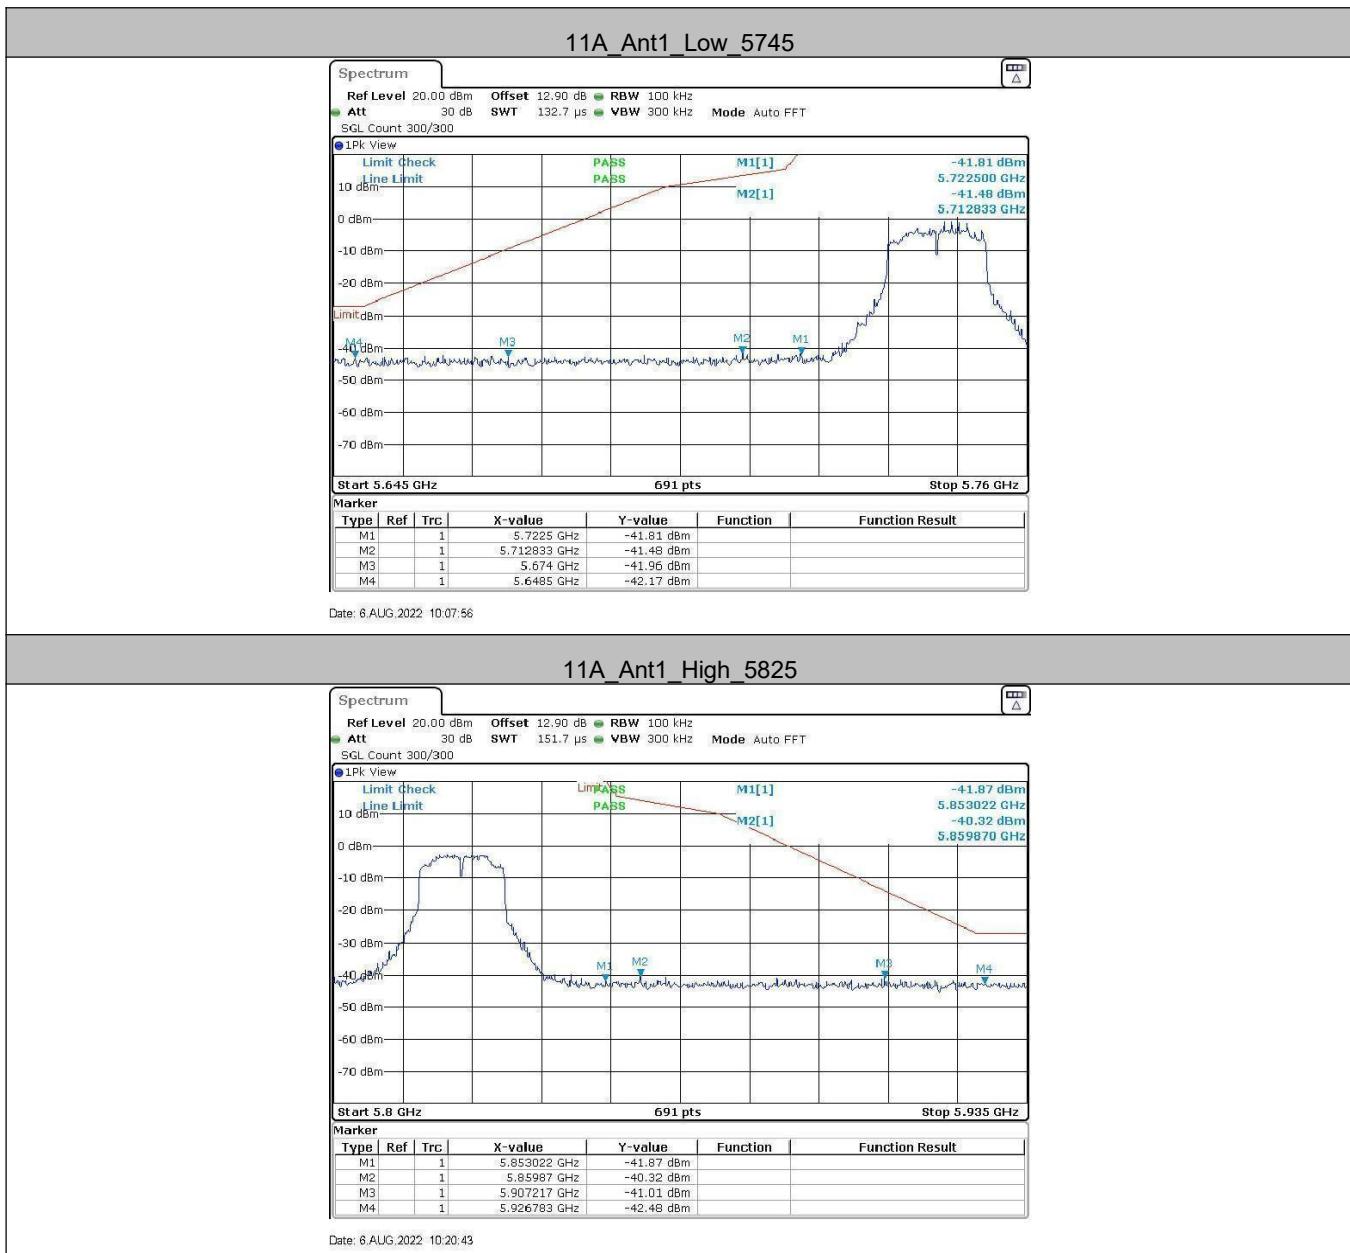
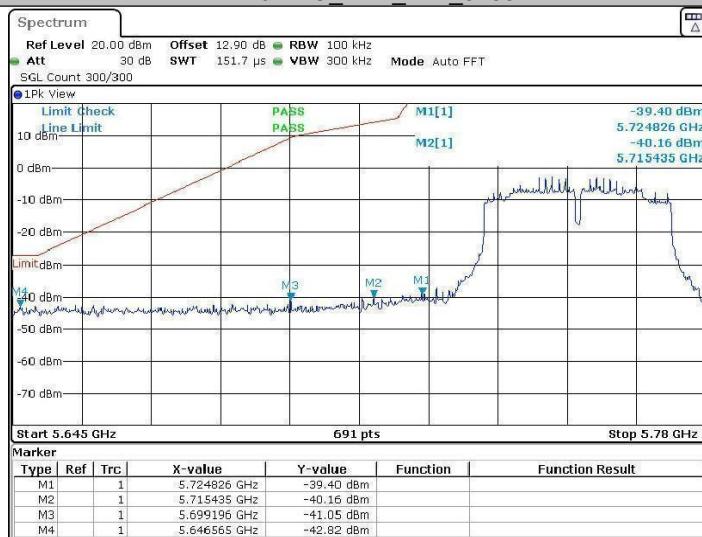
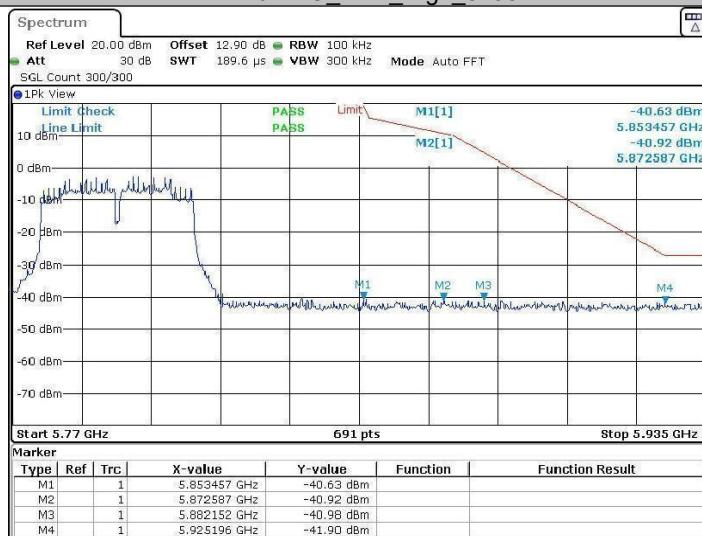







11N20SISO_Ant1_Low_5745

11N20SISO_Ant1_High_5825


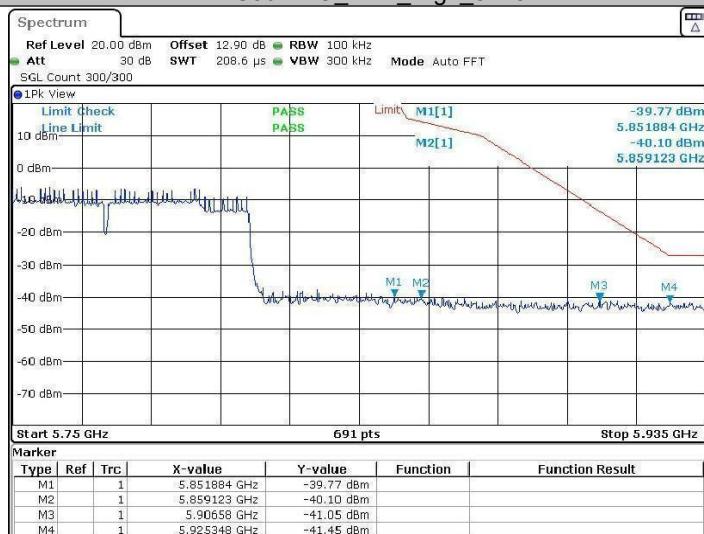
11N40SISO_Ant1_Low_5755

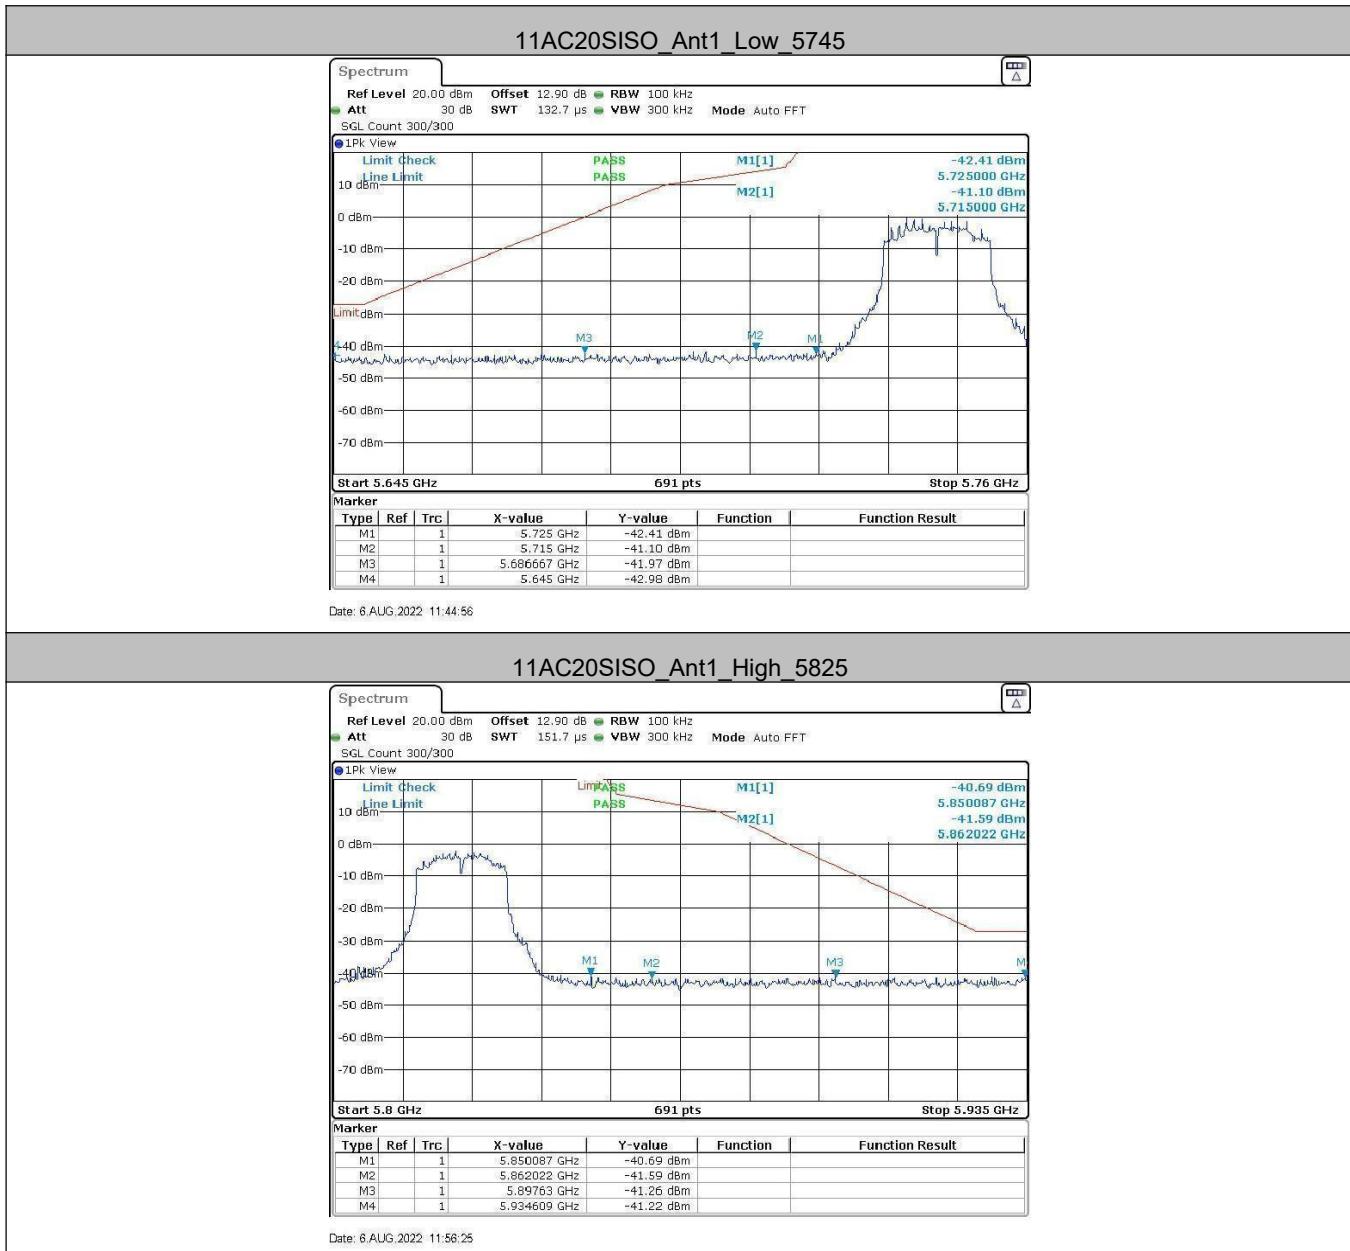11N40SISO_Ant1_High_5795






11AC80SISO_Ant1_Low_5775


Date: 6 AUG 2022 12:33:20

11AC80SISO_Ant1_High_5775


Date: 6 AUG 2022 12:33:27


Appendix E): Frequency Stability

Test Requirement 47 CFR Part 15, Subpart C 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

Limit: The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Test Setup Diagram

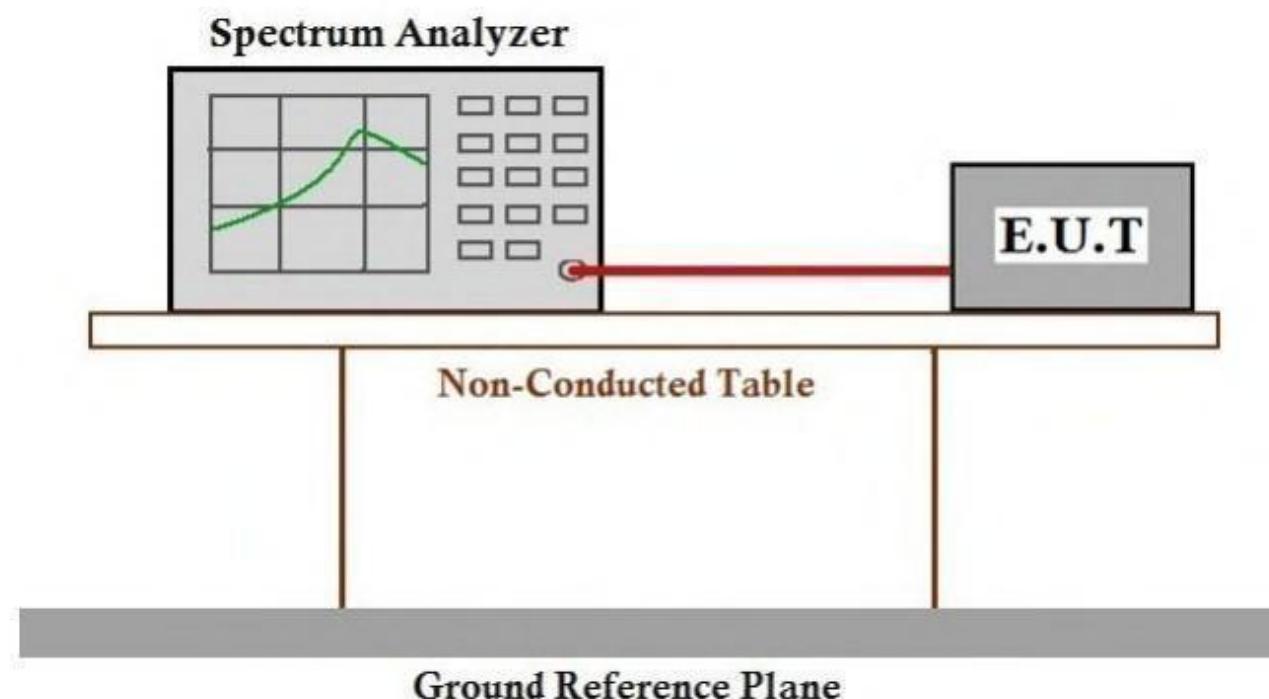

Measurement Data
Ant1


| Frequency Stability Versus Temp. | | | |
|---|----------------|---------------------------|------------------------|
| Operating Frequency: 5240 MHz | | | |
| Temp (°C) | Voltage | Measured Frequency | Frequency Drift |
| | | (MHz) | (ppm) |
| 50 | VN | 5240.04 | 7.634 |
| 40 | | 5240.09 | 17.176 |
| 30 | | 5240.01 | 1.908 |
| 20 | | 5240.08 | 15.267 |
| 10 | | 5240.05 | 9.542 |
| 0 | | 5240.06 | 11.450 |
| -10 | | 5240.03 | 5.725 |
| -20 | | 5240.04 | 7.634 |

| Frequency Stability Versus Temp. | | | |
|---|----------------|---------------------------|------------------------|
| Operating Frequency: 5210 MHz | | | |
| Temp. | Voltage | Measured Frequency | Frequency Drift |
| | | (MHz) | (ppm) |
| TN | VL | 5210.05 | 9.597 |
| | VN | 5210.02 | 3.839 |
| | VH | 5210.01 | 1.919 |

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

Appendix F): Antenna Requirement**15.203 requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

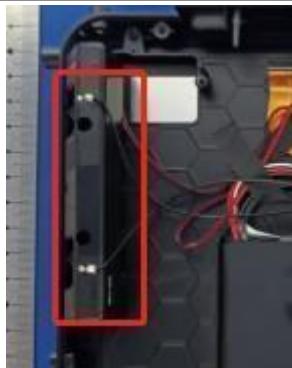EUT Antenna:

The antenna is FPC antenna.5.1G:3.73dBi,5.8G:4.55dBi

Appendix G): Operation in the absence of information to the transmit

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal link information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Operation in the absence of information to the transmit

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

Appendix H): AC Power Line Conducted Emission


| Test Procedure: | <p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p> | | | | | | | | | | | | | | |
|-----------------------|--|-----------------------|--------------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Limit: | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p> | Frequency range (MHz) | Limit (dB μ V) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dB μ V) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

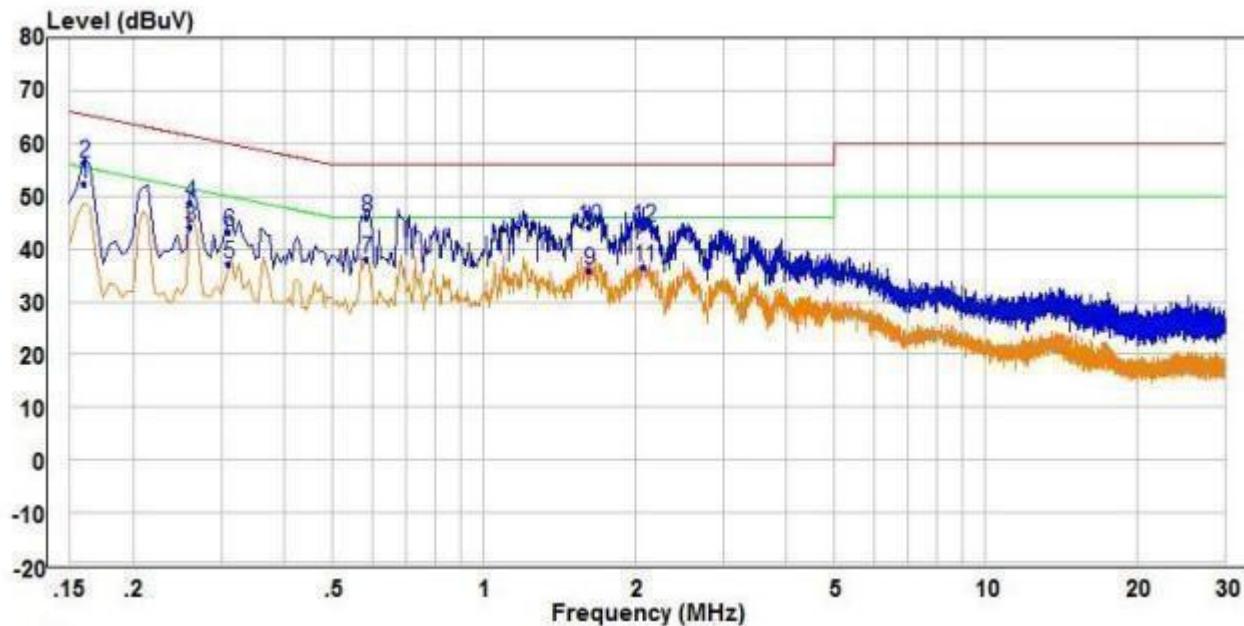

| Freq | Read | | Limit Level | Limit Line | Over Limit | Remark | Pol/Phase |
|------|-------|-------|-------------|------------|------------|--------|--------------|
| | Freq | Level | Factor | | | | |
| | MHz | | dB | dBuV | dBuV | dB | |
| 1 PP | 0.160 | 42.67 | 9.68 | 52.35 | 55.46 | -3.11 | Average Line |
| 2 QP | 0.160 | 46.59 | 9.68 | 56.27 | 65.46 | -9.19 | QP Line |
| 3 | 0.260 | 34.70 | 9.53 | 44.23 | 51.43 | -7.20 | Average Line |
| 4 | 0.260 | 39.03 | 9.53 | 48.56 | 61.43 | -12.87 | QP Line |
| 5 | 0.310 | 27.50 | 9.50 | 37.00 | 49.97 | -12.97 | Average Line |
| 6 | 0.310 | 33.59 | 9.50 | 43.09 | 59.97 | -16.88 | QP Line |
| 7 | 0.585 | 28.40 | 9.79 | 38.19 | 46.00 | -7.81 | Average Line |
| 8 | 0.585 | 36.32 | 9.79 | 46.11 | 56.00 | -9.89 | QP Line |
| 9 | 1.625 | 24.80 | 11.06 | 35.86 | 46.00 | -10.14 | Average Line |
| 10 | 1.625 | 33.09 | 11.06 | 44.15 | 56.00 | -11.85 | QP Line |
| 11 | 2.085 | 24.91 | 11.56 | 36.47 | 46.00 | -9.53 | Average Line |
| 12 | 2.085 | 32.45 | 11.56 | 44.01 | 56.00 | -11.99 | QP Line |

Neutral line:

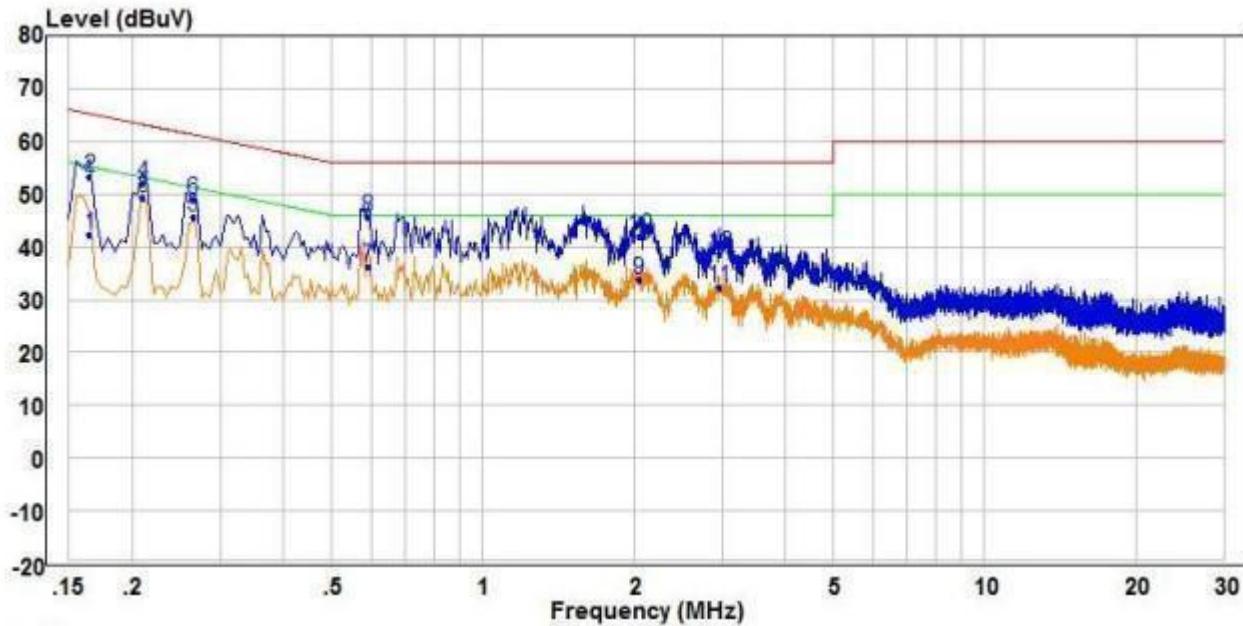

| | Freq | Read | | Limit | Over | Remark | Pol/Phase |
|----|-------|-------|--------|-------|-------|--------|---------------|
| | | Level | Factor | | | | |
| | MHz | dBuV | dB | dBuV | dBuV | dB | |
| 1 | 0.165 | 32.71 | 9.67 | 42.38 | 55.21 | -12.83 | Average |
| 2 | 0.165 | 43.57 | 9.67 | 53.24 | 65.21 | -11.97 | QP |
| 3 | PP | 0.210 | 39.78 | 9.59 | 49.37 | 53.21 | -3.84 Average |
| 4 | 0.210 | 42.38 | 9.59 | 51.97 | 63.21 | -11.24 | QP |
| 5 | 0.265 | 36.07 | 9.52 | 45.59 | 51.27 | -5.68 | Average |
| 6 | 0.265 | 39.43 | 9.52 | 48.95 | 61.27 | -12.32 | QP |
| 7 | 0.590 | 26.46 | 9.79 | 36.25 | 46.00 | -9.75 | Average |
| 8 | QP | 0.590 | 35.74 | 9.79 | 45.53 | 56.00 | -10.47 |
| 9 | 2.045 | 24.14 | 9.75 | 33.89 | 46.00 | -12.11 | Average |
| 10 | 2.045 | 32.24 | 9.75 | 41.99 | 56.00 | -14.01 | QP |
| 11 | 2.960 | 22.52 | 9.77 | 32.29 | 46.00 | -13.71 | Average |
| 12 | 2.960 | 29.00 | 9.77 | 38.77 | 56.00 | -17.23 | QP |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. The 6Mbps of rate of 802.11A_5240 is the worst case, only the worst data recorded in the report.

Appendix I): Restricted bands around fundamental frequency (Radiated Emission)

| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark | |
|-----------------|---|---------------------------|------------------|--------|------------|--|
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak | |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak | |
| | | Peak | 1MHz | 10Hz | Average | |
| Test Procedure: | <p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. | | | | | |
| Limit: | Frequency | Limit (dB μ V/m @3cm) | Remark | | | |
| | 30MHz-88MHz | 40.0 | Quasi-peak Value | | | |
| | 88MHz-216MHz | 43.5 | Quasi-peak Value | | | |
| | 216MHz-960MHz | 46.0 | Quasi-peak Value | | | |
| | 960MHz-1GHz | 54.0 | Quasi-peak Value | | | |
| | Above 1GHz | 54.0 | Average Value | | | |
| | | 74.0 | Peak Value | | | |

Test plot as follows:

| Worse case mode: | | 802.11a(6Mbps) | | Test channel: | | 36 | |
|------------------|---------------|----------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5150 | 58.24 | -9.2 | 49.04 | 74 | -24.96 | peak | H |
| 5150 | 44.44 | -9.2 | 35.24 | 54 | -18.76 | AVG | H |
| 5150 | 58.59 | -9.2 | 49.39 | 74 | -24.61 | peak | V |
| 5150 | 44.86 | -9.2 | 35.66 | 54 | -18.34 | AVG | V |

| Worse case mode: | | 802.11a(6Mbps) | | Test channel: | | 48 | |
|------------------|---------------|----------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5350 | 60.09 | -9.39 | 50.70 | 74 | -23.30 | peak | H |
| 5350 | 46.47 | -9.39 | 37.08 | 54 | -16.92 | AVG | H |
| 5350 | 59.31 | -9.39 | 49.92 | 74 | -24.08 | peak | V |
| 5350 | 46.60 | -9.39 | 37.21 | 54 | -16.79 | AVG | V |

| Worse case mode: | | 802.11a(6Mbps) | | Test channel: | | 149 | |
|------------------|---------------|----------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5725 | 57.95 | -9.29 | 48.66 | 74 | -25.34 | peak | H |
| 5725 | 44.09 | -9.29 | 34.80 | 54 | -19.20 | AV | H |
| 5725 | 57.99 | -9.29 | 48.70 | 74 | -25.30 | peak | V |
| 5725 | 46.45 | -9.29 | 37.16 | 54 | -16.84 | AV | V |

| Worse case mode: | | 802.11a(6Mbps) | | Test channel: | | 165 | |
|------------------|---------------|----------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5850 | 58.44 | -9.2 | 49.24 | 74 | -24.76 | peak | H |
| 5850 | 44.02 | -9.2 | 34.82 | 54 | -19.18 | AV | H |
| 5850 | 59.09 | -9.2 | 49.89 | 74 | -24.11 | peak | V |
| 5850 | 44.91 | -9.2 | 35.71 | 54 | -18.29 | AV | V |

| Worse case mode: | | 802.11n(HT20)(6.5Mbps) | | Test channel: | | 36 | |
|------------------|---------------|------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5150 | 59.38 | -9.39 | 49.99 | 74 | -24.01 | peak | H |
| 5150 | 46.59 | -9.39 | 37.20 | 54 | -16.80 | AVG | H |
| 5150 | 59.26 | -9.39 | 49.87 | 74 | -24.13 | peak | V |
| 5150 | 46.38 | -9.39 | 36.99 | 54 | -17.01 | AVG | V |

| Worse case mode: | | 802.11n(HT20)(6.5Mbps) | | Test channel: | | 48 | |
|------------------|---------------|------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5350 | 57.69 | -9.29 | 48.40 | 74 | -25.60 | peak | H |
| 5350 | 44.45 | -9.29 | 35.16 | 54 | -18.84 | AVG | H |
| 5350 | 57.93 | -9.29 | 48.64 | 74 | -25.36 | peak | V |
| 5350 | 45.49 | -9.29 | 36.20 | 54 | -17.80 | AVG | V |

| Worse case mode: | | 802.11n(HT20)(6.5Mbps) | | Test channel: | | 149 | |
|------------------|---------------|------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5725 | 58.40 | -9.2 | 49.20 | 74 | -24.80 | peak | H |
| 5725 | 44.38 | -9.2 | 35.18 | 54 | -18.82 | AV | H |
| 5725 | 58.65 | -9.2 | 49.45 | 74 | -24.55 | peak | V |
| 5725 | 44.19 | -9.2 | 34.99 | 54 | -19.01 | AV | V |

| Worse case mode: | | 802.11n(HT20)(6.5Mbps) | | Test channel: | | 165 | |
|------------------|---------------|------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5850 | 59.85 | -9.39 | 50.46 | 74 | -23.54 | peak | H |
| 5850 | 46.20 | -9.39 | 36.81 | 54 | -17.19 | AV | H |
| 5850 | 60.16 | -9.39 | 50.77 | 74 | -23.23 | peak | V |
| 5850 | 46.94 | -9.39 | 37.55 | 54 | -16.45 | AV | V |

| Worse case mode: | | 802.11n(HT40)(13.5Mbps) | | Test channel: | | 38 | |
|------------------|---------------|-------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5150 | 58.43 | -9.29 | 49.14 | 74 | -24.86 | peak | H |
| 5150 | 44.19 | -9.29 | 34.90 | 54 | -19.10 | AVG | H |
| 5150 | 58.26 | -9.29 | 48.97 | 74 | -25.03 | peak | V |
| 5150 | 46.33 | -9.29 | 37.04 | 54 | -16.96 | AVG | V |

| Worse case mode: | | 802.11n(HT40)(13.5Mbps) | | Test channel: | | 46 | |
|------------------|---------------|-------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5350 | 59.14 | -9.2 | 49.94 | 74 | -24.06 | peak | H |
| 5350 | 44.53 | -9.2 | 35.33 | 54 | -18.67 | AVG | H |
| 5350 | 58.49 | -9.2 | 49.29 | 74 | -24.71 | peak | V |
| 5350 | 44.65 | -9.2 | 35.45 | 54 | -18.55 | AVG | V |

| Worse case mode: | | 802.11n(HT40)(13.5Mbps) | | Test channel: | | 151 | |
|------------------|---------------|-------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | |
| 5725 | 59.82 | -9.39 | 50.43 | 74 | -23.57 | peak | H |
| 5725 | 46.96 | -9.39 | 37.57 | 54 | -16.43 | AV | H |
| 5725 | 59.42 | -9.39 | 50.03 | 74 | -23.97 | peak | V |
| 5725 | 46.72 | -9.39 | 37.33 | 54 | -16.67 | AV | V |

| Worse case mode: | | 802.11n(HT40)(13.5Mbps) | | Test channel: | | 159 | |
|------------------|---------------|-------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | |
| 5850 | 58.40 | -9.29 | 49.11 | 74 | -24.89 | peak | H |
| 5850 | 44.00 | -9.29 | 34.71 | 54 | -19.29 | AV | H |
| 5850 | 58.05 | -9.29 | 48.76 | 74 | -25.24 | peak | V |
| 5850 | 45.66 | -9.29 | 36.37 | 54 | -17.63 | AV | V |

| Worse case mode: | | 802.11ac(HT20)(6.5Mbps) | | Test channel: | | 36 | |
|------------------|---------------|-------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | |
| 5150 | 58.83 | -9.2 | 49.63 | 74 | -24.37 | peak | H |
| 5150 | 44.44 | -9.2 | 35.24 | 54 | -18.76 | AVG | H |
| 5150 | 59.22 | -9.2 | 50.02 | 74 | -23.98 | peak | V |
| 5150 | 44.26 | -9.2 | 35.06 | 54 | -18.94 | AVG | V |

| Worse case mode: | | 802.11ac(HT20)(6.5Mbps) | | Test channel: | | 48 | |
|------------------|---------------|-------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | |
| 5350 | 59.95 | -9.39 | 50.56 | 74 | -23.44 | peak | H |
| 5350 | 46.12 | -9.39 | 36.73 | 54 | -17.27 | AVG | H |
| 5350 | 59.99 | -9.39 | 50.60 | 74 | -23.40 | peak | V |
| 5350 | 46.73 | -9.39 | 37.34 | 54 | -16.66 | AVG | V |

| Worse case mode: | | 802.11ac(HT20)(6.5Mbps) | | Test channel: | | 149 | |
|------------------|---------------|-------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | |
| 5725 | 57.71 | -9.29 | 48.42 | 74 | -25.58 | peak | H |
| 5725 | 44.16 | -9.29 | 34.87 | 54 | -19.13 | AV | H |
| 5725 | 57.77 | -9.29 | 48.48 | 74 | -25.52 | peak | V |
| 5725 | 45.47 | -9.29 | 36.18 | 54 | -17.82 | AV | V |

| Worse case mode: | | 802.11ac(HT20)(6.5Mbps) | | Test channel: | | 165 | |
|------------------|---------------|-------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5850 | 57.94 | -9.29 | 48.65 | 74 | -25.35 | peak | H |
| 5850 | 44.07 | -9.29 | 34.78 | 54 | -19.22 | AV | H |
| 5850 | 57.68 | -9.29 | 48.39 | 74 | -25.61 | peak | V |
| 5850 | 45.77 | -9.29 | 36.48 | 54 | -17.52 | AV | V |

| Worse case mode: | | 802.11ac(VHT40)(13.5Mbps) | | Test channel: | | 38 | |
|------------------|---------------|---------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5150 | 58.72 | -9.2 | 49.52 | 74 | -24.48 | peak | H |
| 5150 | 44.46 | -9.2 | 35.26 | 54 | -18.74 | AVG | H |
| 5150 | 58.65 | -9.2 | 49.45 | 74 | -24.55 | peak | V |
| 5150 | 44.35 | -9.2 | 35.15 | 54 | -18.85 | AVG | V |

| Worse case mode: | | 802.11ac(VHT40)(13.5Mbps) | | Test channel: | | 46 | |
|------------------|---------------|---------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5350 | 60.08 | -9.39 | 50.69 | 74 | -23.31 | peak | H |
| 5350 | 46.66 | -9.39 | 37.27 | 54 | -16.73 | AVG | H |
| 5350 | 59.57 | -9.39 | 50.18 | 74 | -23.82 | peak | V |
| 5350 | 46.75 | -9.39 | 37.36 | 54 | -16.64 | AVG | V |

| Worse case mode: | | 802.11ac(VHT40)(13.5Mbps) | | Test channel: | | 151 | |
|------------------|---------------|---------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5725 | 57.63 | -9.29 | 48.34 | 74 | -25.66 | peak | H |
| 5725 | 43.54 | -9.29 | 34.25 | 54 | -19.75 | AV | H |
| 5725 | 57.63 | -9.29 | 48.34 | 74 | -25.66 | peak | V |
| 5725 | 46.11 | -9.29 | 36.82 | 54 | -17.18 | AV | V |

| Worse case mode: | | 802.11ac(VHT40)(13.5Mbps) | | Test channel: | | 159 | |
|------------------|---------------|---------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | H/V |
| 5850 | 59.16 | -9.2 | 49.96 | 74 | -24.04 | | H |
| 5850 | 43.99 | -9.2 | 34.79 | 54 | -19.21 | AV | H |
| 5850 | 58.59 | -9.2 | 49.39 | 74 | -24.61 | peak | V |
| 5850 | 44.94 | -9.2 | 35.74 | 54 | -18.26 | AV | V |

| Worse case mode: | | 802.11ac(VHT80)(29.3Mbps) | | Test channel: | | 42 | |
|------------------|---------------|---------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | |
| 5150 | 57.60 | -9.29 | 48.31 | 74 | -25.69 | peak | H |
| 5150 | 44.03 | -9.29 | 34.74 | 54 | -19.26 | AVG | H |
| 5150 | 58.13 | -9.29 | 48.84 | 74 | -25.16 | peak | V |
| 5150 | 46.17 | -9.29 | 36.88 | 54 | -17.12 | AVG | V |
| 5350 | 59.72 | -9.39 | 50.33 | 74 | -23.67 | peak | H |
| 5350 | 46.55 | -9.39 | 37.16 | 54 | -16.84 | AVG | H |
| 5350 | 59.57 | -9.39 | 50.18 | 74 | -23.82 | peak | V |
| 5350 | 46.81 | -9.39 | 37.42 | 54 | -16.58 | AVG | V |

| Worse case mode: | | 802.11ac(VHT80)(29.3Mbps) | | Test channel: | | 155 | |
|------------------|---------------|---------------------------|----------------|----------------|--------|---------------|-----------|
| Frequency | Meter Reading | Factor | Emission Level | Limits | Over | Detector Type | Ant. Pol. |
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | | |
| 5725 | 58.42 | -9.2 | 49.22 | 74 | -24.78 | peak | H |
| 5725 | 44.47 | -9.2 | 35.27 | 54 | -18.73 | AV | H |
| 5725 | 58.80 | -9.2 | 49.60 | 74 | -24.40 | peak | V |
| 5725 | 44.52 | -9.2 | 35.32 | 54 | -18.68 | AV | V |
| 5850 | 60.09 | -9.39 | 50.70 | 74 | -23.30 | peak | H |
| 5850 | 46.69 | -9.39 | 37.30 | 54 | -16.70 | AV | H |
| 5850 | 60.21 | -9.39 | 50.82 | 74 | -23.18 | peak | V |
| 5850 | 46.50 | -9.39 | 37.11 | 54 | -16.89 | AV | V |

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix J): Radiated Spurious Emissions

| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark | | | | | |
|--|---|----------------------------------|-----------------------|------------|---------------------------|--|--|--|--|--|
| | 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak | | | | | |
| | 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average | | | | | |
| | 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak | | | | | |
| | 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak | | | | | |
| | 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average | | | | | |
| | 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak | | | | | |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak | | | | | |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak | | | | | |
| | | Peak | 1MHz | 10Hz | Average | | | | | |
| Test Procedure: | Below 1GHz test procedure as below: | | | | | | | | | |
| a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | | | | | | | |
| Above 1GHz test procedure as below: | | | | | | | | | | |
| g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre) h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. | | | | | | | | | | |
| Limit: | Frequency | Field strength (microvolt/meter) | Limit (dB μ V/cm) | Remark | Measurement distance (cm) | | | | | |
| | 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 | | | | | |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 | | | | | |
| | 1.705MHz-30MHz | 30 | - | - | 30 | | | | | |
| | 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 | | | | | |
| | 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 | | | | | |
| | 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 | | | | | |
| | 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 | | | | | |
| | Above 1GHz | 500 | 54.0 | Average | 3 | | | | | |
| | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. | | | | | | | | | |
| Test result: | PASS | | | | | | | | | |


Test Data:
Radiated Emission below 1GHz
30MHz~1GHz

| | | |
|------------|-----------------------------|----------|
| Test mode: | Transmitting (802.11a 36CH) | Vertical |
|------------|-----------------------------|----------|

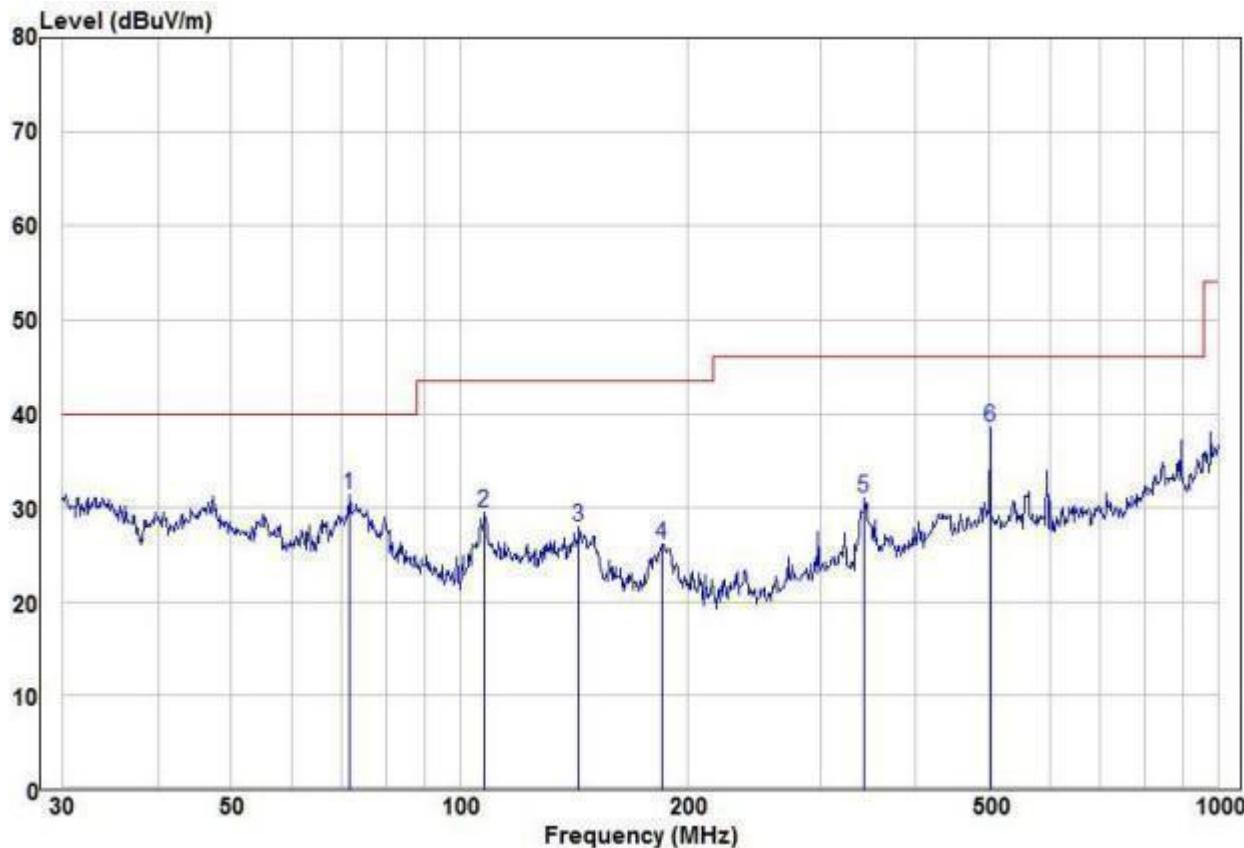


| Freq | Read | | Limit | | Over Line Limit | Over Remark | Pol/Phase |
|------|--------|-------|-------|--------|-----------------------|----------------|-----------|
| | MHz | dBuV | dB/m | dBuV/m | | | |
| 1 | 71.58 | 23.07 | 8.41 | 31.48 | 40.00 | -8.52 Peak | VERTICAL |
| 2 | 107.89 | 19.31 | 10.28 | 29.59 | 43.50 | -13.91 Peak | VERTICAL |
| 3 | 143.83 | 19.71 | 8.21 | 27.92 | 43.50 | -15.58 Peak | VERTICAL |
| 4 | 185.14 | 18.03 | 8.14 | 26.17 | 43.50 | -17.33 Peak | VERTICAL |
| 5 | 341.98 | 16.26 | 14.76 | 31.02 | 46.00 | -14.98 Peak | VERTICAL |
| 6 pp | 501.18 | 20.34 | 18.29 | 38.63 | 46.00 | -7.37 Peak | VERTICAL |

| | | |
|------------|-----------------------------|------------|
| Test mode: | Transmitting (802.11a 36CH) | Horizontal |
|------------|-----------------------------|------------|

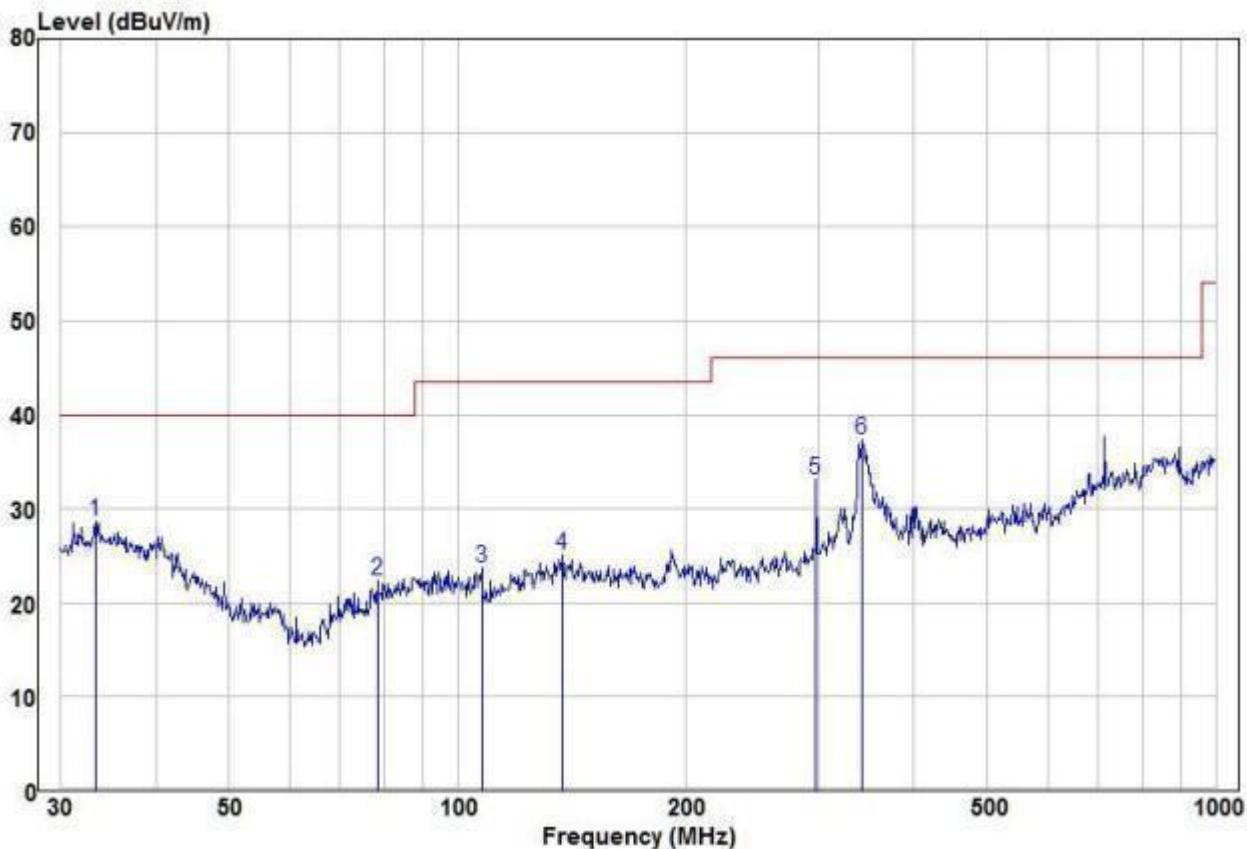

| Freq | Read | | | Limit | Over | Remark | Pol/Phase |
|------|--------|-------|--------|--------|--------|--------|-----------------|
| | Freq | Level | Factor | | | | |
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 33.33 | 13.54 | 15.04 | 28.58 | 40.00 | -11.42 | Peak HORIZONTAL |
| 2 | 78.41 | 12.86 | 9.53 | 22.39 | 40.00 | -17.61 | Peak HORIZONTAL |
| 3 | 107.51 | 13.42 | 10.29 | 23.71 | 43.50 | -19.79 | Peak HORIZONTAL |
| 4 | 137.42 | 16.37 | 8.63 | 25.00 | 43.50 | -18.50 | Peak HORIZONTAL |
| 5 | 297.22 | 19.49 | 13.63 | 33.12 | 46.00 | -12.88 | Peak HORIZONTAL |
| 6 pp | 340.78 | 22.63 | 14.73 | 37.36 | 46.00 | -8.64 | Peak HORIZONTAL |

| 30MHz~1GHz | | |
|------------|------------------------------|----------|
| Test mode: | Transmitting (802.11a 149CH) | Vertical |

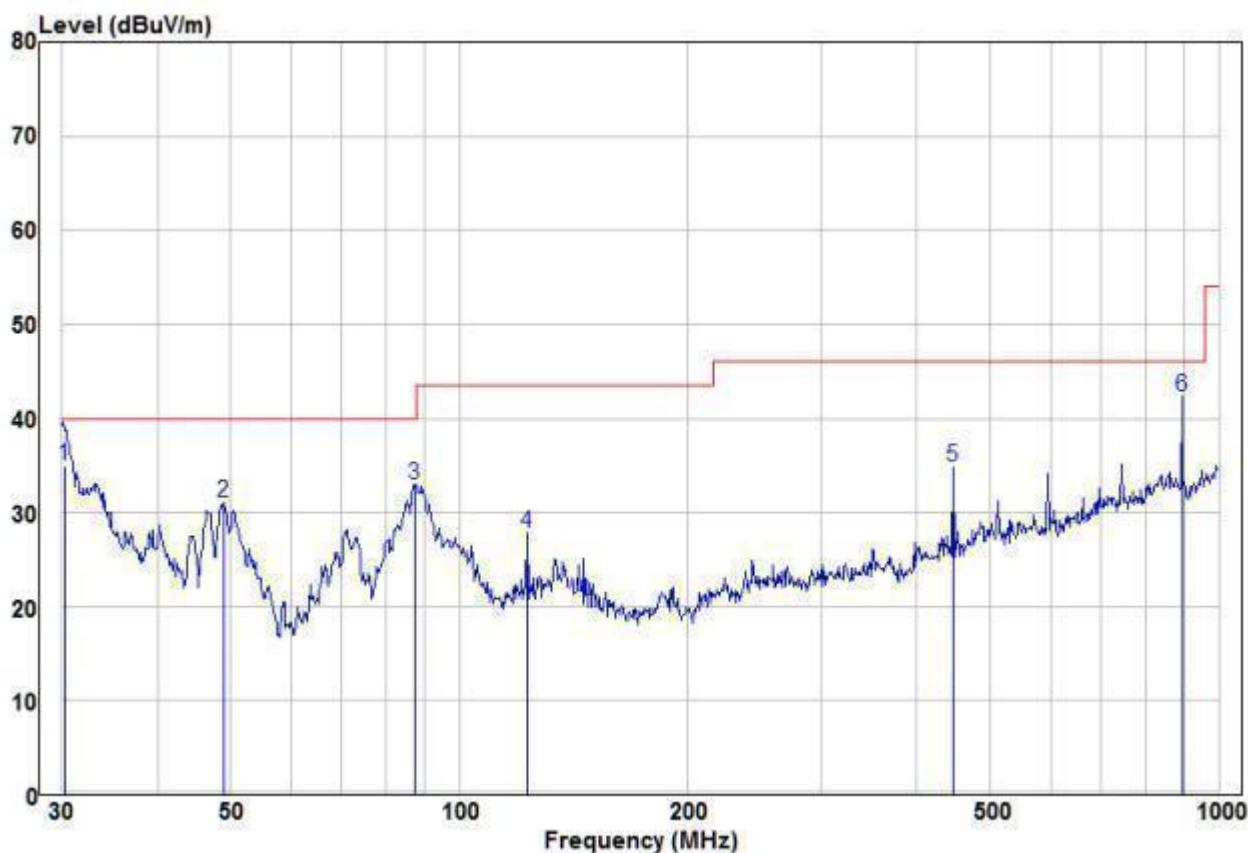

| Freq | Read Level | Limit | | Over Line Limit | Over Remark | Pol/Phase |
|------|------------|--------|--------|-----------------|-------------|----------------------|
| | | Factor | Level | | | |
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 qp | 30.21 | 19.20 | 15.85 | 35.05 | 40.00 | -4.95 QP VERTICAL |
| 2 | 48.84 | 22.39 | 8.63 | 31.02 | 40.00 | -8.98 Peak VERTICAL |
| 3 | 87.42 | 22.97 | 9.96 | 32.93 | 40.00 | -7.07 Peak VERTICAL |
| 4 | 122.83 | 17.30 | 10.59 | 27.89 | 43.50 | -15.61 Peak VERTICAL |
| 5 | 446.41 | 18.21 | 16.62 | 34.83 | 46.00 | -11.17 Peak VERTICAL |
| 6 pp | 893.86 | 18.36 | 23.87 | 42.23 | 46.00 | -3.77 Peak VERTICAL |