



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20231202289E-03

Applicant: THINKCAR TECH CO., LTD.

Address of Applicant: 2606, building 4, phase II, TiananYungu, Gangtou community, Bantian, Longgang District, Shenzhen

Equipment Under Test (EUT):

Product: Professional Commercial Trucks Diagnostic Scanner

Model No.: TKT16, DIESEL TABLET PRO

Teat Model No.: TKT16

Brand Name: DIESEL LAPTOPS

FCC ID: 2AUARTKTOOL12

Standards: 47 CFR Part 15, Subpart C

ANSI C63.10: 2013

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

Date of Receipt: 2023-12-13

Date of Test: 2022-08-31 to 2022-09-20

Date of Issue: 2023-12-26

Test Result : **PASS***

***In the configuration tested, the EUT complied with the standards specified above**

Tested By: lewis zhou

(Lewis Zhou)

Timo Lei

Reviewed By:

(Timo Lei)

Jack Ai

Approved By:

(Jack Ai)



Version**Revision History Of Report**

Report No.	Version	Description	Issue Date
CQASZ20220801509E-03	Rev.01	Initial report	2022-12-08
CQASZ20231202289E-03	Rev.02	Update report	2023-12-26

Note:

This test report (Ref. No.: CQASZ20231202289E-03)

All test data comes from source test reports (Ref. No.: CQASZ20220801509E-03).

Only on the basis of the original report Change EUT Name, serial model No. And Brand name.

The tested samples have not been changed, it's just a different colors.

1 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

2 Contents

	Page
1 VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
4.4 TEST ENVIRONMENT AND MODE	8
4.5 DESCRIPTION OF SUPPORT UNITS.....	12
4.6 TEST LOCATION.....	12
4.7 TEST FACILITY	12
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	13
4.9 DEVIATION FROM STANDARDS	13
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	13
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	13
4.12 EQUIPMENTS LIST	14
5 TEST RESULTS AND MEASUREMENT DATA.....	15
5.1 ANTENNA REQUIREMENT	15
5.2 CONDUCTED EMISSIONS	16
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER.....	20
5.4 6dB OCCUPY BANDWIDTH	22
5.5 POWER SPECTRAL DENSITY	36
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	44
5.7 RF CONDUCTED SPURIOUS EMISSIONS	50
5.8 RADIATED SPURIOUS EMISSIONS	69
5.8.1 Radiated emission below 1GHz.....	72
5.8.2 Transmitter emission above 1GHz	74
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	82
6 PHOTOGRAPHS - EUT TEST SETUP.....	88
6.1 RADIATED EMISSION	88
6.2 CONDUCTED EMISSION	89
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	90

3 General Information

3.1 Client Information

Applicant:	THINKCAR TECH CO., LTD.
Address of Applicant:	2606, building 4, phase II, TiananYungu, Gangtou community, Bantian, Longgang District, Shenzhen
Manufacturer:	THINKCAR TECH CO., LTD.
Address of Manufacturer:	2606, building 4, phase II, TiananYungu, Gangtou community, Bantian, Longgang District, Shenzhen
Factory:	THINKCAR TECH CO., LTD.
Address of Factory:	2606, building 4, phase II, TiananYungu, Gangtou community, Bantian, Longgang District, Shenzhen

3.2 General Description of EUT

Product Name:	Professional Commercial Trucks Diagnostic Scanner
Model No.:	TKT16, DIESEL TABLET PRO
Test Model No.:	TKT16
Trade Mark:	DIESEL LAPTOPS
Power Supply:	Li-ion battery: DC 7.6V 6300mAh, Charge by DC 5V for adapter
EUT Supports Radios application:	BT: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz 5GHz: Wi-Fi: U-NII-1: 5.15-5.25GHz; U-NII-3: 5.725-5.850GHz

3.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Software Version:	V1.4 20220930-1448
Hardware Version:	BSK-Y19-V1A
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	android system
Antenna Type:	FPC antenna



Shenzhen Huaxia Testing Technology Co., Ltd.

Report No.: CQASZ20231202289E-03

Antenna Gain:	3.72dBi
---------------	---------

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel(802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz
4	2427MHz	7	2442MHz		
5	2432MHz	8	2447MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz


For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.



3.4 Test Environment and Mode


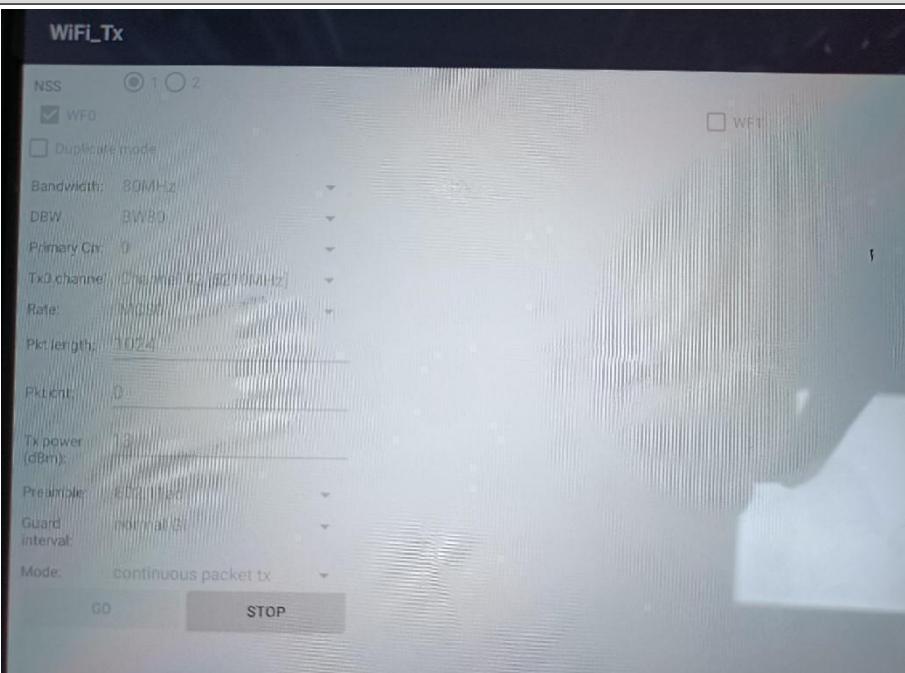
Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.
Run Software:	
	

Operated Mode for Worst Duty Cycle:		
Test Mode	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	99.52	0.02
IEEE802.11g	96.50	0.15
IEEE802.11n (HT20)	96.27	0.17
IEEE802.11n (HT40)	92.75	0.33

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

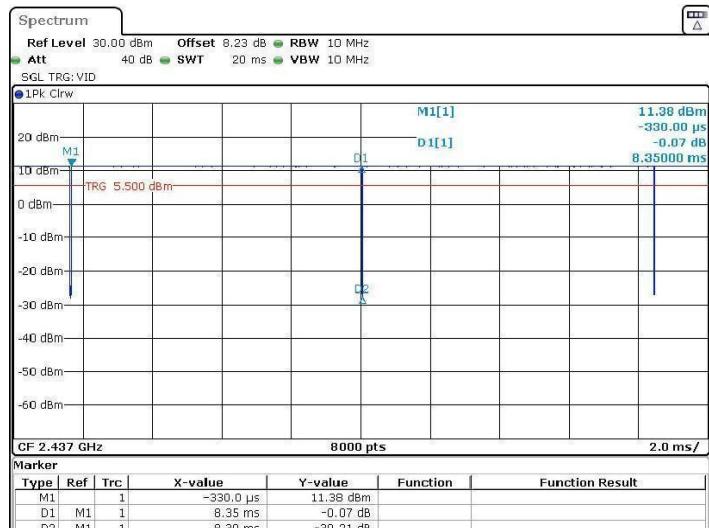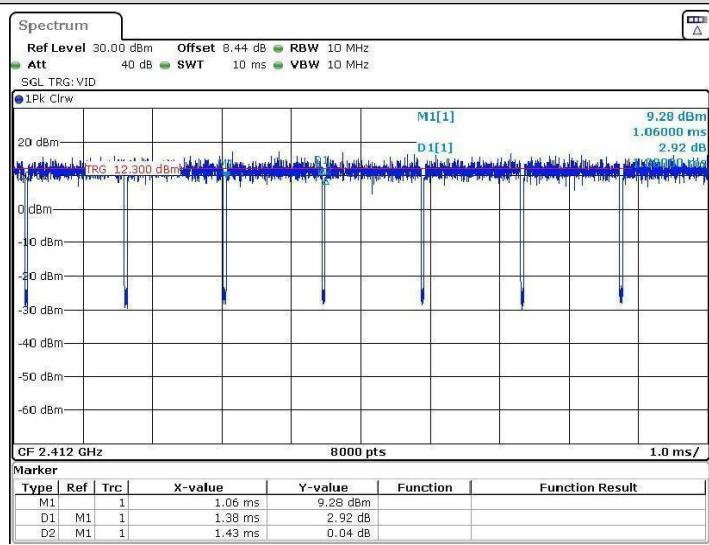Test Graph_IEEE802.11b Duty Cycle:

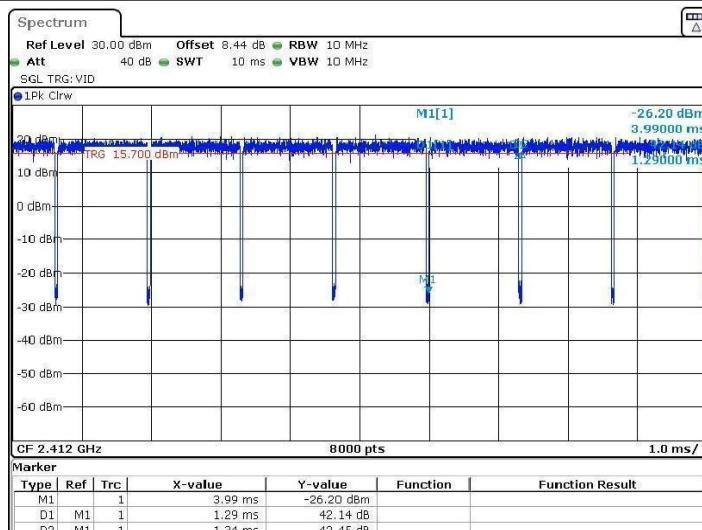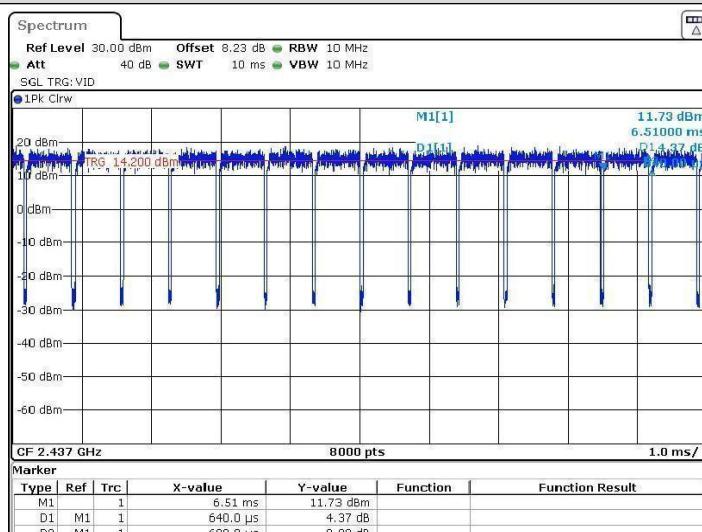Test Graph_IEEE802.11g Duty Cycle:


Test Graph_IEEE802.11 n (HT20) Duty Cycle:

Test Graph_IEEE802.11 n (HT40) Duty Cycle:


3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

3.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

3.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

3.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.9 Deviation from Standards

None.

3.10 Abnormalities from Standard Conditions

None.

3.11 Other Information Requested by the Customer

None.

3.12 Equipments List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU26	CQA-038	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU40	CQA-075	2022/9/9	2023/9/8
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2022/9/9	2023/9/8
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/9/9	2023/9/8
Preamplifier	EMCI	EMC184055SE	CQA-089	2022/9/9	2023/9/8
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2022/9/9	2023/9/8
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2022/9/9	2023/9/8
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/9/9	2023/9/8
Antenna Connector	CQA	RFC-01	CQA-080	2022/9/9	2023/9/8
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2022/9/9	2023/9/8
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2022/9/9	2023/9/8
Power meter	R&S	NRVD	CQA-029	2022/9/9	2023/9/8
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/9/9	2023/9/8
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
LISN	R&S	ENV216	CQA-003	2022/9/9	2023/9/8
Coaxial cable	CQA	N/A	CQA-C009	2022/9/9	2023/9/8
DC power	KEYSIGHT	E3631A	CQA-028	2022/9/9	2023/9/8

Test software:


	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is FPC antenna . Ant 1: 3.72dBi	

4.2 Conducted Emissions

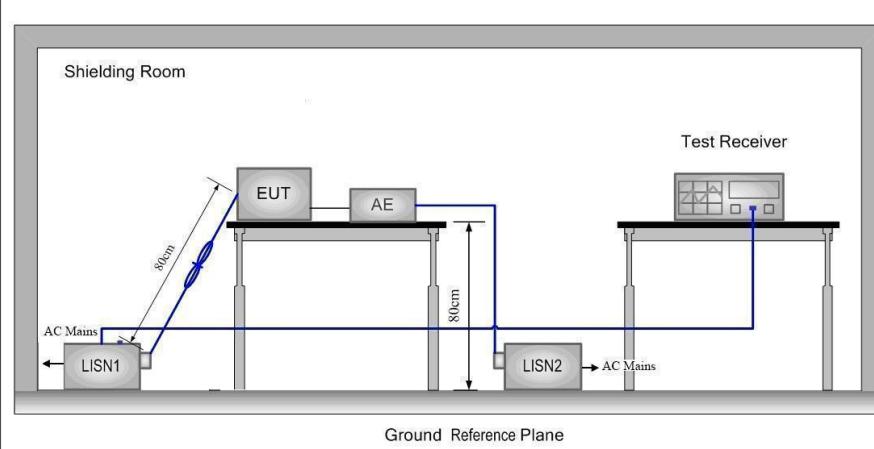
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 		
Test Setup:			
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and		



	highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

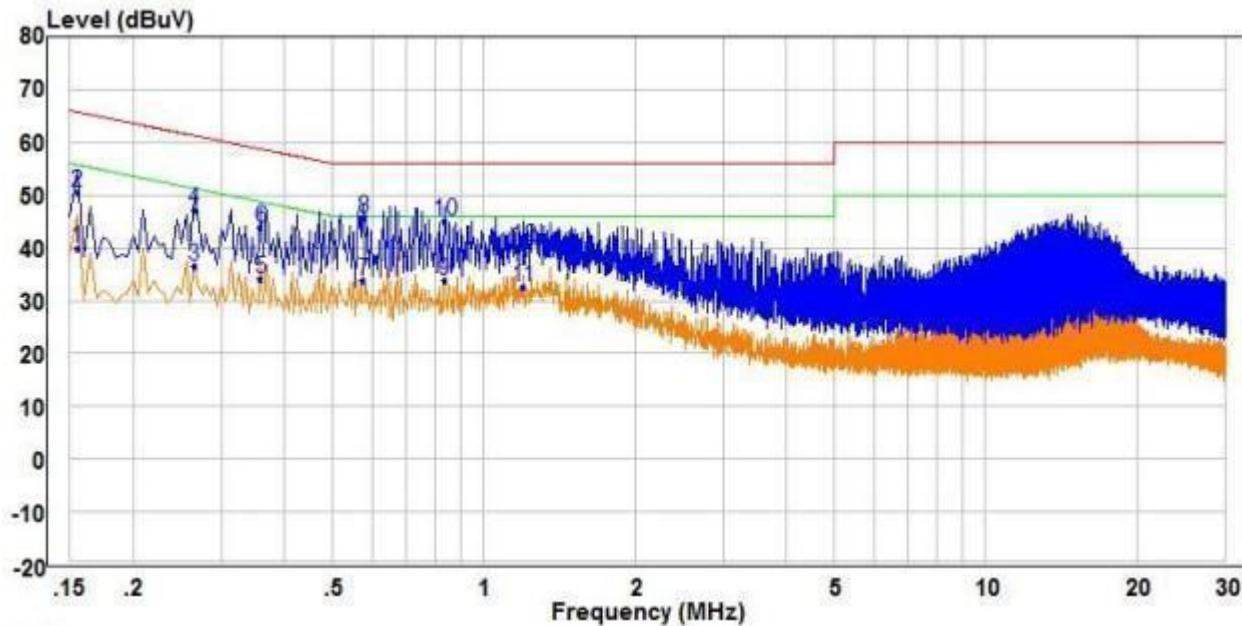


Freq	Read			Limit Line	Over Limit	Remark	Pol/Phase
	MHz	Level	Factor				
1	0.155	30.17	9.69	39.86	55.73	-15.87	Average Line
2	0.155	40.84	9.69	50.53	65.73	-15.20	QP Line
3	0.265	27.15	9.53	36.68	51.27	-14.59	Average Line
4	0.265	37.72	9.53	47.25	61.27	-14.02	QP Line
5	0.360	24.46	9.56	34.02	48.73	-14.71	Average Line
6	0.360	34.25	9.56	43.81	58.73	-14.92	QP Line
7 AV	0.575	24.07	9.78	33.85	46.00	-12.15	Average Line
8 PP	0.575	35.97	9.78	45.75	56.00	-10.25	QP Line
9	0.835	23.95	9.81	33.76	46.00	-12.24	Average Line
10	0.835	35.33	9.81	45.14	56.00	-10.86	QP Line
11	1.195	22.25	10.20	32.45	46.00	-13.55	Average Line
12	1.195	30.13	10.20	40.33	56.00	-15.67	QP Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT.
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

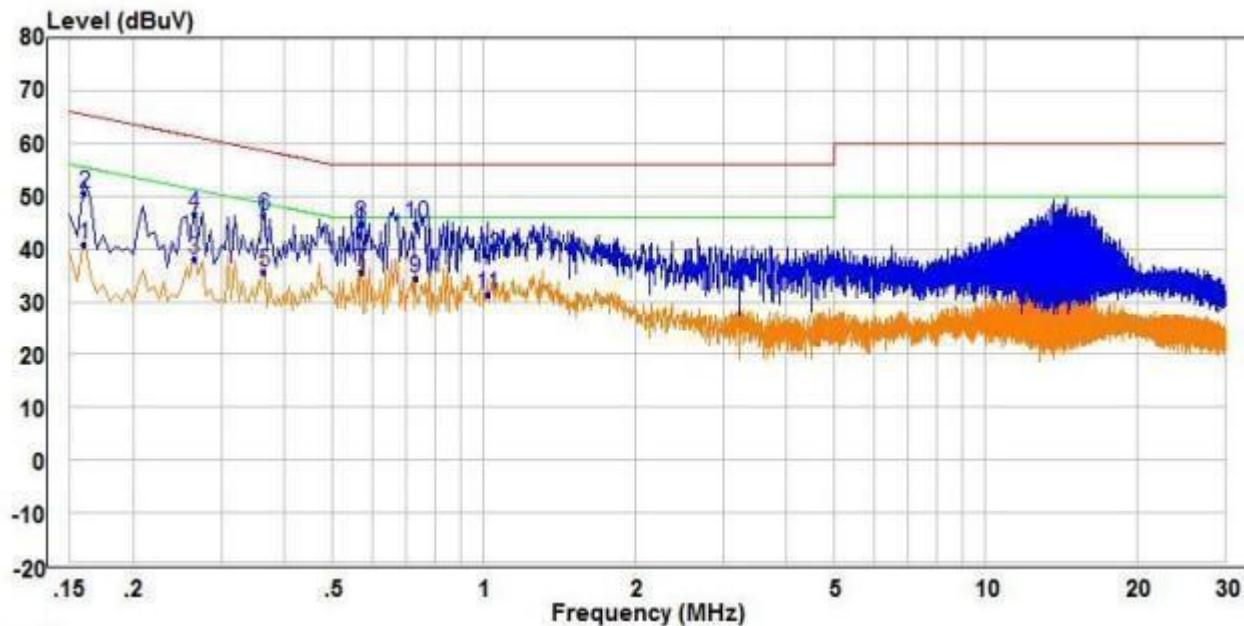


Freq	Read		Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV		dB	dBuV	dB	
1	0.160	31.06	9.68	40.74	55.46	-14.72	Average
2	0.160	40.80	9.68	50.48	65.46	-14.98	QP
3	0.265	28.44	9.52	37.96	51.27	-13.31	Average
4	0.265	37.21	9.52	46.73	61.27	-14.54	QP
5	0.365	26.08	9.56	35.64	48.61	-12.97	Average
6	0.365	36.59	9.56	46.15	58.61	-12.46	QP
7	PP	25.75	9.77	35.52	46.00	-10.48	Average
8	0.570	34.94	9.77	44.71	56.00	-11.29	QP
9	0.730	24.53	9.88	34.41	46.00	-11.59	Average
10	QP	0.730	34.94	9.88	44.82	56.00	-11.18
11	1.020	21.81	9.70	31.51	46.00	-14.49	Average
12	1.020	28.91	9.70	38.61	56.00	-17.39	QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT.
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

4.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Measurement Data

802.11b mode				
Test channel	Measured Average Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	8.02	8.04	30.00	Pass
Middle	8.88	8.9	30.00	Pass
Highest	9.02	9.04	30.00	Pass
802.11g mode				
Test channel	Measured Average Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	7.24	7.39	30.00	Pass
Middle	7.85	8	30.00	Pass
Highest	7.99	8.14	30.00	Pass
802.11n(HT20)mode				
Test channel	Measured Average Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	7.87	8.04	30.00	Pass
Middle	8.57	8.74	30.00	Pass
Highest	8.68	8.85	30.00	Pass
802.11n(HT40)mode				
Test channel	Measured Average Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	8.24	8.57	30.00	Pass
Middle	8.67	9	30.00	Pass
Highest	8.78	9.11	30.00	Pass

Remark:

1. Average Output Power was for reference only
2. Average Output Power had added duty cycle factor

4.4 6dB Occupy Bandwidth

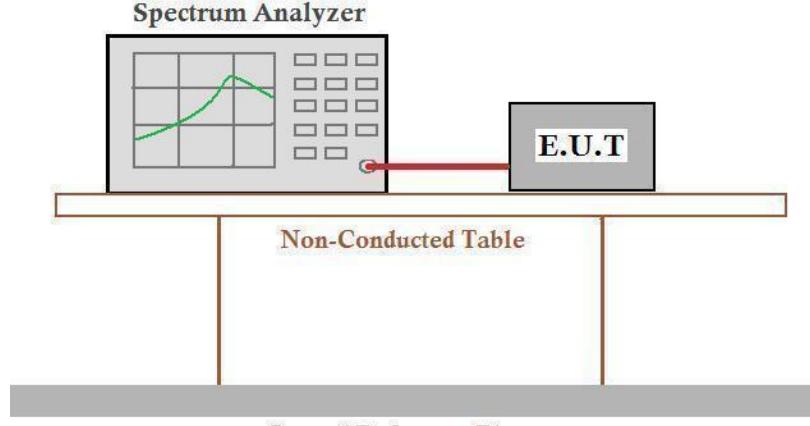
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p> <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass


Measurement Data


802.11b mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	8.160	12.987	≥500	Pass
Middle	8.160	12.987	≥500	Pass
Highest	8.160	12.987	≥500	Pass
802.11g mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	15.520	16.743	≥500	Pass
Middle	16.160	16.983	≥500	Pass
Highest	16.400	16.823	≥500	Pass
802.11n(HT20) mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	17.280	17.942	≥500	Pass
Middle	17.640	18.062	≥500	Pass
Highest	17.400	18.262	≥500	Pass
802.11n(HT40)mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	34.880	36.6	≥500	Pass
Middle	30.160	36.36	≥500	Pass
Highest	31.520	36.04	≥500	Pass


Remark:


1. 99% OBW was for reference only

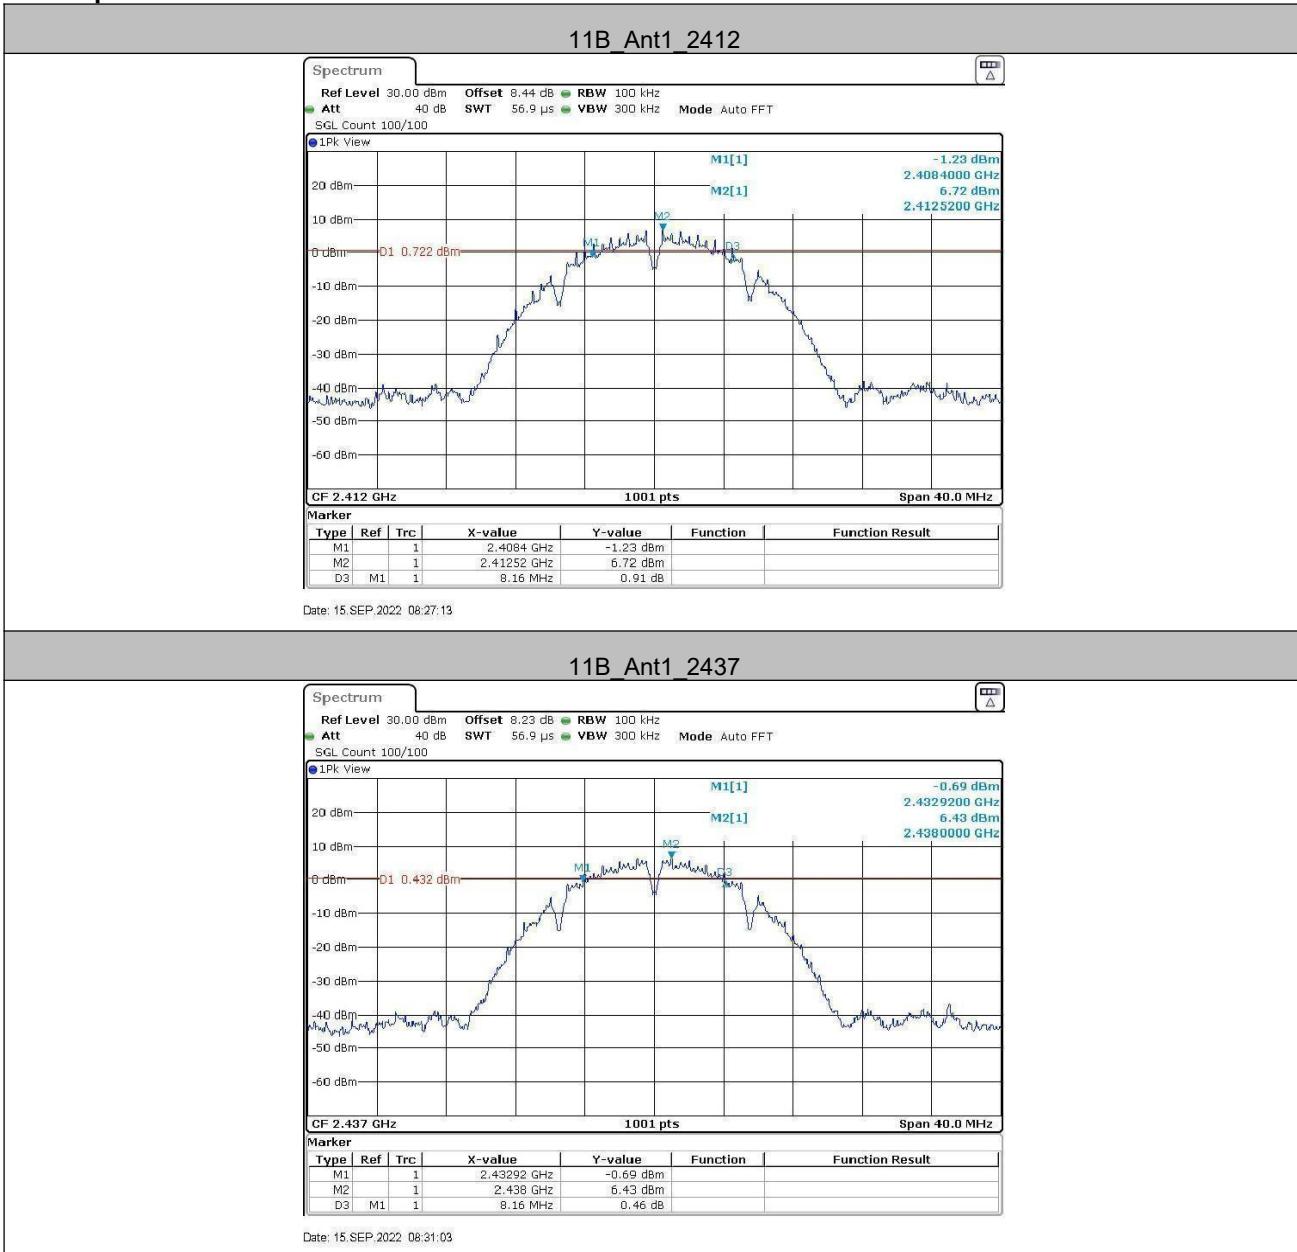
Test plot as follows:

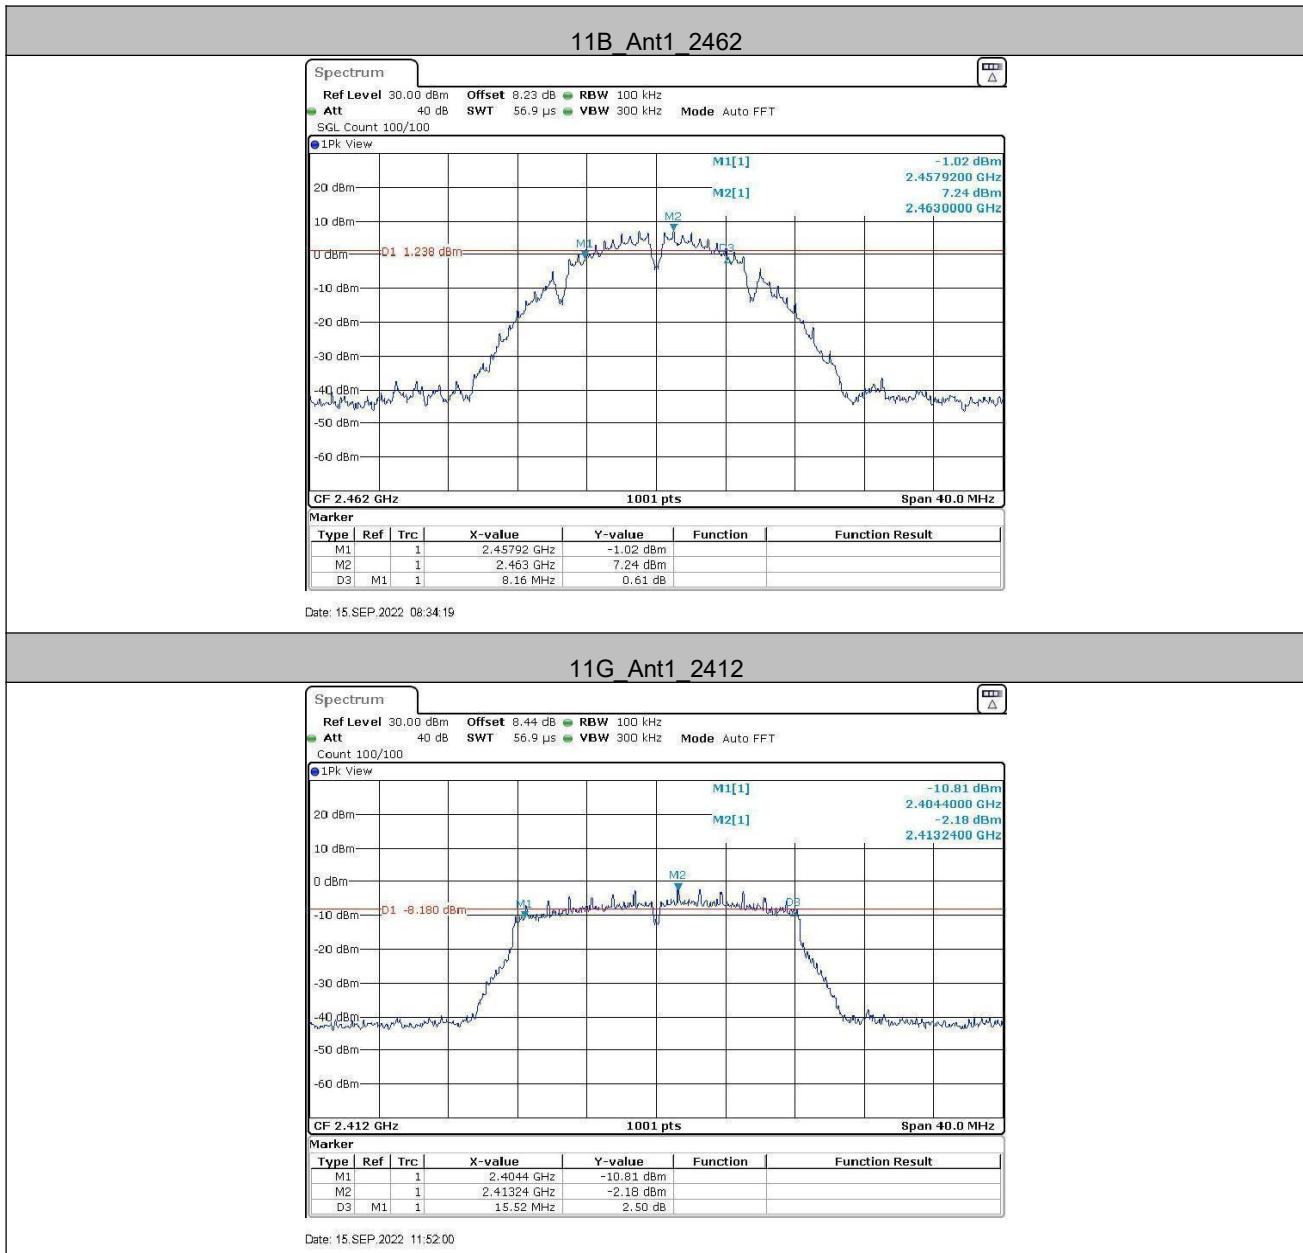
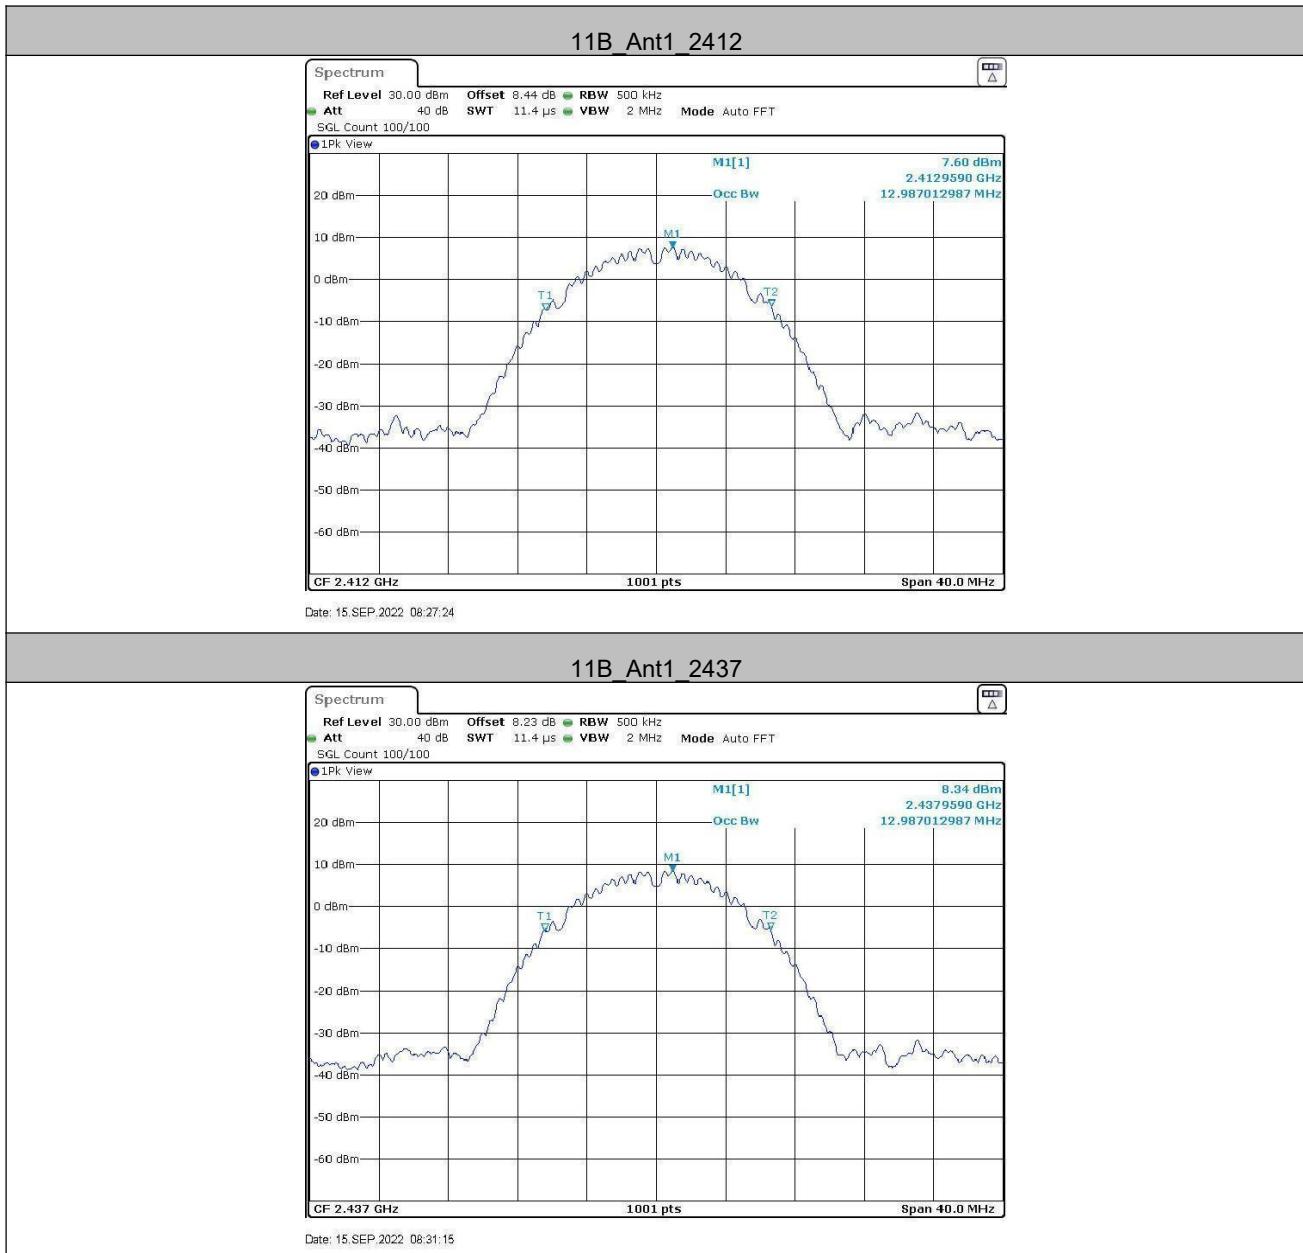


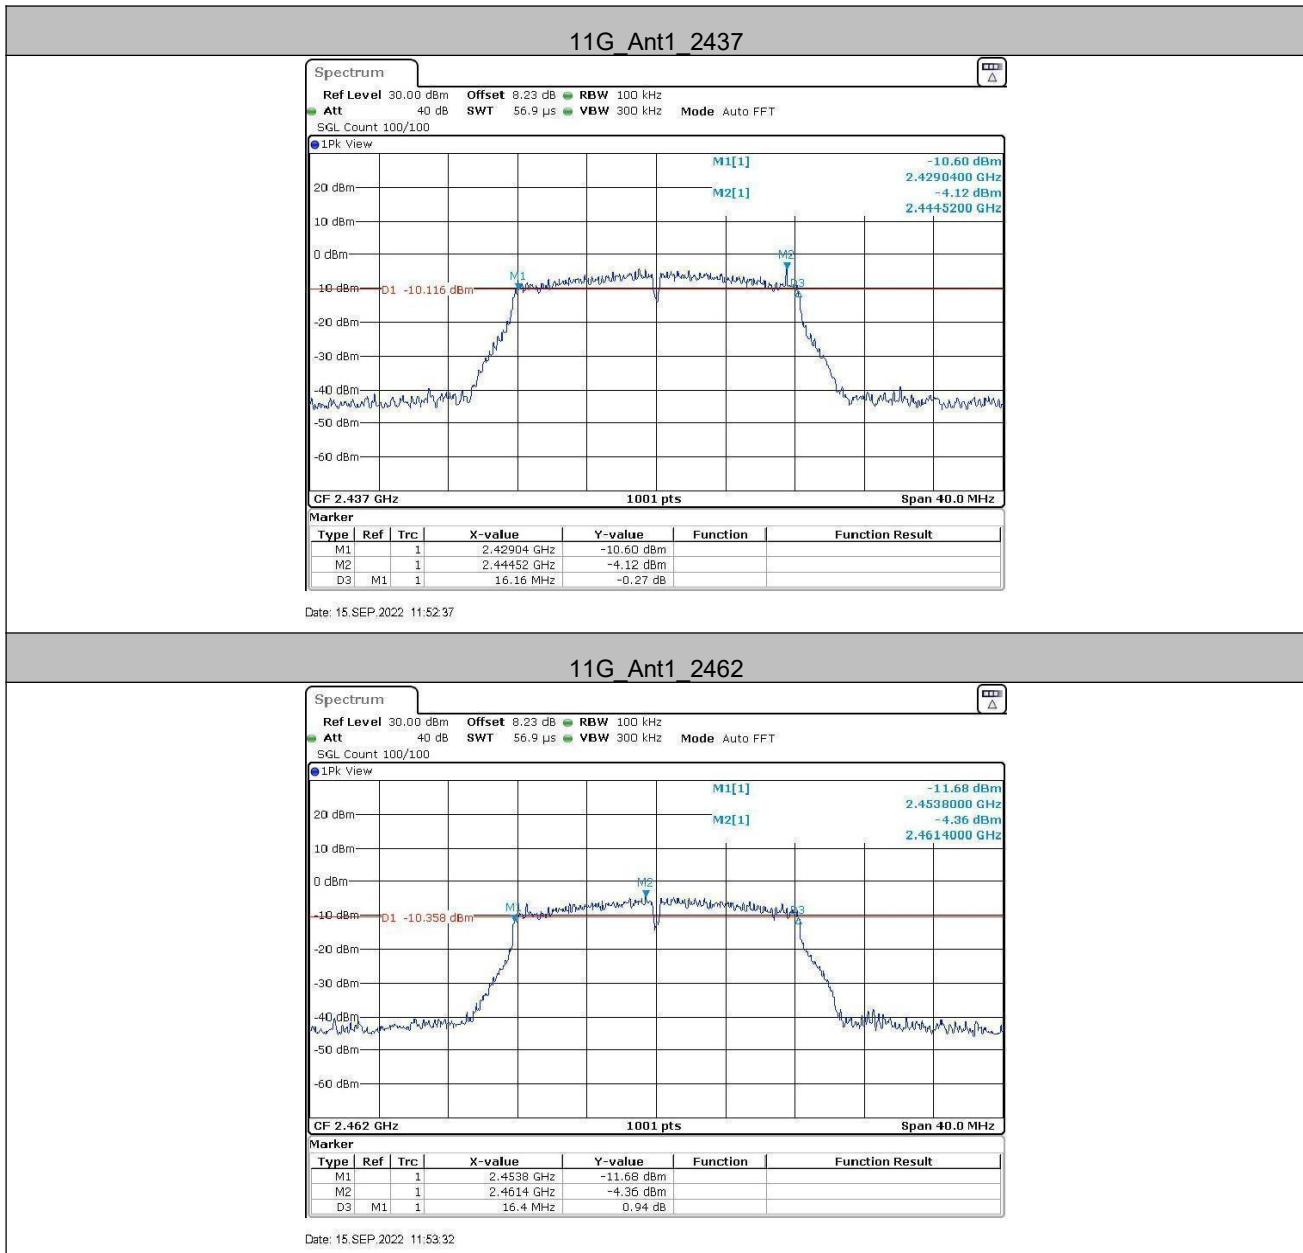


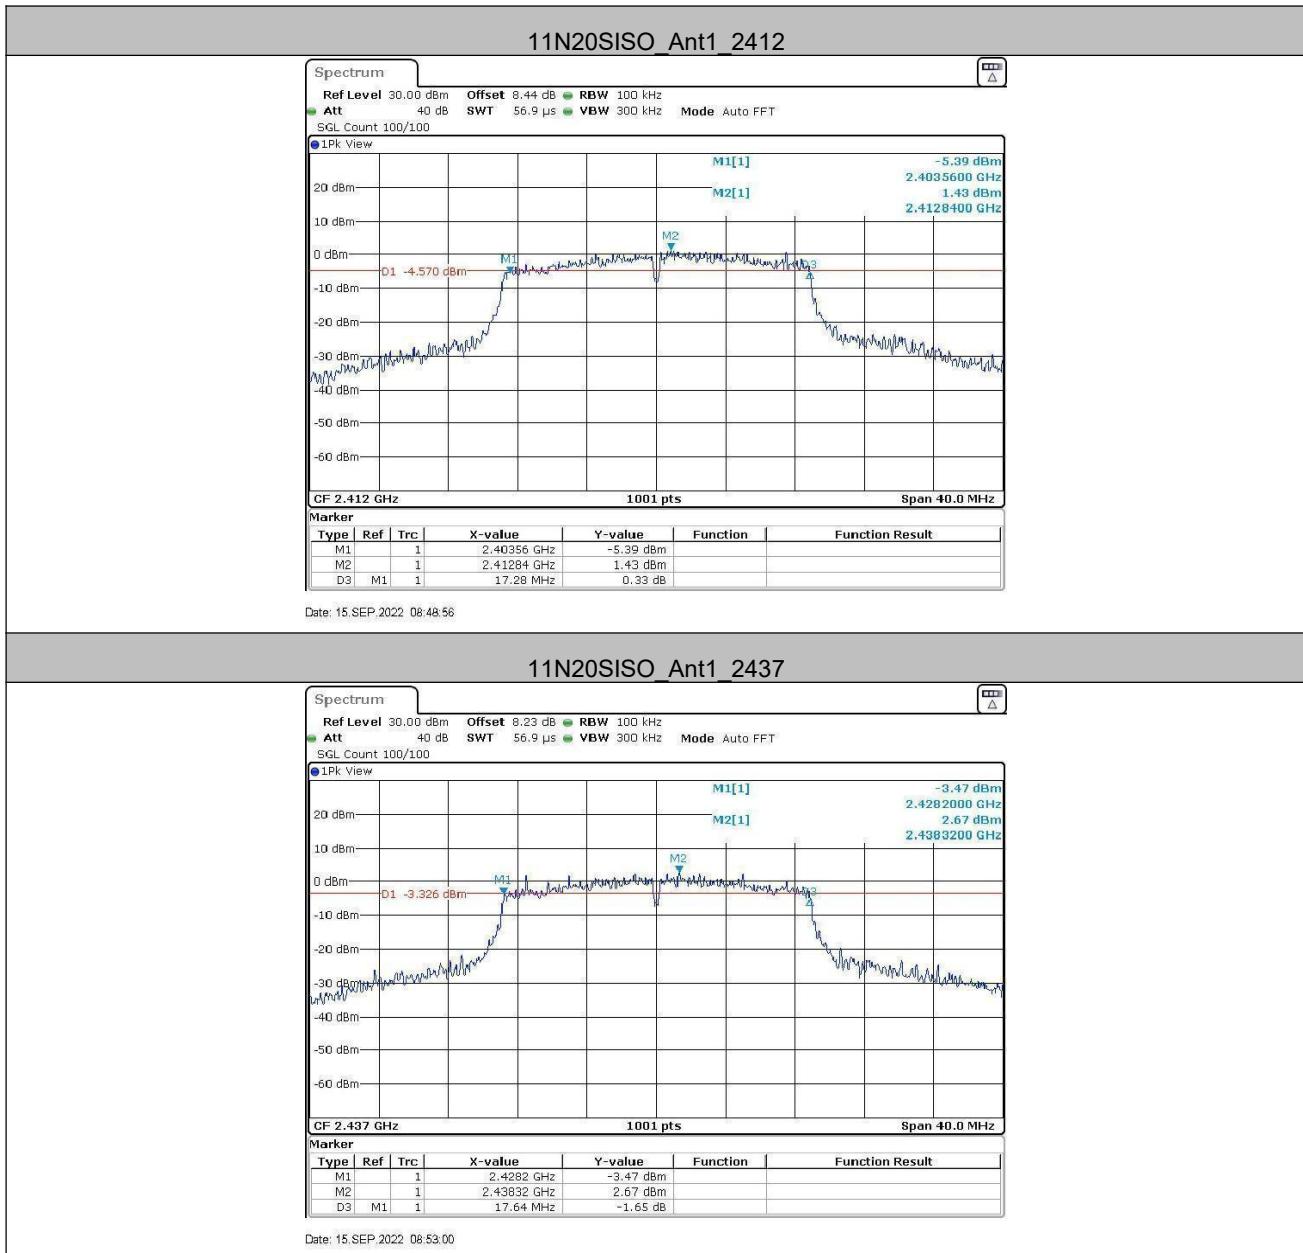


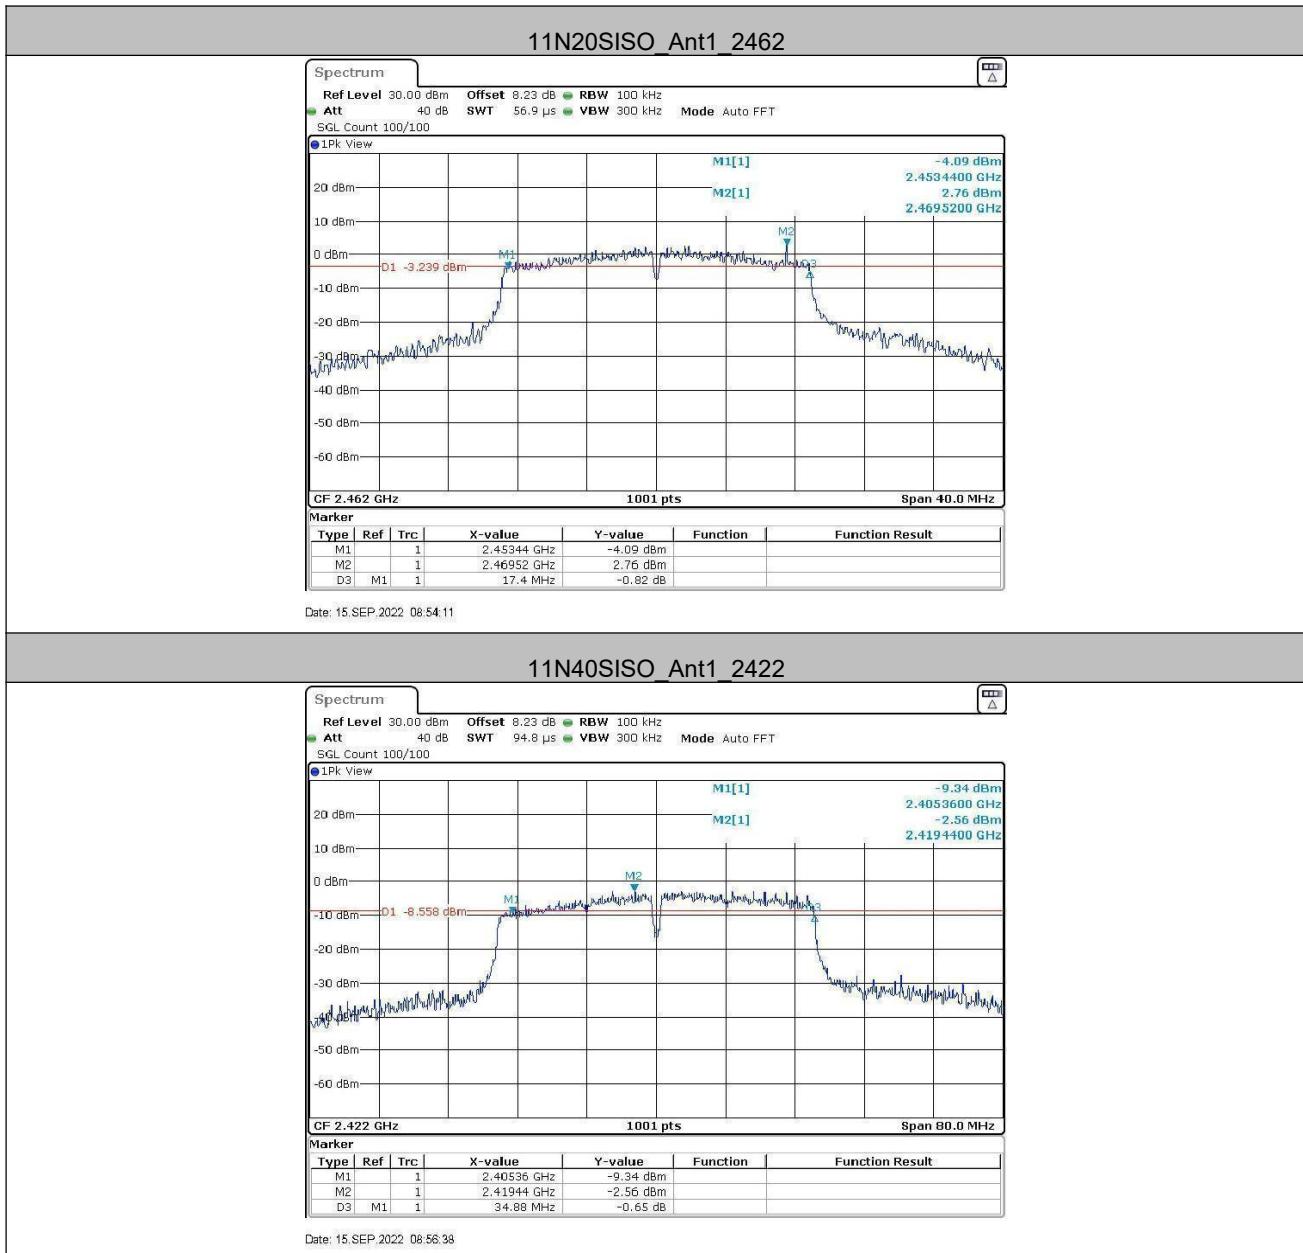


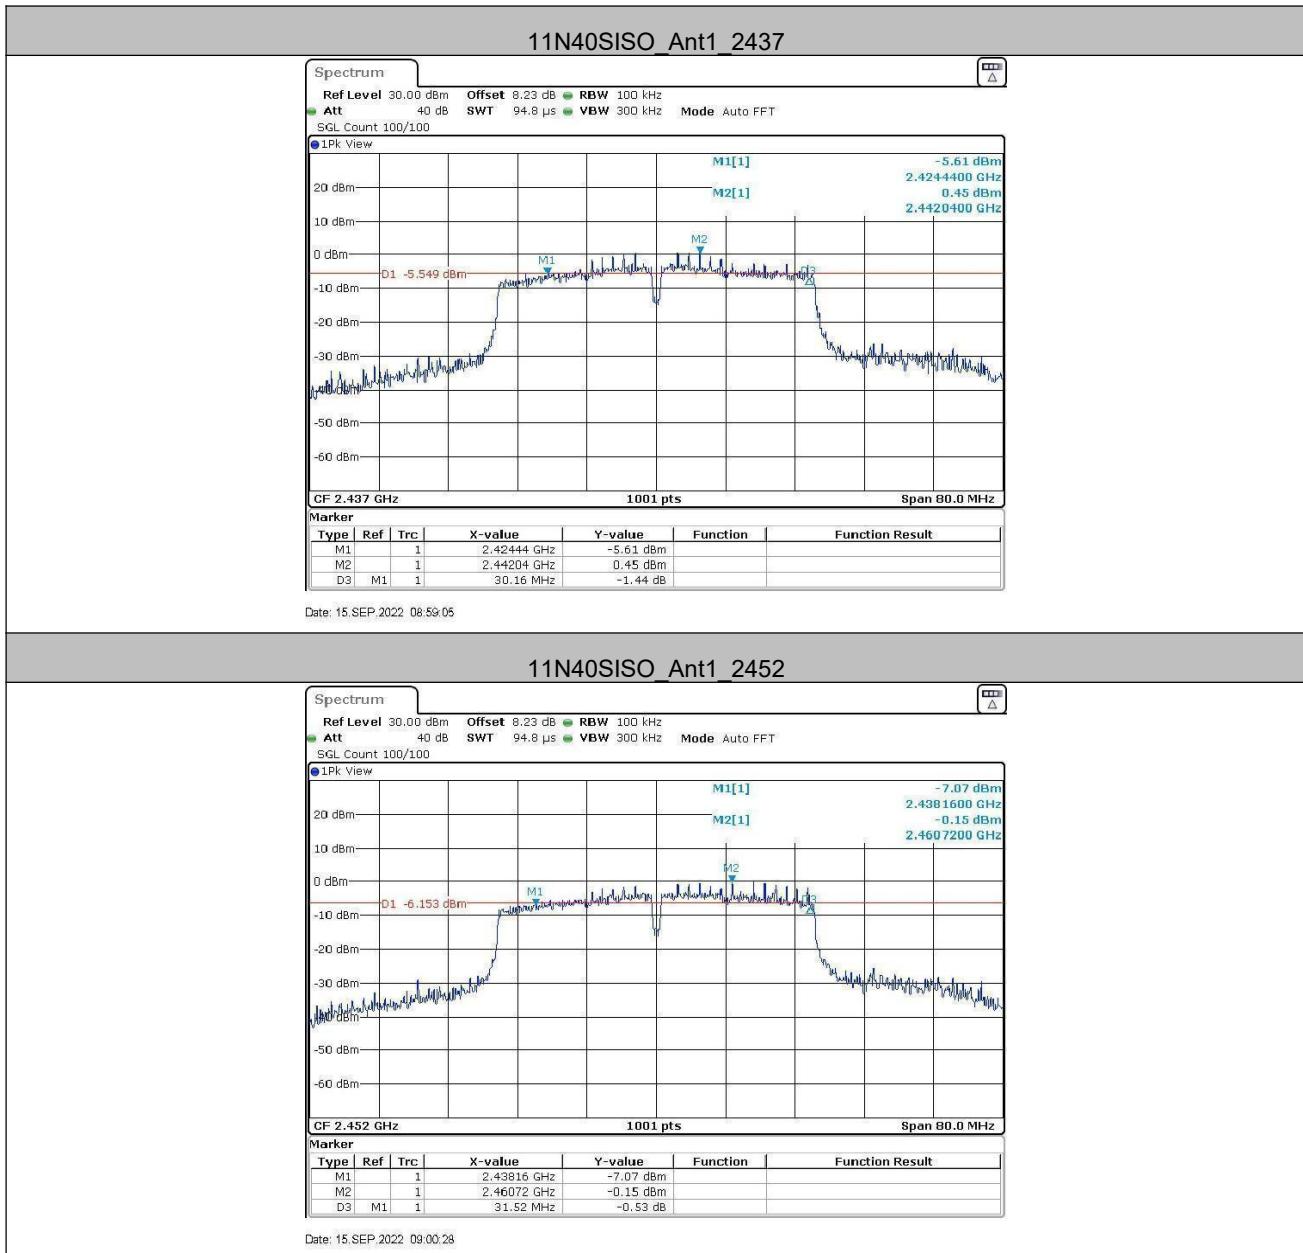





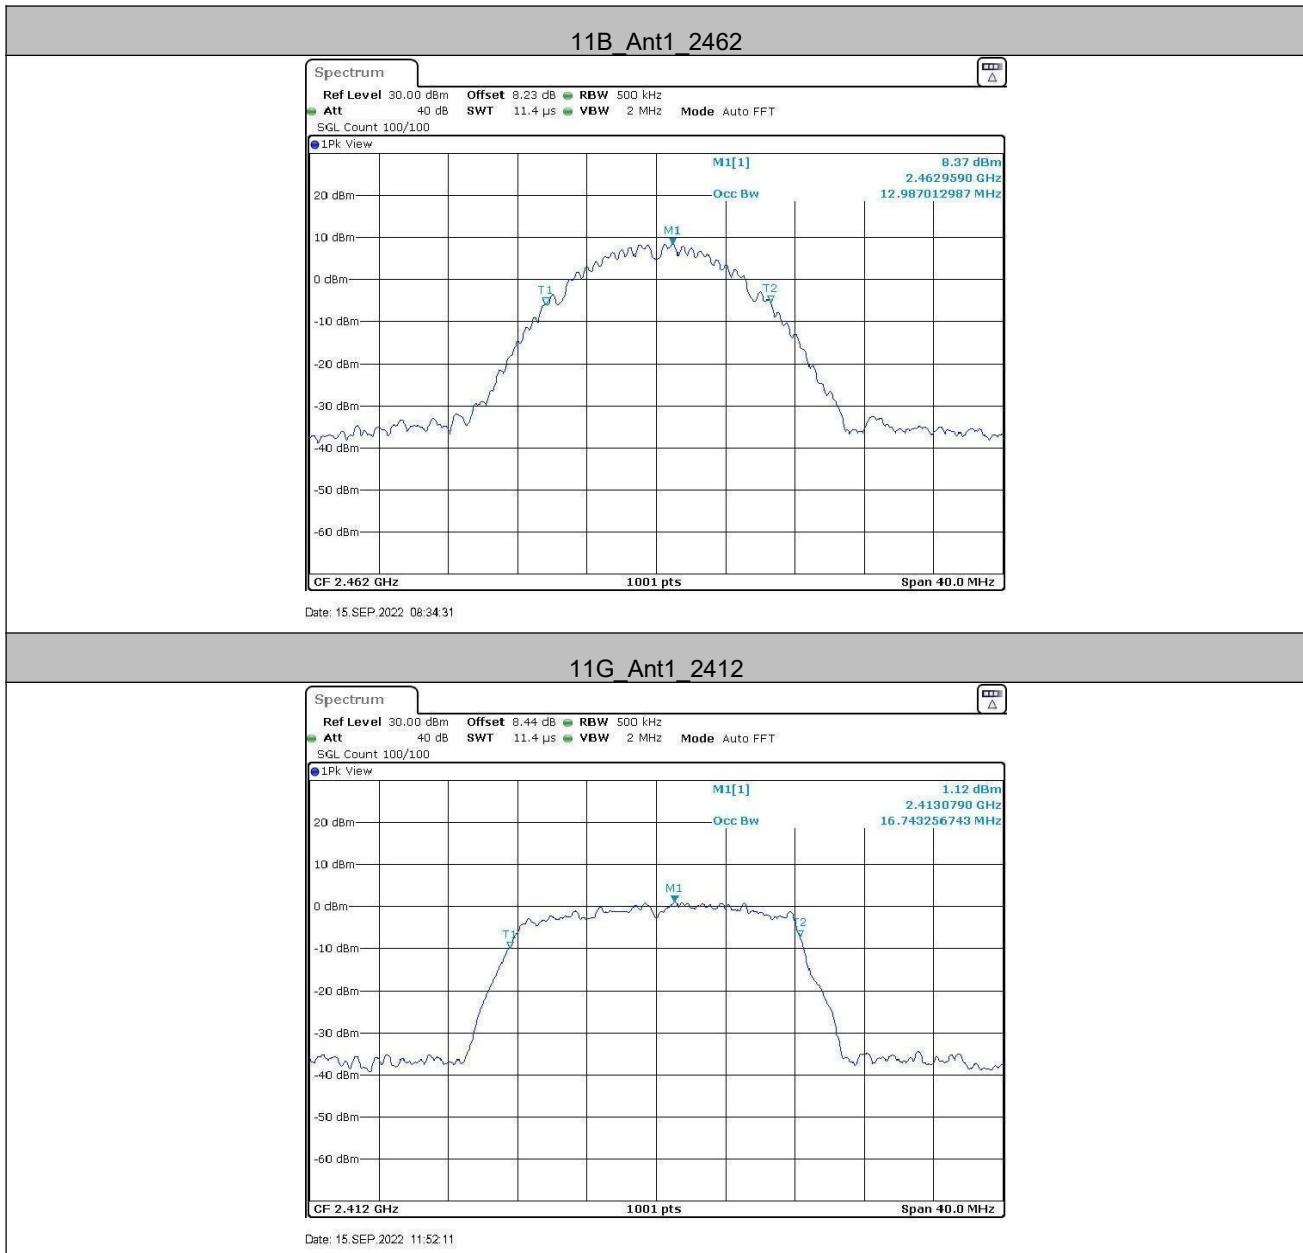

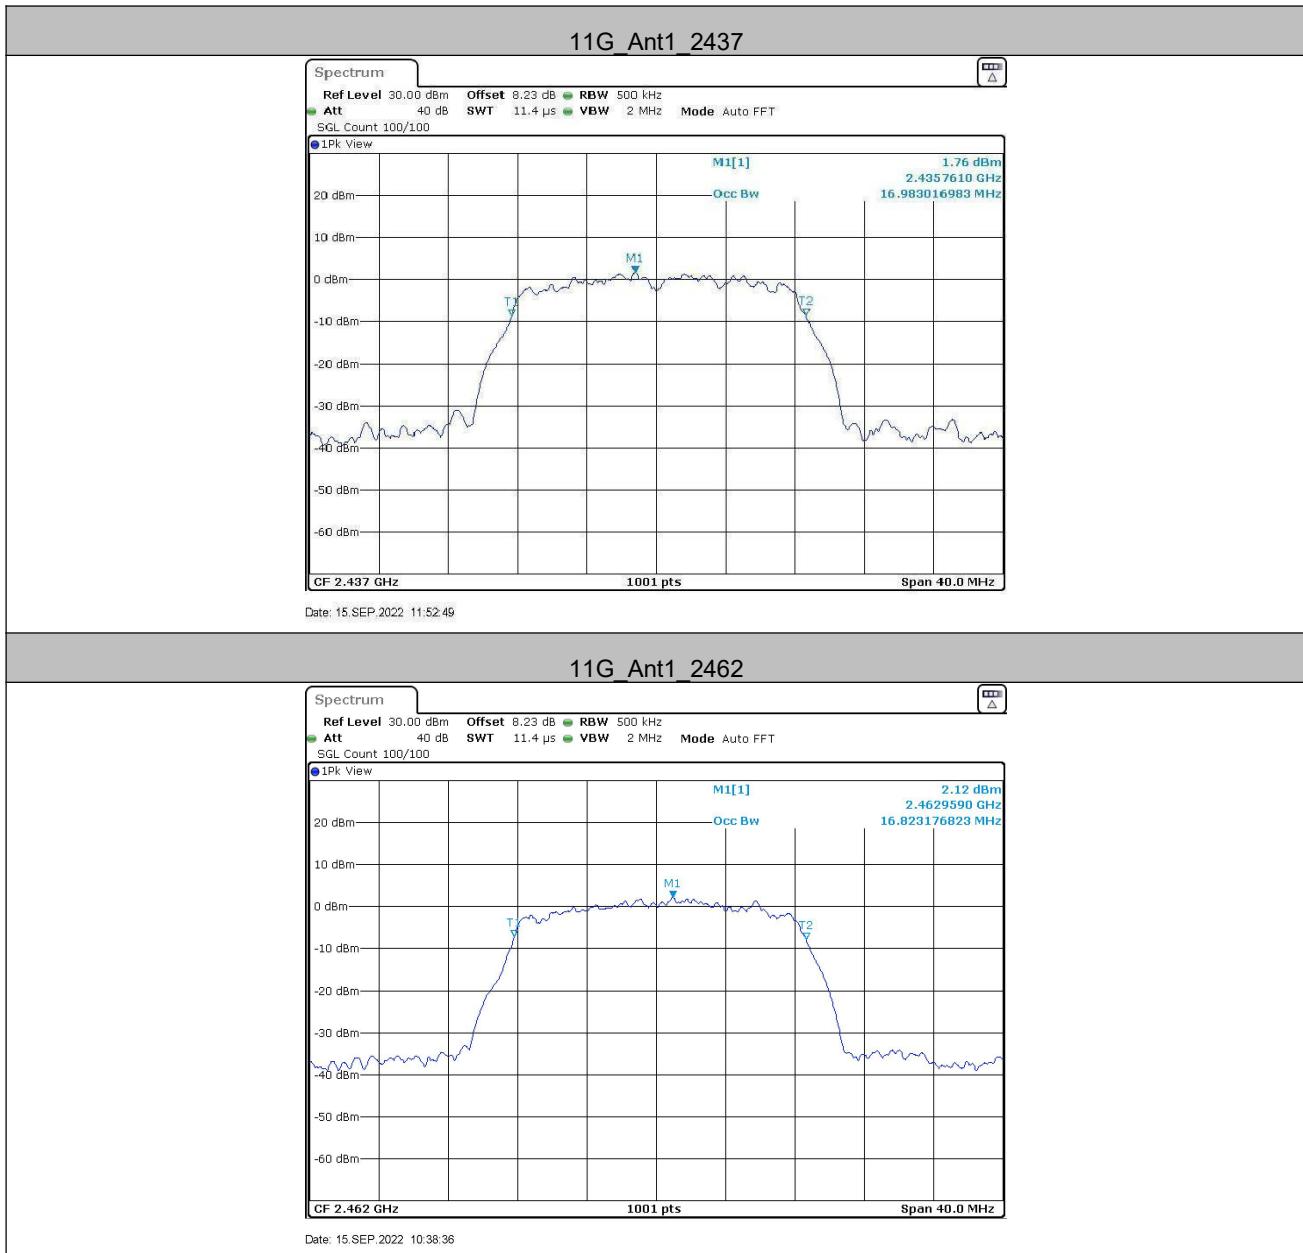


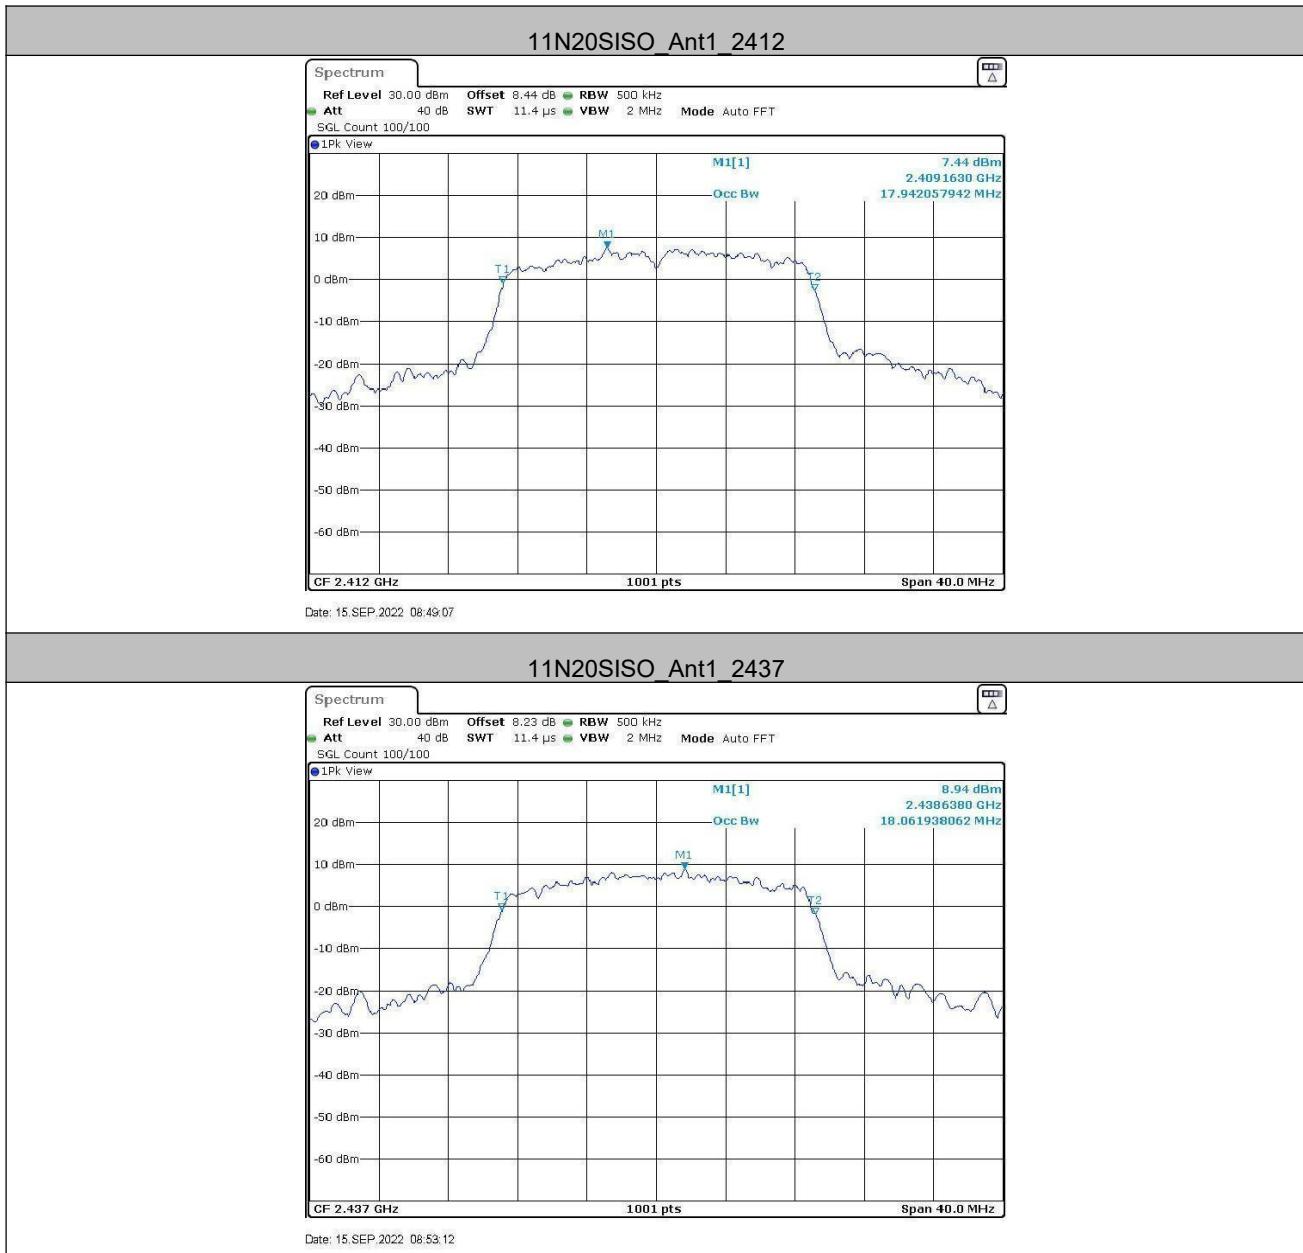

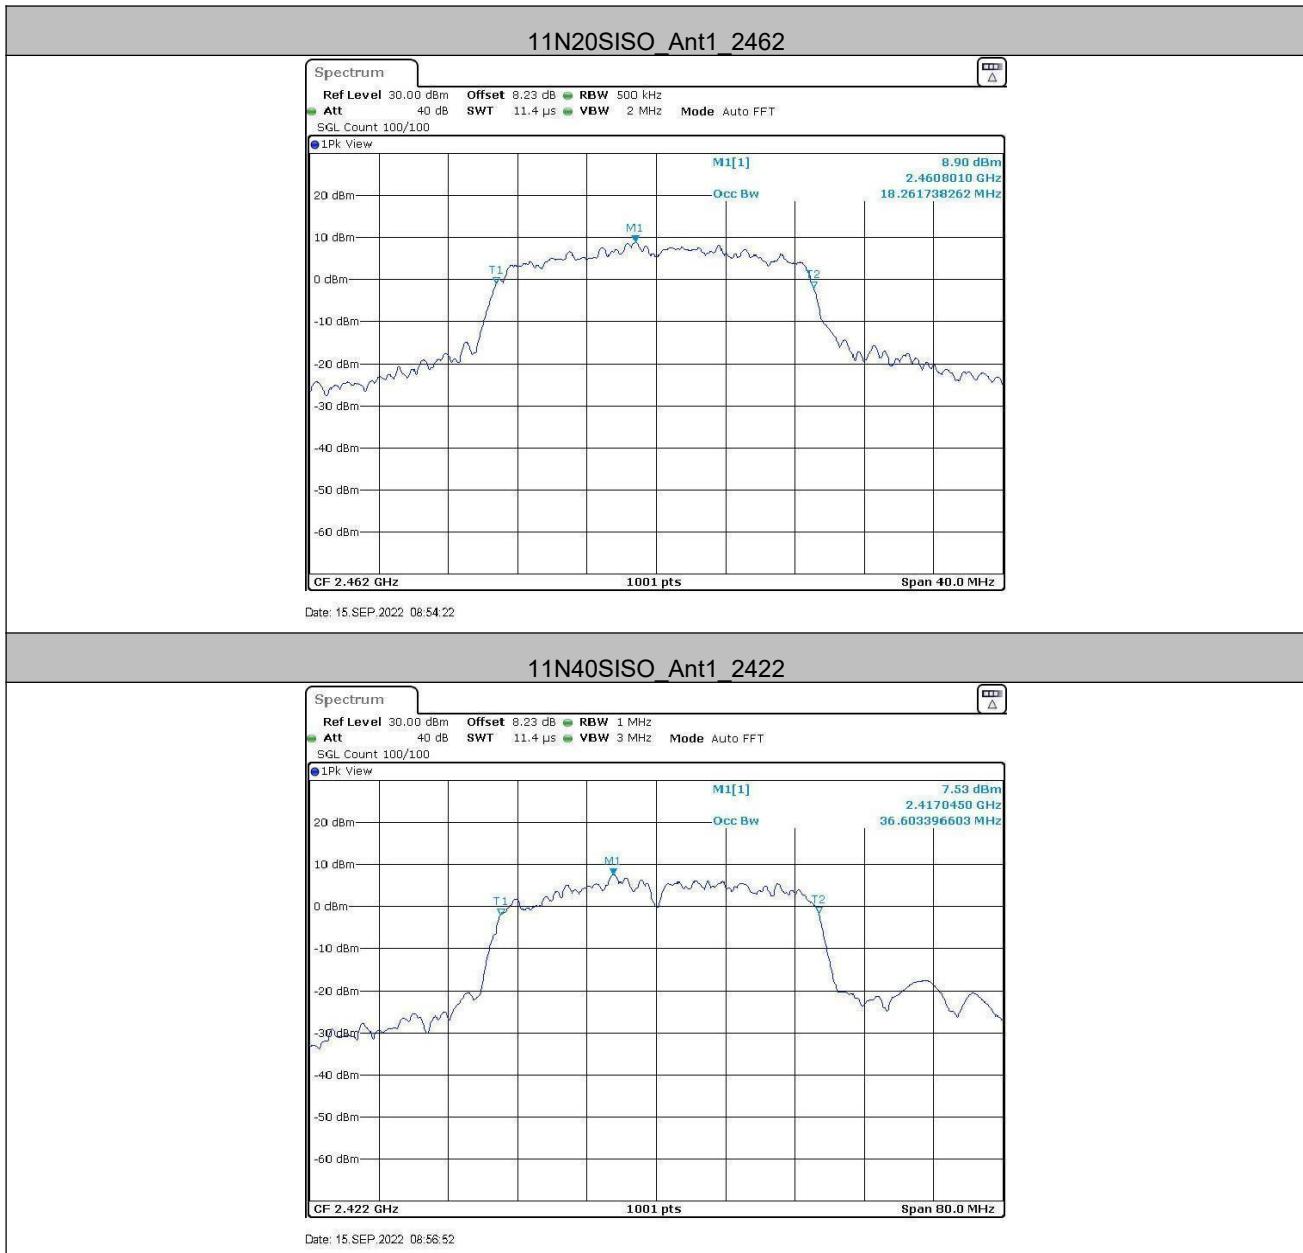

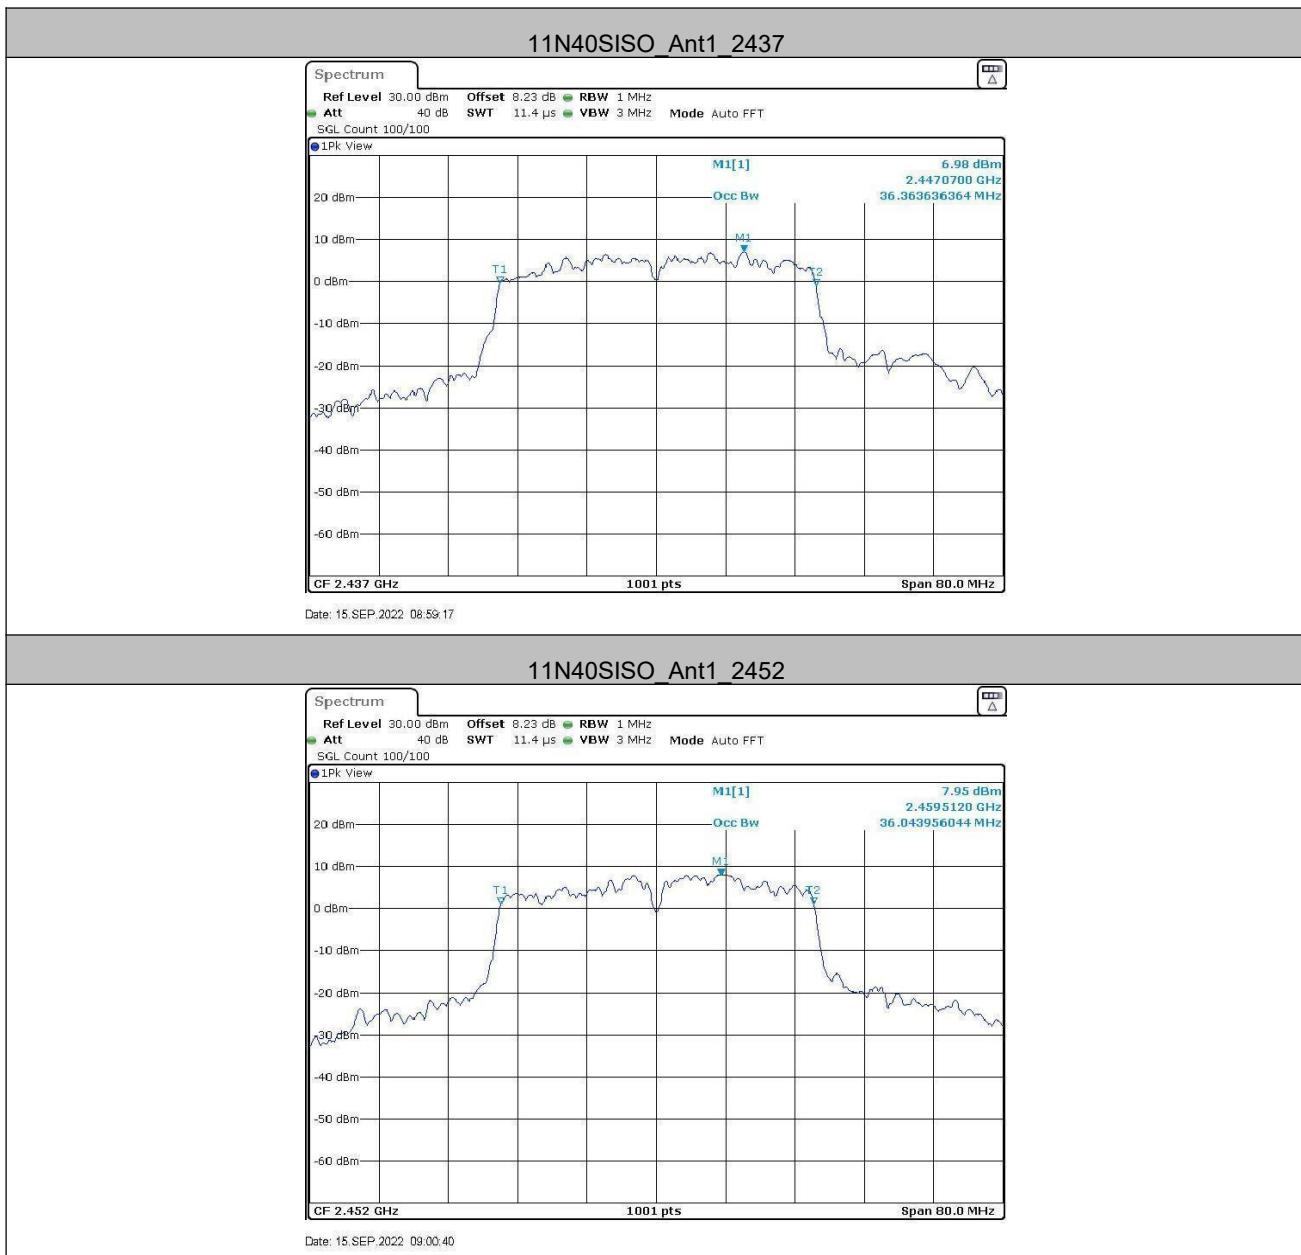



4.5 Power Spectral Density

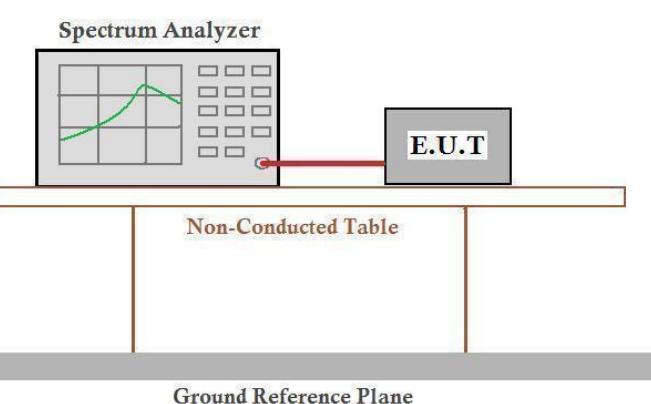
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p style="text-align: center;">  Offset=cable loss+ attenuation factor </p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass


Measurement Data


802.11b mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-22.49	≤8.00	Pass
Middle	-21.57	≤8.00	Pass
Highest	-18.68	≤8.00	Pass
802.11g mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-25.18	≤8.00	Pass
Middle	-24.26	≤8.00	Pass
Highest	-24.17	≤8.00	Pass
802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-24.86	≤8.00	Pass
Middle	-24.3	≤8.00	Pass
Highest	-23.98	≤8.00	Pass
802.11n(HT40) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-25.41	≤8.00	Pass
Middle	-24.6	≤8.00	Pass
Highest	-25.15	≤8.00	Pass

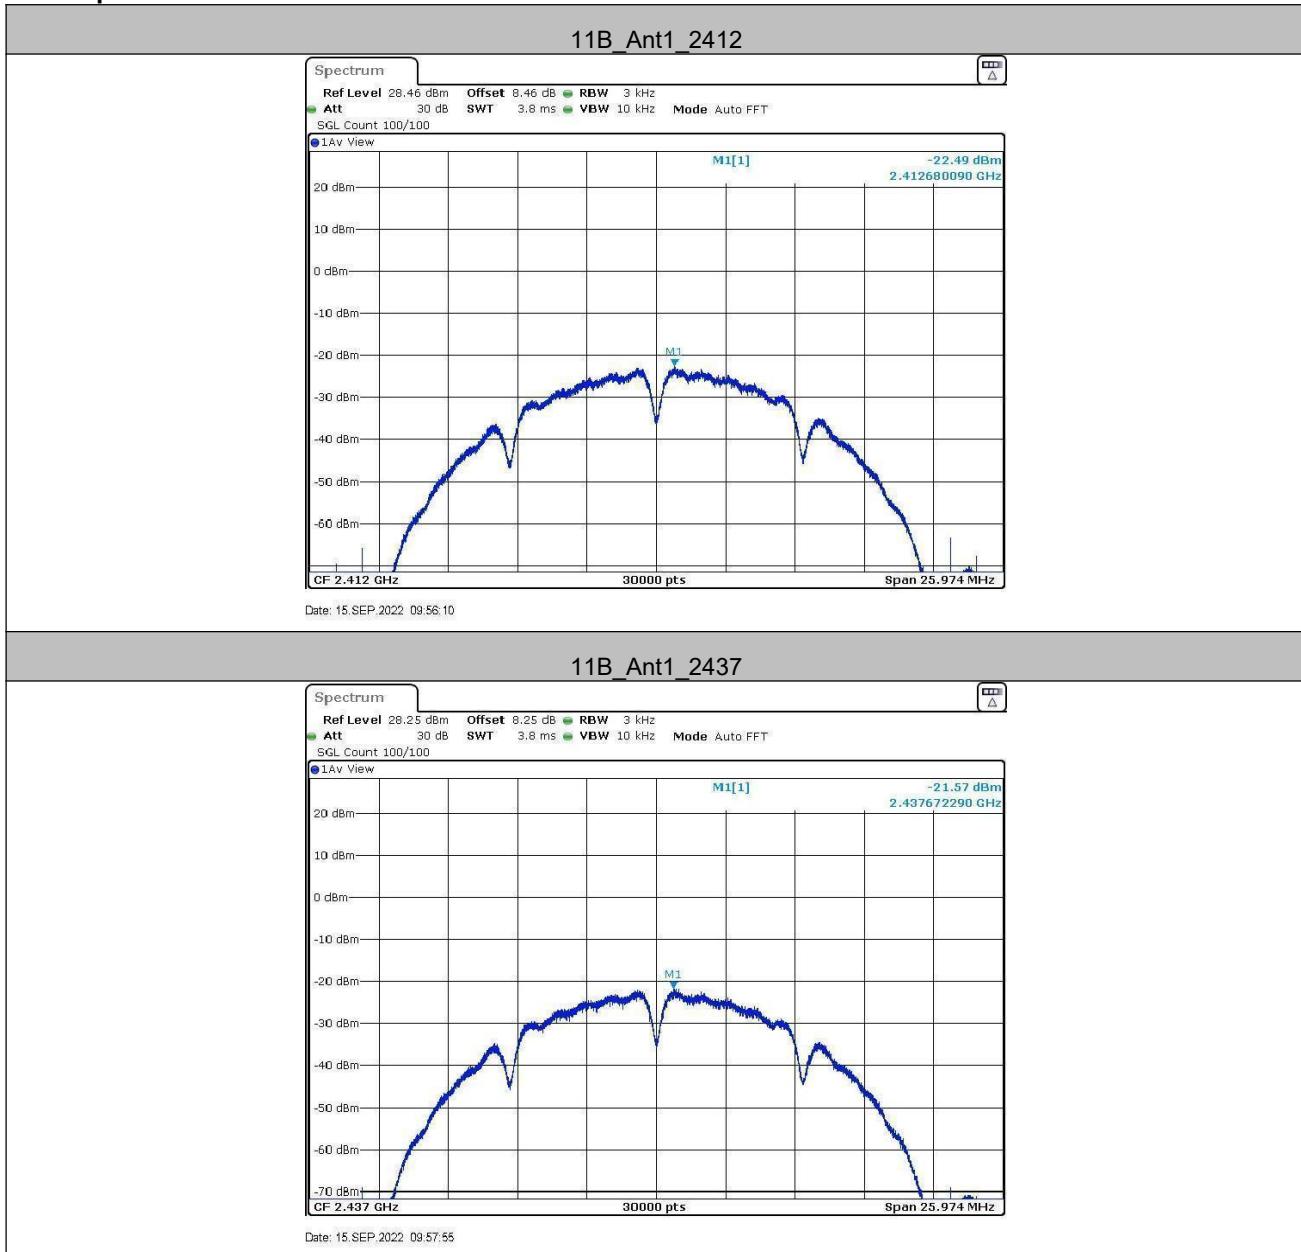
Test plot as follows:

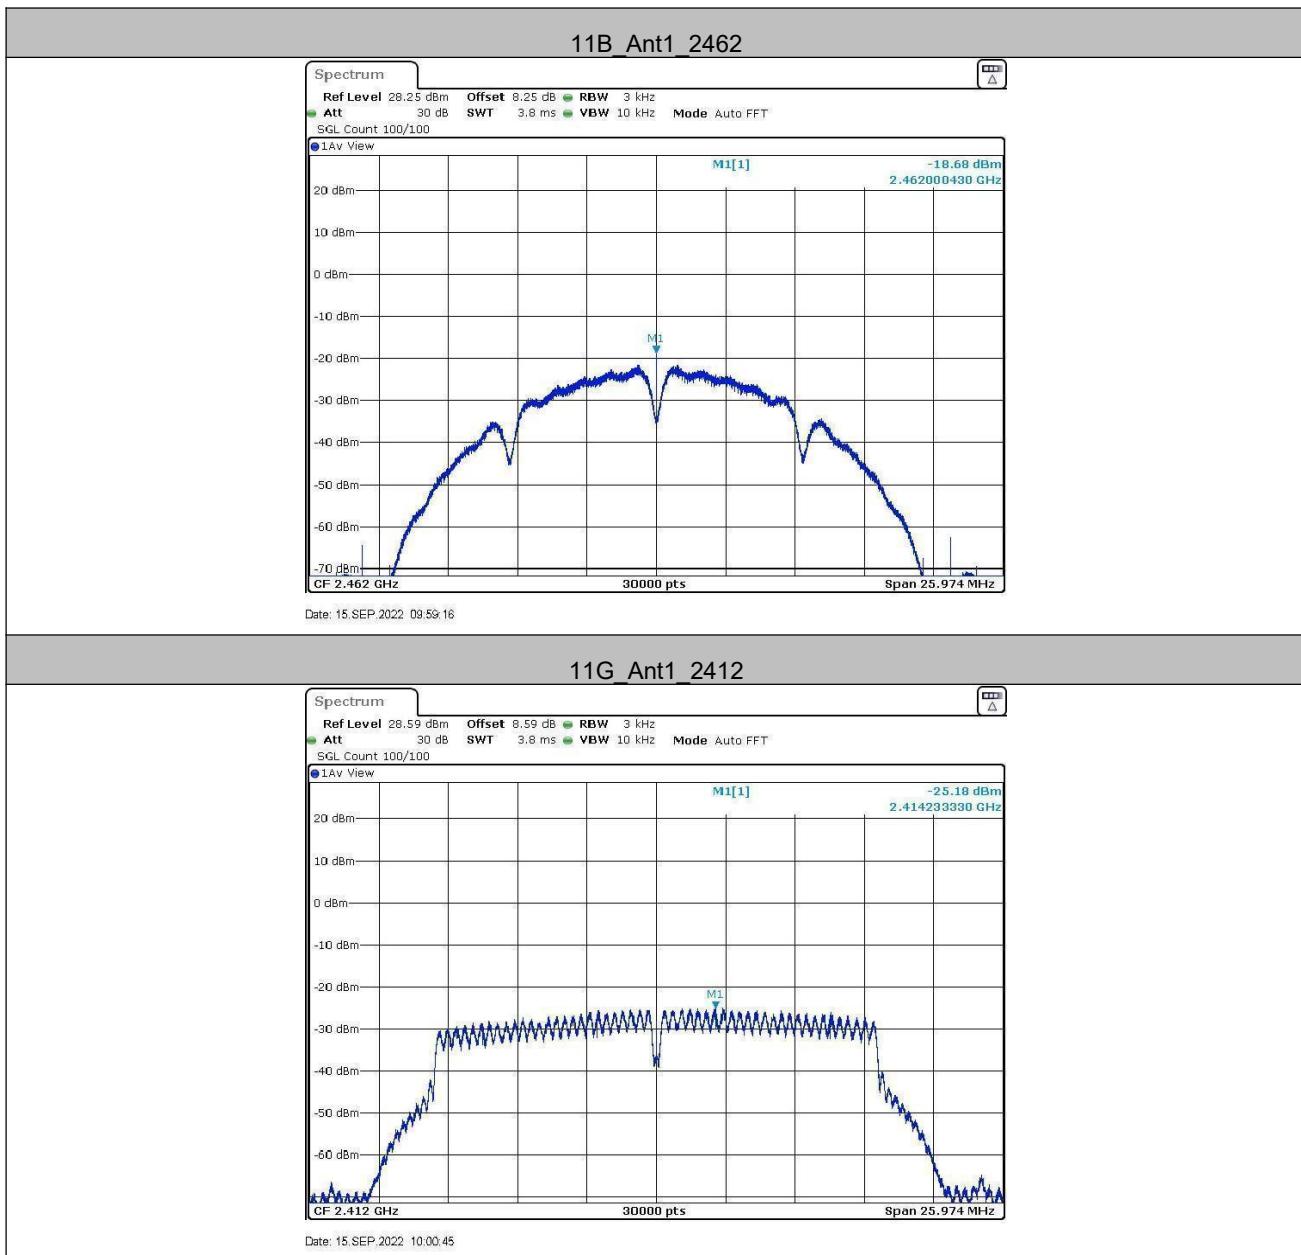

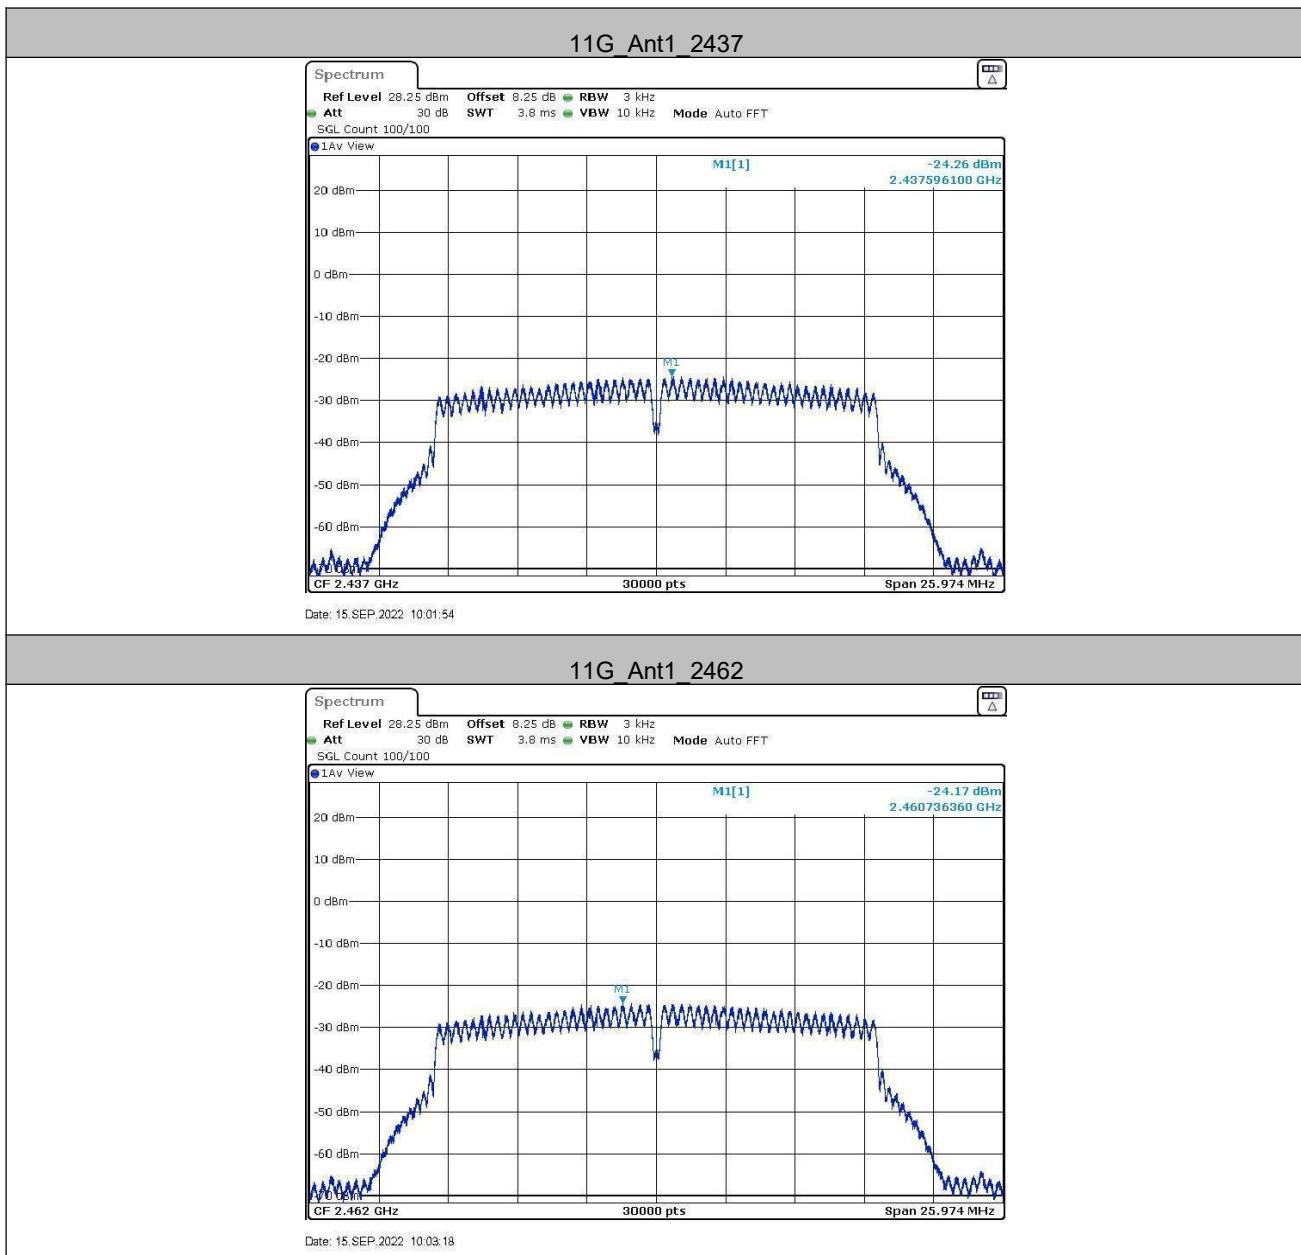


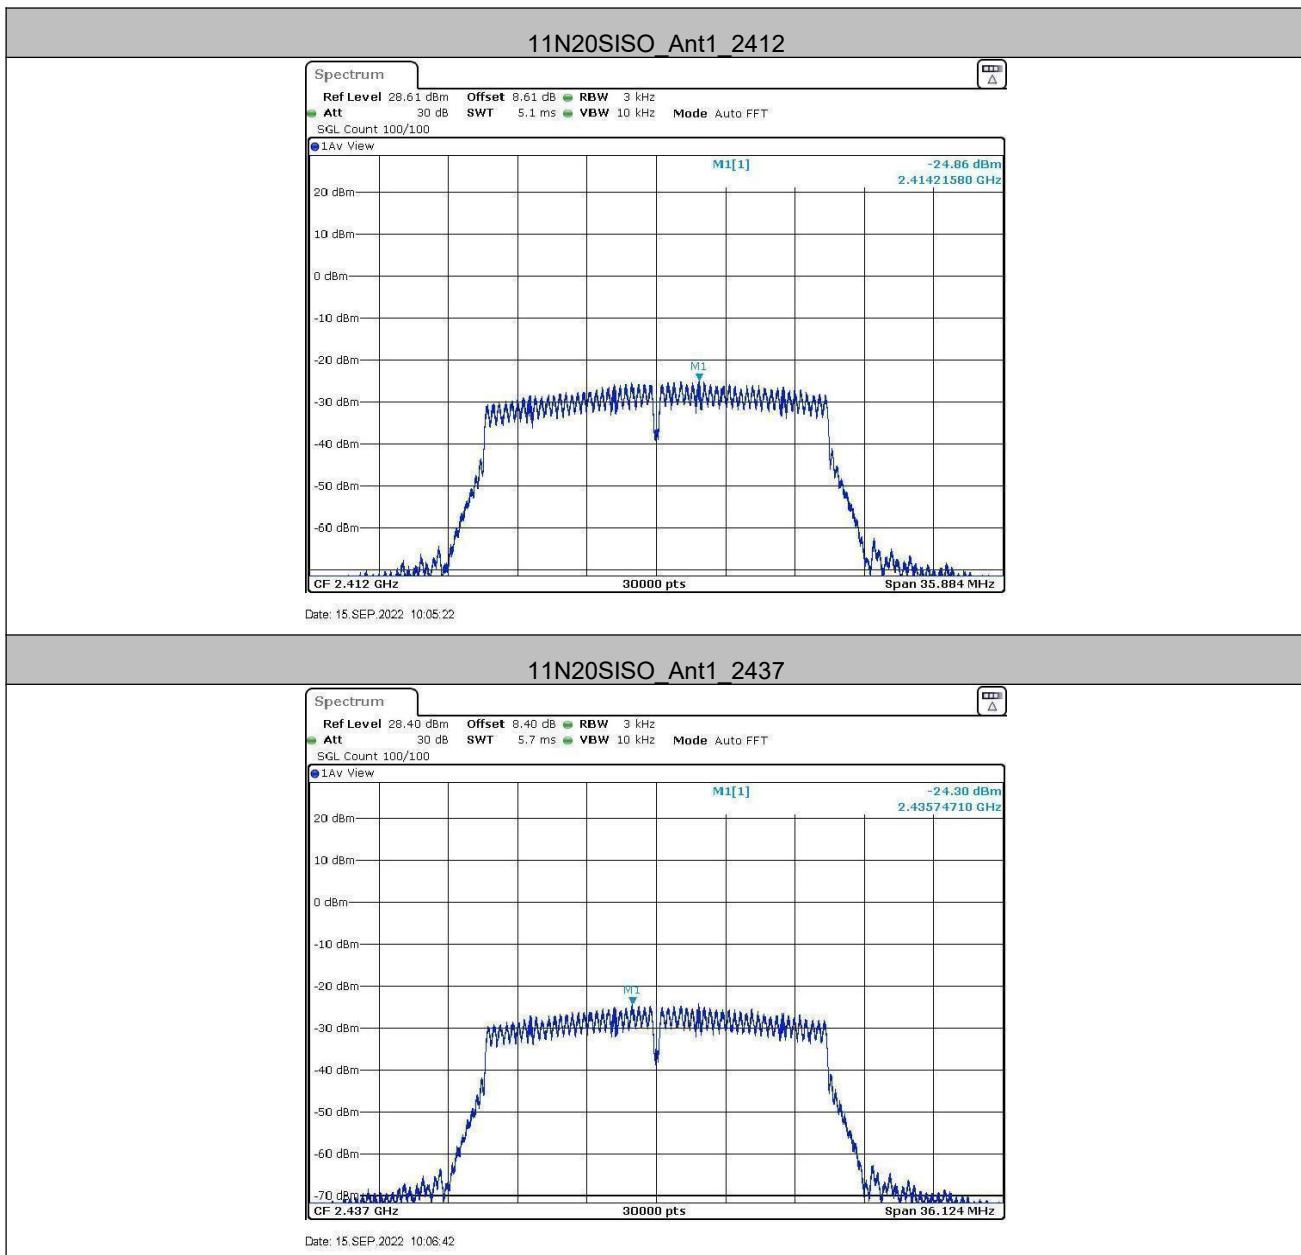

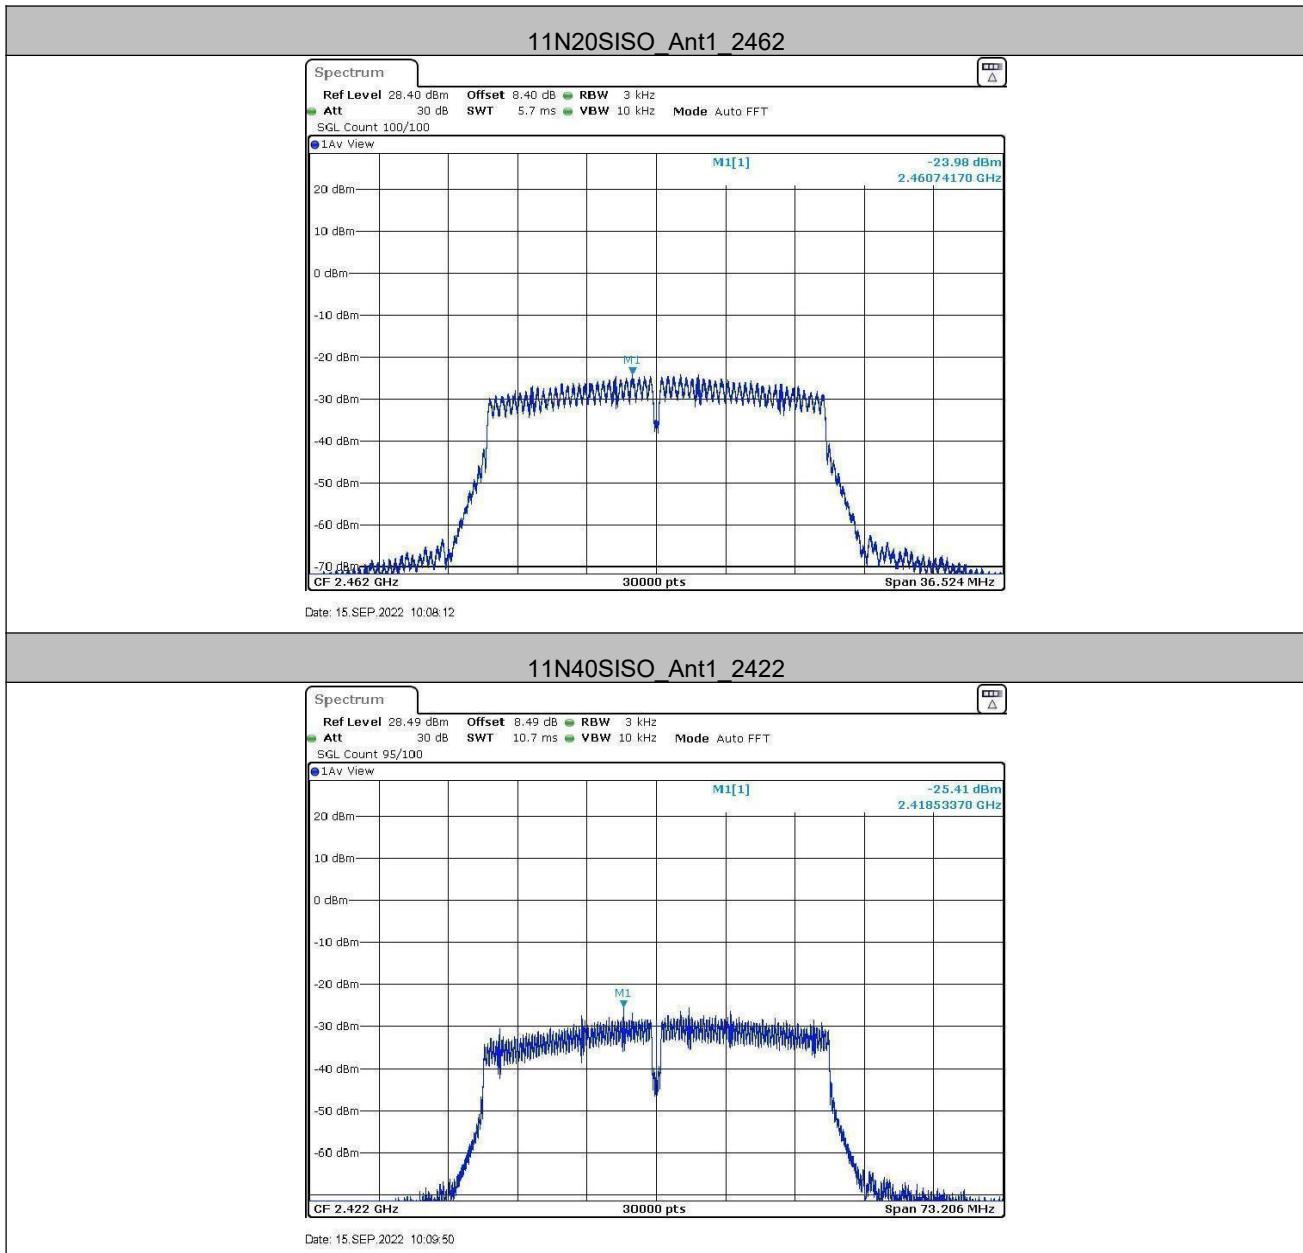

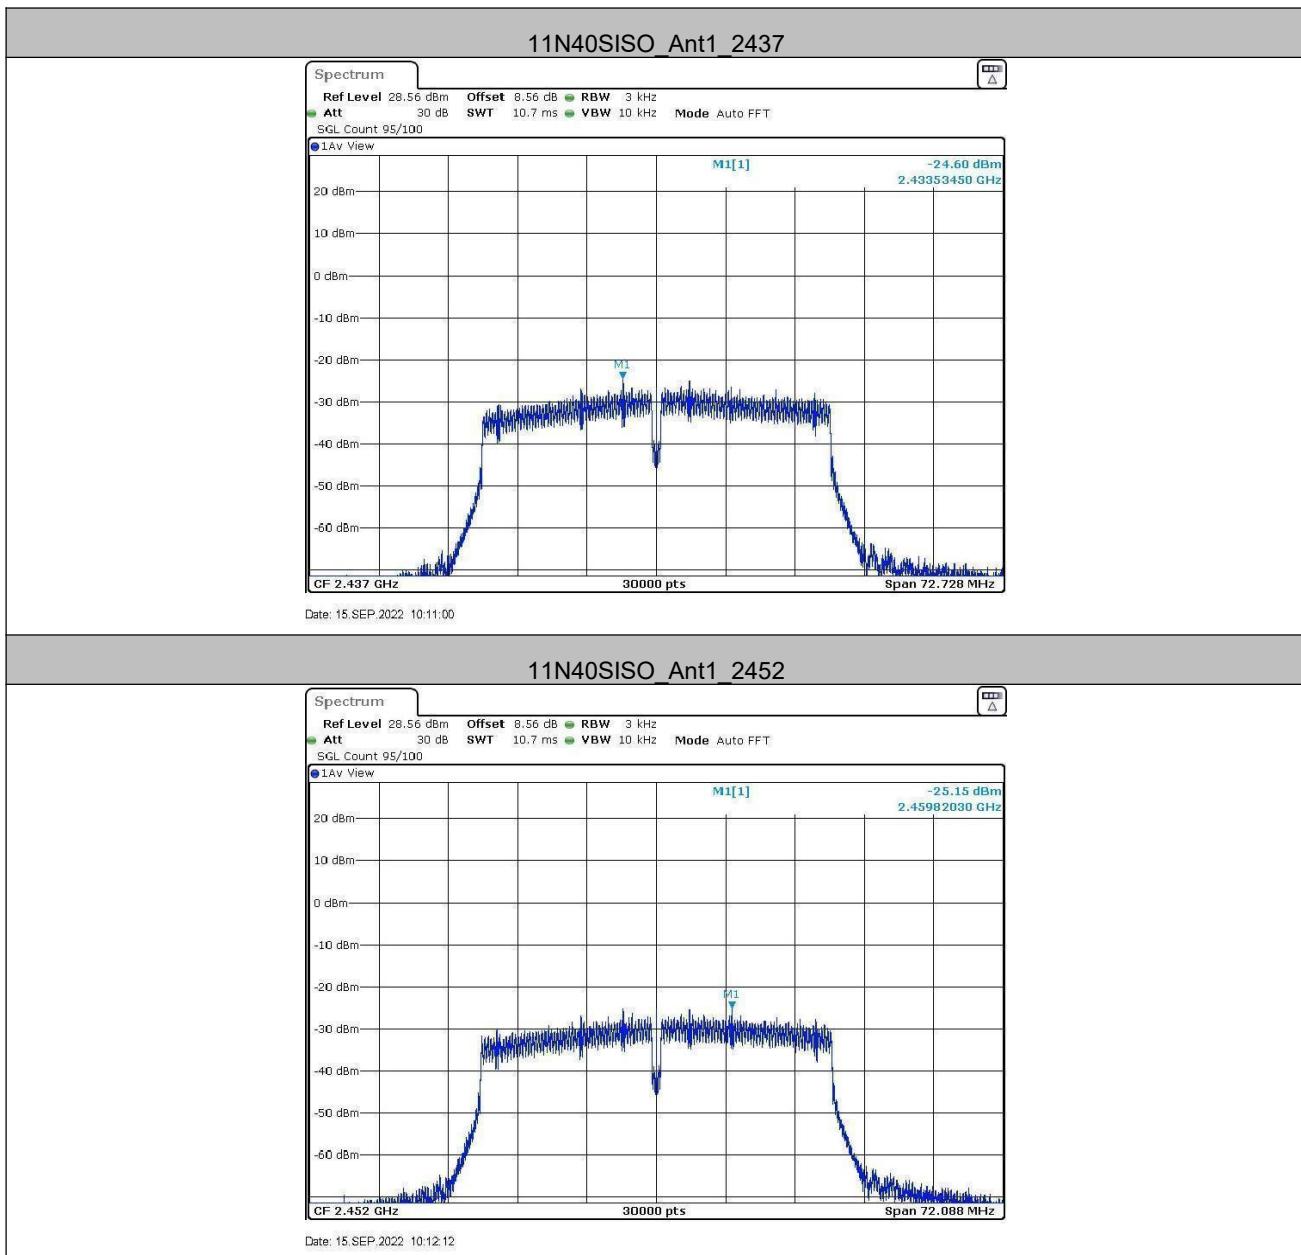



4.6 Band-edge for RF Conducted Emissions

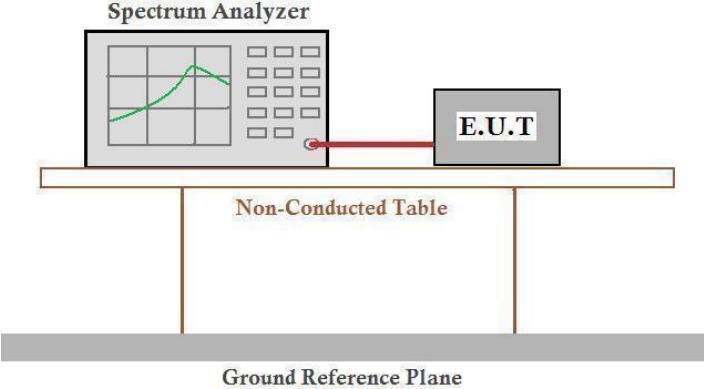Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p style="text-align: center;">  Offset=cable loss+ attenuation factor </p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Data:

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	-0.50	-50.24	≤-30.5	PASS
		High	2462	0.73	-49.46	≤-29.27	PASS
11G	Ant1	Low	2412	-2.76	-43.95	≤-32.76	PASS
		High	2462	-4.32	-48.98	≤-34.32	PASS
11N20SISO	Ant1	Low	2412	-2.42	-44.66	≤-32.42	PASS
		High	2462	-2.87	-48.35	≤-32.87	PASS
11N40SISO	Ant1	Low	2422	-4.36	-44	≤-34.36	PASS
		High	2452	-4.99	-40	≤-34.99	PASS

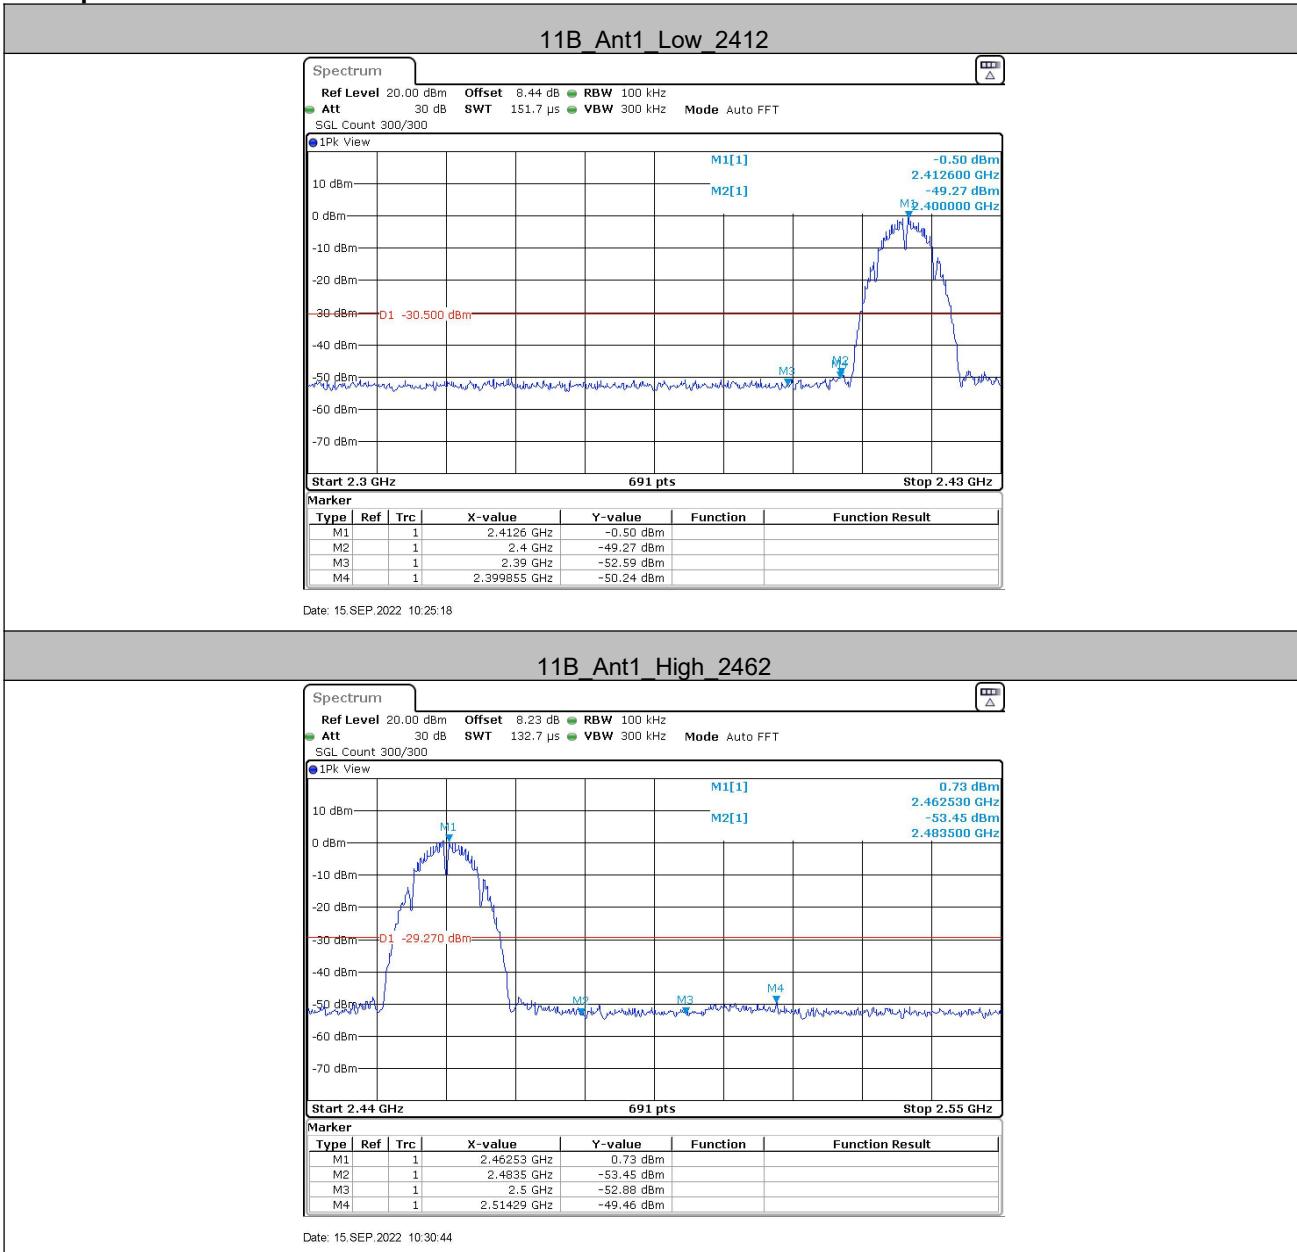
Test plot as follows:

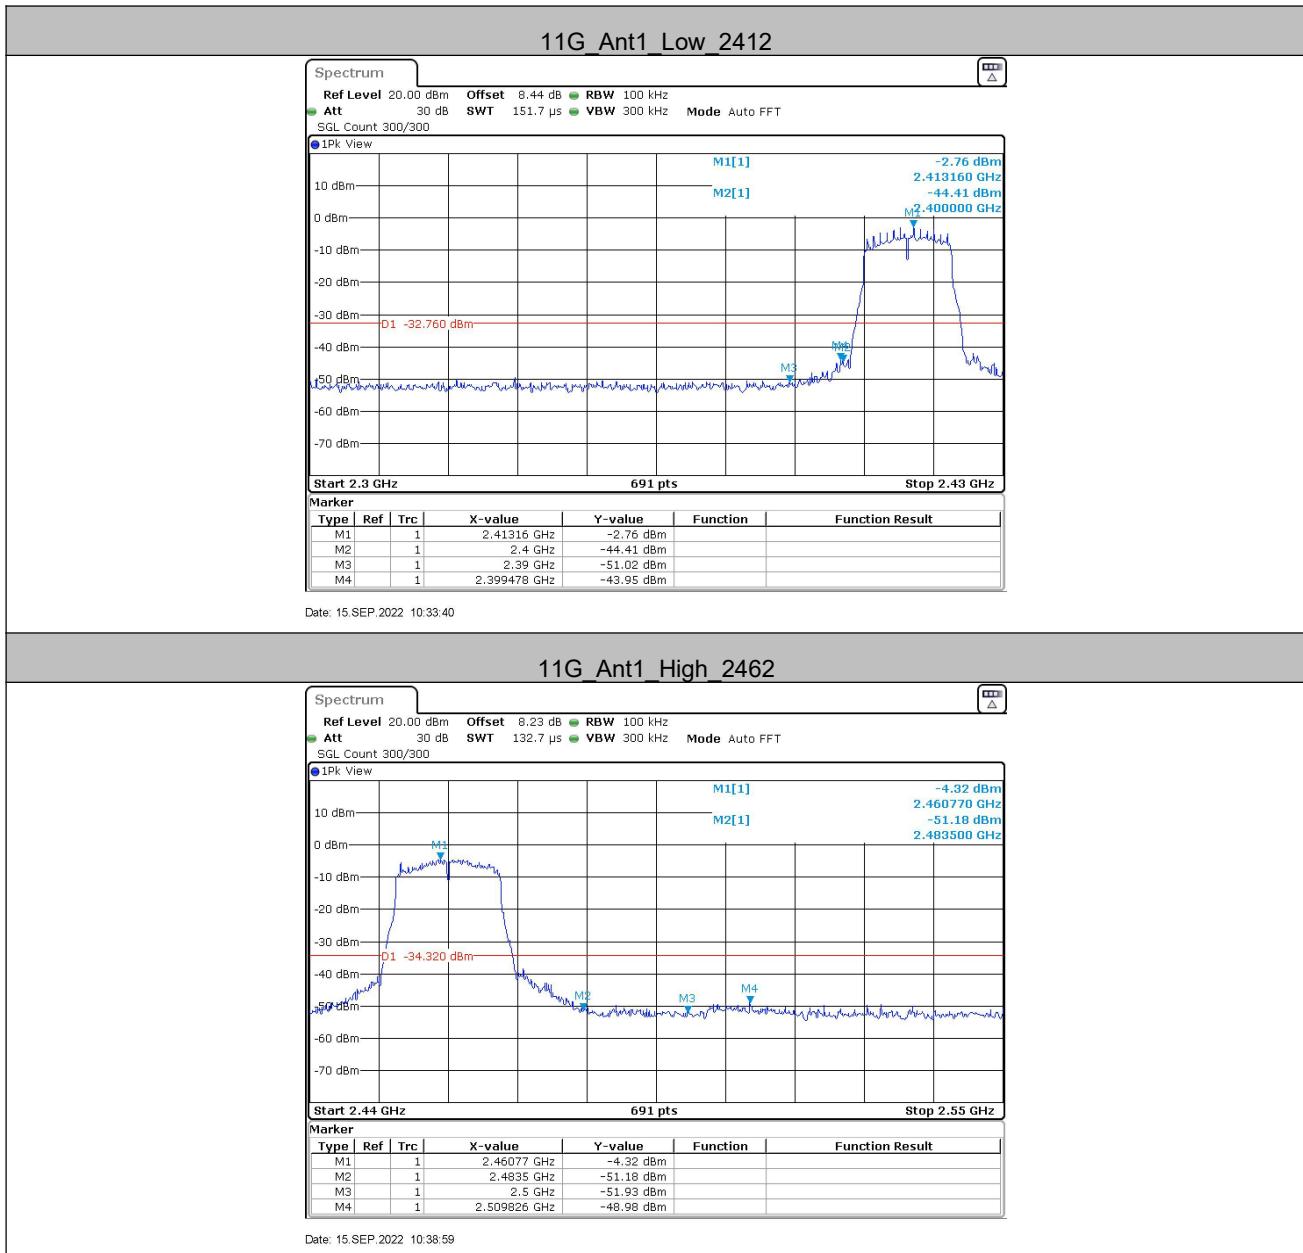



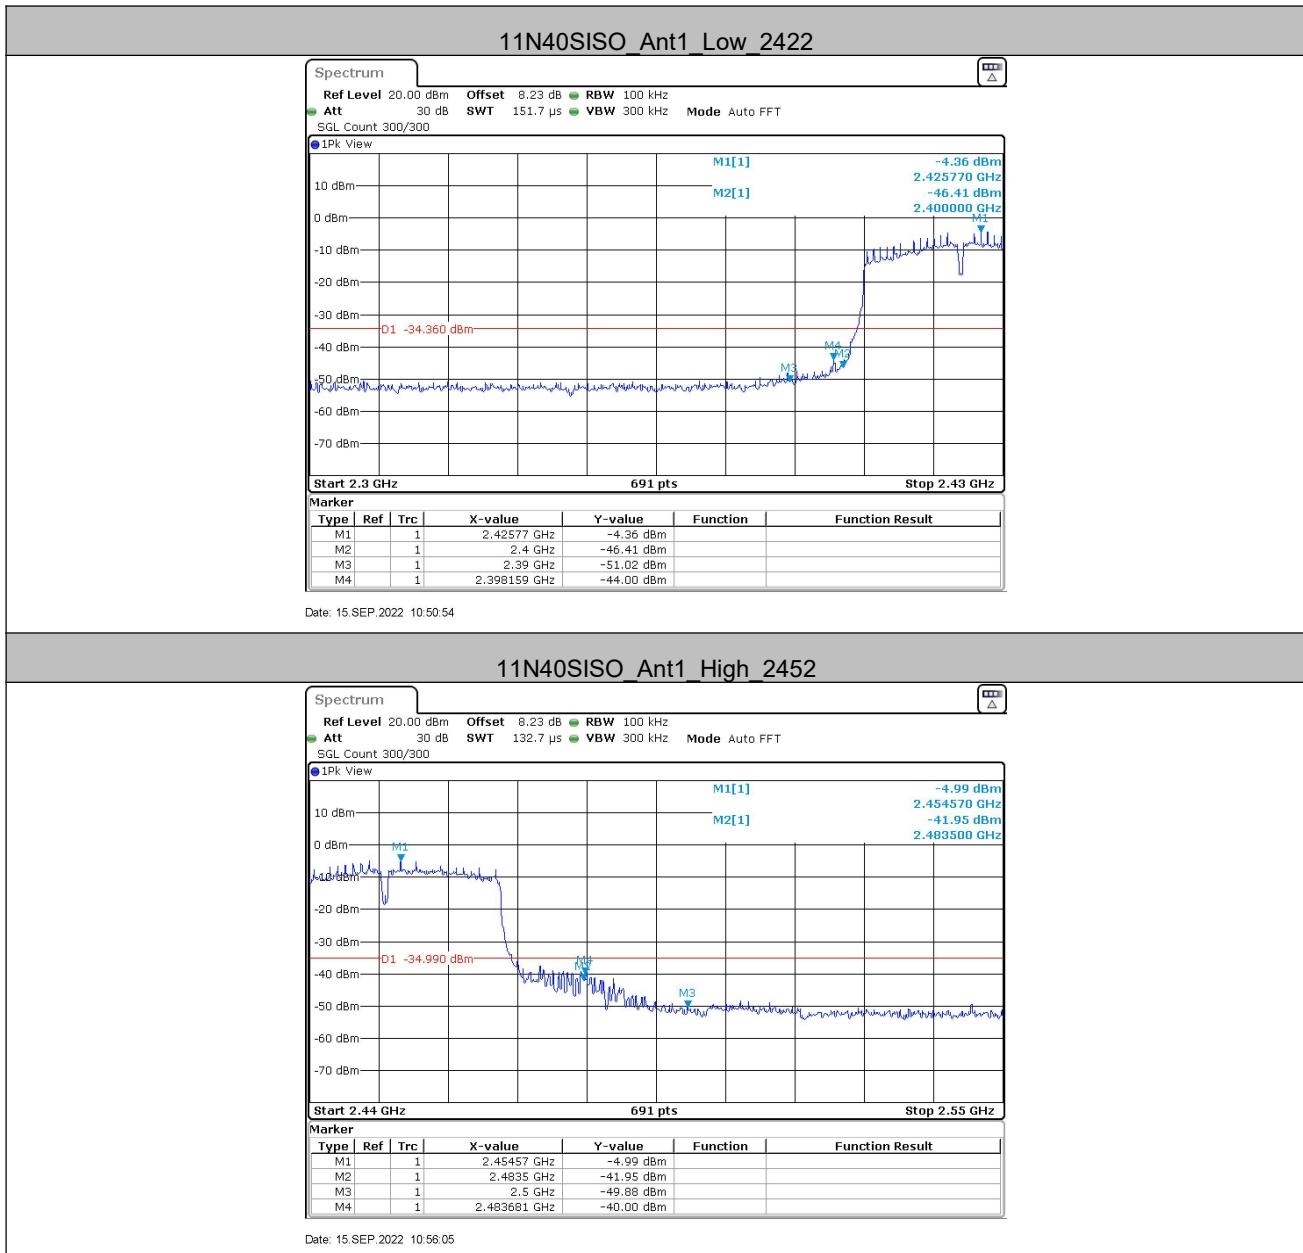


4.7 RF Conducted Spurious Emissions

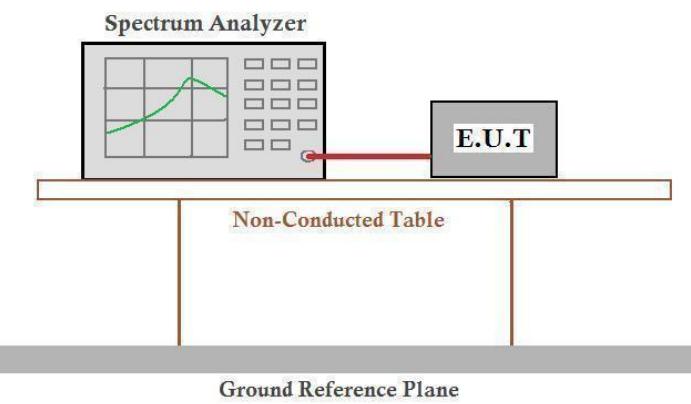Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p style="text-align: center;">  Offset=cable loss+ attenuation factor </p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass