

# Radio Test Report

Report No.: STS2404058W07

Issued for

THINKCAR TECH CO., LTD.

2606, building 4, phase II, TiananYungu, Gangtou community,  
Bantian, Longgang District, Shenzhen, China

Product Name: TPMS Intelligent Detection Tool

Brand Name: THINKCAR, XHINKCAR, MUCAR

Model Name: VENU-i Pro

Series Model(s): N/A

FCC ID: 2AUARVENUIPRO

Test Standards: FCC Part 15 Subpart C

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name .....: THINKCAR TECH CO., LTD.  
Address.....: 2606, building 4, phase II, TiananYungu, Gangtou community,  
Bantian, Longgang District, Shenzhen, China  
Manufacturer's Name .....: THINKCAR TECH CO., LTD.  
Address.....: 2606, building 4, phase II, TiananYungu, Gangtou community,  
Bantian, Longgang District, Shenzhen, China

**Product Description**

Product Name .....: TPMS Intelligent Detection Tool  
Brand .....: THINKCAR, XHINKCAR, MUCAR  
Model Number.....: VENU-i Pro  
Series Model(s) .....: N/A

**Test Standards**.....: FCC Part 15 Subpart C

Test Procedure .....: ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**Date of Test**.....:

Date of receipt of test item .....: 12Apr. 2024

Date (s) of performance of tests : 12Apr. 2024~ 18 Apr. 2024

Date of Issue .....: 18 Apr. 2024

Test Result .....: **Pass**

Testing Engineer :

*Chris Chen*

(Chris Chen)

Technical Manager :

*Chris Chen*

(Chris Chen)

Authorized Signatory :

*Bovey Yang*

(Bovey Yang)



Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
<b>2. GENERAL INFORMATION</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF THE EUT	6
2.2 DESCRIPTION OF THE TEST MODES	7
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
<b>3. CONDUCTED EMISSION TEST RESULT (SECTION 15.207)</b>	<b>10</b>
3.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.2 TEST PROCEDURE	11
3.3 TEST SETUP	11
3.4 EUT OPERATING CONDITIONS	11
3.5 TEST RESULTS	12
<b>4. RADIATED&amp; FIELD EMISSION TEST RESULT (SECTIOU 15.209)</b>	<b>14</b>
4.1 LIMIT	14
4.2 TEST PROCEDURE	14
4.3 TEST SETUP	15
4.4 TEST RESULTS	16
<b>5. 20 DB BANDWIDTH TEST</b>	<b>20</b>
5.1 LIMIT	20
5.2 TEST SETUP	20
5.3 TEST RESULTS	20
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>21</b>



**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	18 Apr. 2024	STS2404058W07	ALL	Initial Issue

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.209(a)	Radiated emission, Spurious Emission	PASS	
2.1049	20 dB Bandwidth	PASS	

### 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	TPMS Intelligent Detection Tool
Brand	THINKCAR, XHINKCAR, MUCAR
Model Number	VENU-i Pro
Series Model(s)	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Antenna Type	Please refer to the Note 3.
Equipemnt Category	Non-ISM frequency
Operating frequency	125KHz
Modulation Type	ASK
Rating	Input: 5V 1A
Battery	Rated Voltage: 3.7V Charge Limit Voltage: 4.2V Capacity: 2000mAh
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- 2.

Channel List					
Channel	Frequency (KHz)	Channel	Frequency (KHz)	Channel	Frequency (KHz)
00	125	--	--	--	--

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	NOTE
1	THINKCAR, XHINKCAR, MUCAR	VENU-i Pro	Magnetic rod	N/A	Antenna

## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode


### 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

#### Radiated Emission Test



#### Conducted Emission Test

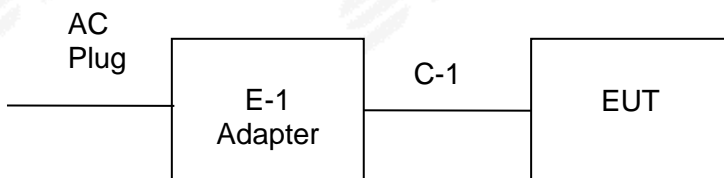

### 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

#### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-1	Adapter	HUAWEI	HW-050450C00	N/A	N/A
C-1	USB Cable	N/A	N/A	110cm	NO

#### Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2023.09.25	2024.09.24
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2025.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Temperature & Humidity	HH660	Mieo	N/A	2024.03.15	2025.03.14
Test SW	BALUN	BL410-E/18.905			

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2023.09.25	2024.09.24
Limtter	CYBERTEK	EM5010	N/A	2023.09.25	2024.09.24
LISN	R&S	ENV216	101242	2023.09.25	2024.09.24
LISN	EMCO	3810/2NM	23625	2023.09.25	2024.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

### 3. CONDUCTED EMISSION TEST RESULT (SECTION 15.207)

#### 3.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of "\*" marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

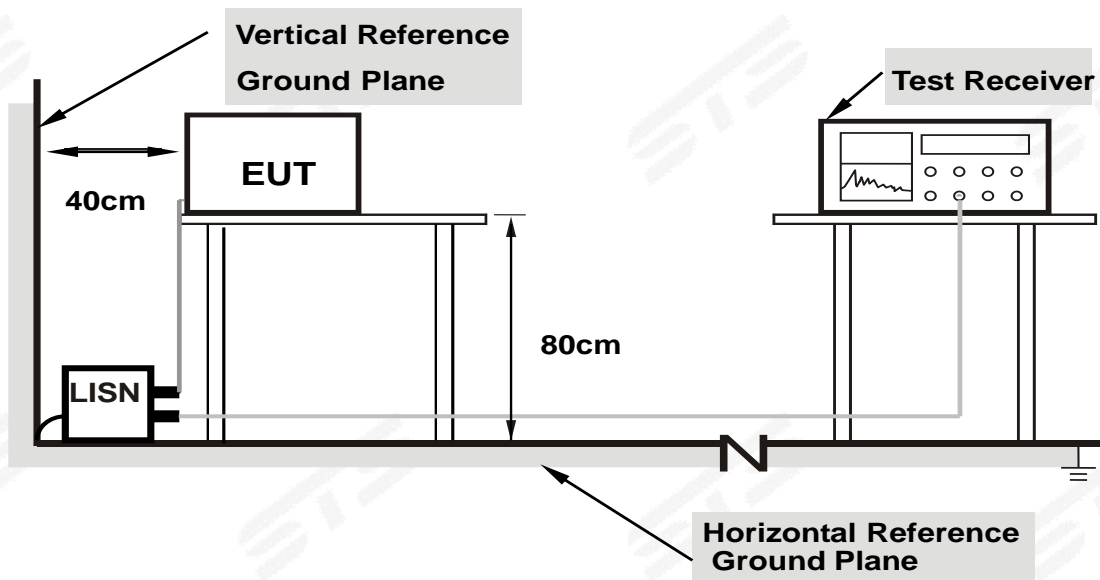

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**

### 3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.5 TEST RESULTS

Temperature:	25.1 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1500	20.01	20.03	40.04	66.00	-25.96	QP
2	0.1500	8.36	20.03	28.39	56.00	-27.61	AVG
3	0.6100	22.36	19.98	42.34	56.00	-13.66	QP
4	0.6100	13.34	19.98	33.32	46.00	-12.68	AVG
5	1.2860	16.12	19.68	35.80	56.00	-20.20	QP
6	1.2860	5.33	19.68	25.01	46.00	-20.99	AVG
7	5.3020	13.38	19.65	33.03	60.00	-26.97	QP
8	5.3020	1.22	19.65	20.87	50.00	-29.13	AVG
9	12.7500	11.66	19.79	31.45	60.00	-28.55	QP
10	12.7500	0.73	19.79	20.52	50.00	-29.48	AVG
11	29.4660	16.13	19.82	35.95	60.00	-24.05	QP
12	29.4660	1.28	19.82	21.10	50.00	-28.90	AVG

#### Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

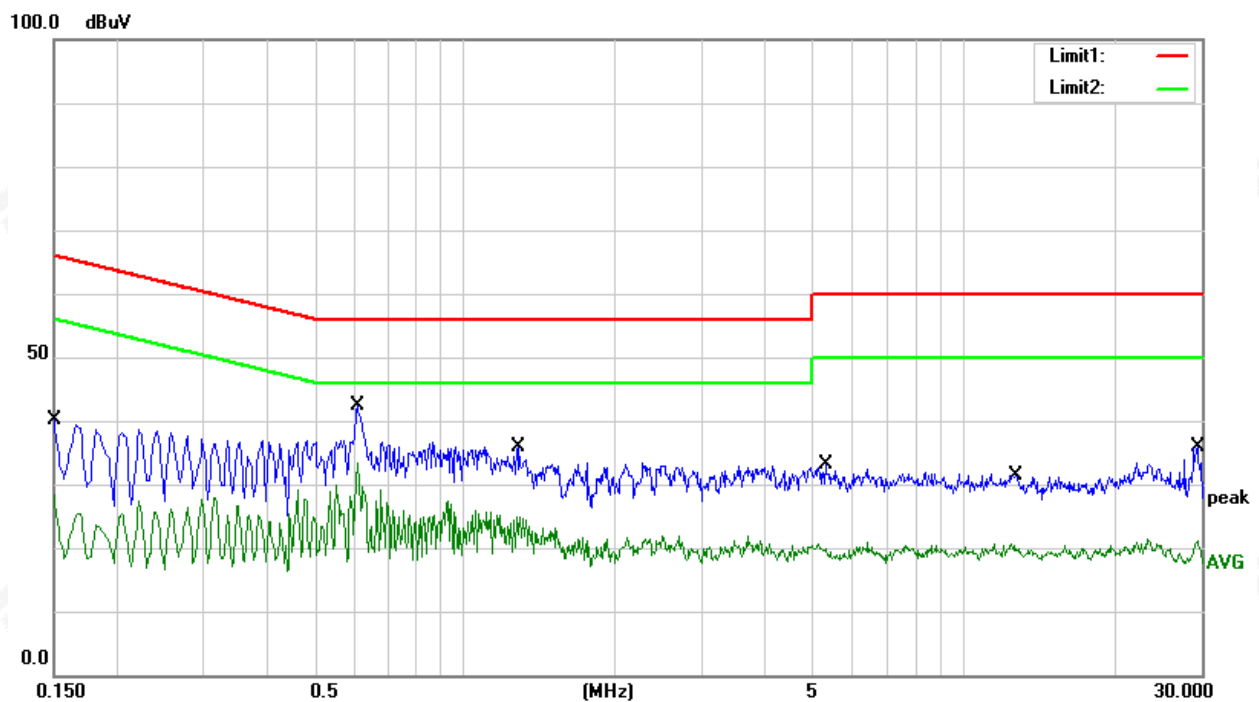


Temperature:	25.1°C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1660	25.38	20.33	45.71	65.16	-19.45	QP
2	0.1660	7.29	20.33	27.62	55.16	-27.54	AVG
3	0.4860	26.02	20.54	46.56	56.24	-9.68	QP
4	0.4860	18.03	20.54	38.57	46.24	-7.67	AVG
5	1.1180	20.82	20.30	41.12	56.00	-14.88	QP
6	1.1180	11.89	20.30	32.19	46.00	-13.81	AVG
7	2.7740	17.75	20.34	38.09	56.00	-17.91	QP
8	2.7740	5.92	20.34	26.26	46.00	-19.74	AVG
9	7.2620	19.93	20.64	40.57	60.00	-19.43	QP
10	7.2620	8.91	20.64	29.55	50.00	-20.45	AVG
11	15.7260	15.24	21.90	37.14	60.00	-22.86	QP
12	15.7260	3.84	21.90	25.74	50.00	-24.26	AVG

#### Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

100.0 dBuV

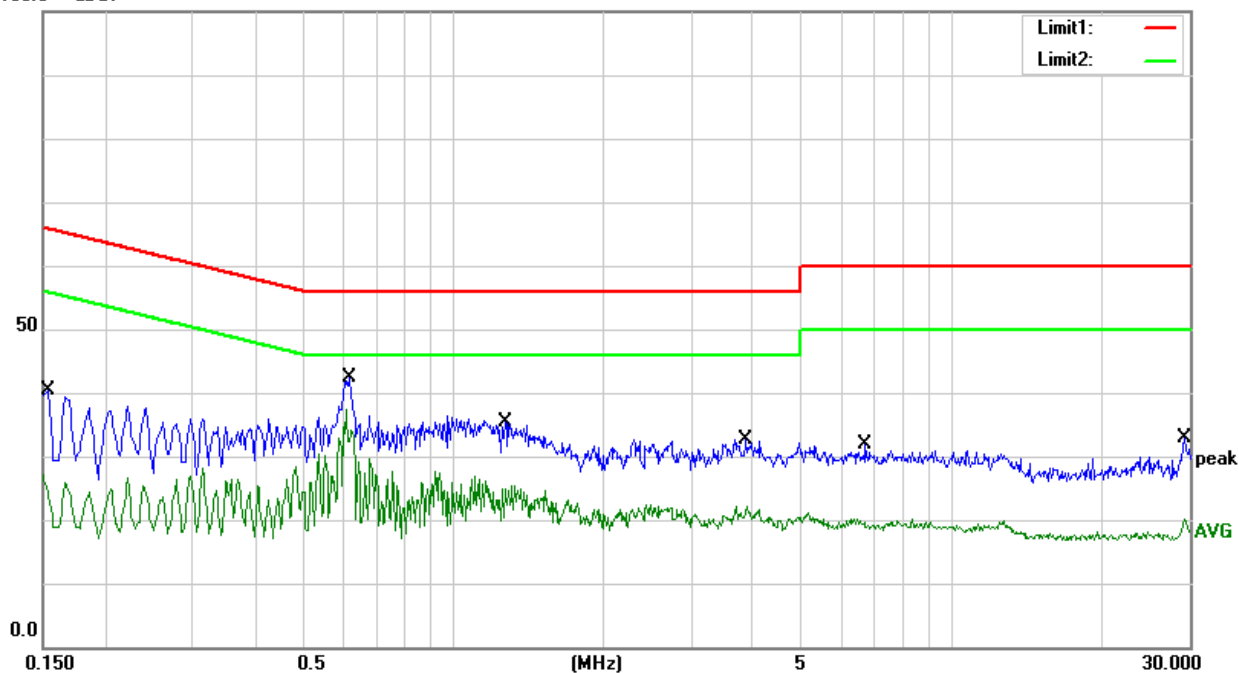

#### 4. RADIATED& FIELD EMISSION TEST RESULT (SECTION 15.209)

##### 4.1 LIMIT

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

§ 15.209(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

##### 4.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 4.3 TEST SETUP

#### (A) Radiated Emission Test-Up Frequency Below 30MHz

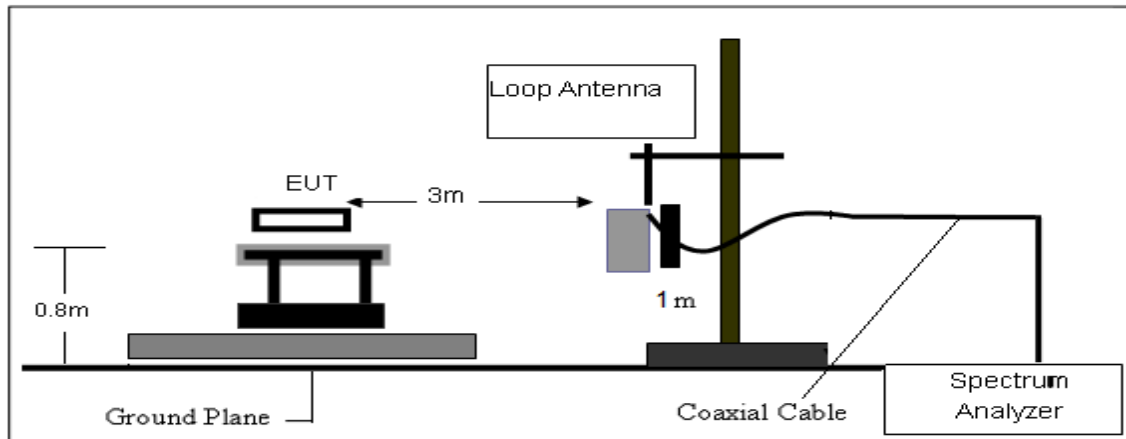


#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

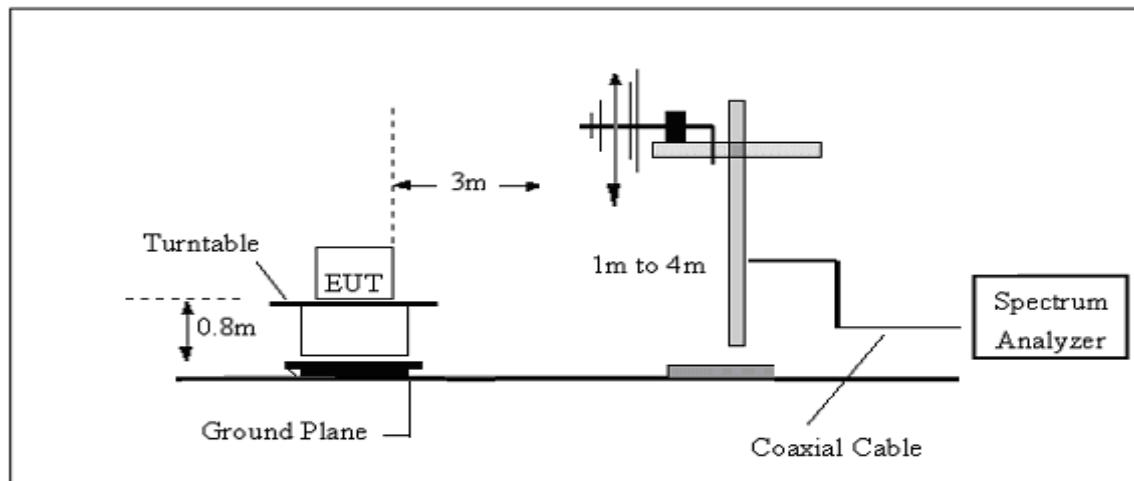

#### 4.4 TEST RESULTS

Temperature :	23.1°C	Relative Humidity :	60%
Test Voltage :	DC 3.7V	Test Mode :	TX Mode


##### 4.4.1 Spurious Radiated Emission Below 30 MHz 9KHz-150KHz

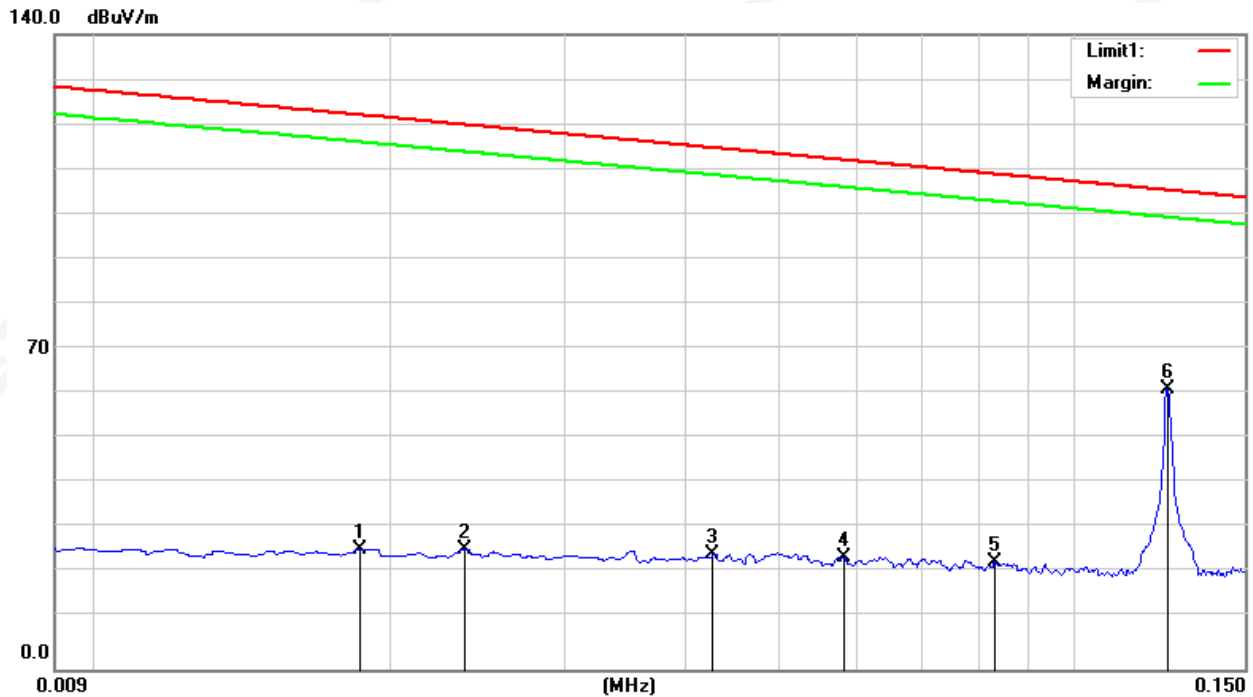

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0184	6.47	19.98	26.45	122.31	-95.86	peak
2	0.0238	6.47	20.02	26.49	120.07	-93.58	peak
3	0.0427	5.87	19.65	25.52	115.00	-89.48	peak
4	0.0582	5.41	19.27	24.68	112.31	-87.63	peak
5	0.0831	5.38	18.41	23.79	109.21	-85.42	peak
6	0.1250	44.29	17.55	61.84	105.67	-43.83	peak



150KHz-30MHz

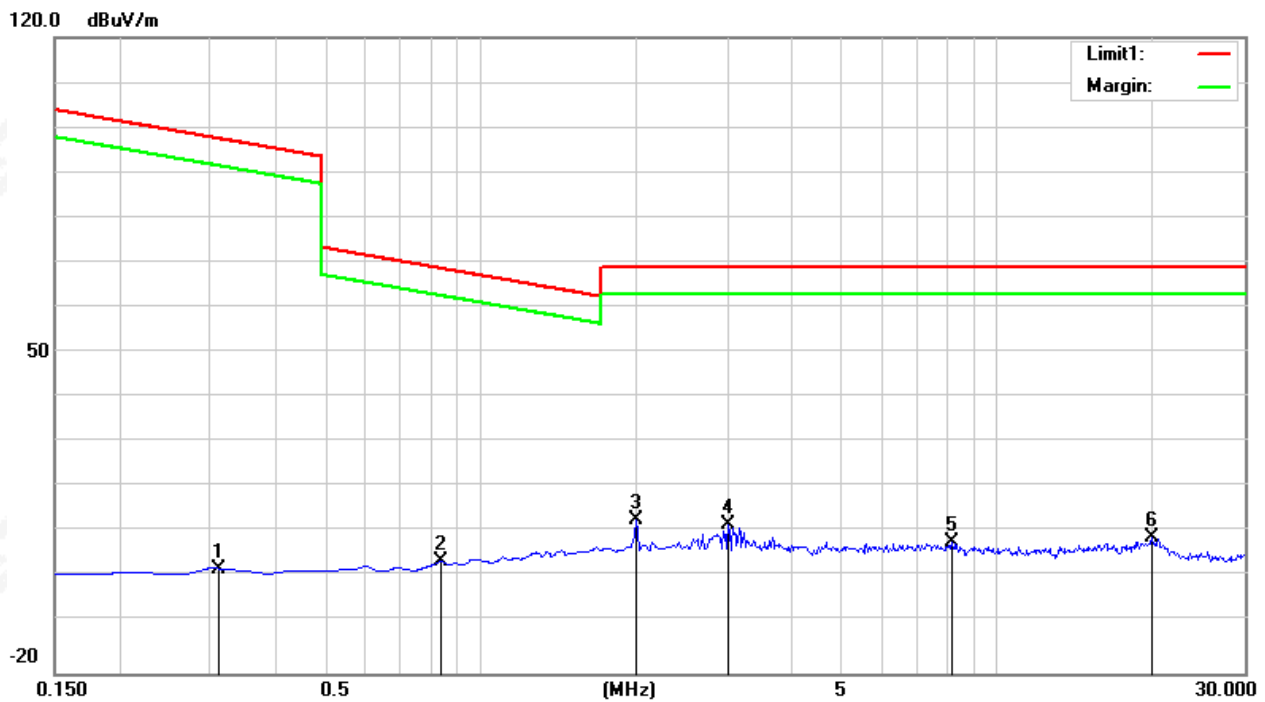

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.3116	-17.04	20.12	3.08	97.73	-94.65	peak
2	0.8366	-15.62	20.27	4.65	69.15	-64.50	peak
3	2.0007	-6.54	20.40	13.86	69.50	-55.64	peak
4	3.0156	-7.41	20.10	12.69	69.50	-56.81	peak
5	8.1797	-11.40	20.31	8.91	69.50	-60.59	peak
6	19.8510	-12.65	22.46	9.81	69.50	-59.69	peak

#### 4.4.2 Spurious Radiated Emission below 1 GHz


Temperature :	23.1 °C	Relative Humidity :	60%
Test Voltage :	DC 3.7V	Test Mode :	Mode 1

The following table shows the highest levels of radiated emissions on polarizations of vertical

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
50.3700	43.35	-23.42	19.93	40.00	-20.07	peak
136.7000	35.58	-18.07	17.51	43.50	-25.99	peak
210.4200	41.56	-20.31	21.25	43.50	-22.25	peak
524.7000	31.29	-7.65	23.64	46.00	-22.36	peak
733.2500	31.74	-2.35	29.39	46.00	-16.61	peak
900.0900	39.22	-0.45	38.77	46.00	-7.23	peak

Remark:

1. Margin = Result (Result = Reading + Factor )–Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

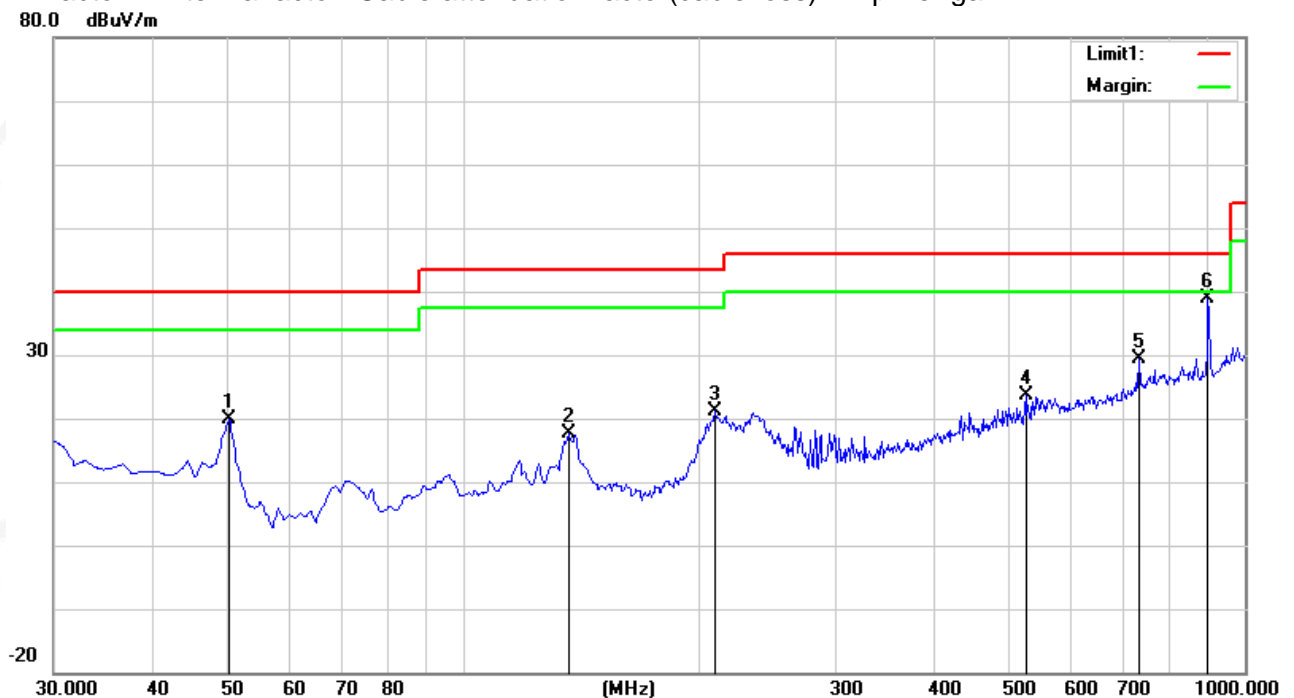


Temperature :	23.1 °C	Relative Humidity :	60%
Test Voltage :	DC 3.7V	Test Mode :	Mode 1

The following table shows the highest levels of radiated emissions on polarizations of horizontal

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
50.3700	53.88	-23.42	30.46	40.00	-9.54	peak
125.0600	39.41	-18.22	21.19	43.50	-22.31	peak
233.7000	46.27	-18.81	27.46	46.00	-18.54	peak
372.4100	42.98	-12.44	30.54	46.00	-15.46	peak
483.9600	45.35	-8.48	36.87	46.00	-9.13	peak
903.9700	33.99	-0.34	33.65	46.00	-12.35	peak

Remark:

1. Margin = Result (Result =Reading + Factor )-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

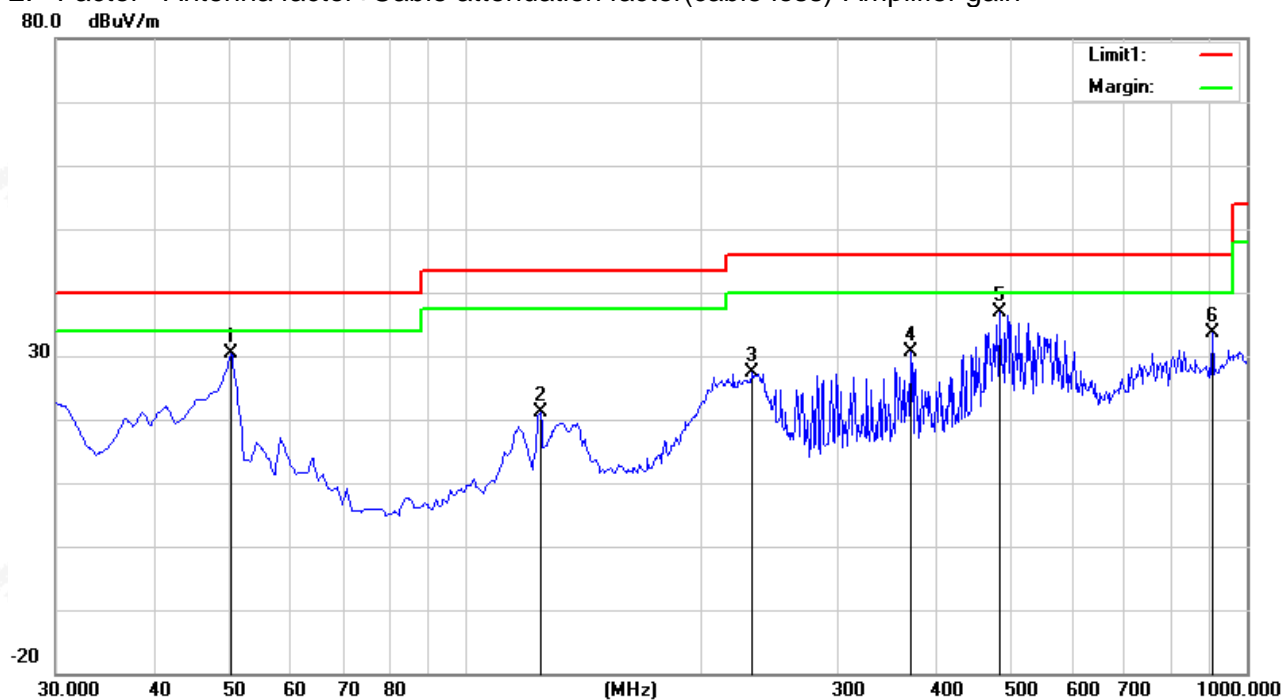

## 5. 20 DB BANDWIDTH TEST

### 5.1 Limit

FCC Part 2.1049, Only applicable to report.

### 5.2 TEST SETUP


Spectrum Parameter	Setting
Span Frequency	approximately 2 to 3 times the 20 dB bandwidth
RB	greater than 1 % of the 20 dB bandwidth,
VB	equal to the RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

The test program and configuration, Refer to 4.2 and 4.3

### 5.3 TEST RESULTS

Operating Frequency (kHz)	20 dB Bandwidth (KHz)
125	31.78

CH00

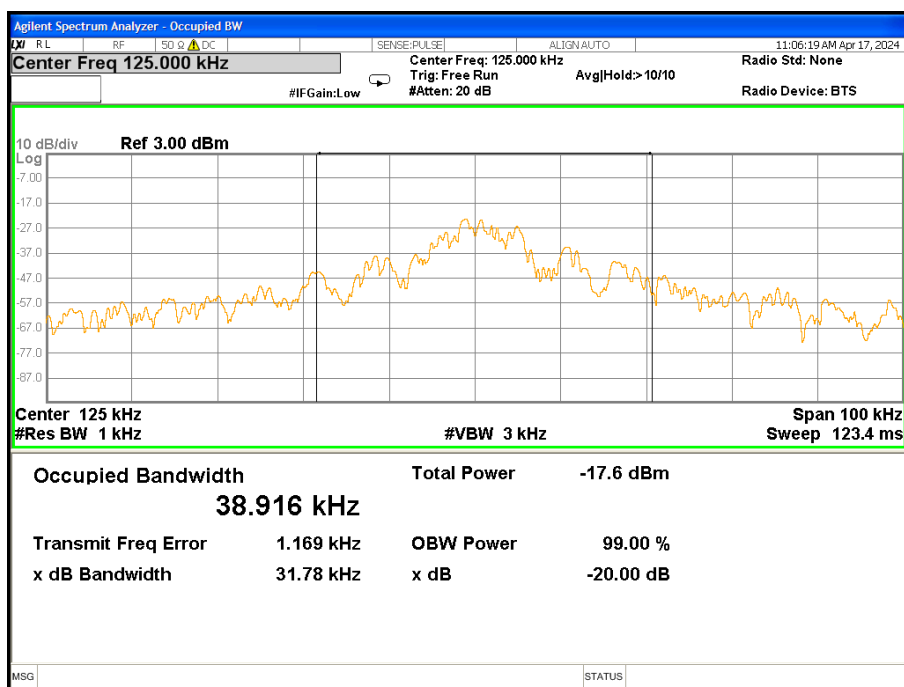



## APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*