



RADIO TEST REPORT

Report No:STS1908151W06

Issued for

VURO LLC

1441 Broadway, Suite 5011, New York, NY 10018, USA

Product Name:	VURO Smart Terminal
Brand Name:	VURO
Model Name:	VBOT-1
Series Model:	VBOT-1-US
FCC ID:	2AUBH-VBOT1
Test Standard:	FCC Part 15.407

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





TEST RESULT CERTIFICATION

Applicant's Name..... : VURO LLC

Address : 1441 Broadway, Suite 5011, New York, NY 10018, USA

Manufacture's Name..... : VURO LLC

Address : 1441 Broadway, Suite 5011, New York, NY 10018, USA

Product Description

Product Name..... : VURO Smart Terminal

Brand Name : VURO

Model Name : VBOT-1

Series Model..... : VBOT-1-US

Test Standards : FCC Part15.407

Test Procedure..... ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test..... :

Date (s) of performance of tests : 06 Aug. 2019 ~ 03 Sept. 2019

Date of Issue..... : 04 Sept. 2019

Test Result..... : **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sunday Hu)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	11
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT	19
4. CONDUCTED SPURIOUS EMISSIONS AND BANDEGE	43
4.1 LIMIT	43
4.2 TEST PROCEDURE	43
4.3 DEVIATION FROM STANDARD	43
4.4 TEST SETUP	44
4.5 EUT OPERATION CONDITIONS	44
4.6 TEST RESULTS	44
5. POWER SPECTRAL DENSITY TEST	45
5.1 LIMIT	45
5.2 TEST PROCEDURE	45
5.3 DEVIATION FROM STANDARD	46
5.4 TEST SETUP	46
5.5 EUT OPERATION CONDITIONS	46
5.6 TEST RESULTS	46
6. BANDWIDTH MEASUREMENT	50
6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	50
6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	53
6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	56
7. MAXIMUM CONDUCTED OUTPUT POWER	58
7.1 LIMIT	58
7.2 TEST PROCEDURE	58
7.3 DEVIATION FROM STANDARD	58



Table of Contents	Page
7.4 TEST SETUP	58
7.5 EUT OPERATION CONDITIONS	58
7.6 TEST RESULTS	59
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	79
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	79
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	79
9. ANTENNA REQUIREMENT	80
9.1 STANDARD REQUIREMENT	80
9.2 EUT ANTENNA	80
APPENDIX - PHOTOS OF TEST SETUP	81



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	04 Sept. 2019	STS1908151W06	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
§ 15.407 (2) (26 dB) / § 15.407 (e) (6 dB) / § 15.407 (a) (99%)	26dB/6dB & 99% Bandwidth	PASS
15.407(a) (1).(2).(3).(4).(5)	Maximum Conducted Output Power	PASS
15.407(b) & 15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(b)7	Conducted Emission And (bandedge Emissions) Measurement	PASS
15.407(a) (1).(2).(3).(4).(5)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) all tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71\text{dB}$
2	Unwanted Emissions, conducted	$\pm 0.63\text{dB}$
3	All emissions, radiated 30-200MHz	$\pm 3.43\text{dB}$
4	All emissions, radiated 200MHz-1GHz	$\pm 3.57\text{dB}$
5	All emissions, radiated >1G	$\pm 4.13\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 3.18\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 2.70\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	VURO Smart Terminal																
Trade Name	VURO																
Model Name	VBOT-1																
Series Model	VBOT-1-US																
Model Difference	Only different in model name.																
Product Description	The EUT is a VURO Smart Terminal <table><tr><td>Operation Frequency:</td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.310GHz IEEE 802.11ac(VHT80): 5.210GHz</td></tr><tr><td></td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz</td></tr><tr><td></td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz</td></tr><tr><td></td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz</td></tr><tr><td>Modulation Type:</td><td>802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM</td></tr><tr><td>Antenna Designation:</td><td>See Note 2</td></tr><tr><td>Max.Output Power (Conducted):</td><td>8.15dBm</td></tr><tr><td>Duty Cycle:</td><td>>98%</td></tr></table> More details of EUT technical specification, please refer to the User's Manual.	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.310GHz IEEE 802.11ac(VHT80): 5.210GHz		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz	Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM	Antenna Designation:	See Note 2	Max.Output Power (Conducted):	8.15dBm	Duty Cycle:	>98%
Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.310GHz IEEE 802.11ac(VHT80): 5.210GHz																
	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz																
	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz																
	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz																
Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM																
Antenna Designation:	See Note 2																
Max.Output Power (Conducted):	8.15dBm																
Duty Cycle:	>98%																
Test Channel	Please refer to the Note 2.																
Adapter	Input: 12V 1.8A, 24V 0.9A Output: 6V 3A																
Hardware version number	Q80_PCB_V1.01																
Software version number	V1.0																
Connecting I/O Port(s)	Please refer to the User's Manual																

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



1. Operation Frequency of channel			
5.180GHz-5.240GHz		5.500GHz-5.720GHz	
Channel	Frequency	Channel	Frequency
36	5180	100	5500
38	5190	102	5510
40	5200	104	5520
42	5210	108	5540
44	5220	110	5550
46	5230	112	5560
48	5240	116	5580
		118	5590
		120	5600
5.260GHz-5.320GHz		124	5620
Channel	Frequency	126	5630
52	5260	128	5640
54	5270	132	5660
56	5280	134	5670
58	5290	136	5680
60	5300	140	5700
62	5310		
64	5320		
5.745GHz-5.825GHz			
Channel	Frequency		
149	5745		
151	5755		
153	5765		
157	5785		
159	5795		
161	5805		
165	5825		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20) /ac (VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	52	5260
40	5200	60	5300
48	5240	64	5320

For 802.11a/n(HT20) /ac (VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
100	5500	149	5745
116	5580	157	5785
140	5700	165	5825



For 802.11n(HT40) /ac (VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	54	5270
46	5230	62	5310

For 802.11n(HT40) /ac (VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
102	5510	151	5755
110	5550	159	5795
134	5670		

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	155	5775

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
106	5530	155	5775
122	5610		

2.	Ant	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
	A	VURO	VBOT-1	PIFA Antenna	N/A	0.49 dBi	WLAN Ant



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH52&CH60&CH64	6 Mbps
Mode 3	TX IEEE 802.11a HT20 CH100&CH116&CH140	6 Mbps
Mode 4	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 5	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 6	TX IEEE 802.11ac HT20 CH36&CH40&CH48	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT20 CH52&CH60&CH64	MCS 0
Mode 8	TX IEEE 802.11ac HT20 CH52&CH60&CH64	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT20 CH100&CH116&CH140	MCS 0
Mode 10	TX IEEE 802.11ac HT20 CH100&CH116&CH140	NSS1 MCS0
Mode 11	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 12	TX IEEE 802.11ac HT20 CH149&CH157&CH165	NSS1 MCS0
Mode 13	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 14	TX IEEE 802.11ac HT40 CH38&CH46	NSS1 MCS0
Mode 15	TX IEEE 802.11n HT40 CH54 &CH62	MCS 0
Mode 16	TX IEEE 802.11ac HT40 CH54 &CH62	NSS1 MCS0
Mode 17	TX IEEE 802.11n HT40 CH102&CH110&CH134	MCS 0
Mode 18	TX IEEE 802.11ac HT40 CH102&CH110&CH134	NSS1 MCS0
Mode 19	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 20	TX IEEE 802.11ac HT40 CH151&CH159	NSS1 MCS0
Mode 21	TX IEEE 802.11ac HT80 CH42	NSS1 MCS0
Mode 22	TX IEEE 802.11ac HT80 CH58	NSS1 MCS0
Mode 23	TX IEEE 802.11ac HT80 CH106&122	NSS1 MCS0
Mode 24	TX IEEE 802.11ac HT80 CH155	NSS1 MCS0


- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.

AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 13: Keeping TX + WLAN Link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

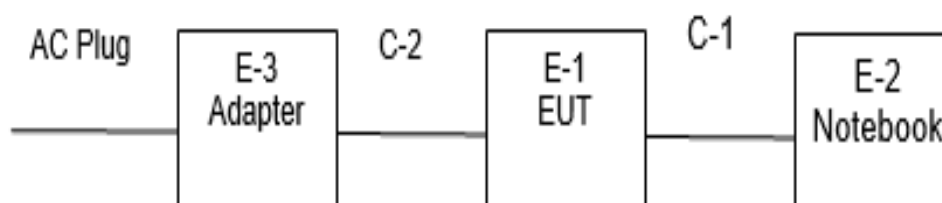

Conducted Emission Test

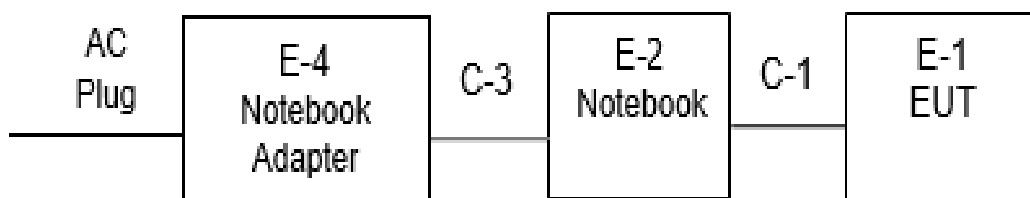



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-3	Adapter	VURO	VC12/24	N/A	N/A
C-2	DC Cable	N/A	200cm	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Notebook	DELL	VOSTRO.3800	N/A	N/A
E-4	Notebook Adapter	DELL	HA45NM140	N/A	N/A
C-1	USB Cable	N/A	100cm	N/A	N/A
C-3	DC Cable	N/A	120cm	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

**2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS****Radiation Test equipment**

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY51110105	2019.03.02	2020.03.01
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.1
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier(0.1 M-3GHz)	EM	EM330	060665	2018.10.13	2019.10.12
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-4 5	SK2018080901	2018.10.13	2019.10.12
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	BULUN	BL410-E/18.905			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
LISN	R&S	ENV216	101242	2018.10.11	2019.10.10
LISN	EMCO	3810/2NM	23625	2018.10.11	2019.10.10
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY49100060	2018.10.13	2019.10.12
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
Test SW	FARAD	LZ-RF /LzRf-3A3			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

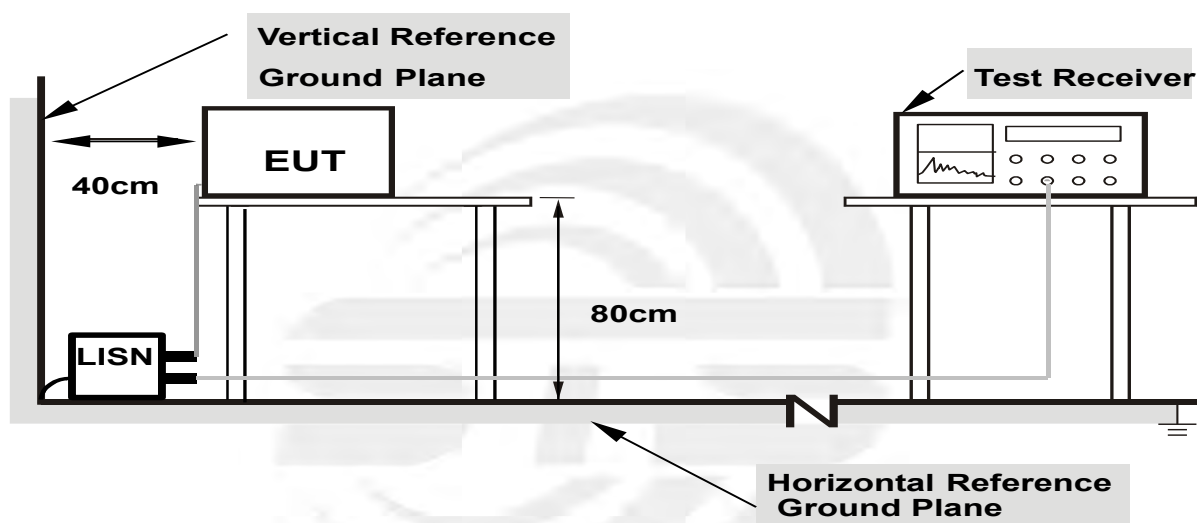

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	24.6(C)	Relative Humidity:	67%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 25		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	33.43	19.73	53.16	65.78	-12.62	QP
2	0.1540	14.39	19.73	34.12	55.78	-21.66	AVG
3	0.2500	11.35	20.04	31.39	51.76	-20.37	AVG
4	0.2500	25.73	20.04	45.77	61.76	-15.99	QP
5	0.7260	-1.44	19.81	18.37	46.00	-27.63	AVG
6	0.7260	11.56	19.81	31.37	56.00	-24.63	QP
7	1.1860	-1.03	19.76	18.73	46.00	-27.27	AVG
8	1.1860	11.12	19.76	30.88	56.00	-25.12	QP
9	3.1700	15.37	19.86	35.23	56.00	-20.77	QP
10	3.1700	1.68	19.86	21.54	46.00	-24.46	AVG
11	10.2460	21.94	19.84	41.78	60.00	-18.22	QP
12	10.2460	11.02	19.84	30.86	50.00	-19.14	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit

100.0 dBuV

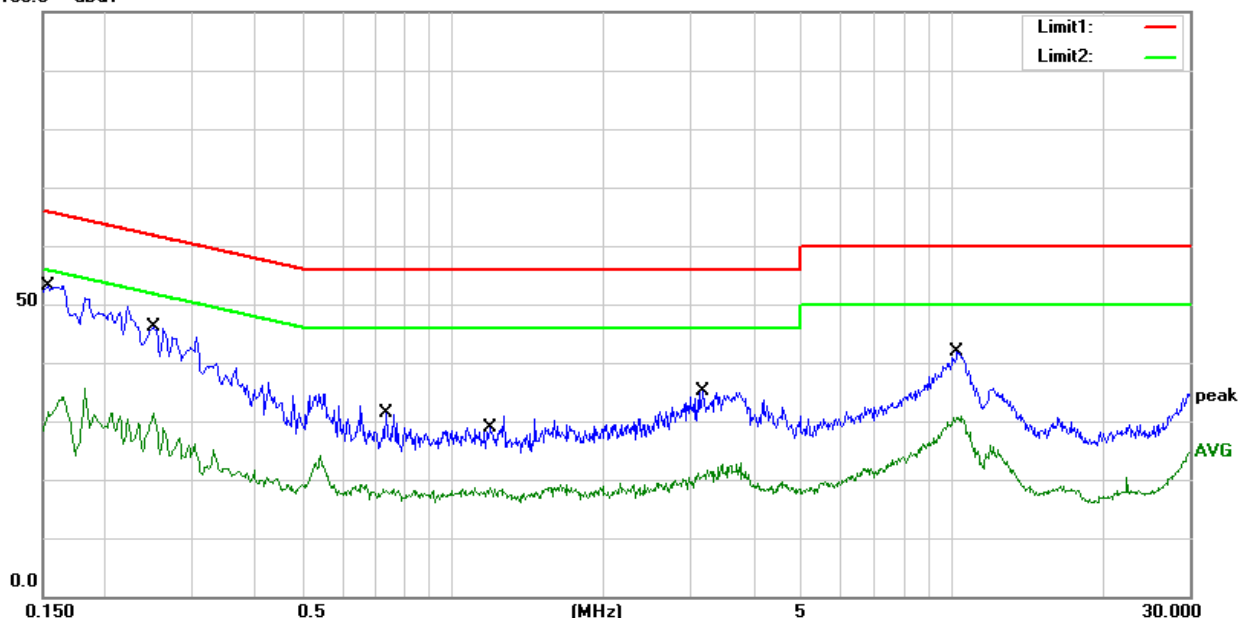




Temperature:	24.6(C)	Relative Humidity:	67%RH
Test Voltage	AC 120V/60Hz	Phase:	N
Test Mode	Mode 25		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1820	14.77	19.80	34.57	54.39	-19.82	AVG
2	0.1820	30.62	19.80	50.42	64.39	-13.97	QP
3	0.3340	2.24	20.17	22.41	49.35	-26.94	AVG
4	0.3340	18.37	20.17	38.54	59.35	-20.81	QP
5	0.5420	3.69	19.91	23.60	46.00	-22.40	AVG
6	0.5420	14.33	19.91	34.24	56.00	-21.76	QP
7	1.2660	10.11	19.77	29.88	56.00	-26.12	QP
8	1.2660	-1.79	19.77	17.98	46.00	-28.02	AVG
9	3.4660	3.34	19.86	23.20	46.00	-22.80	AVG
10	3.4660	15.42	19.86	35.28	56.00	-20.72	QP
11	10.1020	10.68	19.83	30.51	50.00	-19.49	AVG
12	10.1020	21.45	19.83	41.28	60.00	-18.72	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit

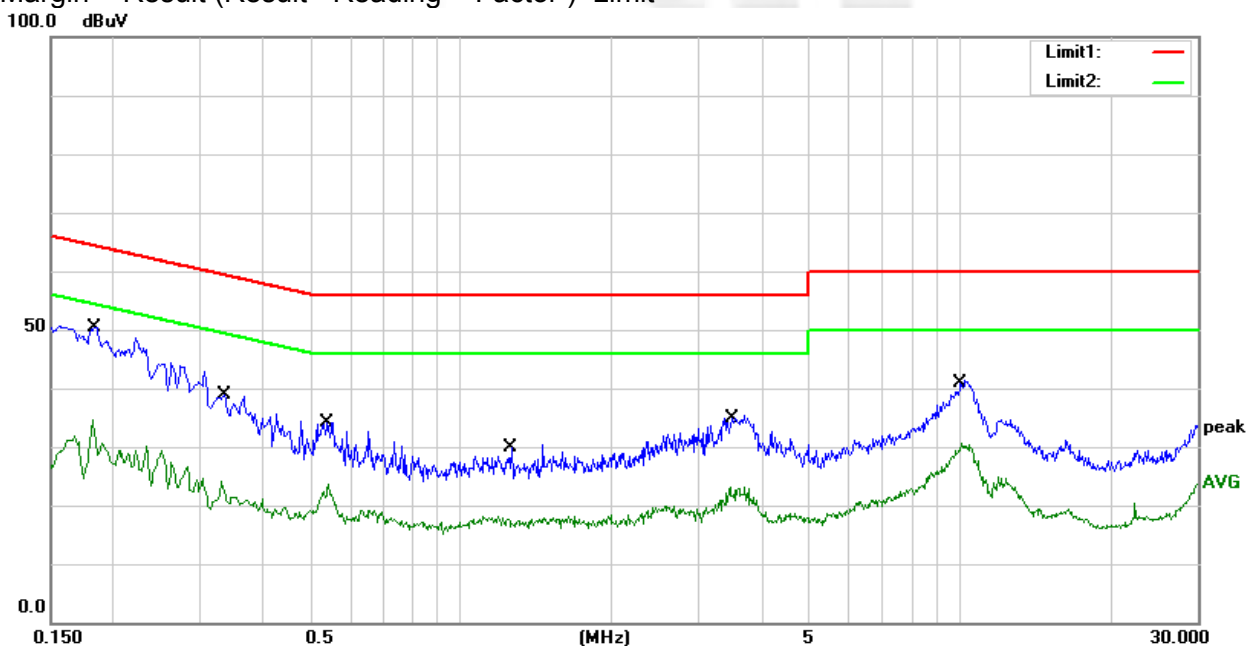



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7& 15.205/209(a), then the (a); limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

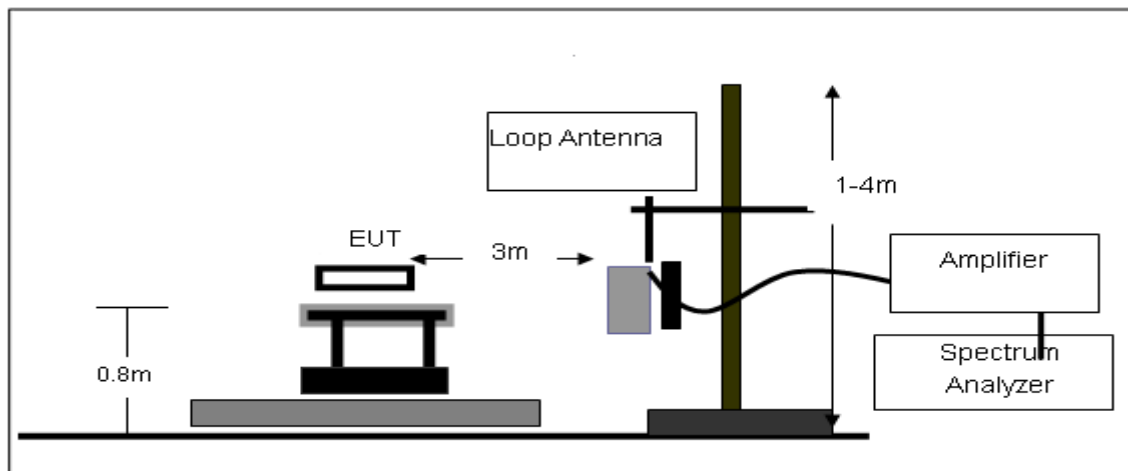

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

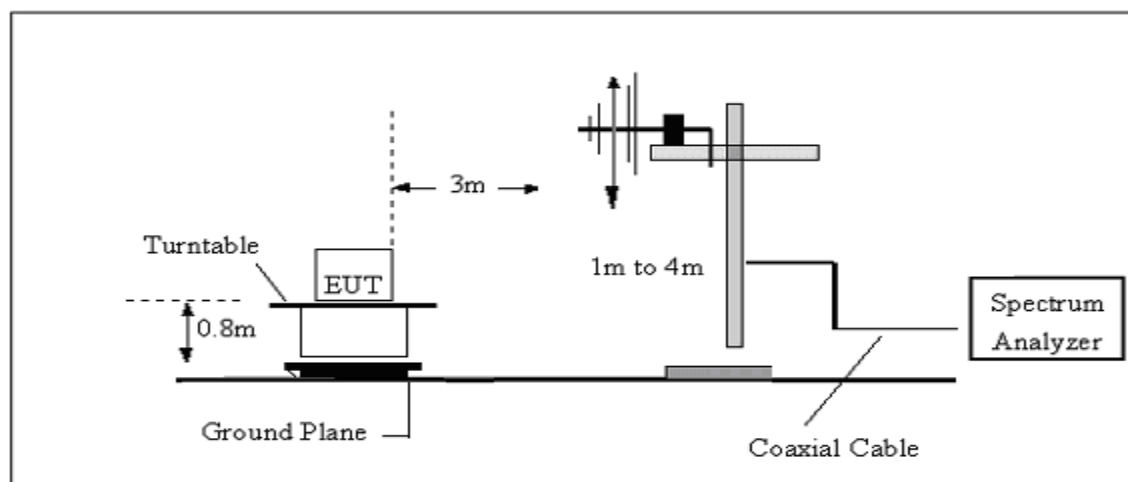

(C) Radiated Emission Test-Up Frequency Above 1GHz

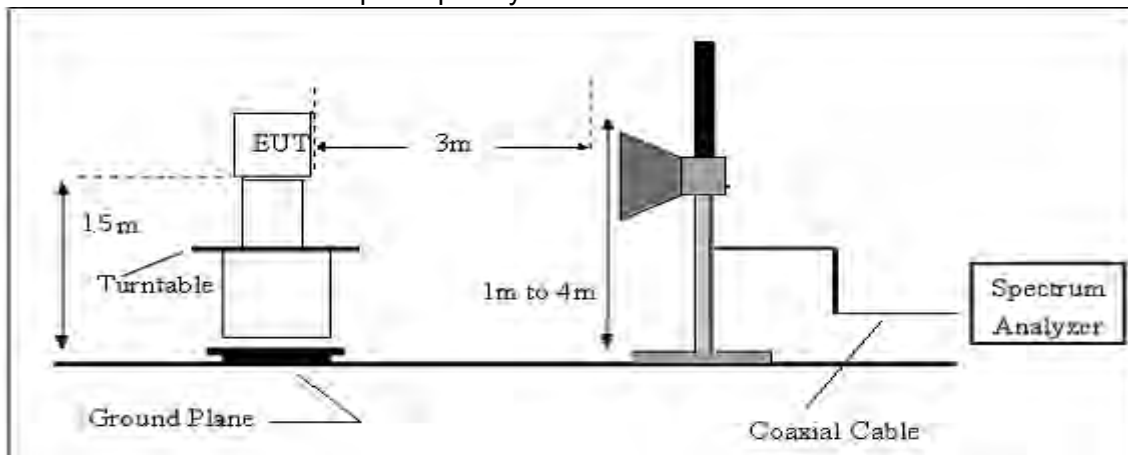



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude


AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$

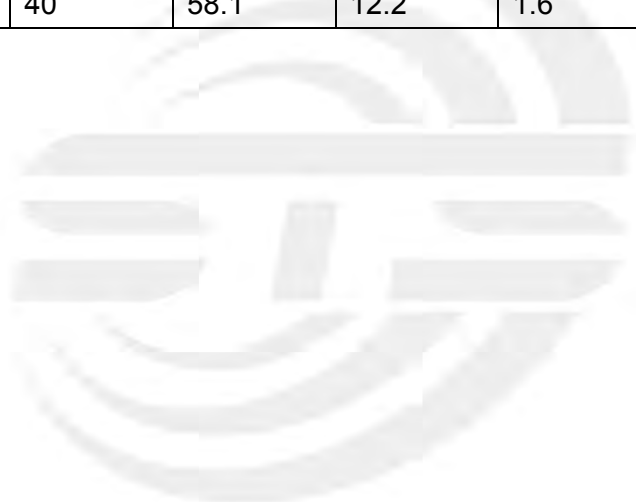

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	25.0(C)	Relative Humidity:	64%RH
Test Voltage :	DC 12V	Polarization :	--
Test Mode :	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

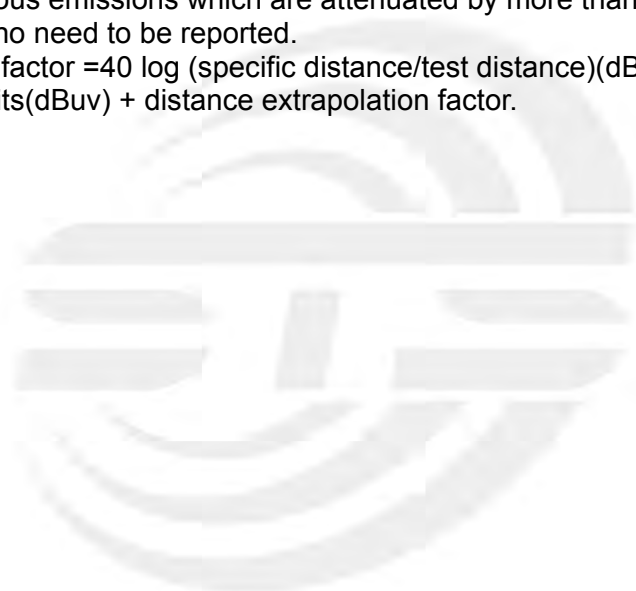


**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature	25.0(C)	Relative Humidity:	64%RH
Test Voltage	DC 12V	Polarization:	Horizontal
Test Mode	Mode 1-24 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.5121	38.65	-23.61	15.04	40.00	-24.96	QP
2	119.8556	41.50	-18.35	23.15	43.50	-20.35	QP
3	167.8243	50.09	-19.59	30.50	43.50	-13.00	QP
4	250.3012	55.96	-16.09	39.87	46.00	-6.13	QP
5	397.6334	44.23	-11.24	32.99	46.00	-13.01	QP
6	599.3212	45.93	-5.84	40.09	46.00	-5.91	QP

Remark:

1. Margin = Result (Result = Reading + Factor)–Limit

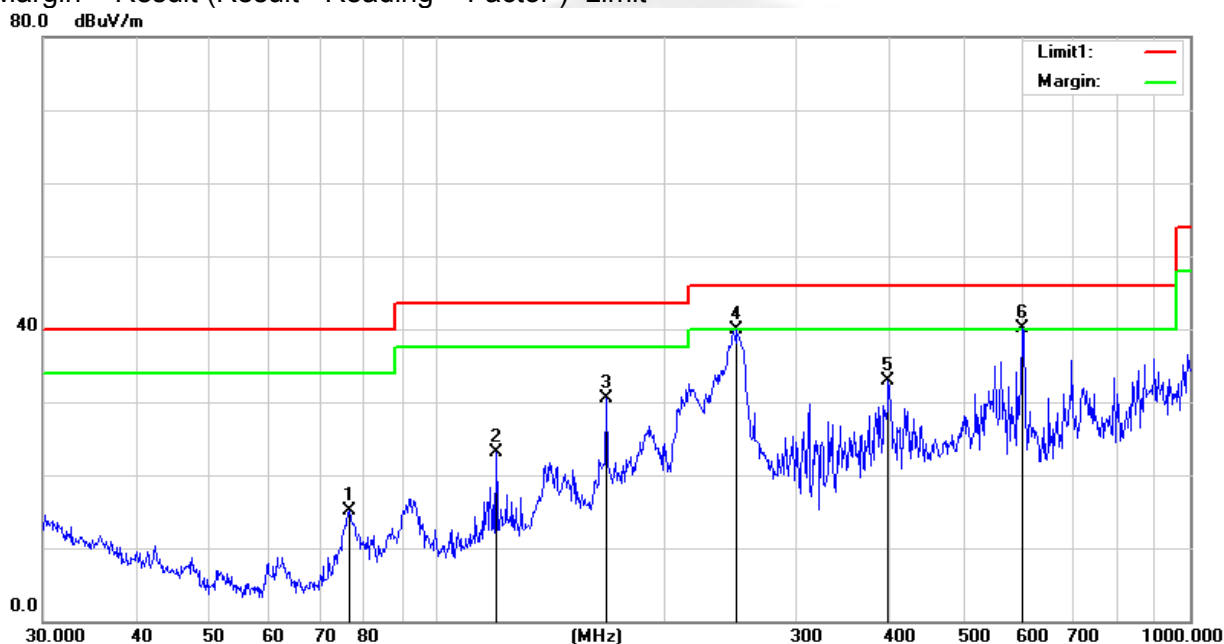




Temperature	25.0(C)	Relative Humidity:	64%RH
Test Voltage	DC 12V	Polarization:	Vertical
Test Mode	Mode 1-24 (Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	60.2800	47.02	-25.85	21.17	40.00	-18.83	QP
2	92.4624	44.37	-21.13	23.24	43.50	-20.26	QP
3	167.8242	47.52	-19.59	27.93	43.50	-15.57	QP
4	250.3011	53.11	-16.09	37.02	46.00	-8.98	QP
5	399.0300	45.77	-11.18	34.59	46.00	-11.41	QP
6	599.3212	41.69	-5.84	35.85	46.00	-10.15	QP

Remark:

1. Margin = Result (Result = Reading + Factor)-Limit

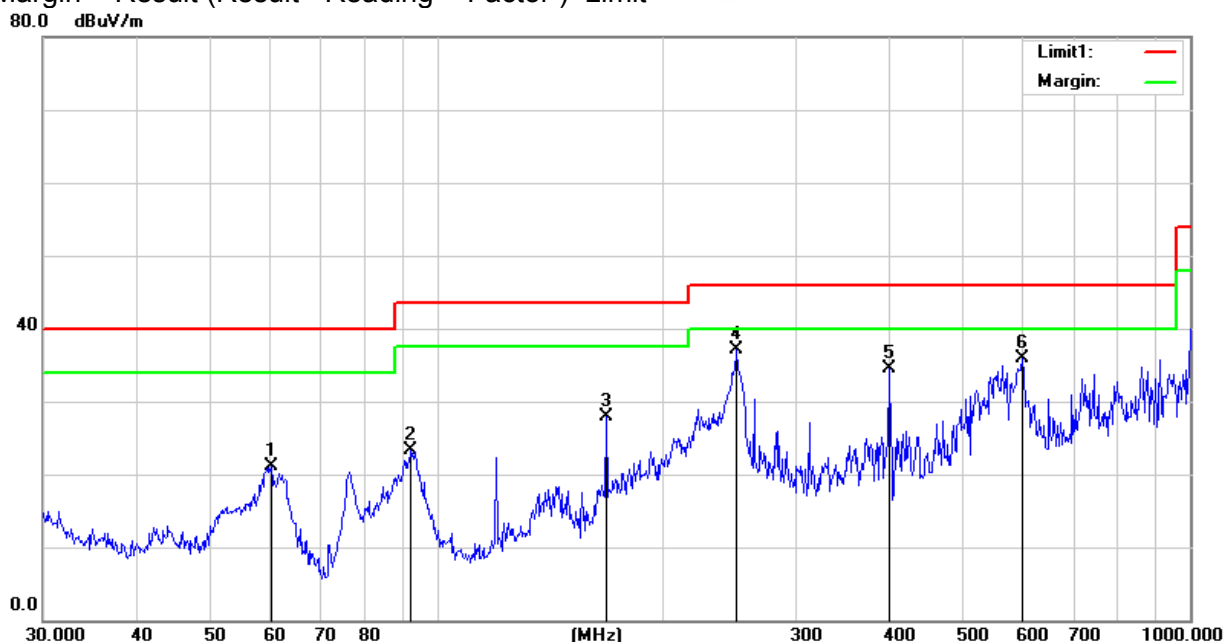



3.2.8 TEST RESULTS (Above 1000 MHz)

Band I 5150-5250MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5180 MHz)										
3263.47	44.57	44.70	6.70	28.20	-9.80	34.77	68.20	-33.43	Pk	Vertical
3263.47	41.29	44.70	6.70	28.20	-9.80	31.49	54.00	-22.51	AV	Vertical
3257.63	45.15	44.70	6.70	28.20	-9.80	35.35	68.20	-32.85	Pk	Horizontal
3257.63	41.92	44.70	6.70	28.20	-9.80	32.12	54.00	-21.88	AV	Horizontal
3993.98	39.34	44.20	7.90	29.70	-6.60	32.74	68.20	-35.46	Pk	Vertical
3993.98	35.66	44.20	7.90	29.70	-6.60	29.06	54.00	-24.94	AV	Vertical
3982.96	39.60	44.20	7.90	29.70	-6.60	33.00	68.20	-35.20	Pk	Horizontal
3982.96	36.72	44.20	7.90	29.70	-6.60	30.12	54.00	-23.88	AV	Horizontal
7234.26	37.19	43.50	11.40	35.50	3.40	40.59	68.20	-27.61	Pk	Vertical
7234.26	33.44	43.50	11.40	35.50	3.40	36.84	54.00	-17.16	AV	Vertical
7228.63	37.54	43.50	11.40	35.50	3.40	40.94	68.20	-27.26	Pk	Horizontal
7228.63	34.76	43.50	11.40	35.50	3.40	38.16	54.00	-15.84	AV	Horizontal
10360.34	39.78	44.50	13.80	38.80	8.10	47.88	68.20	-20.32	Pk	Vertical
10360.34	36.33	44.50	13.80	38.80	8.10	44.43	54.00	-9.57	AV	Vertical
10360.27	38.89	44.50	13.80	38.80	8.10	46.99	68.20	-21.21	Pk	Horizontal
10360.27	36.49	44.50	13.80	38.80	8.10	44.59	54.00	-9.41	AV	Horizontal
11024.27	32.91	43.60	14.30	39.50	10.20	43.11	68.20	-25.09	Pk	Vertical
11024.27	29.96	43.60	14.30	39.50	10.20	40.16	54.00	-13.84	AV	Vertical
11028.73	32.95	43.60	14.30	39.50	10.20	43.15	68.20	-25.05	Pk	Horizontal
11028.73	30.53	43.60	14.30	39.50	10.20	40.73	54.00	-13.27	AV	Horizontal
13283.09	32.90	42.60	15.90	38.90	12.20	45.10	68.20	-23.10	Pk	Vertical
13283.09	29.12	42.60	15.90	38.90	12.20	41.32	54.00	-12.68	AV	Vertical
13282.02	32.98	42.60	15.90	38.90	12.20	45.18	68.20	-23.02	Pk	Horizontal
13282.02	28.60	42.60	15.90	38.90	12.20	40.80	54.00	-13.20	AV	Horizontal



Mid Channel (802.11a/ 5200 MHz)										
3259.48	44.98	44.70	6.70	28.20	-9.80	35.18	68.20	-33.02	Pk	Vertical
3259.48	41.00	44.70	6.70	28.20	-9.80	31.20	54.00	-22.80	AV	Vertical
3255.23	44.41	44.70	6.70	28.20	-9.80	34.61	68.20	-33.59	Pk	Horizontal
3255.23	40.95	44.70	6.70	28.20	-9.80	31.15	54.00	-22.85	AV	Horizontal
3983.49	39.81	44.20	7.90	29.70	-6.60	33.21	68.20	-34.99	Pk	Vertical
3983.49	35.96	44.20	7.90	29.70	-6.60	29.36	54.00	-24.64	AV	Vertical
3993.25	39.52	44.20	7.90	29.70	-6.60	32.92	68.20	-35.28	Pk	Horizontal
3993.25	36.11	44.20	7.90	29.70	-6.60	29.51	54.00	-24.49	AV	Horizontal
7220.60	36.61	43.50	11.40	35.50	3.40	40.01	68.20	-28.19	Pk	Vertical
7220.60	34.84	43.50	11.40	35.50	3.40	38.24	54.00	-15.76	AV	Vertical
7233.14	37.07	43.50	11.40	35.50	3.40	40.47	68.20	-27.73	Pk	Horizontal
7233.14	33.74	43.50	11.40	35.50	3.40	37.14	54.00	-16.86	AV	Horizontal
10400.26	39.68	44.50	13.80	38.80	8.10	47.78	68.20	-20.42	Pk	Vertical
10400.26	36.23	44.50	13.80	38.80	8.10	44.33	54.00	-9.67	AV	Vertical
10400.28	39.77	44.50	13.80	38.80	8.10	47.87	68.20	-20.33	Pk	Horizontal
10400.28	36.82	44.50	13.80	38.80	8.10	44.92	54.00	-9.08	AV	Horizontal
11024.72	33.10	43.60	14.30	39.50	10.20	43.30	68.20	-24.90	Pk	Vertical
11024.72	30.69	43.60	14.30	39.50	10.20	40.89	54.00	-13.11	AV	Vertical
11020.82	33.20	43.60	14.30	39.50	10.20	43.40	68.20	-24.80	Pk	Horizontal
11020.82	30.63	43.60	14.30	39.50	10.20	40.83	54.00	-13.17	AV	Horizontal
13288.07	32.96	42.60	15.90	38.90	12.20	45.16	68.20	-23.04	Pk	Vertical
13288.07	29.93	42.60	15.90	38.90	12.20	42.13	54.00	-11.87	AV	Vertical
13291.92	32.47	42.60	15.90	38.90	12.20	44.67	68.20	-23.53	Pk	Horizontal
13291.92	28.76	42.60	15.90	38.90	12.20	40.96	54.00	-13.04	AV	Horizontal



High Channel (802.11a/ 5240 MHz)										
3249.64	44.52	44.70	6.70	28.20	-9.80	34.72	68.20	-33.48	Pk	Vertical
3249.64	40.90	44.70	6.70	28.20	-9.80	31.10	54.00	-22.90	AV	Vertical
3247.52	44.19	44.70	6.70	28.20	-9.80	34.39	68.20	-33.81	Pk	Horizontal
3247.52	41.39	44.70	6.70	28.20	-9.80	31.59	54.00	-22.41	AV	Horizontal
3990.53	40.00	44.20	7.90	29.70	-6.60	33.40	68.20	-34.80	Pk	Vertical
3990.53	36.84	44.20	7.90	29.70	-6.60	30.24	54.00	-23.76	AV	Vertical
3984.88	39.96	44.20	7.90	29.70	-6.60	33.36	68.20	-34.84	Pk	Horizontal
3984.88	36.26	44.20	7.90	29.70	-6.60	29.66	54.00	-24.34	AV	Horizontal
7221.37	36.57	43.50	11.40	35.50	3.40	39.97	68.20	-28.23	Pk	Vertical
7221.37	33.90	43.50	11.40	35.50	3.40	37.30	54.00	-16.70	AV	Vertical
7225.98	37.46	43.50	11.40	35.50	3.40	40.86	68.20	-27.34	Pk	Horizontal
7225.98	34.17	43.50	11.40	35.50	3.40	37.57	54.00	-16.43	AV	Horizontal
10479.96	39.51	44.50	13.80	38.80	8.10	47.61	68.20	-20.59	Pk	Vertical
10479.96	36.35	44.50	13.80	38.80	8.10	44.45	54.00	-9.55	AV	Vertical
10479.95	40.09	44.50	13.80	38.80	8.10	48.19	68.20	-20.01	Pk	Horizontal
10479.95	36.47	44.50	13.80	38.80	8.10	44.57	54.00	-9.43	AV	Horizontal
11020.08	33.27	43.60	14.30	39.50	10.20	43.47	68.20	-24.73	Pk	Vertical
11020.08	30.64	43.60	14.30	39.50	10.20	40.84	54.00	-13.16	AV	Vertical
11035.58	34.14	43.60	14.30	39.50	10.20	44.34	68.20	-23.86	Pk	Horizontal
11035.58	29.72	43.60	14.30	39.50	10.20	39.92	54.00	-14.08	AV	Horizontal
13280.27	31.81	42.60	15.90	38.90	12.20	44.01	68.20	-24.19	Pk	Vertical
13280.27	29.87	42.60	15.90	38.90	12.20	42.07	54.00	-11.93	AV	Vertical
13288.45	32.49	42.60	15.90	38.90	12.20	44.69	68.20	-23.51	Pk	Horizontal
13288.45	29.44	42.60	15.90	38.90	12.20	41.64	54.00	-12.36	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11a.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.

**Band II 5250-5350MHz**

Frequency (MHz)	Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limit (dBuV/m)	Margin	Detector	Comment
	(dBuV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)		(dB)		
Low Channel (802.11a/ 5260 MHz)										
3250.31	44.37	44.70	6.70	28.20	-9.80	34.57	68.20	-33.63	Pk	Vertical
3250.31	41.73	44.70	6.70	28.20	-9.80	31.93	54.00	-22.07	AV	Vertical
3251.33	44.27	44.70	6.70	28.20	-9.80	34.47	68.20	-33.73	Pk	Horizontal
3251.33	41.25	44.70	6.70	28.20	-9.80	31.45	54.00	-22.55	AV	Horizontal
3988.12	39.87	44.20	7.90	29.70	-6.60	33.27	68.20	-34.93	Pk	Vertical
3988.12	36.71	44.20	7.90	29.70	-6.60	30.11	54.00	-23.89	AV	Vertical
4000.20	39.88	44.20	7.90	29.70	-6.60	33.28	68.20	-34.92	Pk	Horizontal
4000.20	36.33	44.20	7.90	29.70	-6.60	29.73	54.00	-24.27	AV	Horizontal
7223.95	36.65	43.50	11.40	35.50	3.40	40.05	68.20	-28.15	Pk	Vertical
7223.95	33.46	43.50	11.40	35.50	3.40	36.86	54.00	-17.14	AV	Vertical
7233.47	37.62	43.50	11.40	35.50	3.40	41.02	68.20	-27.18	Pk	Horizontal
7233.47	34.15	43.50	11.40	35.50	3.40	37.55	54.00	-16.45	AV	Horizontal
10519.95	39.74	44.50	13.90	38.80	8.20	47.94	68.20	-20.26	Pk	Vertical
10519.95	36.04	44.50	13.90	38.80	8.20	44.24	54.00	-9.76	AV	Vertical
10520.03	38.99	44.50	13.90	38.80	8.20	47.19	68.20	-21.01	Pk	Horizontal
10520.03	36.17	44.50	13.90	38.80	8.20	44.37	54.00	-9.63	AV	Horizontal
11031.26	33.15	43.60	14.30	39.50	10.20	43.35	68.20	-24.85	Pk	Vertical
11031.26	30.31	43.60	14.30	39.50	10.20	40.51	54.00	-13.49	AV	Vertical
11019.93	33.22	43.60	14.30	39.50	10.20	43.42	68.20	-24.78	Pk	Horizontal
11019.93	30.43	43.60	14.30	39.50	10.20	40.63	54.00	-13.37	AV	Horizontal
13292.50	31.61	42.60	15.90	38.90	12.20	43.81	68.20	-24.39	Pk	Vertical
13292.50	29.03	42.60	15.90	38.90	12.20	41.23	54.00	-12.77	AV	Vertical
13293.83	31.78	42.60	15.90	38.90	12.20	43.98	68.20	-24.22	Pk	Horizontal
13293.83	28.60	42.60	15.90	38.90	12.20	40.80	54.00	-13.20	AV	Horizontal



Mid Channel (802.11a/ 5300 MHz)										
3262.72	44.96	44.70	6.70	28.20	-9.80	35.16	68.20	-33.04	Pk	Vertical
3262.72	42.01	44.70	6.70	28.20	-9.80	32.21	54.00	-21.79	AV	Vertical
3248.48	44.14	44.70	6.70	28.20	-9.80	34.34	68.20	-33.86	Pk	Horizontal
3248.48	40.97	44.70	6.70	28.20	-9.80	31.17	54.00	-22.83	AV	Horizontal
3980.31	39.34	44.20	7.90	29.70	-6.60	32.74	68.20	-35.46	Pk	Vertical
3980.31	36.84	44.20	7.90	29.70	-6.60	30.24	54.00	-23.76	AV	Vertical
3988.59	39.41	44.20	7.90	29.70	-6.60	32.81	68.20	-35.39	Pk	Horizontal
3988.59	36.57	44.20	7.90	29.70	-6.60	29.97	54.00	-24.03	AV	Horizontal
7225.38	36.80	43.50	11.40	35.50	3.40	40.20	68.20	-28.00	Pk	Vertical
7225.38	33.67	43.50	11.40	35.50	3.40	37.07	54.00	-16.93	AV	Vertical
7219.06	37.52	43.50	11.40	35.50	3.40	40.92	68.20	-27.28	Pk	Horizontal
7219.06	33.80	43.50	11.40	35.50	3.40	37.20	54.00	-16.80	AV	Horizontal
10600.31	40.18	44.50	13.80	38.80	8.10	48.28	68.20	-19.92	Pk	Vertical
10600.31	36.28	44.50	13.80	38.80	8.10	44.38	54.00	-9.62	AV	Vertical
10600.11	40.09	44.50	13.80	38.80	8.10	48.19	68.20	-20.01	Pk	Horizontal
10600.11	37.08	44.50	13.80	38.80	8.10	45.18	54.00	-8.82	AV	Horizontal
11031.23	33.12	43.60	14.30	39.50	10.20	43.32	68.20	-24.88	Pk	Vertical
11031.23	30.95	43.60	14.30	39.50	10.20	41.15	54.00	-12.85	AV	Vertical
11023.78	33.87	43.60	14.30	39.50	10.20	44.07	68.20	-24.13	Pk	Horizontal
11023.78	30.43	43.60	14.30	39.50	10.20	40.63	54.00	-13.37	AV	Horizontal
13290.52	32.79	42.60	15.90	38.90	12.20	44.99	68.20	-23.21	Pk	Vertical
13290.52	29.49	42.60	15.90	38.90	12.20	41.69	54.00	-12.31	AV	Vertical
13285.84	32.82	42.60	15.90	38.90	12.20	45.02	68.20	-23.18	Pk	Horizontal
13285.84	29.43	42.60	15.90	38.90	12.20	41.63	54.00	-12.37	AV	Horizontal



High Channel (802.11a/ 5320 MHz)										
3246.64	44.95	44.70	6.70	28.20	-9.80	35.15	68.20	-33.05	Pk	Vertical
3246.64	41.12	44.70	6.70	28.20	-9.80	31.32	54.00	-22.68	AV	Vertical
3251.79	45.22	44.70	6.70	28.20	-9.80	35.42	68.20	-32.78	Pk	Horizontal
3251.79	40.85	44.70	6.70	28.20	-9.80	31.05	54.00	-22.95	AV	Horizontal
3980.57	39.07	44.20	7.90	29.70	-6.60	32.47	68.20	-35.73	Pk	Vertical
3980.57	36.58	44.20	7.90	29.70	-6.60	29.98	54.00	-24.02	AV	Vertical
3983.74	40.09	44.20	7.90	29.70	-6.60	33.49	68.20	-34.71	Pk	Horizontal
3983.74	36.91	44.20	7.90	29.70	-6.60	30.31	54.00	-23.69	AV	Horizontal
7224.80	37.60	43.50	11.40	35.50	3.40	41.00	68.20	-27.20	Pk	Vertical
7224.80	33.96	43.50	11.40	35.50	3.40	37.36	54.00	-16.64	AV	Vertical
7222.91	36.48	43.50	11.40	35.50	3.40	39.88	68.20	-28.32	Pk	Horizontal
7222.91	34.67	43.50	11.40	35.50	3.40	38.07	54.00	-15.93	AV	Horizontal
10640.00	40.19	44.50	13.80	38.80	8.10	48.29	68.20	-19.91	Pk	Vertical
10640.00	35.90	44.50	13.80	38.80	8.10	44.00	54.00	-10.00	AV	Vertical
10640.19	40.12	44.50	13.80	38.80	8.10	48.22	68.20	-19.98	Pk	Horizontal
10640.19	35.90	44.50	13.80	38.80	8.10	44.00	54.00	-10.00	AV	Horizontal
11036.40	33.32	43.60	14.30	39.50	10.20	43.52	68.20	-24.68	Pk	Vertical
11036.40	30.31	43.60	14.30	39.50	10.20	40.51	54.00	-13.49	AV	Vertical
11030.18	33.68	43.60	14.30	39.50	10.20	43.88	68.20	-24.32	Pk	Horizontal
11030.18	30.35	43.60	14.30	39.50	10.20	40.55	54.00	-13.45	AV	Horizontal
13297.12	31.74	42.70	18.00	37.10	12.40	44.14	68.20	-24.06	Pk	Vertical
13297.12	29.29	42.70	18.00	37.10	12.40	41.69	54.00	-12.31	AV	Vertical
13297.90	31.83	42.70	18.00	37.10	12.40	44.23	68.20	-23.97	Pk	Horizontal
13297.90	28.56	42.70	18.00	37.10	12.40	40.96	54.00	-13.04	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11a.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported

**Band III 5470-5725MHz**

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5500 MHz)										
3252.78	45.17	44.70	6.70	28.20	-9.80	35.37	68.20	-32.83	Pk	Vertical
3252.78	40.78	44.70	6.70	28.20	-9.80	30.98	54.00	-23.02	AV	Vertical
3247.39	44.07	44.70	6.70	28.20	-9.80	34.27	68.20	-33.93	Pk	Horizontal
3247.39	41.78	44.70	6.70	28.20	-9.80	31.98	54.00	-22.02	AV	Horizontal
3983.17	39.52	44.20	7.90	29.70	-6.60	32.92	68.20	-35.28	Pk	Vertical
3983.17	35.94	44.20	7.90	29.70	-6.60	29.34	54.00	-24.66	AV	Vertical
3988.32	39.25	44.20	7.90	29.70	-6.60	32.65	68.20	-35.55	Pk	Horizontal
3988.32	36.42	44.20	7.90	29.70	-6.60	29.82	54.00	-24.18	AV	Horizontal
7225.90	36.69	43.50	11.40	35.50	3.40	40.09	68.20	-28.11	Pk	Vertical
7225.90	34.39	43.50	11.40	35.50	3.40	37.79	54.00	-16.21	AV	Vertical
7234.93	37.32	43.50	11.40	35.50	3.40	40.72	68.20	-27.48	Pk	Horizontal
7234.93	34.94	43.50	11.40	35.50	3.40	38.34	54.00	-15.66	AV	Horizontal
10342.90	39.47	44.50	13.80	38.80	8.10	47.57	68.20	-20.63	Pk	Vertical
10342.90	36.20	44.50	13.80	38.80	8.10	44.30	54.00	-9.70	AV	Vertical
10343.02	39.07	44.50	13.80	38.80	8.10	47.17	68.20	-21.03	Pk	Horizontal
10343.02	35.77	44.50	13.80	38.80	8.10	43.87	54.00	-10.13	AV	Horizontal
11000.06	33.85	43.60	14.30	39.50	10.20	44.05	68.20	-24.15	Pk	Vertical
11000.06	30.59	43.60	14.30	39.50	10.20	40.79	54.00	-13.21	AV	Vertical
11000.32	34.13	43.60	14.30	39.50	10.20	44.33	68.20	-23.87	Pk	Horizontal
11000.32	30.03	43.60	14.30	39.50	10.20	40.23	54.00	-13.77	AV	Horizontal
13283.76	31.97	42.60	15.90	38.90	12.20	44.17	68.20	-24.03	Pk	Vertical
13283.76	29.28	42.60	15.90	38.90	12.20	41.48	54.00	-12.52	AV	Vertical
13288.20	31.67	42.60	15.90	38.90	12.20	43.87	68.20	-24.33	Pk	Horizontal
13288.20	29.83	42.60	15.90	38.90	12.20	42.03	54.00	-11.97	AV	Horizontal



Mid Channel (802.11a/ 5580 MHz)										
3253.32	45.23	44.70	6.70	28.20	-9.80	35.43	68.20	-32.77	Pk	Vertical
3253.32	41.75	44.70	6.70	28.20	-9.80	31.95	54.00	-22.05	AV	Vertical
3249.49	44.13	44.70	6.70	28.20	-9.80	34.33	68.20	-33.87	Pk	Horizontal
3249.49	41.00	44.70	6.70	28.20	-9.80	31.20	54.00	-22.80	AV	Horizontal
3986.30	38.74	44.20	7.90	29.70	-6.60	32.14	68.20	-36.06	Pk	Vertical
3986.30	37.11	44.20	7.90	29.70	-6.60	30.51	54.00	-23.49	AV	Vertical
3999.00	39.64	44.20	7.90	29.70	-6.60	33.04	68.20	-35.16	Pk	Horizontal
3999.00	36.84	44.20	7.90	29.70	-6.60	30.24	54.00	-23.76	AV	Horizontal
7219.16	37.91	43.50	11.40	35.50	3.40	41.31	68.20	-26.89	Pk	Vertical
7219.16	34.81	43.50	11.40	35.50	3.40	38.21	54.00	-15.79	AV	Vertical
7222.72	37.54	43.50	11.40	35.50	3.40	40.94	68.20	-27.26	Pk	Horizontal
7222.72	34.90	43.50	11.40	35.50	3.40	38.30	54.00	-15.70	AV	Horizontal
10381.52	40.12	44.50	13.80	38.80	8.10	48.22	68.20	-19.98	Pk	Vertical
10381.52	36.28	44.50	13.80	38.80	8.10	44.38	54.00	-9.62	AV	Vertical
10395.91	38.90	44.50	13.80	38.80	8.10	47.00	68.20	-21.20	Pk	Horizontal
10395.91	36.16	44.50	13.80	38.80	8.10	44.26	54.00	-9.74	AV	Horizontal
11160.30	32.96	43.60	14.30	39.50	10.20	43.16	68.20	-25.04	Pk	Vertical
11160.30	30.74	43.60	14.30	39.50	10.20	40.94	54.00	-13.06	AV	Vertical
11160.01	34.15	43.60	14.30	39.50	10.20	44.35	68.20	-23.85	Pk	Horizontal
11160.01	30.82	43.60	14.30	39.50	10.20	41.02	54.00	-12.98	AV	Horizontal
13285.21	32.64	42.60	15.90	38.90	12.20	44.84	68.20	-23.36	Pk	Vertical
13285.21	29.11	42.60	15.90	38.90	12.20	41.31	54.00	-12.69	AV	Vertical
13296.52	32.38	42.60	15.90	38.90	12.20	44.58	68.20	-23.62	Pk	Horizontal
13296.52	28.56	42.60	15.90	38.90	12.20	40.76	54.00	-13.24	AV	Horizontal



High Channel (802.11a/ 5700 MHz)										
3257.79	43.86	44.70	6.70	28.20	-9.80	34.06	68.20	-34.14	Pk	Vertical
3257.79	42.22	44.70	6.70	28.20	-9.80	32.42	54.00	-21.58	AV	Vertical
3248.36	44.07	44.70	6.70	28.20	-9.80	34.27	68.20	-33.93	Pk	Horizontal
3248.36	41.86	44.70	6.70	28.20	-9.80	32.06	54.00	-21.94	AV	Horizontal
3983.24	39.92	44.20	7.90	29.70	-6.60	33.32	68.20	-34.88	Pk	Vertical
3983.24	36.57	44.20	7.90	29.70	-6.60	29.97	54.00	-24.03	AV	Vertical
3995.51	40.00	44.20	7.90	29.70	-6.60	33.40	68.20	-34.80	Pk	Horizontal
3995.51	35.80	44.20	7.90	29.70	-6.60	29.20	54.00	-24.80	AV	Horizontal
7231.17	37.92	43.50	11.40	35.50	3.40	41.32	68.20	-26.88	Pk	Vertical
7231.17	34.80	43.50	11.40	35.50	3.40	38.20	54.00	-15.80	AV	Vertical
7227.01	36.65	43.50	11.40	35.50	3.40	40.05	68.20	-28.15	Pk	Horizontal
7227.01	33.50	43.50	11.40	35.50	3.40	36.90	54.00	-17.10	AV	Horizontal
10479.27	39.06	44.50	13.80	38.80	8.10	47.16	68.20	-21.04	Pk	Vertical
10479.27	35.77	44.50	13.80	38.80	8.10	43.87	54.00	-10.13	AV	Vertical
10479.31	38.95	44.50	13.80	38.80	8.10	47.05	68.20	-21.15	Pk	Horizontal
10479.31	35.96	44.50	13.80	38.80	8.10	44.06	54.00	-9.94	AV	Horizontal
11400.24	33.47	43.60	14.30	39.50	10.20	43.67	68.20	-24.53	Pk	Vertical
11400.24	30.54	43.60	14.30	39.50	10.20	40.74	54.00	-13.26	AV	Vertical
11400.29	33.93	43.60	14.30	39.50	10.20	44.13	68.20	-24.07	Pk	Horizontal
11400.29	30.52	43.60	14.30	39.50	10.20	40.72	54.00	-13.28	AV	Horizontal
13282.53	31.92	42.60	15.90	38.90	12.20	44.12	68.20	-24.08	Pk	Vertical
13282.53	29.69	42.60	15.90	38.90	12.20	41.89	54.00	-12.11	AV	Vertical
13292.64	32.42	42.60	15.90	38.90	12.20	44.62	68.20	-23.58	Pk	Horizontal
13292.64	28.83	42.60	15.90	38.90	12.20	41.03	54.00	-12.97	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11a.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported

**Band IV(5.725-5.850) GHz**

Frequency (MHz)	Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limit (dBuV/m)	Margin	Detector	Comment
	(dBuV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)		(dB)		
Low Channel (802.11a/ 5745 MHz)										
3250.73	43.93	44.70	6.70	28.20	-9.80	34.13	68.20	-34.07	Pk	Vertical
3250.73	42.17	44.70	6.70	28.20	-9.80	32.37	54.00	-21.63	AV	Vertical
3246.85	45.12	44.70	6.70	28.20	-9.80	35.32	68.20	-32.88	Pk	Horizontal
3246.85	41.52	44.70	6.70	28.20	-9.80	31.72	54.00	-22.28	AV	Horizontal
3981.44	38.67	44.20	7.90	29.70	-6.60	32.07	68.20	-36.13	Pk	Vertical
3981.44	37.14	44.20	7.90	29.70	-6.60	30.54	54.00	-23.46	AV	Vertical
3989.37	39.62	44.20	7.90	29.70	-6.60	33.02	68.20	-35.18	Pk	Horizontal
3989.37	35.74	44.20	7.90	29.70	-6.60	29.14	54.00	-24.86	AV	Horizontal
7233.48	37.91	43.50	11.40	35.50	3.40	41.31	68.20	-26.89	Pk	Vertical
7233.48	34.21	43.50	11.40	35.50	3.40	37.61	54.00	-16.39	AV	Vertical
7221.20	36.50	43.50	11.40	35.50	3.40	39.90	68.20	-28.30	Pk	Horizontal
7221.20	34.04	43.50	11.40	35.50	3.40	37.44	54.00	-16.56	AV	Horizontal
10512.40	39.46	44.50	13.90	38.80	8.20	47.66	68.20	-20.54	Pk	Vertical
10512.40	35.86	44.50	13.90	38.80	8.20	44.06	54.00	-9.94	AV	Vertical
10509.83	39.11	44.50	13.90	38.80	8.20	47.31	68.20	-20.89	Pk	Horizontal
10509.83	35.78	44.50	13.90	38.80	8.20	43.98	54.00	-10.02	AV	Horizontal
11490.12	33.55	43.60	14.30	39.50	10.20	43.75	68.20	-24.45	Pk	Vertical
11490.12	31.03	43.60	14.30	39.50	10.20	41.23	54.00	-12.77	AV	Vertical
11490.40	33.61	43.60	14.30	39.50	10.20	43.81	68.20	-24.39	Pk	Horizontal
11490.40	30.21	43.60	14.30	39.50	10.20	40.41	54.00	-13.59	AV	Horizontal
13293.24	32.43	42.60	15.90	38.90	12.20	44.63	68.20	-23.57	Pk	Vertical
13293.24	29.81	42.60	15.90	38.90	12.20	42.01	54.00	-11.99	AV	Vertical
13297.00	31.84	42.60	15.90	38.90	12.20	44.04	68.20	-24.16	Pk	Horizontal
13297.00	28.54	42.60	15.90	38.90	12.20	40.74	54.00	-13.26	AV	Horizontal



Mid Channel (802.11a/ 5785 MHz)										
3254.43	43.96	44.70	6.70	28.20	-9.80	34.16	68.20	-34.04	Pk	Vertical
3254.43	41.47	44.70	6.70	28.20	-9.80	31.67	54.00	-22.33	AV	Vertical
3246.61	43.79	44.70	6.70	28.20	-9.80	33.99	68.20	-34.21	Pk	Horizontal
3246.61	40.77	44.70	6.70	28.20	-9.80	30.97	54.00	-23.03	AV	Horizontal
3983.01	39.46	44.20	7.90	29.70	-6.60	32.86	68.20	-35.34	Pk	Vertical
3983.01	36.75	44.20	7.90	29.70	-6.60	30.15	54.00	-23.85	AV	Vertical
3989.16	39.48	44.20	7.90	29.70	-6.60	32.88	68.20	-35.32	Pk	Horizontal
3989.16	36.13	44.20	7.90	29.70	-6.60	29.53	54.00	-24.47	AV	Horizontal
7231.23	37.49	43.50	11.40	35.50	3.40	40.89	68.20	-27.31	Pk	Vertical
7231.23	34.74	43.50	11.40	35.50	3.40	38.14	54.00	-15.86	AV	Vertical
7220.83	36.96	43.50	11.40	35.50	3.40	40.36	68.20	-27.84	Pk	Horizontal
7220.83	34.03	43.50	11.40	35.50	3.40	37.43	54.00	-16.57	AV	Horizontal
10583.64	39.67	44.50	13.80	38.80	8.10	47.77	68.20	-20.43	Pk	Vertical
10583.64	36.46	44.50	13.80	38.80	8.10	44.56	54.00	-9.44	AV	Vertical
10587.65	39.50	44.50	13.80	38.80	8.10	47.60	68.20	-20.60	Pk	Horizontal
10587.65	36.12	44.50	13.80	38.80	8.10	44.22	54.00	-9.78	AV	Horizontal
11569.95	33.00	43.60	14.30	39.50	10.20	43.20	68.20	-25.00	Pk	Vertical
11569.95	29.71	43.60	14.30	39.50	10.20	39.91	54.00	-14.09	AV	Vertical
11570.10	33.60	43.60	14.30	39.50	10.20	43.80	68.20	-24.40	Pk	Horizontal
11570.10	30.62	43.60	14.30	39.50	10.20	40.82	54.00	-13.18	AV	Horizontal
13284.11	32.70	42.60	15.90	38.90	12.20	44.90	68.20	-23.30	Pk	Vertical
13284.11	29.53	42.60	15.90	38.90	12.20	41.73	54.00	-12.27	AV	Vertical
13298.95	31.63	42.60	15.90	38.90	12.20	43.83	68.20	-24.37	Pk	Horizontal
13298.95	29.37	42.60	15.90	38.90	12.20	41.57	54.00	-12.43	AV	Horizontal



High Channel (802.11a/ 5825 MHz)										
3249.53	45.24	44.70	6.70	28.20	-9.80	35.44	68.20	-32.76	Pk	Vertical
3249.53	41.00	44.70	6.70	28.20	-9.80	31.20	54.00	-22.80	AV	Vertical
3259.05	44.96	44.70	6.70	28.20	-9.80	35.16	68.20	-33.04	Pk	Horizontal
3259.05	41.54	44.70	6.70	28.20	-9.80	31.74	54.00	-22.26	AV	Horizontal
3985.50	40.00	44.20	7.90	29.70	-6.60	33.40	68.20	-34.80	Pk	Vertical
3985.50	37.03	44.20	7.90	29.70	-6.60	30.43	54.00	-23.57	AV	Vertical
3986.95	40.08	44.20	7.90	29.70	-6.60	33.48	68.20	-34.72	Pk	Horizontal
3986.95	36.70	44.20	7.90	29.70	-6.60	30.10	54.00	-23.90	AV	Horizontal
7230.61	37.01	43.50	11.40	35.50	3.40	40.41	68.20	-27.79	Pk	Vertical
7230.61	33.55	43.50	11.40	35.50	3.40	36.95	54.00	-17.05	AV	Vertical
7221.69	37.91	43.50	11.40	35.50	3.40	41.31	68.20	-26.89	Pk	Horizontal
7221.69	34.49	43.50	11.40	35.50	3.40	37.89	54.00	-16.11	AV	Horizontal
10628.29	39.97	44.50	13.80	38.80	8.10	48.07	68.20	-20.13	Pk	Vertical
10628.29	36.68	44.50	13.80	38.80	8.10	44.78	54.00	-9.22	AV	Vertical
10640.16	38.91	44.50	13.80	38.80	8.10	47.01	68.20	-21.19	Pk	Horizontal
10640.16	36.91	44.50	13.80	38.80	8.10	45.01	54.00	-8.99	AV	Horizontal
11650.32	33.09	43.60	14.30	39.50	10.20	43.29	68.20	-24.91	Pk	Vertical
11650.32	29.85	43.60	14.30	39.50	10.20	40.05	54.00	-13.95	AV	Vertical
11649.98	33.60	43.60	14.30	39.50	10.20	43.80	68.20	-24.40	Pk	Horizontal
11649.98	30.89	43.60	14.30	39.50	10.20	41.09	54.00	-12.91	AV	Horizontal
13296.21	32.62	42.70	18.00	37.10	12.40	45.02	68.20	-23.18	Pk	Vertical
13296.21	29.51	42.70	18.00	37.10	12.40	41.91	54.00	-12.09	AV	Vertical
13297.77	32.19	42.70	18.00	37.10	12.40	44.59	68.20	-23.61	Pk	Horizontal
13297.77	28.61	42.70	18.00	37.10	12.40	41.01	54.00	-12.99	AV	Horizontal


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11a.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
4. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.




3.2.9 Band Edge

Band I 5150-5250MHz

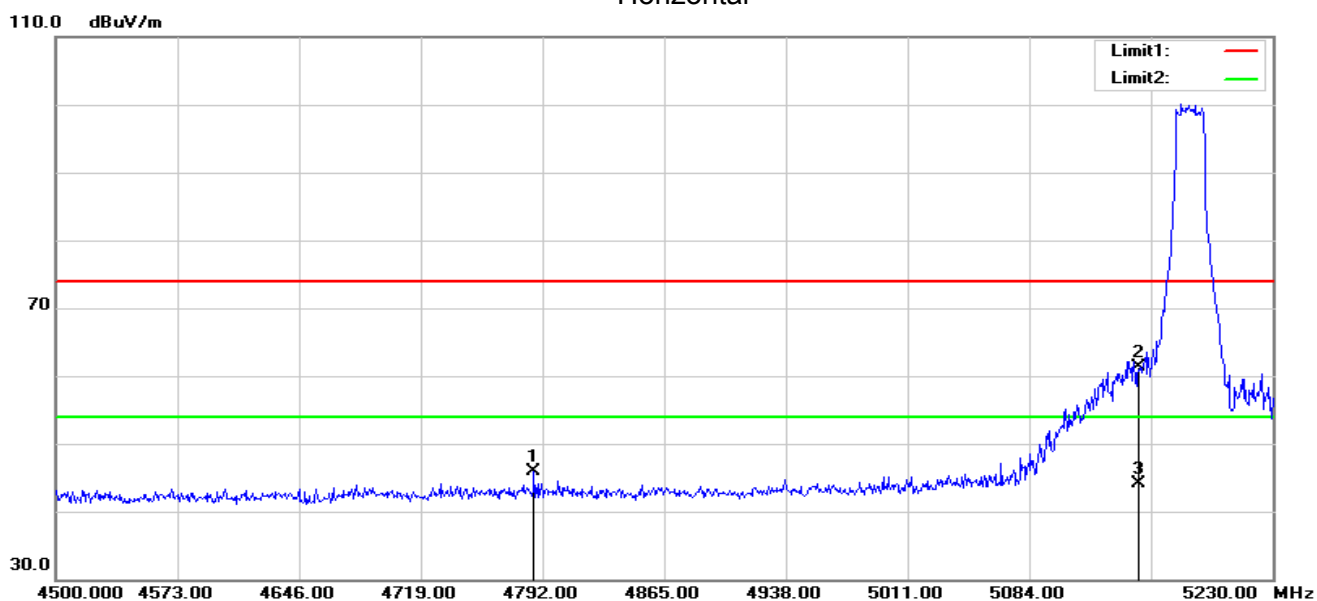
802.11a Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4786.890	53.22	-7.24	45.98	68.20	-22.25	peak
2	5150.000	66.97	-5.73	61.24	68.20	-6.96	peak
3	5150.000	49.83	-5.73	44.10	54.00	-9.90	AVG


Vertical

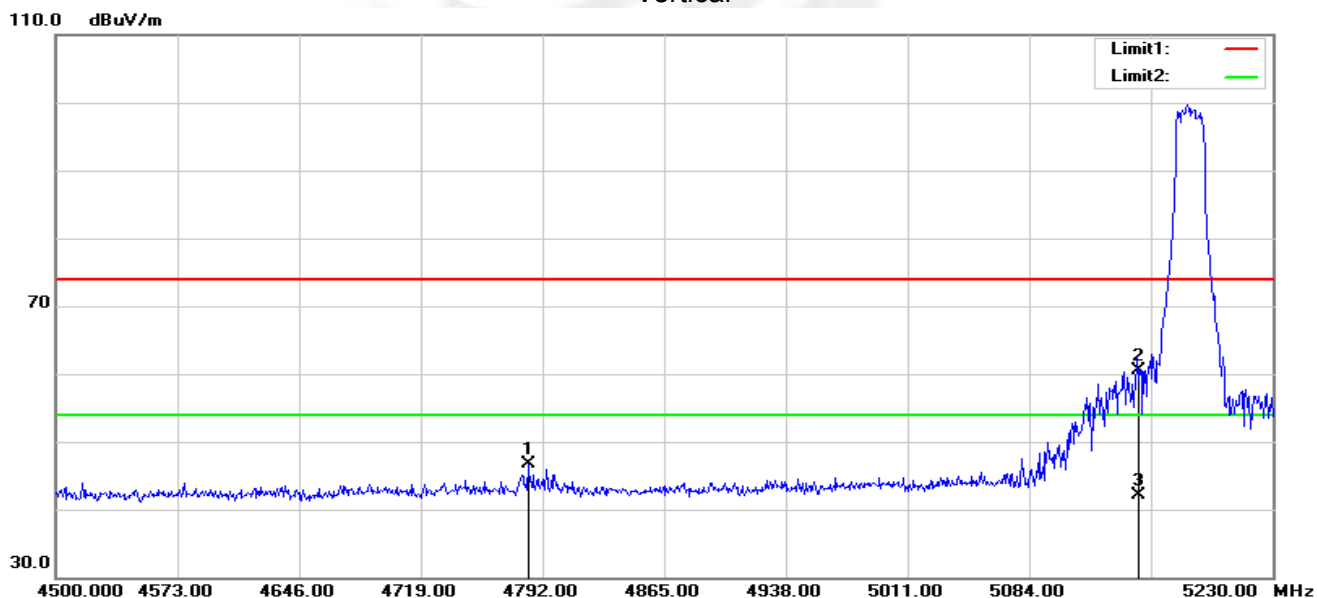

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4783.240	53.94	-7.24	46.70	68.20	-21.50	peak
2	5150.000	66.15	-5.73	60.42	68.20	-7.78	peak
3	5150.000	47.88	-5.73	42.15	54.00	-11.85	AVG

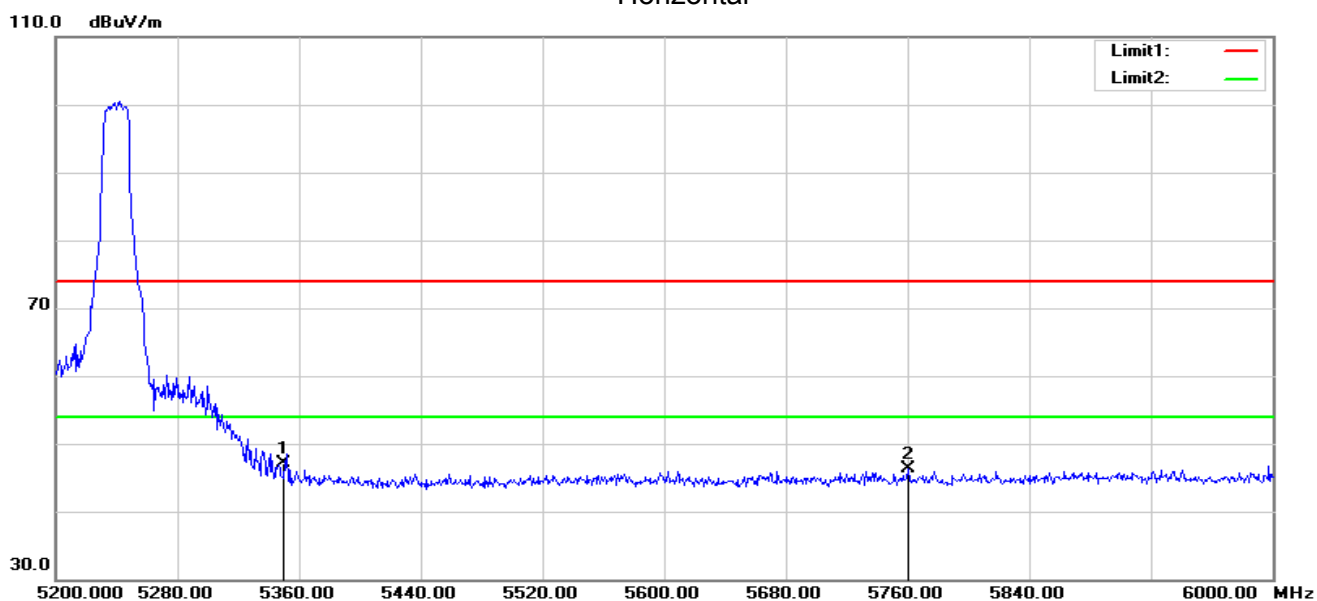**802.11a High
Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	52.28	-5.23	47.05	68.20	-20.15	peak
2	5760.800	50.66	-4.45	46.21	68.20	-21.99	peak

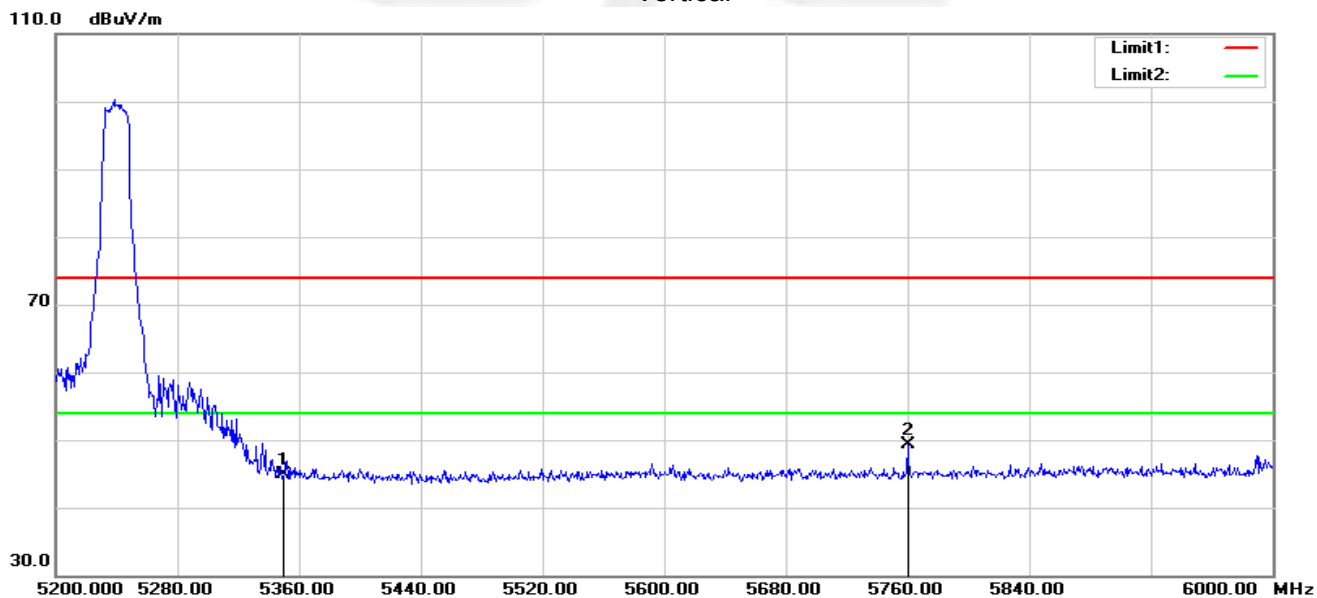
Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.23	-5.23	45.00	68.20	-23.20	peak
2	5760.000	53.70	-4.45	49.25	68.20	-18.95	peak

Note: 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11a,only shown the worst case.




Band II 5250-5350MHz

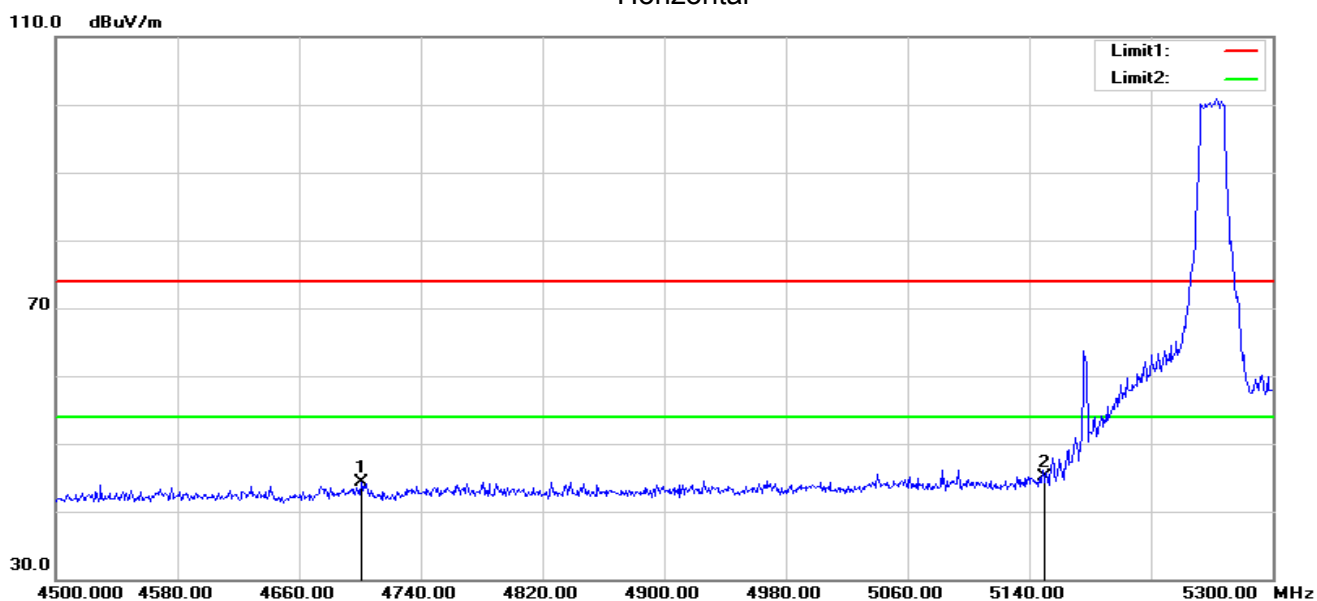
802.11a Low
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4700.800	51.57	-7.36	44.21	68.20	-23.99	peak
2	5150.000	50.81	-5.73	45.08	68.20	-23.12	peak


Vertical

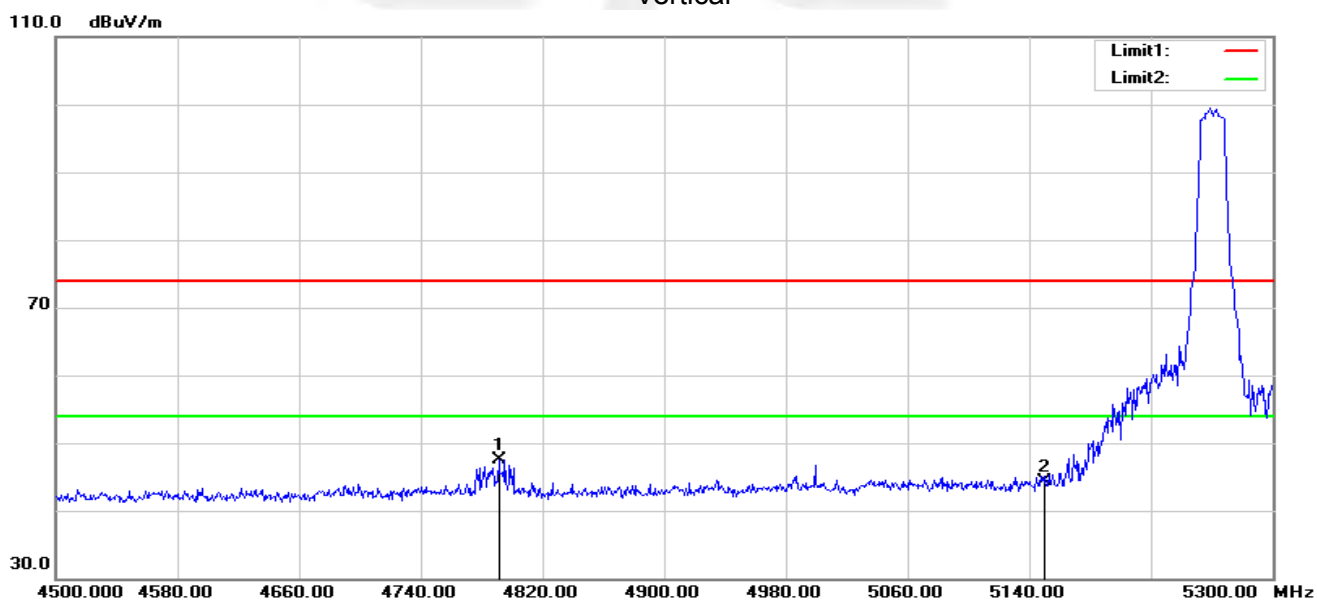

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4791.200	54.82	-7.23	47.59	68.20	-20.61	peak
2	5150.000	50.04	-5.73	44.31	68.20	-23.89	peak

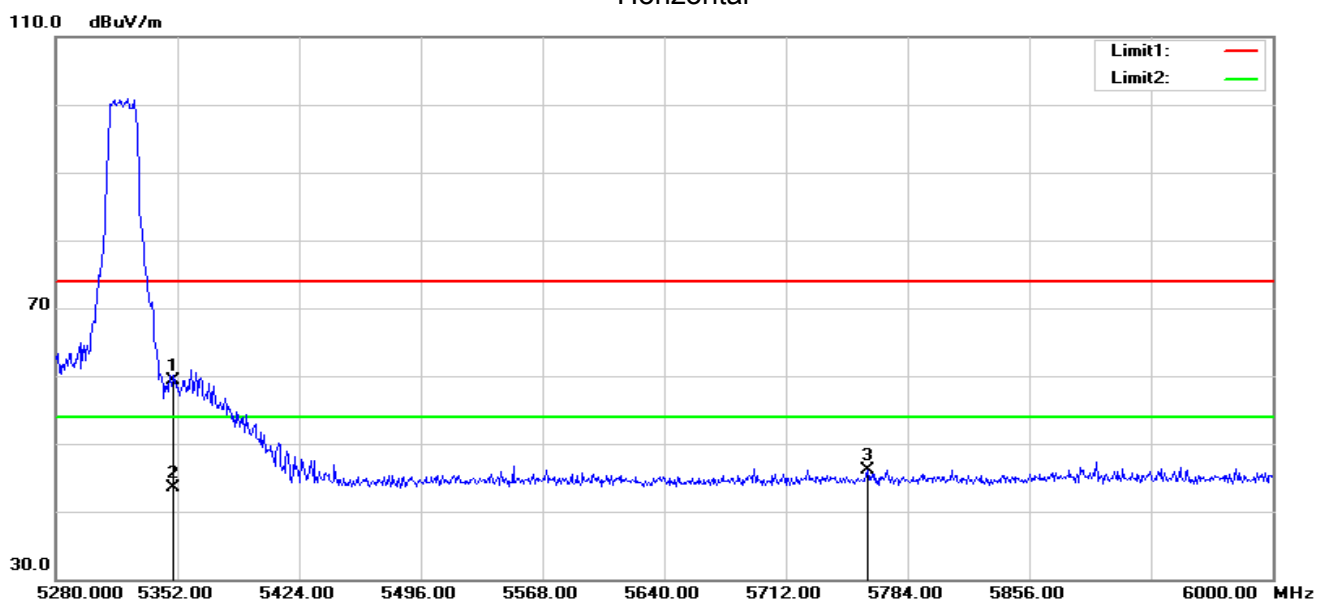
**802.11a High
Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	64.51	-5.23	59.28	68.20	-8.92	peak
2	5350.000	48.79	-5.23	43.56	54.00	-10.44	AVG
3	5760.240	50.57	-4.45	46.12	68.20	-22.08	peak

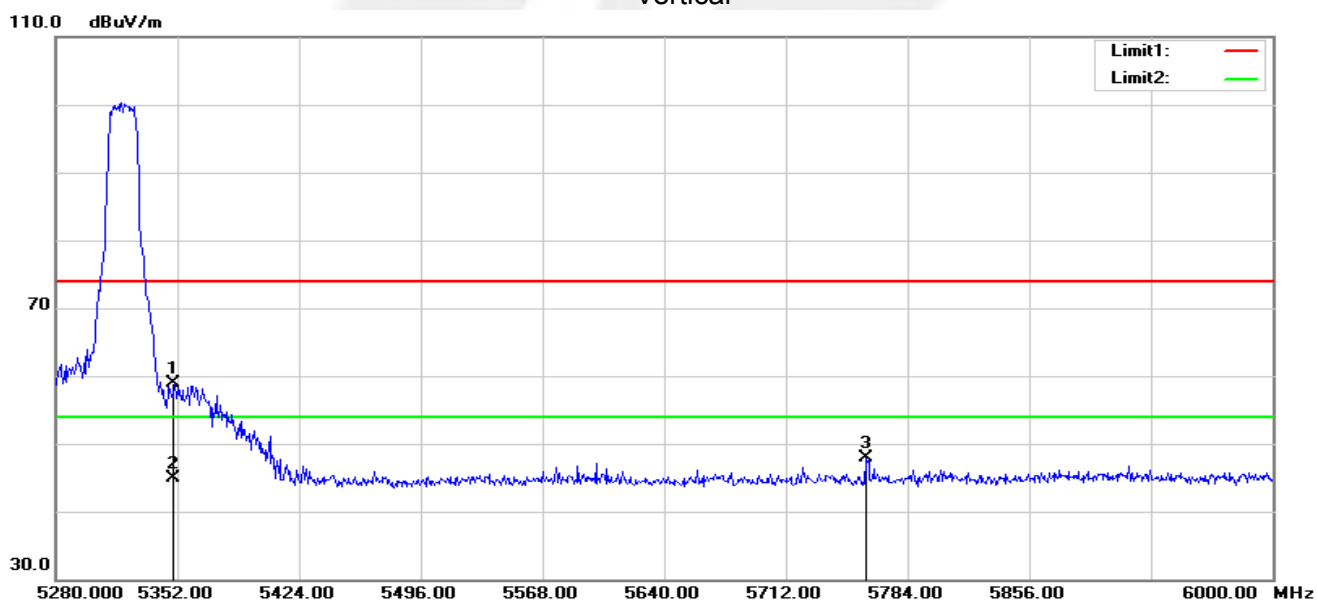
Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	64.10	-5.23	58.87	68.20	-9.33	peak
2	5350.000	50.10	-5.23	44.87	54.00	-9.13	AVG
3	5759.520	52.38	-4.45	47.93	68.20	-20.27	peak

Note: 802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11a,only shown the worst case.

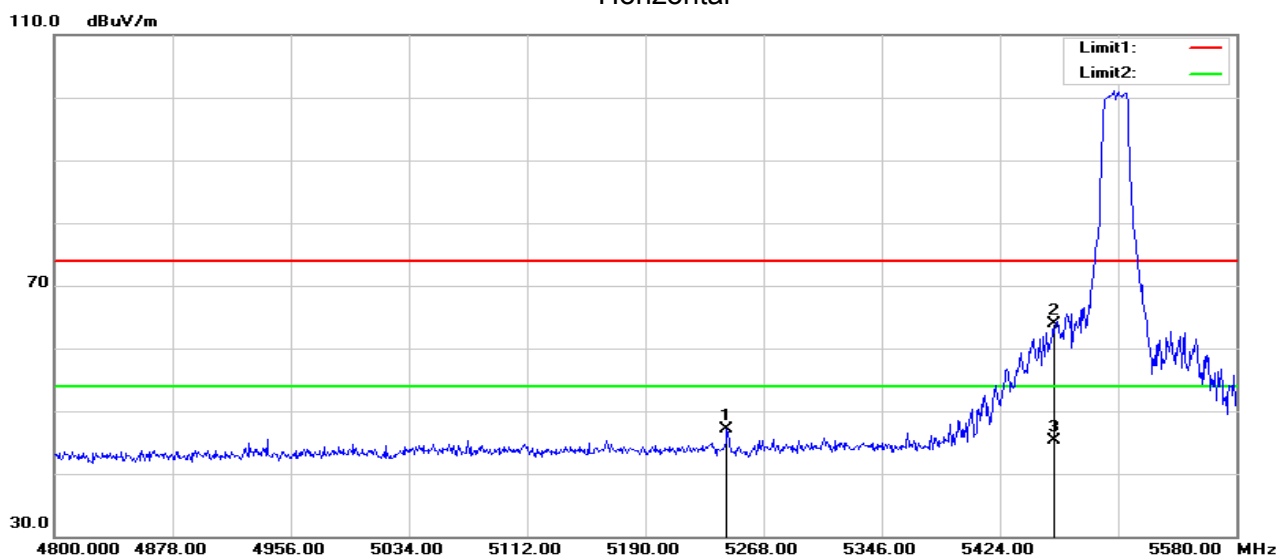**Band III 5470-5725MHz****802.11a Low
Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5243.820	52.61	-5.50	47.11	68.20	-21.09	peak
2	5460.000	69.03	-5.11	63.92	68.20	-4.28	peak
3	5460.000	50.34	-5.11	45.23	54.00	-8.77	AVG

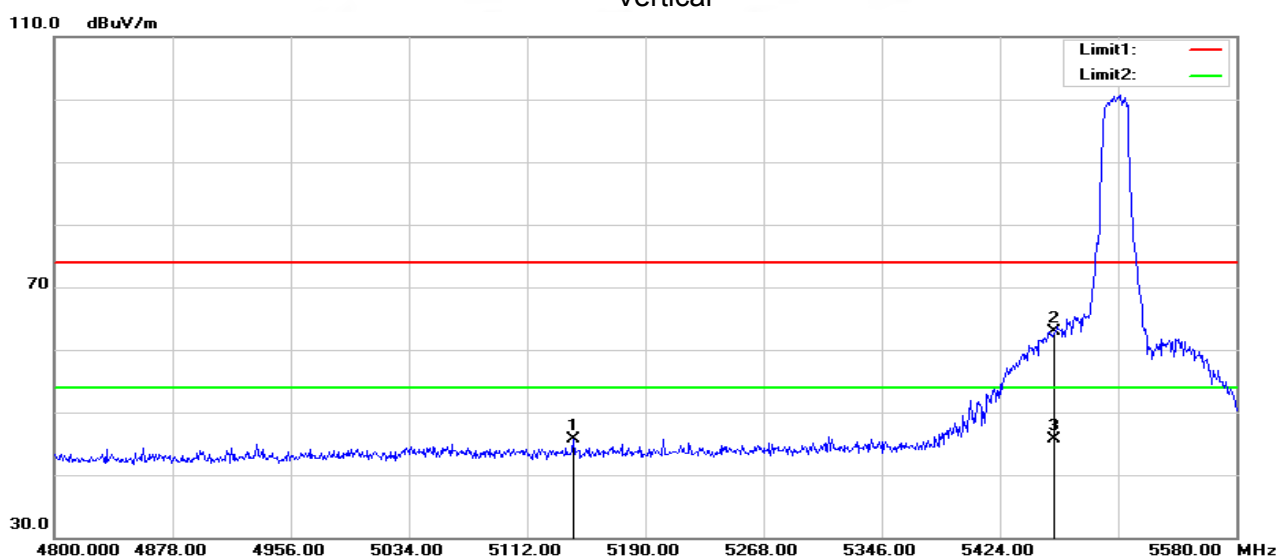Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.420	51.47	-5.74	45.73	68.20	-22.47	peak
2	5460.000	67.97	-5.11	62.86	68.20	-5.34	peak
3	5460.000	50.74	-5.11	45.63	54.00	-8.37	AVG

Note: 1.802.11a,802.11n (HT-20),802.11n (HT-40), 802.11ac (VHT-20),802.11ac (VHT-40), 802.11ac (VHT-80) all has been tested, the worst case is 802.11a,only shown the worst case.

2. The high channel main frequency is too far away from the restricted band and does not require testing.

Band IV(5.725-5.85 GHz)

Note: The main frequency is too far away from the restricted band and does not require testing.



4. CONDUCTED SPURIOUS EMISSIONS AND BANDEDGE

4.1 LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold


For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 5700 to 5725 MHz Upper Band Edge: 5850 to 5870 MHz
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

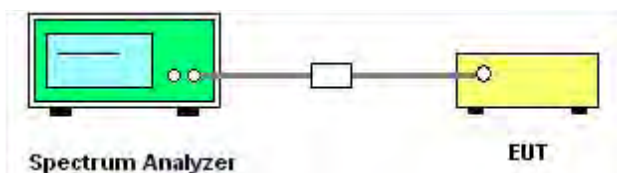

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1000 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Data See Attachment A





5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB D02 General UNII Test Procedures New Rules v01r03.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.


Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.



5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

5150-5250MHz					
Frequency	Power Density(dBm)	Duty cycle factor	Power Density(dBm)	Limit	Result
802.11a					
5180	4.463	0.19	4.653	11	PASS
5200	4.730	0.19	4.920	11	PASS
5240	5.218	0.19	5.408	11	PASS
802.11n20					
5180	6.329	0.20	6.529	11	PASS
5200	6.793	0.20	6.993	11	PASS
5240	6.613	0.20	6.813	11	PASS
802.11n40					
5190	2.429	0.41	2.839	11	PASS
5230	2.407	0.41	2.817	11	PASS
802.11ac20					
5180	5.625	0.23	5.855	11	PASS
5200	5.248	0.23	5.478	11	PASS
5240	5.873	0.23	6.103	11	PASS
802.11ac40					
5190	2.646	0.47	3.116	11	PASS
5230	2.585	0.47	3.055	11	PASS
802.11ac80					
5210	-1.065	0.87	-0.195	11	PASS



5250-5350MHz					
Frequency	Power Density(dBm)	Duty cycle factor	Power Density(dBm)	Limit	Result
802.11a					
5260	5.087	0.18	5.267	11	PASS
5300	5.342	0.18	5.522	11	PASS
5320	5.449	0.18	5.629	11	PASS
802.11n20					
5260	6.356	0.22	6.576	11	PASS
5300	7.047	0.22	7.267	11	PASS
5320	7.383	0.22	7.603	11	PASS
802.11n40					
5270	2.436	0.48	2.916	11	PASS
5310	2.740	0.48	3.220	11	PASS
802.11ac20					
5260	6.790	0.22	7.010	11	PASS
5300	7.173	0.22	7.393	11	PASS
5320	7.296	0.22	7.516	11	PASS
802.11ac40					
5270	2.337	0.42	2.757	11	PASS
5310	2.934	0.42	3.354	11	PASS
802.11ac80					
5290	-1.079	0.77	-0.309	11	PASS



5470-5725MHz					
Frequency	Power Density(dBm)	Duty cycle factor	Power Density(dBm)	Limit	Result
802.11a					
5500	4.445	0.18	4.625	11	PASS
5580	3.399	0.18	3.579	11	PASS
5700	3.487	0.18	3.667	11	PASS
802.11n20					
5500	6.105	0.22	6.325	11	PASS
5580	5.122	0.22	5.342	11	PASS
5700	5.246	0.22	5.466	11	PASS
802.11n40					
5510	1.075	0.45	1.525	11	PASS
5550	3.069	0.45	3.519	11	PASS
5670	0.498	0.45	0.948	11	PASS
802.11ac20					
5500	4.889	0.22	5.109	11	PASS
5580	4.023	0.22	4.243	11	PASS
5700	3.430	0.22	3.650	11	PASS
802.11ac40					
5510	1.619	0.43	2.049	11	PASS
5550	0.626	0.43	1.056	11	PASS
5670	0.522	0.43	0.952	11	PASS
802.11ac80					
5530	-0.232	0.85	0.618	11	PASS
5610	-3.240	0.85	-2.390	11	PASS



5725-5850MHz					
Frequency	Power Density(dBm)	Duty cycle factor	Power Density(dBm)	Limit	Result
802.11a					
5745	5.126	0.19	5.316	30	PASS
5785	4.467	0.19	4.657	30	PASS
5825	4.330	0.19	4.520	30	PASS
802.11n20					
5745	5.189	0.18	5.369	30	PASS
5785	5.319	0.18	5.499	30	PASS
5825	4.991	0.18	5.171	30	PASS
802.11n40					
5755	1.405	0.43	1.835	30	PASS
5795	1.327	0.43	1.757	30	PASS
802.11ac20					
5745	4.712	0.20	4.912	30	PASS
5785	3.958	0.20	4.158	30	PASS
5825	5.407	0.20	5.607	30	PASS
802.11ac40					
5755	2.032	0.48	2.512	30	PASS
5795	1.967	0.48	2.447	30	PASS
802.11ac80					
5775	-1.791	1.01	-0.781	30	PASS

Test plot see Attachment B



6. BANDWIDTH MEASUREMENT

6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

See list of measuring instruments of this test report.


6.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

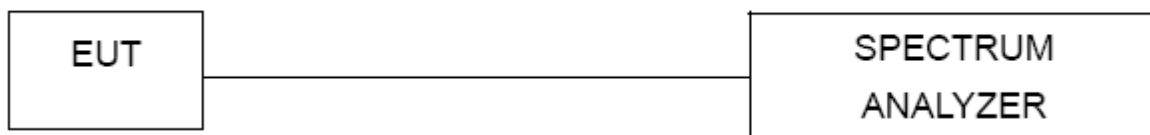

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

Band I (5.15-5.25GHz)		
Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5180	21.43	Pass
5200	21.40	Pass
5240	22.03	Pass
802.11n(HT20)		
5180	22.40	Pass
5200	22.49	Pass
5240	21.89	Pass
802.11n(HT40)		
5180	41.08	Pass
5200	41.05	Pass
802.11ac(VHT20)		
5180	22.37	Pass
5200	22.31	Pass
5240	22.13	Pass
802.11ac(VHT40)		
5180	40.64	Pass
5200	40.97	Pass
802.11ac(VHT80)		
5210	82.54	Pass

Band II(5.25-5.35GHz)		
Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5260	21.14	Pass
5300	22.07	Pass
5320	22.11	Pass
802.11n(HT20)		
5260	22.38	Pass
5300	22.48	Pass
5320	22.34	Pass
802.11n(HT40)		
5270	40.92	Pass
5310	40.69	Pass
802.11ac(VHT20)		
5260	22.07	Pass
5300	22.42	Pass
5320	23.06	Pass
802.11ac(VHT40)		
5270	40.82	Pass
5310	41.46	Pass
802.11ac(VHT80)		
5290	82.46	Pass



Band III(5.47-5.725GHz)		
Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5500	22.03	Pass
5580	21.72	Pass
5700	22.13	Pass
802.11n(HT20)		
5500	22.53	Pass
5580	22.05	Pass
5700	22.53	Pass
802.11n(HT40)		
5510	40.70	Pass
5550	40.97	Pass
5670	40.85	Pass
802.11ac(VHT20)		
5500	22.46	Pass
5580	22.49	Pass
5700	22.49	Pass
802.11ac(VHT40)		
5510	41.04	Pass
5550	40.84	Pass
5670	40.71	Pass
802.11ac(VHT80)		
5530	83.02	Pass
5610	82.94	Pass

Band IV (5.725-5.85GHz)		
Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5745	22.05	Pass
5785	22.61	Pass
5825	22.13	Pass
802.11n(HT20)		
5745	22.24	Pass
5785	22.66	Pass
5825	22.57	Pass
802.11n(HT40)		
5755	40.86	Pass
5795	41.12	Pass
802.11ac(VHT20)		
5745	22.43	Pass
5785	22.46	Pass
5825	22.22	Pass
802.11ac(VHT40)		
5755	40.71	Pass
5795	40.80	Pass
802.11ac(VHT80)		
5775	83.00	Pass

Test plot see Attachment C



6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth:

6.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.2.2 DEVIATION FROM STANDARD

No deviation.

6.2.3 TEST SETUP

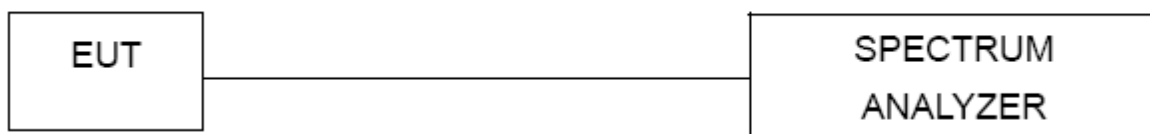

6.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.2.5 TEST RESULTS**

Band I (5.15-5.25GHz)		
Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5180	16.49	Pass
5200	16.46	Pass
5240	16.49	Pass
802.11n(HT20)		
5180	17.69	Pass
5200	17.70	Pass
5240	17.71	Pass
802.11n(HT40)		
5180	36.19	Pass
5200	36.15	Pass
802.11ac(VHT20)		
5180	17.71	Pass
5200	17.71	Pass
5240	17.71	Pass
802.11ac(VHT40)		
5180	36.15	Pass
5200	36.21	Pass
802.11ac(VHT80)		
5210	75.74	Pass

Band II(5.25-5.35GHz)		
Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5260	16.49	Pass
5300	16.51	Pass
5320	16.51	Pass
802.11n(HT20)		
5260	17.70	Pass
5300	17.72	Pass
5320	17.73	Pass
802.11n(HT40)		
5270	36.19	Pass
5310	36.18	Pass
802.11ac(VHT20)		
5260	17.72	Pass
5300	17.72	Pass
5320	17.72	Pass
802.11ac(VHT40)		
5270	36.23	Pass
5310	36.18	Pass
802.11ac(VHT80)		
5290	75.75	Pass



Band III(5.47-5.725GHz)		
Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5500	16.50	Pass
5580	16.49	Pass
5700	16.53	Pass
802.11n(HT20)		
5500	17.75	Pass
5580	17.73	Pass
5700	17.74	Pass
802.11n(HT40)		
5510	36.20	Pass
5550	36.15	Pass
5670	36.19	Pass
802.11ac(VHT20)		
5500	17.73	Pass
5580	17.73	Pass
5700	17.71	Pass
802.11ac(VHT40)		
5510	36.18	Pass
5550	36.17	Pass
5670	36.18	Pass
802.11ac(VHT80)		
5530	75.80	Pass
5610	75.91	Pass

Band IV (5.725-5.85GHz)		
Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5745	16.52	Pass
5785	16.52	Pass
5825	16.53	Pass
802.11n(HT20)		
5745	17.76	Pass
5785	17.71	Pass
5825	17.74	Pass
802.11n(HT40)		
5755	36.17	Pass
5795	36.22	Pass
802.11ac(VHT20)		
5745	17.74	Pass
5785	17.73	Pass
5825	17.73	Pass
802.11ac(VHT40)		
5755	36.19	Pass
5795	36.16	Pass
802.11ac(VHT80)		
5775	75.81	Pass

Test plot See Attachment C

6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:


6.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.2 DEVIATION FROM STANDARD

No deviation.

6.3.3 TEST SETUP

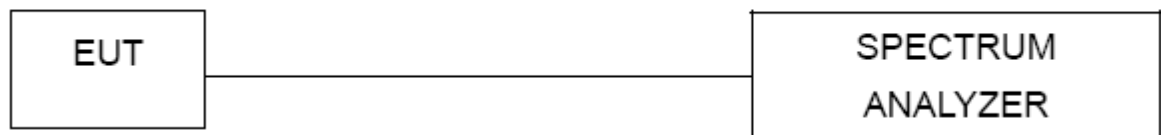

6.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.3.5 TEST RESULTS**

Band IV (5.725-5.85GHz)		
Frequency (MHz)	6dB Bandwidth (MHz)	Pass/Fail
802.11a		
5745	15.74	Pass
5785	15.15	Pass
5825	15.76	Pass
802.11n(HT20)		
5745	16.05	Pass
5785	16.05	Pass
5825	15.14	Pass
802.11n(HT40)		
5755	36.13	Pass
5795	36.15	Pass
802.11ac(VHT20)		
5745	15.13	Pass
5785	15.16	Pass
5825	15.15	Pass
802.11ac(VHT40)		
5755	36.15	Pass
5795	35.87	Pass
802.11ac(VHT80)		
5775	75.44	Pass

Test plots see Attachment D

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


7.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

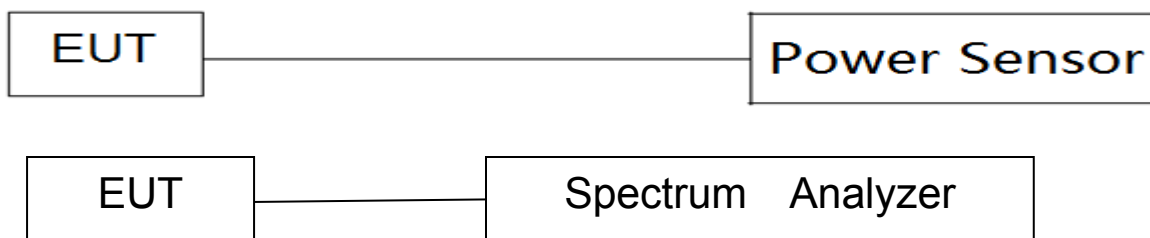

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Note:

1. For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W.
2. For mobile and portable client devices in the 5.25-5.35 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W.
3. For mobile and portable client devices in the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W.
4. For the band 5.745-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W.

Band I (5.15-5.25GHz)					
Test Channel	Frequency (MHz)	AV Power (dBm)	Duty cycle factor	AV Power (dBm)	LIMIT (dBm)
802.11a					
36	5180	8.15	0.19	8.34	23.98
40	5200	8.12	0.19	8.31	23.98
48	5240	7.90	0.19	8.09	23.98
802.11n(HT20)					
36	5180	8.11	0.20	8.31	23.98
40	5200	8.04	0.20	8.24	23.98
48	5240	7.81	0.20	8.01	23.98
802.11n(HT40)					
38	5190	7.12	0.41	7.53	23.98
46	5230	6.98	0.41	7.39	23.98
802.11ac(HT20)					
36	5180	7.16	0.23	7.39	23.98
40	5200	7.09	0.23	7.32	23.98
48	5240	6.84	0.23	7.07	23.98
802.11ac(HT40)					
38	5190	7.12	0.47	7.59	23.98
46	5230	6.93	0.47	7.40	23.98
802.11ac(HT80)					
42	5210	6.01	0.87	6.88	23.98



Band II(5.25-5.35GHz)					
Test Channel	Frequency (MHz)	AV Power (dBm)	Duty cycle factor	AV Power (dBm)	LIMIT (dBm)
802.11a					
52	5260	7.88	0.18	8.06	23.98
60	5300	7.72	0.18	7.90	23.98
64	5320	7.58	0.18	7.76	23.98
802.11n(HT20)					
52	5260	7.75	0.22	7.97	23.98
60	5300	7.58	0.22	7.80	23.98
64	5320	7.53	0.22	7.75	23.98
802.11n(HT40)					
54	5270	6.65	0.48	7.13	23.98
62	5310	6.55	0.48	7.03	23.98
802.11ac(HT20)					
52	5260	6.73	0.22	6.95	23.98
60	5300	6.55	0.22	6.77	23.98
64	5320	6.49	0.22	6.71	23.98
802.11ac(HT40)					
54	5270	6.59	0.42	7.01	23.98
62	5310	6.49	0.42	6.91	23.98
802.11ac(HT80)					
58	5290	5.80	0.77	6.57	23.98




Band III(5.47-5.725GHz)					
Test Channel	Frequency (MHz)	AV Power (dBm)	Duty cycle factor	AV Power (dBm)	LIMIT (dBm)
802.11a					
100	5500	7.63	0.18	7.81	23.98
116	5580	7.26	0.18	7.44	23.98
140	5700	5.81	0.18	5.99	23.98
802.11n(HT20)					
100	5500	7.54	0.22	7.76	23.98
116	5580	7.18	0.22	7.40	23.98
140	5700	5.79	0.22	6.01	23.98
802.11n(HT40)					
102	5510	6.36	0.45	6.81	23.98
110	5550	6.16	0.45	6.61	23.98
134	5670	5.38	0.45	5.83	23.98
802.11ac(HT20)					
100	5500	6.50	0.22	6.72	23.51
116	5580	6.24	0.22	6.46	23.51
140	5700	5.45	0.22	5.67	23.51
802.11ac(HT40)					
102	5510	6.45	0.43	6.88	23.98
110	5550	6.20	0.43	6.63	23.98
134	5670	5.47	0.43	5.90	23.98
802.11ac(HT80)					
106	5530	4.73	0.85	5.58	23.98
122	5610	5.60	0.85	6.45	23.98




Band IV (5.725-5.85GHz)					
Test Channel	Frequency (MHz)	AV Power (dBm)	Duty cycle factor	AV Power (dBm)	LIMIT (dBm)
802.11a					
149	5745	6.37	0.19	6.56	30
157	5785	5.20	0.19	5.39	30
165	5825	4.07	0.19	4.26	30
802.11n(HT20)					
149	5745	6.29	0.18	6.47	30
157	5785	5.05	0.18	5.23	30
165	5825	4.02	0.18	4.20	30
802.11n(HT40)					
151	5755	4.96	0.43	5.39	30
159	5795	3.74	0.43	4.17	30
802.11ac(HT20)					
149	5745	5.25	0.20	5.45	30
157	5785	4.08	0.20	4.28	30
165	5825	3.03	0.20	3.23	30
802.11ac(HT40)					
151	5755	5.02	0.48	5.50	30
159	5795	3.77	0.48	4.25	30
802.11ac(HT80)					
155	5775	3.49	1.01	4.50	30



802.11ac HT80(5210MHz)

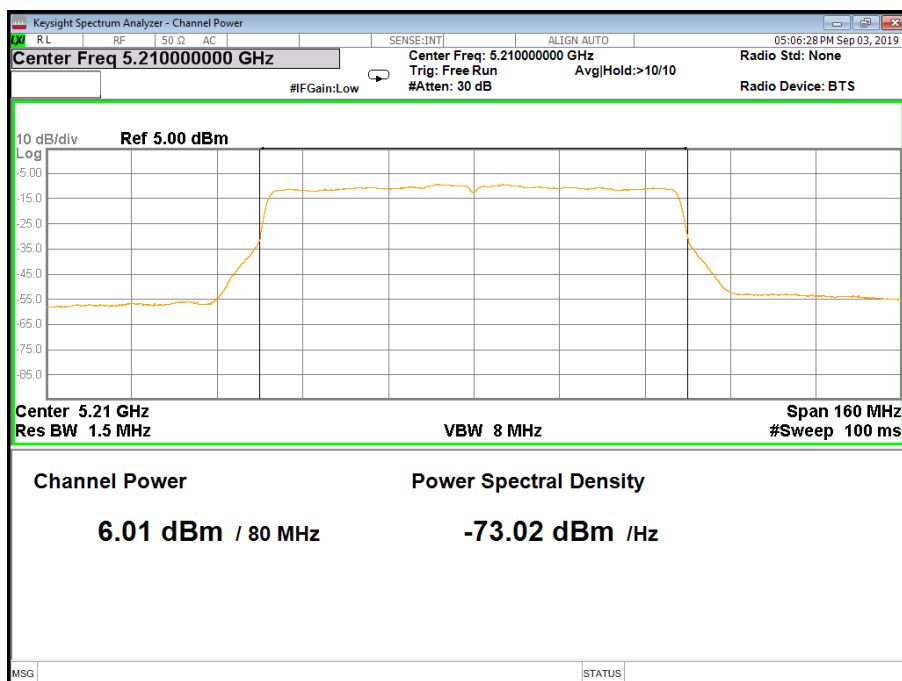


802.11ac HT80(5290MHz)

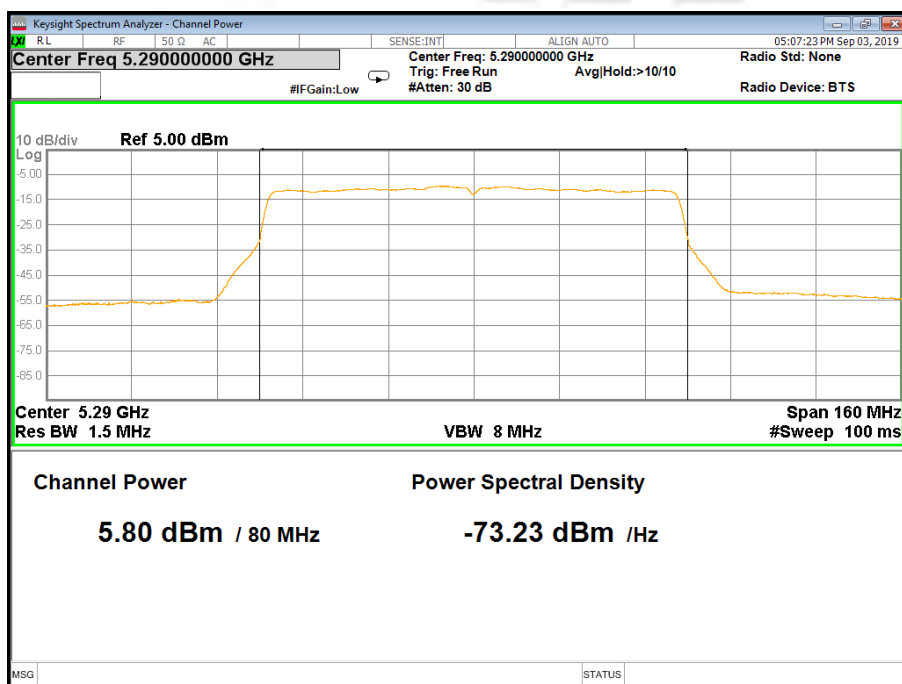




802.11ac HT80(5530MHz)

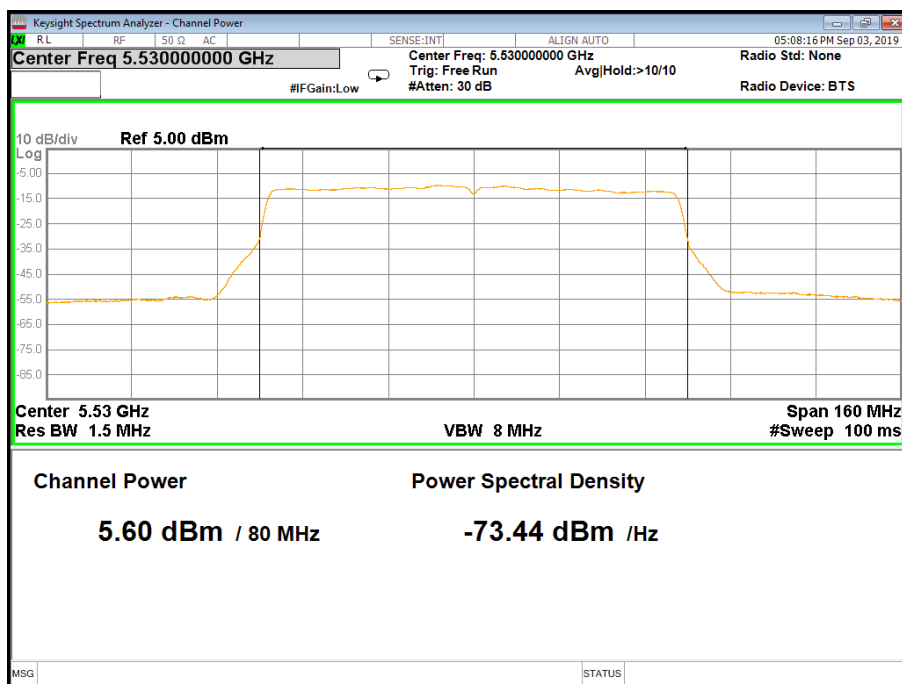


802.11ac HT80(5610MHz)

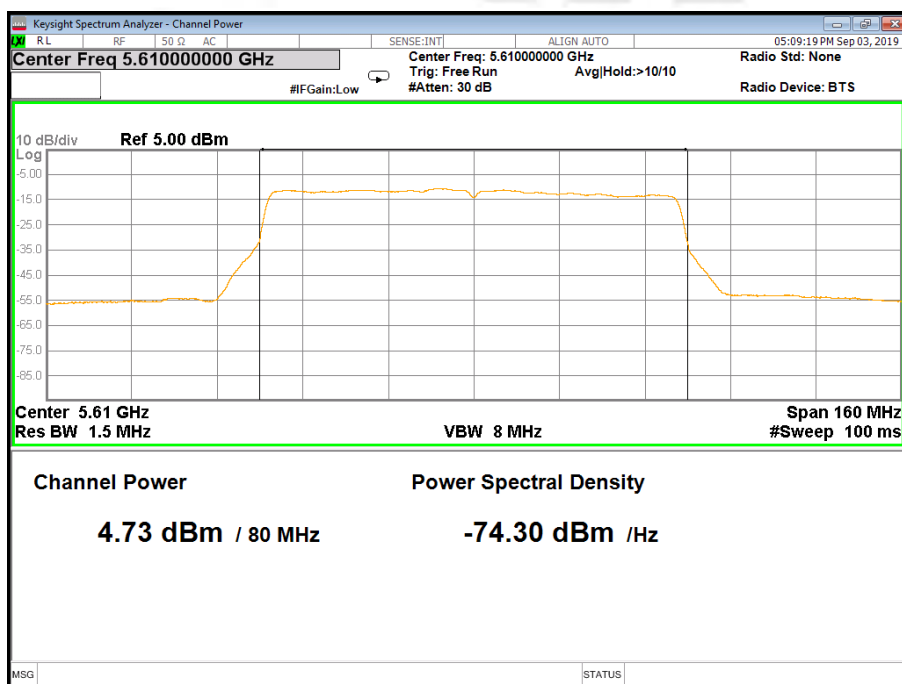



802.11ac HT80(5775MHz)

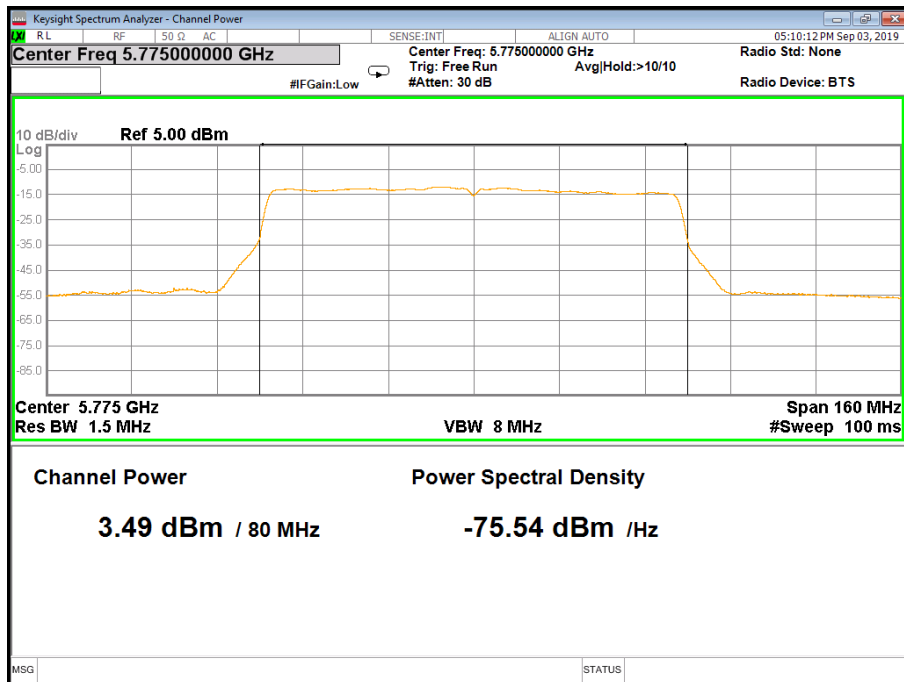



Duty cycle

Band	Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty cycle factor
5.2G	a20	2.072	2.167	95.62%	0.19
	n20	1.745	1.827	95.51%	0.20
	n40	0.862	0.948	90.93%	0.41
	ac20	1.754	1.850	94.81%	0.23
	ac40	0.866	0.964	89.83%	0.47
	ac80	0.426	0.521	81.77%	0.87
5.3G	a20	2.075	2.165	95.84%	0.18
	n20	1.745	1.835	95.10%	0.22
	n40	0.864	0.964	89.63%	0.48
	ac20	1.755	1.845	95.12%	0.22
	ac40	0.868	0.956	90.79%	0.42
	ac80	0.427	0.510	83.73%	0.77
5.6G	a20	2.075	2.165	95.84%	0.18
	n20	1.750	1.840	95.11%	0.22
	n40	0.864	0.958	90.19%	0.45
	ac20	1.755	1.845	95.12%	0.22
	ac40	0.866	0.956	90.59%	0.43
	ac80	0.426	0.518	82.24%	0.85
5.8G	a20	2.075	2.170	95.62%	0.19
	n20	1.750	1.825	95.89%	0.18
	n40	0.864	0.955	90.47%	0.43
	ac20	1.760	1.845	95.39%	0.20
	ac40	0.868	0.970	89.48%	0.48
	ac80	0.426	0.538	79.18%	1.01


NOTE:

Duty cycle factor = $10 \cdot \log(1 / \text{Duty cycle})$




5.2G

802.11a

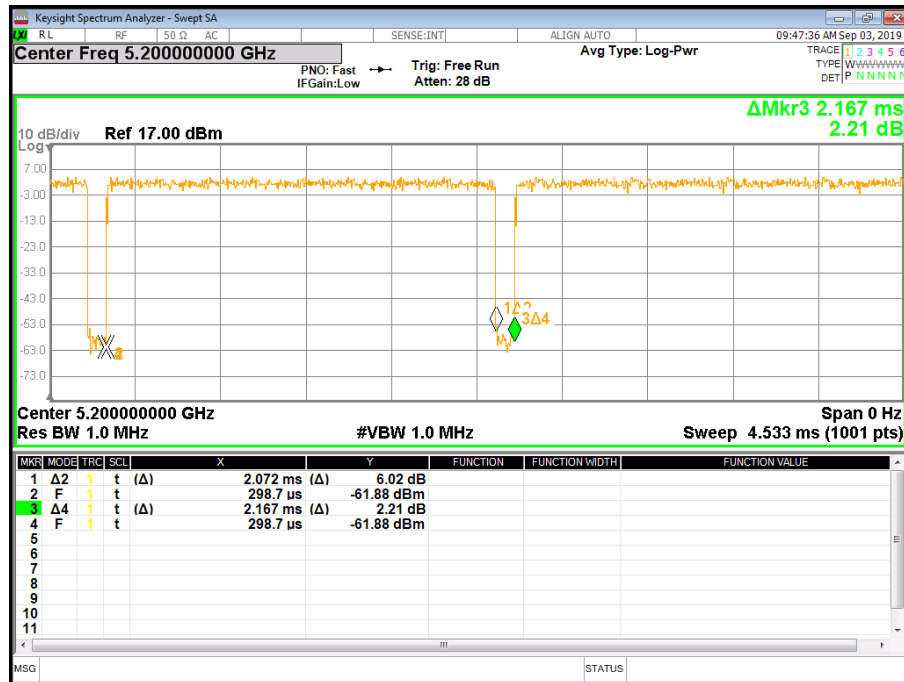


802.11n HT20

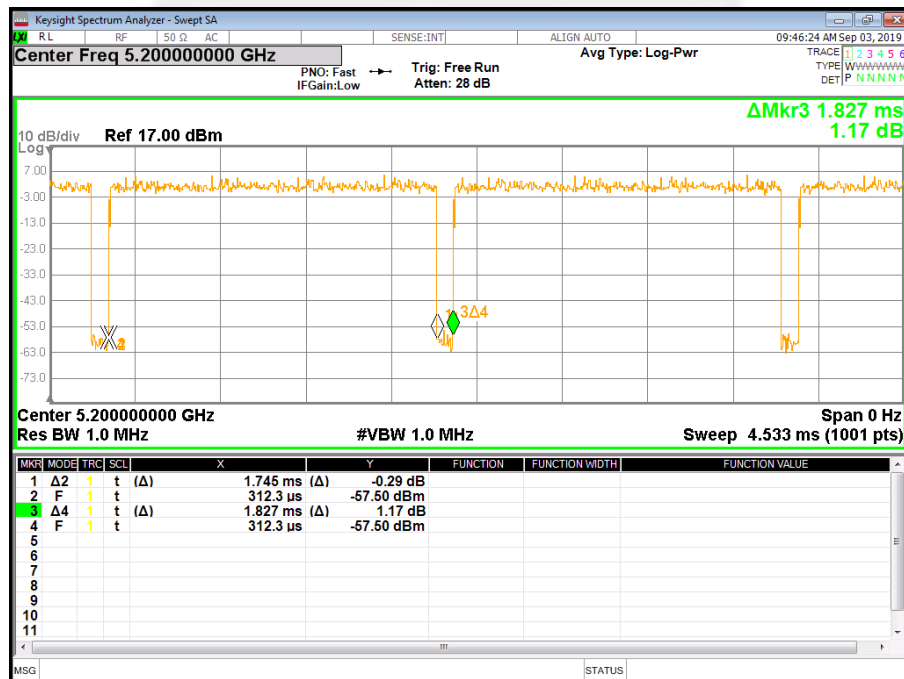




802.11n HT40

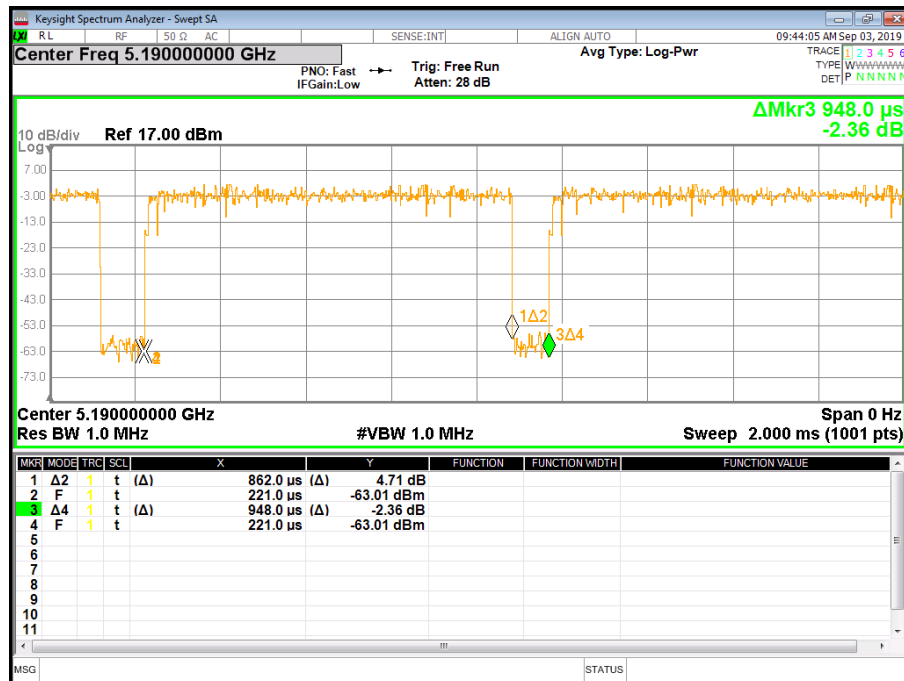


802.11ac VHT20

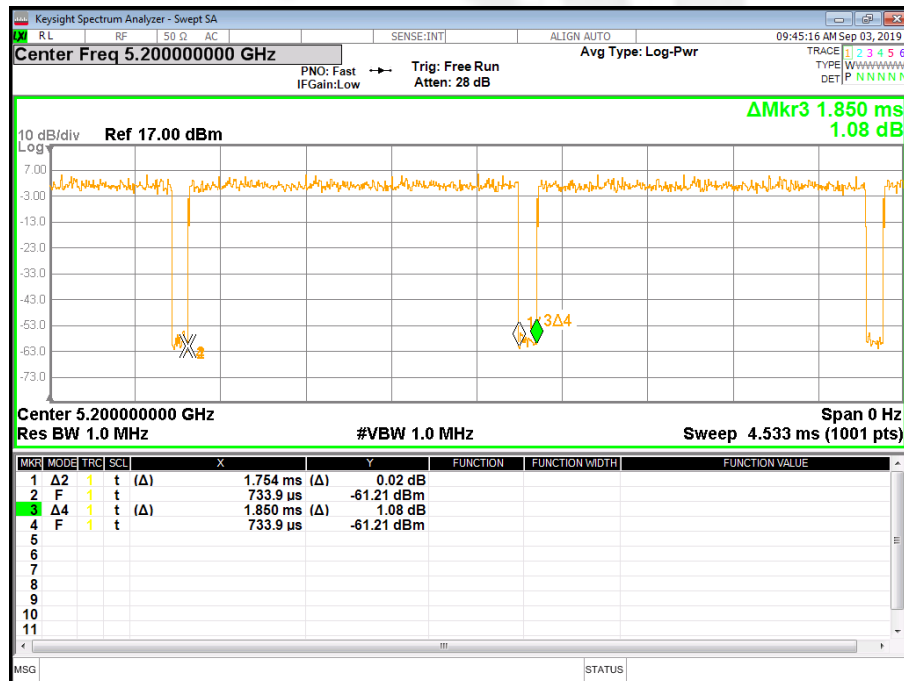




802.11ac VHT40

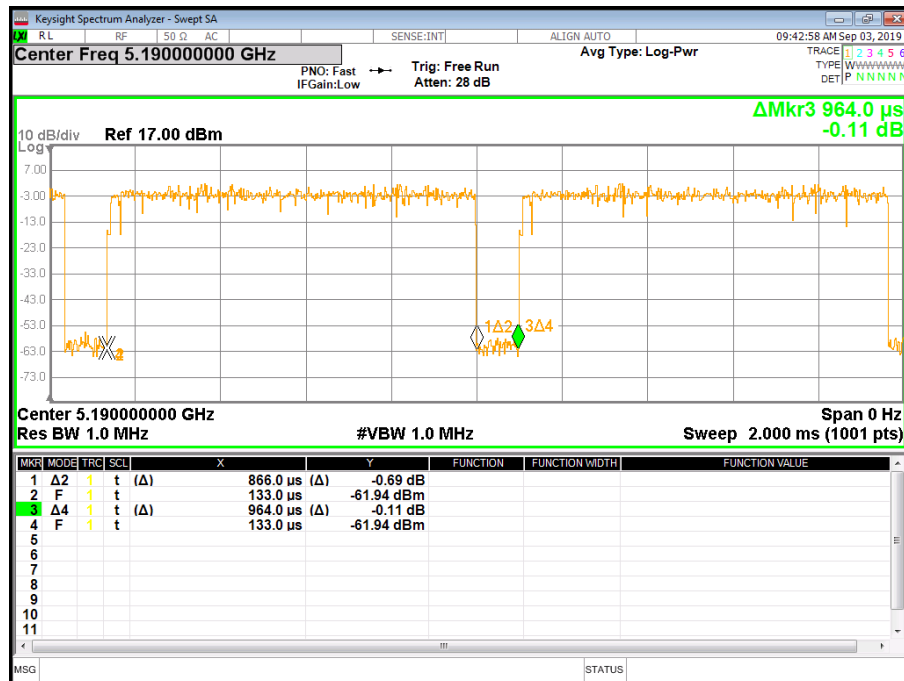


802.11ac VHT80

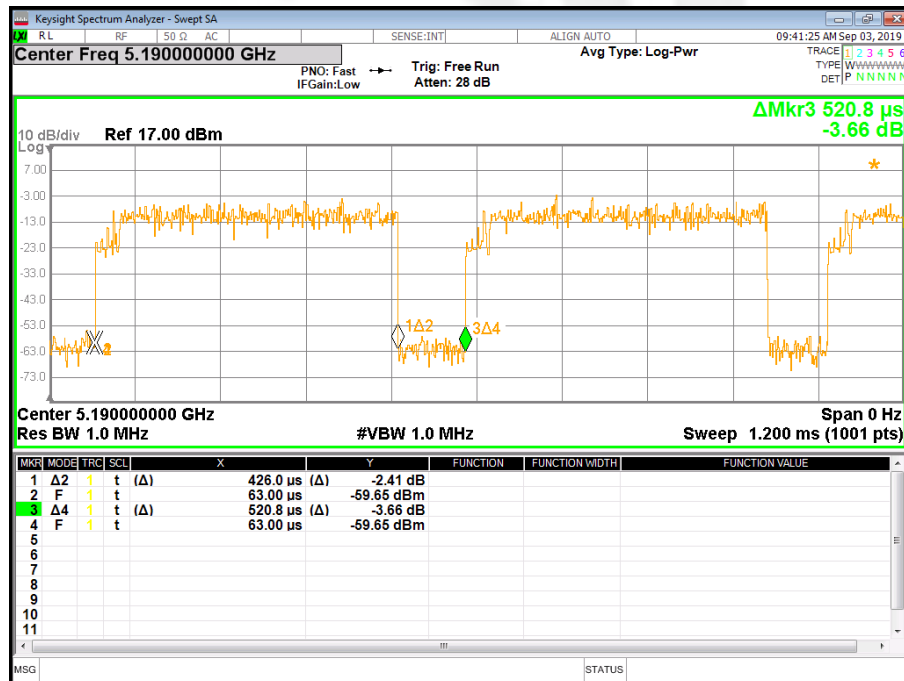




5.3G

802.11a

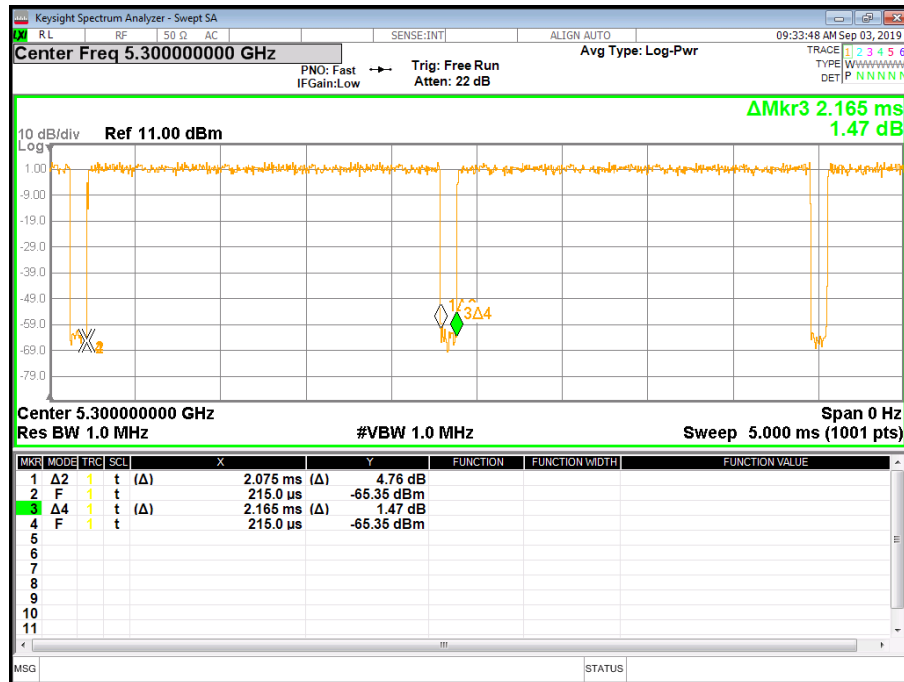


802.11n HT20

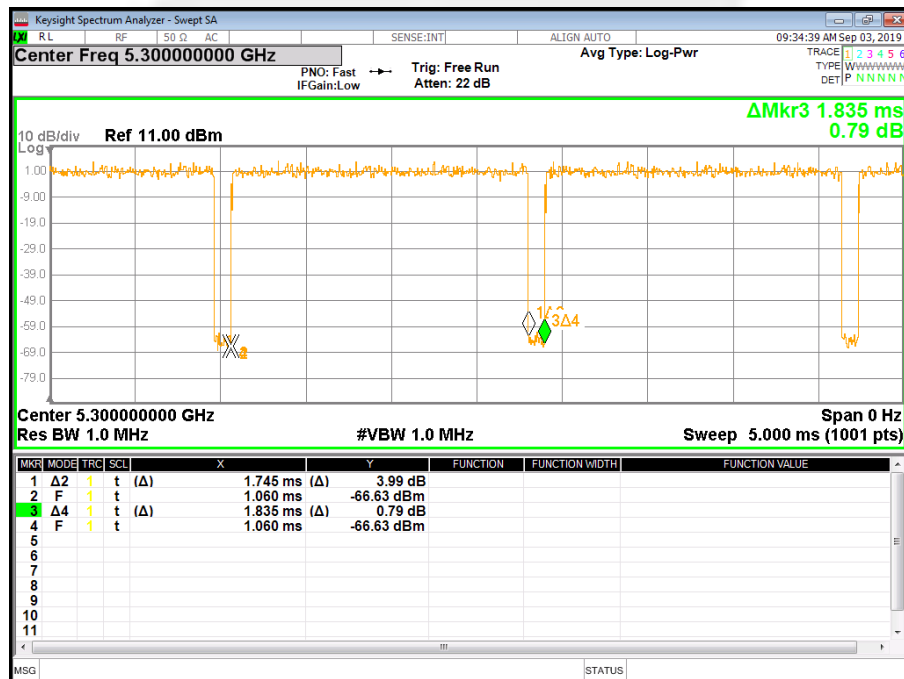




802.11n HT40

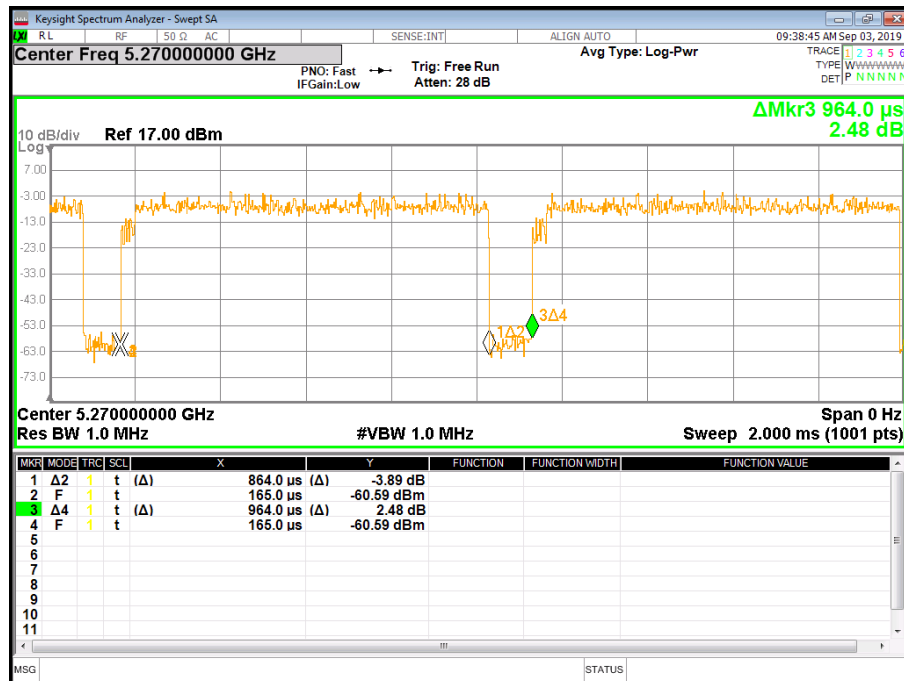


802.11ac VHT20

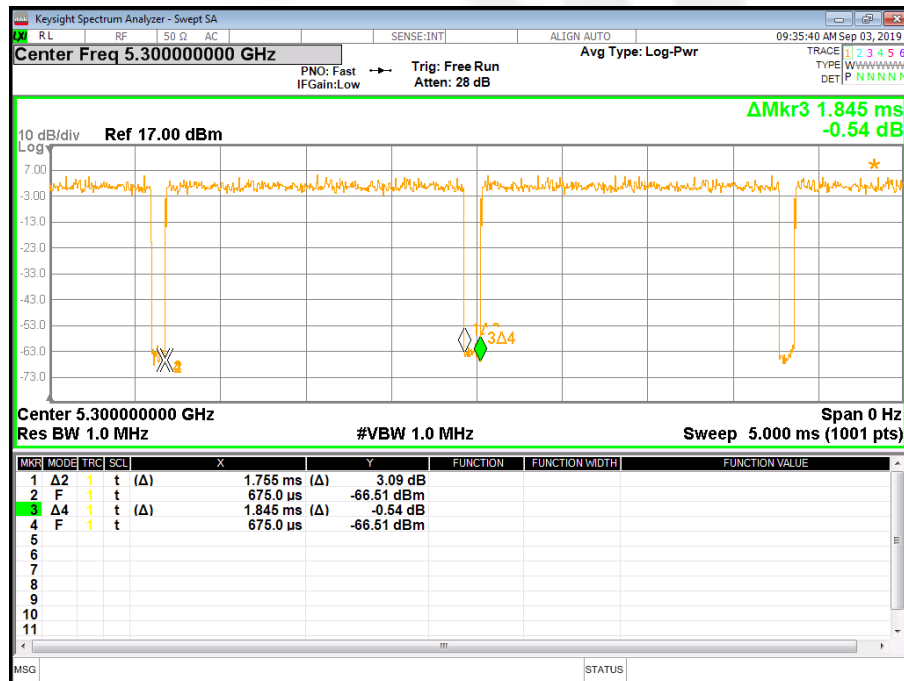




802.11ac VHT40

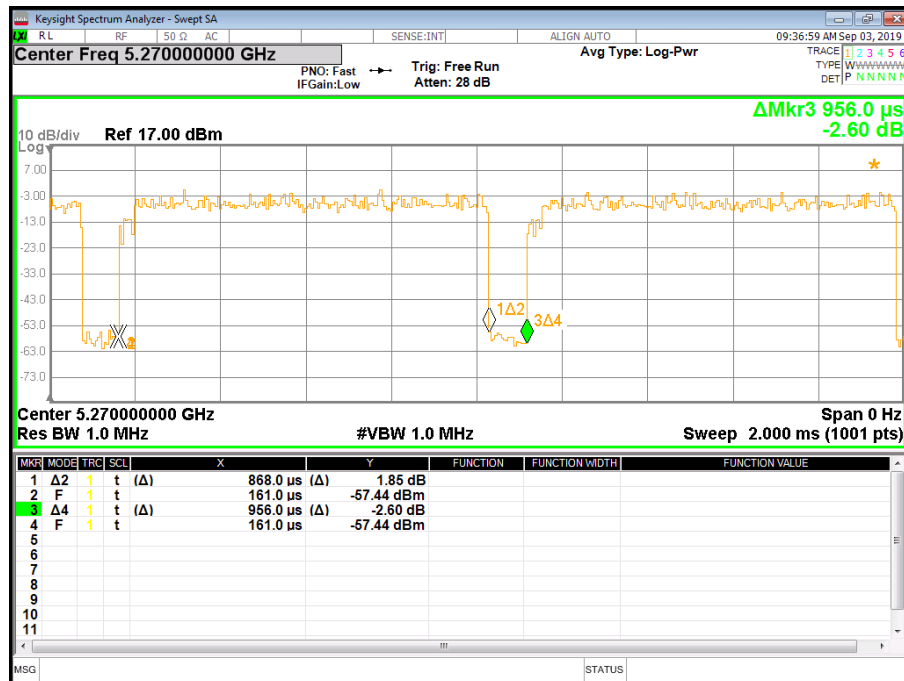


802.11ac VHT80

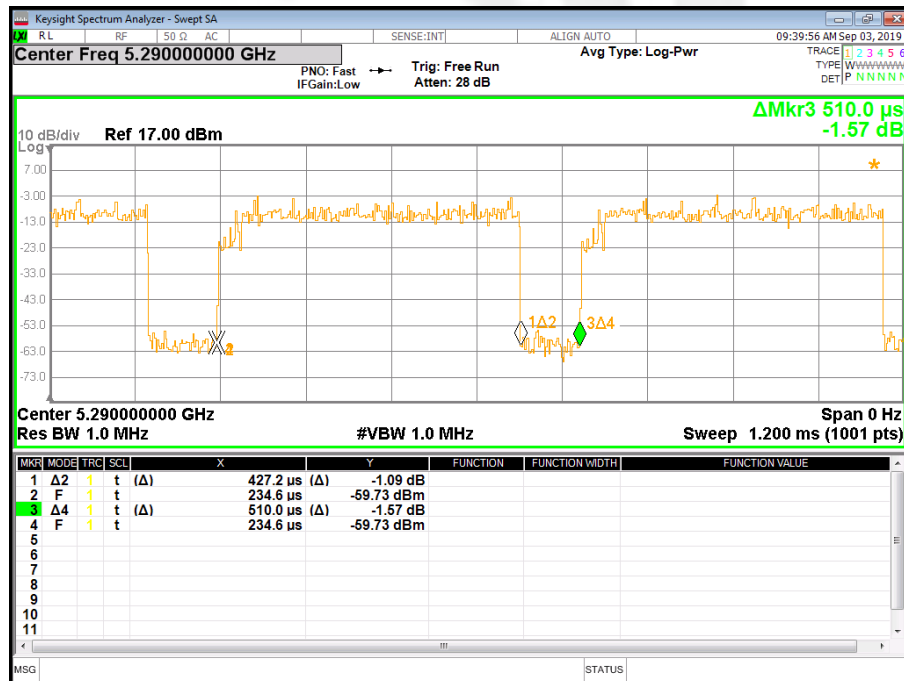




5.6G

802.11a

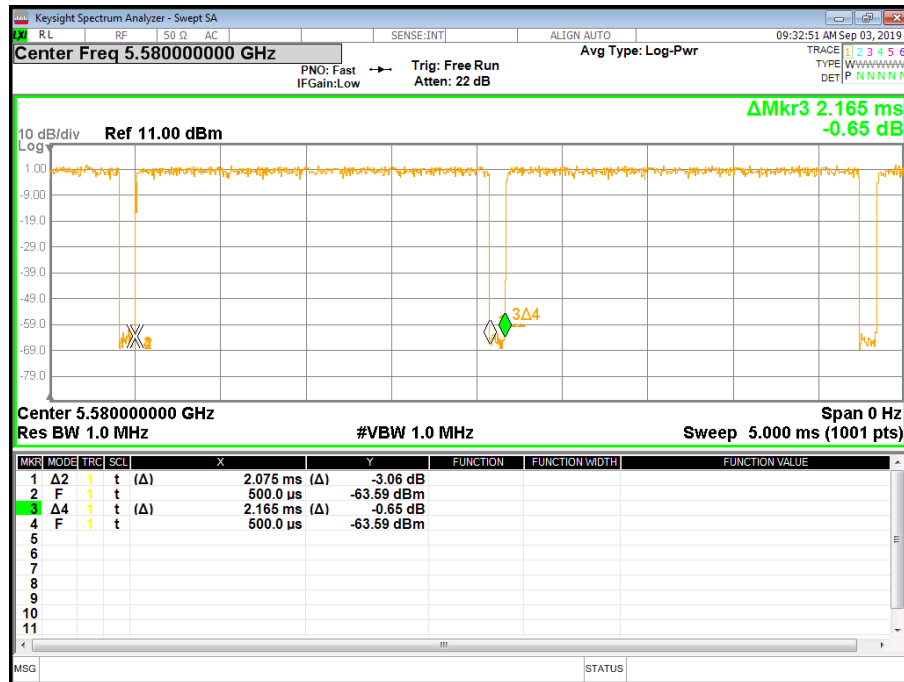


802.11n HT20

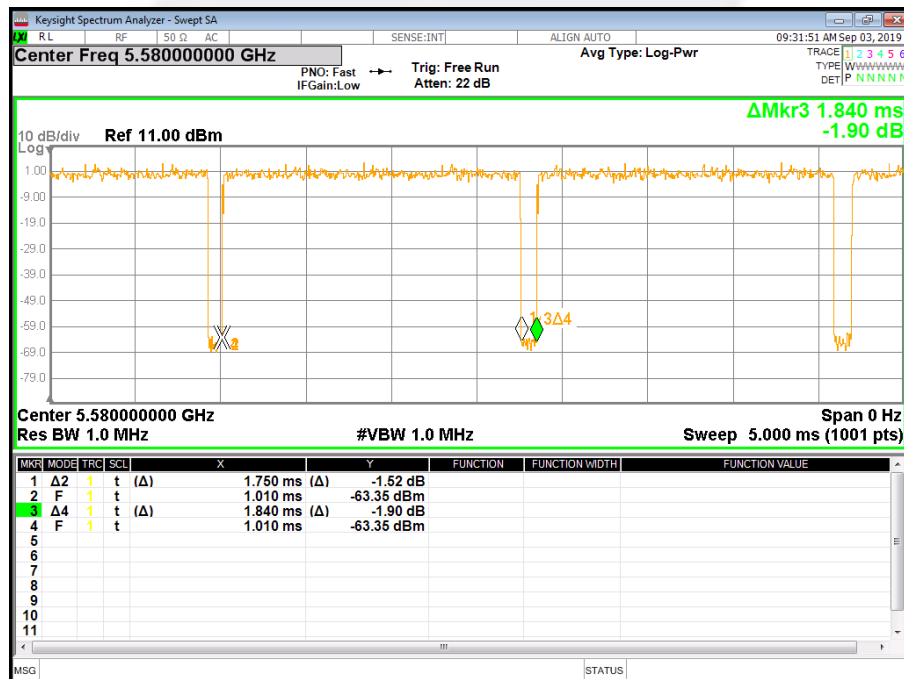




802.11n HT40

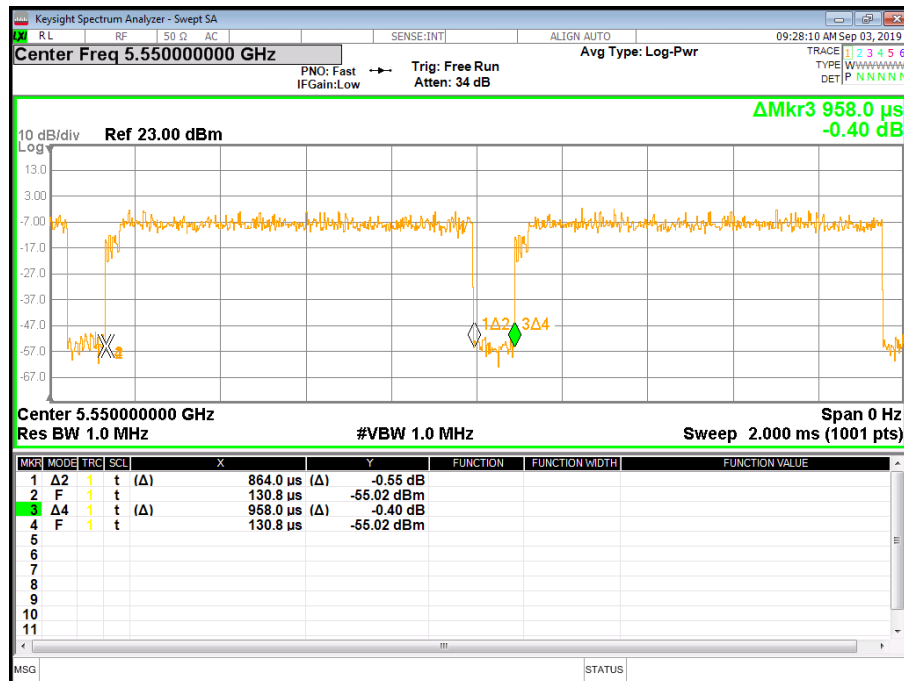


802.11ac VHT20

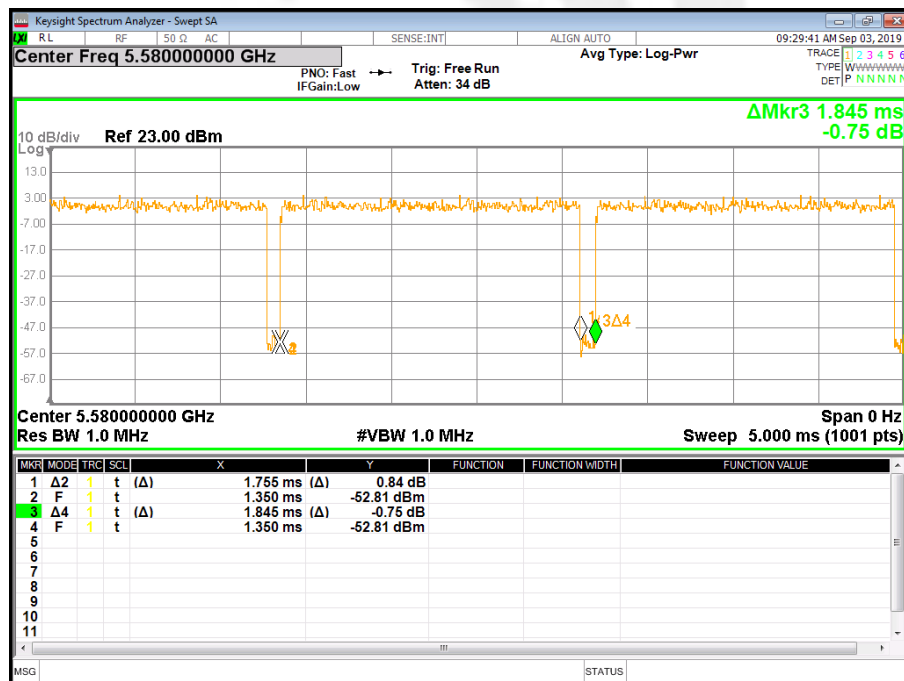




802.11ac VHT40

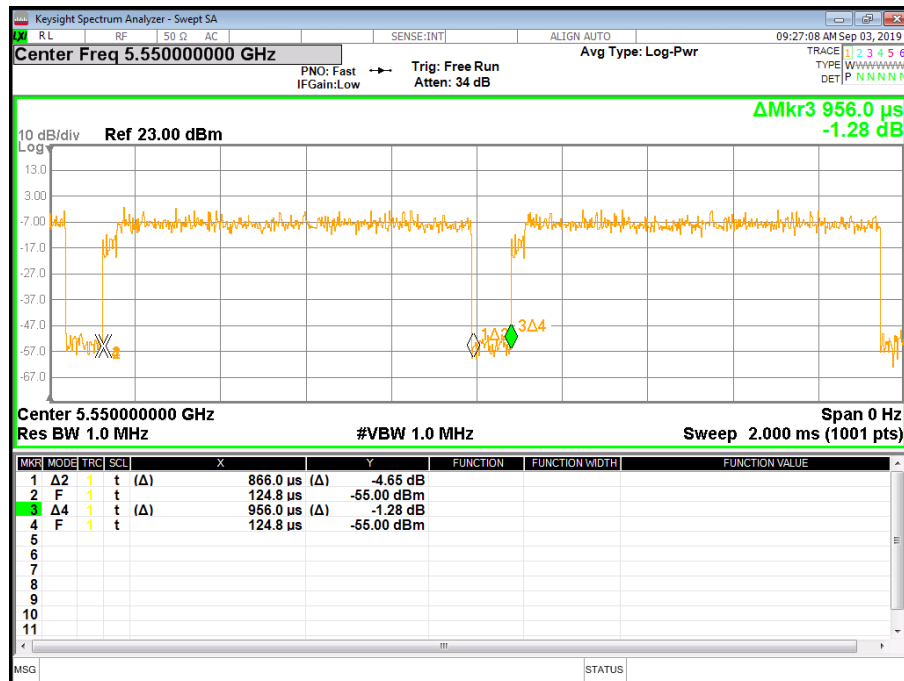


802.11ac VHT80

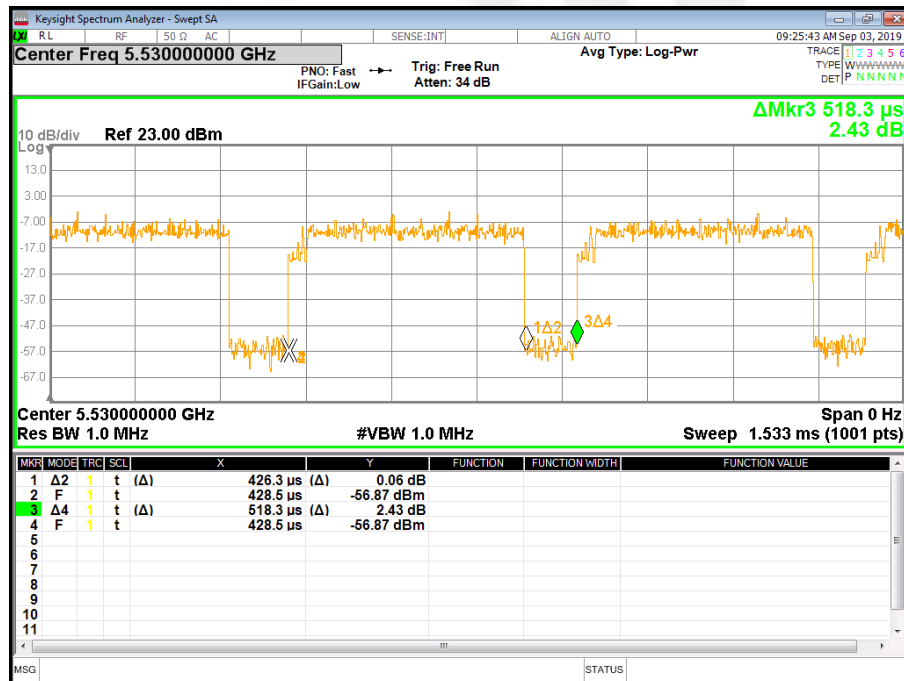




5.8G

802.11a

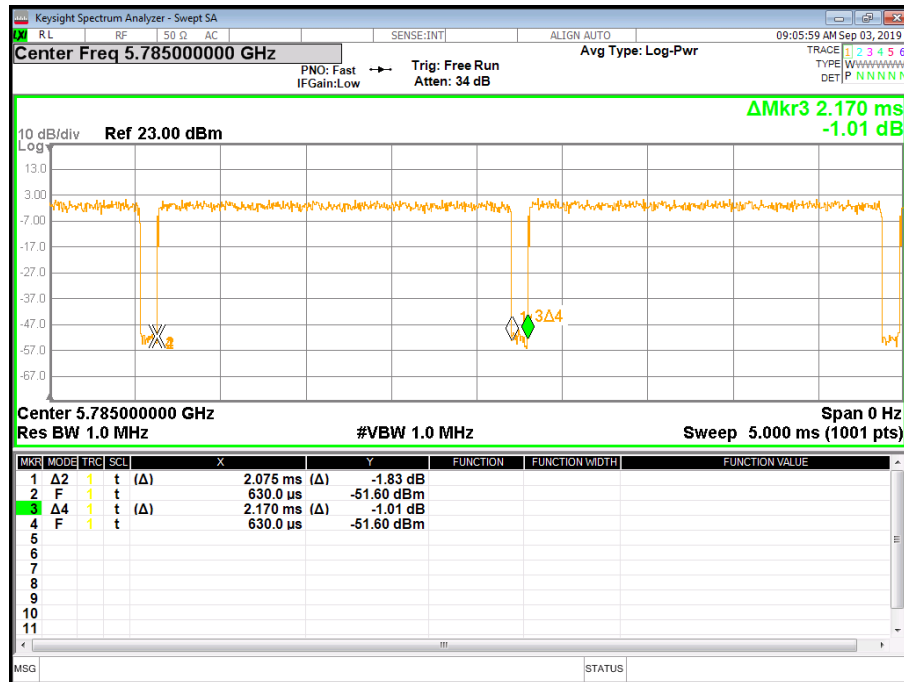


802.11n HT20

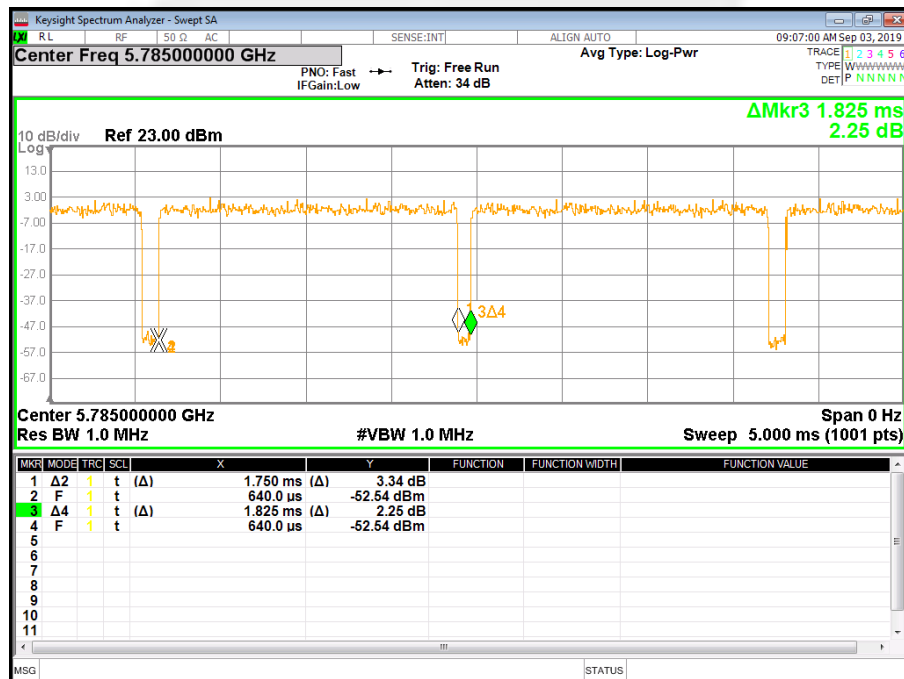




802.11n HT40

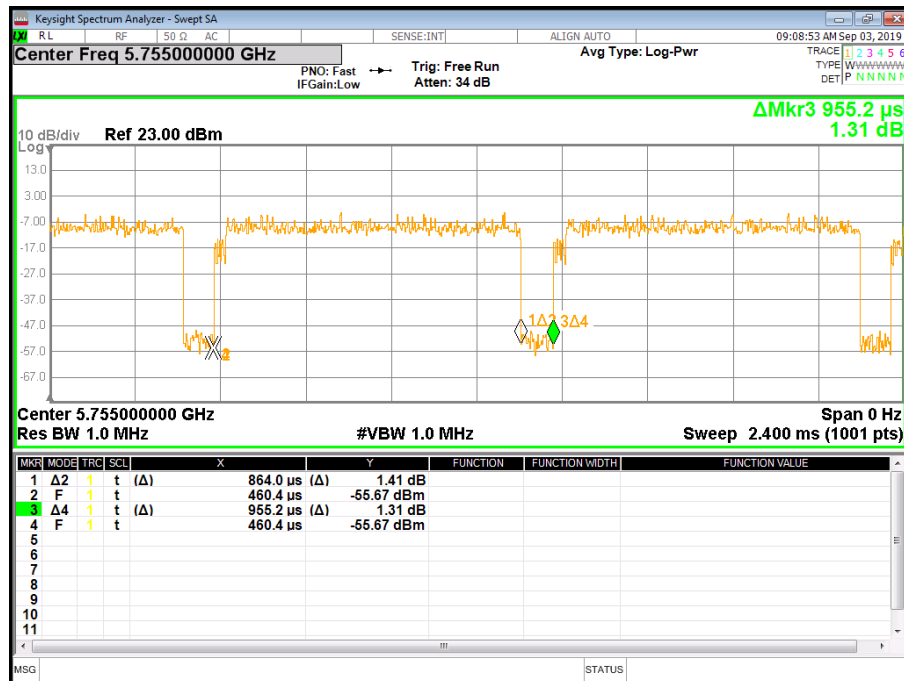


802.11ac VHT20

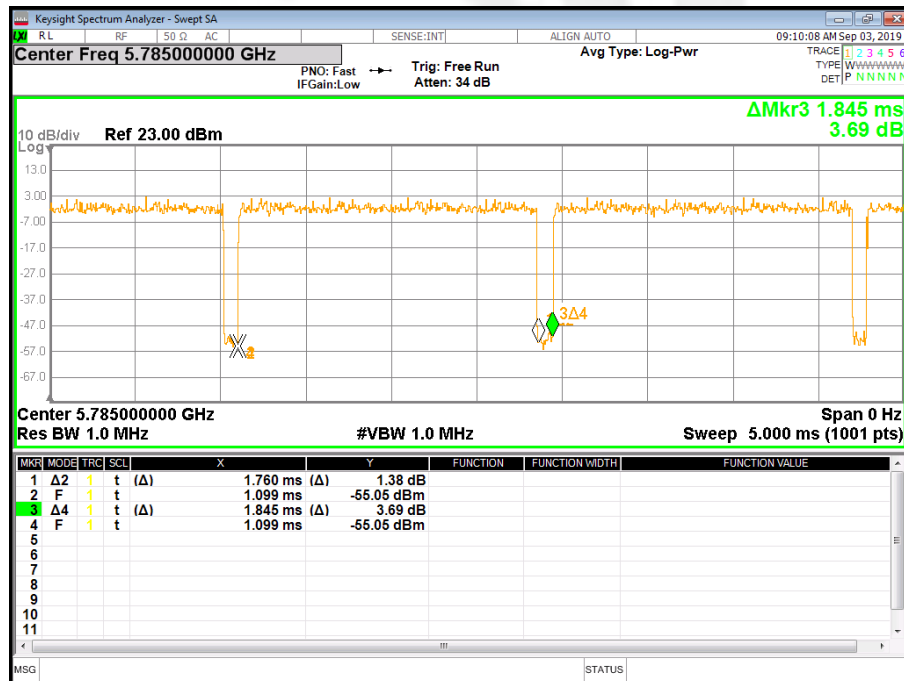




802.11ac VHT40

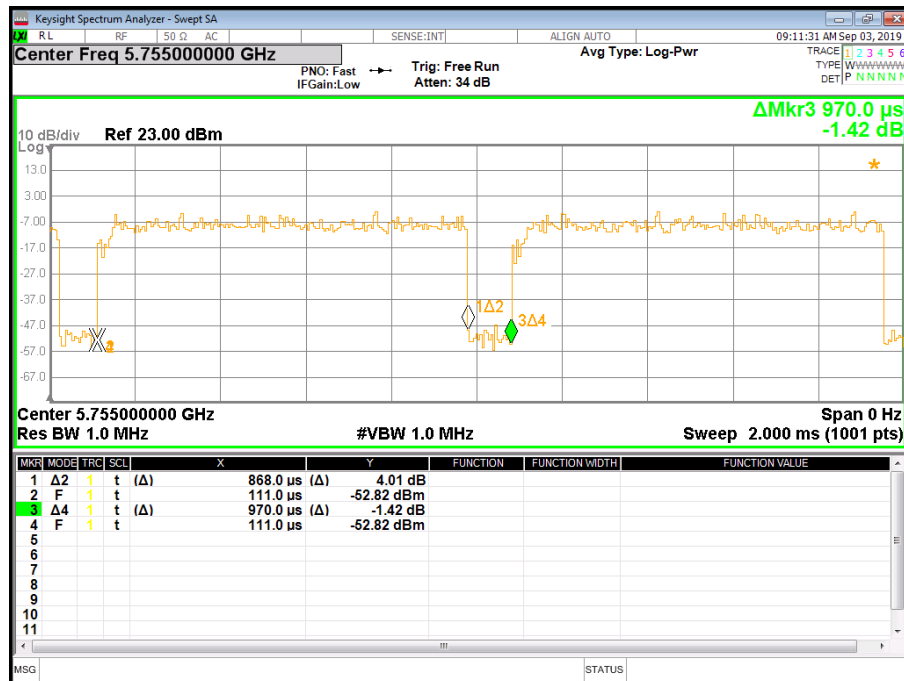

802.11ac VHT80

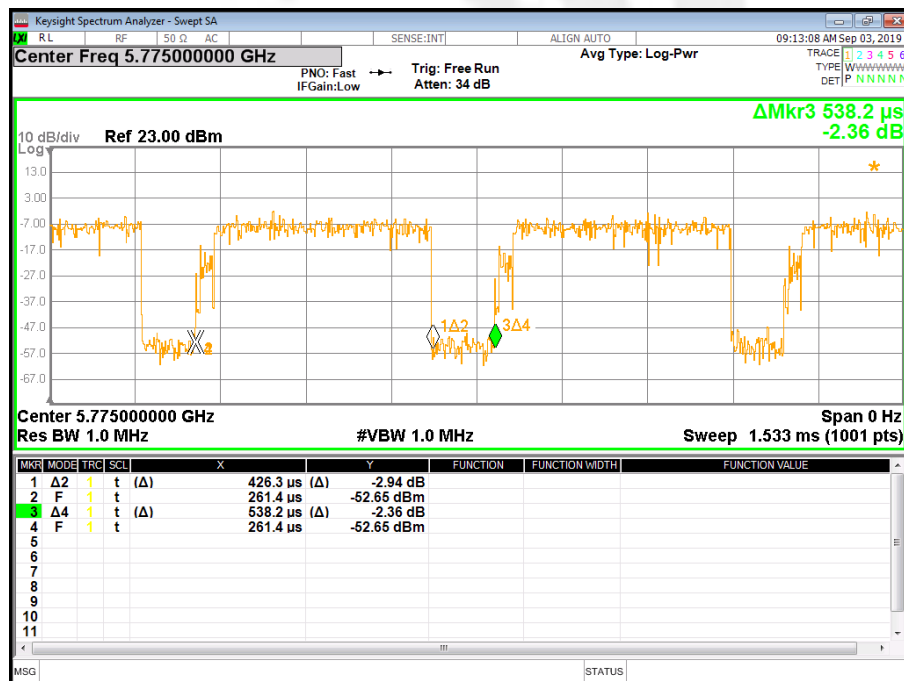



8. AUTOMATICALLY DISCONTINUE TRANSMISSION

8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission





9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.





APPENDIX - PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

