

## FCC Part 15.247

### TEST REPORT

For

### Syntronix Corporation

8F, No.6, Li-Hsin 6th RD., Hsinchu Taiwan

**FCC ID: 2AUBRB5JPC**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Module board
<b>Report Producer :</b> <u>Jane Chen</u>	
<b>Report Number :</b> <u>RXZ211103005RF01</u>	
<b>Report Date :</b> <u>2022-02-17</u>	
<b>Reviewed By:</b> <u>Andy Shih</u>	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2) 2647 6898 Fax: +886 (2) 2647 6895 <a href="http://www.bacl.com.tw">www.bacl.com.tw</a>	

## Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RXZ211103005	RXZ211103005RF01	2022-02-17	Original Report	Jane Chen

## **TABLE OF CONTENTS**

<b>1</b>	<b>General Information.....</b>	<b>5</b>
1.1	Product Description for Equipment under Test (EUT) .....	5
1.2	Objective .....	6
1.3	Related Submittal(s)/Grant(s).....	6
1.4	Test Methodology.....	6
1.5	Statement of Compliance .....	6
1.6	Measurement Uncertainty .....	7
1.7	Environmental Conditions.....	7
1.8	Test Facility.....	7
<b>2</b>	<b>System Test Configuration.....</b>	<b>8</b>
2.1	Description of Test Configuration.....	8
2.2	Equipment Modifications .....	8
2.3	EUT Exercise Software .....	8
2.4	Support Equipment List and Details.....	8
2.5	External Cable List and Details.....	8
2.6	Test Mode.....	9
2.7	Block Diagram of Test Setup .....	9
2.8	Duty Cycle.....	10
<b>3</b>	<b>Summary of Test Results.....</b>	<b>13</b>
<b>4</b>	<b>Test Equipment List and Details .....</b>	<b>14</b>
<b>5</b>	<b>FCC §15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE) .....</b>	<b>16</b>
5.1	Applicable Standard .....	16
5.2	RF Exposure Evaluation Result.....	16
<b>6</b>	<b>FCC §15.203 – Antenna Requirements.....</b>	<b>17</b>
6.1	Applicable Standard .....	17
6.2	Antenna Information .....	17
<b>7</b>	<b>FCC §15.207(a) – AC Line Conducted Emissions .....</b>	<b>18</b>
7.1	Applicable Standard .....	18
7.2	EUT Setup .....	18
7.3	EMI Test Receiver Setup .....	19
7.4	Test Procedure.....	19
7.5	Corrected Factor & Margin Calculation.....	19
7.6	Test Results .....	20
<b>8</b>	<b>FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions .....</b>	<b>22</b>
8.1	Applicable Standard.....	22
8.2	EUT Setup .....	23
8.3	EMI Test Receiver & Spectrum Analyzer Setup.....	24
8.4	Test Procedure.....	24
8.5	Corrected Factor & Margin Calculation .....	24
8.6	Test Results .....	25
<b>9</b>	<b>FCC §15.247(a)(2) – 6 dB Emission Bandwidth.....</b>	<b>43</b>
9.1	Applicable Standard.....	43
9.2	Test Procedure .....	43
9.3	Test Results .....	43

<b>10</b>	<b>FCC §15.247(b)(3) – Maximum Output Power.....</b>	<b>50</b>
10.1	Applicable Standard.....	50
10.2	Test Procedure.....	50
10.3	Test Results .....	50
<b>11</b>	<b>FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge .....</b>	<b>51</b>
11.1	Applicable Standard.....	51
11.2	Test Procedure.....	51
11.3	Test Results .....	52
<b>12</b>	<b>FCC §15.247(e) – Power Spectral Density .....</b>	<b>57</b>
12.1	Applicable Standard.....	57
12.2	Test Procedure.....	57
12.3	Test Results .....	58

# 1 General Information

## 1.1 Product Description for Equipment under Test (EUT)

Applicant	Syntronix Corporation 8F, No.6, Li-Hsin 6th RD., Hsinchu Taiwan
Manufacturer	Syntronix Corporation 8F, No.6, Li-Hsin 6th RD., Hsinchu Taiwan
Brand(Trade) Name	Syntronix Corporation
Product (Equipment)	BT 5.0 MESH Module
Main Model Name	SBF508M-08V
Frequency Range	2402 ~ 2480 MHz
Transmit Power	BLE(125kbps) Mode : 2.73 dBm BLE(500kbps) Mode : 2.76 dBm BLE(1Mbps) Mode : 2.81 dBm BLE(2Mbps) Mode : 2.82 dBm
Modulation Technique	GFSK
Transmit Data Rate	125kbps, 500kbps, 1Mbps, 2Mbps
Channel Separation	2 MHz
Power Operation (Voltage Range)	<input type="checkbox"/> AC 120V/60Hz <input type="checkbox"/> Adapter I/P <input type="checkbox"/> By AC Power Cord <input type="checkbox"/> PoE  <input checked="" type="checkbox"/> DC 3.3V <input type="checkbox"/> Battery <input type="checkbox"/> DC Power Supply <input type="checkbox"/> External from USB <input type="checkbox"/> External DC Adapter  <input type="checkbox"/> Host System
Received Date	Nov. 3, 2021
Date of Test	Dec. 16, 2021 ~ Feb. 16, 2022

\*All measurement and test data in this report was gathered from production sample serial number: RXZ211103005-01 (Assigned by BACL, New Taipei Laboratory).

## **1.2 Objective**

This report is prepared on behalf of *Syntronix Corporation* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

## **1.3 Related Submittal(s)/Grant(s)**

N/A.

## **1.4 Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

KDB 558074 D01 15.247 Meas Guidance v05r02

## **1.5 Statement of Compliance**

Decision Rule: No, (The test results do not include MU judgment)

It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory).

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

## 1.6 Measurement Uncertainty

Parameter	Uncertainty
AC Mains	+/- 2.36 dB
RF output power, conducted	+/- 0.93 dB
Power Spectral Density, conducted	+/- 0.93 dBm
Occupied Bandwidth	+/- 0.35 MHz
Unwanted Emissions, conducted	+/- 1.69 dBm
Emissions, radiated	30 MHz~1GHz
	1 GHz~18 GHz
	18 GHz~40 GHz
Temperature	+/- 1.27 °C
Humidity	+/- 3 %

## 1.7 Environmental Conditions

Test Site	Test Data	Temperature (°C)	Relative Humidity (%)	ATM Pressure (hPa)	Test Engineer
AC Line Conducted Emissions	2022/1/10	19.6	53	1010	David
Radiation Spurious Emissions	2022/1/5~2022/1/15	19.8~22.4	69~72	1010	Howard
Conducted Spurious Emissions	2021/12/16~2022/2/16	22.5~25	45~58	1010	Howard
6 dB Emission Bandwidth	2021/12/16~2022/2/16	22.5~25	45~58	1010	Howard
Maximum Output Power	2021/12/16~2022/2/16	22.5~25	45~58	1010	Howard
100 kHz Bandwidth of Frequency Band Edge	2021/12/16~2022/2/16	22.5~25	45~58	1010	Howard
Power Spectral Density	2021/12/16~2022/2/16	22.5~25	45~58	1010	Howard

## 1.8 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) to collect test data is located on

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp.(New Taipei Laboratory) is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3732) and the FCC designation No.TW3732 under the Mutual Recognition Agreement (MRA) in FCC Test.

## 2 System Test Configuration

### 2.1 Description of Test Configuration

For BLE mode, there are totally 40 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	--	--
2	2406	--	--
3	2408	37	2476
--	--	38	2478
19	2440	39	2480

For BLE Modes were tested with channel 0, 19 and 39.

The system was configured for testing in engineering mode, which was provided by manufacturer.

### 2.2 Equipment Modifications

No modification was made to the EUT.

### 2.3 EUT Exercise Software

The test software was used “BlueLitE\_1115R”

Test Frequency		Low	Mid	High
Power Level Setting	BLE 1Mbps	Default	Default	Default
	BLE 2Mbps	Default	Default	Default
	BLE 125kbps	Default	Default	Default
	BLE 500kbps	Default	Default	Default

### 2.4 Support Equipment List and Details

Description	Manufacturer	Model Number	S/N
NB	DELL	E6410	8N7PXX1

### 2.5 External Cable List and Details

Cable Description	Length (m)	From	To
Micro USB Cable	1	EUT	NB

## 2.6 Test Mode


Full System (model: SBF508M-08V) for all test item.

## 2.7 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

### Radiation:


Below 1GHz:

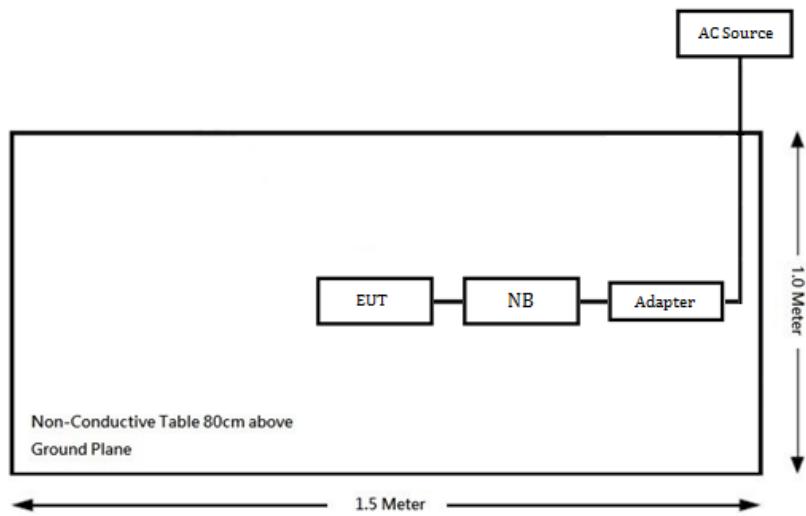

Above 1GHz:

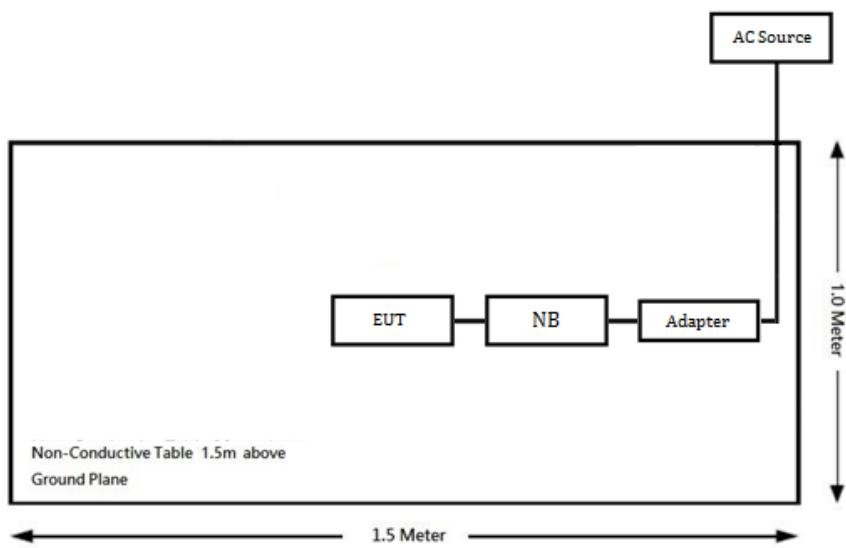

## Conduction:

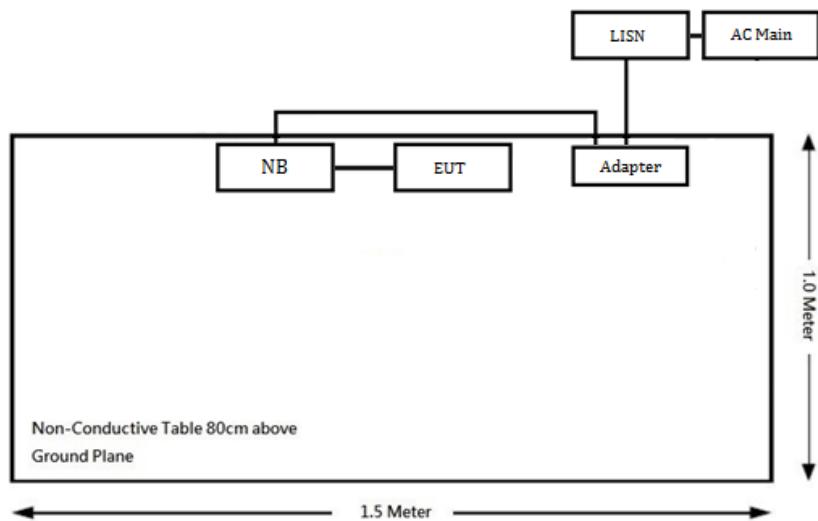


## 2.8 Duty Cycle

The duty cycle as below:


Radio Mode	T <sub>on</sub> (ms)	T <sub>on+Toff</sub> (ms)	Duty Cycle (%)
BLE(125k)	3.145	3.725	84
BLE(500k)	1.13	1.884	60
BLE(1M)	0.145	0.623	23
BLE(2M)	0.12	0.63	19

Please refer to the following plots.


## BLE(125k) Mode

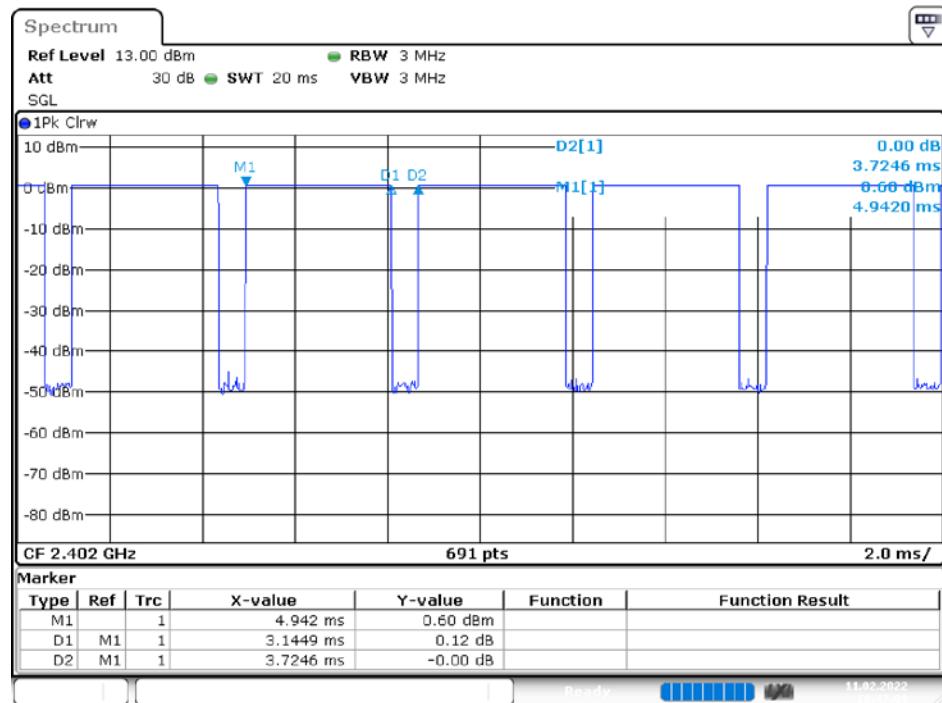

## BLE(500k) Mode

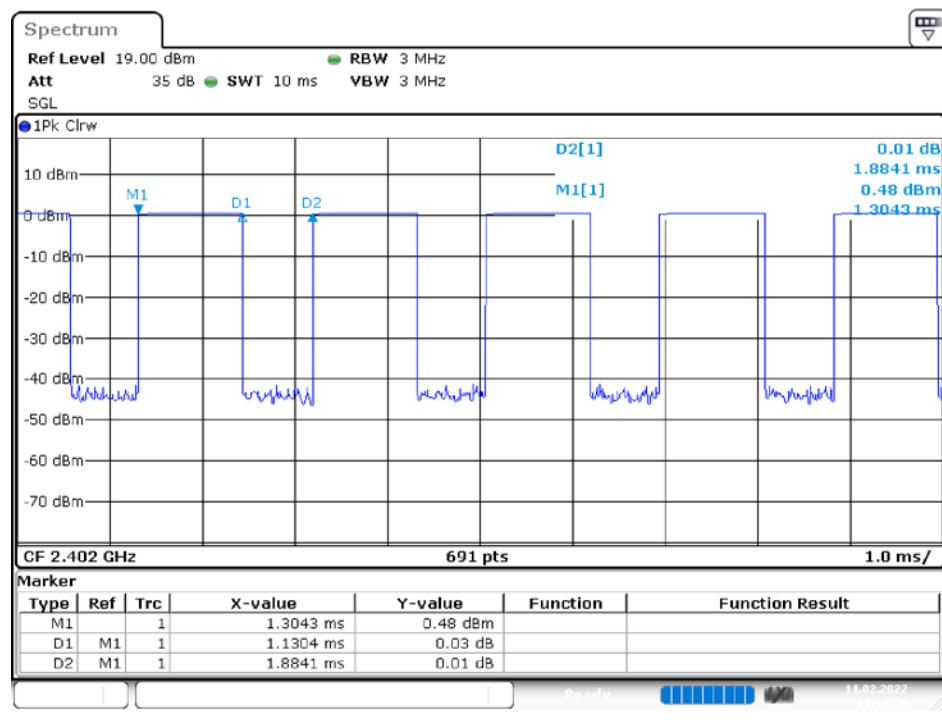


## BLE(1M) Mode

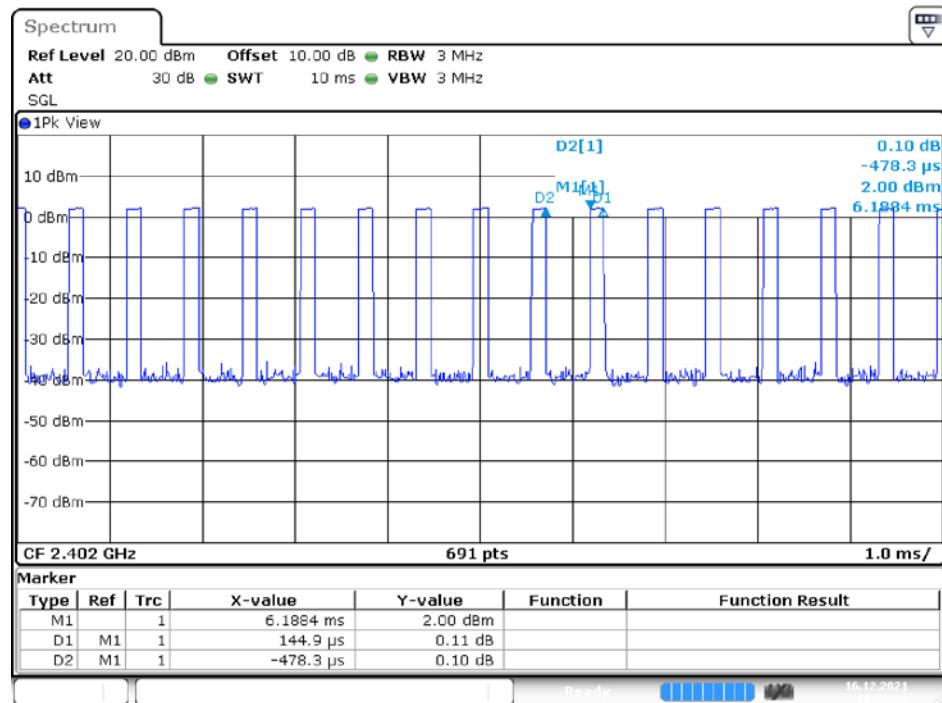

Date: 16.DEC.2021 18:39:52

## BLE(2M) Mode

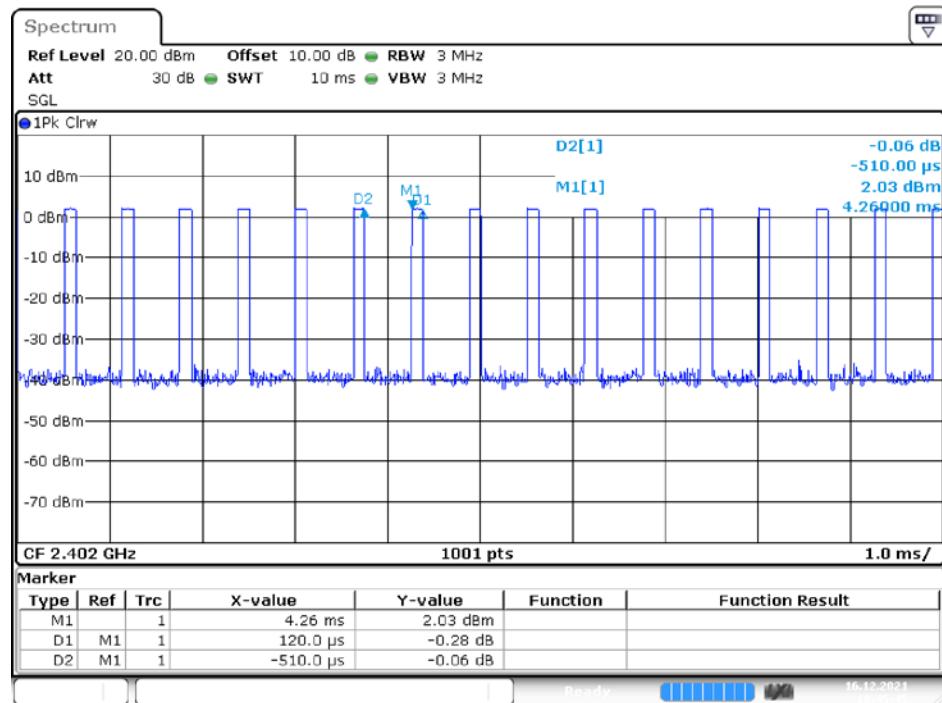

Date: 16.DEC.2021 18:45:45

### 3 Summary of Test Results

FCC Rules	Description of Test	Results
§15.247(i), §1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

## 4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
LISN	Rohde & Schwarz	ENV216	101248	2021/06/08	2022/06/07
EMI Test Receiver	Rohde & Schwarz	ESW8	100947	2021/7/23	2022/7/22
Pulse Limiter	Rohde & Schwarz	ESH3Z2	TXZEM104	2021/7/29	2022/7/28
RF Cable	EMEC	EM-CB5D	1	2021/6/11	2022/6/10
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R
Radiated Room (966-A)					
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/1554 2_01	2021/1/19	2022/1/18
Horn Antenna	EMCO	SAS-571	1020	2021/4/23	2022/4/22
Horn Antenna	ETS-Lindgren	3116	62638	2021/8/11	2022/8/10
Preamplifier	Sonoma	310N	130602	2021/6/8	2022/6/7
Microware Preamplifier	EM Electronics Corporation	EM18G40G	60656	2021/12/27	2022/12/26
Preamplifier	A.H. system Inc.	PAM-0118P	470	2021/3/15	2022/3/14
Spectrum Analyzer	Rohde & Schwarz	FSV40	101204	2021/06/10	2022/06/09
EMI Test Receiver	Rohde & Schwarz	ESR3	102099	2021/6/9	2022/6/8
Micro flex Cable	UTIFLEX	UFB197C-1-2362-70U-70U	225757-001	2021/2/1	2022/1/31
Coaxial Cable	COMMATE	PEWC	8Dr	2021/12/19	2022/12/18
Coaxial Cable	UTIFLEX	UFB311A-Q-1440-300300	220490-006	2021/2/1	2022/1/31
Coaxial Cable	JUNFLON	J12J102248-00-B-5	AUG-07-15-044	2021/12/19	2022/12/18
Cable	EMC	EMC105-SM-SM-10000	201003	2021/2/3	2022/2/2
Coaxial Cable	ROSNOL	K1K50-UP0264-K1K50-450CM	160309-1	2021/2/1	2022/1/31

Coaxial Cable	ROSNOL	K1K50-UP0264- K1K50-50CM	15120-1	2021/1/28	2022/1/27
Attenuator	MCL	BW-S10W5+	605	2021/6/23	2022/6/22
Band-rejection filter	Micro Tronics	BRM50702	50702-011	2021/2/2	2022/2/1
Software	Farad	EZ_EMC	BACL-03A1	N.C.R	N.C.R
Conducted Room					
Spectrum Analyzer	Rohde & Schwarz	FSV40	101240	2021/6/10	2022/6/9
Cable	UTIFLEX	UFA210A	9435	2021/10/5	2022/10/4
Power Sensor	KEYSIGHT	U2021XA	MY54080018	2021/1/28	2022/1/27
				2021/1/24	2023/1/23
Attenuator	MCL	BW-S10W5+	605	2021/6/23	2022/6/22
Attenuator	MCL	BW-S20W5+	1430	2021/6/23	2022/6/22

**\*Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements.

## 5 FCC §15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE)

### 5.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

#### Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

#### Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR<sup>2</sup> = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### 5.2 RF Exposure Evaluation Result

#### MPE evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(mW)			
BLE 1M	2402-2480	0.00	1.00	3	1.995	20	0.0004	1
BLE 2M	2402-2480	0.00	1.00	3	1.995	20	0.0004	1
BLE 125k	2402-2480	0.00	1.00	3	1.995	20	0.0004	1
BLE 500k	2402-2480	0.00	1.00	3	1.995	20	0.0004	1

**Result:** The EUT meets exemption requirement- RF exposure evaluation greater than **20cm** distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by § 2.1093.

## 6 FCC §15.203 – Antenna Requirements

### 6.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi.

### 6.2 Antenna Information

Manufacturer	Model	Type	Antenna Gain
Syntronix	IFMA	PCB Antenna	0 dBi

### Result: Compliance

## 7 FCC §15.207(a) – AC Line Conducted Emissions

### 7.1 Applicable Standard


According to §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

### 7.2 EUT Setup

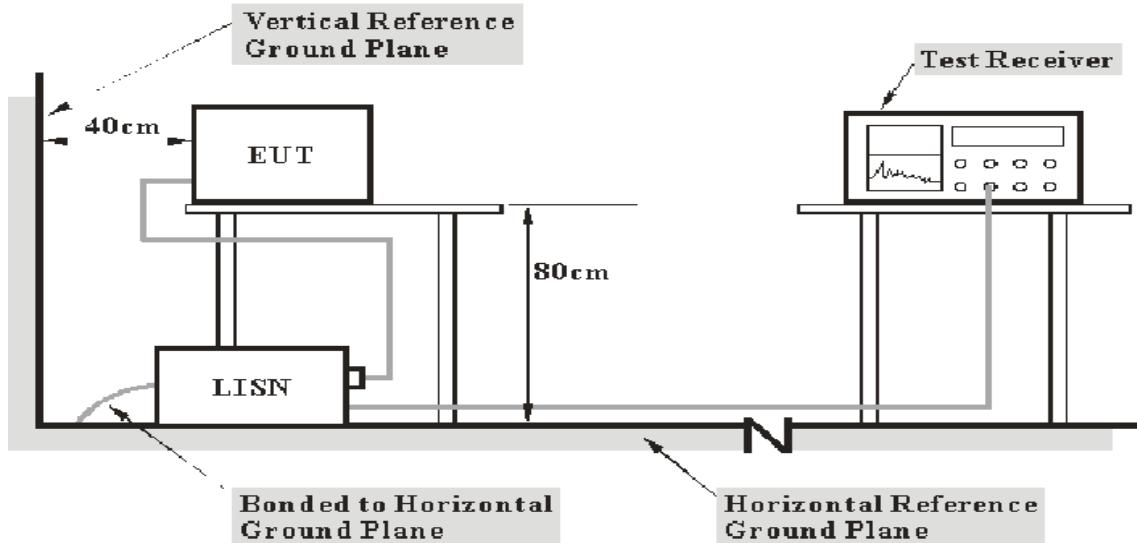

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

### 7.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150kHz – 30MHz	9kHz

### 7.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### 7.5 Corrected Factor & Margin Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:


$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

## 7.6 Test Results

Test Mode: Transmitting

(Worst case is BLE(2M) mode, Low Channel)

**Main: AC120 V, 60 Hz, Line**

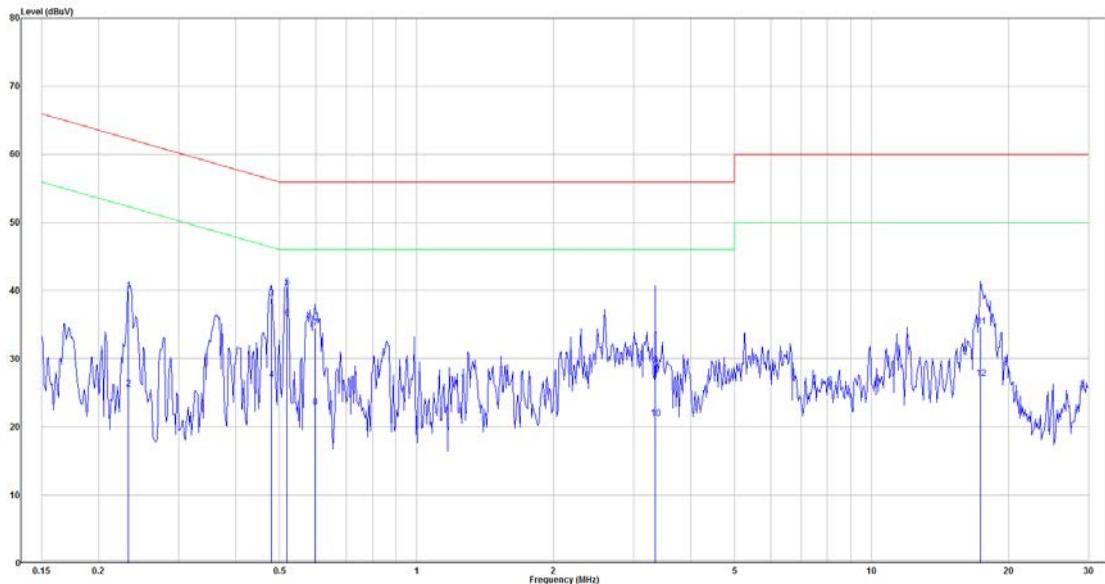


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Over limit (dB)	Remark
1	0.233	20.38	19.57	39.95	62.35	-22.40	QP
2	0.233	5.99	19.57	25.56	52.35	-26.79	Average
3	0.479	19.32	19.58	38.90	56.36	-17.46	QP
4	0.479	7.34	19.58	26.92	46.36	-19.44	Average
5	0.518	20.95	19.58	40.53	56.00	-15.47	QP
6	0.518	16.36	19.58	35.94	46.00	-10.06	Average
7	0.598	14.92	19.59	34.51	56.00	-21.49	QP
8	0.598	3.23	19.59	22.82	46.00	-23.18	Average
9	3.346	9.41	19.67	29.08	56.00	-26.92	QP
10	3.346	1.60	19.67	21.27	46.00	-24.73	Average
11	17.383	14.79	19.90	34.69	60.00	-25.31	QP
12	17.383	7.16	19.90	27.06	50.00	-22.94	Average

Note:

Level = Read Level + Factor

Over Limit = Level - Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

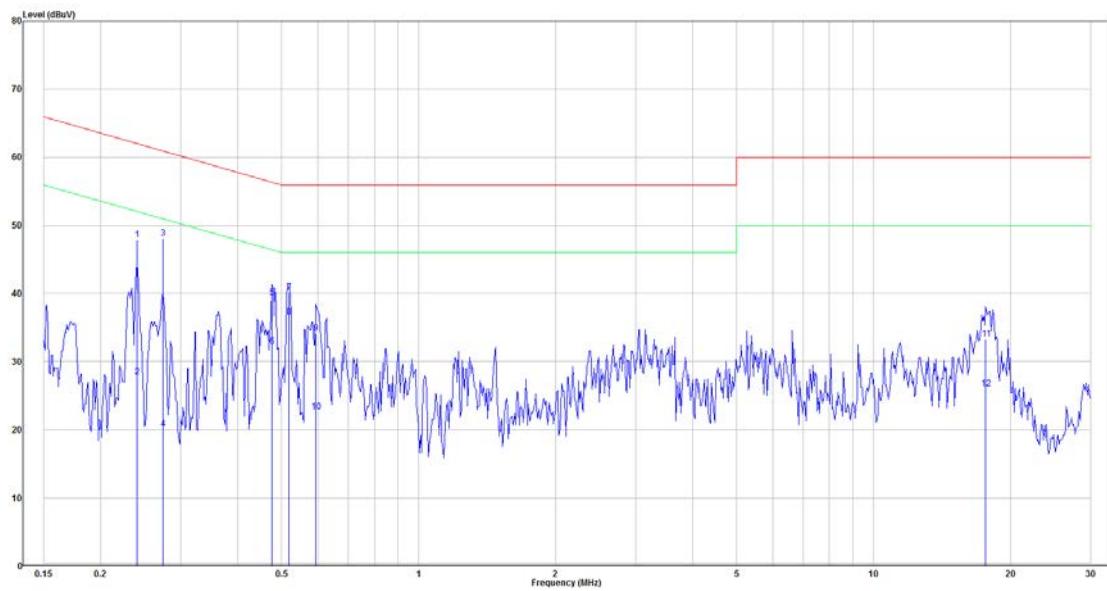**Main: AC120 V, 60 Hz, Neutral**

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Over limit (dB)	Remark
1	0.240	28.37	19.57	47.94	62.08	-14.14	QP
2	0.240	8.13	19.57	27.70	52.08	-24.38	Average
3	0.274	28.51	19.57	48.08	60.98	-12.90	QP
4	0.274	0.59	19.57	20.16	50.98	-30.82	Average
5	0.476	19.77	19.58	39.35	56.41	-17.06	QP
6	0.476	12.63	19.58	32.21	46.41	-14.20	Average
7	0.518	20.57	19.58	40.15	56.00	-15.85	QP
8	0.518	16.98	19.58	36.56	46.00	-9.44	Average
9	0.595	14.64	19.59	34.23	56.00	-21.77	QP
10	0.595	3.07	19.59	22.66	46.00	-23.34	Average
11	17.661	13.44	19.91	33.35	60.00	-26.65	QP
12	17.661	6.06	19.91	25.97	50.00	-24.03	Average

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

## 8 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

### 8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	608 – 614	4. 5 – 5. 15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5. 35 – 5. 46
2.1735 – 2.1905	16.80425 – 16.80475	1300 – 1427	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1660 – 1710	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2310 – 2390	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3 3458 – 3 358	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4		Above 38.6
13.36 – 13.41	399.9 – 410		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## 8.2 EUT Setup

Below 1 GHz:

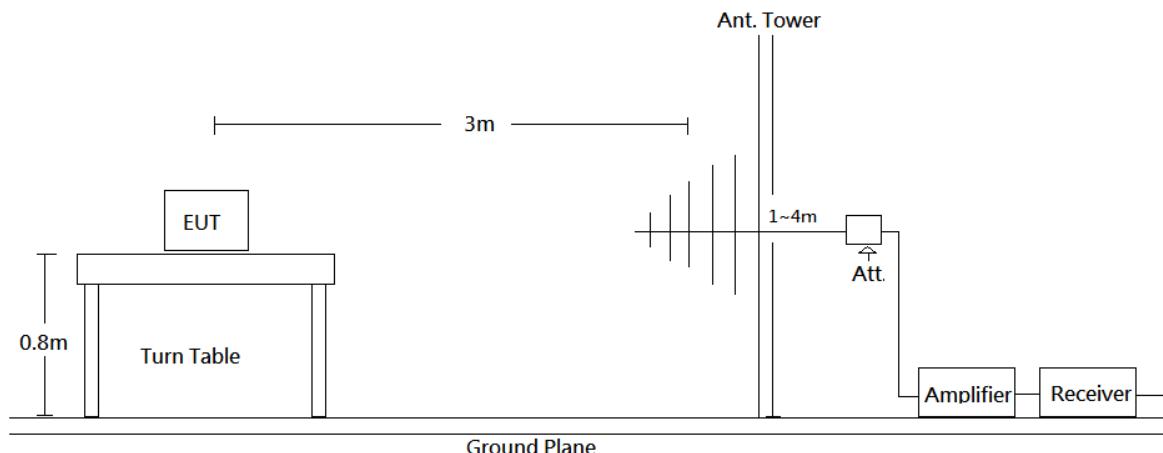

Above 1 GHz:

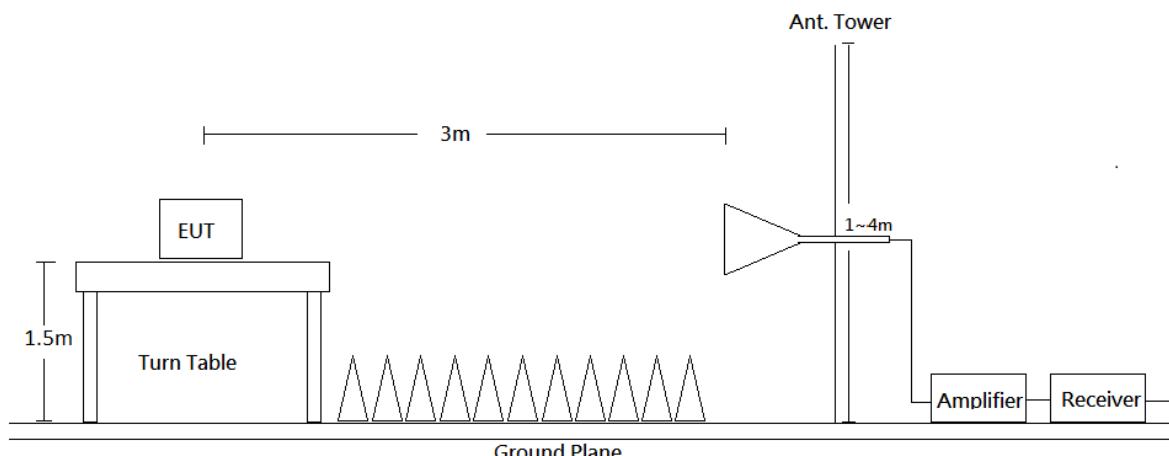

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

### 8.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/		QP
	1 MHz	3 MHz		PK
	1 MHz	3 MHz	>98%	Ave
	1 MHz	1/Ton	<98%	Ave

### 8.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

### 8.5 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Result} - \text{Limit}$$

## 8.6 Test Results


Test Mode: Transmitting (Pre-scan with three orthogonal axis, and worse case as Z axis.)

**Horizontal** (worst case is BLE 2M mode low channel)


30MHz-1GHz:

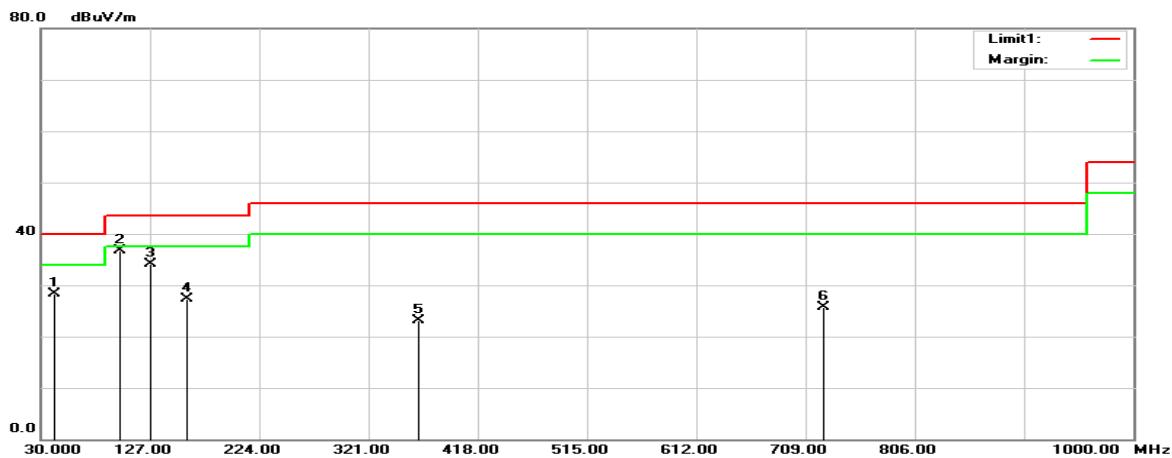

1GHz-18GHz:

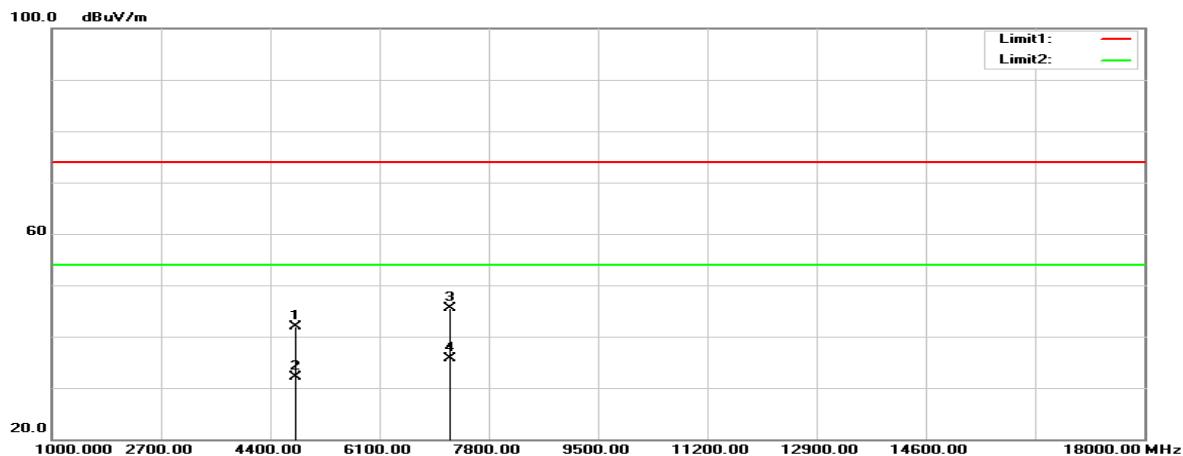


18GHz-26.5GHz:

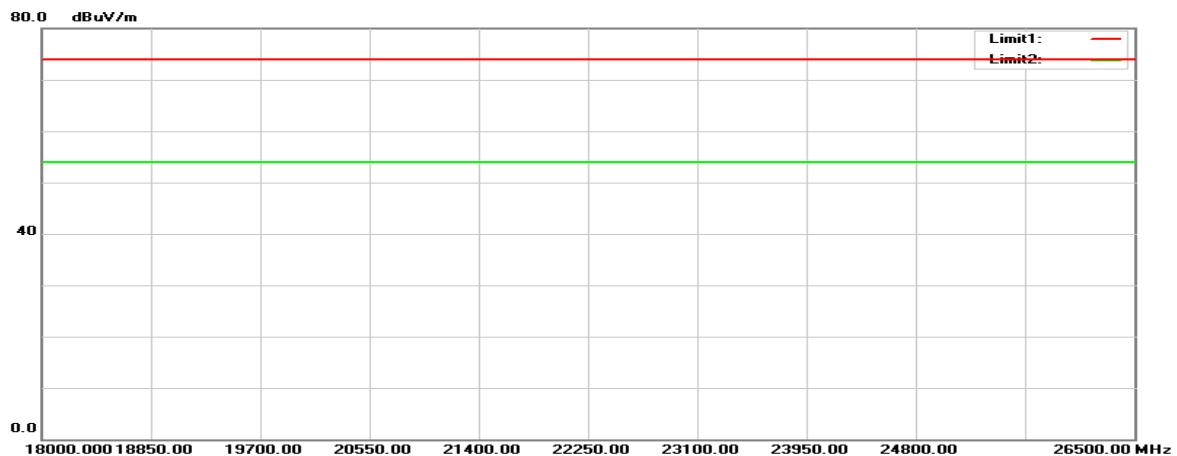


**Vertical** (worst case is BLE 2M mode low channel)


30MHz-1GHz:

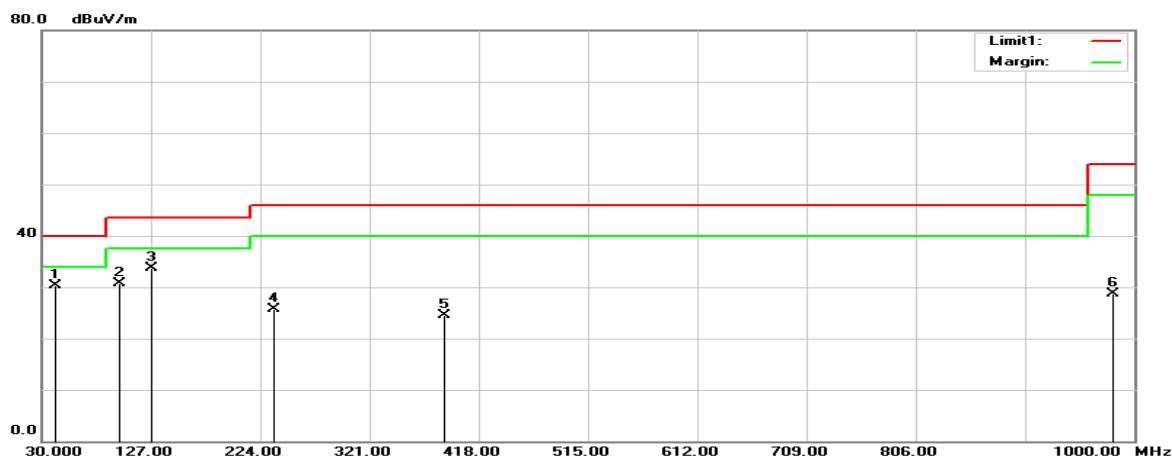

1GHz-18GHz:

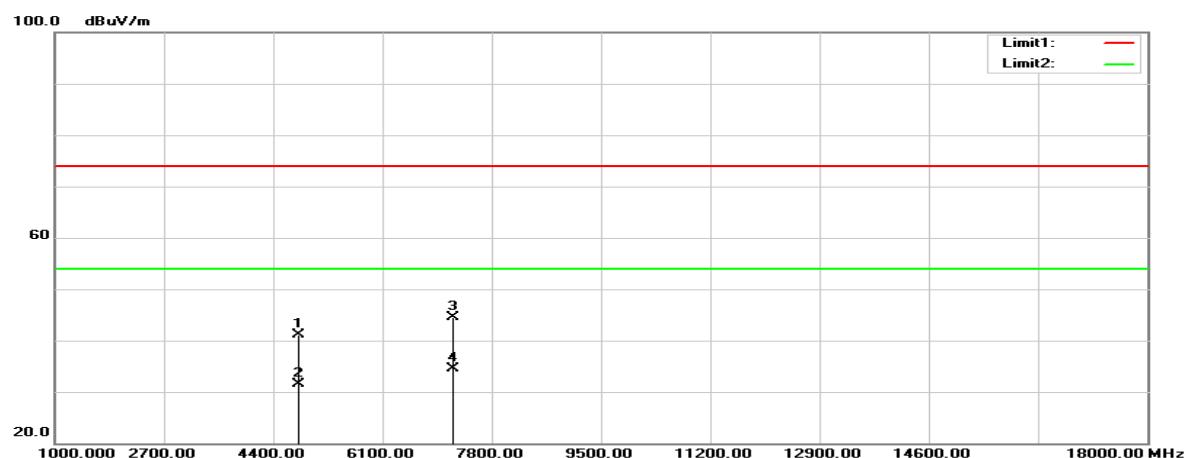

18GHz-26.5GHz:

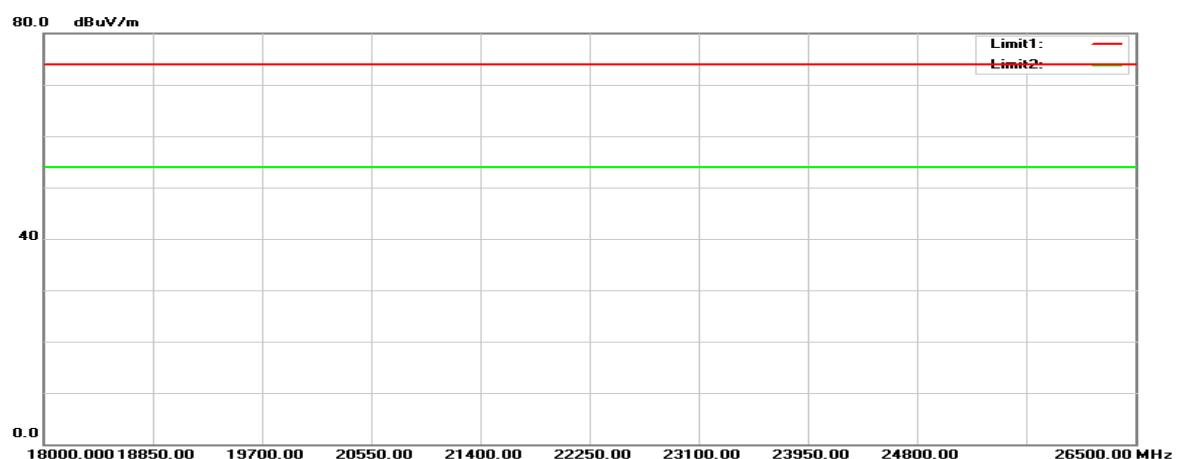

**Below 1GHz****Horizontal**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
42.6100	40.41	-12.07	28.34	40.00	-11.66	100	238	peak
99.8400	50.69	-14.06	36.63	43.50	-6.87	100	145	peak
127.9700	44.42	-10.23	34.19	43.50	-9.31	100	58	peak
159.9800	38.53	-11.14	27.39	43.50	-16.11	100	96	peak
365.6200	31.96	-8.76	23.20	46.00	-22.80	100	133	peak
724.5200	28.16	-2.42	25.74	46.00	-20.26	100	147	peak

**Vertical**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
41.6400	41.83	-11.45	30.38	40.00	-9.62	100	48	peak
98.8700	45.36	-14.59	30.77	43.50	-12.73	100	138	peak
127.9700	43.90	-10.23	33.67	43.50	-9.83	100	225	peak
235.6400	38.12	-12.41	25.71	46.00	-20.29	100	198	peak
386.9600	32.71	-8.19	24.52	46.00	-21.48	100	85	peak
980.6000	25.83	2.85	28.68	54.00	-25.32	100	96	peak

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

**Above 1GHz****BLE(125k) Mode****Horizontal**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2350.200	56.85	-9.79	47.06	74.00	-26.94	148	176	peak
2350.200	45.20	-9.79	35.41	54.00	-18.59	148	176	AVG
4804.000	48.13	-2.17	45.96	74.00	-28.04	161	233	peak
4804.000	38.44	-2.17	36.27	54.00	-17.73	161	233	AVG
7206.000	43.23	4.18	47.41	74.00	-26.59	158	124	peak
7206.000	33.56	4.18	37.74	54.00	-16.26	158	124	AVG
Middle channel								
4880.000	42.45	-1.88	40.57	74.00	-33.43	165	258	peak
4880.000	32.55	-1.88	30.67	54.00	-23.33	165	258	AVG
7320.000	43.59	5.10	48.69	74.00	-25.31	144	312	peak
7320.000	33.64	5.10	38.74	54.00	-15.26	144	312	AVG
High channel								
2486.380	57.30	-8.40	48.90	74.00	-25.10	123	178	peak
2486.380	42.86	-8.40	34.46	54.00	-19.54	123	178	AVG
4960.000	42.50	-1.49	41.01	74.00	-32.99	155	133	peak
4960.000	32.45	-1.49	30.96	54.00	-23.04	155	133	AVG
7440.000	41.43	5.23	46.66	74.00	-27.34	161	238	peak
7440.000	31.66	5.23	36.89	54.00	-17.11	161	238	AVG

Result = Reading + Correct Factor

Margin = Result - Limit

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

**Vertical**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2333.200	57.06	-9.80	47.26	74.00	-26.74	197	207	peak
2333.200	42.99	-9.80	33.19	54.00	-20.81	197	207	AVG
4804.000	45.76	-2.17	43.59	74.00	-30.41	161	233	peak
4804.000	35.57	-2.17	33.40	54.00	-20.60	161	233	AVG
7206.000	42.40	4.18	46.58	74.00	-27.42	157	147	peak
7206.000	32.61	4.18	36.79	54.00	-17.21	157	147	AVG
Middle channel								
4880.000	43.42	-1.88	41.54	74.00	-32.46	152	242	peak
4880.000	33.56	-1.88	31.68	54.00	-22.32	152	242	AVG
7320.000	41.72	5.10	46.82	74.00	-27.18	163	311	peak
7320.000	31.71	5.10	36.81	54.00	-17.19	163	311	AVG
High channel								
2486.290	56.16	-8.40	47.76	74.00	-26.24	216	204	peak
2486.290	42.49	-8.40	34.09	54.00	-19.91	216	204	AVG
4960.000	42.27	-1.49	40.78	74.00	-33.22	152	133	peak
4960.000	32.46	-1.49	30.97	54.00	-23.03	152	133	AVG
7440.000	41.47	5.23	46.70	74.00	-27.30	168	258	peak
7440.000	31.33	5.23	36.56	54.00	-17.44	168	258	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

**BLE(500k) Mode****Horizontal**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2312.600	56.30	-9.80	46.50	74.00	-27.50	125	180	peak
2312.600	44.39	-9.80	34.59	54.00	-19.41	125	180	AVG
4804.000	42.99	-2.17	40.82	74.00	-33.18	145	278	peak
4804.000	32.85	-2.17	30.68	54.00	-23.32	145	278	AVG
7206.000	41.41	4.18	45.59	74.00	-28.41	162	189	peak
7206.000	31.46	4.18	35.64	54.00	-18.36	162	189	AVG
Middle channel								
4880.000	42.11	-1.88	40.23	74.00	-33.77	165	143	peak
4880.000	32.54	-1.88	30.66	54.00	-23.34	165	143	AVG
7320.000	42.35	5.10	47.45	74.00	-26.55	152	169	peak
7320.000	32.66	5.10	37.76	54.00	-16.24	152	169	AVG
High channel								
2484.760	57.51	-8.43	49.08	74.00	-24.92	138	181	peak
2484.760	42.84	-8.43	34.41	54.00	-19.59	138	181	AVG
4960.000	41.91	-1.49	40.42	74.00	-33.58	152	89	peak
4960.000	31.85	-1.49	30.36	54.00	-23.64	152	89	AVG
7440.000	41.37	5.23	46.60	74.00	-27.40	161	218	peak
7440.000	31.55	5.23	36.78	54.00	-17.22	161	218	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

**Vertical**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2333.300	56.96	-9.80	47.16	74.00	-26.84	196	207	peak
2333.300	42.70	-9.80	32.90	54.00	-21.10	196	207	AVG
4804.000	44.43	-2.17	42.26	74.00	-31.74	161	143	peak
4804.000	34.54	-2.17	32.37	54.00	-21.63	161	143	AVG
7206.000	40.68	4.18	44.86	74.00	-29.14	155	249	peak
7206.000	30.25	4.18	34.43	54.00	-19.57	155	249	AVG
Middle channel								
4880.000	43.36	-1.88	41.48	74.00	-32.52	145	247	peak
4880.000	33.57	-1.88	31.69	54.00	-22.31	145	247	AVG
7320.000	40.80	5.10	45.90	74.00	-28.10	162	322	peak
7320.000	30.69	5.10	35.79	54.00	-18.21	162	322	AVG
High channel								
2485.060	56.35	-8.43	47.92	74.00	-26.08	217	204	peak
2485.060	42.41	-8.43	33.98	54.00	-20.02	217	204	AVG
4960.000	43.61	-1.49	42.12	74.00	-31.88	154	218	peak
4960.000	33.54	-1.49	32.05	54.00	-21.95	154	218	AVG
7440.000	42.37	5.23	47.60	74.00	-26.40	162	133	peak
7440.000	32.68	5.23	37.91	54.00	-16.09	162	133	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

**BLE(1M) Mode****Horizontal**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2372.000	56.59	-9.60	46.99	74.00	-27.01	142	173	peak
2372.000	43.75	-9.60	34.15	54.00	-19.85	142	173	AVG
4804.000	44.51	-2.17	42.34	74.00	-31.66	154	215	peak
4804.000	34.28	-2.17	32.11	54.00	-21.89	154	215	AVG
7206.000	40.86	4.18	45.04	74.00	-28.96	168	133	peak
7206.000	30.66	4.18	34.84	54.00	-19.16	168	133	AVG
Middle channel								
4880.000	43.95	-1.88	42.07	74.00	-31.93	156	180	peak
4880.000	33.85	-1.88	31.97	54.00	-22.03	156	180	AVG
7320.000	42.13	5.10	47.23	74.00	-26.77	163	225	peak
7320.000	32.61	5.10	37.71	54.00	-16.29	163	225	AVG
High channel								
2483.500	54.10	-8.45	45.65	74.00	-28.35	173	173	peak
2483.500	43.64	-8.45	35.19	54.00	-18.81	173	173	AVG
4960.000	43.37	-1.49	41.88	74.00	-32.12	166	258	peak
4960.000	33.47	-1.49	31.98	54.00	-22.02	166	258	AVG
7440.000	40.45	5.23	45.68	74.00	-28.32	173	145	peak
7440.000	30.35	5.23	35.58	54.00	-18.42	173	145	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

**Vertical**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2362.400	57.67	-9.68	47.99	74.00	-26.01	142	96	peak
2362.400	45.24	-9.68	35.56	54.00	-18.44	142	96	AVG
4804.000	44.79	-2.17	42.62	74.00	-31.38	100	178	peak
4804.000	33.89	-2.17	31.72	54.00	-22.28	100	178	AVG
7206.000	40.38	4.18	44.56	74.00	-29.44	100	255	peak
7206.000	30.28	4.18	34.46	54.00	-19.54	100	255	AVG
Middle channel								
4880.000	44.20	-1.88	42.32	74.00	-31.68	144	223	peak
4880.000	33.89	-1.88	32.01	54.00	-21.99	144	223	AVG
7320.000	40.70	5.10	45.80	74.00	-28.20	165	248	peak
7320.000	30.23	5.10	35.33	54.00	-18.67	165	248	AVG
High channel								
2483.500	54.88	-8.45	46.43	74.00	-27.57	106	99	peak
2483.500	44.07	-8.45	35.62	54.00	-18.38	106	99	AVG
4960.000	43.73	-1.49	42.24	74.00	-31.76	145	258	peak
4960.000	32.58	-1.49	31.09	54.00	-22.91	145	258	AVG
7440.000	40.85	5.23	46.08	74.00	-27.92	134	125	peak
7440.000	30.61	5.23	35.84	54.00	-18.16	134	125	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

**BLE(2M) Mode****Horizontal**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2353.700	57.08	-9.76	47.32	74.00	-26.68	142	171	peak
2353.700	44.07	-9.76	34.31	54.00	-19.69	142	171	AVG
4804.000	44.11	-2.17	41.94	74.00	-32.06	133	256	peak
4804.000	34.28	-2.17	32.11	54.00	-21.89	133	256	AVG
7206.000	41.25	4.18	45.43	74.00	-28.57	148	138	peak
7206.000	31.45	4.18	35.63	54.00	-18.37	148	138	AVG
Middle channel								
4880.000	42.71	-1.88	40.83	74.00	-33.17	147	138	peak
4880.000	32.68	-1.88	30.80	54.00	-23.20	147	138	AVG
7320.000	41.18	5.10	46.28	74.00	-27.72	153	238	peak
7320.000	31.45	5.10	36.55	54.00	-17.45	153	238	AVG
High channel								
2483.500	55.37	-8.45	46.92	74.00	-27.08	135	175	peak
2483.500	44.29	-8.45	35.84	54.00	-18.16	135	175	AVG
4960.000	42.90	-1.49	41.41	74.00	-32.59	153	251	peak
4960.000	31.89	-1.49	30.40	54.00	-23.60	153	251	AVG
7440.000	41.22	5.23	46.45	74.00	-27.55	144	169	peak
7440.000	30.56	5.23	35.79	54.00	-18.21	144	169	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

**Vertical**

Frequency (MHz)	Reading (dB $\mu$ V)	Correct Factor(dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
Low channel								
2370.500	56.60	-9.62	46.98	74.00	-27.02	107	123	peak
2370.500	44.93	-9.62	35.31	54.00	-18.69	107	123	AVG
4804.000	43.30	-2.17	41.13	74.00	-32.87	156	228	peak
4804.000	33.67	-2.17	31.50	54.00	-22.50	156	228	AVG
7206.000	40.40	4.18	44.58	74.00	-29.42	144	251	peak
7206.000	30.28	4.18	34.46	54.00	-19.54	144	251	AVG
Middle channel								
4880.000	44.02	-1.88	42.14	74.00	-31.86	145	134	peak
4880.000	34.22	-1.88	32.34	54.00	-21.66	145	134	AVG
7320.000	40.56	5.10	45.66	74.00	-28.34	166	258	peak
7320.000	30.66	5.10	35.76	54.00	-18.24	166	258	AVG
High channel								
2483.500	58.07	-8.45	49.62	74.00	-24.38	105	128	peak
2483.500	46.88	-8.45	38.43	54.00	-15.57	105	128	AVG
4960.000	42.12	-1.49	40.63	74.00	-33.37	145	324	peak
4960.000	32.55	-1.49	31.06	54.00	-22.94	145	324	AVG
7440.000	40.85	5.23	46.08	74.00	-27.92	133	258	peak
7440.000	30.68	5.23	35.91	54.00	-18.09	133	258	AVG

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.


**Conducted Spurious Emissions:**

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE(125k) Mode				
Low	2402	34.19	≥ 20	PASS
Middle	2440	33.52	≥ 20	PASS
High	2480	31.31	≥ 20	PASS
BLE(500k) Mode				
Low	2402	31.49	≥ 20	PASS
Middle	2440	32.70	≥ 20	PASS
High	2480	31.24	≥ 20	PASS
BLE(1M) Mode				
Low	2402	39.43	≥ 20	PASS
Middle	2440	37.19	≥ 20	PASS
High	2480	37.38	≥ 20	PASS
BLE(2M) Mode				
Low	2402	42.90	≥ 20	PASS
Middle	2440	39.85	≥ 20	PASS
High	2480	31.22	≥ 20	PASS


Please refer to the following plots

## BLE(125k) Mode


## Low Channel

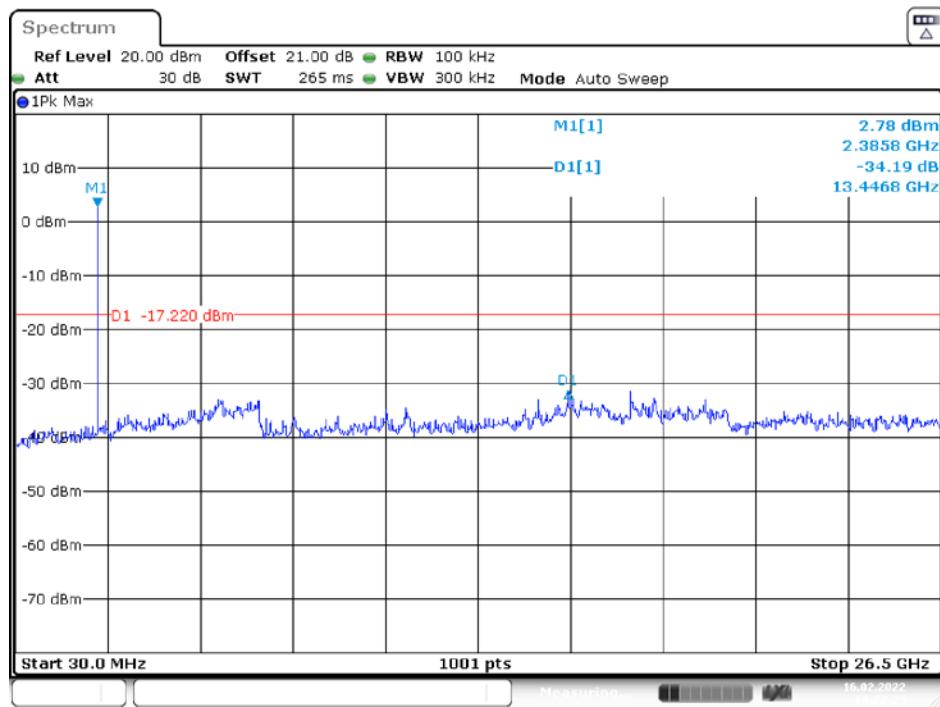

## Middle Channel

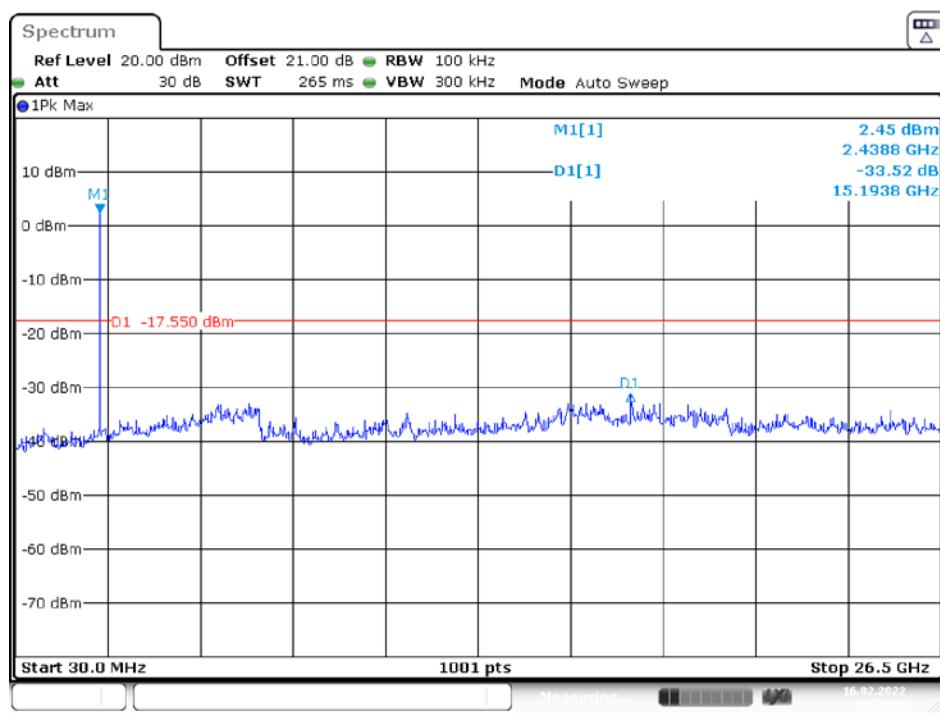




## High Channel

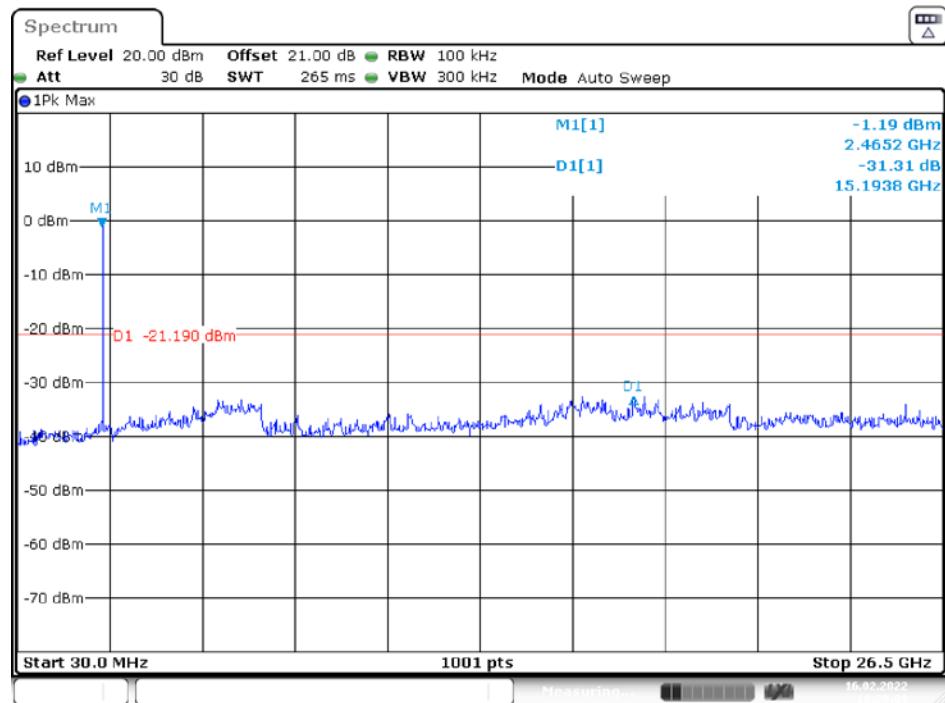

## BLE(500k) Mode


### Low Channel

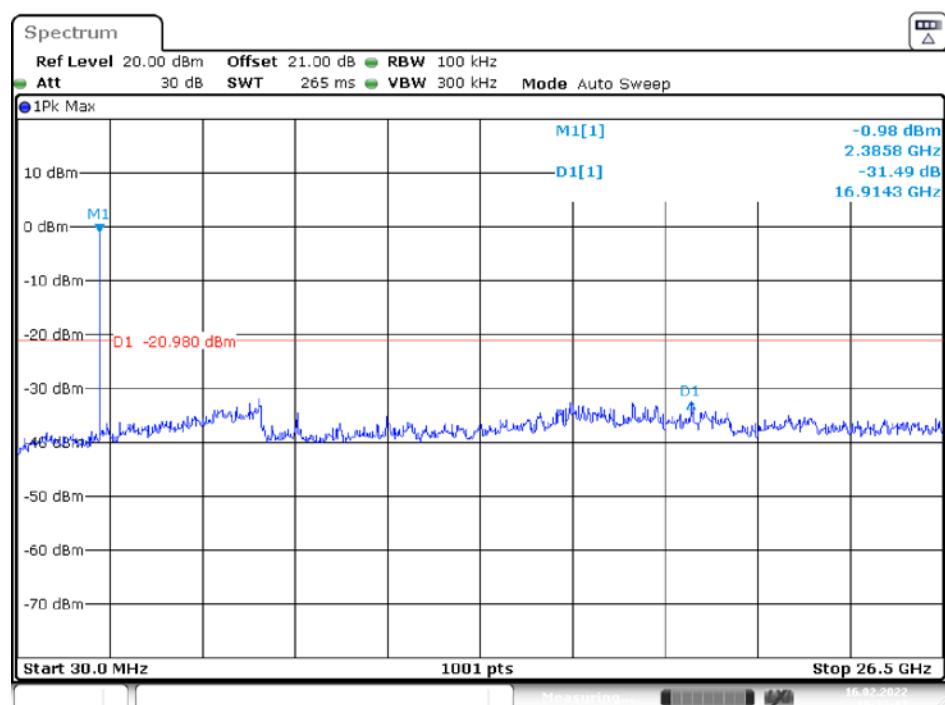

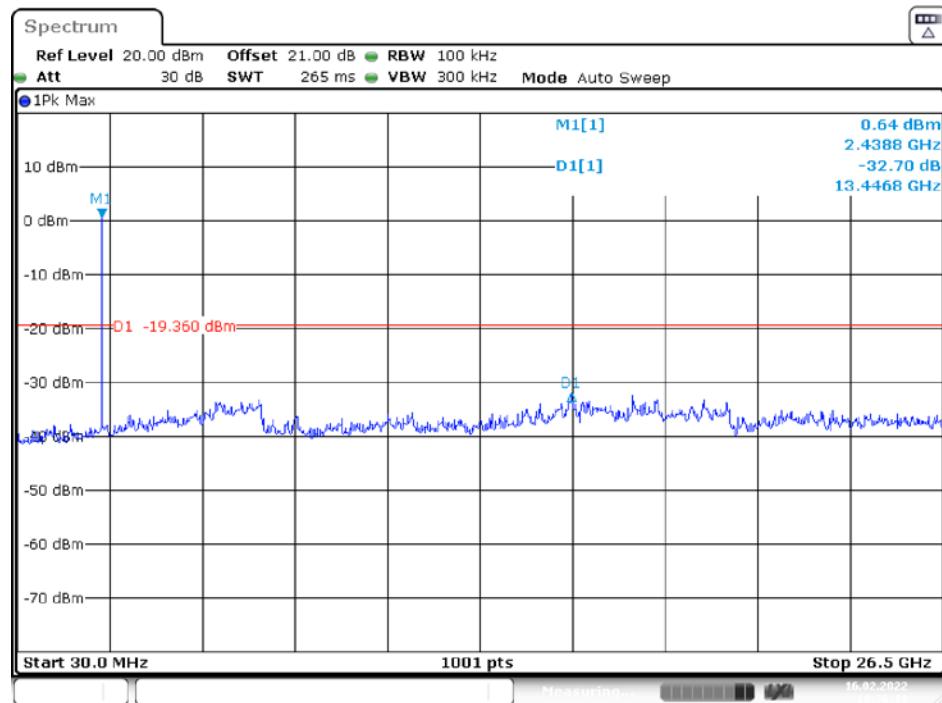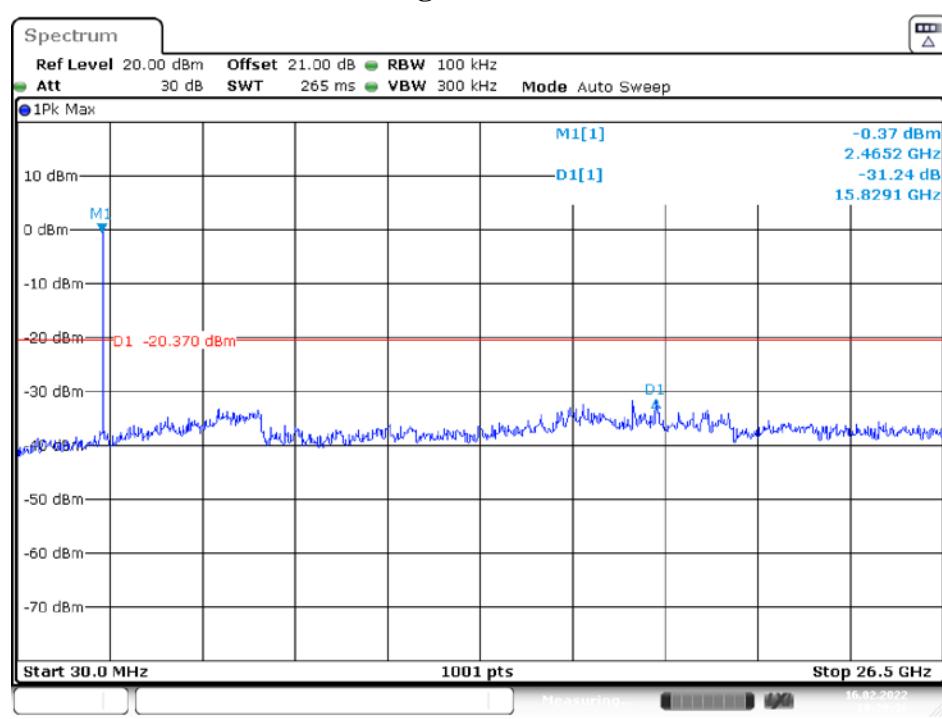**Middle Channel****High Channel**


## BLE(1M) Mode

### Low Channel

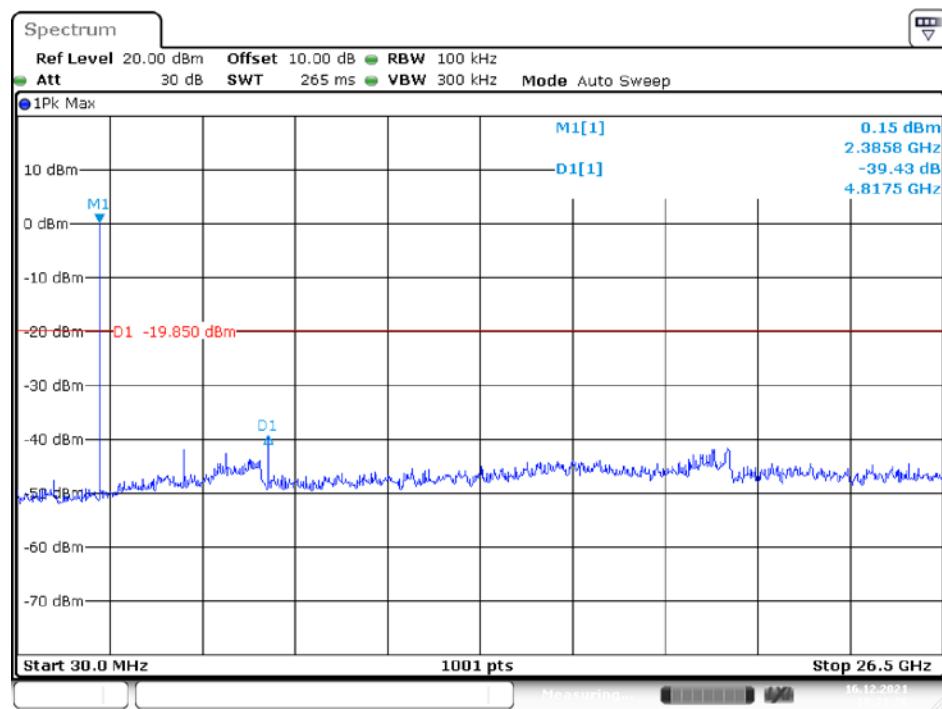


Date: 16.DEC.2021 18:21:20

## Middle Channel

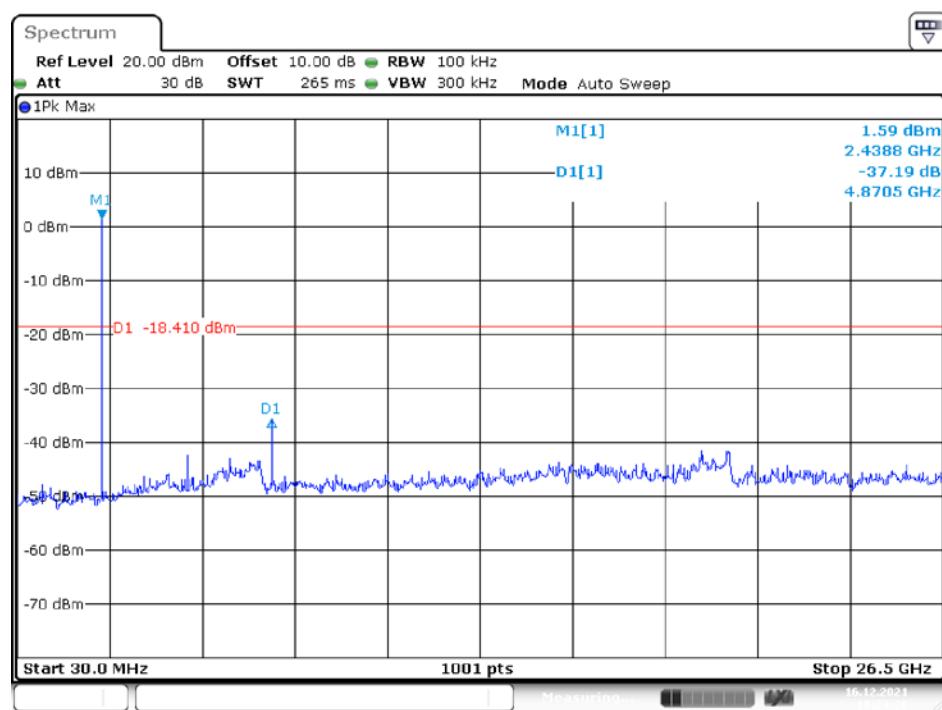


Date: 16.DEC.2021 18:24:28

## High Channel

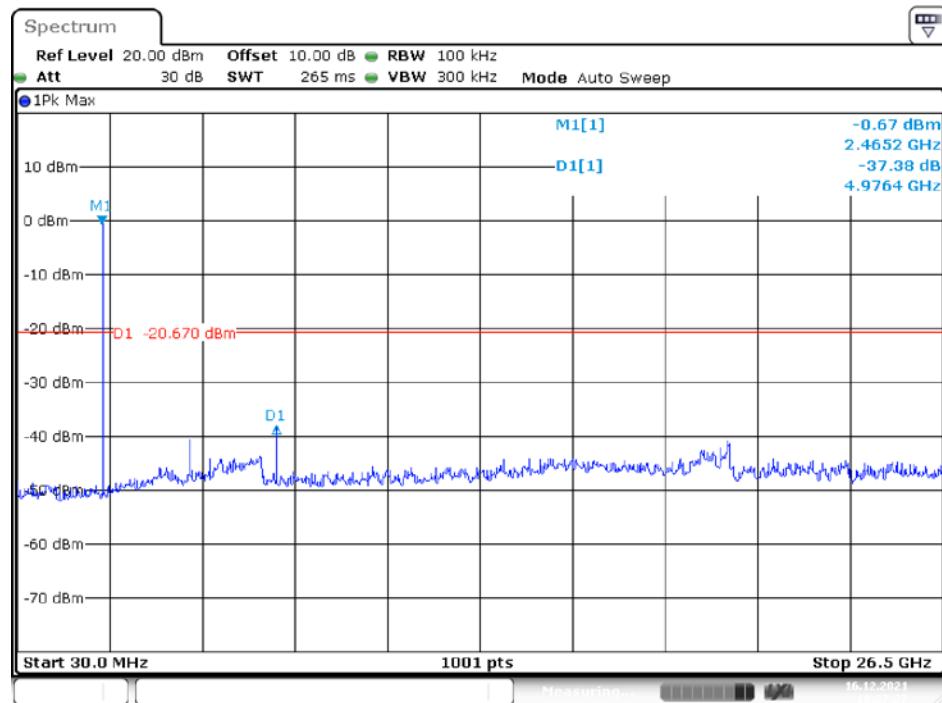


Date: 16.DEC.2021 18:27:26

## BLE(2M) Mode Low Channel

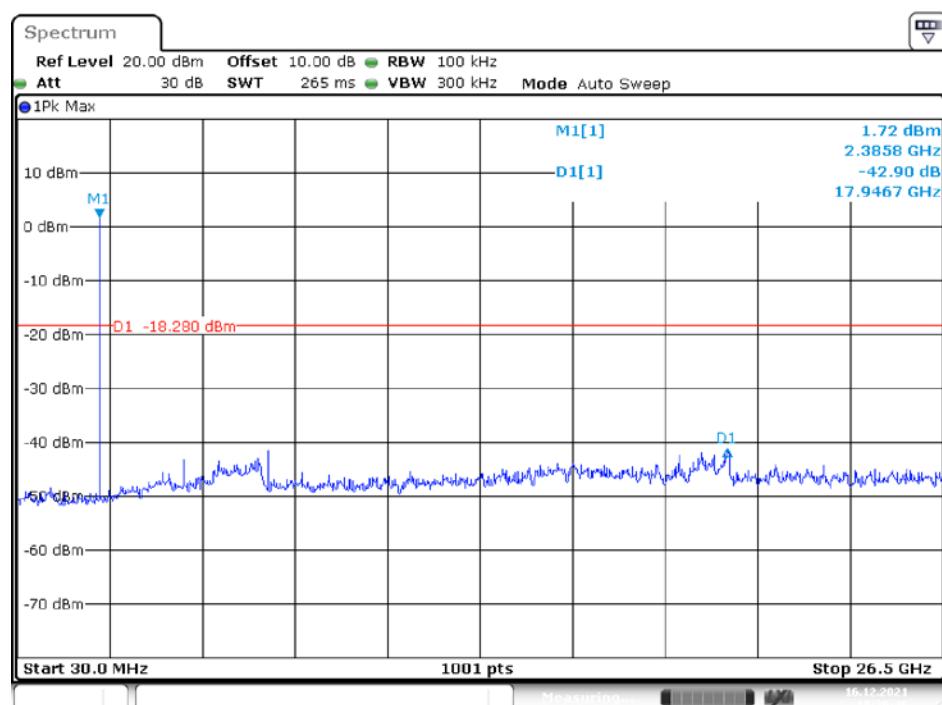


Date: 16.DEC.2021 18:30:47

### Middle Channel

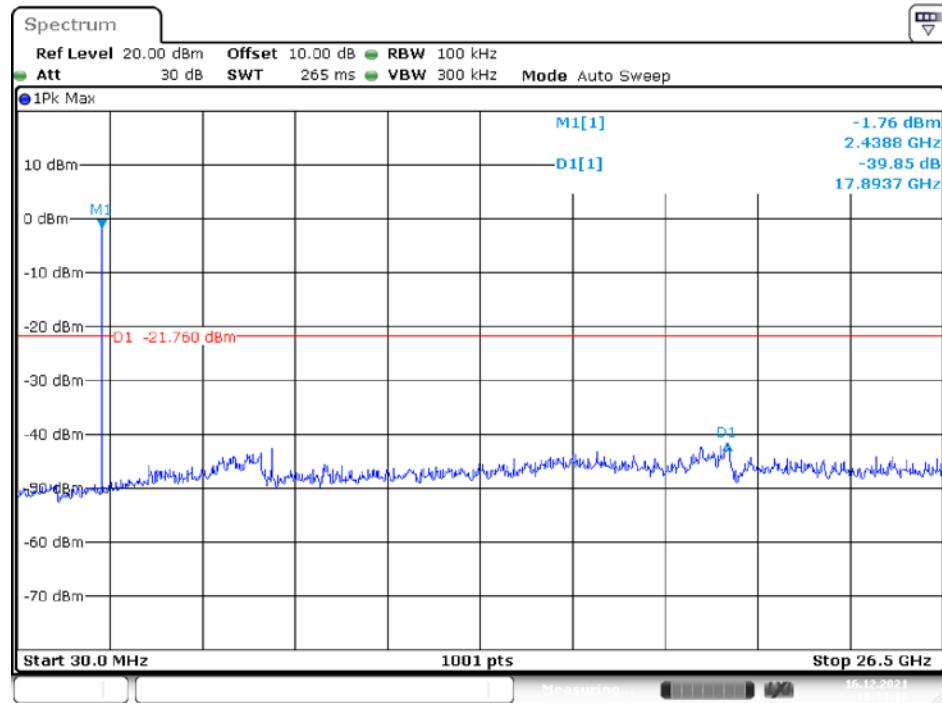

Date: 16.DEC.2021 18:33:10

### High Channel

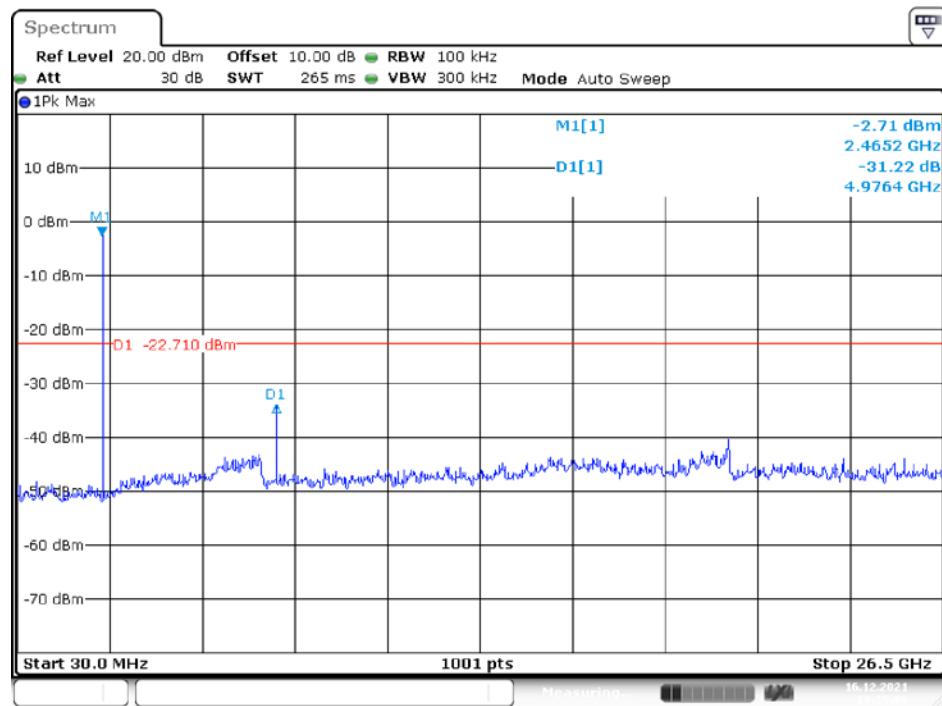

Date: 16.DEC.2021 18:35:00

## 9 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

### 9.1 Applicable Standard

According to FCC §15.247(a)(2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 9.2 Test Procedure

The steps for the first option are as follows:


- a) Set RBW = 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 9.3 Test Results

Channel	Frequency (MHz)	6 dB Emission Bandwidth (kHz)	Limit (kHz)	Result
BLE(125k) Mode				
Low	2402	636	> 500	Compliance
Middle	2440	636	> 500	Compliance
High	2480	636	> 500	Compliance
BLE(500k) Mode				
Low	2402	702	> 500	Compliance
Middle	2440	699	> 500	Compliance
High	2480	705	> 500	Compliance
BLE(1M) Mode				
Low	2402	702	> 500	Compliance
Middle	2440	699	> 500	Compliance
High	2480	708	> 500	Compliance
BLE(2M) Mode				
Low	2402	1185	> 500	Compliance
Middle	2440	1185	> 500	Compliance
High	2480	1179	> 500	Compliance


Please refer to the following plots

### BLE(125k) Mode Low Channel

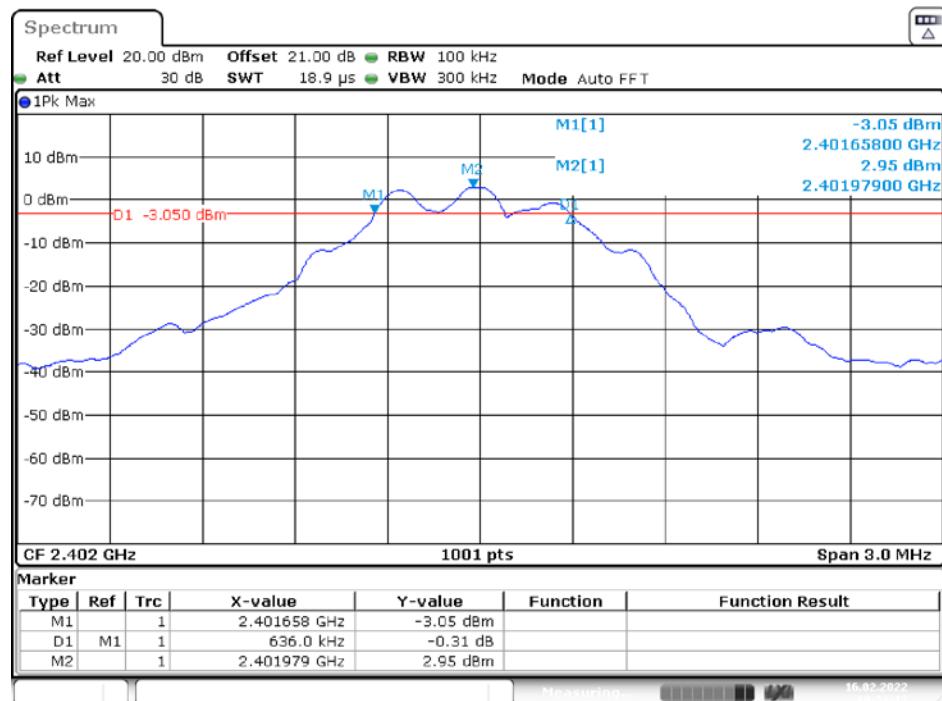


Date: 16.FEB.2022 10:21:17

### Middle Channel

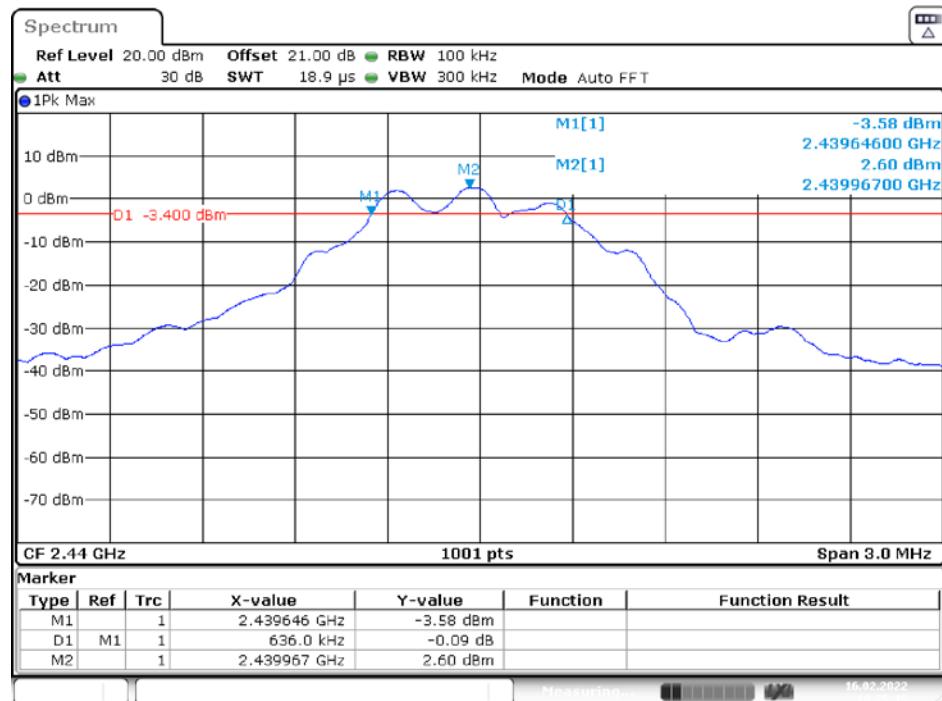


Date: 16.FEB.2022 10:25:15

## High Channel

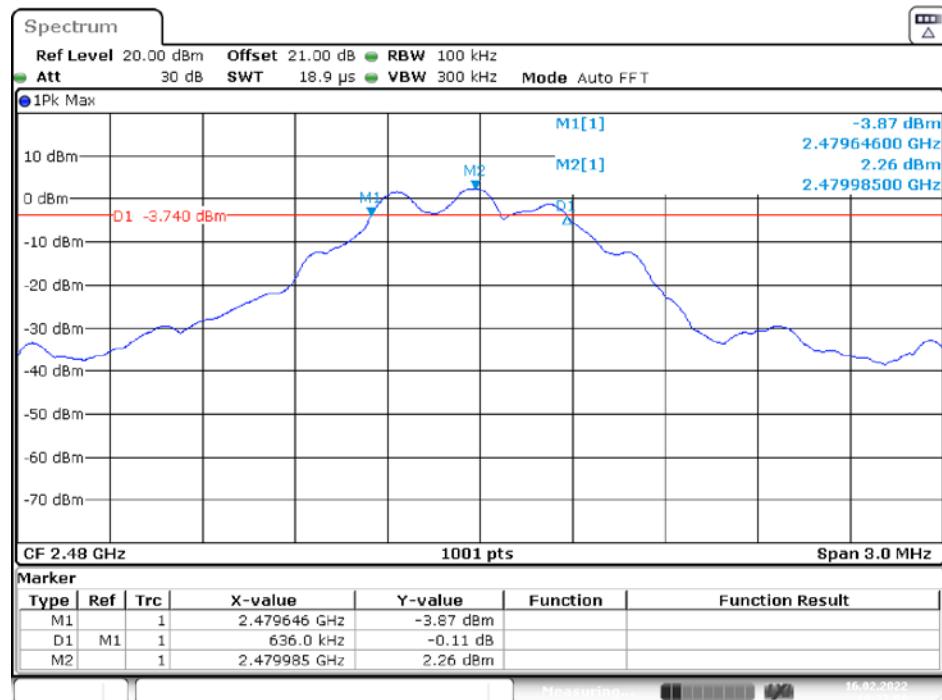


## BLE(500k) Mode


### Low Channel

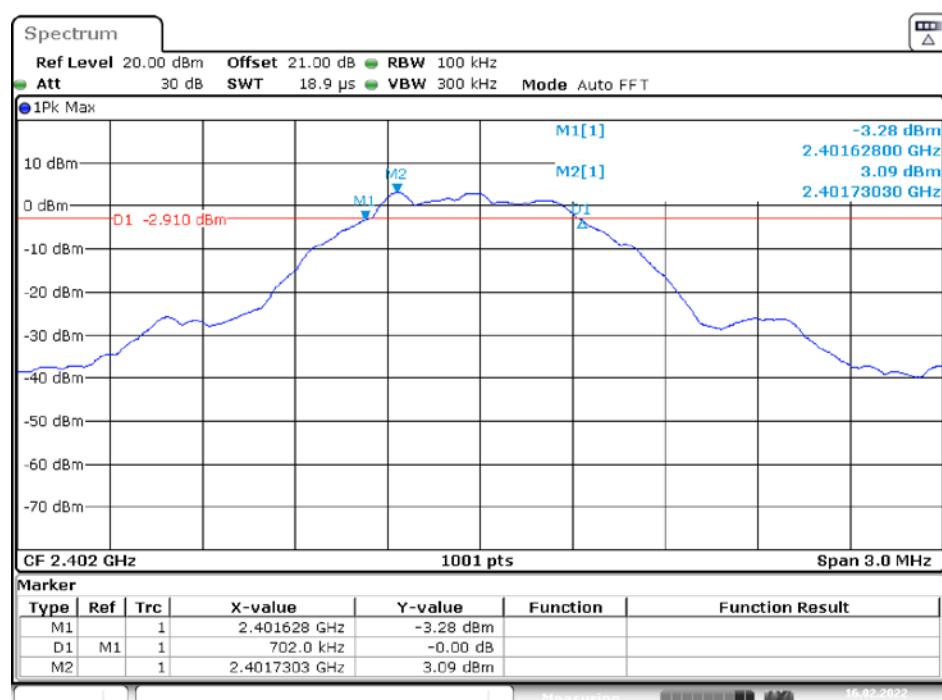

## Middle Channel

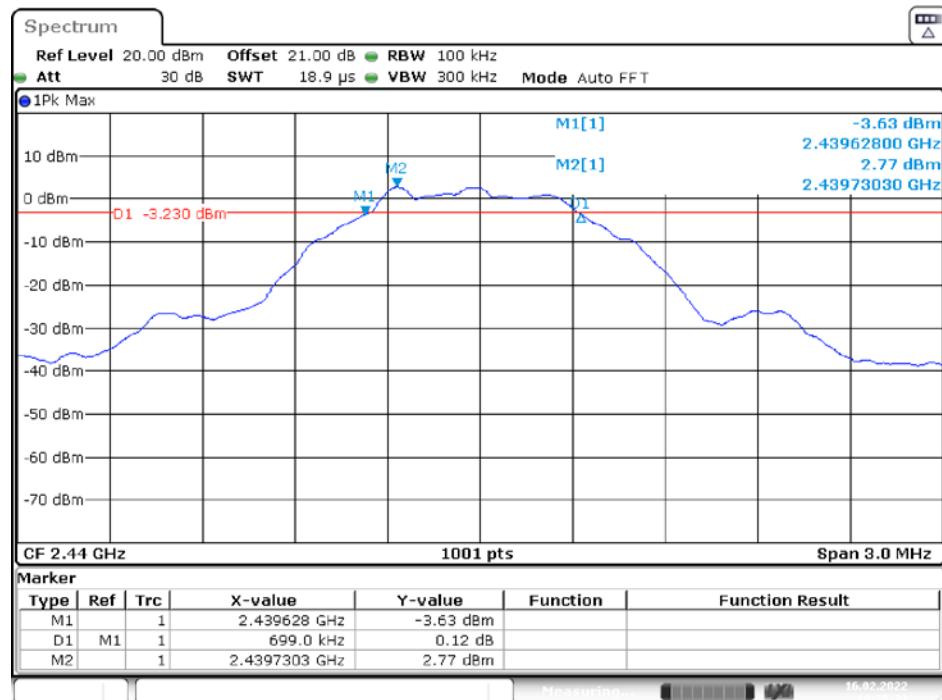


## High Channel

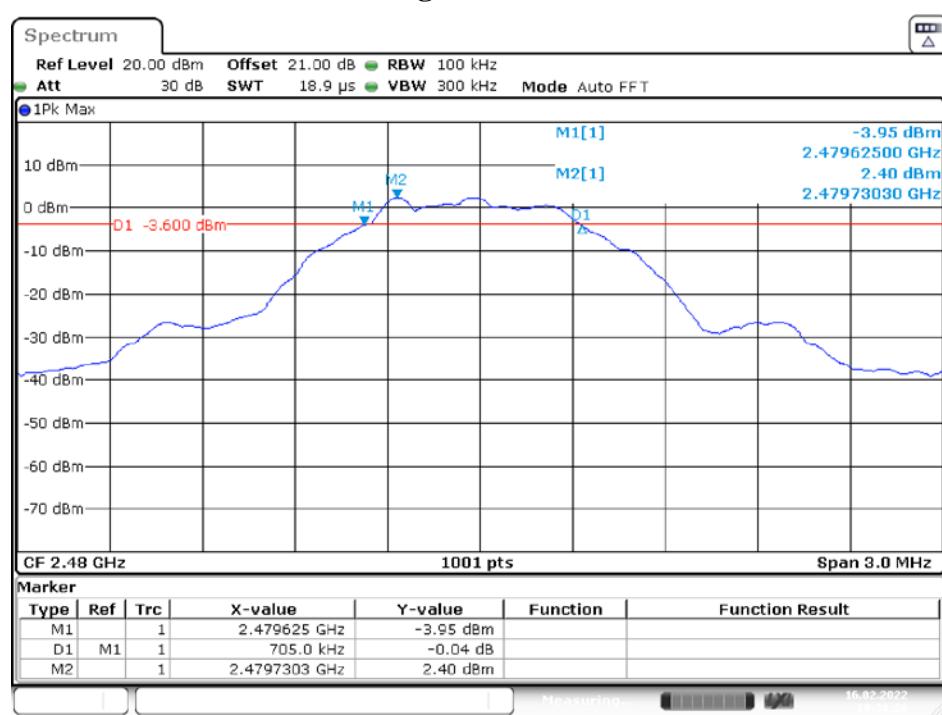


## BLE(1M) Mode

### Low Channel

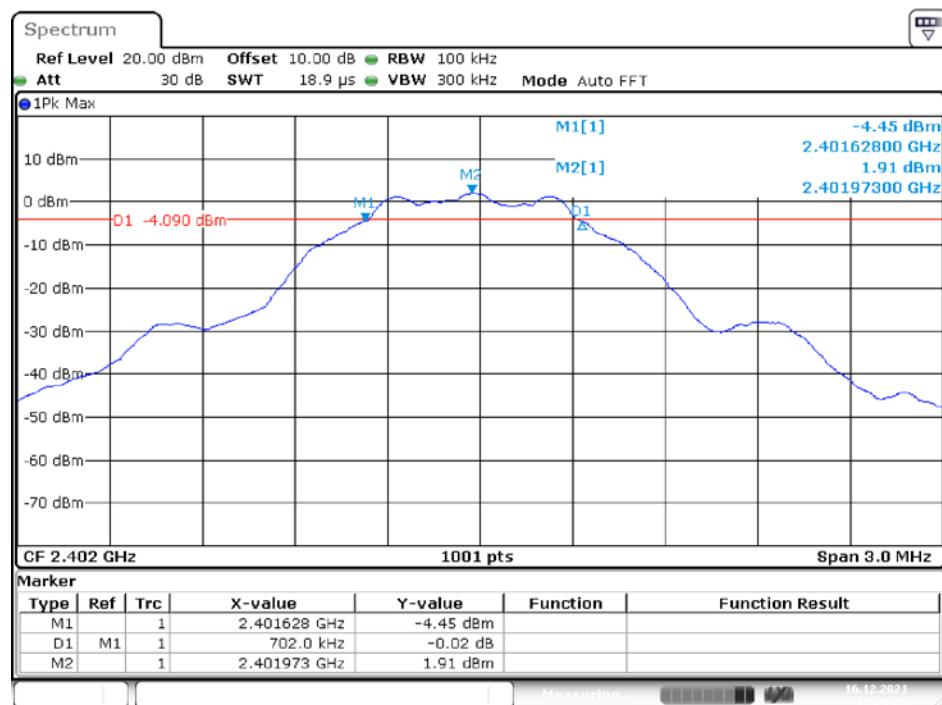


Date: 16.DEC.2021 18:20:25

### Middle Channel

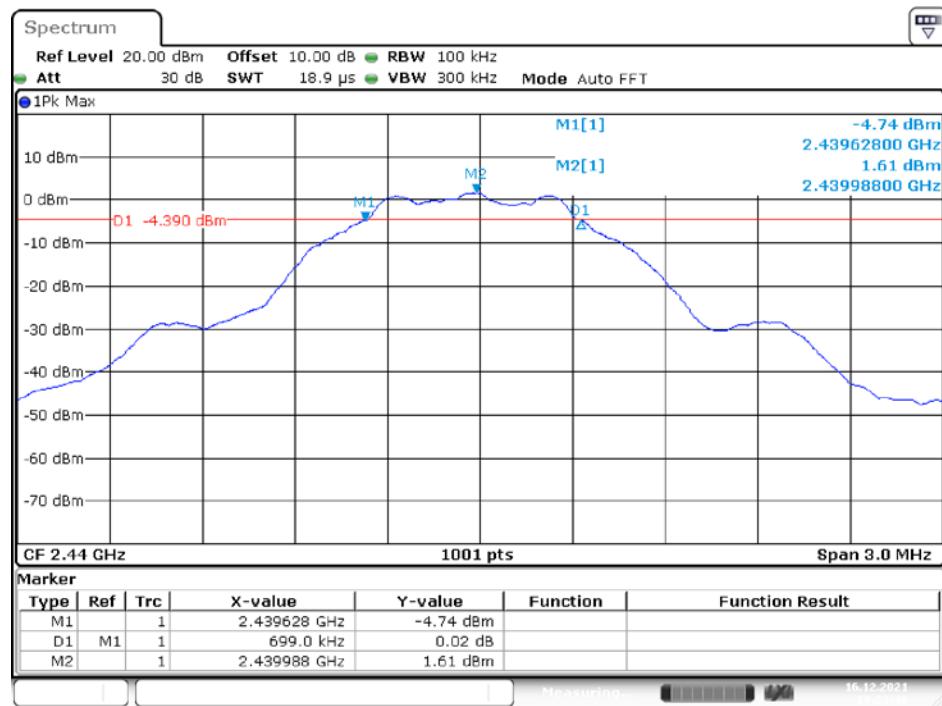

Date: 16.DEC.2021 18:23:49


## High Channel

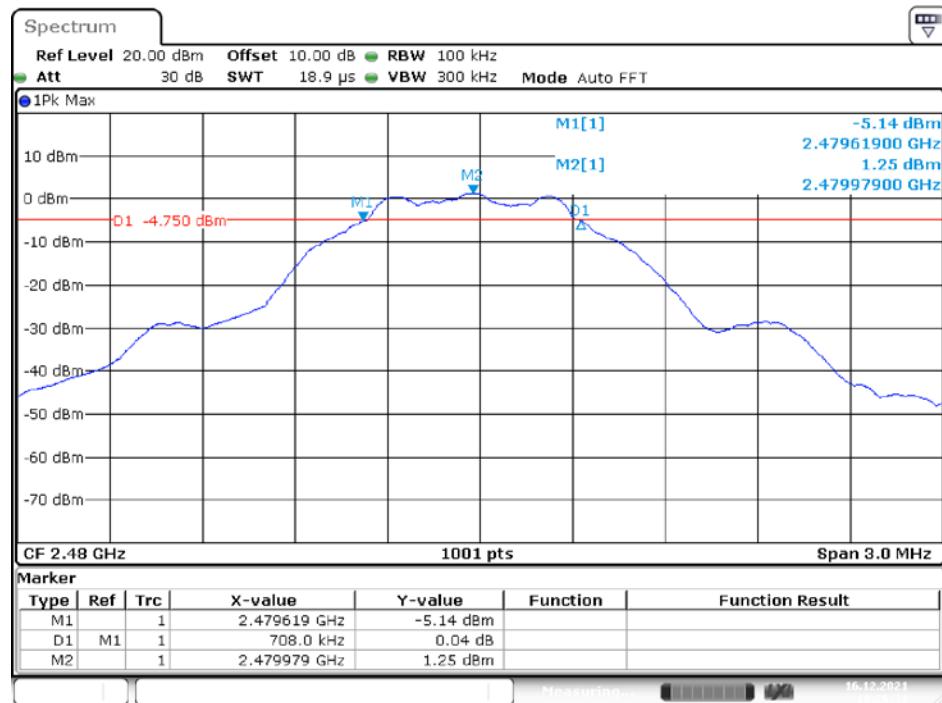

Date: 16.DEC.2021 18:26:31


## BLE(2M) Mode

### Low Channel

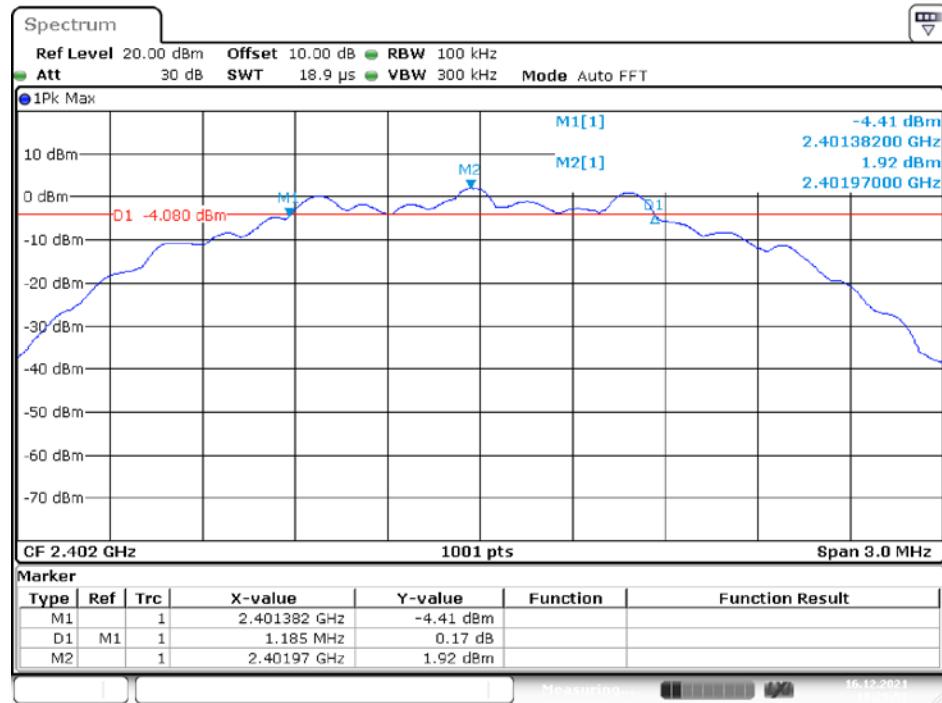


Date: 16.DEC.2021 18:29:51

## Middle Channel

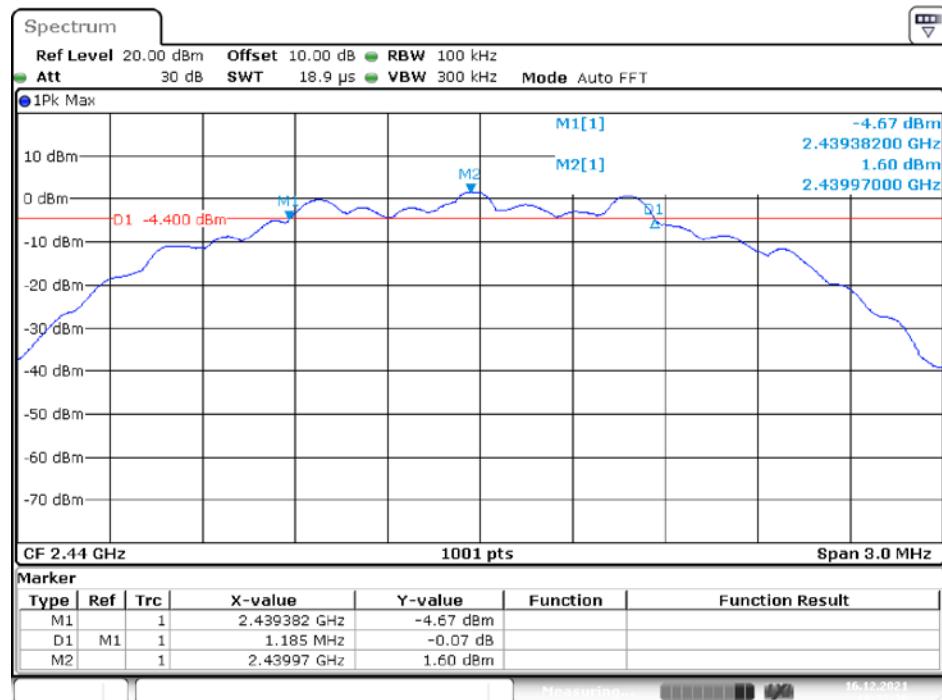

Date: 16.DEC.2021 18:32:31

## High Channel

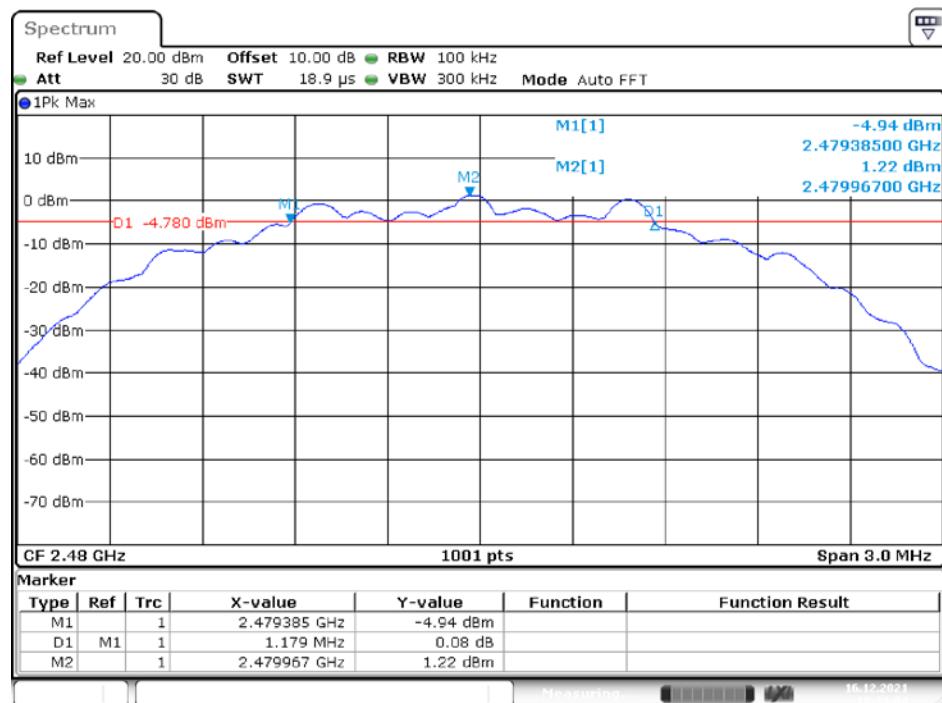

Date: 16.DEC.2021 18:34:05

## 10 FCC §15.247(b)(3) – Maximum Output Power

### 10.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 10.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.

### 10.3 Test Results

Channel	Frequency (MHz)	Maximum peak Conducted Output Power		Limit (W)	Result
		(dBm)	(W)		
BLE(125kbps) Mode					
Low	2402	2.73	0.0019	1	PASS
Middle	2440	2.51	0.0018	1	PASS
High	2480	2.14	0.0016	1	PASS
BLE(500kbps) Mode					
Low	2402	2.76	0.0019	1	PASS
Middle	2440	2.55	0.0018	1	PASS
High	2480	2.16	0.0016	1	PASS
BLE(1Mbps) Mode					
Low	2402	2.81	0.0019	1	PASS
Middle	2440	2.52	0.0018	1	PASS
High	2480	2.15	0.0016	1	PASS
BLE(2Mbps) Mode					
Low	2402	2.82	0.0019	1	PASS
Middle	2440	2.55	0.0018	1	PASS
High	2480	2.17	0.0017	1	PASS

## 11 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

### 11.1 Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### 11.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


### 11.3 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE(125k) Mode				
Low	2402	40.79	$\geq 20$	PASS
High	2480	39.60	$\geq 20$	PASS
BLE(500k) Mode				
Low	2402	41.37	$\geq 20$	PASS
High	2480	40.00	$\geq 20$	PASS
BLE(1M) Mode				
Low	2402	50.20	$\geq 20$	PASS
High	2480	50.45	$\geq 20$	PASS
BLE(2M) Mode				
Low	2402	33.67	$\geq 20$	PASS
High	2480	50.39	$\geq 20$	PASS


Please refer to the following plots

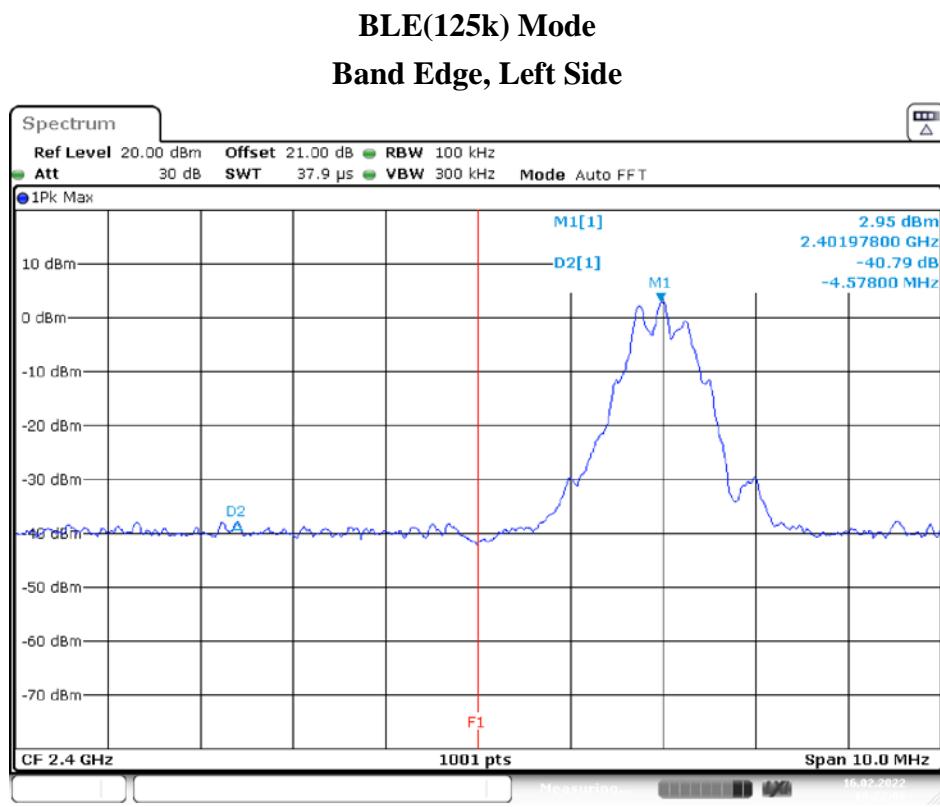

## Band Edge, Right Side


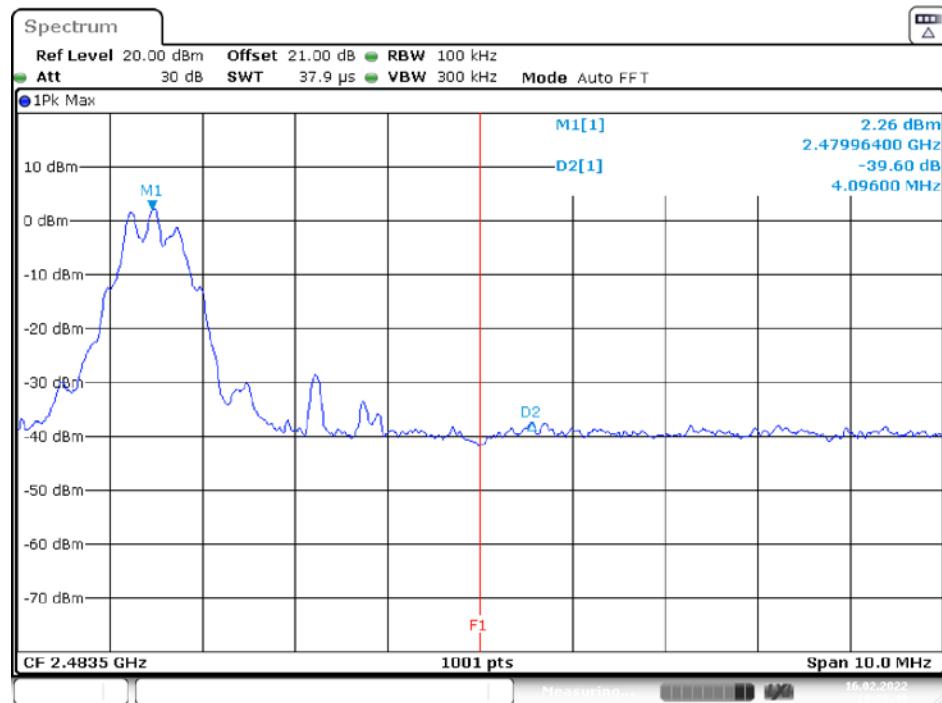


Date: 16.FEB.2022 10:28:49

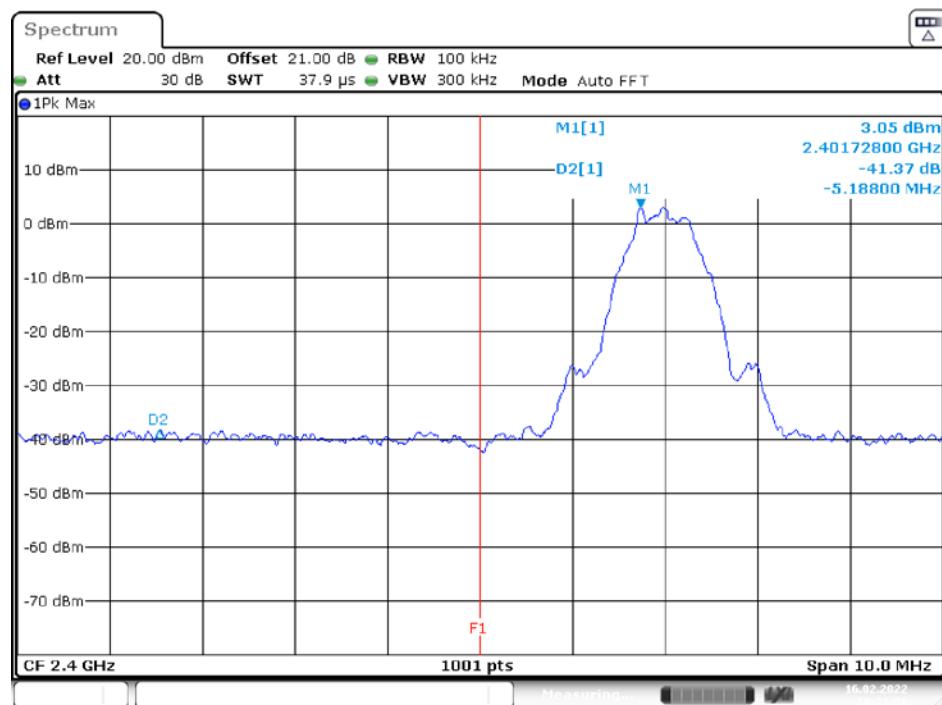
BLE(500k) Mode  
Band Edge, Left Side

Date: 16.FEB.2022 10:31:58


## Band Edge, Right Side

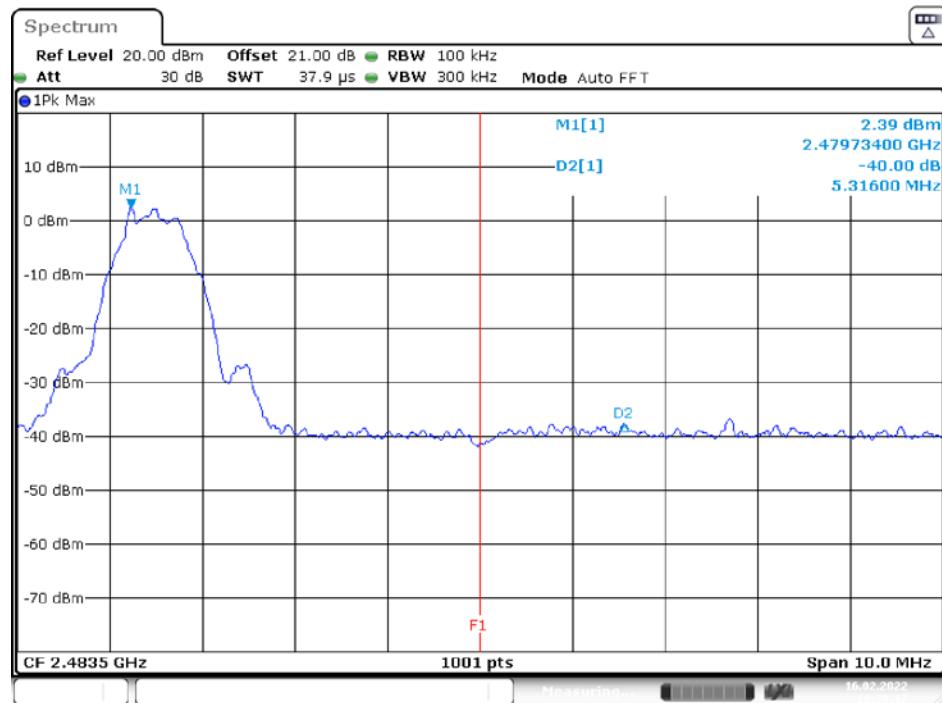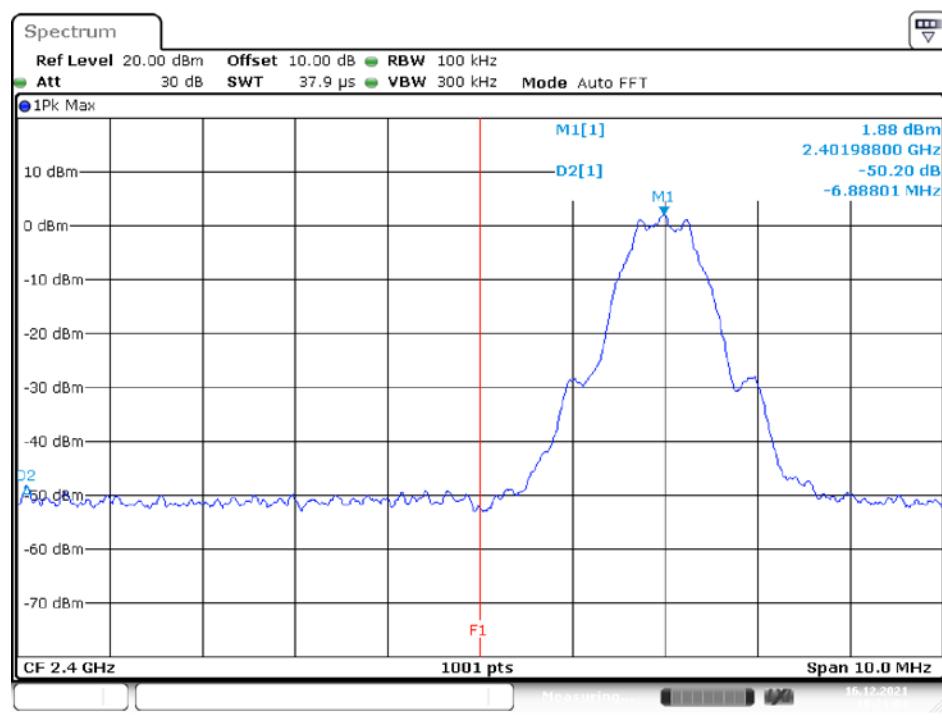BLE(1M) Mode  
Band Edge, Left Side

## Band Edge, Right Side

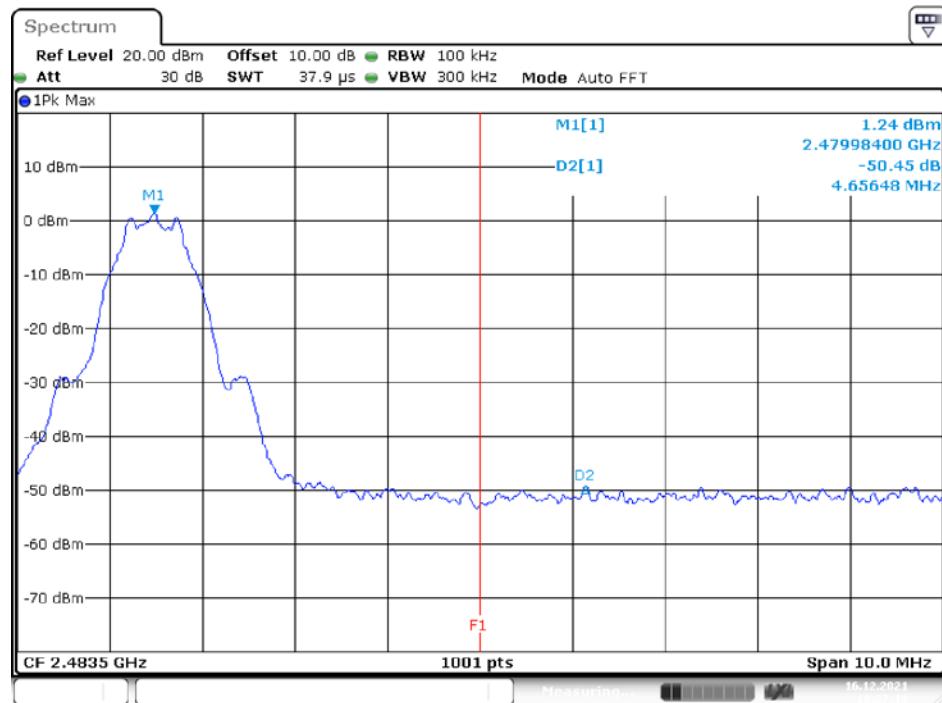


Date: 16.DEC.2021 18:27:11

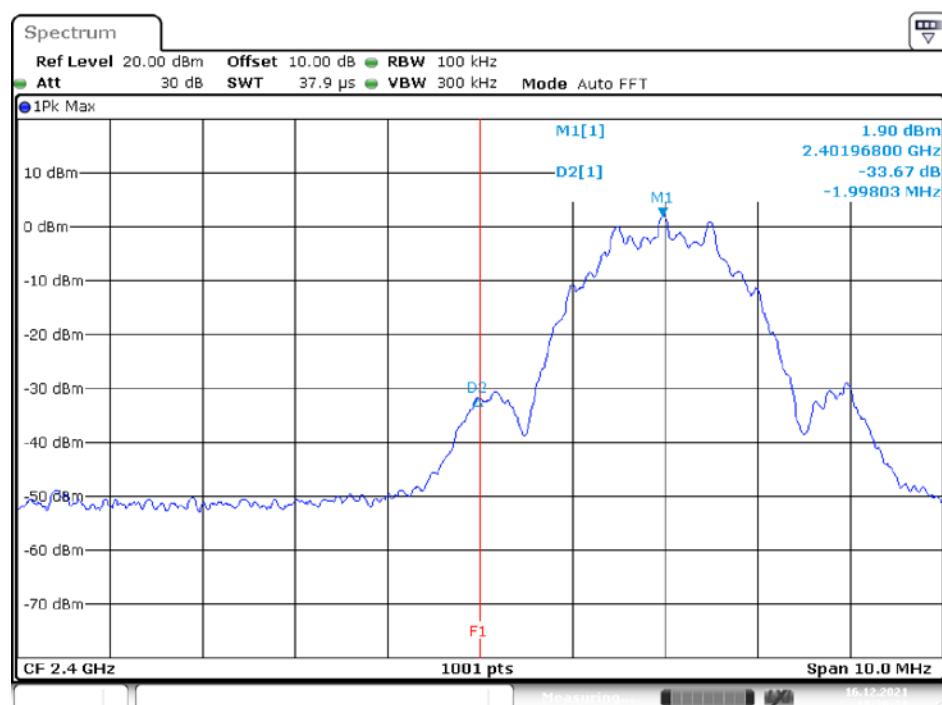BLE(2M) Mode  
Band Edge, Left Side

Date: 16.DEC.2021 18:30:31

## Band Edge, Right Side

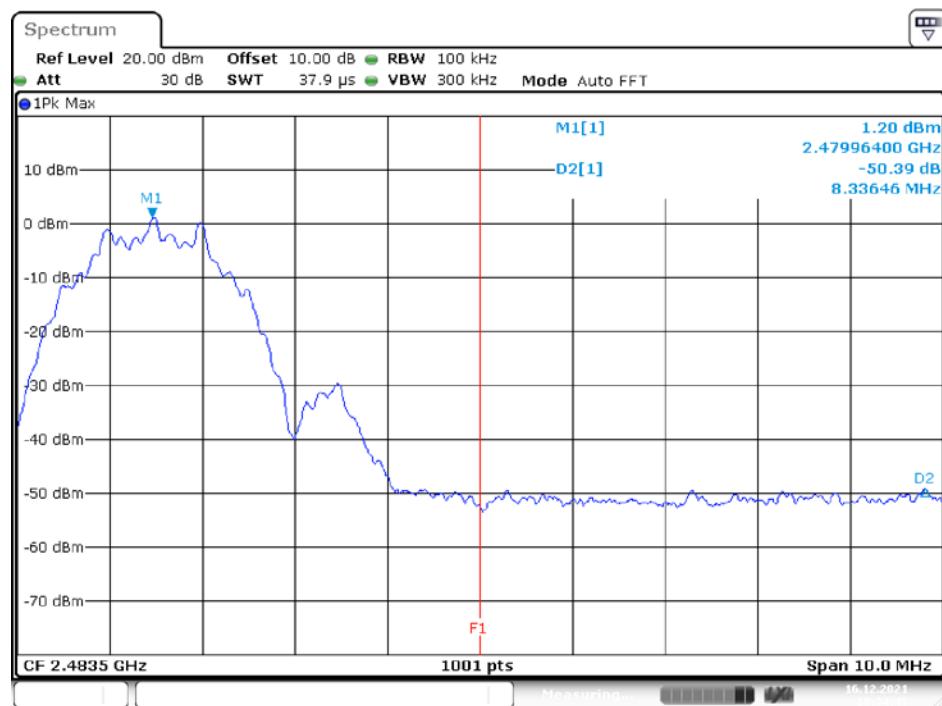

## 12 FCC §15.247(e) – Power Spectral Density

### 12.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 12.2 Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat


### 12.3 Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
BLE(125k) Mode				
Low	2402	-3.07	8	Compliance
Middle	2440	-3.41	8	Compliance
High	2480	-3.77	8	Compliance
BLE(500k) Mode				
Low	2402	-3.29	8	Compliance
Middle	2440	-3.57	8	Compliance
High	2480	-3.95	8	Compliance
BLE(1M) Mode				
Low	2402	-8.46	8	Compliance
Middle	2440	-8.71	8	Compliance
High	2480	-9.06	8	Compliance
BLE(2M) Mode				
Low	2402	-7.22	8	Compliance
Middle	2440	-7.50	8	Compliance
High	2480	-7.88	8	Compliance


Please refer to the following plots.

## BLE(125k) Mode


## Low Channel

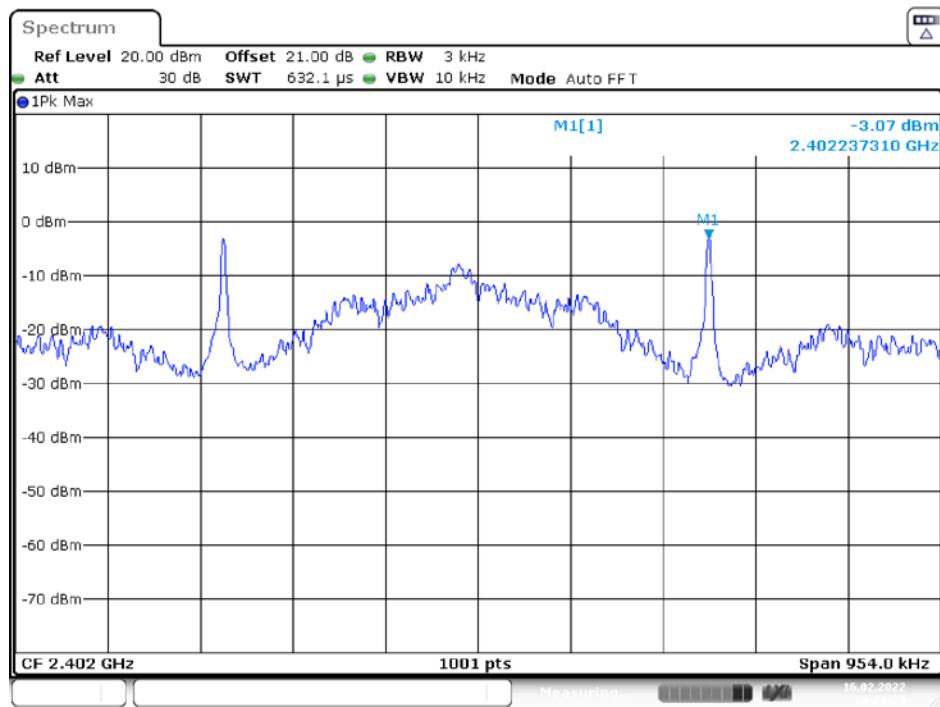

## Middle Channel

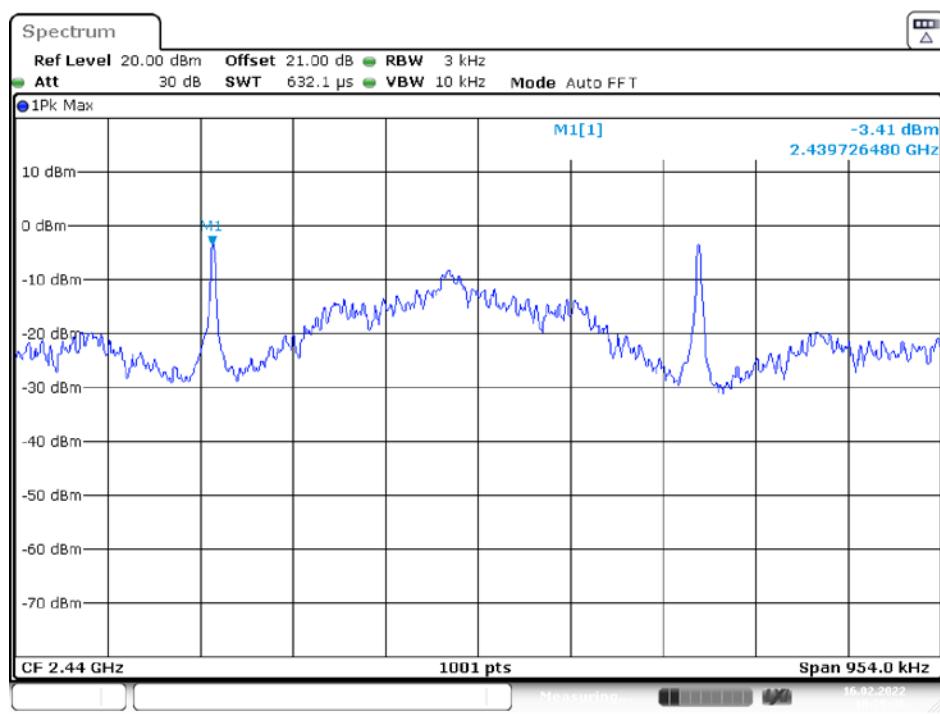


## High Channel

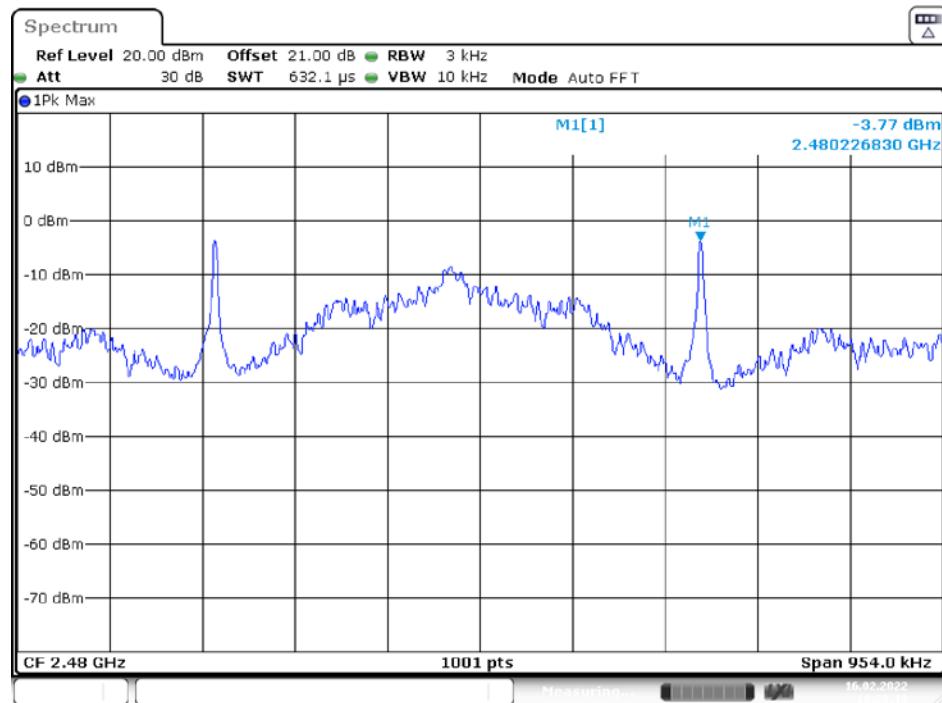


## BLE(500k) Mode


### Low Channel

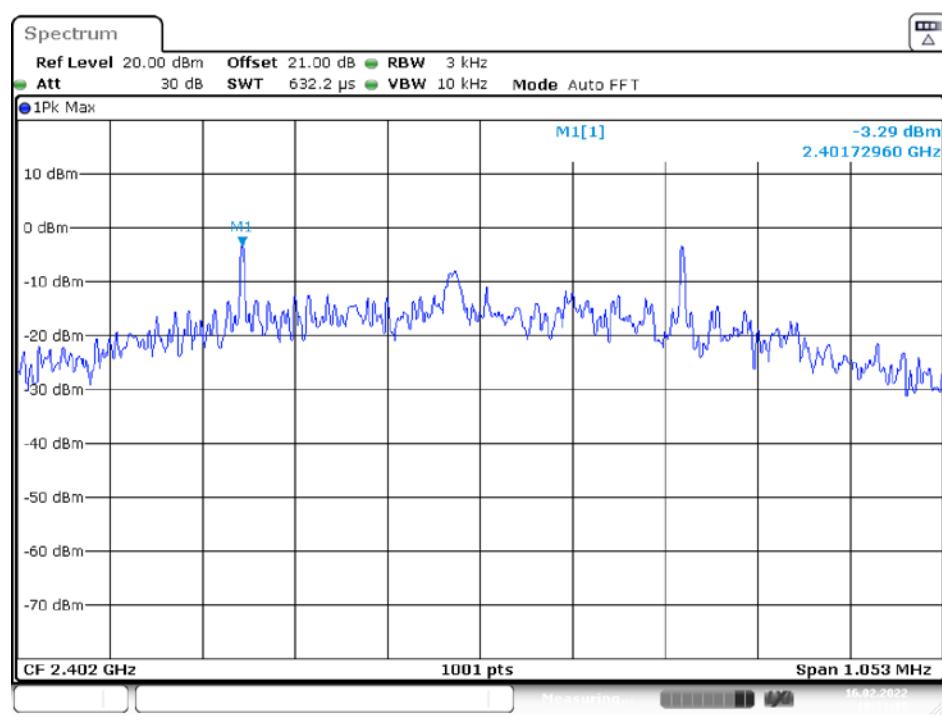

### Middle Channel

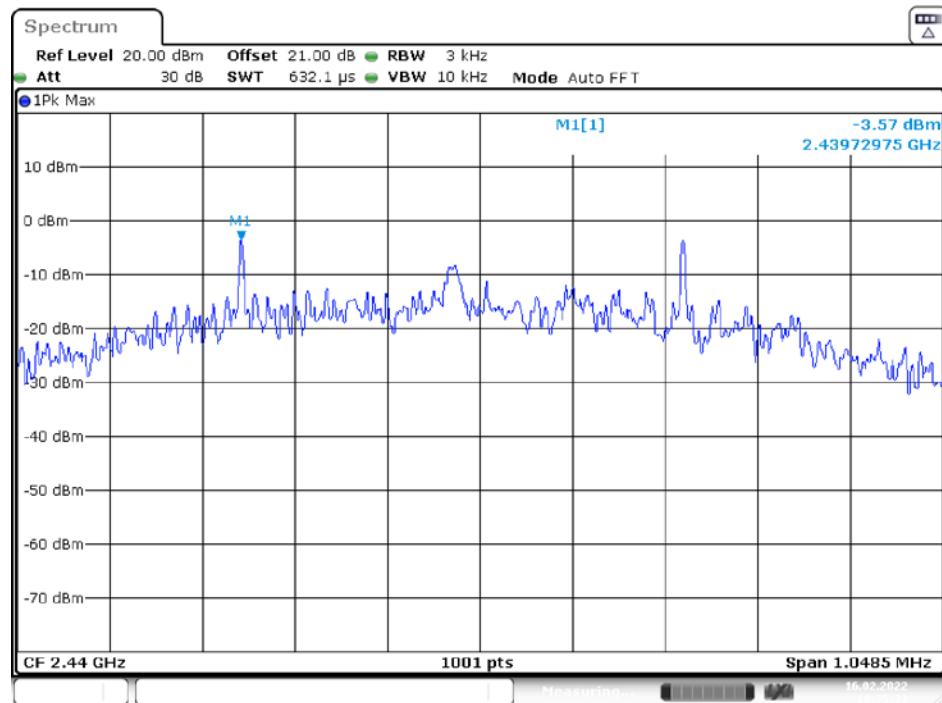


### High Channel

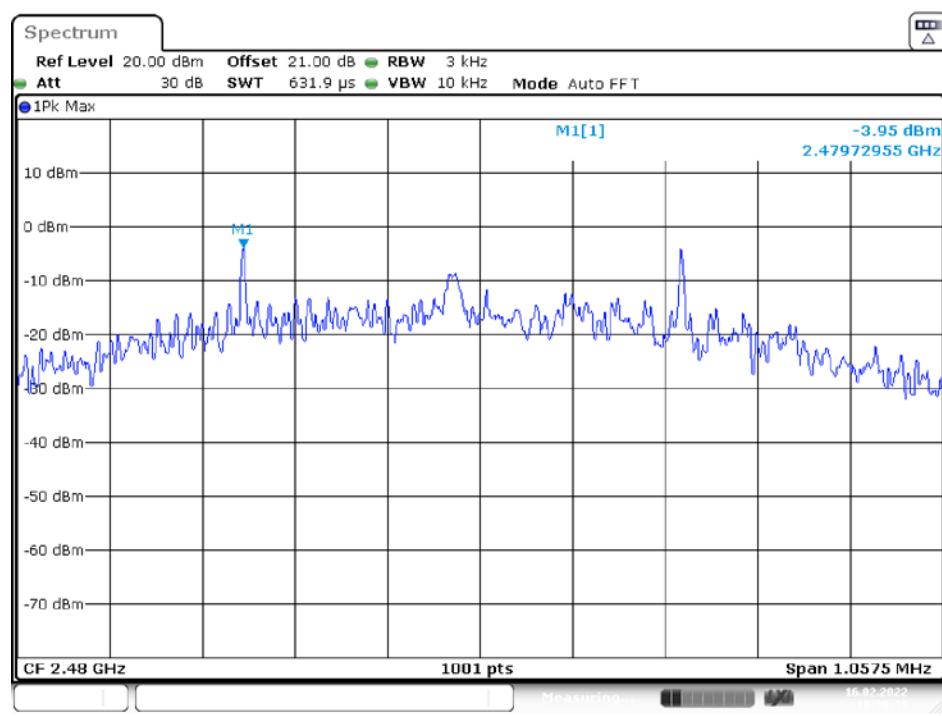


## BLE(1M) Mode

### Low Channel

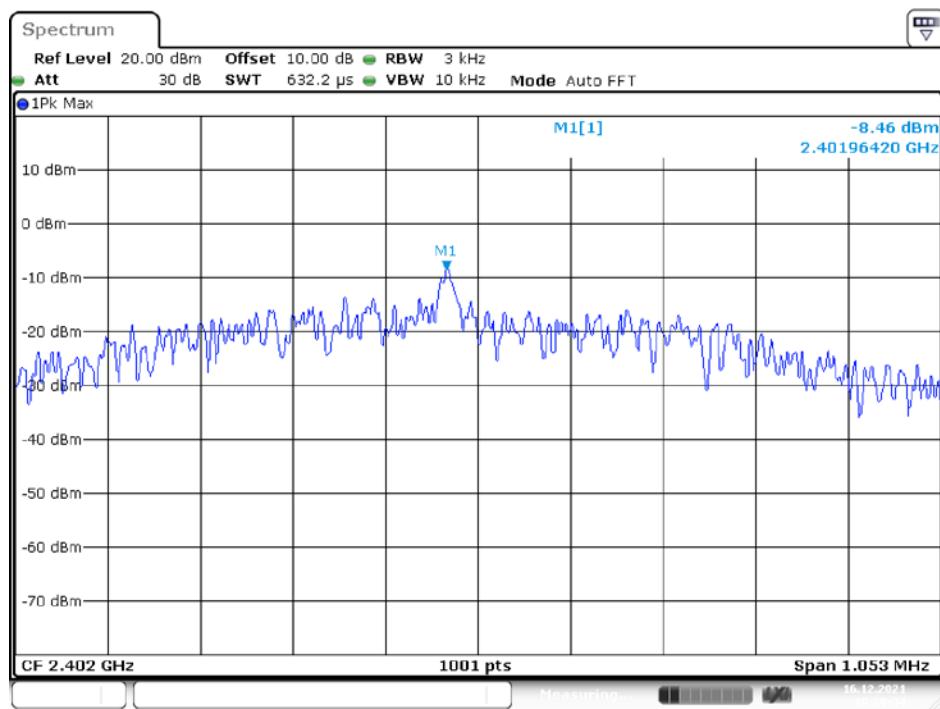


Date: 16.DEC.2021 18:20:34

### Middle Channel

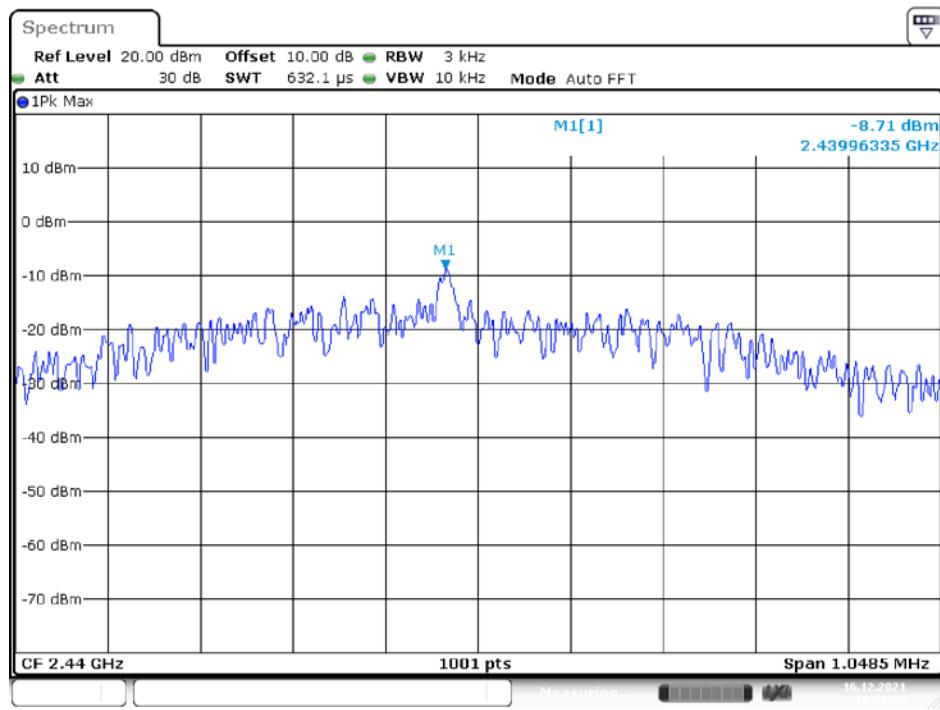

Date: 16.DEC.2021 18:23:58


## High Channel

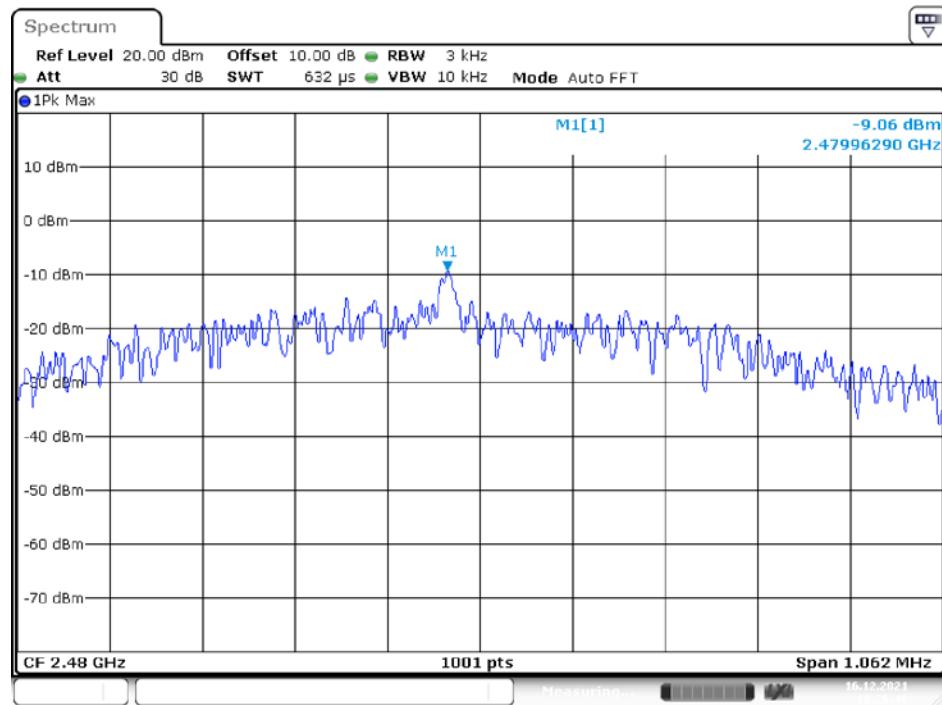


Date: 16.DEC.2021 18:26:40

## BLE(2M) Mode


### Low Channel

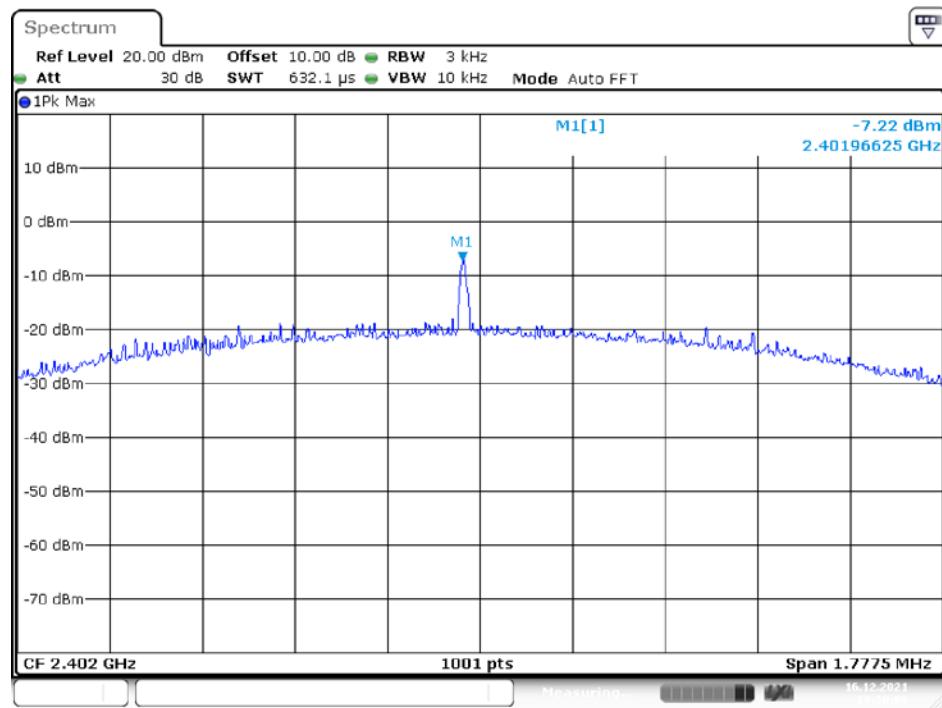

Date: 16.DEC.2021 18:30:00

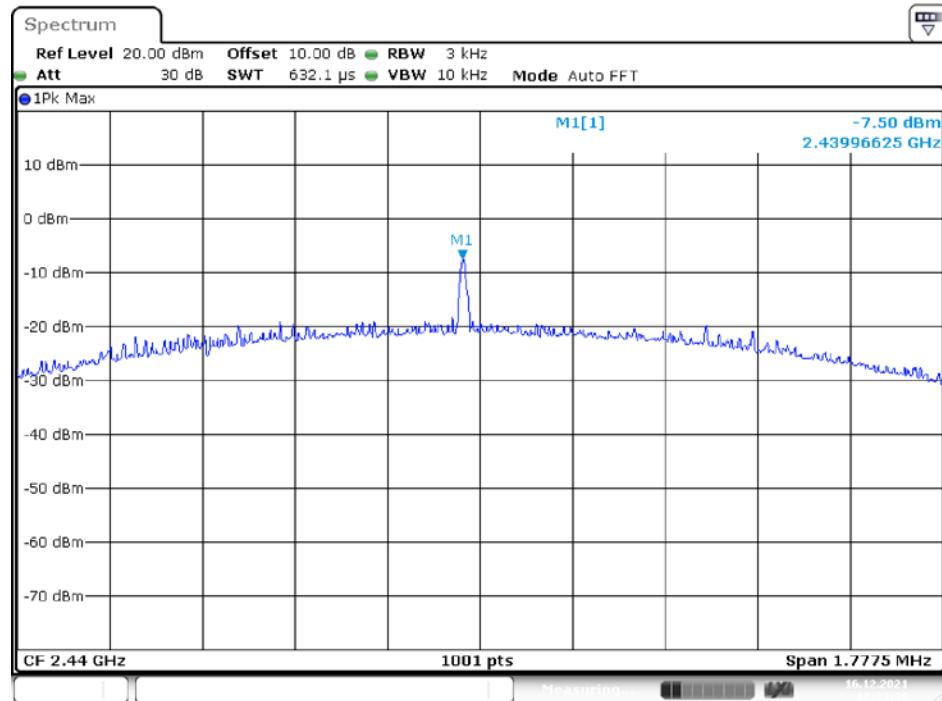**Middle Channel**

Date: 16.DEC.2021 18:32:40

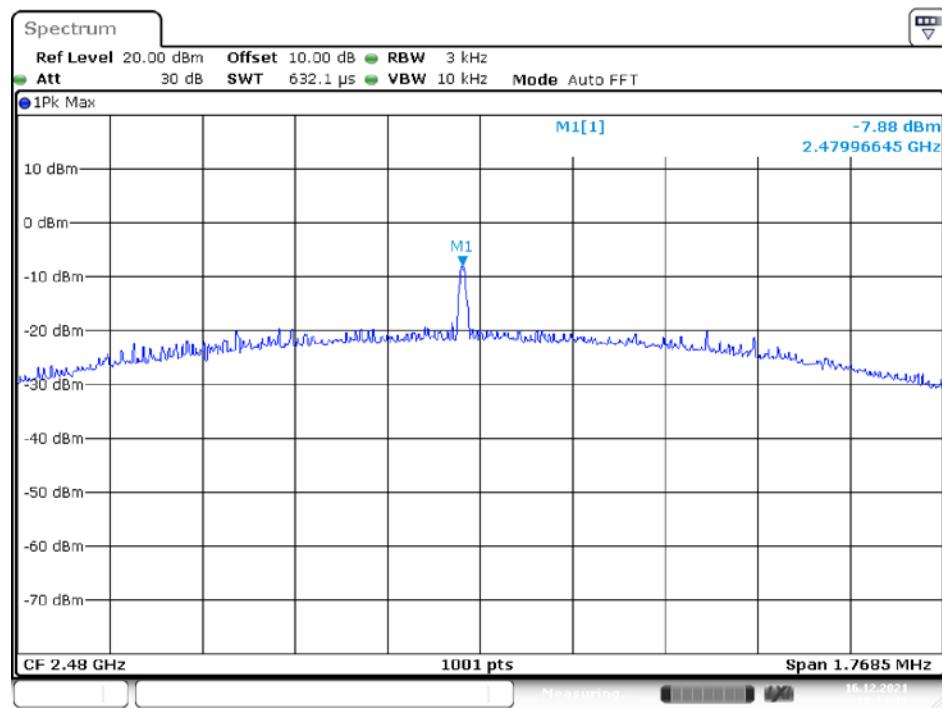**High Channel**

Date: 16.DEC.2021 18:34:14

**\*\*\*\*\* END OF REPORT \*\*\*\*\***