

Appendix B

Detailed Test Results

GSM850 for Head, Body & Hotspot
GSM1900 for Head, Body & Hotspot
WCDMA Band II for Head, Body, Hotspot &Limbs
WCDMA Band IV for Head, Body, Hotspot &Limbs
WCDMA Band V for Head, Body & Hotspot
LTE Band 2 for Head, Body, Hotspot &Limbs
LTE Band 7 for Head, Body, Hotspot &Limbs
LTE Band 12 for Head, Body & Hotspot
LTE Band 13 for Head, Body & Hotspot
LTE Band 26 for Head, Body & Hotspot
LTE Band 41 for Head, Body, Hotspot &Limbs
LTE Band 66 for Head, Body, Hotspot &Limbs
N2 for Head, Body, Hotspot &Limbs
N7 for Head, Body, Hotspot &Limbs
N26 for Head, Body & Hotspot
N41 for Head, Body, Hotspot &Limbs
N66 for Head, Body, Hotspot &Limbs
N77 for Head, Body, Hotspot &Limbs
N78 for Head, Body, Hotspot &Limbs
WIFI 2.4G for Head, Body & Hotspot
WIFI 5G for Head, Body, Hotspot &Limbs
BT for Head, Body & Hotspot



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Laboratory: SGS-SAR Lab

V2440 GSM850 GPRS 1TS 190CH Right cheek Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, GPRS/EGPRS Mode(1up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.836$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.810 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.70 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 39%

Maximum value of SAR (measured) = 0.784 W/kg

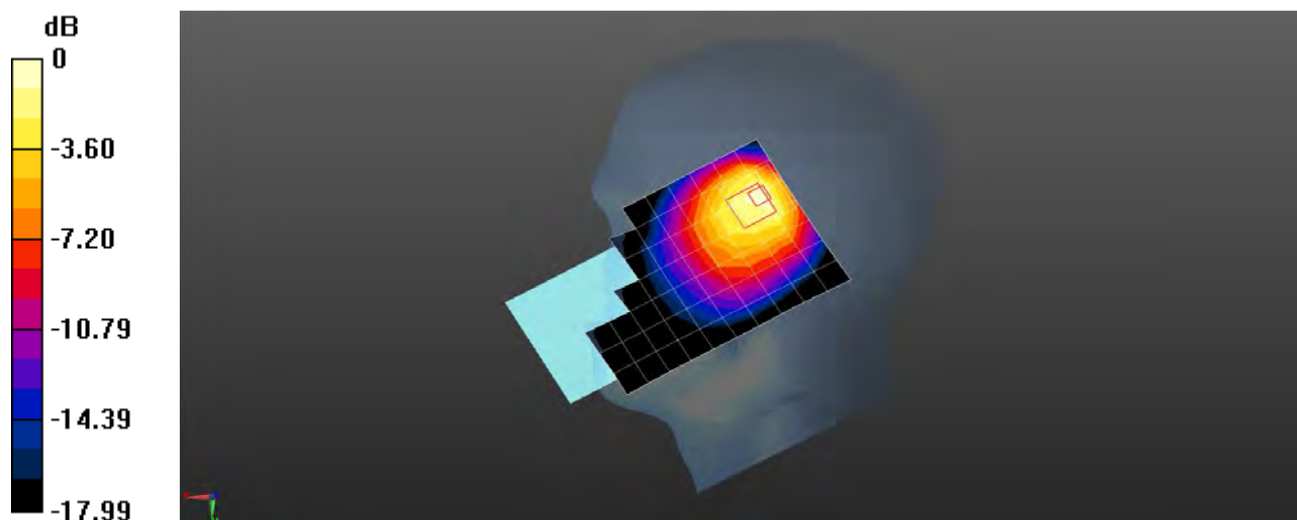

0 dB = 0.784 W/kg = -1.06 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 GSM850 GPRS 2TS 190CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.836$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.246 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.10 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 70.7%

Maximum value of SAR (measured) = 0.249 W/kg

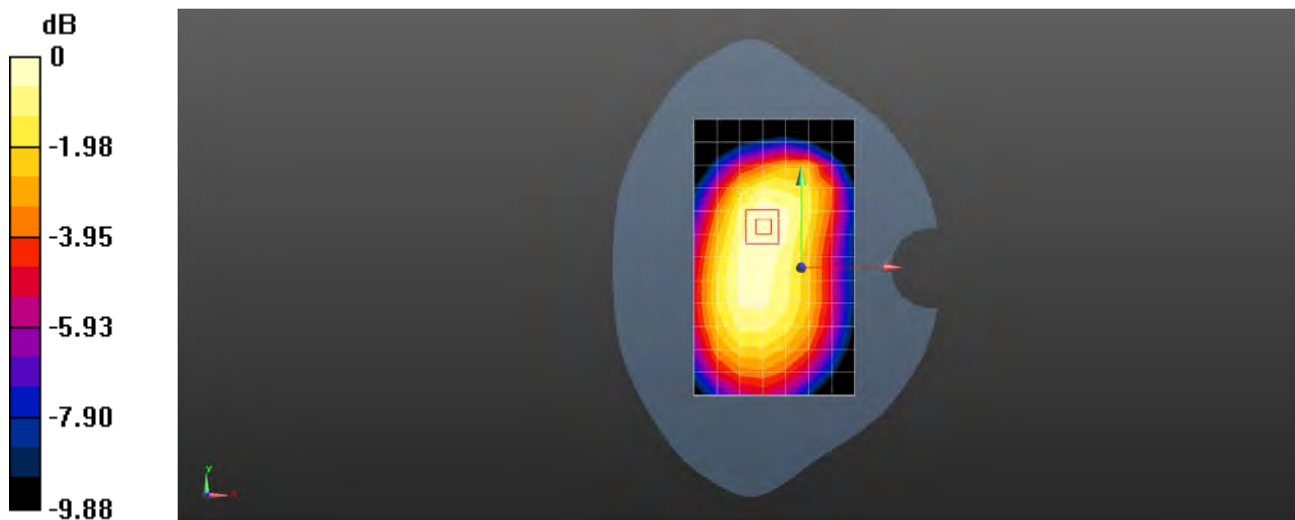

0 dB = 0.249 W/kg = -6.04 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 GSM850 GPRS 1TS 190CH Back side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, GPRS/EGPRS Mode(1up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.836$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.243 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.77 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 70.4%

Maximum value of SAR (measured) = 0.245 W/kg

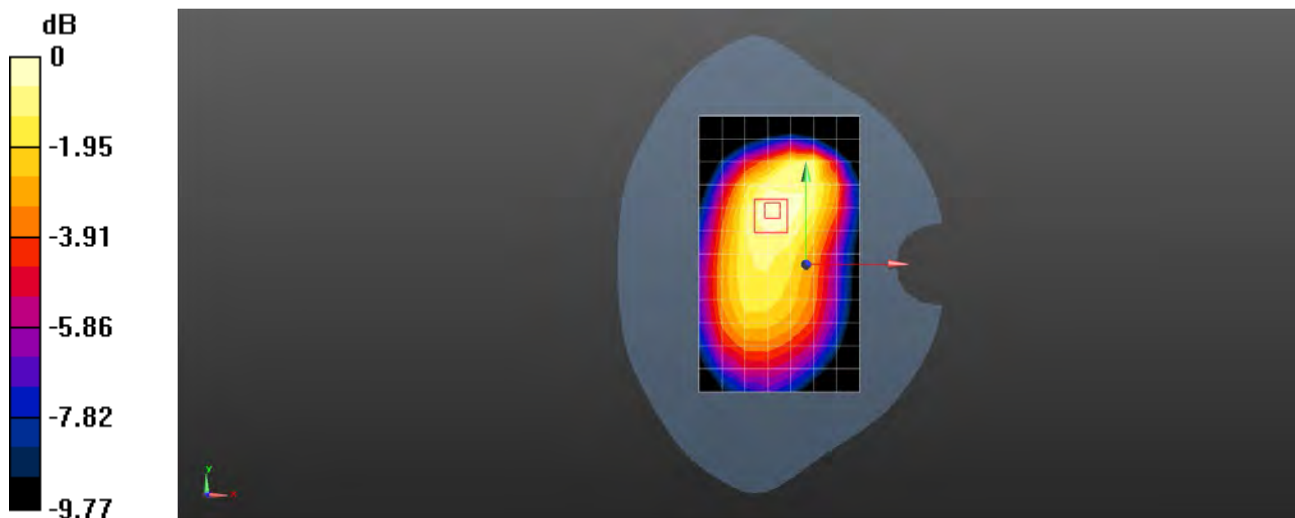

0 dB = 0.245 W/kg = -6.11 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 GSM1900 GPRS 2TS 661CH Right tilted Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.601 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.41 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.941 W/kg

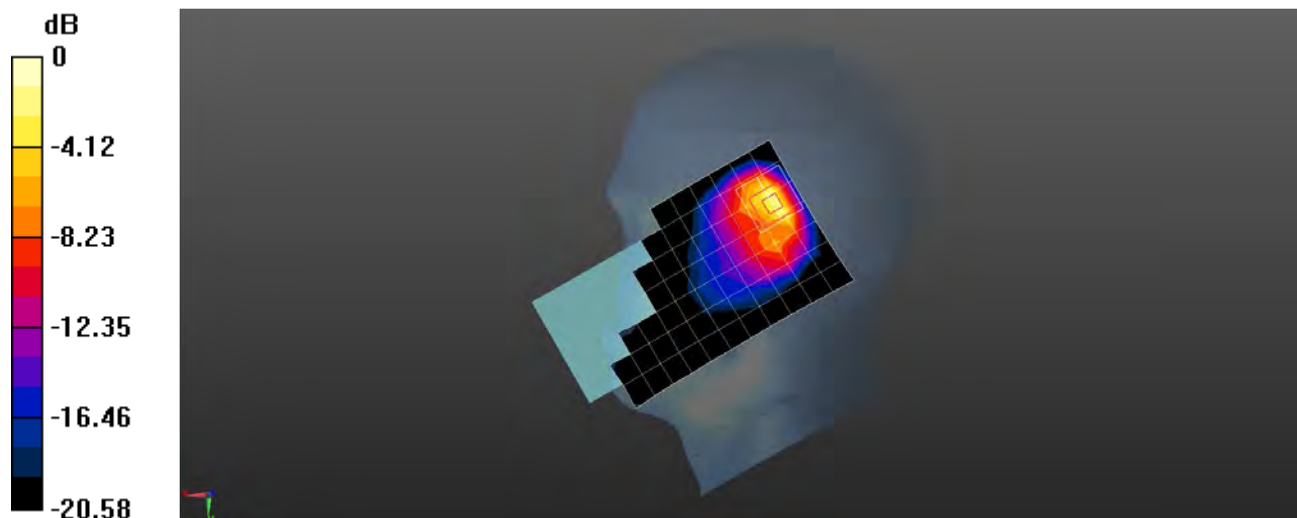

0 dB = 0.941 W/kg = -0.26 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 GSM1900 GPRS 2TS 661CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.197 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.907 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 0.202 W/kg

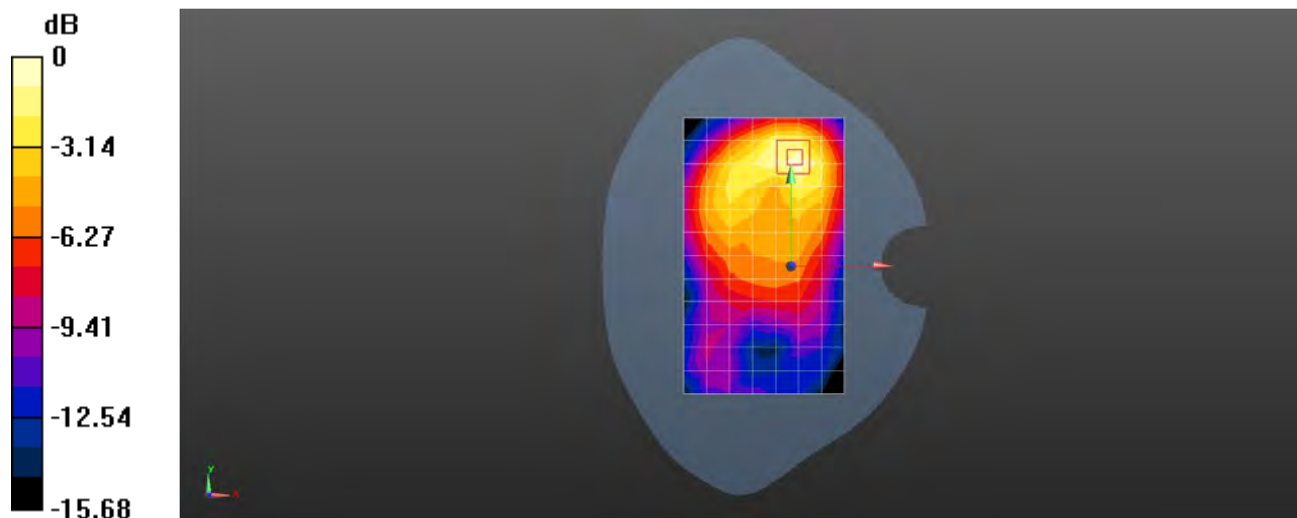

0 dB = 0.202 W/kg = -6.95 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 GSM1900 GPRS 2TS 661CH Bottom side 10mm Ant31

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.434 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.19 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.528 W/kg

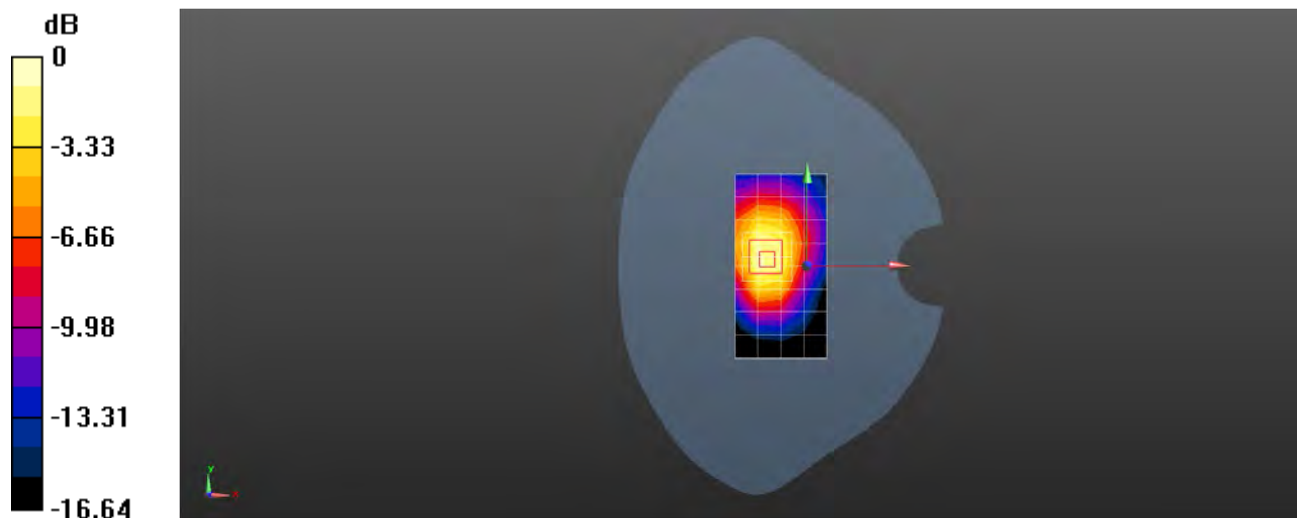

0 dB = 0.528 W/kg = -2.77 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band II RMC 9400CH Right tilted Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.462 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.85 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.779 W/kg

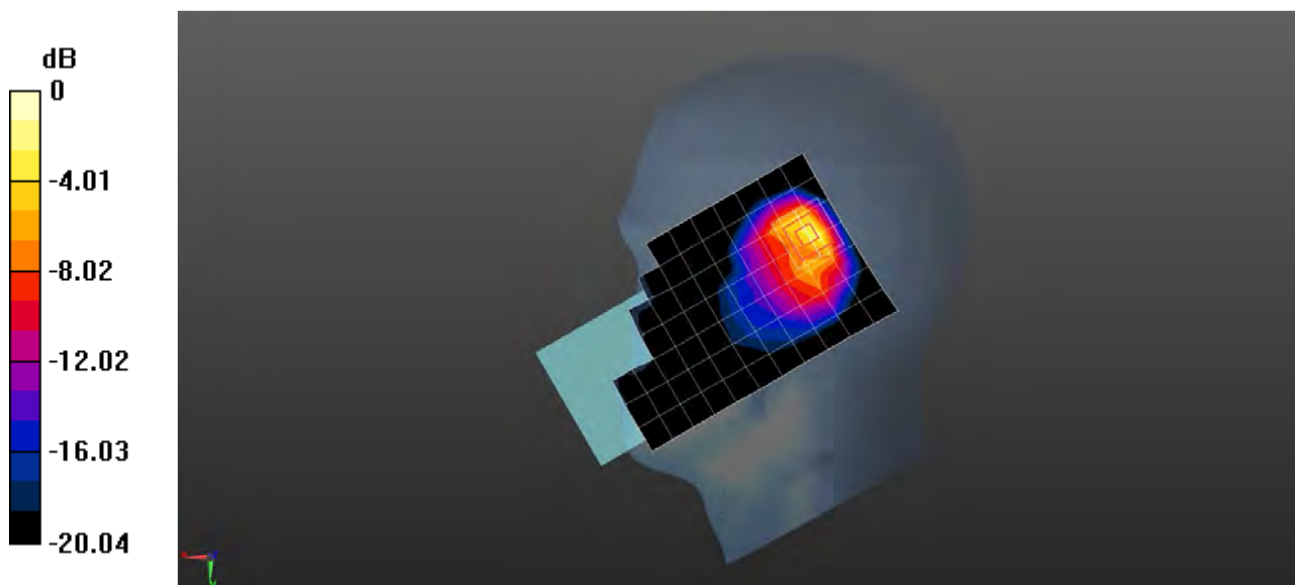

0 dB = 0.779 W/kg = -1.08 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band II RMC 9400CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.500 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.474 V/m; Power Drift = 0.06 dB



Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 0.540 W/kg

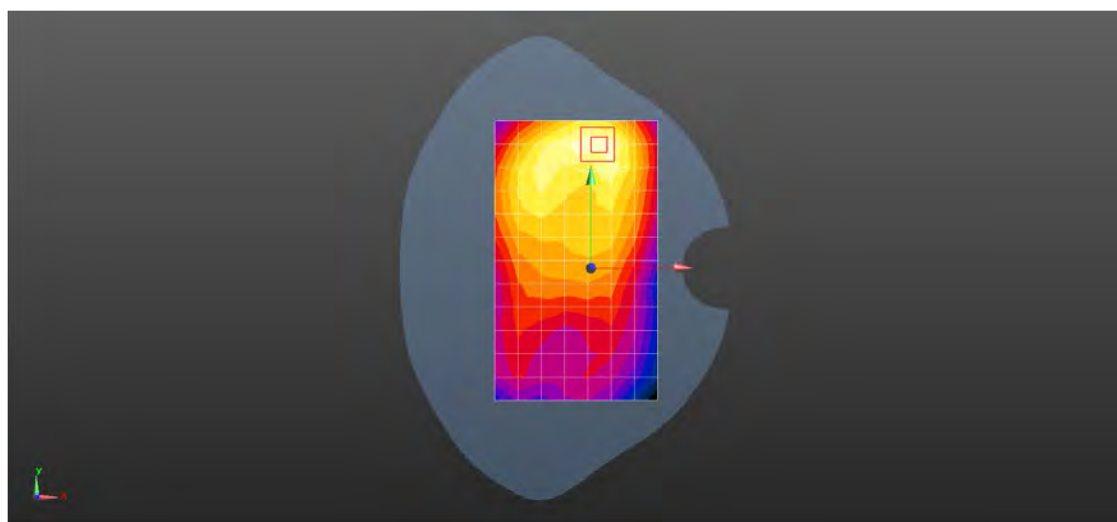

0 dB = 0.500 W/kg = -3.01 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band II RMC 9400CH Top side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.423 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.67 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.435 W/kg

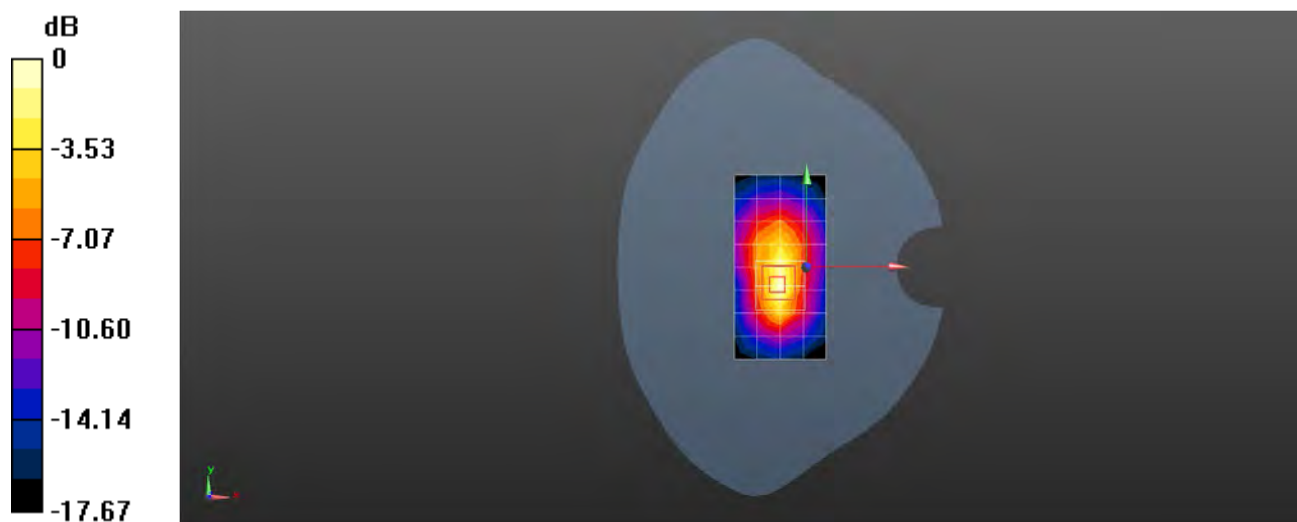

0 dB = 0.435 W/kg = -3.62 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band II RMC 9538CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1908$ MHz; $\sigma = 1.355$ S/m; $\epsilon_r = 39.848$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.08 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.25 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 9.48 W/kg

SAR(1 g) = 3.55 W/kg; SAR(10 g) = 1.36 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 38.9%

Maximum value of SAR (measured) = 7.18 W/kg

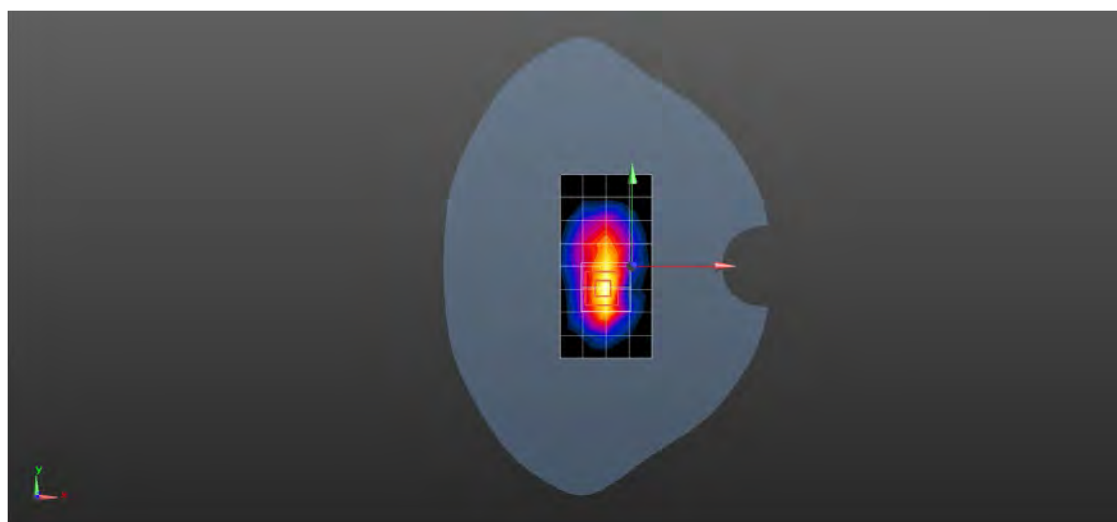

0 dB = 7.18 W/kg = 8.56 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band IV RMC 1513CH Right tilted Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1753$ MHz; $\sigma = 1.306$ S/m; $\epsilon_r = 40.335$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.571 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.30 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.321 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 1.23 W/kg

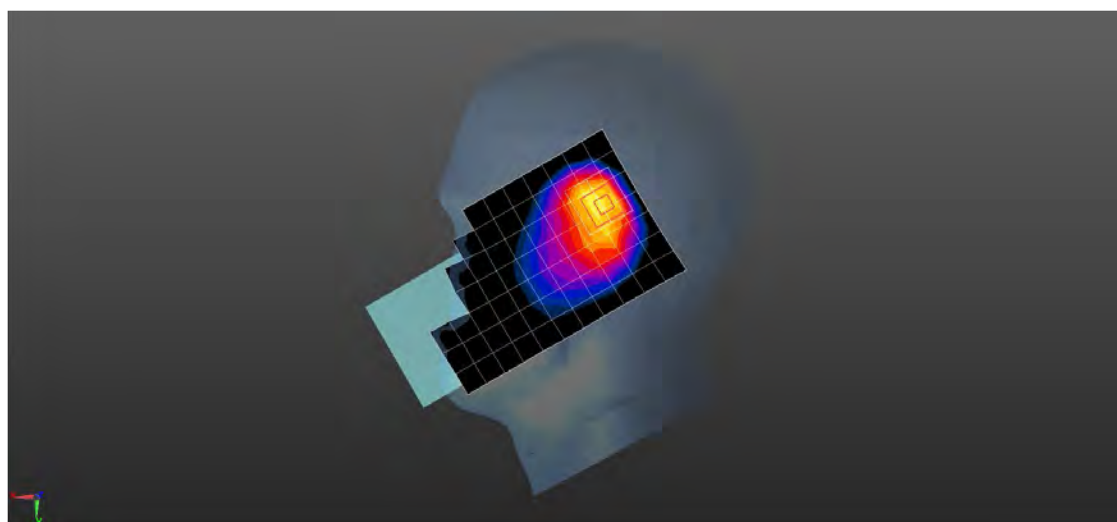

0 dB = 1.23 W/kg = 0.90 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band IV RMC 1412CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.296$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.432 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.68 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 0.488 W/kg

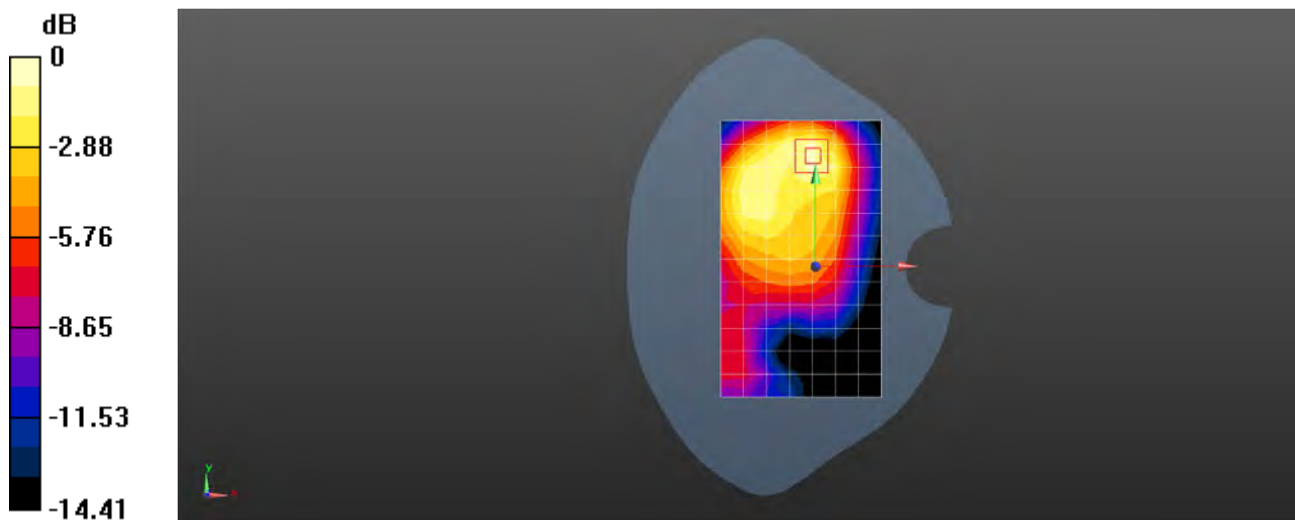

0 dB = 0.488 W/kg = -3.12 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band IV RMC 1412CH Top side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.296$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.467 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.95 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.484 W/kg

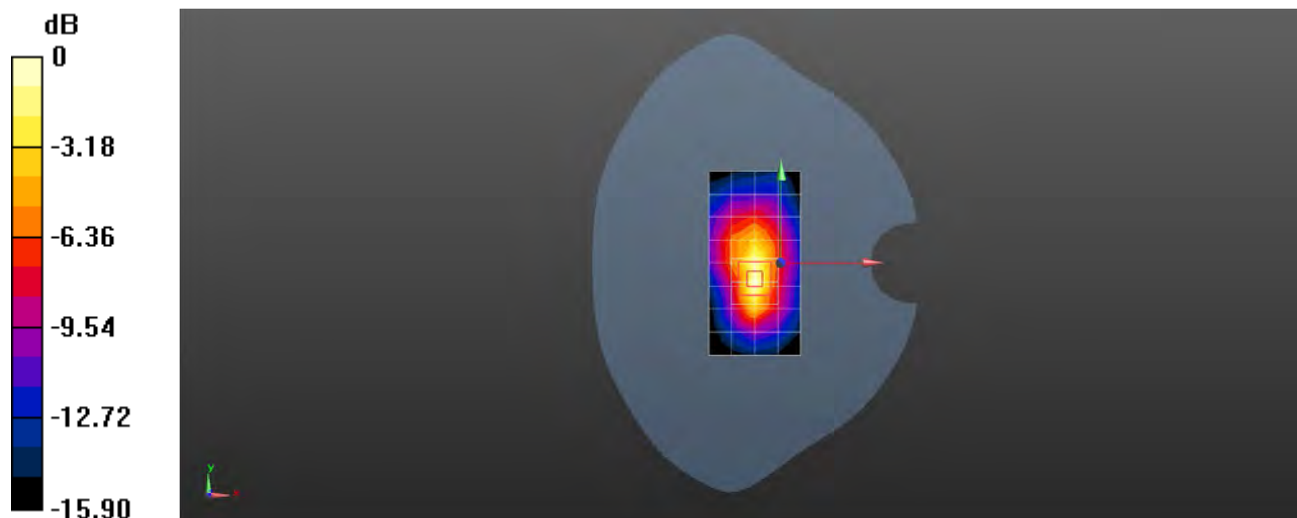

0 dB = 0.484 W/kg = -3.15 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band IV RMC 1412CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.296$ S/m; $\epsilon_r = 40.345$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.90 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 38.17 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 8.84 W/kg

SAR(1 g) = 2.89 W/kg; SAR(10 g) = 1.1 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 37%

Maximum value of SAR (measured) = 6.12 W/kg

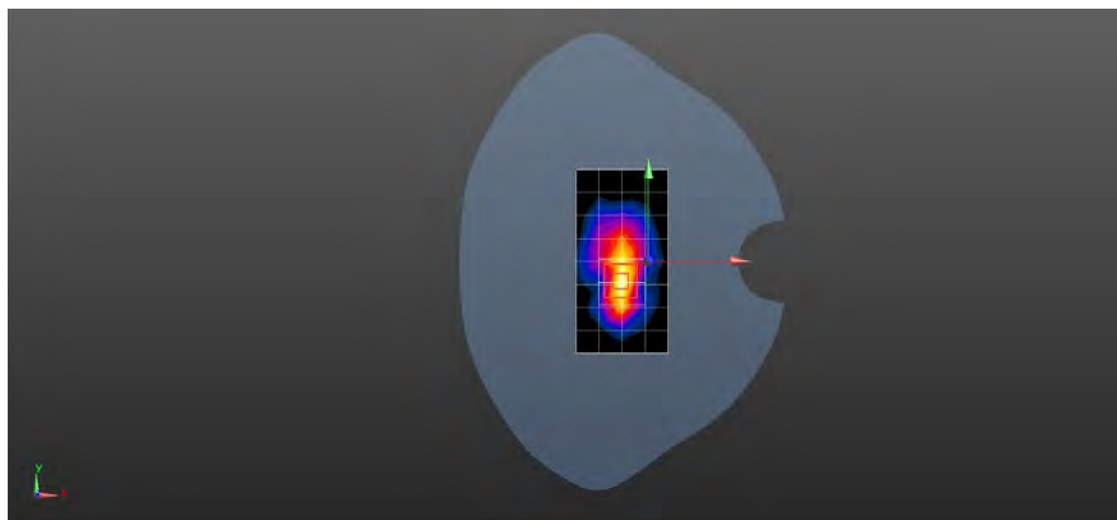

0 dB = 6.12 W/kg = 7.87 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band V RMC 4182CH Right cheek Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 41.877$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.638 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.35 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.8%

Maximum value of SAR (measured) = 0.771 W/kg

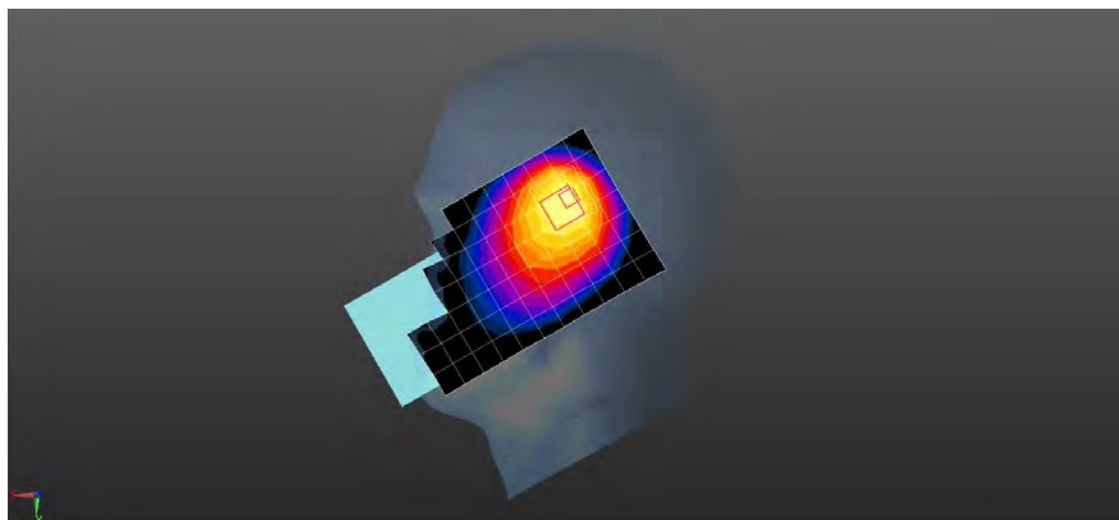

0 dB = 0.771 W/kg = -1.13 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band V RMC 4182CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 41.877$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.260 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.81 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 13.1 mm

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 0.262 W/kg

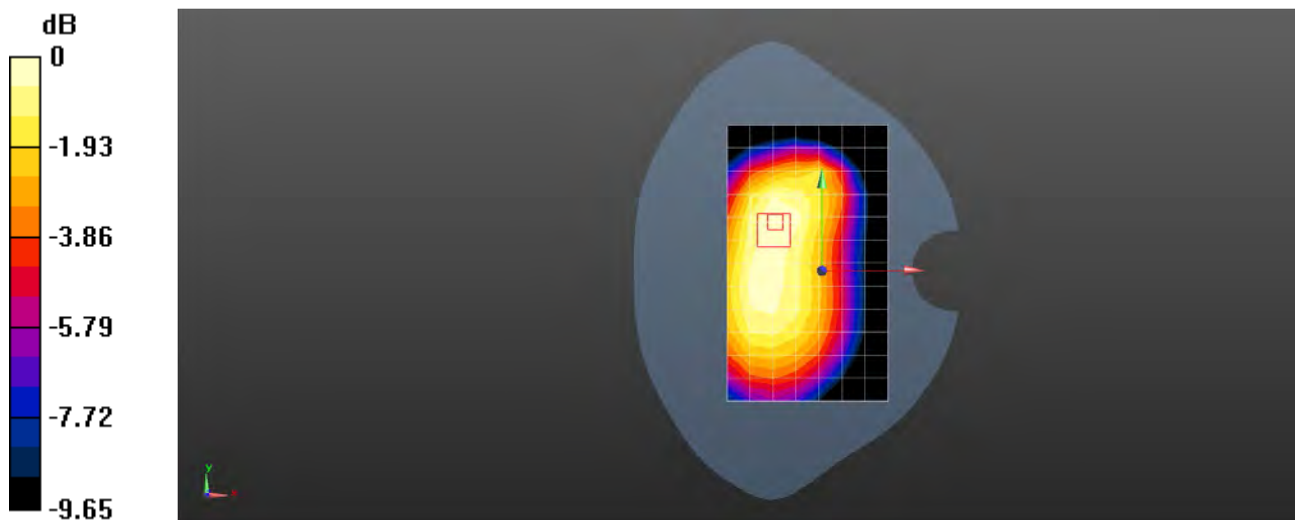

0 dB = 0.262 W/kg = -5.82 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WCDMA Band V RMC 4182CH Back side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 41.877$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.434 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.21 V/m; Power Drift = 0.10 dB



Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 0.422 W/kg

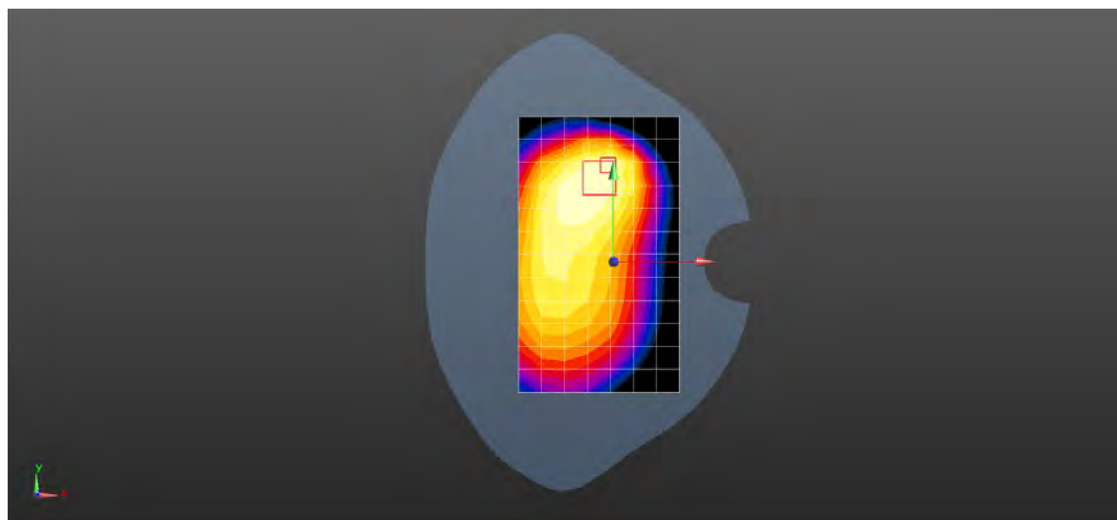

0 dB = 0.422 W/kg = -3.75 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 2 20M QPSK 50RB25 19100CH Right tilted Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 39.878$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.541 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.99 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 0.914 W/kg

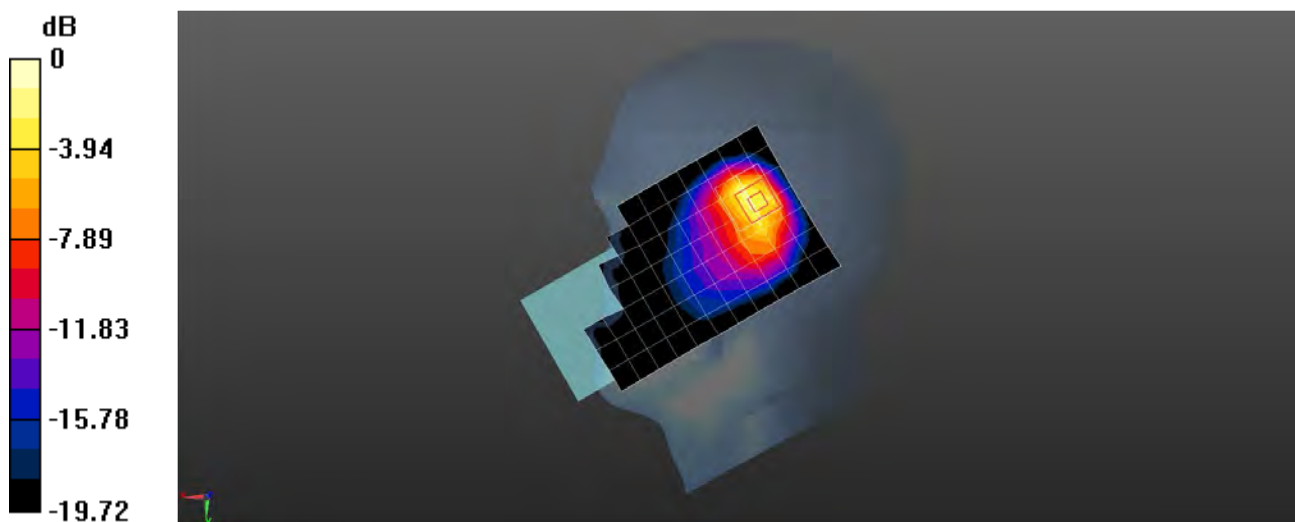

0 dB = 0.914 W/kg = -0.39 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 2 20M QPSK 1RB50 18900CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL1950;Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.599 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.569 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.599 W/kg

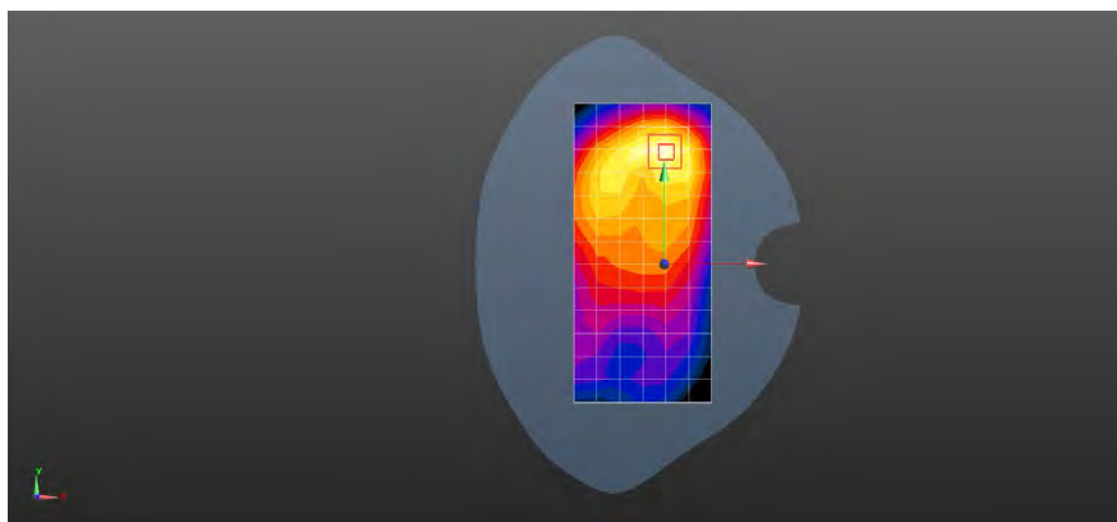

0 dB = 0.599 W/kg = -2.23 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 2 20M QPSK 50RB50 18900CH Bottom side 10mm Ant31

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.518 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.98 V/m; Power Drift = 0.10 dB



Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.216 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.531 W/kg

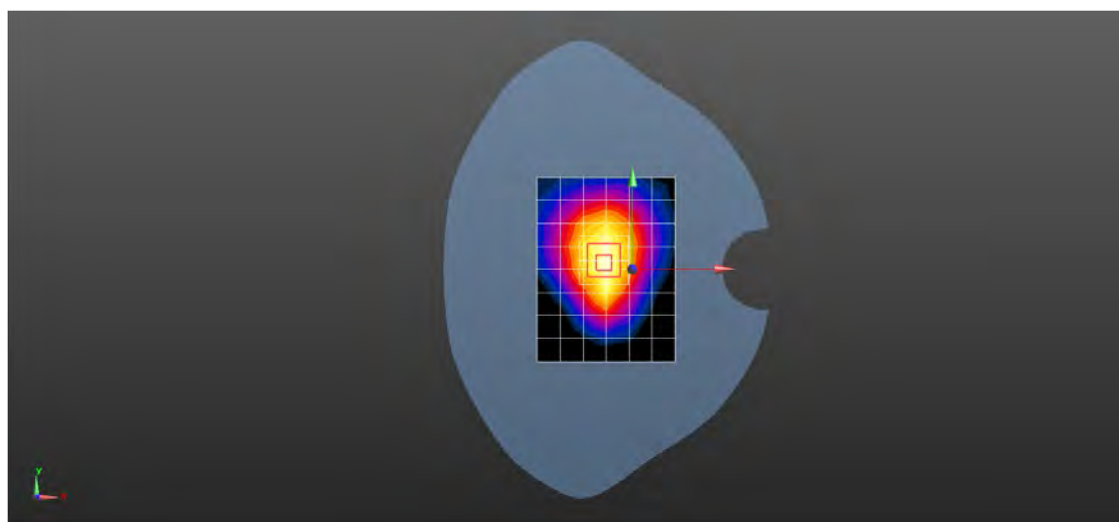

0 dB = 0.531 W/kg = -2.75 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 2 20M QPSK 1RB50 18900CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL1950;Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.37 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.57 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 8.21 W/kg

SAR(1 g) = 3.28 W/kg; SAR(10 g) = 1.27 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.3%

Maximum value of SAR (measured) = 6.41 W/kg

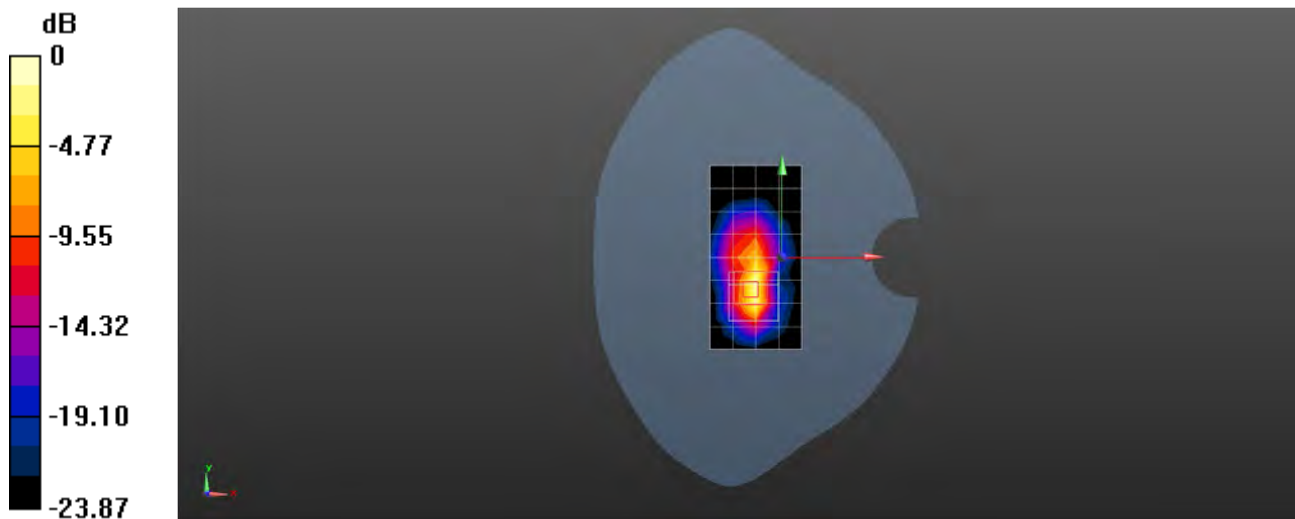

0 dB = 6.41 W/kg = 8.07 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 7 20M QPSK 1RB50 21350CH Right tilted Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 38.502$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.738 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.711 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 44.9%

Maximum value of SAR (measured) = 0.818 W/kg

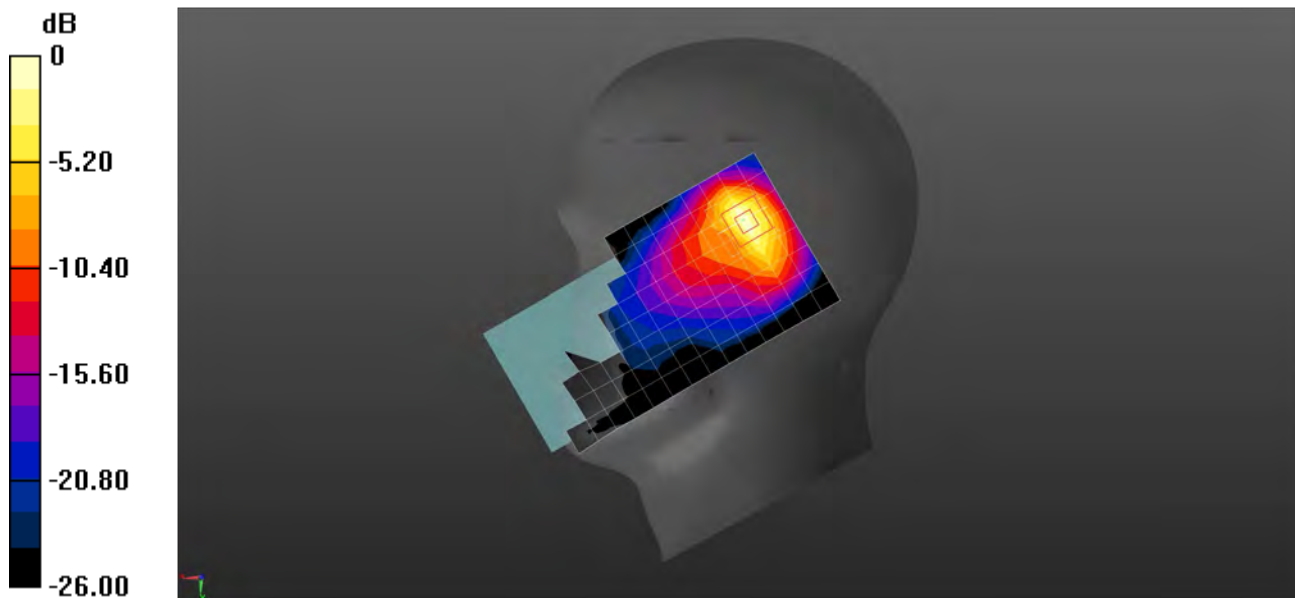

0 dB = 0.818 W/kg = -0.87 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 7 20M QPSK 1RB50 21100CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.754 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.360 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.676 W/kg

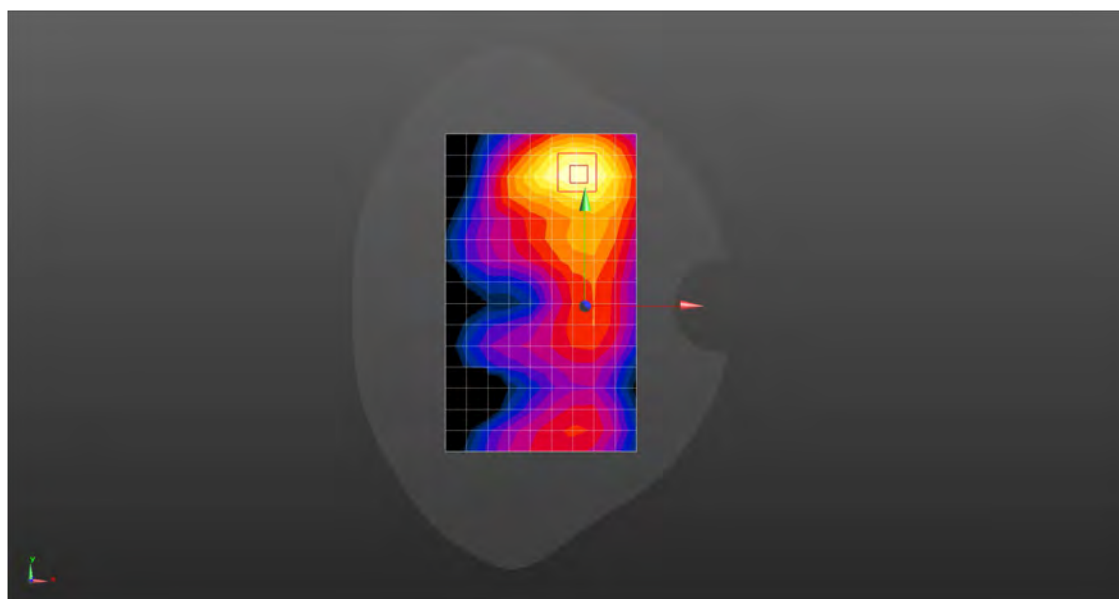

0 dB = 0.676 W/kg = -1.70 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 7 20M QPSK 1RB50 21100CH Left side 10mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.490 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.645 V/m; Power Drift = -0.05 dB



Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.594 W/kg

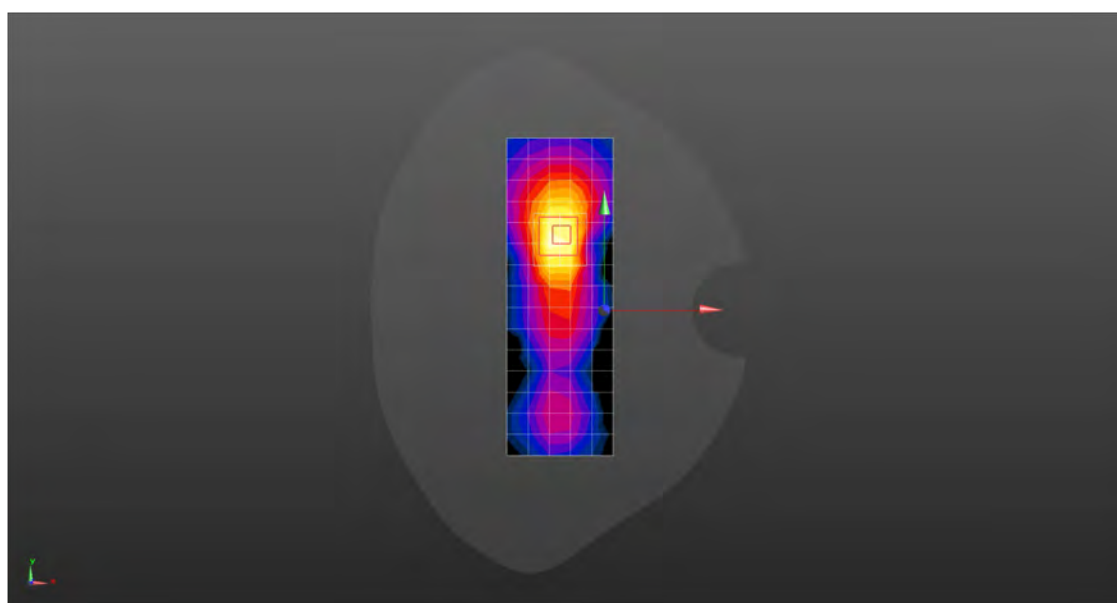

0 dB = 0.594 W/kg = -2.26 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 7 20M QPSK 1RB50 21100CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 3.32 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.26 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 3.89 W/kg; SAR(10 g) = 1.35 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 39.2%

Maximum value of SAR (measured) = 7.76 W/kg

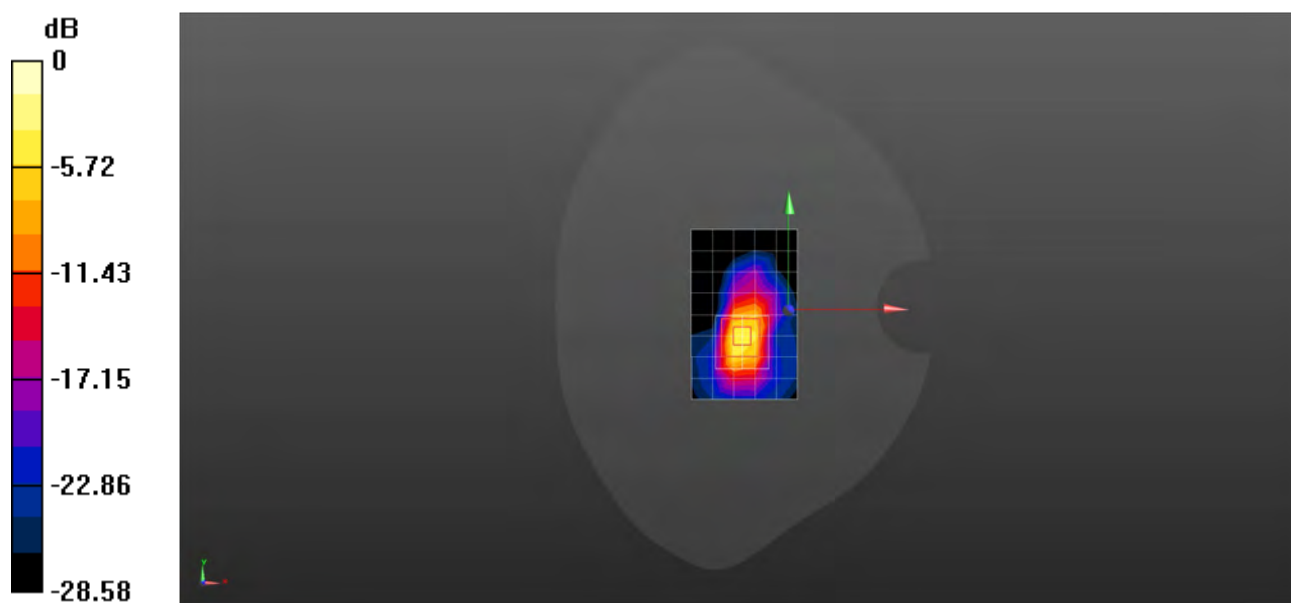

0 dB = 7.76 W/kg = 8.90 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 12 10M QPSK 1RB0 23060CH Right cheek Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.823 \text{ S/m}$; $\epsilon_r = 43.347$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.04, 9.04, 9.04); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.574 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.42 V/m ; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.430 W/kg ; SAR(10 g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 38.3%

Maximum value of SAR (measured) = 0.681 W/kg

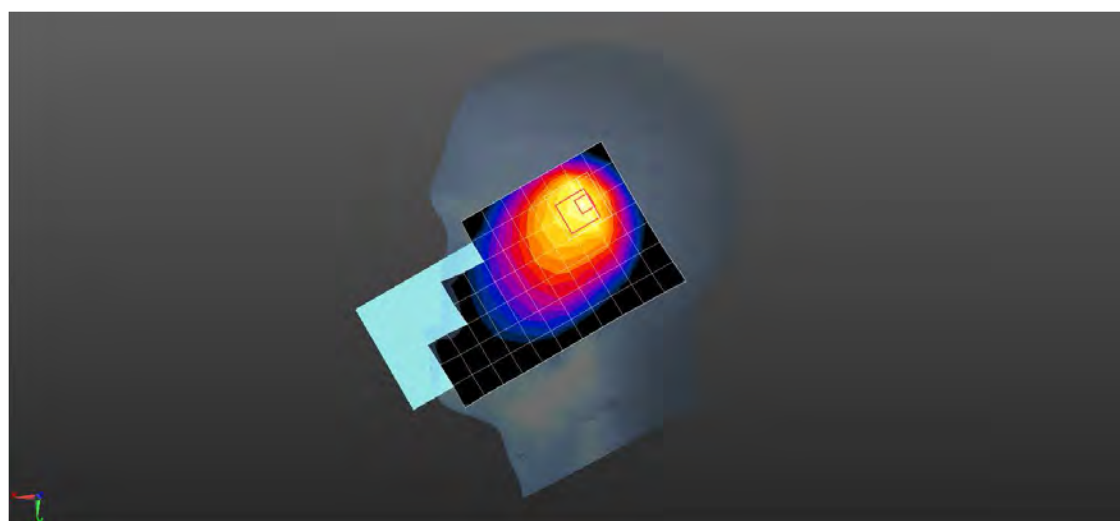

0 dB = 0.681 W/kg = -1.67 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 12 10M QPSK 1RB0 23130CH Back side 15mm Ant31

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.823 \text{ S/m}$; $\epsilon_r = 42.817$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.04, 9.04, 9.04); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.205 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.41 V/m ; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.171 W/kg ; SAR(10 g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 14.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.5%

Maximum value of SAR (measured) = 0.206 W/kg

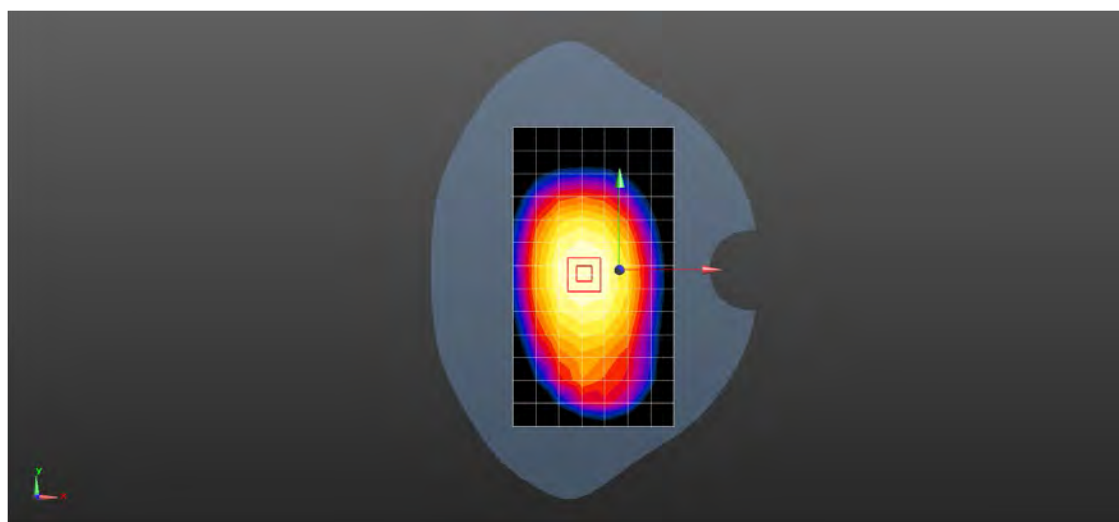

$0 \text{ dB} = 0.206 \text{ W/kg} = -6.86 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 12 10M QPSK 1RB0 23130CH Left side 10mm Ant31

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.823 \text{ S/m}$; $\epsilon_r = 42.817$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.04, 9.04, 9.04); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.275 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.17 V/m ; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.228 W/kg ; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.7%

Maximum value of SAR (measured) = 0.299 W/kg

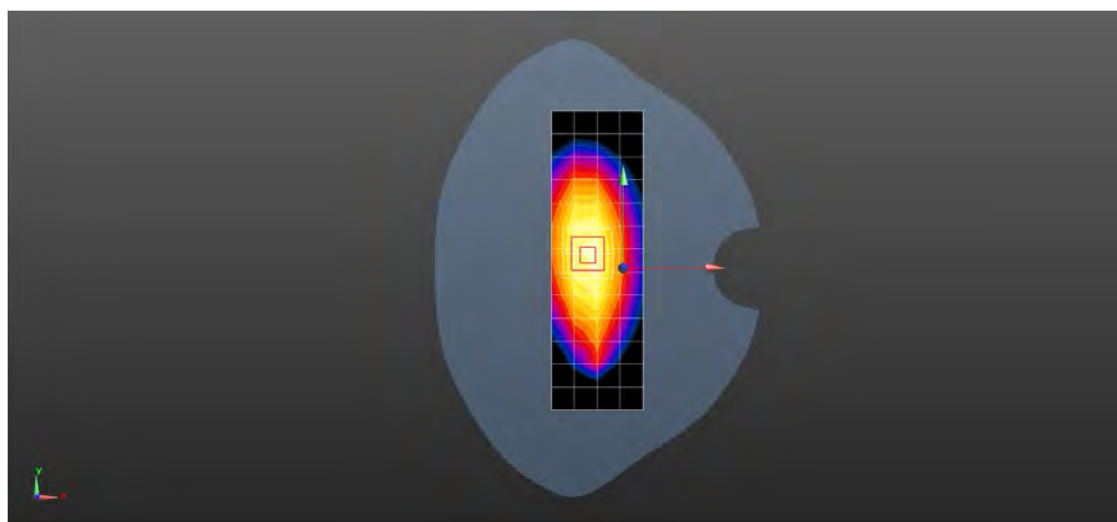

0 dB = 0.299 W/kg = -5.24 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 13 10M QPSK 1RB0 23230CH Right cheek Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.348$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.04, 9.04, 9.04); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.654 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.27 V/m ; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.477 W/kg ; SAR(10 g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 0.814 W/kg

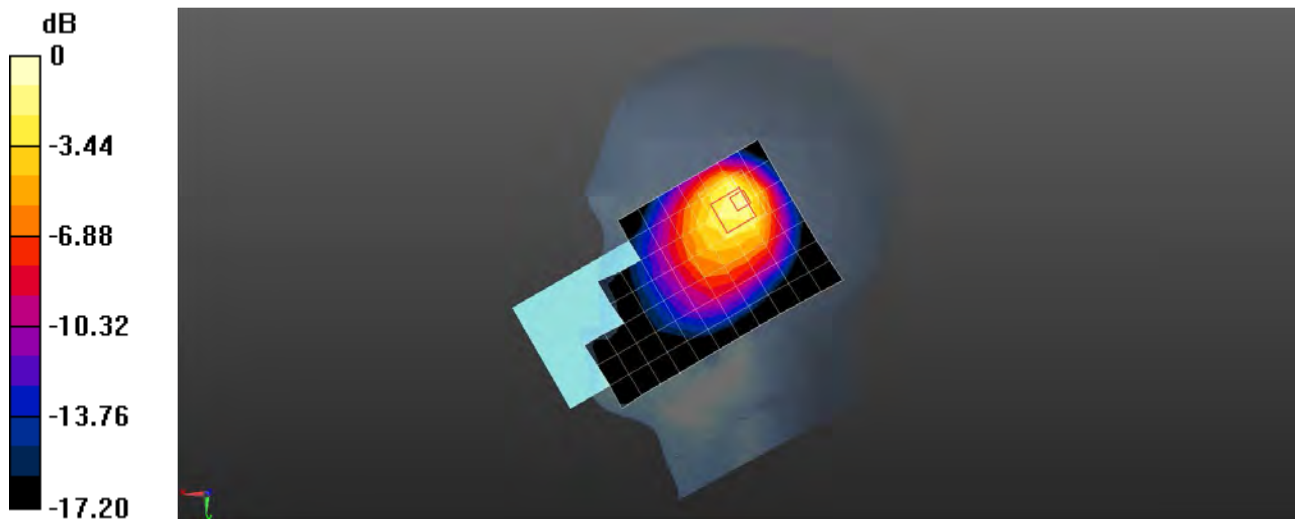

0 dB = 0.814 W/kg = -0.89 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 13 10M QPSK 1RB0 23230CH Back side 15mm Ant31

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.348$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.04, 9.04, 9.04); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.261 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.74 V/m ; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.218 W/kg ; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.4%

Maximum value of SAR (measured) = 0.266 W/kg

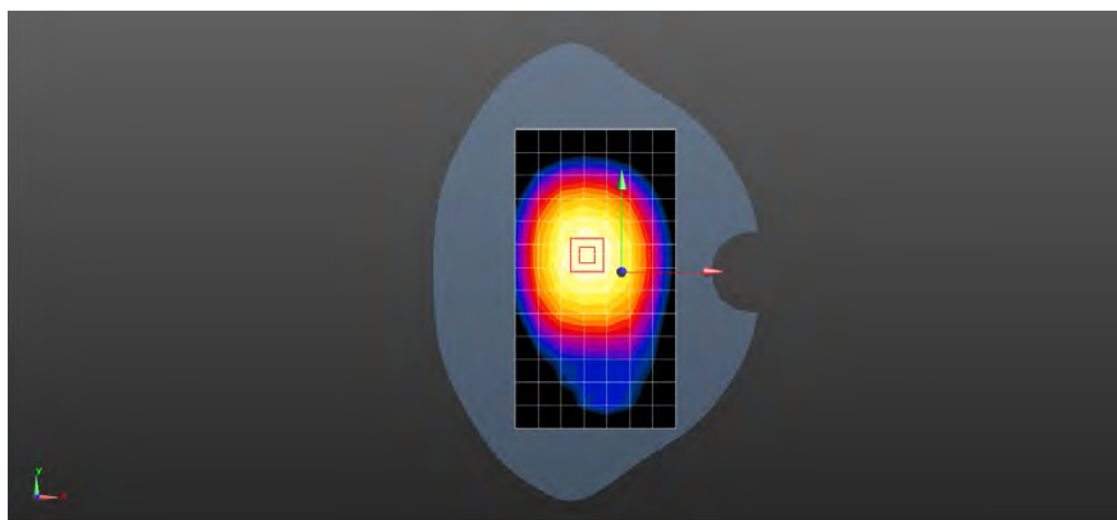

0 dB = 0.266 W/kg = -5.75 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 13 10M QPSK 1RB0 23230CH Left side 10mm Ant31

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.348$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(9.04, 9.04, 9.04); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.291 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.07 V/m ; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.240 W/kg ; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 67%

Maximum value of SAR (measured) = 0.315 W/kg

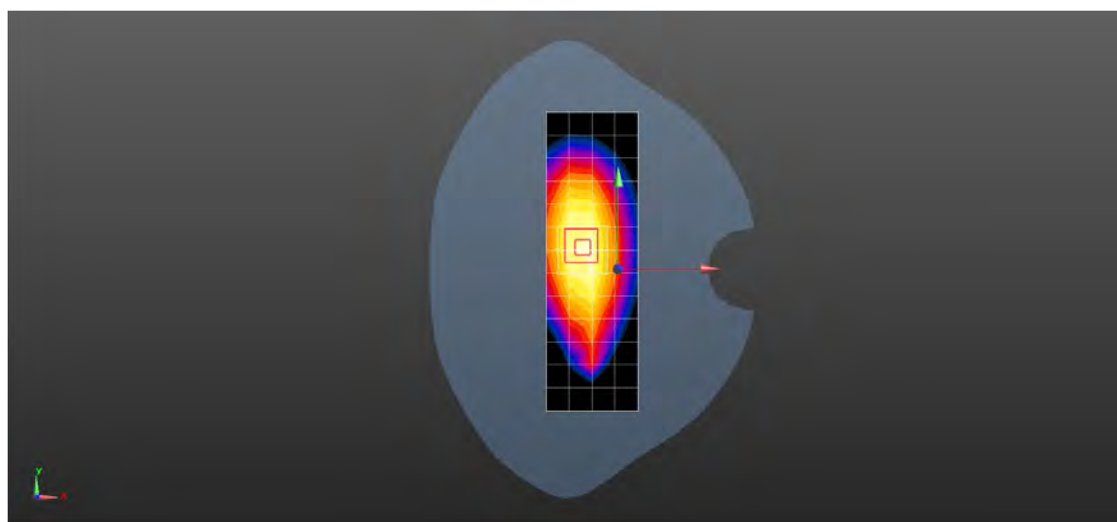

$0 \text{ dB} = 0.315 \text{ W/kg} = -5.02 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 26 15M QPSK 1RB38 26765CH Right cheek Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 821.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 821.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.779$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.863 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.01 V/m; Power Drift = 0.09 dB



Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.333 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 39%

Maximum value of SAR (measured) = 0.969 W/kg

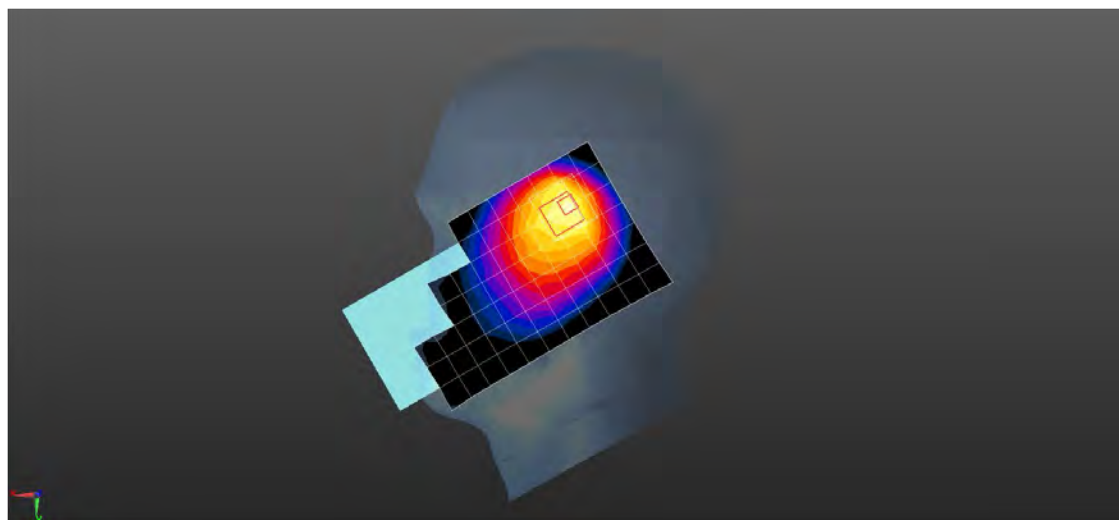

0 dB = 0.969 W/kg = -0.14 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 26 15M QPSK 1RB38 26965CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.714$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.189 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.20 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.120 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.5%

Maximum value of SAR (measured) = 0.194 W/kg

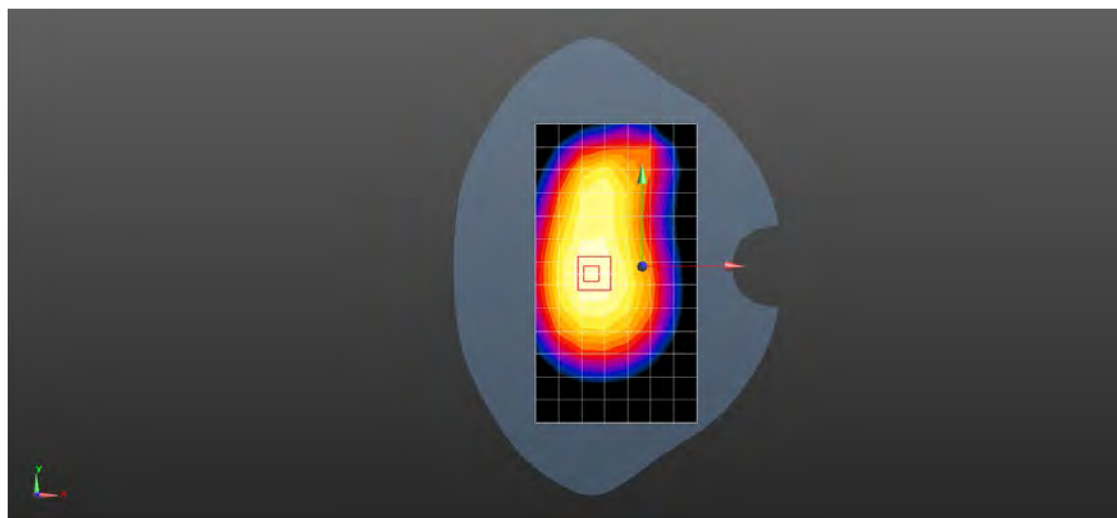

0 dB = 0.194 W/kg = -7.12 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 26 15M QPSK 1RB38 26965CH Back side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.714$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.269 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.90 V/m; Power Drift = 0.06 dB



Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.160 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 0.280 W/kg

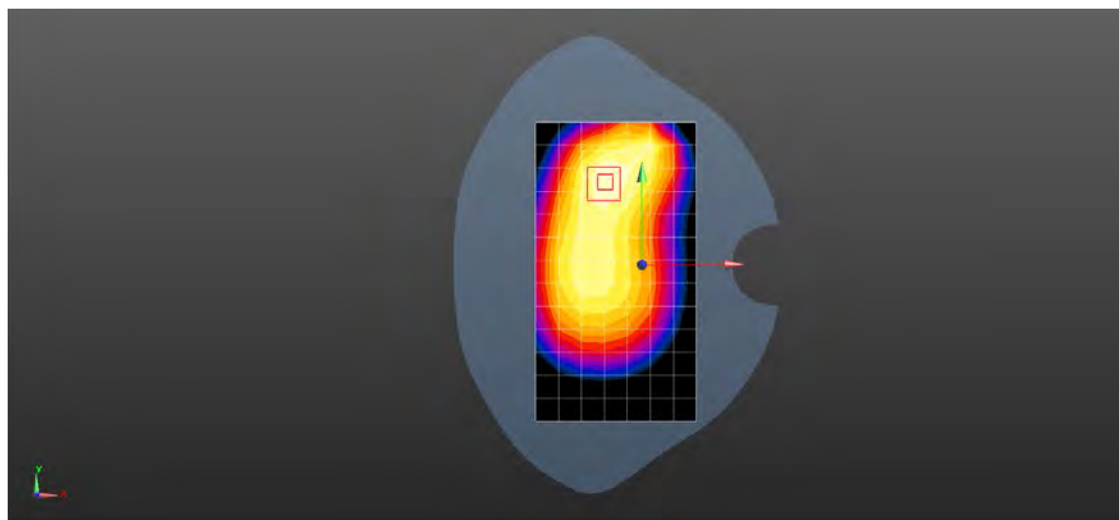

0 dB = 0.280 W/kg = -5.53 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 41 20M QPSK 1RB50 40620CH Right cheek Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58016

Medium: HSL2600;Medium parameters used: $f = 2593$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 38.467$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77) ; Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.860 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.469 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 1.29 W/kg

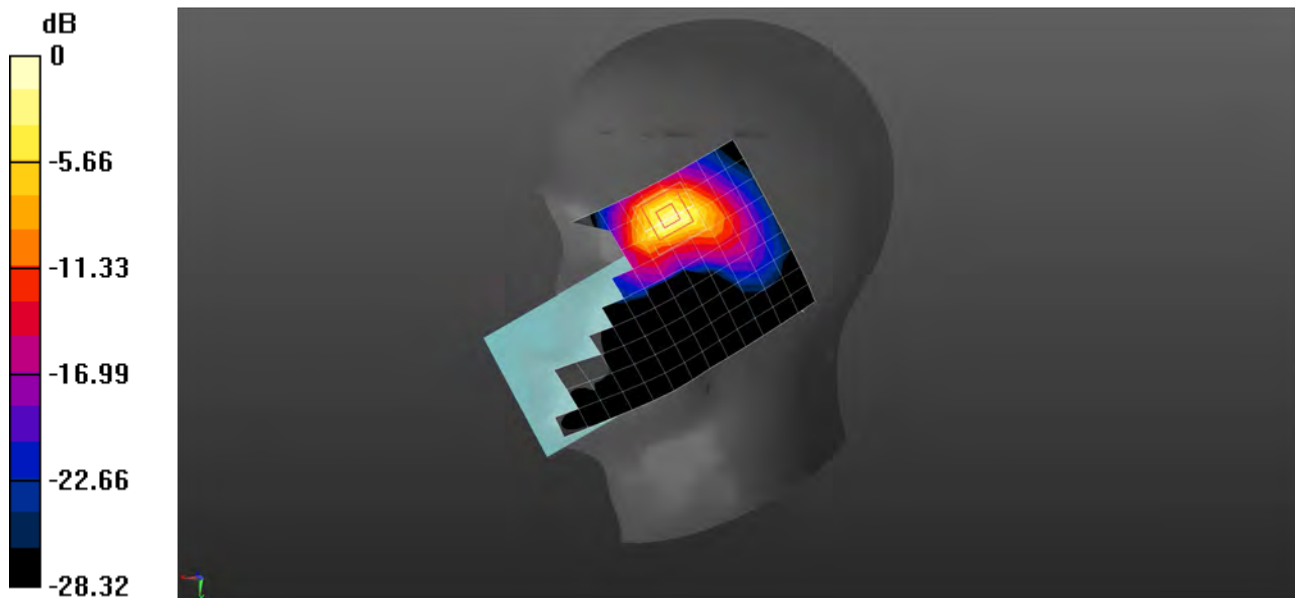

0 dB = 1.29 W/kg = 1.12 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 41 20M QPSK 50RB0 40185CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2549.5 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2549.5$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.505$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.640 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.466 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.803 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.673 W/kg

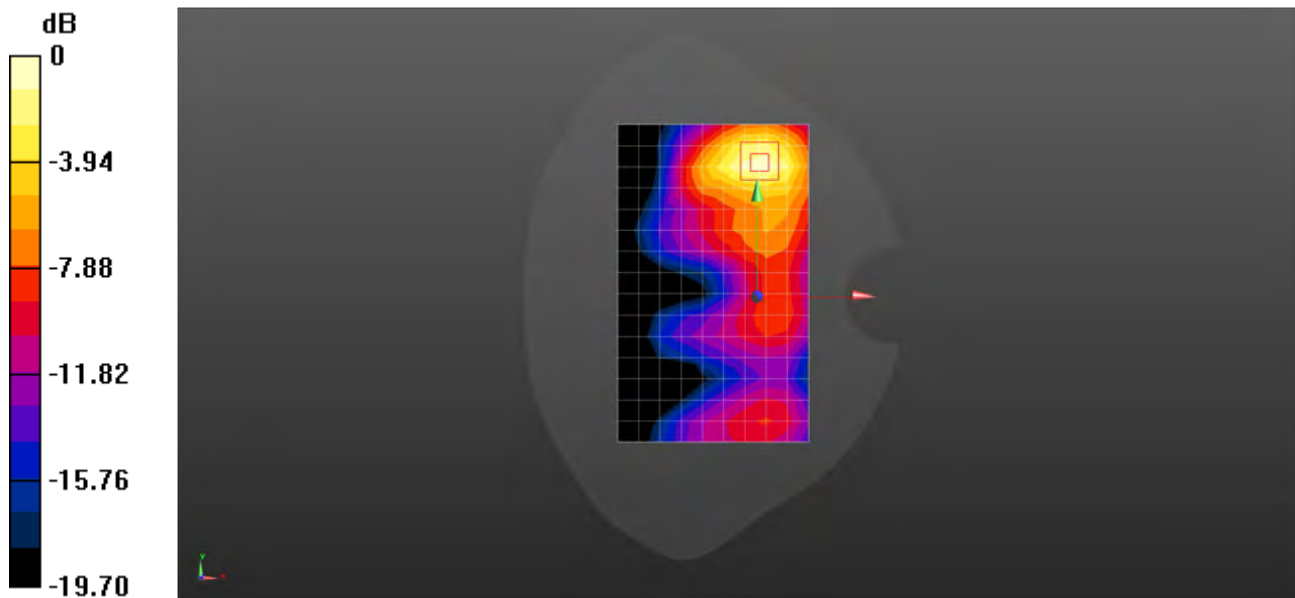

0 dB = 0.673 W/kg = -1.72 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 41 20M QPSK 50RB25 40620CH Left side 10mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 38.467$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.653 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.333 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.187 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.4%

Maximum value of SAR (measured) = 0.755 W/kg

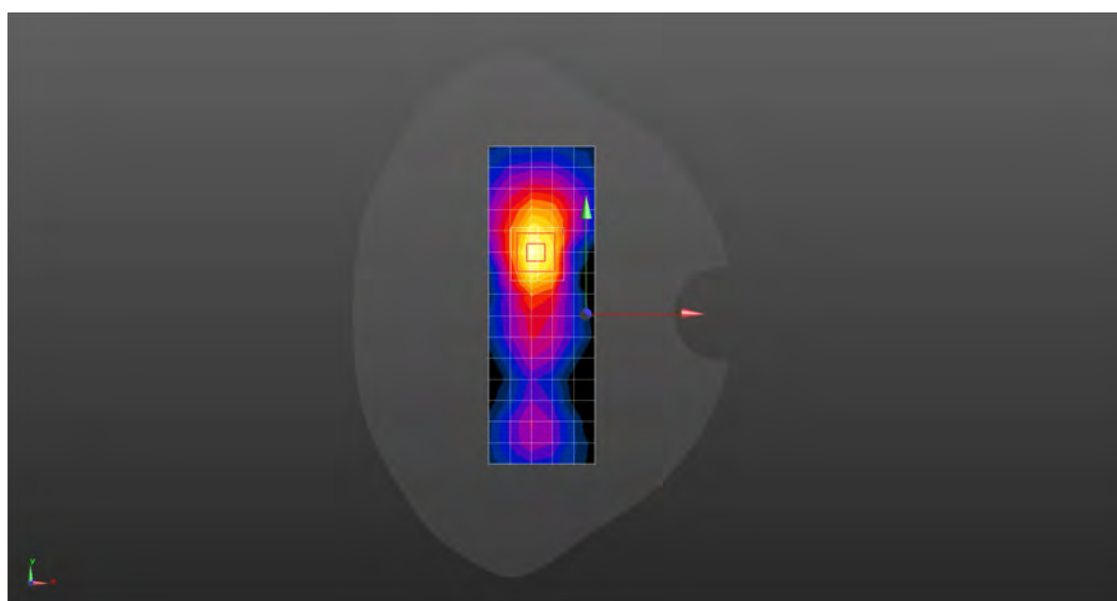

0 dB = 0.755 W/kg = -1.22 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 41 20M QPSK 50RB0 40185CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2549.5 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2549.5$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.505$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.75 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.70 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 13.3 W/kg

SAR(1 g) = 4.73 W/kg; SAR(10 g) = 1.61 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 40.8%

Maximum value of SAR (measured) = 9.43 W/kg

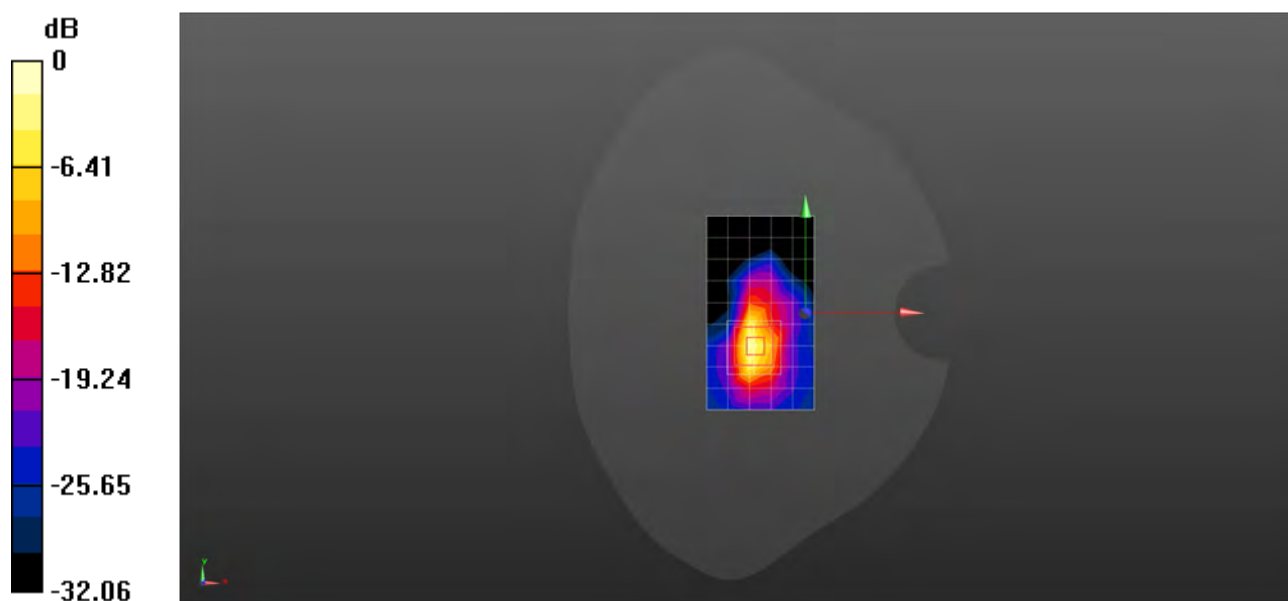

0 dB = 9.43 W/kg = 9.75 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 66 20M QPSK 50RB0 132572CH Right tilted Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1770$ MHz; $\sigma = 1.314$ S/m; $\epsilon_r = 40.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.782 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.79 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.954 W/kg

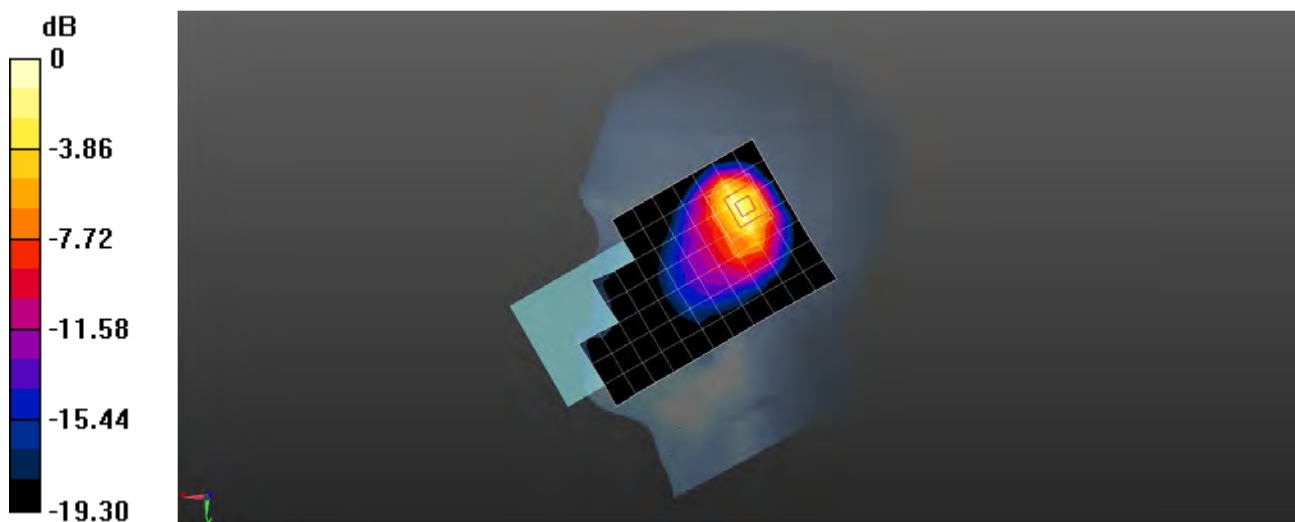

0 dB = 0.954 W/kg = -0.20 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 66 20M QPSK 1RB99 132322CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.302$ S/m; $\epsilon_r = 40.339$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.346 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.178 V/m; Power Drift = -0.07 dB



Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.293 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.352 W/kg

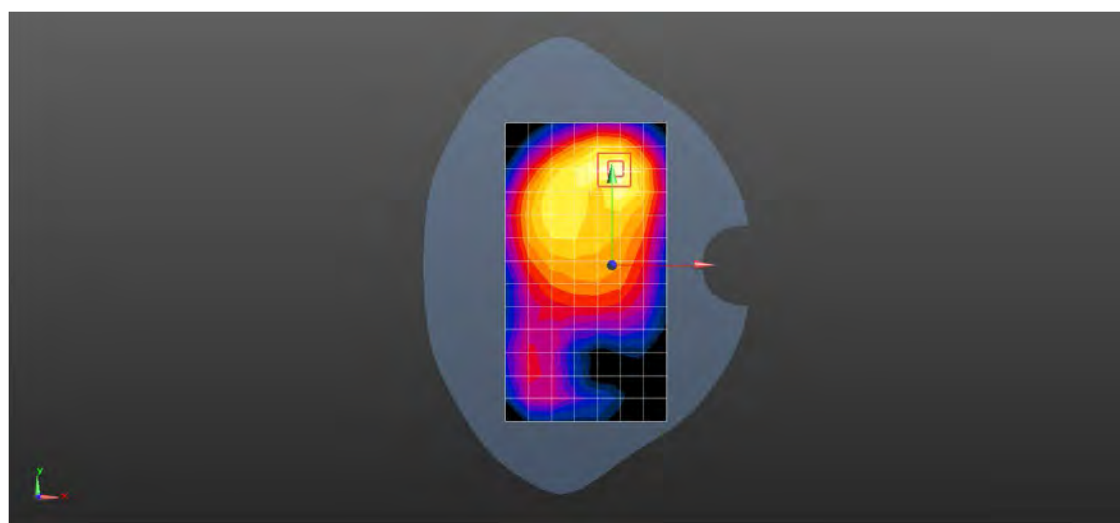

0 dB = 0.352 W/kg = -4.53 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 66 20M QPSK 50RB50 132322CH Top side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1745$ MHz; $\sigma = 1.302$ S/m; $\epsilon_r = 40.339$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.594 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.03 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.769 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.643 W/kg

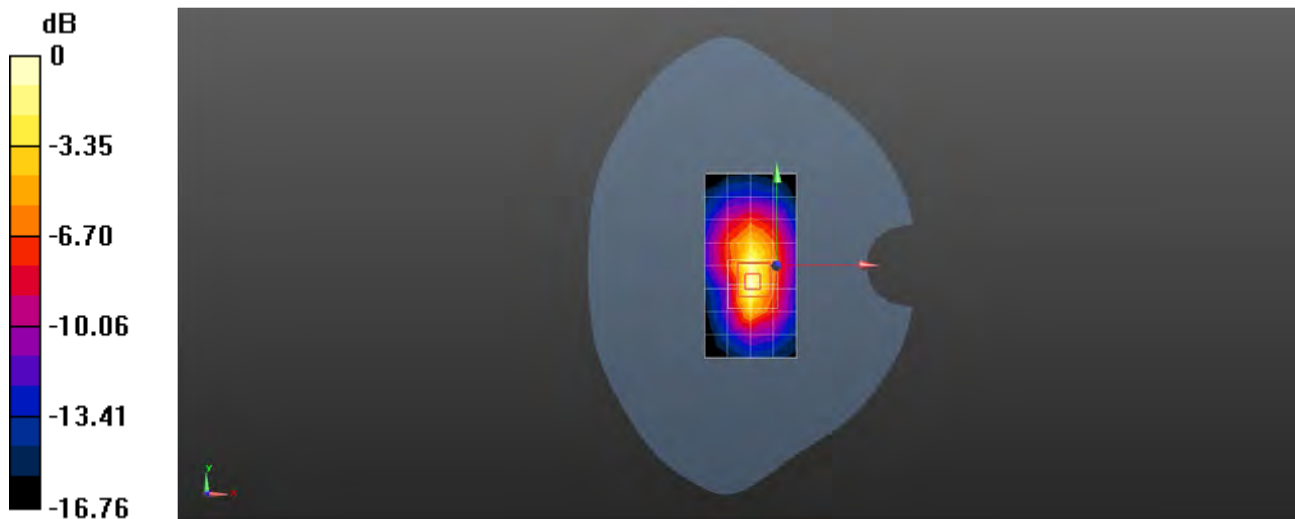

0 dB = 0.643 W/kg = -1.92 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 LTE Band 66 20M QPSK 50RB50 132572CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079999072

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1770$ MHz; $\sigma = 1.314$ S/m; $\epsilon_r = 40.327$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.28 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.18 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 8.97 W/kg

SAR(1 g) = 3.41 W/kg; SAR(10 g) = 1.31 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 38.8%

Maximum value of SAR (measured) = 6.46 W/kg

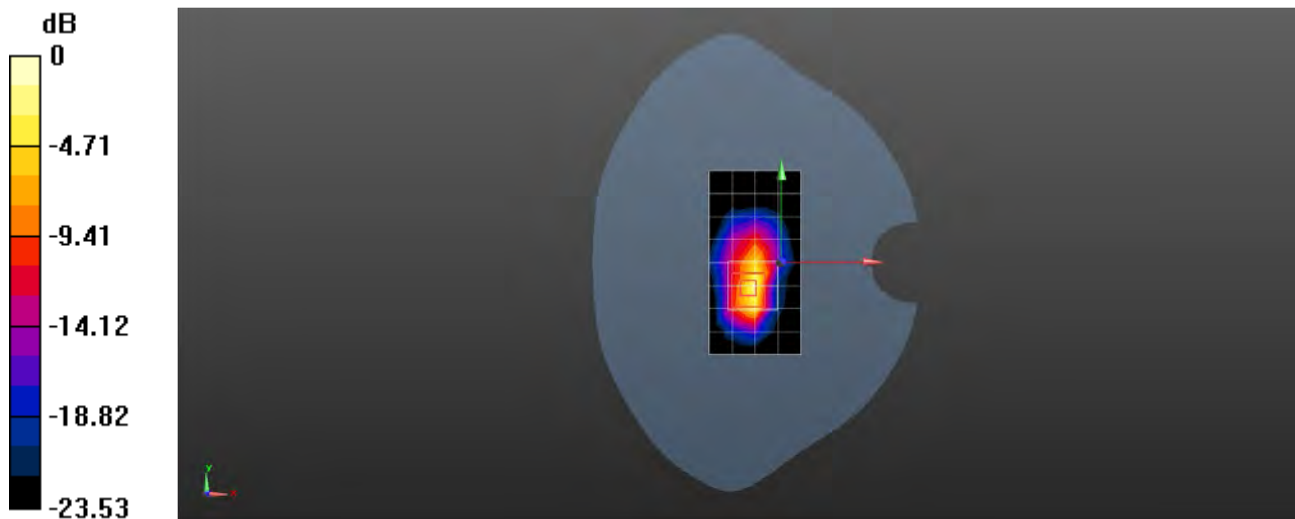

0 dB = 6.46 W/kg = 8.10 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N2 20M QPSK 50RB28 376000CH Right tilted Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.567 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.89 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 0.575 W/kg

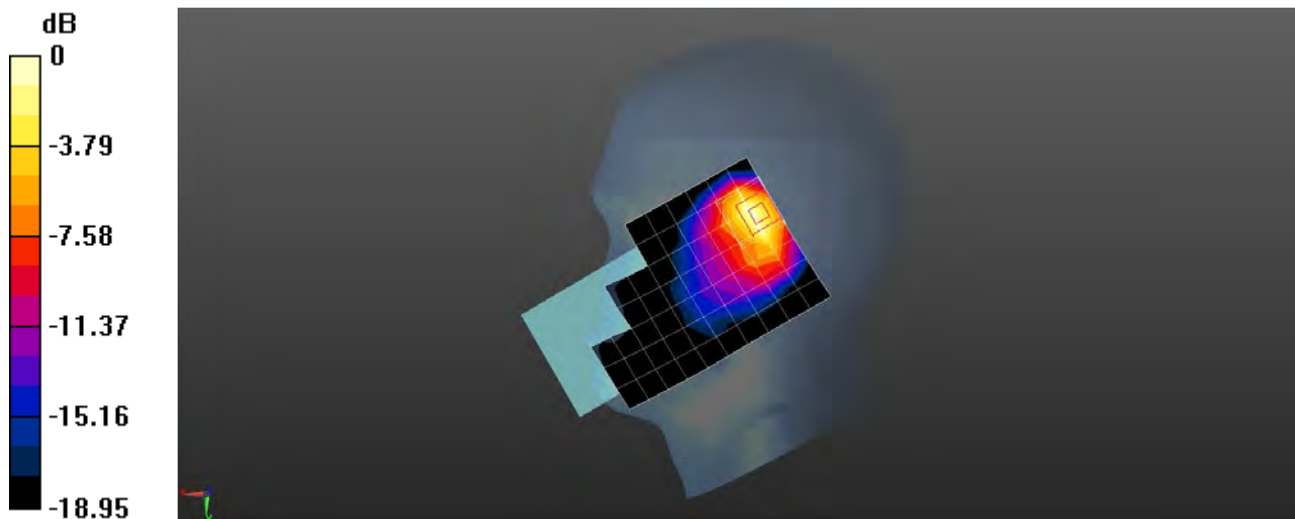

0 dB = 0.575 W/kg = -2.40 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N2 20M QPSK 1RB104 376000CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.611 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.898 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.548 W/kg

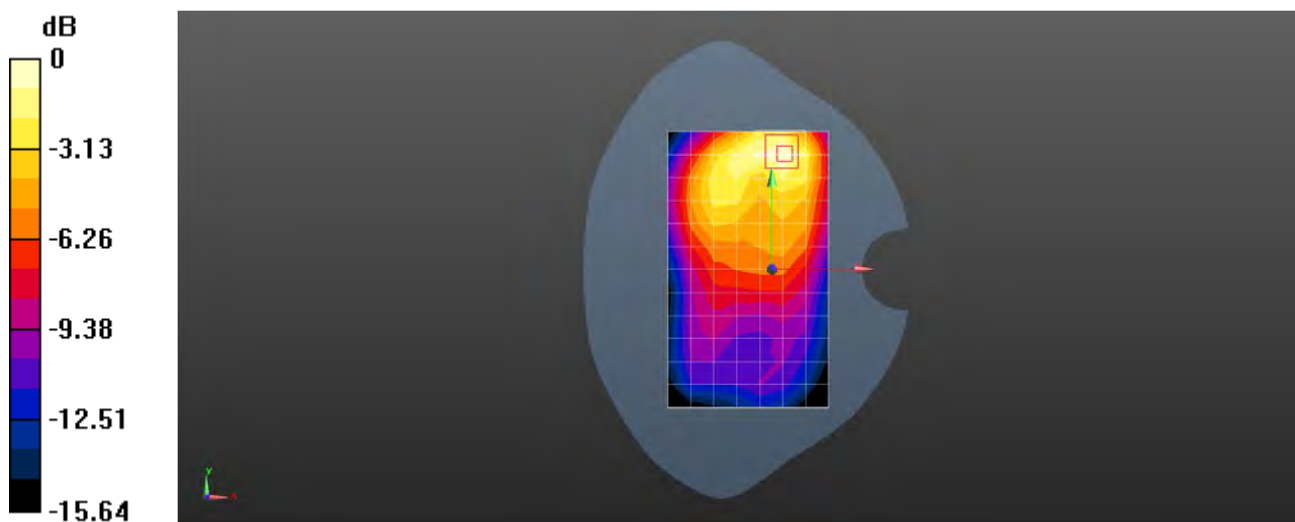

0 dB = 0.548 W/kg = -2.61 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N2 20M QPSK 50RB28 372000CH Bottom side 10mm Ant31

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.923$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.760 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.90 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.885 W/kg

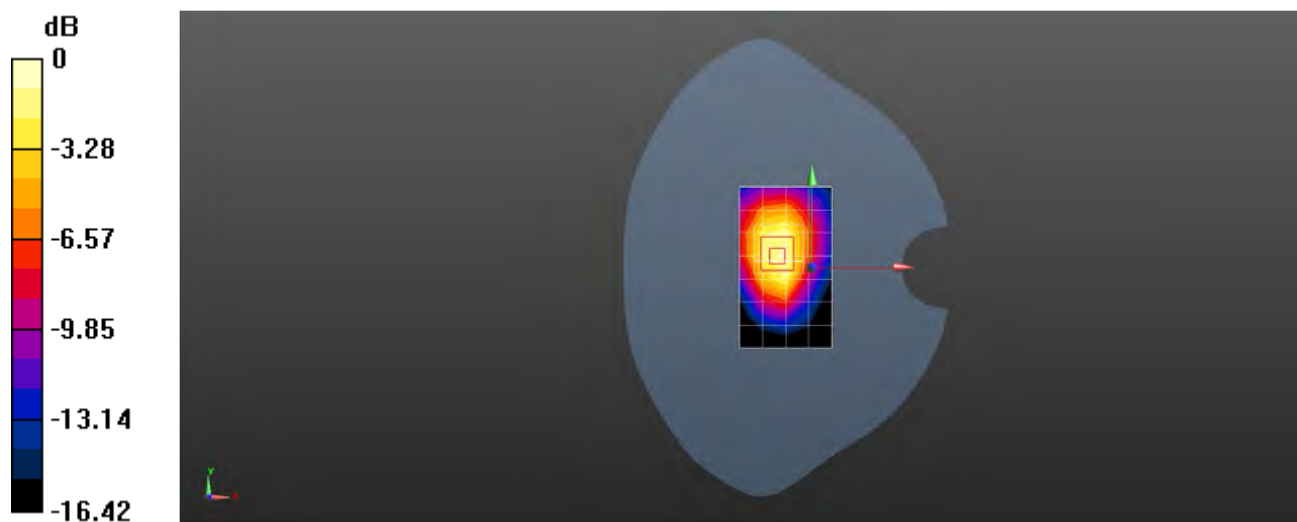

0 dB = 0.885 W/kg = -0.53 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N2 20M QPSK 1RB1 380000CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 39.878$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.38, 7.38, 7.38); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.14 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.47 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 9.13 W/kg

SAR(1 g) = 3.62 W/kg; SAR(10 g) = 1.38 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 38.9%

Maximum value of SAR (measured) = 6.70 W/kg

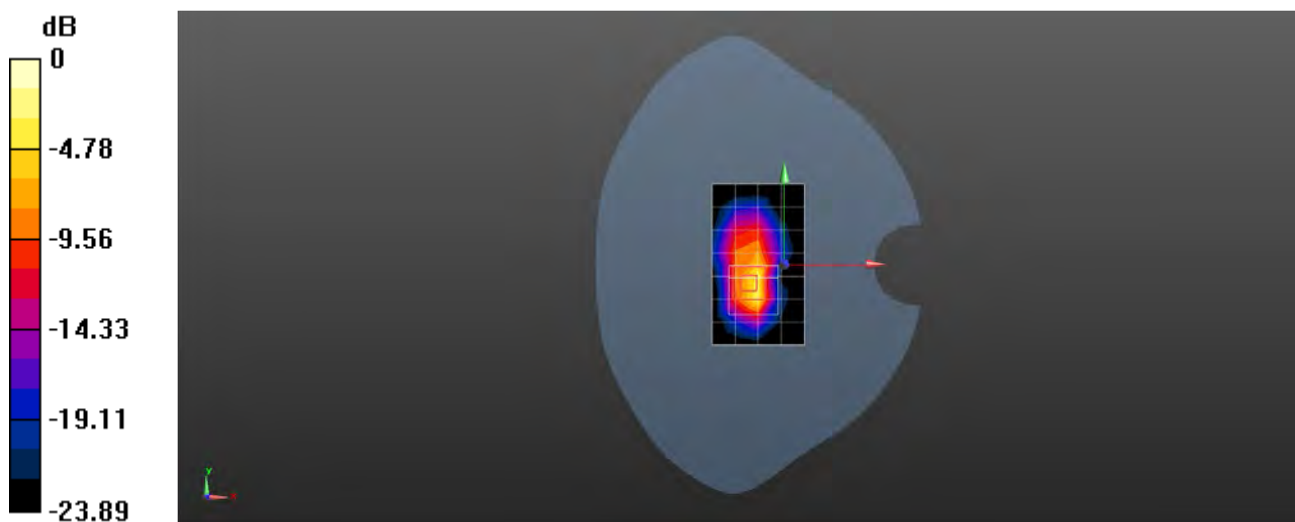

0 dB = 6.70 W/kg = 8.26 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N7 50M QPSK 1RB135 509000CH Right tilted Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 2545 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2545$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.505$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.806 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.474 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 0.951 W/kg

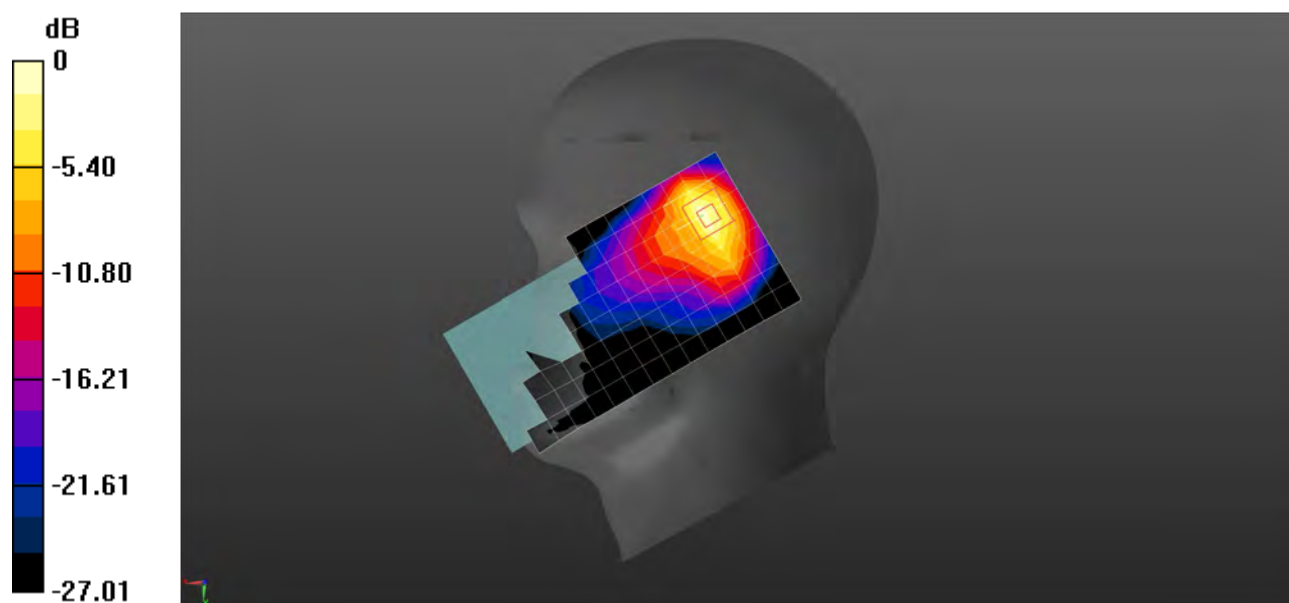

0 dB = 0.951 W/kg = -0.22 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N7 50M QPSK 1RB135 507000CH Back side 15mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 38.515$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.547 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.775 V/m; Power Drift = 0.00 dB



Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.206 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 0.626 W/kg

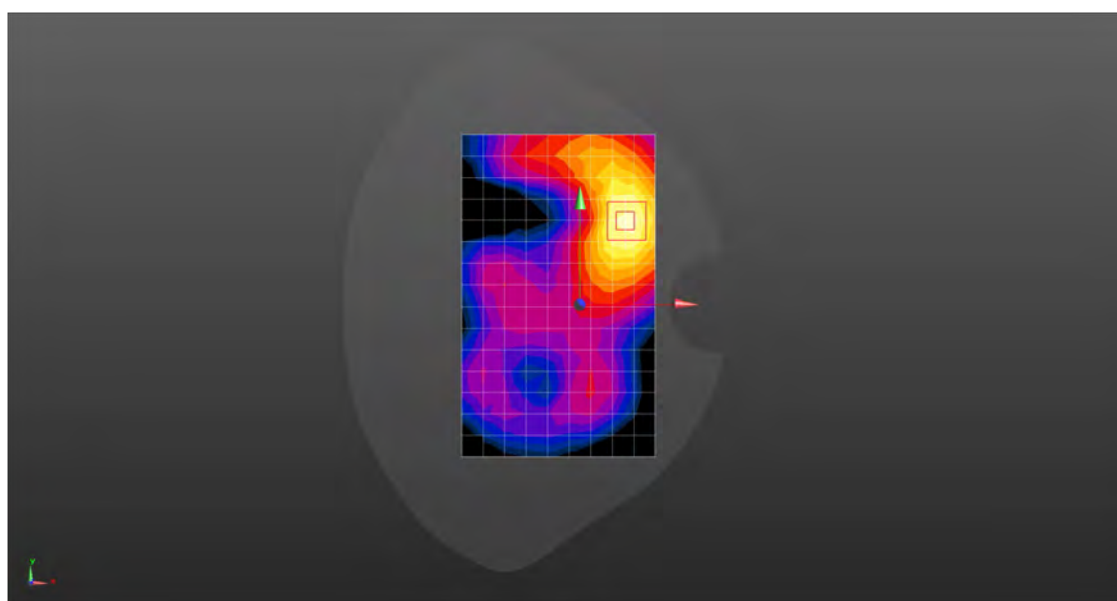

0 dB = 0.626 W/kg = -2.03 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N7 50M QPSK 1RB135 509000CH Top side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 2545 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2545$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.505$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.399 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.065 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.140 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 0.521 W/kg

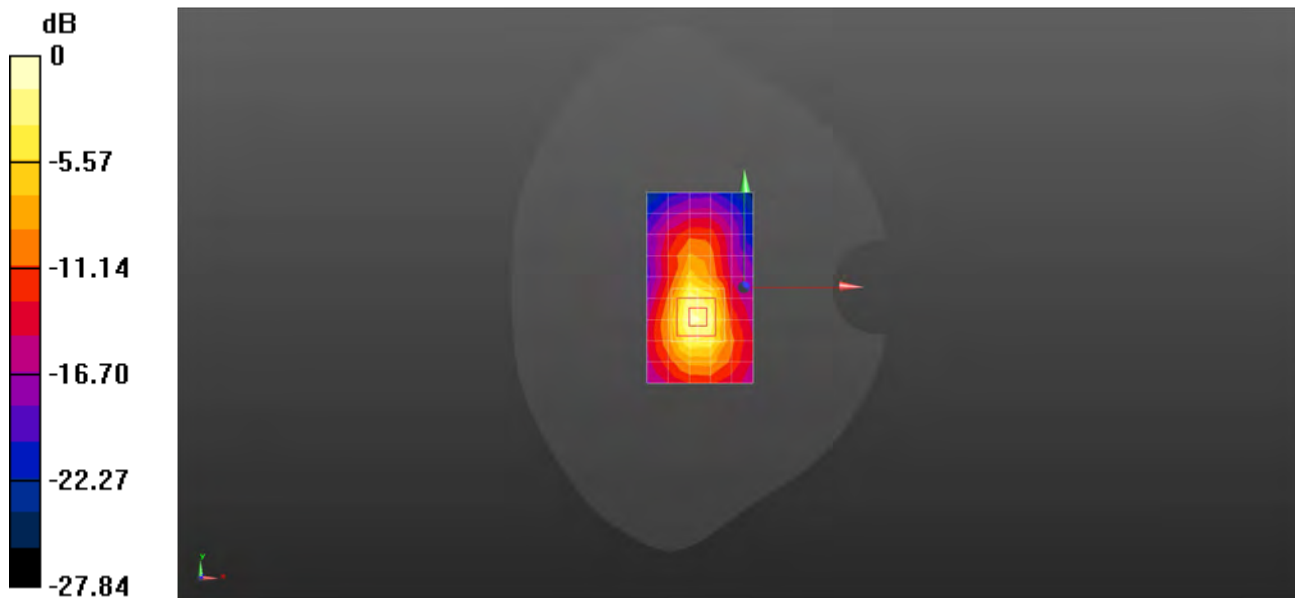

Test Laboratory: SGS-SAR Lab

V2440 5G NR N7 50M QPSK 135RB67 505000CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 2502.5 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2502.5$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 38.544$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 8.19 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.10 V/m; Power Drift = -0.07 dB



Peak SAR (extrapolated) = 11.9 W/kg

SAR(1 g) = 4.21 W/kg; SAR(10 g) = 1.44 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 38.1%

Maximum value of SAR (measured) = 9.00 W/kg

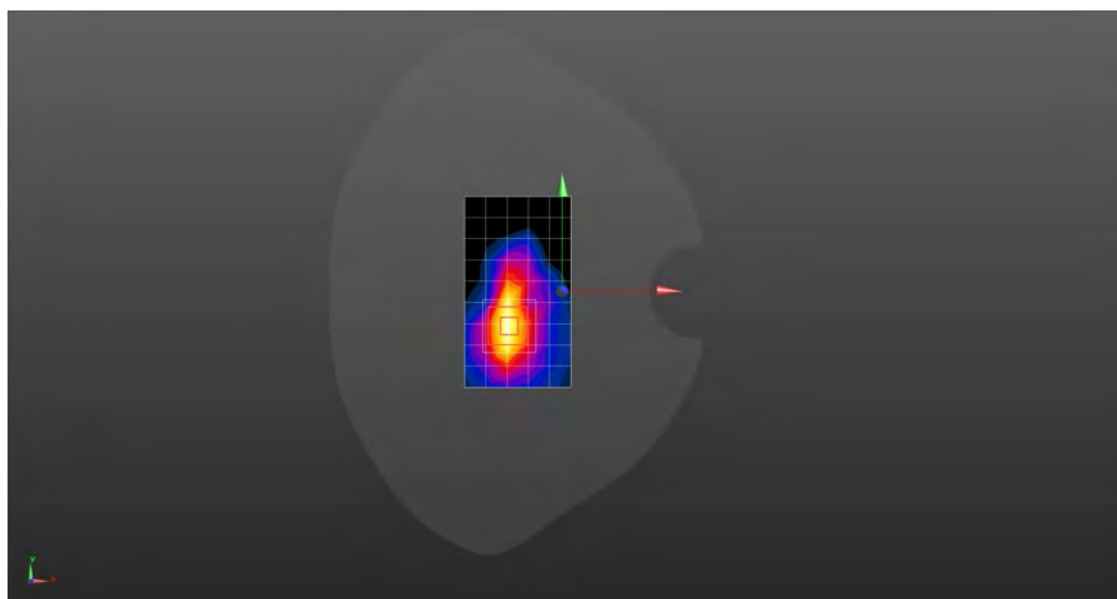

0 dB = 9.00 W/kg = 9.54 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N26 20M QPSK 1RB53 167800CH Right cheek Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 839 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 839 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 41.836$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.995 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.83 V/m ; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.561 W/kg ; SAR(10 g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 38.1%

Maximum value of SAR (measured) = 0.836 W/kg

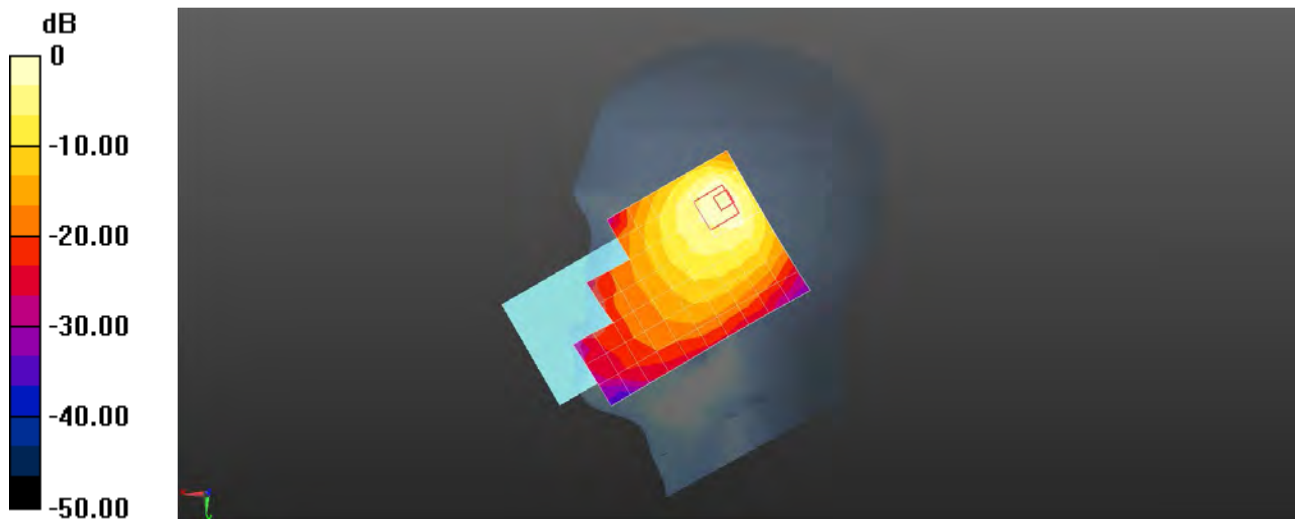

0 dB = 0.995 W/kg = -0.02 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N26 20M QPSK 50RB28 164800CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 824 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 42.103$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.251 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.62 V/m ; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.204 W/kg ; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.8%

Maximum value of SAR (measured) = 0.255 W/kg

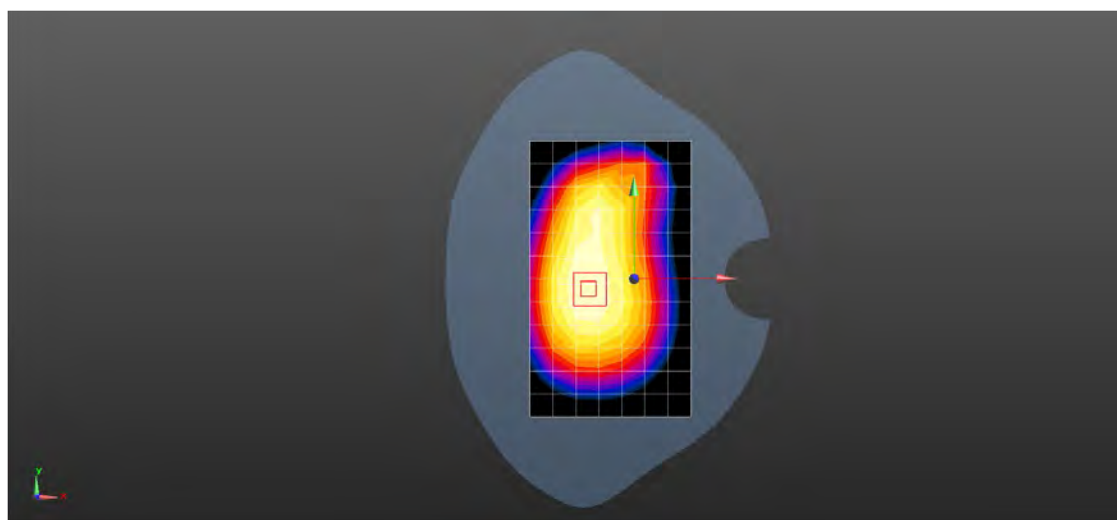

$0 \text{ dB} = 0.255 \text{ W/kg} = -5.93 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

V2440 5G NR N26 20M QPSK 50RB28 164800CH Top side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 824 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 42.103$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.64, 8.64, 8.64); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.340 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.96 V/m ; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.266 W/kg ; SAR(10 g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.405 W/kg

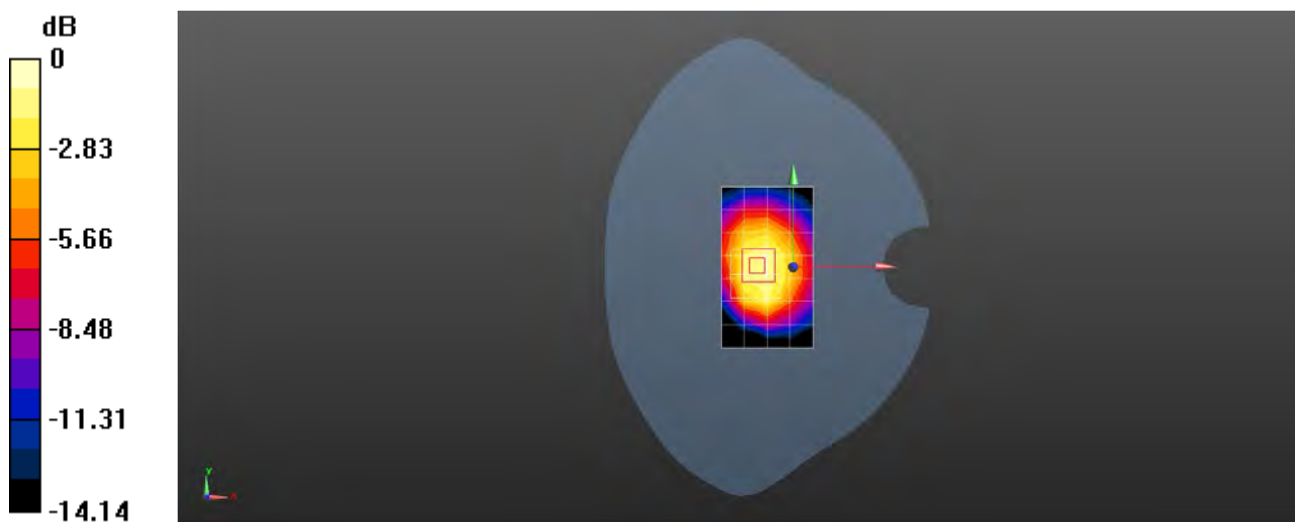

$0 \text{ dB} = 0.405 \text{ W/kg} = -3.93 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

V2440 5G NR N41 100M QPSK 1RB137 518598CH Right cheek Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1


Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 38.467$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.16 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 1.595 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.75 W/kg
SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.275 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 46.1%
Maximum value of SAR (measured) = 1.33 W/kg

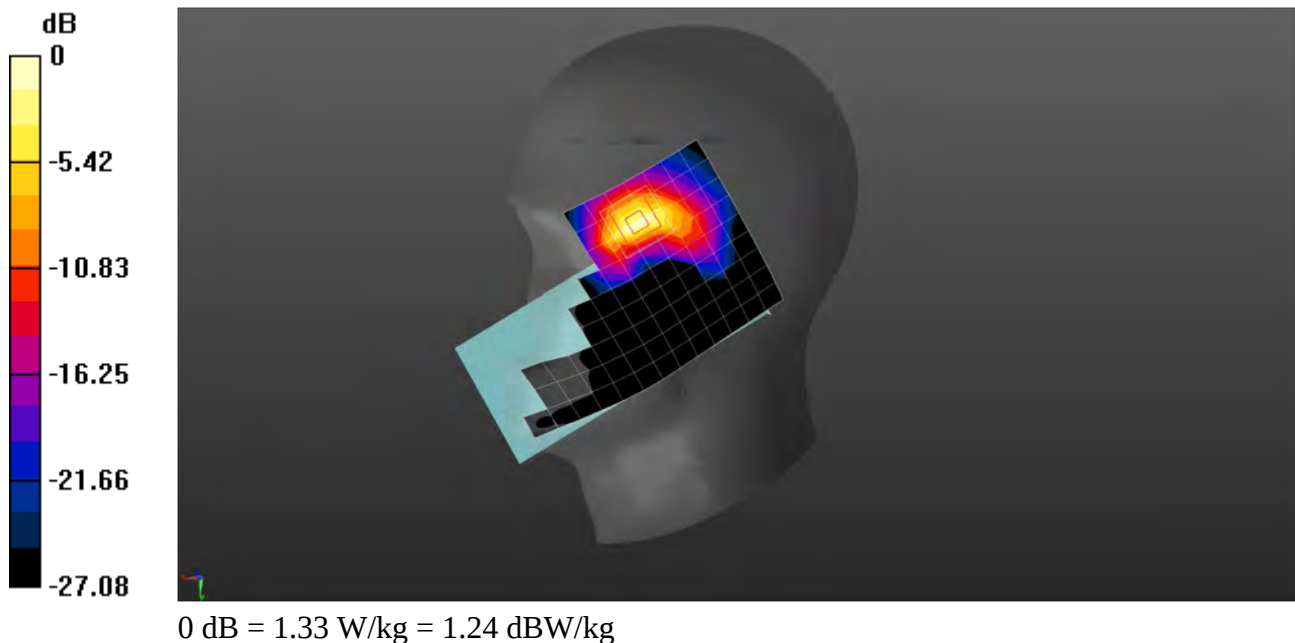

Test Laboratory: SGS-SAR Lab

V2440 5G NR N41 100M QPSK 1RB1 528000CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 2640 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2640$ MHz; $\sigma = 1.937$ S/m; $\epsilon_r = 38.368$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.601 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.497 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 0.631 W/kg

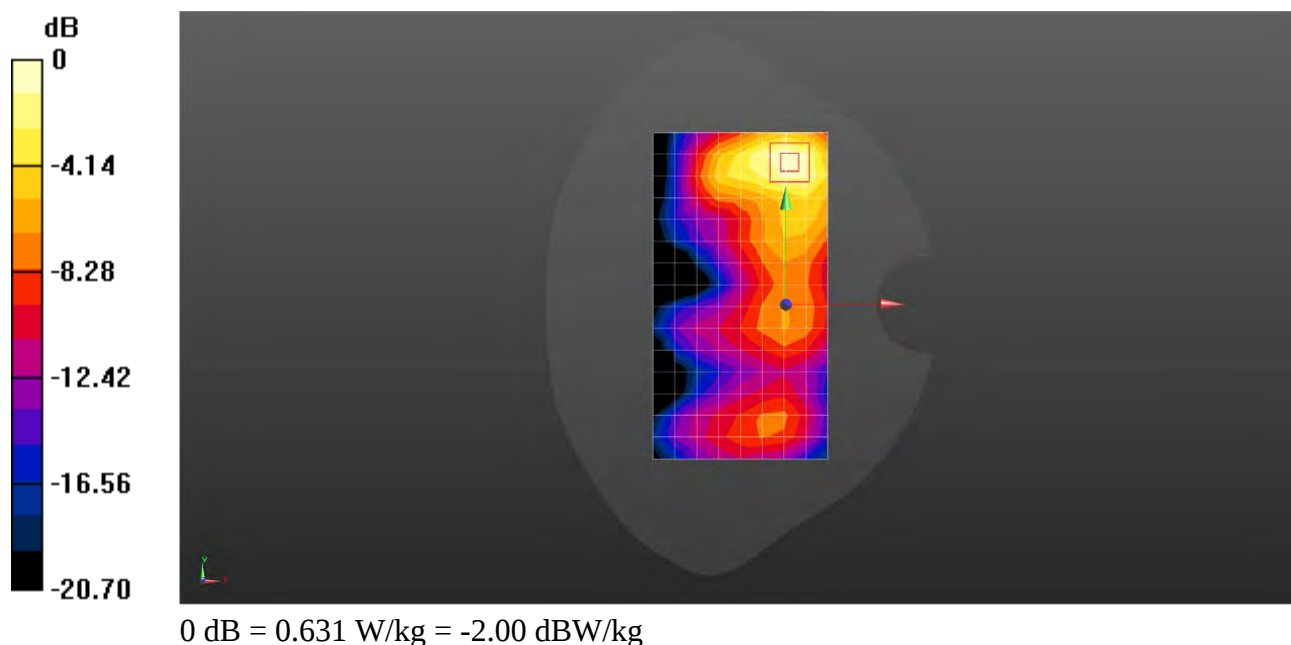

Test Laboratory: SGS-SAR Lab

V2440 5G NR N41 100M QPSK 135RB69 509202CH Left side 10mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 2546.01 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2546.01$ MHz; $\sigma = 1.881$ S/m; $\epsilon_r = 38.505$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.780 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.731 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 0.646 W/kg

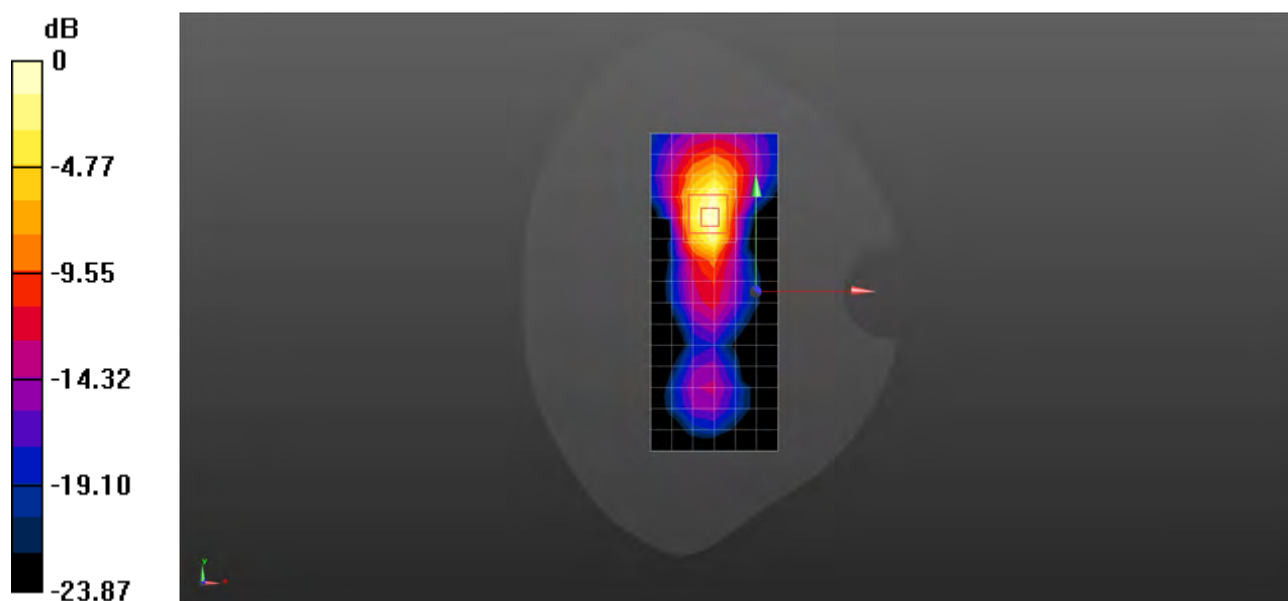

0 dB = 0.646 W/kg = -1.90 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N41 100M QPSK 135RB69 513900CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 2569.5 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2569.5$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 38.495$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.77, 7.77, 7.77); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 9.74 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.94 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 13.4 W/kg

SAR(1 g) = 4.73 W/kg; SAR(10 g) = 1.62 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 39.3%

Maximum value of SAR (measured) = 9.77 W/kg

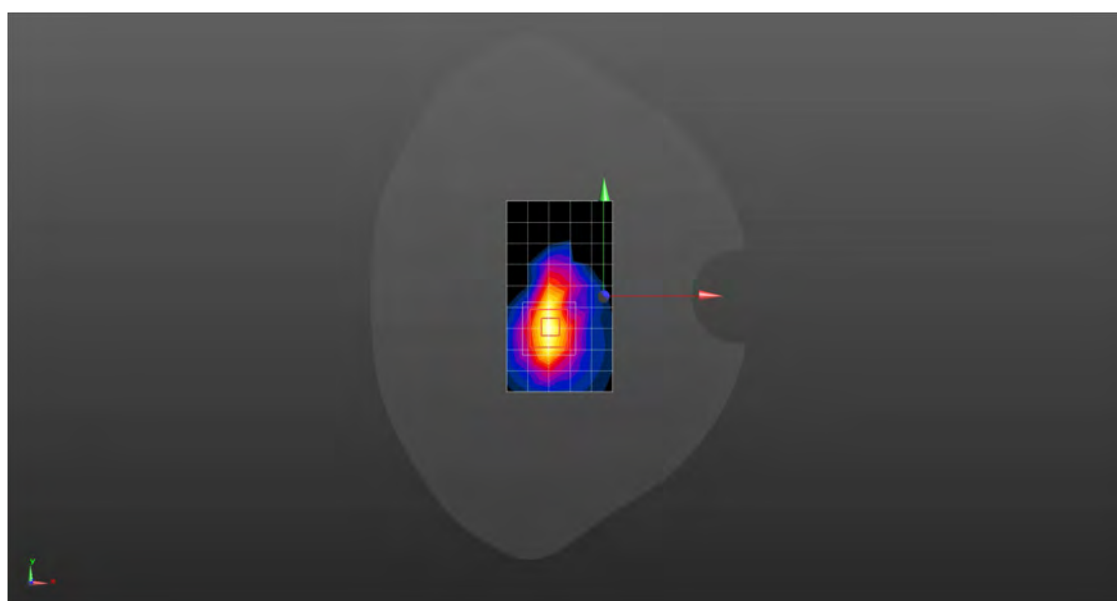

0 dB = 9.77 W/kg = 9.90 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N66 40M QPSK 108RB54 346000CH Right cheek Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 1730 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1730$ MHz; $\sigma = 1.295$ S/m; $\epsilon_r = 40.346$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.835 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.504 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.877 W/kg

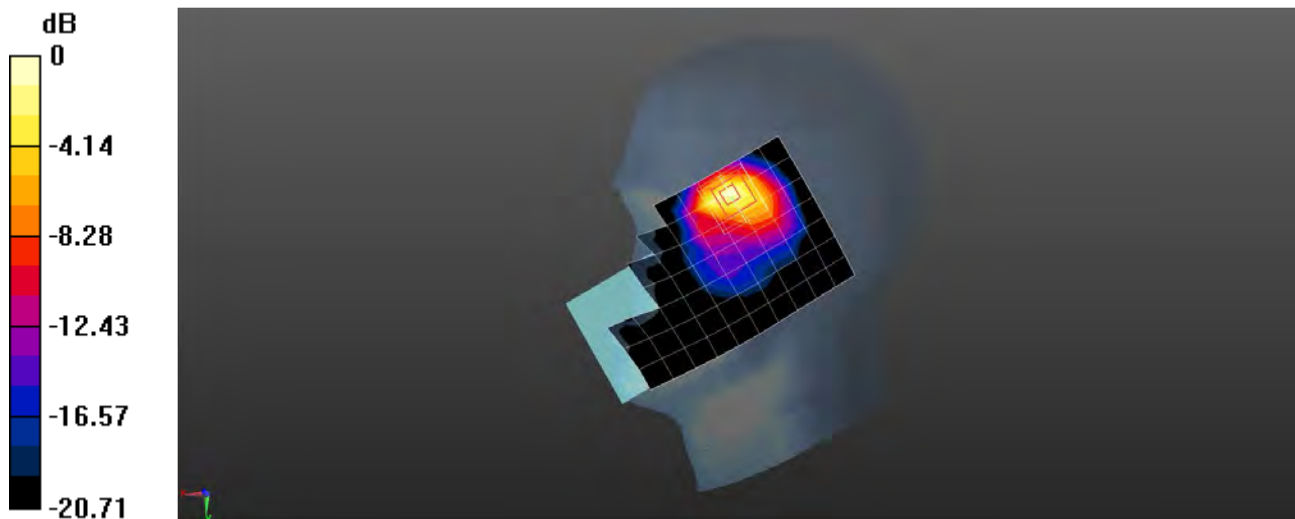

0 dB = 0.877 W/kg = -0.57 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N66 40M QPSK 108RB54 352000CH Back side 15mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 1760 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1760$ MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 40.331$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.441 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.967 V/m; Power Drift = -0.08 dB



Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.490 W/kg

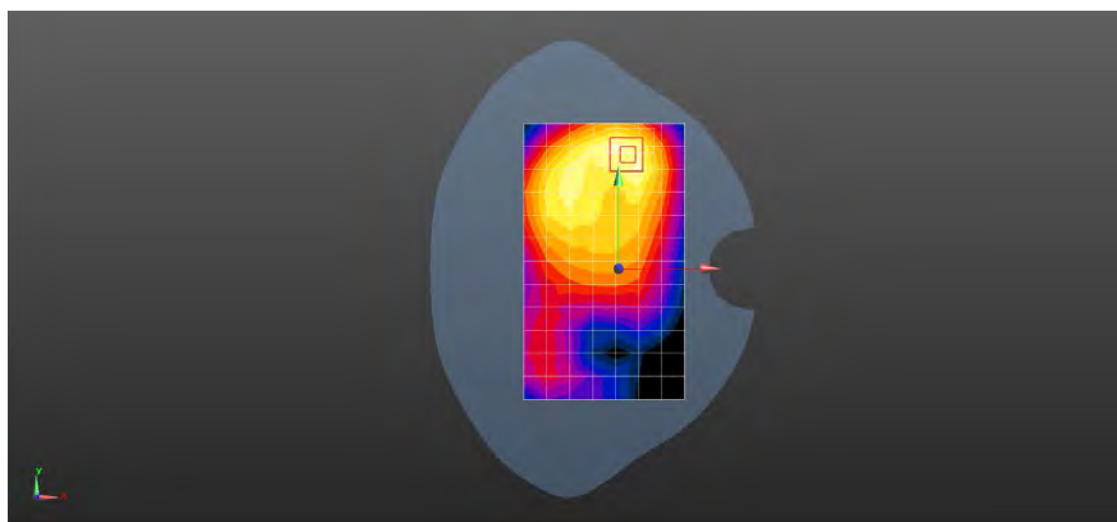

0 dB = 0.490 W/kg = -3.10 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N66 40M QPSK 108RB54 352000CH Top side 10mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 1760 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1760$ MHz; $\sigma = 1.309$ S/m; $\epsilon_r = 40.331$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.641 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.67 V/m; Power Drift = -0.07 dB



Peak SAR (extrapolated) = 0.763 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.621 W/kg

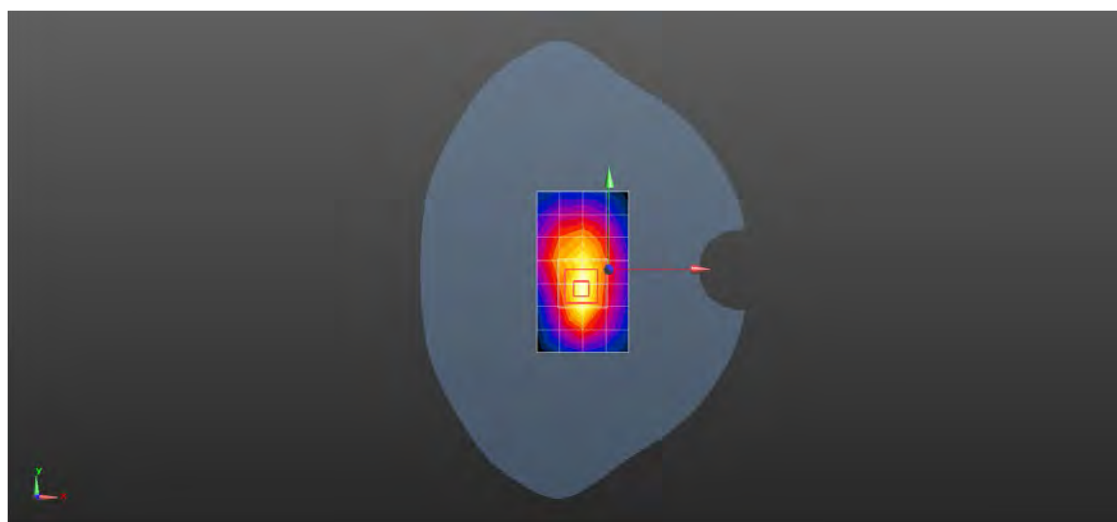

0 dB = 0.621 W/kg = -2.07 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N66 40M QPSK 108RB54 346000CH Top side 0mm Ant13

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 1730 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1730$ MHz; $\sigma = 1.295$ S/m; $\epsilon_r = 40.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.71, 7.71, 7.71); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.23 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 43.02 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 8.78 W/kg

SAR(1 g) = 3.34 W/kg; SAR(10 g) = 1.29 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.8%

Maximum value of SAR (measured) = 6.28 W/kg

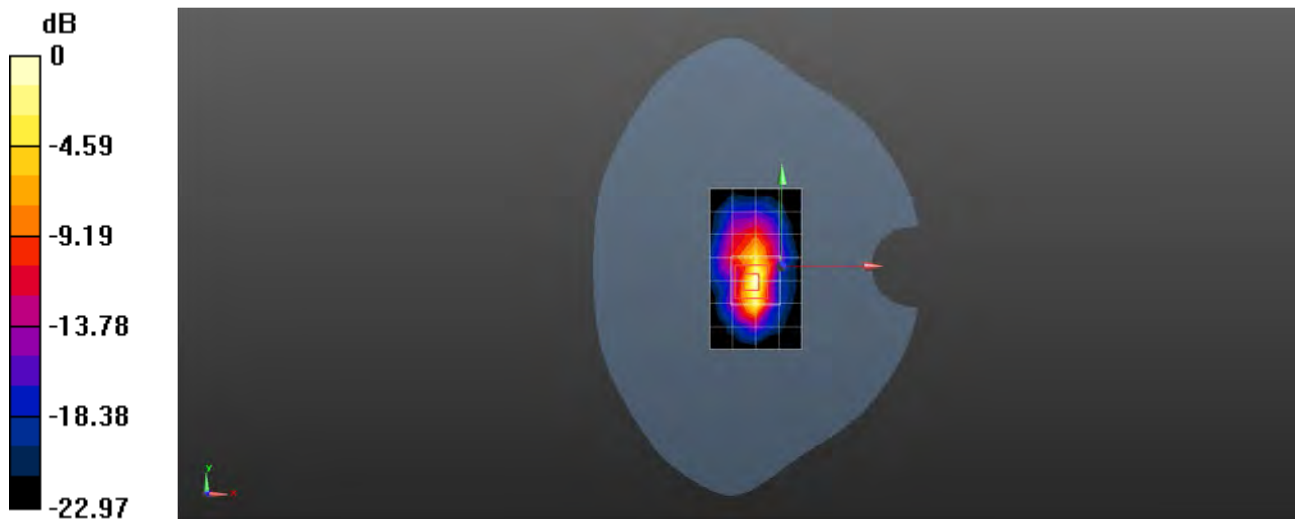

0 dB = 6.28 W/kg = 7.98 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N77 100M QPSK 1RB1 650000CH Left cheek Ant23

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.136$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(6.99, 6.99, 6.99); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.31 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.860 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 32.8%

Maximum value of SAR (measured) = 1.16 W/kg

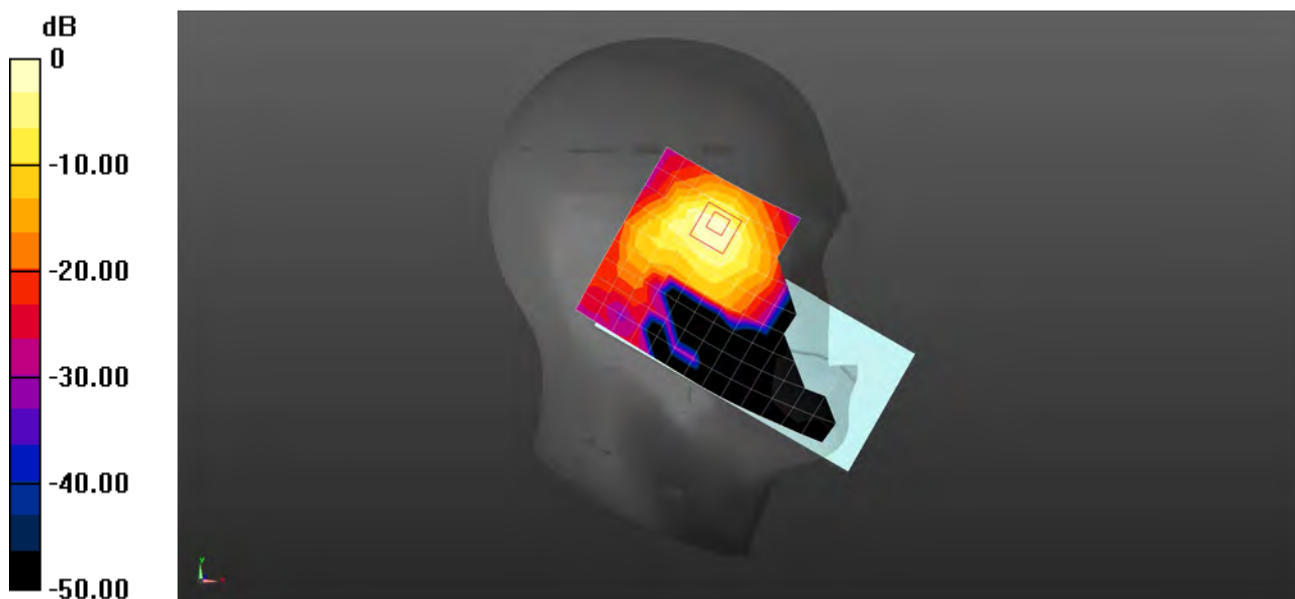

0 dB = 1.16 W/kg = 0.64 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N77 100M QPSK 1RB137 650000CH Back side 15mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.136$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(6.99, 6.99, 6.99); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.822 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.118 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.2%

Maximum value of SAR (measured) = 0.886 W/kg

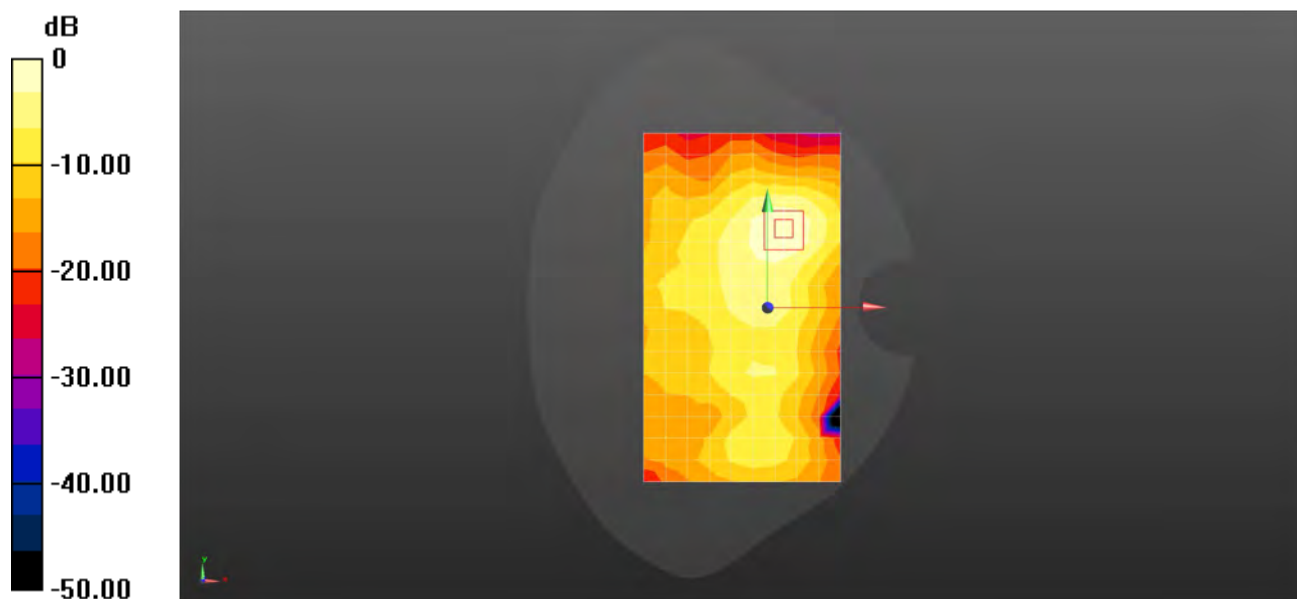

0 dB = 0.886 W/kg = -0.53 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N77 100M QPSK 135RB69 650000CH Right side 10mm Ant23

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.136$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(6.99, 6.99, 6.99); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.749 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.330 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 36.7%

Maximum value of SAR (measured) = 1.04 W/kg

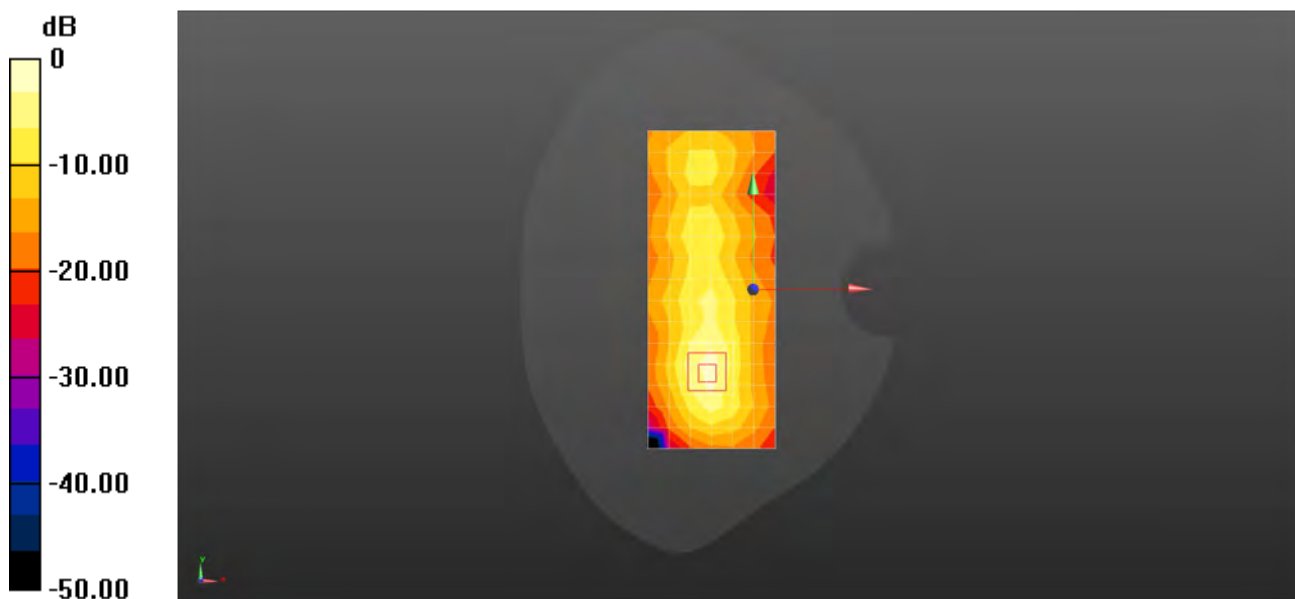

0 dB = 1.04 W/kg = 0.17 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N77 100M QPSK 1RB1 659600CH Back side 0mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 3894 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3894$ MHz; $\sigma = 3.294$ S/m; $\epsilon_r = 36.224$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(6.9, 6.9, 6.9); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.98 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.128 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 14.0 W/kg

SAR(1 g) = 3.99 W/kg; SAR(10 g) = 1.34 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 31.4%

Maximum value of SAR (measured) = 9.16 W/kg

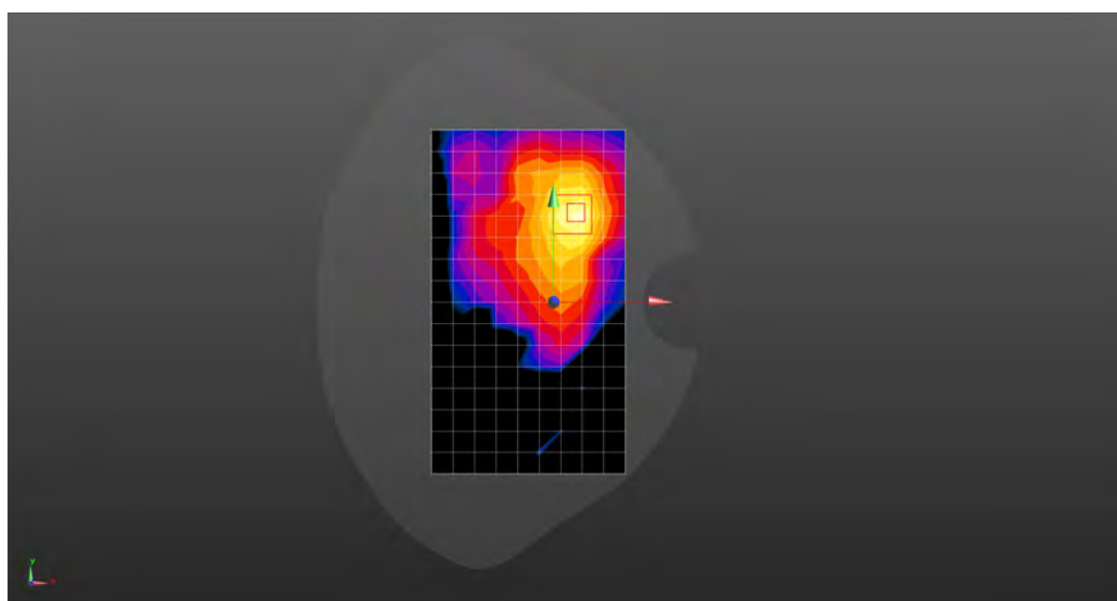

0 dB = 9.16 W/kg = 9.62 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N78 100M QPSK 1RB1 650000CH Right cheek Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.136$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(6.99, 6.99, 6.99); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.04 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 34.5%

Maximum value of SAR (measured) = 1.27 W/kg

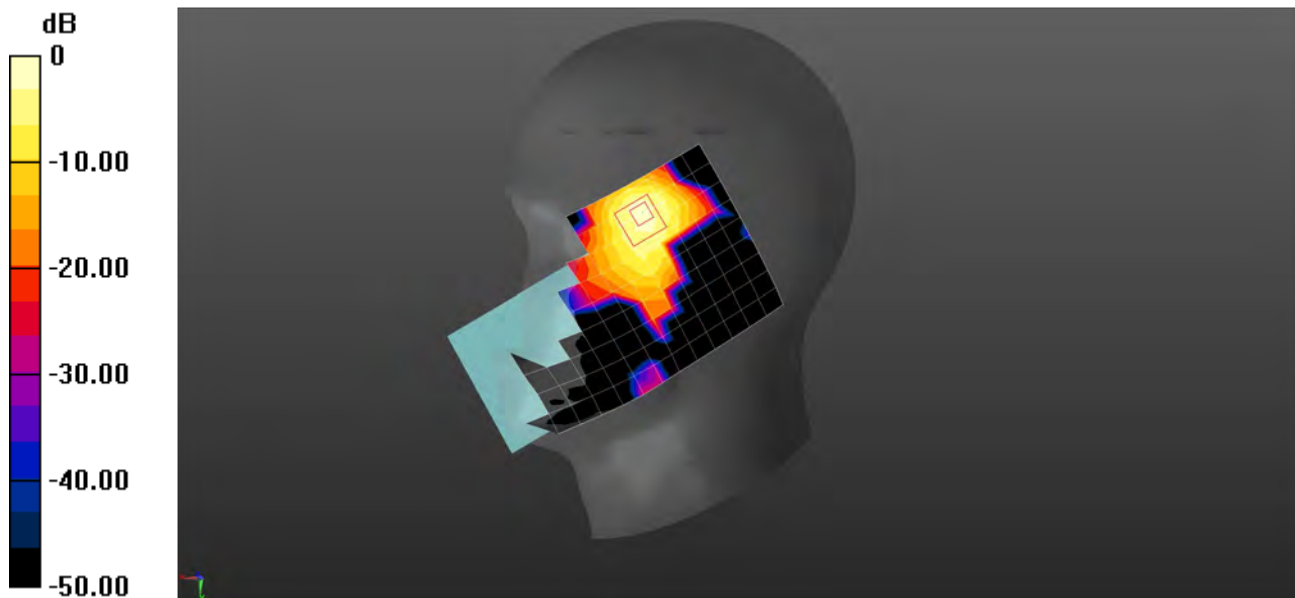

Test Laboratory: SGS-SAR Lab

V2440 5G NR N78 100M QPSK 1RB1 650000CH Back side 15mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.136$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(6.99, 6.99, 6.99); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.825 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.020 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 39.1%

Maximum value of SAR (measured) = 0.909 W/kg

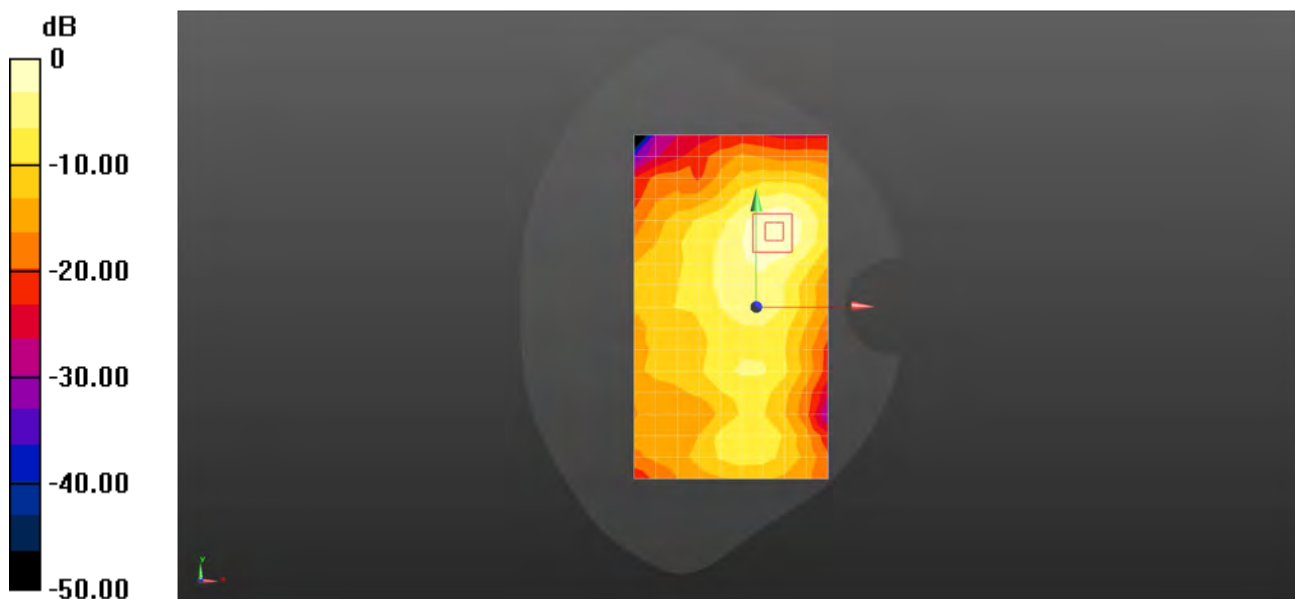

0 dB = 0.909 W/kg = -0.41 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N78 100M QPSK 1RB1 650000CH Left side 10mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.136$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(6.99, 6.99, 6.99); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.562 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.425 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 39%

Maximum value of SAR (measured) = 0.819 W/kg

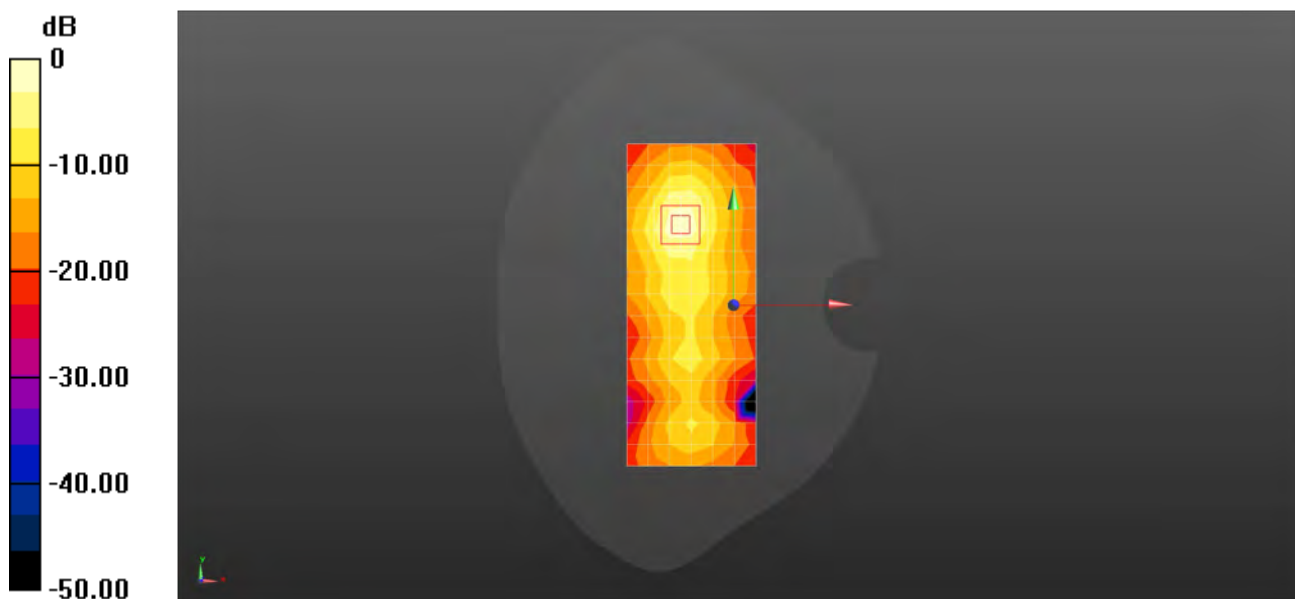

0 dB = 0.819 W/kg = -0.87 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 5G NR N78 100M QPSK 1RB1 650000CH Back side 0mm Ant11

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.136$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(6.99, 6.99, 6.99); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.80 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.807 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 3.8 W/kg; SAR(10 g) = 1.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 30.8%

Maximum value of SAR (measured) = 8.70 W/kg

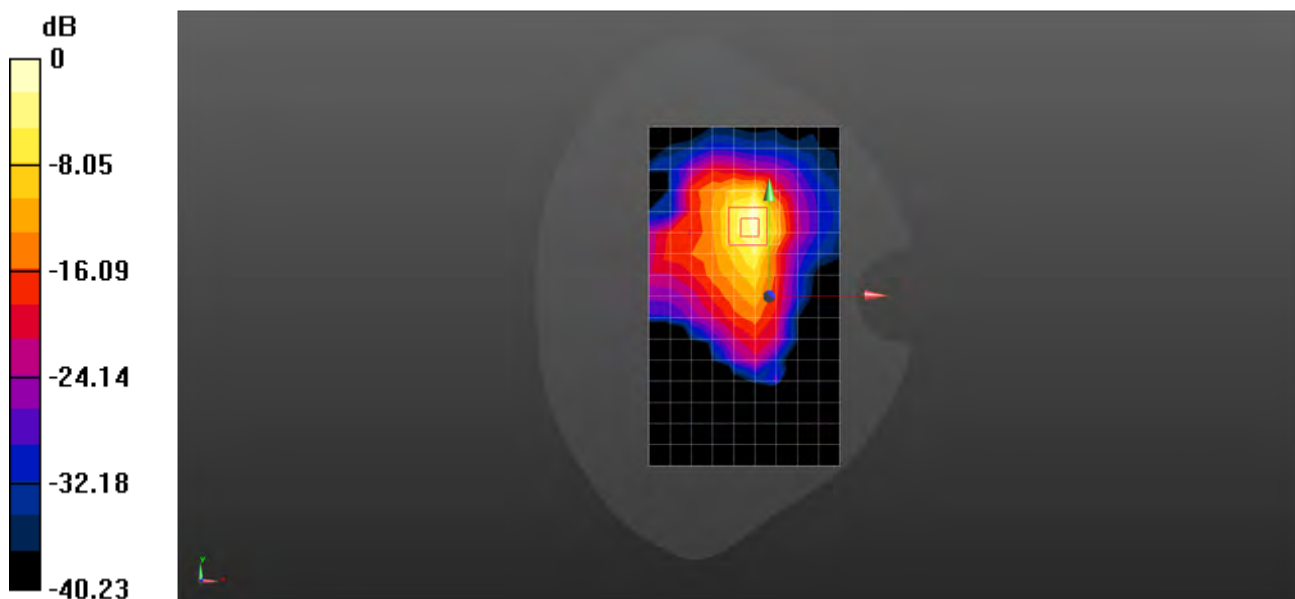

0 dB = 8.70 W/kg = 9.40 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WIFI 2.4G 802.11b 1CH Left cheek Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.884$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.592 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.708 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.778 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.640 W/kg

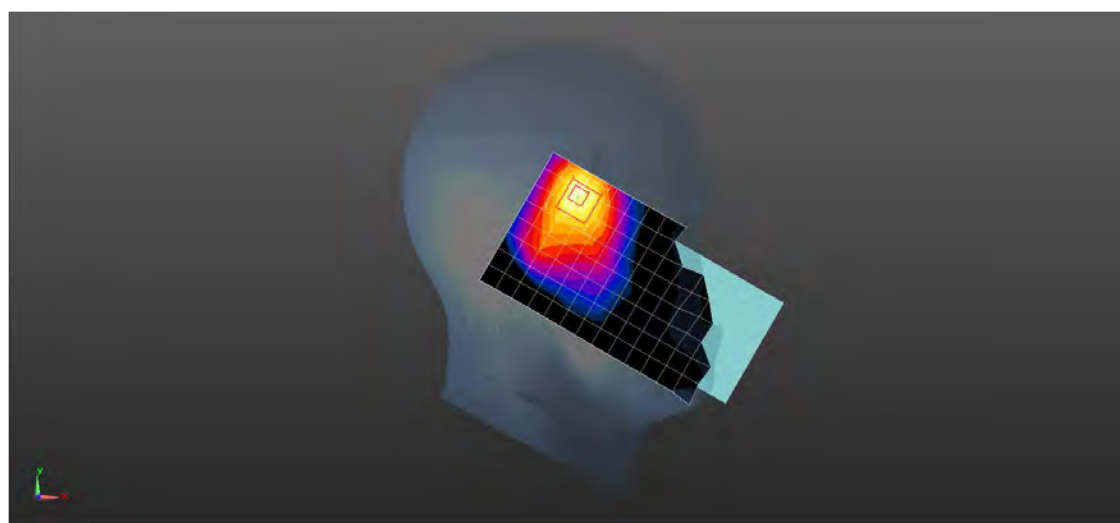

0 dB = 0.640 W/kg = -1.94 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WIFI 2.4G 802.11b 1CH Back side 15mm Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.884$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.221 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.112 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 13.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 0.235 W/kg



0 dB = 0.235 W/kg = -6.29 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WIFI 2.4G 802.11b 1CH Back side 10mm Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1.004

Medium: HSL2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.884$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.354 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.093 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.379 W/kg

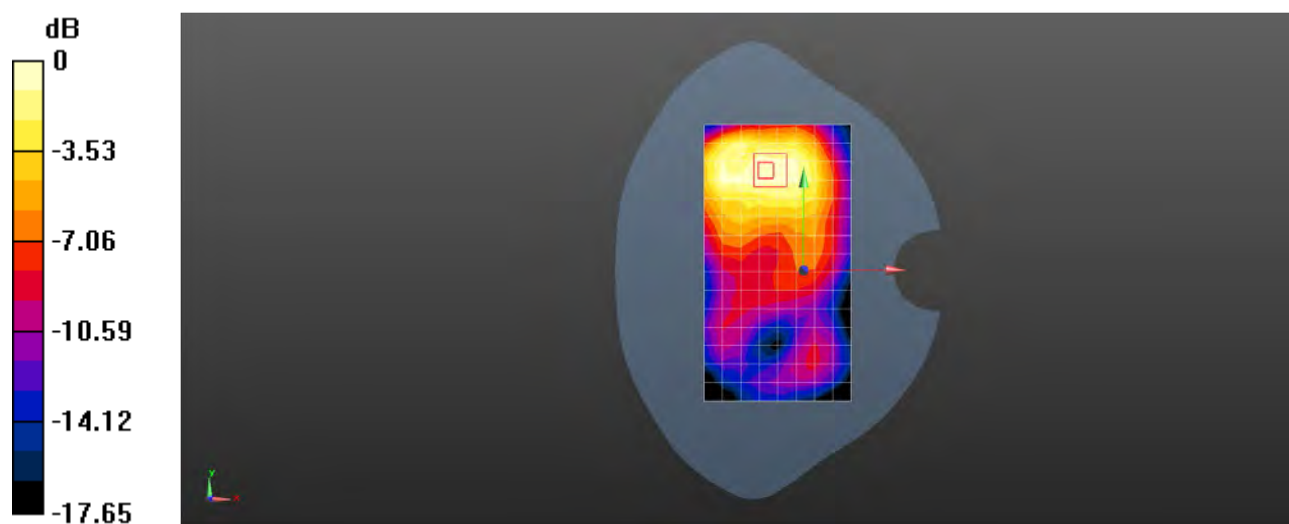

0 dB = 0.379 W/kg = -4.21 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WIFI 5G 802.11n40 54CH Left cheek Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5270 MHz;Duty Cycle: 1:1.052

Medium: HSL5G;Medium parameters used: $f = 5270$ MHz; $\sigma = 4.734$ S/m; $\epsilon_r = 36.539$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.6, 5.6, 5.6); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.532 W/kg

Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.168 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.526 W/kg

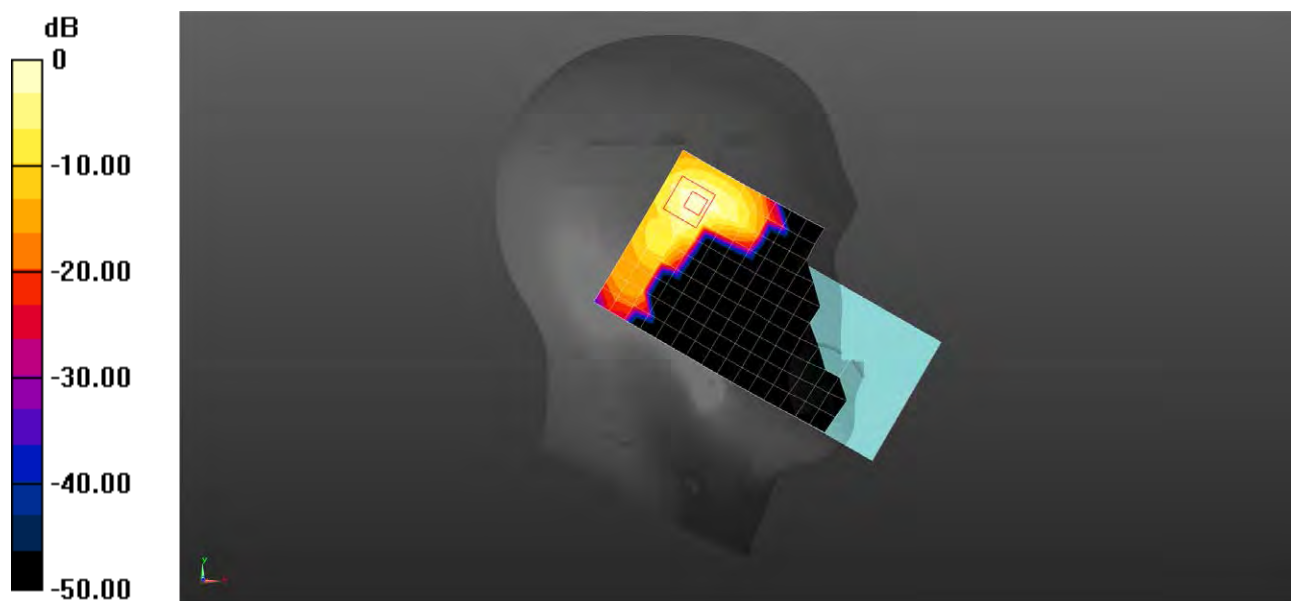

0 dB = 0.526 W/kg = -2.79 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WIFI 5G 802.11n40 159CH Back side 15mm Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5795 MHz; Duty Cycle: 1:1.052

Medium: HSL5G; Medium parameters used: $f = 5795$ MHz; $\sigma = 5.296$ S/m; $\epsilon_r = 35.868$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.16, 5.16, 5.16); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.328 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.1350 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.367 W/kg

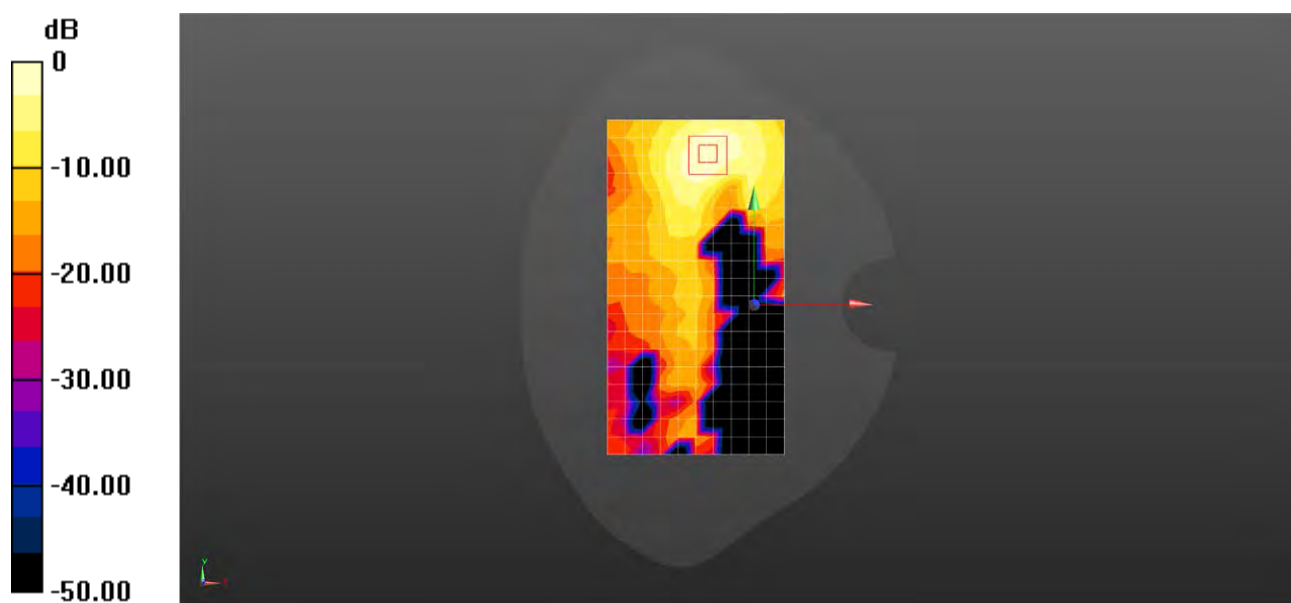

Test Laboratory: SGS-SAR Lab

V2440 WIFI 5G 802.11n40 159CH Back side 10mm Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5795 MHz; Duty Cycle: 1:1.052

Medium: HSL5G; Medium parameters used: $f = 5795$ MHz; $\sigma = 5.296$ S/m; $\epsilon_r = 35.868$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.16, 5.16, 5.16); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.512 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.227 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 0.820 W/kg

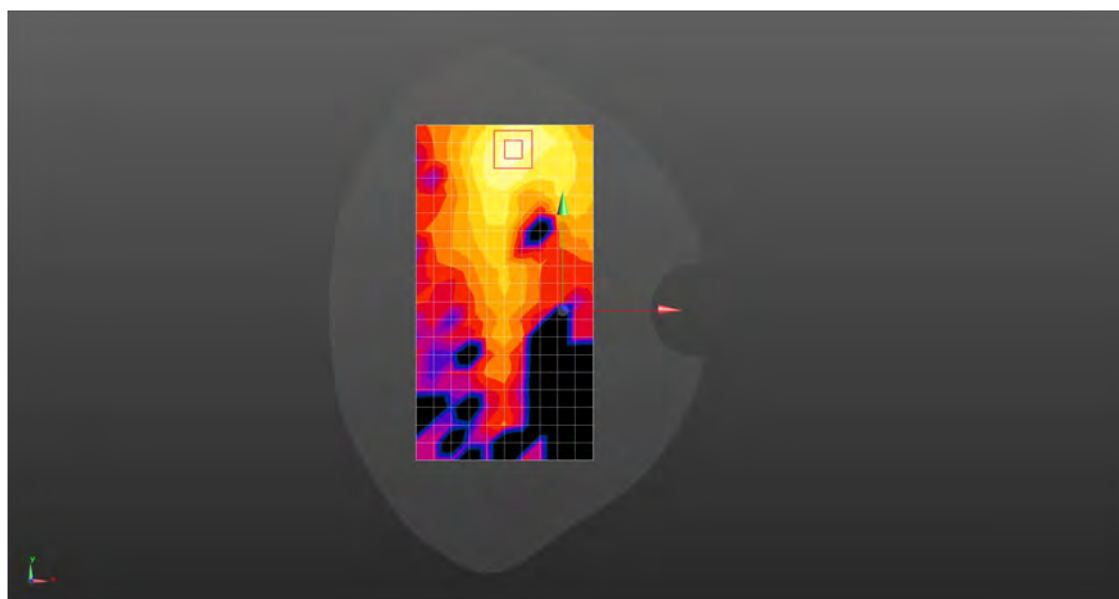

0 dB = 0.820 W/kg = -0.86 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 WIFI 5G 802.11n40 54CH Right side 0mm Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5270 MHz;Duty Cycle: 1:1.052

Medium: HSL5G;Medium parameters used: $f = 5270$ MHz; $\sigma = 4.734$ S/m; $\epsilon_r = 36.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(5.6, 5.6, 5.6); Calibrated: 2024-07-17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x21x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.85 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.090 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 14.0 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 0.533 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 7.50 W/kg

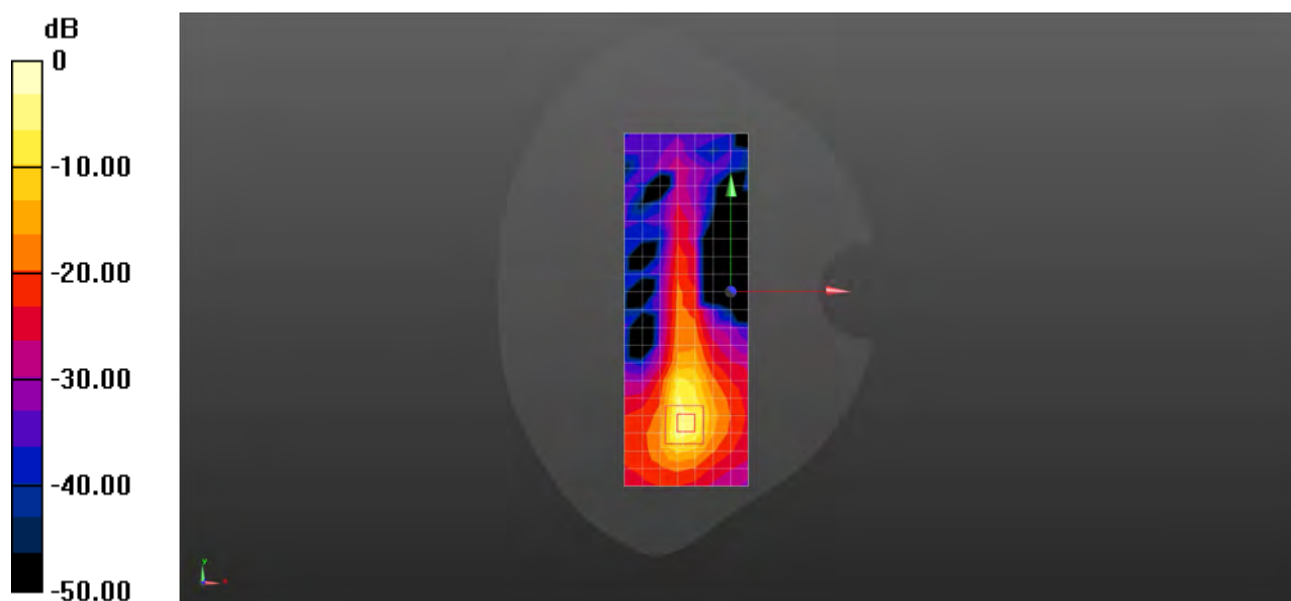

0 dB = 7.50 W/kg = 8.75 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 Bluetooth DH5 78CH Left cheek Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0816 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.542 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.0892 W/kg

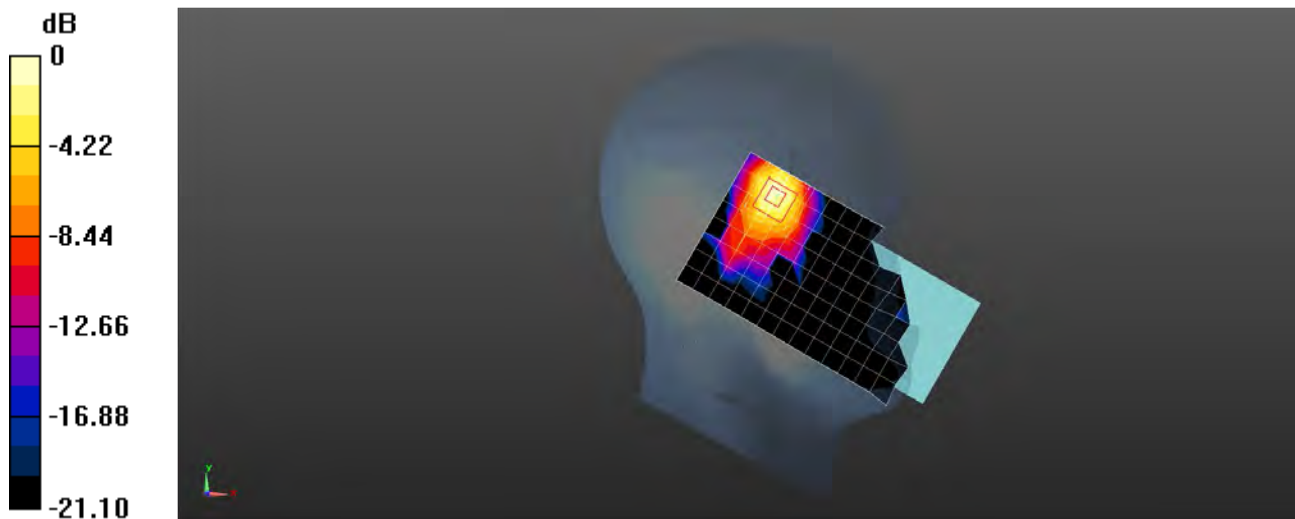

0 dB = 0.0892 W/kg = -10.50 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 Bluetooth DH5 78CH Back side 15mm Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0216 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9030 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.009 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.0229 W/kg

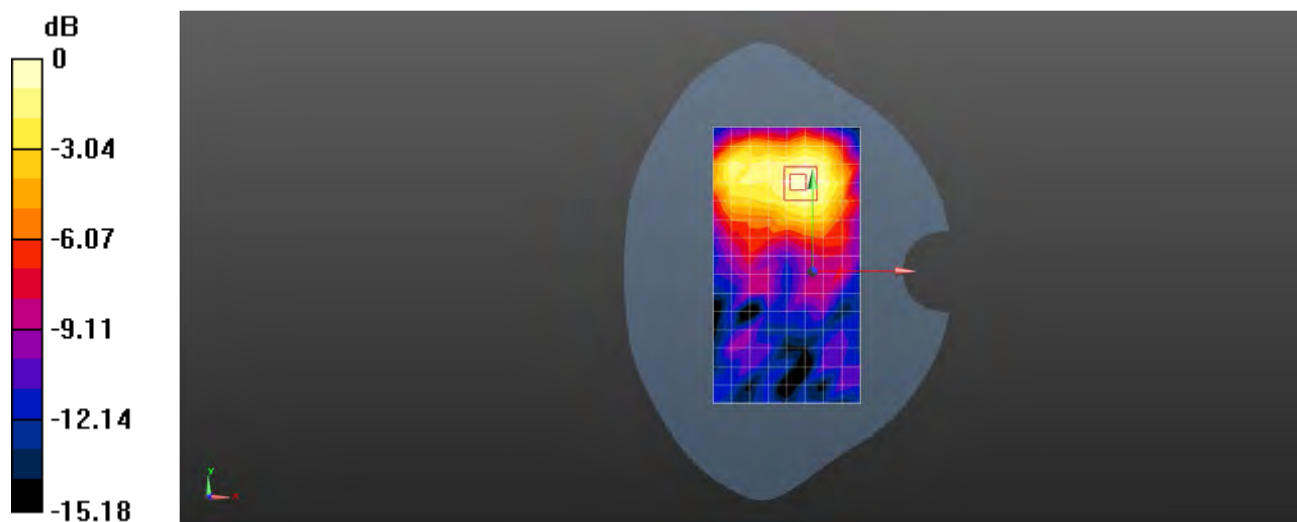

0 dB = 0.0229 W/kg = -16.40 dBW/kg

Test Laboratory: SGS-SAR Lab

V2440 Bluetooth DH5 78CH Back side 10mm Ant22

DUT: V2440; Type: Mobile Phone; Serial: 866007079998835

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium: HSL2450; Medium parameters used: $f = 2480$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.98, 6.98, 6.98); Calibrated: 2025-01-15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2024-04-16
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0385 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8800 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 0.0397 W/kg

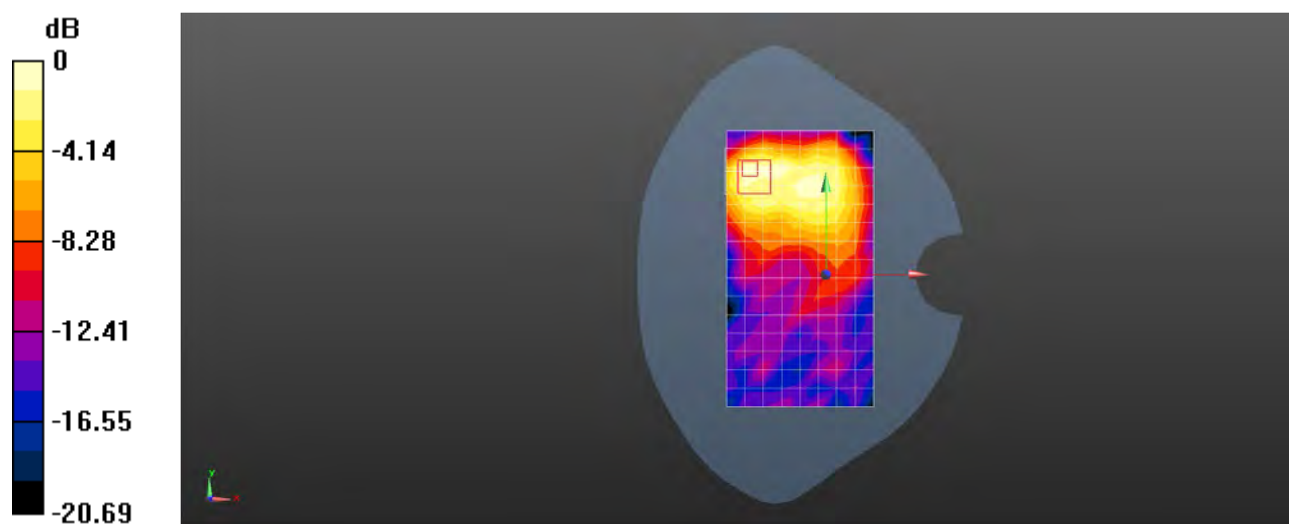

0 dB = 0.0397 W/kg = -14.01 dBW/kg