

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Horizontal

PK




AV



RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Vertical

PK

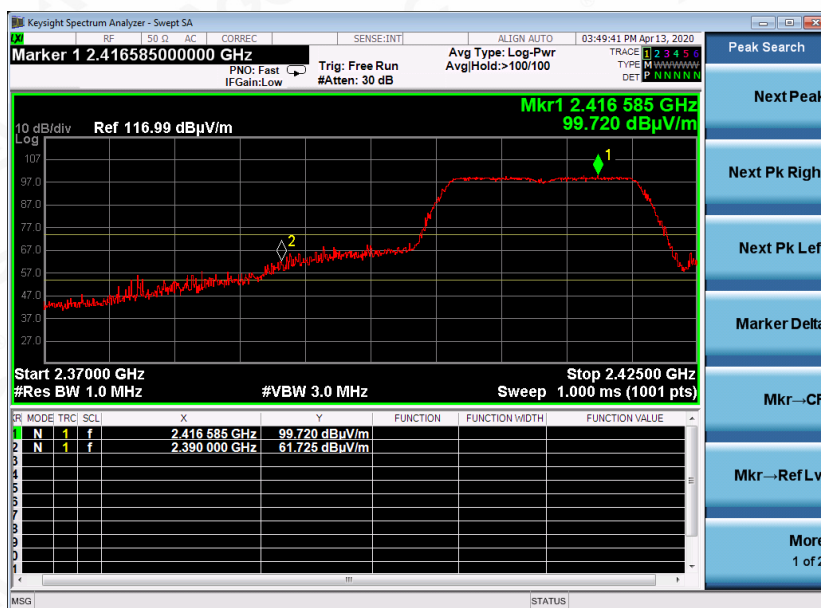

AV



RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Horizontal

PK



AV



RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Vertical

PK



AV




RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Horizontal

PK



AV

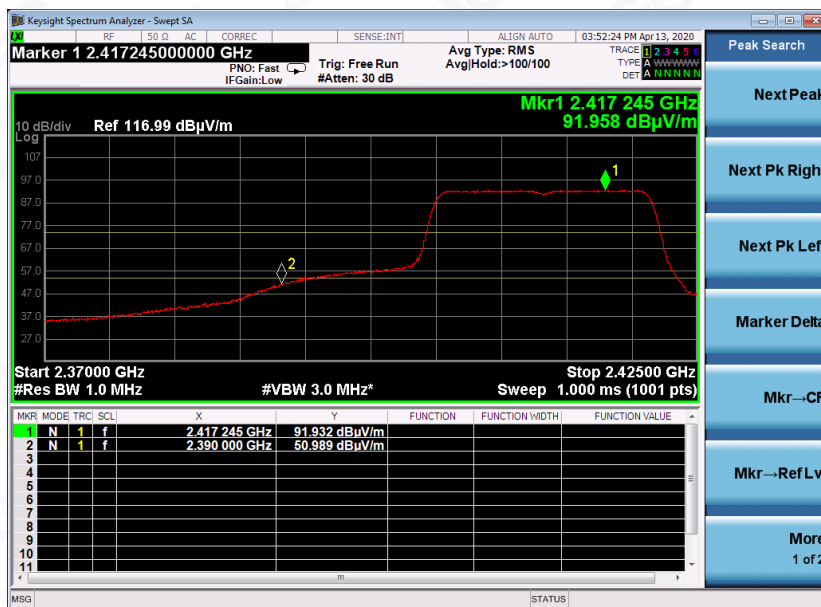

RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Vertical

PK



AV



RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Horizontal

PK



AV



RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Vertical

PK




AV



RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Horizontal

PK

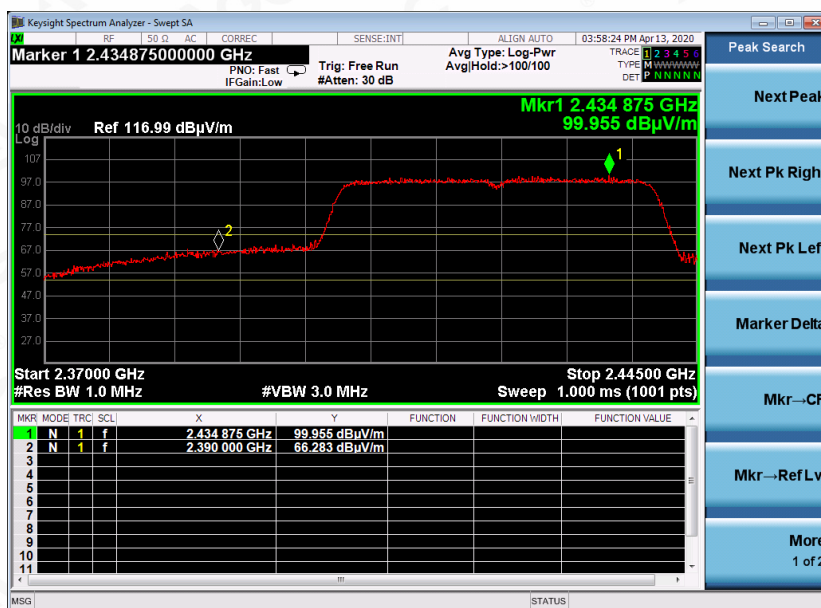


AV




RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Vertical

PK

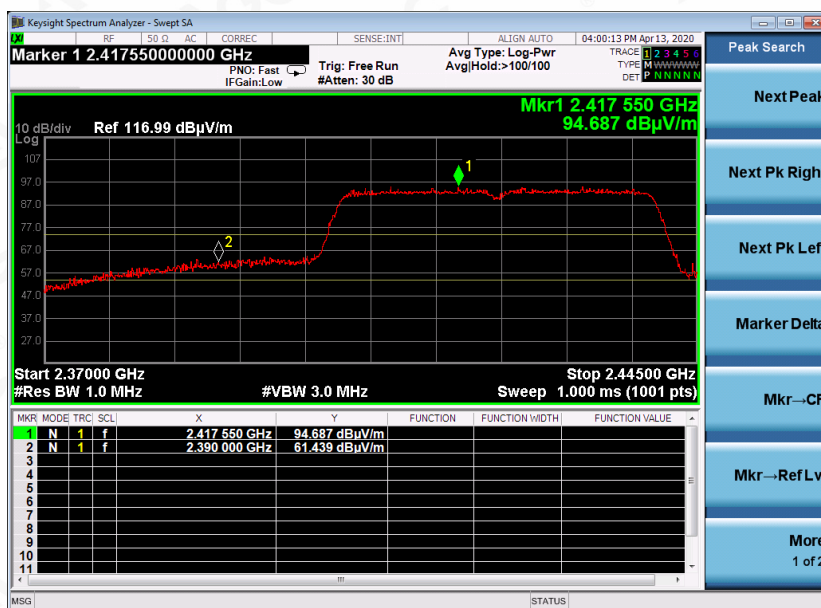


AV

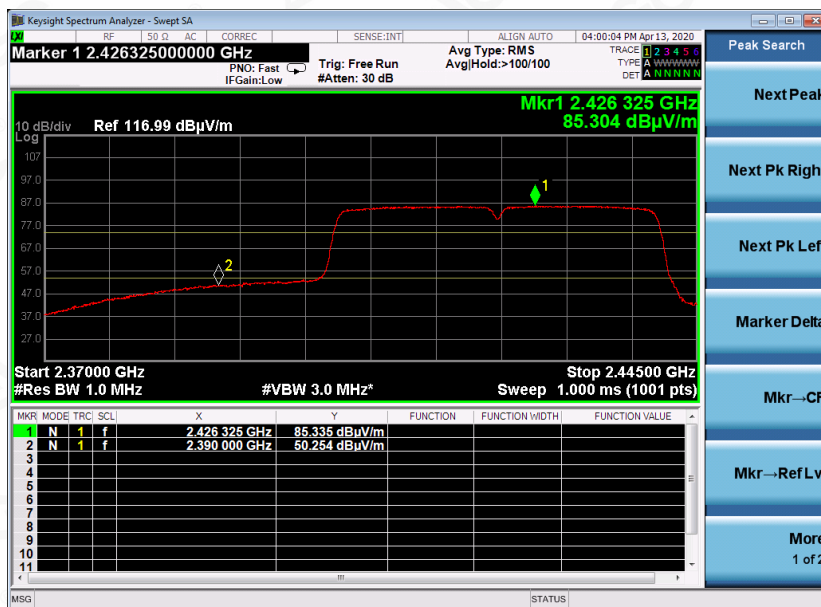

RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40with data rate 13.5 2452MHZ	Antenna	Horizontal

PK

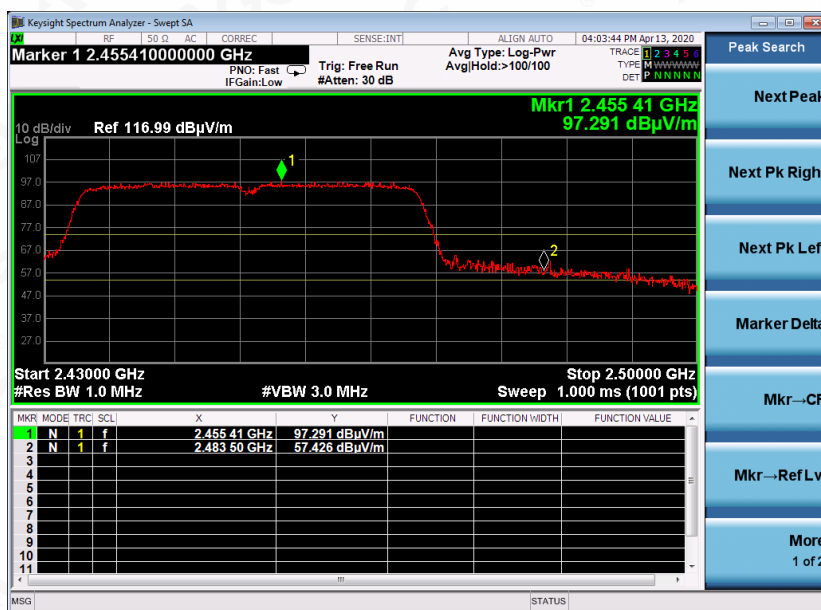

AV




RESULT: PASS

EUT	Wireless Smart Battery Camera	Model Name	CG2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2452MHZ	Antenna	Vertical

PK



AV

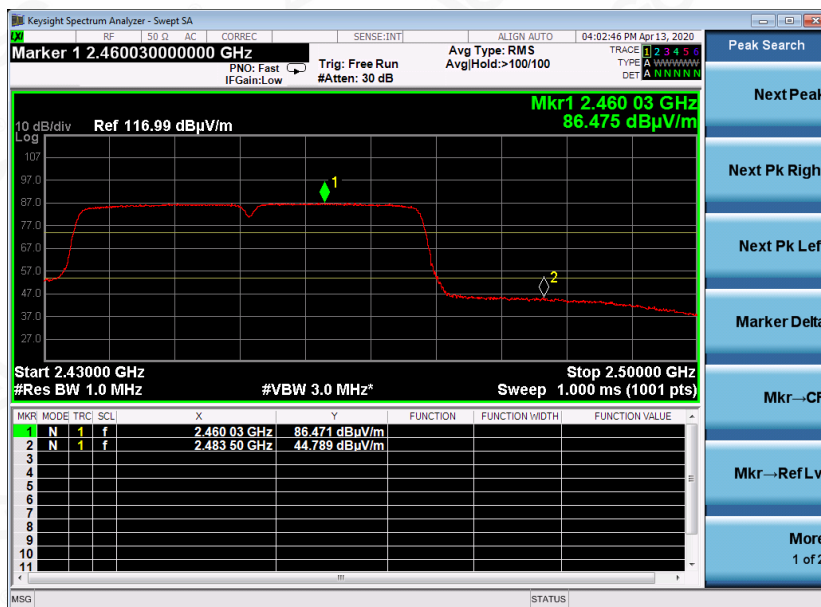

RESULT: PASS

13. FCC LINE CONDUCTED EMISSION TEST


13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

13.2. BLOCK DIAGRAM OF TEST SETUP

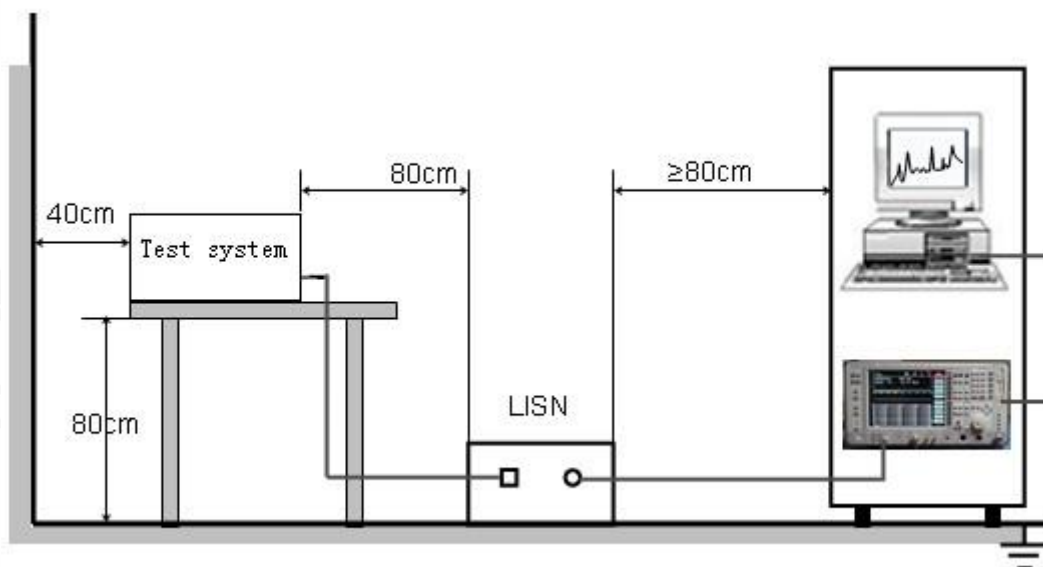


13.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.10.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- (4) The EUT received AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.



13.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L1

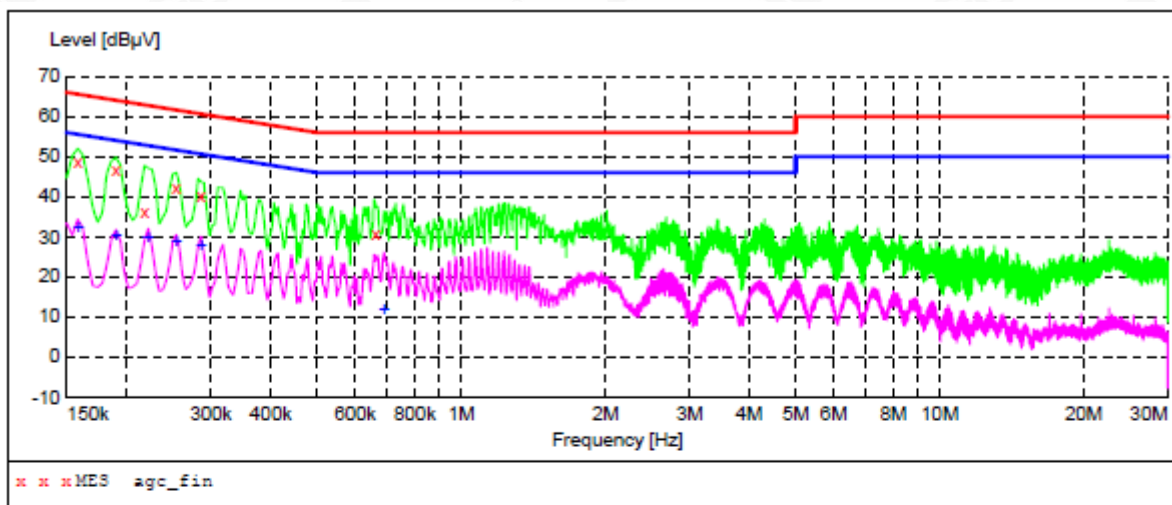

MEASUREMENT RESULT: "agc_fin"

2020/4/9 10:29

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.158000	48.80	11.3	66	16.8	QP	L1	FLO
0.190000	46.60	11.3	64	17.4	QP	L1	FLO
0.218000	36.40	11.3	63	26.5	QP	L1	FLO
0.254000	42.30	11.3	62	19.3	QP	L1	FLO
0.286000	40.10	11.3	61	20.5	QP	L1	FLO
0.662000	30.70	11.3	56	25.3	QP	L1	FLO


MEASUREMENT RESULT: "agc_fin2"

2020/4/9 10:29

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.158000	32.30	11.3	56	23.3	AV	L1	FLO
0.190000	30.50	11.3	54	23.5	AV	L1	FLO
0.222000	29.70	11.3	53	23.0	AV	L1	FLO
0.254000	28.90	11.3	52	22.7	AV	L1	FLO
0.286000	27.50	11.3	51	23.1	AV	L1	FLO
0.690000	11.80	11.3	46	34.2	AV	L1	FLO

RESULT: PASS

LINE CONDUCTED EMISSION TEST-N

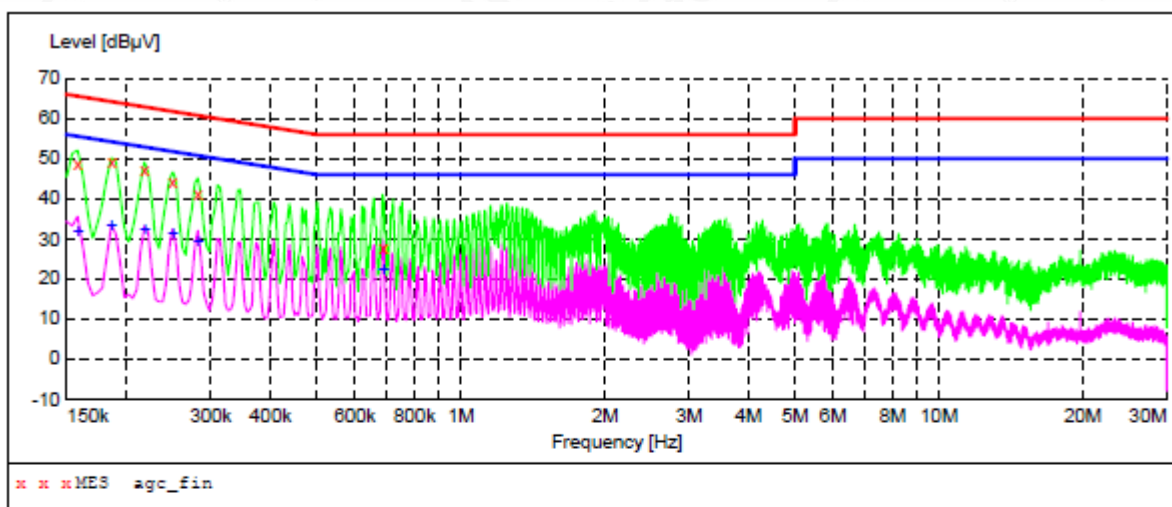

MEASUREMENT RESULT: "agc_fin"

2020/4/9 10:25

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.158000	48.80	11.3	66	16.8	QP	N	FLO
0.186000	49.10	11.3	64	15.1	QP	N	FLO
0.218000	47.00	11.3	63	15.9	QP	N	FLO
0.250000	44.40	11.3	62	17.4	QP	N	FLO
0.282000	41.00	11.3	61	19.8	QP	N	FLO
0.690000	27.80	11.3	56	28.2	QP	N	FLO

MEASUREMENT RESULT: "agc_fin2"

2020/4/9 10:25

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.158000	31.50	11.3	56	24.1	AV	N	FLO
0.186000	33.20	11.3	54	21.0	AV	N	FLO
0.218000	32.00	11.3	53	20.9	AV	N	FLO
0.250000	31.00	11.3	52	20.8	AV	N	FLO
0.282000	29.20	11.3	51	21.6	AV	N	FLO
0.690000	22.40	11.3	46	23.6	AV	N	FLO



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

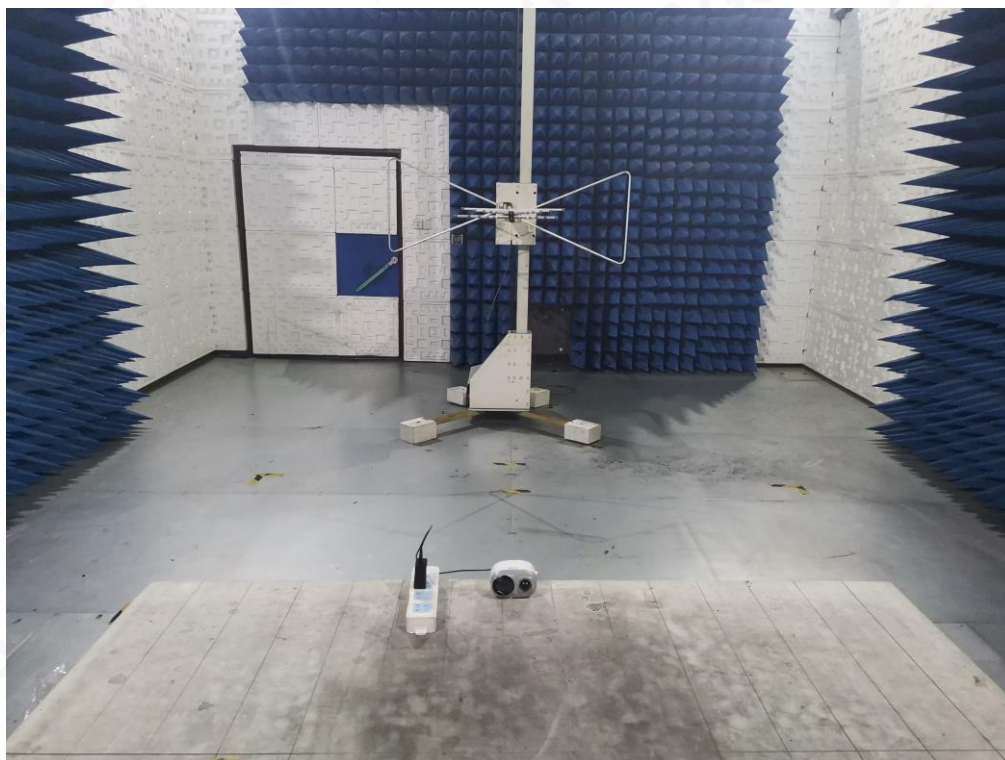

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ



FCC CONDUCTED EMISSION TEST SETUP




APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT

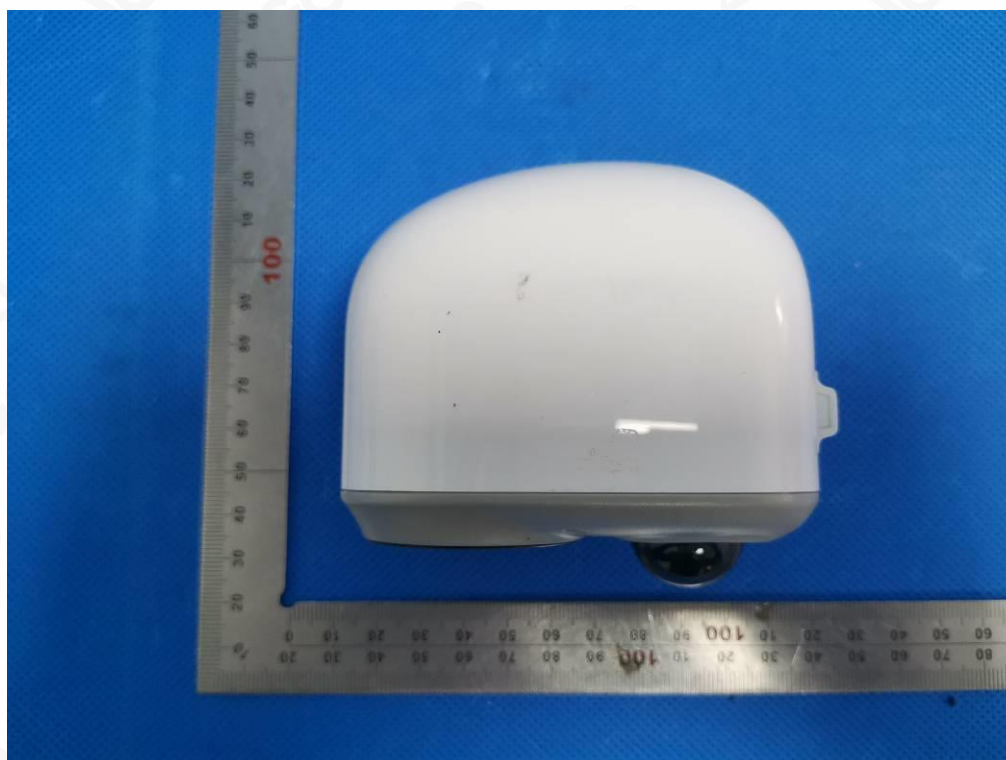

FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT



VIEW OF EUT(PORT)-1




VIEW OF EUT(PORT)-2

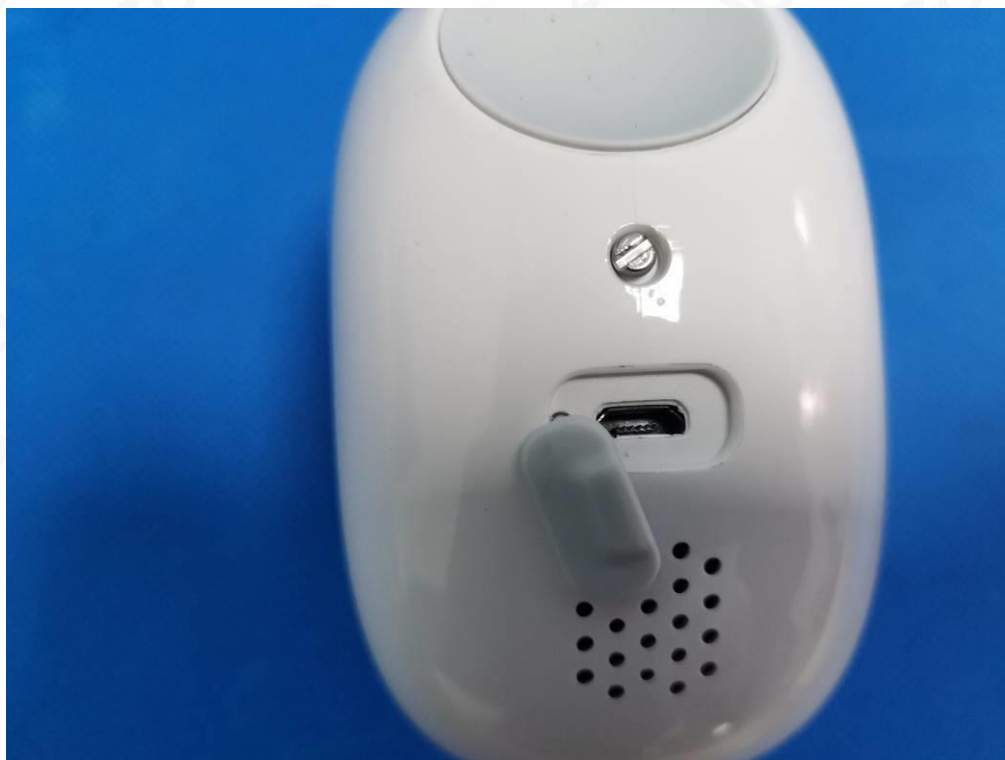


OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2

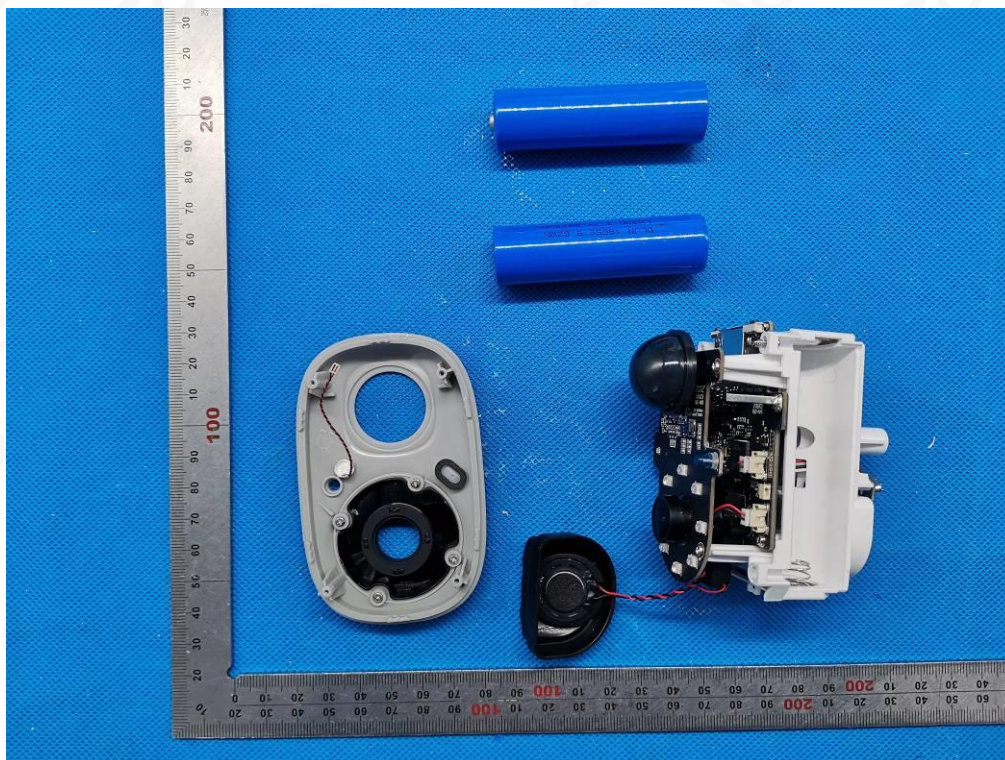


OPEN VIEW OF EUT-3

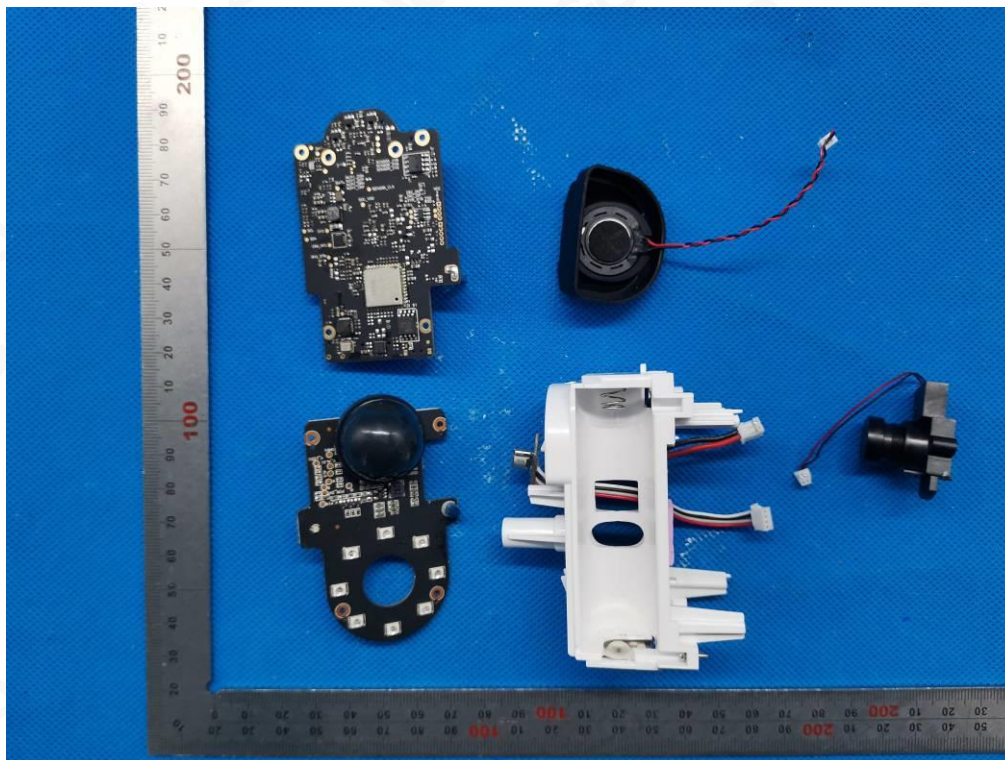


INTERNAL VIEW-1 OF EUT

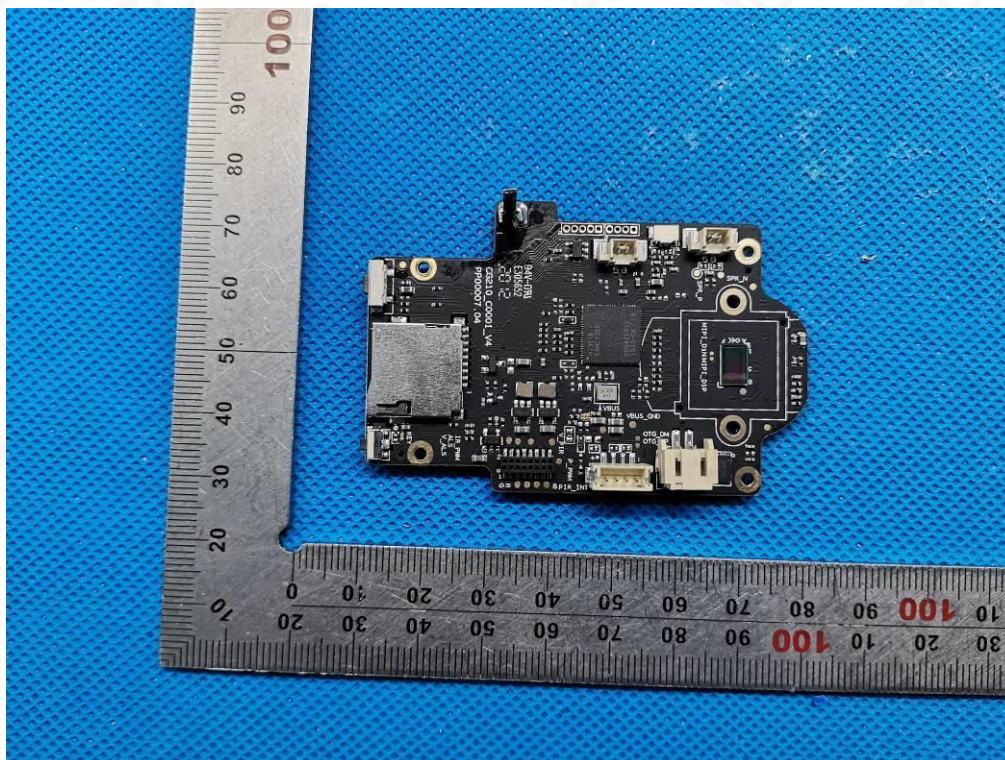


INTERNAL VIEW-2 OF EUT

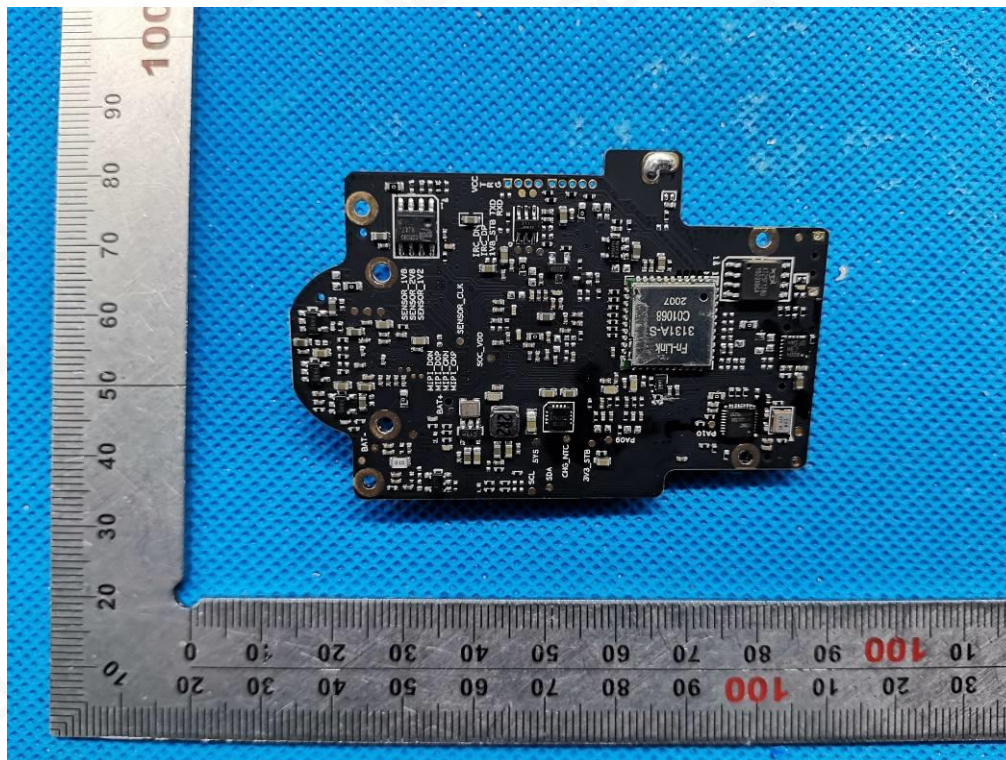


INTERNAL VIEW-3 OF EUT

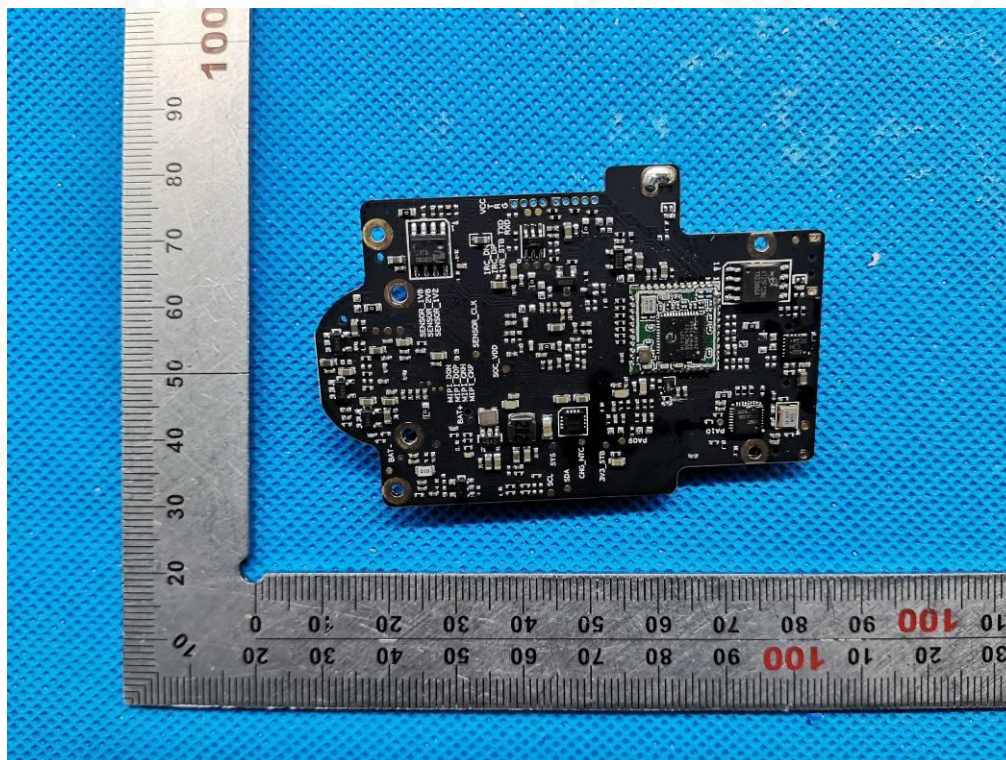


INTERNAL VIEW-4 OF EUT

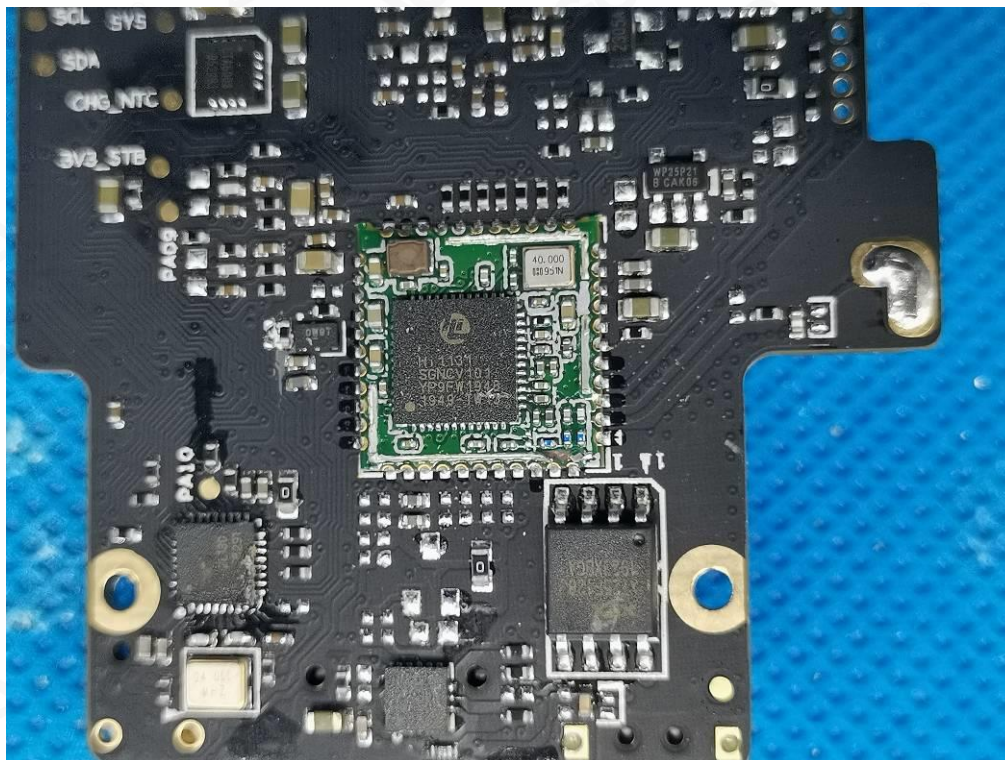


INTERNAL VIEW-5 OF EUT

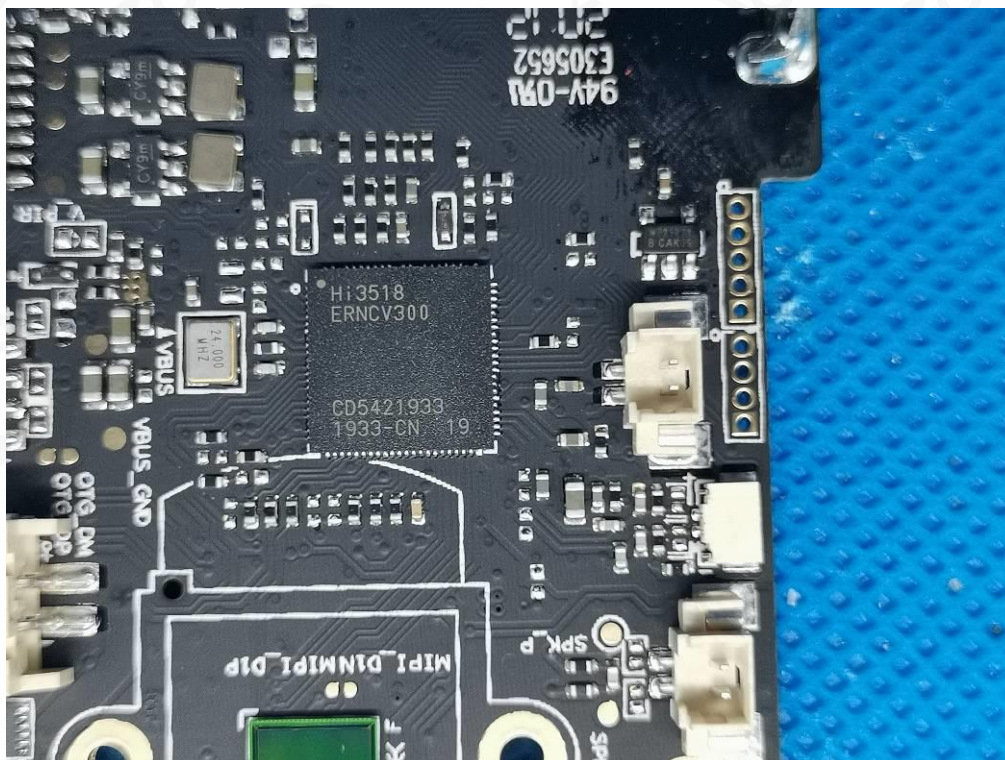


INTERNAL VIEW-6 OF EUT

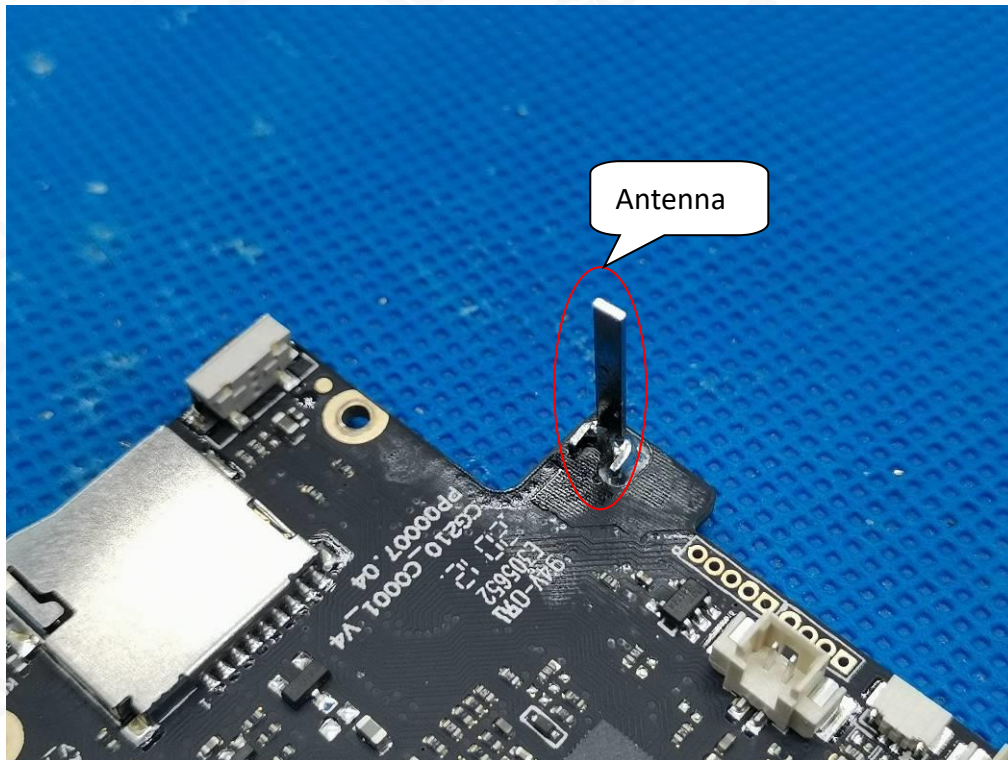

INTERNAL VIEW-7 OF EUT

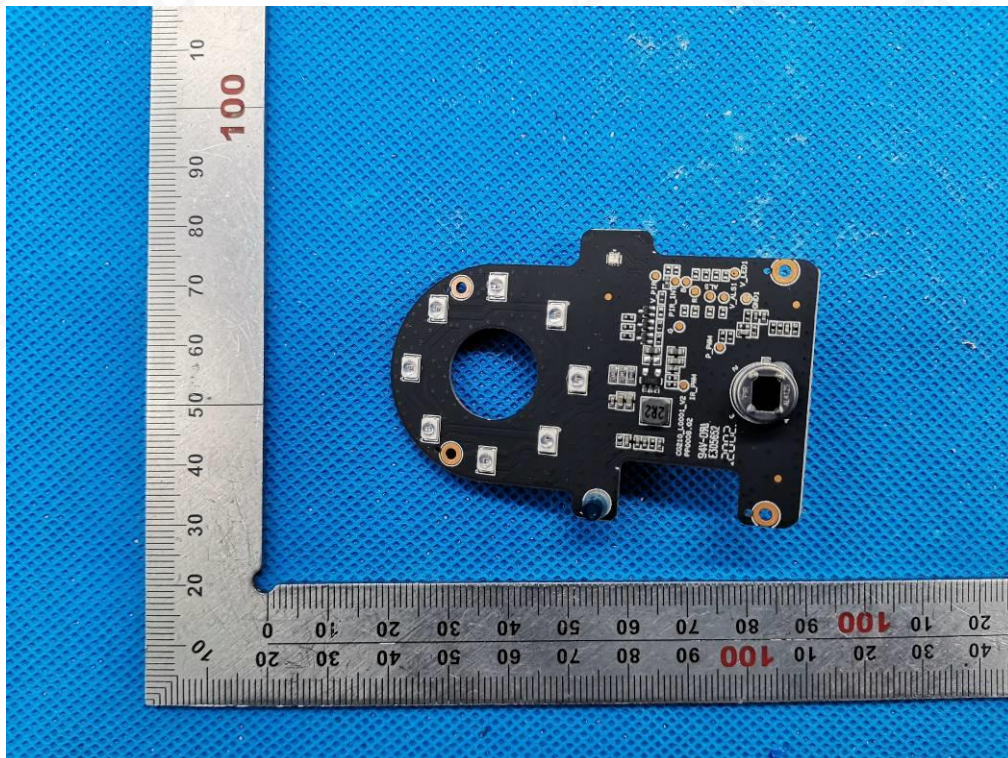

INTERNAL VIEW-8 OF EUT

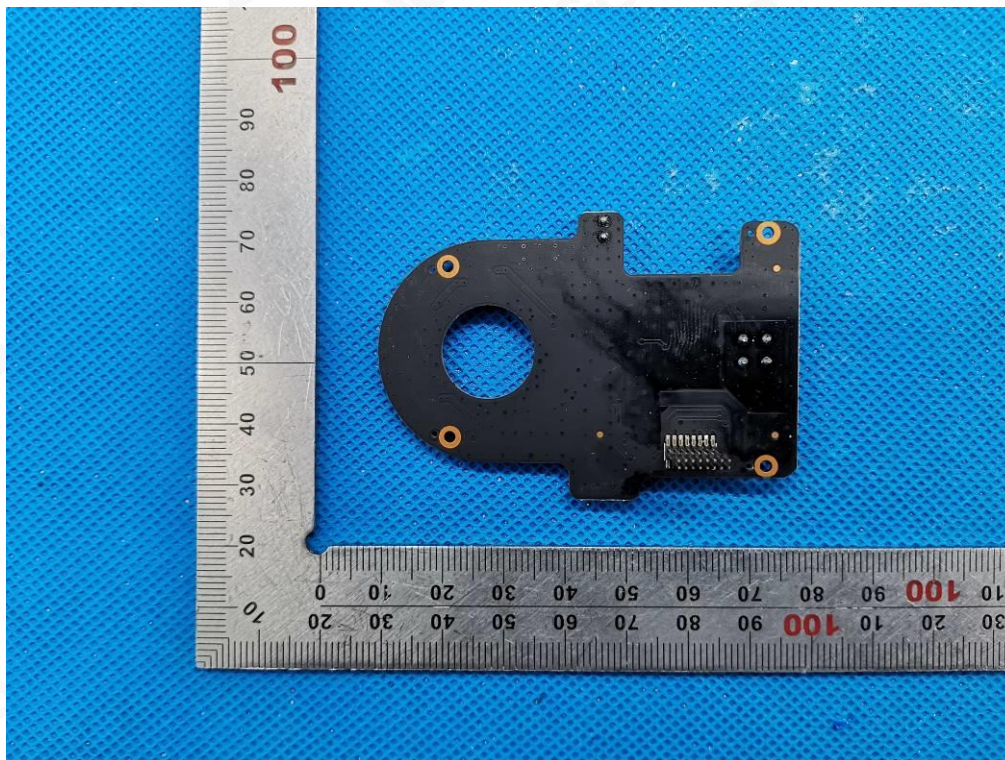

VIEW OF BATTERY



----END OF REPORT----