

# FCC Radio Test Report

## FCC ID:2AUDF-DB2

**Report No.** : TBR-C-202211-0111-82

**Applicant** : Shenzhen ADDX Innovation Technology co., LTD.

### Equipment Under Test (EUT)

**EUT Name** : Smart Battery Video Doorbell

**Model No.** : DB2

**Series Model No.** : ----

**Brand Name** : ----

**Sample ID** : 202211-0111-1-1 & 202211-0111-1-2

**Receipt Date** : 2022-11-16

**Test Date** : 2022-11-16 to 2023-01-06

**Issue Date** : 2023-02-01

**Standards** : FCC Part 15, Subpart C (15.231(a))

**Test Method** : ANSI C63.10:2013

**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

The EUT technically complies with the FCC requirements

**Test/Witness Engineer** : *Camille Li*


Camille Li

**Engineer Supervisor** : *IVAN Su*

IVAN Su

**Engineer Manager** : *Ray Lai*

Ray Lai

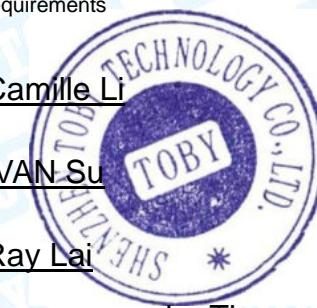

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0

## Contents

<b>CONTENTS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT.....</b>	<b>5</b>
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test) .....	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units .....	6
1.5 Description of Test Mode.....	6
1.6 Description of Test Software Setting.....	7
1.7 Measurement Uncertainty.....	7
1.8 Test Facility .....	8
<b>2. TEST SUMMARY.....</b>	<b>8</b>
<b>3. TEST SOFTWARE.....</b>	<b>9</b>
<b>4. TEST EQUIPMENT.....</b>	<b>10</b>
<b>5. CONDUCTED EMISSION TEST .....</b>	<b>11</b>
5.1 Test Standard and Limit.....	11
5.2 Test Setup.....	11
5.3 Test Procedure.....	12
5.4 Deviation From Test Standard.....	12
5.5 Test Data.....	12
<b>6. RADIATED EMISSION TEST .....</b>	<b>13</b>
6.1 Test Standard and Limit.....	13
6.2 Test Setup.....	14
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	16
6.5 EUT Operating Condition .....	16
6.6 Test Data.....	16
<b>7. BANDWIDTH .....</b>	<b>17</b>
7.1 Test Standard and Limit.....	17
7.2 Test Setup.....	17
7.3 Test Procedure.....	17
7.4 Deviation From Test Standard.....	17
7.5 EUT Operating Condition .....	17

---

7.6 Test Data.....	17
<b>8. RELEASE TIME MEASUREMENT.....</b>	<b>18</b>
8.1 Test Standard and Limit.....	18
8.2 Test Setup.....	18
8.3 Test Procedure.....	18
8.4 Deviation From Test Standard.....	18
8.5 EUT Operating Condition .....	18
8.6 Test Data.....	18
<b>9. DUTY CYCLE .....</b>	<b>19</b>
9.1 Test Standard and Limit.....	19
9.2 Test Setup.....	19
9.3 Test Procedure.....	19
9.4 Deviation From Test Standard.....	19
9.5 EUT Operating Condition .....	19
9.6 Test Data.....	19
<b>10. ANTENNA REQUIREMENT.....</b>	<b>20</b>
10.1 Standard Requirement.....	20
10.1 Deviation From Test Standard.....	20
10.2 Antenna Connected Construction .....	20
<b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA .....</b>	<b>21</b>
<b>ATTACHMENT B-- RADIATED EMISSION TEST DATA .....</b>	<b>23</b>
<b>ATTACHMENT C--BANDWIDTH DATA .....</b>	<b>29</b>
<b>ATTACHMENT D-- RELEASE TIME MEASUREMENT DATA.....</b>	<b>30</b>
<b>ATTACHMENT E--DUTY CYCLE DATA.....</b>	<b>31</b>

## Revision History

# 1. General Information about EUT

## 1.1 Client Information

<b>Applicant</b>	:	Shenzhen ADDX Innovation Technology co., LTD.
<b>Address</b>	:	NO.2902, Building 9A-1.Shenzhen Bay Technology and Ecological Park, Nanshan District, Shenzhen, China
<b>Manufacturer</b>	:	Shenzhen ADDX Innovation Technology co., LTD.
<b>Address</b>	:	NO.2902, Building 9A-1.Shenzhen Bay Technology and Ecological Park, Nanshan District, Shenzhen, China

## 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	Smart Battery Video Doorbell
<b>Models No.</b>	:	DB2
<b>Model Difference</b>	:	----
<b>Product Description</b>	Operation Frequency:	433.92 MHz
	Output Power:	68.09 dBuV/m (PK Max.) 54.12 dBuV/m (AV Max.)
	Antenna Type:	FPC Antenna
	Antenna Gain:	-3.13dBi
	Modulation Type:	OOK
<b>Power Rating</b>	:	Input: DC 5V, 1.5A DC 3.7V by 5000mAh Rechargeable Li-ion battery
<b>Software Version</b>	:	V0.9.1
<b>Hardware Version</b>	:	DB223_C01_V4
<b>Remark</b>	:	The antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.


### Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Antenna description

Brand	Model Name	Type	Antenna Gain(dBi)
N/A	N/A	PIFA Ant.	0.14

### 1.3 Block Diagram Showing the Configuration of System Tested

#### TX Mode

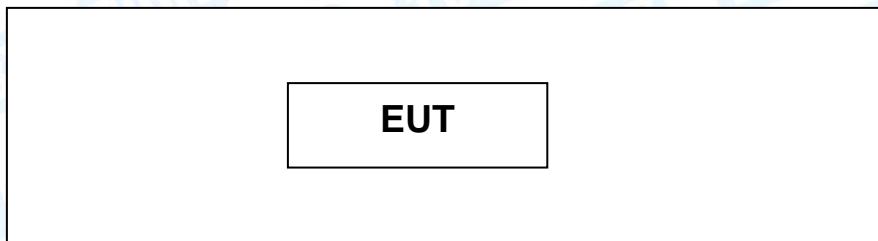

### 1.4 Description of Support Units

The EUT has been test as an independent unit.

### 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

Test Items	Note
Conducted Emission	Continuously transmitting
Radiated Emission	Continuously transmitting
Bandwidth	Continuously transmitting
Duty Cycle	Continuously transmitting
Release Time	Normal Mode

#### Note:

- (1) During the testing procedure, the continuously transmitting mode was programmed by the customer.
- (2) The EUT is considered a Mobile unit, and it was pre-tested on the positioned of each 3 axis: X axis, Y axis and Z axis. The worst case was found positioned on Z-plane. There for only the test data of this Z-plane were used for radiated emission measurement test.

## 1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of transmitting mode.

RF Power Setting in Test SW:	DEF
------------------------------	-----

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	$\pm 3.50$ dB $\pm 3.10$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.20$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB

## 1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at: 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351 Designation Number: CN1223.

### **IC Registration No.: (11950A)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

## 2. Test Summary

FCC Part 15 Subpart (15.231(a))			
Standard Section	Test Item	Judgment	Remark
FCC			
15.203	Antenna Requirement	PASS	N/A
15.207	Conducted Emission	PASS	N/A
15.231	Release Time	PASS	N/A
	Radiation Emission	PASS	N/A
	20 dB Bandwidth	PASS	N/A
	Duty Cycle	PASS	N/A

**Note:** N/A is an abbreviation for Not Applicable.

### 3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE

## 4. Test Equipment

Radiation Emission Test (B Site)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472/008	Feb. 26, 2022	Feb. 25, 2023
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Dec. 05, 2021	Dec. 04, 2023
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	Feb. 26, 2022	Feb. 25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Jun. 26, 2022	Jun. 25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 26, 2022	Jun. 25, 2024
HF Amplifier	Tonscend	TAP9E6343	AP21C806117	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP051845	AP21C806141	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Sep. 01, 2022	Aug. 31, 2023
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jun. 23, 2022	Jun. 22, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
MXA Signal Analyzer	KEYSIGHT	N9020B	MY60110172	Sep. 01, 2022	Aug. 31, 2023
MXA Signal Analyzer	Agilent	N9020A	MY47380425	Sep. 01, 2022	Aug. 31, 2023
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 01, 2022	Aug. 31, 2023
Analog Signal Generator	Agilent	N5181A	MY48180463	Sep. 01, 2022	Aug. 31, 2023
Vector Signal Generator	KEYSIGHT	N5182B	MY59101429	Sep. 01, 2022	Aug. 31, 2023
Analog Signal Generator	KEYSIGHT	N5173B	MY61252685	Dec. 15, 2022	Dec. 14, 2023
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 01, 2022	Aug. 31, 2023
RF Control Unit	Tonscend	JS0806-1	21C8060380	N/A	N/A
RF Control Unit	Tonscend	JS0806-2	21F8060439	Sep. 01, 2022	Aug. 31, 2023
Band Reject Filter Group	Tonscend	JS0806-F	21D8060414	Jun. 23, 2022	Jun. 22, 2023
Power Control Box	Tonscend	JS0806-4ADC	21C8060387	N/A	N/A
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	144382	Sep. 01, 2022	Aug. 31, 2023
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	168796	Jun. 23, 2022	Jun. 22, 2023
Temperature and Humidity Chamber	ZhengHang	ZH-QTH-1500	ZH2107264	Jun. 22, 2022	Jun. 21, 2023

## 5. Conducted Emission Test

## 5.1 Test Standard and Limit

### 5.1.1 Test Standard

FCC 15.207

### 5.1.2 Test Limit


## Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

## Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## 5.2 Test Setup

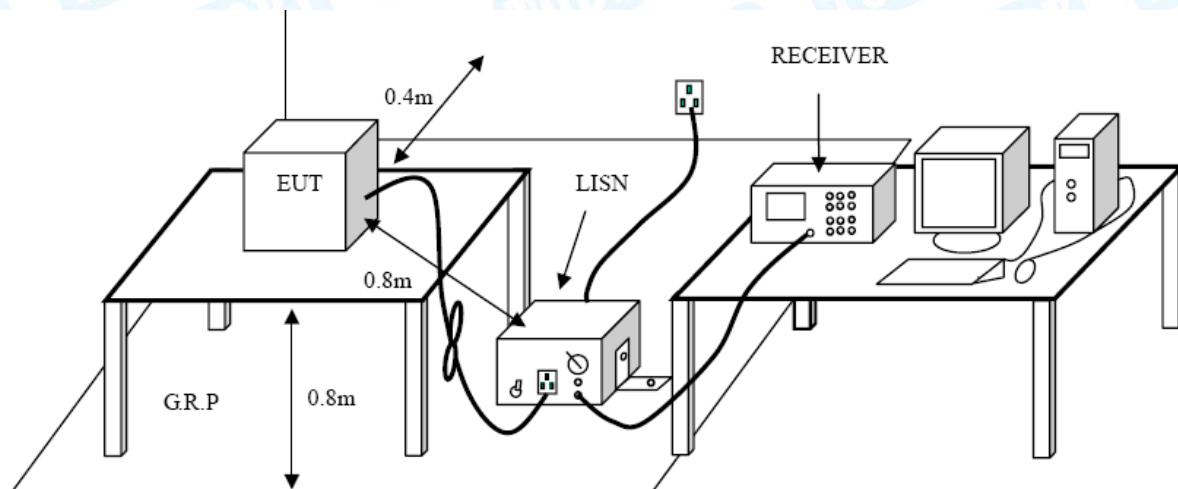

### 5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

The EUT must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

### 5.4 Deviation From Test Standard

No deviation

### 5.5 Test Data

Please refer to the Attachment B.

## 6. Radiated Emission Test

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

FCC 15.231

#### 6.1.2 Test Limit

According to FCC 15.231(a) requirement:

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolt/meter) at 3m	Field Strength of Spurious Emissions (microvolt/meter) at 3m
40.66~40.70	2250	225
70~130	1250	125
130~174	1250 to 3750(**)	125 to 375(**)
174~260	3750	375
260~470	3750 to 12500(**)	375 to 1250(**)
Above 470	12500	1250

\*\* Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

- (1) for the band 130~174 MHz, uV/m at 3 meters=  $56.81818(F)-6136.3636$ ;
- (2) for the band 260~470 MHz, uV/m at 3 meter=  $41.6667(F)-7083.3333$ .
- (3) The maximum permitted unwanted emissions level is 20 dB below the maximum permitted fundamental level. In addition field strength of any emissions which appear inside of the restriction band shall not exceed the general radiated emissions limits in FCC Part15.209.

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3

88~216	150	3
216~960	200	3
Above 960	500	3

Note:

(1) The tighter limit applies at the band edges.

(2) For above 30MHz:

$$\text{Emission Level(dBuV/m)} = 20\log \text{Emission Level(uV/m)}$$

For 0.009~0.490MHz:

$$\text{Emission Level(dBuV/m)} = 20\log \text{Emission Level(uV/m)} + 40\log(300/3)$$


For 0.049~30MHz:

$$\text{Emission Level(dBuV/m)} = 20\log \text{Emission Level(uV/m)} + 40\log(30/3)$$



So the field strength of emission limits have been calculated in below table.

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolt/meter) at 3m
433.92 MHz	80.82 (Average)
433.92 MHz	100.82 (Peak)

## 6.2 Test Setup

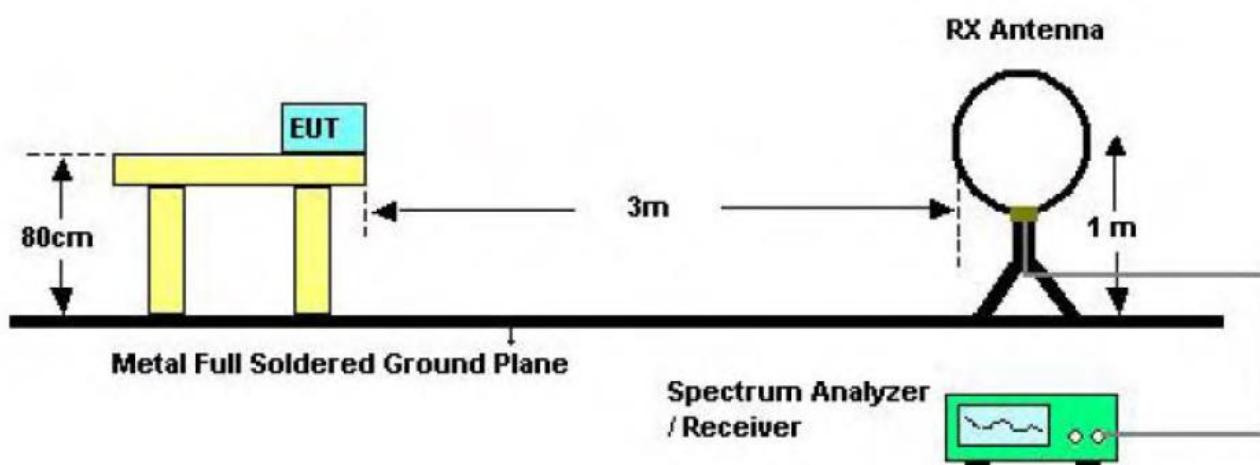

Below 30MHz Test Setup

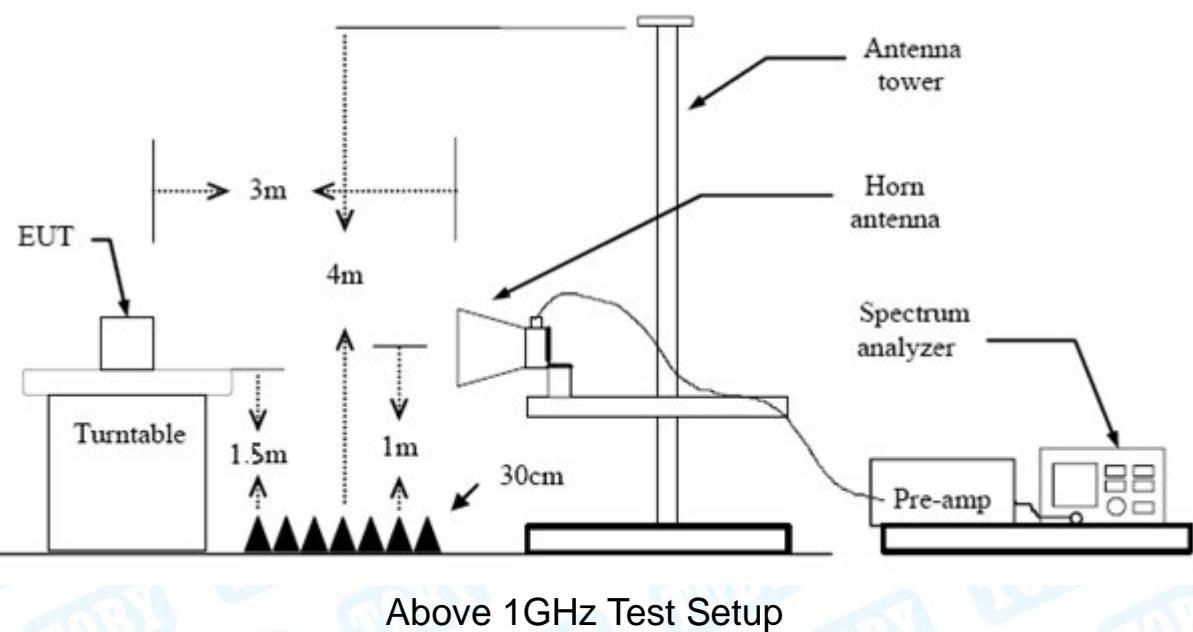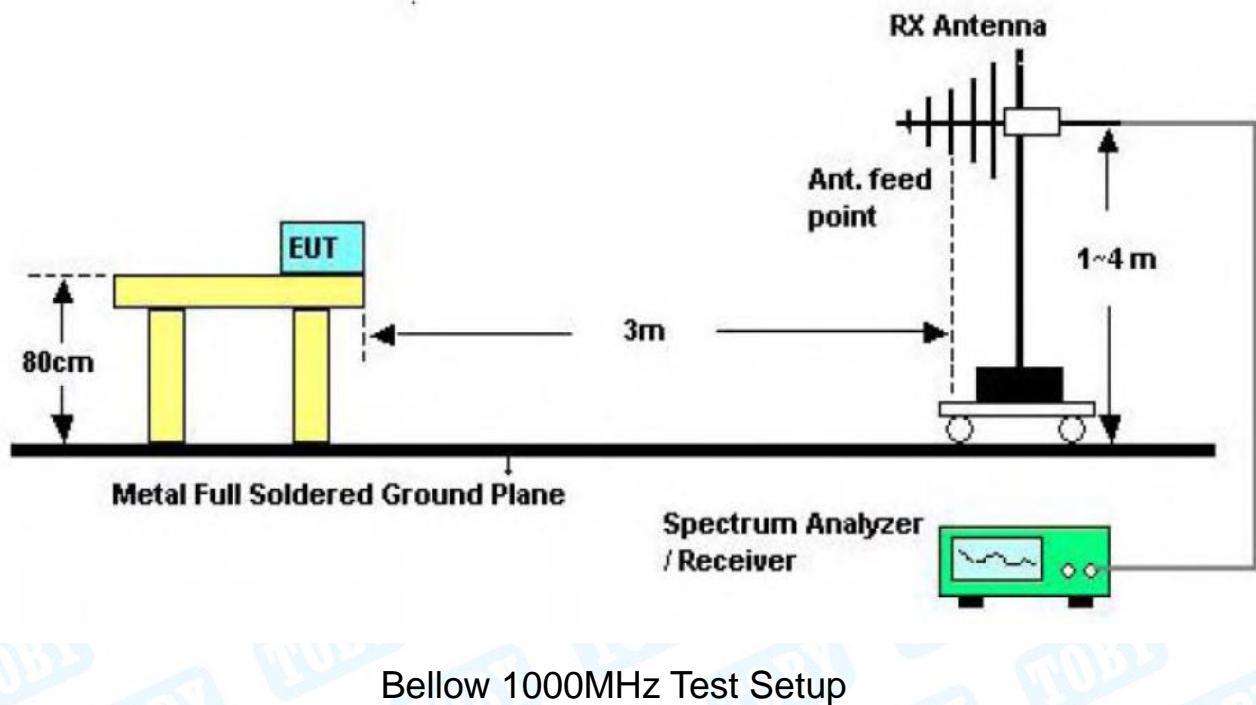

### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

### 6.4 Deviation From Test Standard

No deviation

### 6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

### 6.6 Test Data

Please refer to the Attachment B.

## 7. Bandwidth

### 7.1 Test Standard and Limit

#### 7.1.1 Test Standard


FCC 15.231

#### 7.1.2 Test Limit

The 99%bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. So the emission bandwidth limits have been calculated in below table.

Fundamental Frequency	20 dB Bandwidth Limits (MHz)
433.92MHz	1.0848

### 7.2 Test Setup

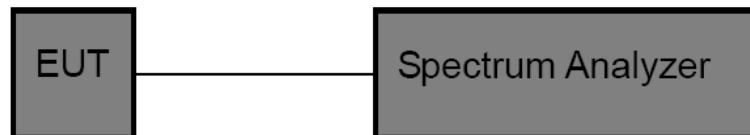

### 7.3 Test Procedure

- (1) Set Spectrum Analyzer Center Frequency= Fundamental Frequency, RBW=10 kHz, VBW= 30 kHz, Span= 1 MHz.
- (2) Measured the spectrum width with power higher than 20 dB below carrier.

### 7.4 Deviation From Test Standard

No deviation

### 7.5 EUT Operating Condition

The Equipment Under Test was Programmed to be in continuously transmitting mode.

### 7.6 Test Data

Please refer to the Attachment C.

## 8. Release Time Measurement

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

FCC 15.231

#### 8.1.2 Test Limit

According to FCC 15.231a, A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 8.2 Test Setup

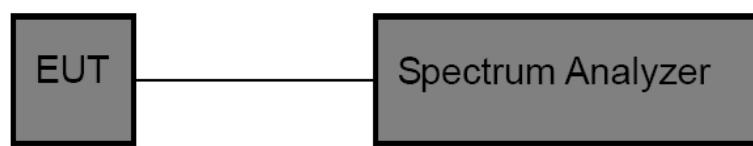

### 8.3 Test Procedure

- (1) Setup the EUT as show in the block diagram above.
- (2) Set Spectrum Analyzer Centre Frequency= Fundamental Frequency, RBW=100 kHz, VBW= 300 kHz, Span= 0 Hz. Sweep Time= 5 Seconds.
- (3) Setup the EUT as normal operation and press Transmitter button.
- (4) Set Spectrum Analyzer View, Delta Mark time.

### 8.4 Deviation From Test Standard

No deviation

### 8.5 EUT Operating Condition

The EUT was set to work in transmitting mode.

### 8.6 Test Data

Please refer to the Attachment D.


## 9. Duty Cycle

### 9.1 Test Standard and Limit

#### 9.1.1 Test Standard

FCC 15.231

### 9.2 Test Setup

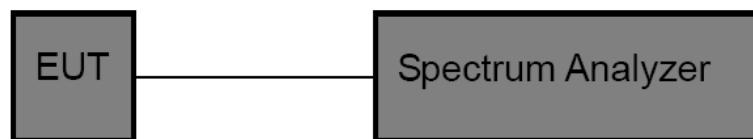

### 9.3 Test Procedure

- (1) The EUT was placed on a turntable which is 0.8m above ground plane.
- (2) Set EUT operating in continuous transmitting mode.
- (3) Set the Spectrum Analyzer to the transmitter carrier frequency, and set the spectrum analyzer resolution bandwidth (RBW) to 100 kHz and video bandwidth (VBW) to 300 kHz, Span was set to 0 Hz.
- (4) The Duty Cycle was measured and recorded.

### 9.4 Deviation From Test Standard

No deviation

### 9.5 EUT Operating Condition

The EUT was programmed to be in transmitting mode.

### 9.6 Test Data

Please refer to the Attachment E.

## 10. Antenna Requirement

### 10.1 Standard Requirement

#### 10.1.1 Standard

FCC Part 15.203

#### 10.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 10.1 Deviation From Test Standard

No deviation

### 10.2 Antenna Connected Construction

The gains of the antenna used for transmitting is -3.13 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

The EUT antenna is a FPC Antenna. It complies with the standard requirement.


Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

## Attachment A-- Conducted Emission Test Data

Temperature:	25.1 °C	Relative Humidity:	54%				
Test Voltage:	AC 120V/60Hz						
Terminal:	Line						
Test Mode:	Mode 1						
Remark:	Only worse case is reported.						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV	dBuV	dB
1		0.1780	21.79	11.04	32.83	64.57	-31.74
2		0.1780	4.71	11.04	15.75	54.57	-38.82
3		0.4100	16.59	10.91	27.50	57.65	-30.15
4		0.4100	8.72	10.91	19.63	47.65	-28.02
5		0.6500	12.92	10.90	23.82	56.00	-32.18
6		0.6500	14.78	10.90	25.68	56.00	-30.32
7		0.6500	6.74	10.90	17.64	46.00	-28.36
8	*	0.6500	8.82	10.90	19.72	46.00	-26.28
9		2.2340	8.18	10.42	18.60	56.00	-37.40
10		2.2340	4.65	10.42	15.07	46.00	-30.93
11		5.9580	6.96	10.03	16.99	60.00	-43.01
12		5.9580	2.88	10.03	12.91	50.00	-37.09

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) =QuasiPeak/Average (dBuV)-Limit (dBuV)
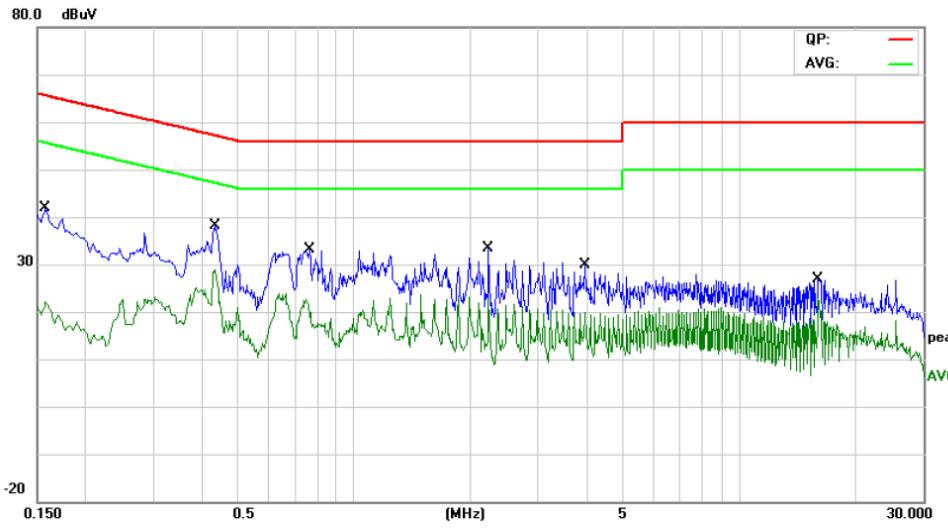
<b>Temperature:</b>	25.1 °C	<b>Relative Humidity:</b>	54%																																																																																																																														
<b>Test Voltage:</b>	AC 120V/60Hz																																																																																																																																
<b>Terminal:</b>	Neutral																																																																																																																																
<b>Test Mode:</b>	Mode 1																																																																																																																																
<b>Remark:</b>	Only worse case is reported.																																																																																																																																
																																																																																																																																	
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measure- ment</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>0.1580</td> <td>25.07</td> <td>11.09</td> <td>36.16</td> <td>65.56</td> <td>-29.40</td> <td>QP</td> </tr> <tr> <td>2</td> <td></td> <td>0.1580</td> <td>8.03</td> <td>11.09</td> <td>19.12</td> <td>55.56</td> <td>-36.44</td> <td>AVG</td> </tr> <tr> <td>3</td> <td></td> <td>0.4340</td> <td>19.23</td> <td>10.91</td> <td>30.14</td> <td>57.18</td> <td>-27.04</td> <td>QP</td> </tr> <tr> <td>4</td> <td></td> <td>0.4340</td> <td>8.90</td> <td>10.91</td> <td>19.81</td> <td>47.18</td> <td>-27.37</td> <td>AVG</td> </tr> <tr> <td>5</td> <td></td> <td>0.7660</td> <td>12.24</td> <td>10.84</td> <td>23.08</td> <td>56.00</td> <td>-32.92</td> <td>QP</td> </tr> <tr> <td>6</td> <td></td> <td>0.7660</td> <td>4.85</td> <td>10.84</td> <td>15.69</td> <td>46.00</td> <td>-30.31</td> <td>AVG</td> </tr> <tr> <td>7</td> <td></td> <td>2.2340</td> <td>14.58</td> <td>10.42</td> <td>25.00</td> <td>56.00</td> <td>-31.00</td> <td>QP</td> </tr> <tr> <td>8</td> <td>*</td> <td>2.2340</td> <td>10.20</td> <td>10.42</td> <td>20.62</td> <td>46.00</td> <td>-25.38</td> <td>AVG</td> </tr> <tr> <td>9</td> <td></td> <td>3.9740</td> <td>13.74</td> <td>10.09</td> <td>23.83</td> <td>56.00</td> <td>-32.17</td> <td>QP</td> </tr> <tr> <td>10</td> <td></td> <td>3.9740</td> <td>9.20</td> <td>10.09</td> <td>19.29</td> <td>46.00</td> <td>-26.71</td> <td>AVG</td> </tr> <tr> <td>11</td> <td></td> <td>16.0140</td> <td>13.95</td> <td>10.40</td> <td>24.35</td> <td>60.00</td> <td>-35.65</td> <td>QP</td> </tr> <tr> <td>12</td> <td></td> <td>16.0140</td> <td>11.19</td> <td>10.40</td> <td>21.59</td> <td>50.00</td> <td>-28.41</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over				MHz	dBuV	dB	dBuV	dBuV	dB	Detector	1		0.1580	25.07	11.09	36.16	65.56	-29.40	QP	2		0.1580	8.03	11.09	19.12	55.56	-36.44	AVG	3		0.4340	19.23	10.91	30.14	57.18	-27.04	QP	4		0.4340	8.90	10.91	19.81	47.18	-27.37	AVG	5		0.7660	12.24	10.84	23.08	56.00	-32.92	QP	6		0.7660	4.85	10.84	15.69	46.00	-30.31	AVG	7		2.2340	14.58	10.42	25.00	56.00	-31.00	QP	8	*	2.2340	10.20	10.42	20.62	46.00	-25.38	AVG	9		3.9740	13.74	10.09	23.83	56.00	-32.17	QP	10		3.9740	9.20	10.09	19.29	46.00	-26.71	AVG	11		16.0140	13.95	10.40	24.35	60.00	-35.65	QP	12		16.0140	11.19	10.40	21.59	50.00	-28.41	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over																																																																																																																										
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector																																																																																																																									
1		0.1580	25.07	11.09	36.16	65.56	-29.40	QP																																																																																																																									
2		0.1580	8.03	11.09	19.12	55.56	-36.44	AVG																																																																																																																									
3		0.4340	19.23	10.91	30.14	57.18	-27.04	QP																																																																																																																									
4		0.4340	8.90	10.91	19.81	47.18	-27.37	AVG																																																																																																																									
5		0.7660	12.24	10.84	23.08	56.00	-32.92	QP																																																																																																																									
6		0.7660	4.85	10.84	15.69	46.00	-30.31	AVG																																																																																																																									
7		2.2340	14.58	10.42	25.00	56.00	-31.00	QP																																																																																																																									
8	*	2.2340	10.20	10.42	20.62	46.00	-25.38	AVG																																																																																																																									
9		3.9740	13.74	10.09	23.83	56.00	-32.17	QP																																																																																																																									
10		3.9740	9.20	10.09	19.29	46.00	-26.71	AVG																																																																																																																									
11		16.0140	13.95	10.40	24.35	60.00	-35.65	QP																																																																																																																									
12		16.0140	11.19	10.40	21.59	50.00	-28.41	AVG																																																																																																																									
<b>Remark:</b> 1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB) 2. Margin (dB) = QuasiPeak/Average (dBuV)-Limit (dBuV)																																																																																																																																	

## Attachment B-- Radiated Emission Test Data


### 9 KHz to 30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 30MHz-1GHz


Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX Mode		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

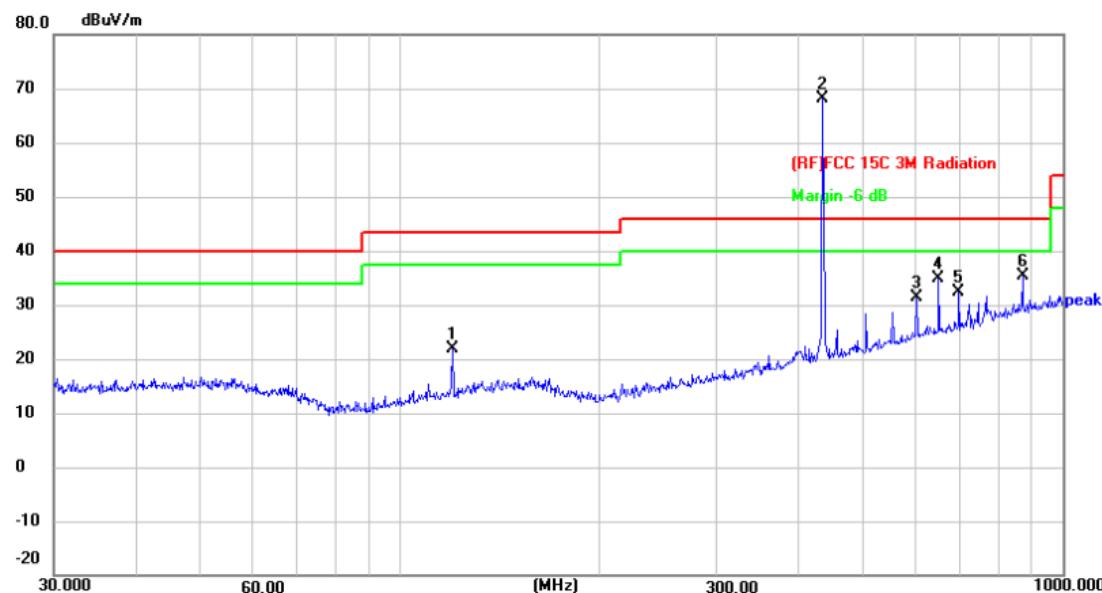


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	119.8556	45.76	-23.81	21.95	43.50	-21.55	peak
2 *	434.0651	85.06	-17.00	68.06	46.00	22.06	peak
3	601.4265	44.06	-12.80	31.26	46.00	-14.74	peak
4	649.6597	46.87	-11.98	34.89	46.00	-11.11	peak
5	696.8567	43.65	-11.19	32.46	46.00	-13.54	peak
6	869.1302	43.42	-7.98	35.44	46.00	-10.56	peak

Emission Level= Read Level+ Correct Factor


Fundamental and Harmonics Result						
Freq(MHz)	Peak Level (dB $\mu$ V/m)	AV Factor(dB $\mu$ V/m) (see Attachment E)	Average Level (dB $\mu$ V/m)	Limit(dB $\mu$ V/m) (average)	Limit(dB $\mu$ V/m) (Peak)	Conclusion
434.0651	68.06	-13.97	54.09	80.80	100.80	PASS
869.1302	35.44	-13.97	21.47	60.80	80.80	PASS

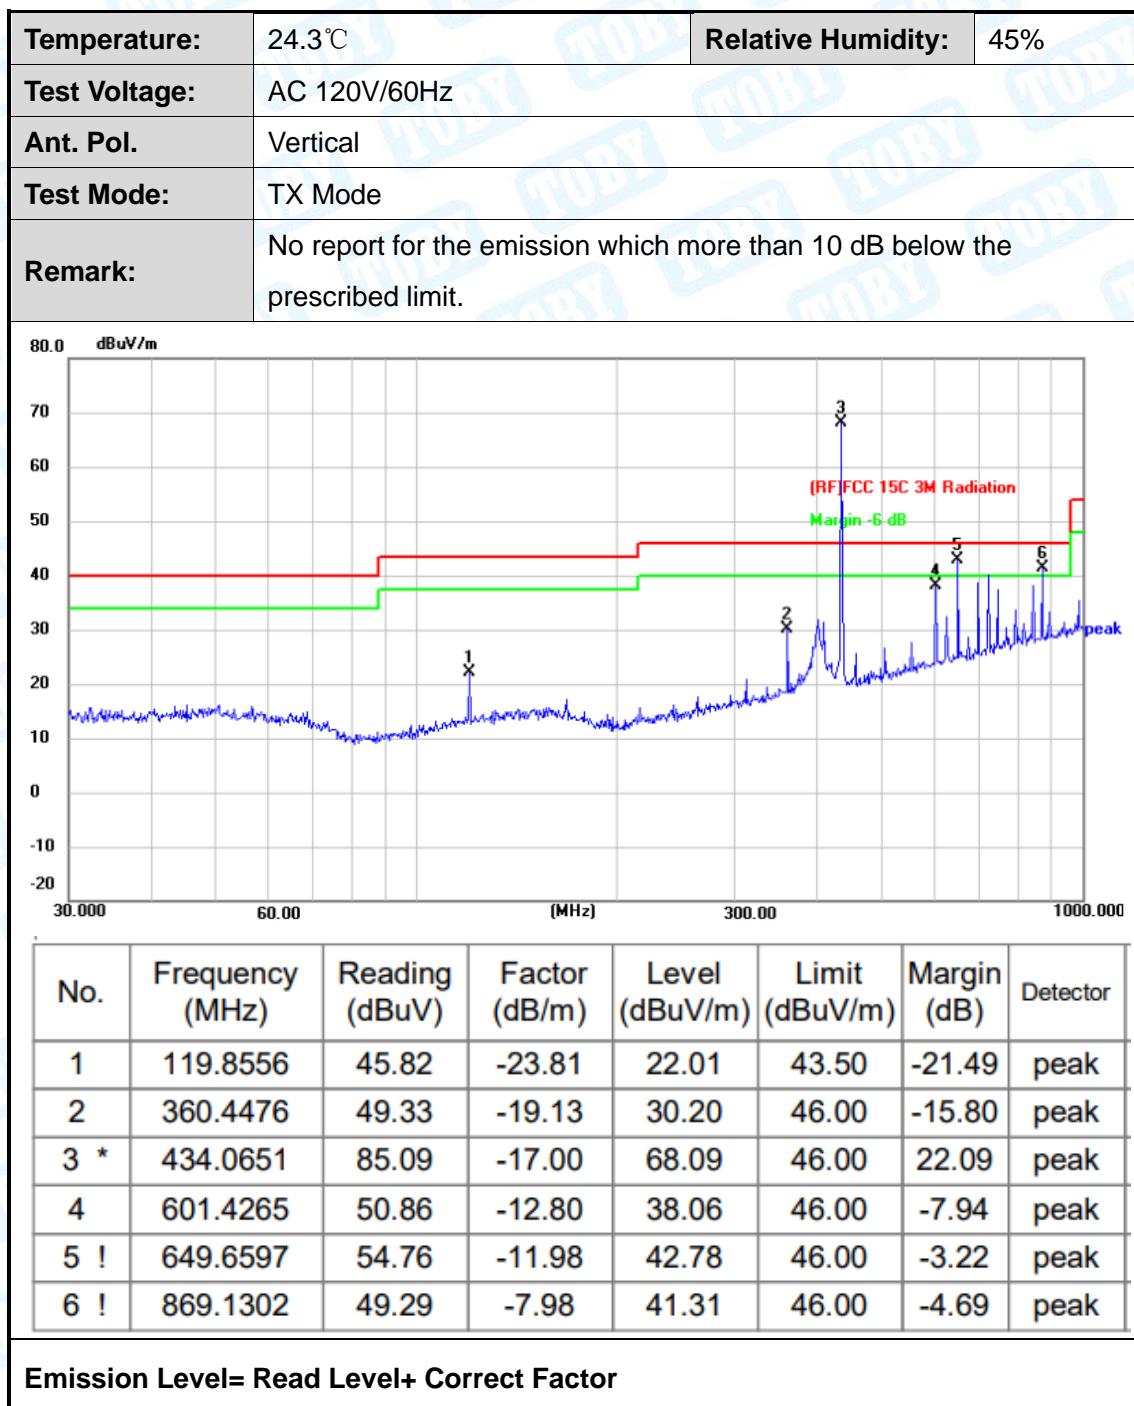

Fundamental and Harmonics Result						
Freq(MHz)	Peak Level (dB $\mu$ V/m)	AV Factor(dB $\mu$ V/m) (see Attachment E)	Average Level (dB $\mu$ V/m)	Limit(dB $\mu$ V/m) (average)	Limit(dB $\mu$ V/m) (Peak)	Conclusion
434.0651	68.09	-13.97	54.12	80.80	100.80	PASS
869.1302	41.31	-13.97	27.34	60.80	80.80	PASS

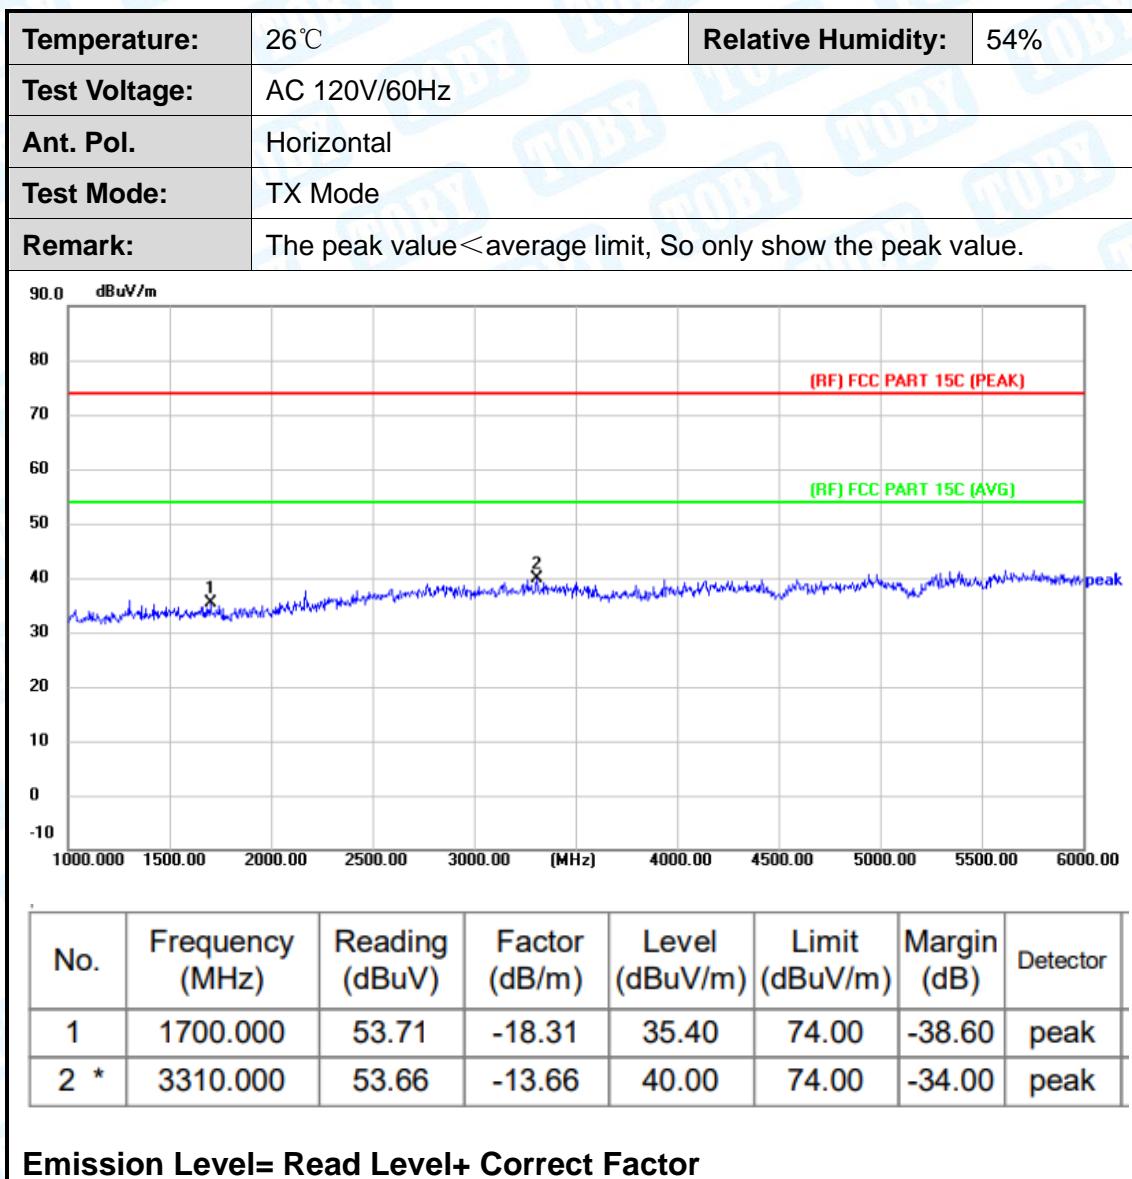**Above 1G**


Average Value:						
Frequency (MHz)	Peak Level (dBuV/m)	Duty cycle factor	Average value (dBuV/m)	Limit Line (dBuV/m)	Over limit (dB)	Polarization
1700.000	35.40	-13.97	21.43	54.00	-32.57	Horizontal
3310.000	40.00	-13.97	26.03	54.00	-27.97	Horizontal

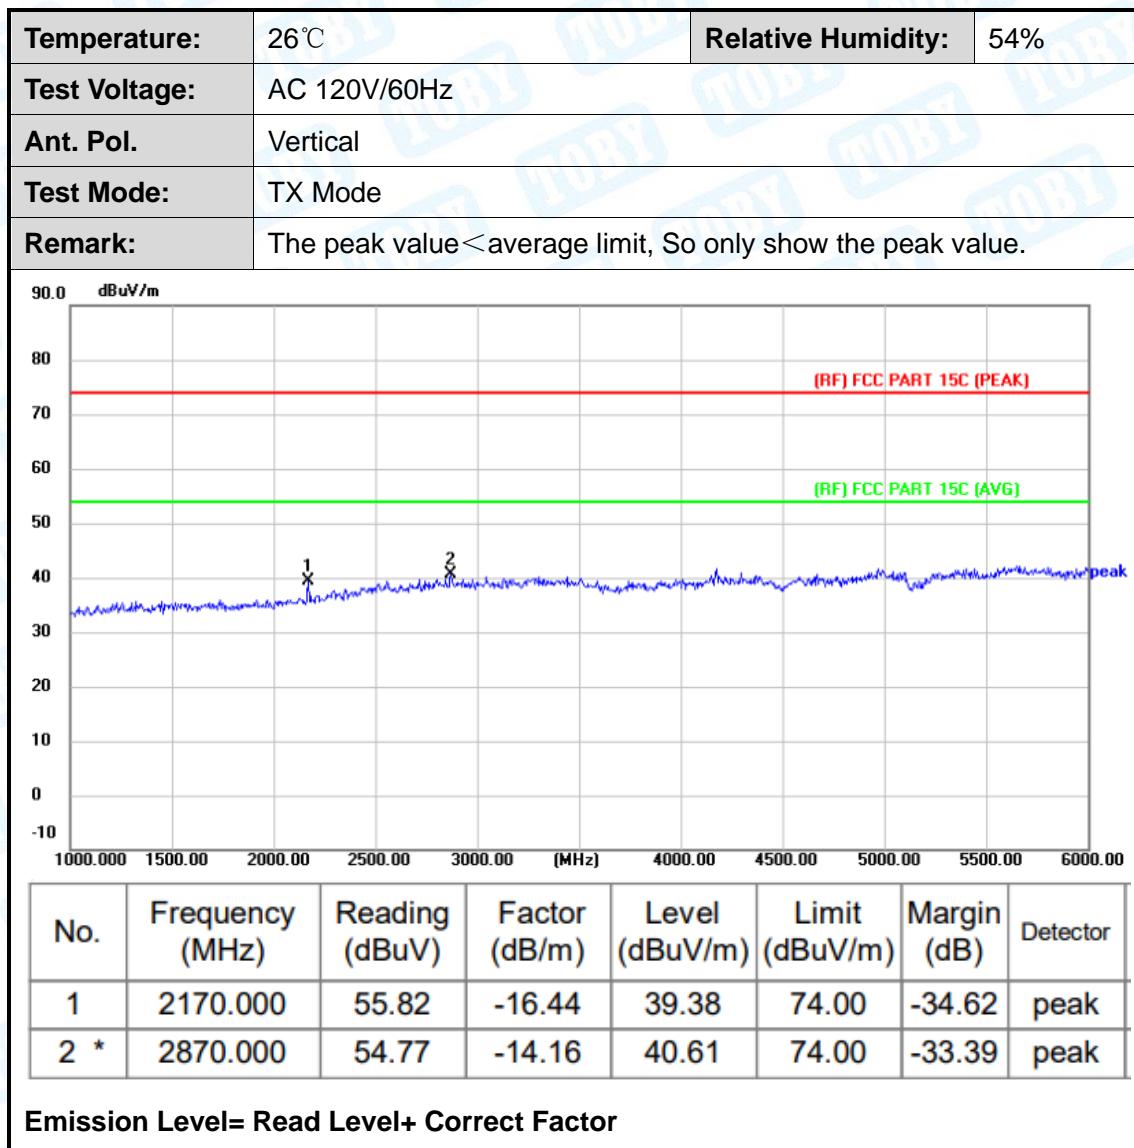

Average Value:						
Frequency (MHz)	Peak Level (dB <sub>UV</sub> /m)	Duty cycle factor	Average value (dB <sub>UV</sub> /m)	Limit Line (dB <sub>UV</sub> /m)	Over limit (dB)	Polarization
2170.000	39.38	-13.97	25.41	54.00	-28.59	Vertical
2870.000	40.61	-13.97	26.64	54.00	-27.36	Vertical

**Other harmonics emissions are lower than 20dB below the allowable limit.**

**Note:** (1) All Readings are Peak Value and AV. And AV is calculated by the following:

Testing frequency range below 1GHz the measuring instrument use  $VBW=120$  kHz with Quasi-peak detection.

Testing frequency range above 1GHz the measuring instrument use  $RBW=1$  MHz and  $VBW=3$  MHz with Peak Detector for Peak Values.

Average Values=Peak Values+20log (Duty Cycle)

(2) Emission Level= Reading Level + Probe Factor +Cable Loss

(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**Pulse Desensitization Correction Factor**

Note:

1)The Smallest Pulse Width (PW)= 0.400ms


(2)  $2/PW=2/0.400(ms)= 5\text{kHz}<100\text{ kHz}$

Because  $2/PW<RBW$ , so the PDCF is not needed.


## Attachment C--Bandwidth Data

Temperature	:	25 °C
Relative Humidity	:	65 %
Pressure	:	1010 hPa
Test Power	:	AC 120V/60Hz

Frequency (MHz)	20 dBc Bandwidth (kHz)	Limit (kHz)	Result
433.92	52.40	1084.8	PASS

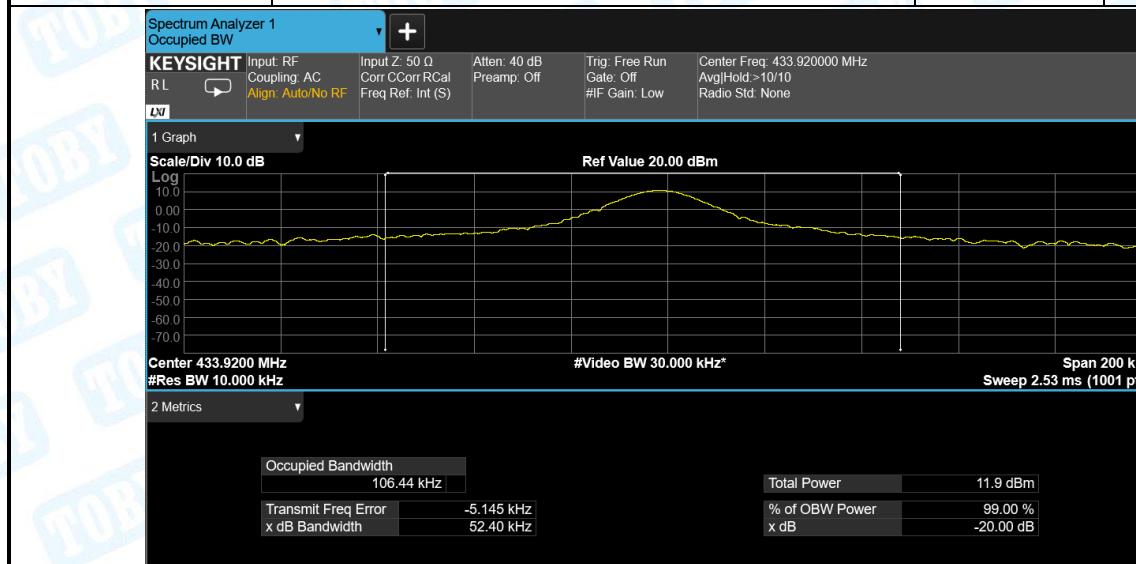

## Attachment D-- Release Time Measurement Data

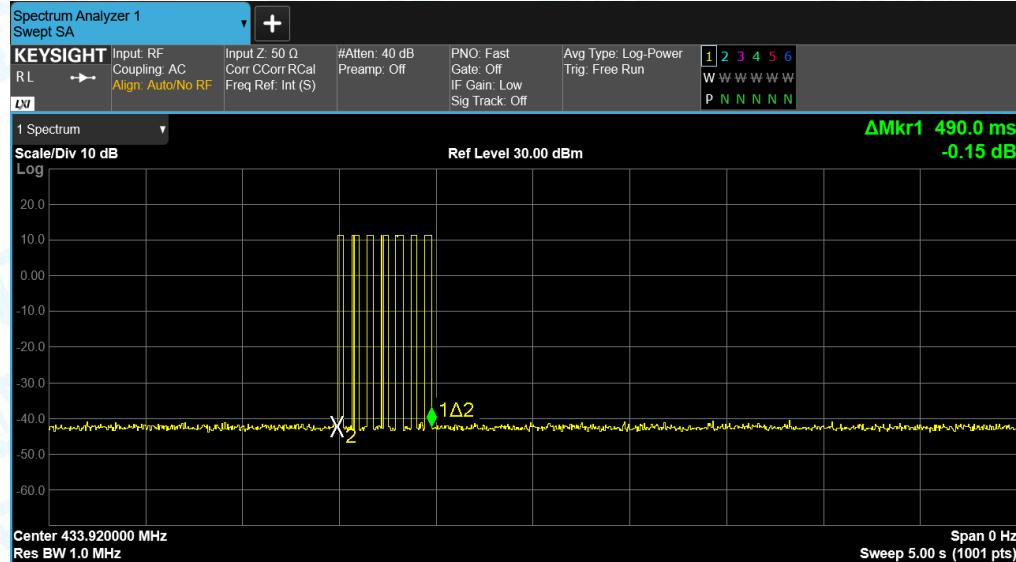Temperature	:	25 °C
Relative Humidity	:	65 %
Pressure	:	1010 hPa
Test Power	:	AC 120V/60Hz
Release Time(s)	Limit (s)	Result
0.490	5	PASS
		

## Attachment E--Duty Cycle Data

Please refer the following pages:

**Plot 1:** transmit once in 300ms, and each cycle is 72.90 ms there are three kinds of pulse in each cycle, the larger pulses total 2, the middle pulses total 10, the small pulses total 14.

**Plot 2:** one small pulse in a time period of 0.30ms

**Plot 3:** one middle pulse in a time period of 0.80ms


**Plot 4:** one larger pulse in a time period of 1.20ms

$$\text{Duty Cycle} = \text{ON/Total} = (1.20*2 + 0.80*10 + 0.30*14) / 72.90 = 20.02\%$$


$$20\log(\text{Duty Cycle}) = -13.97$$

$$\text{Average} = \text{Peak Value} + 20\log(\text{Duty Cycle}), \text{AV} = \text{PK} - 13.97$$


**Plot 1**

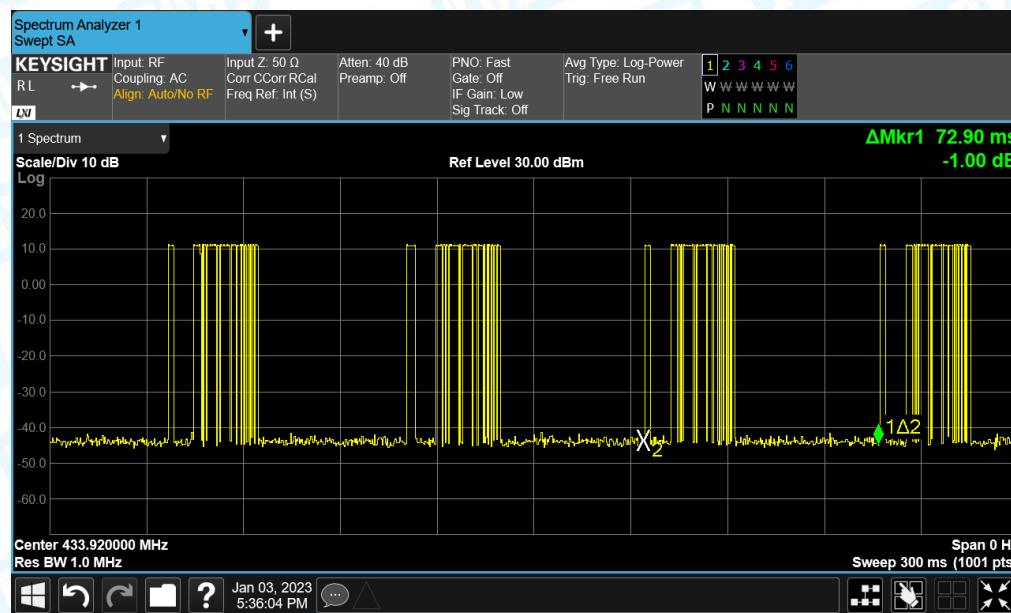


## Plot 2

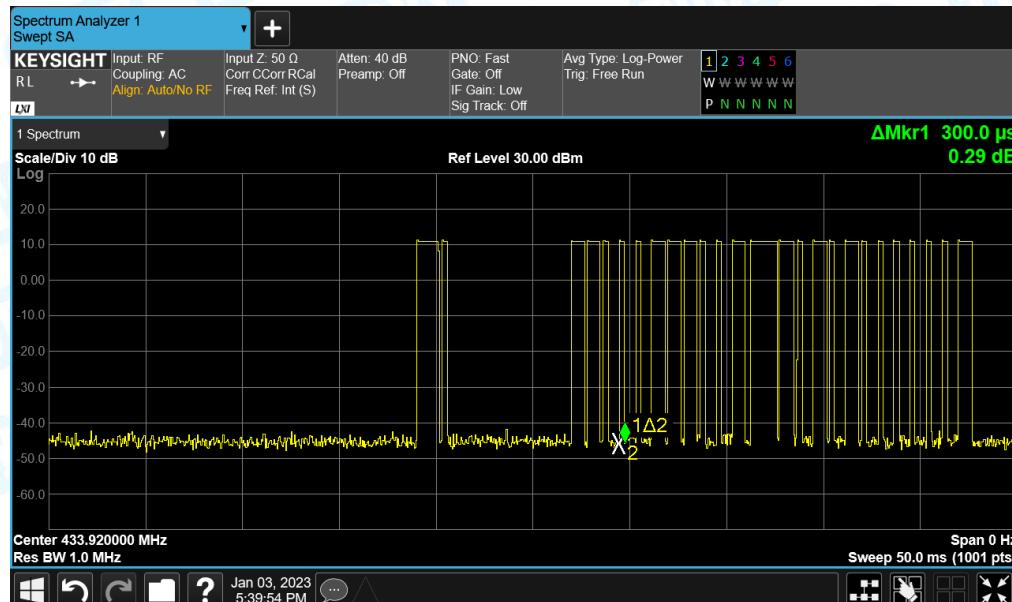

## Plot 3

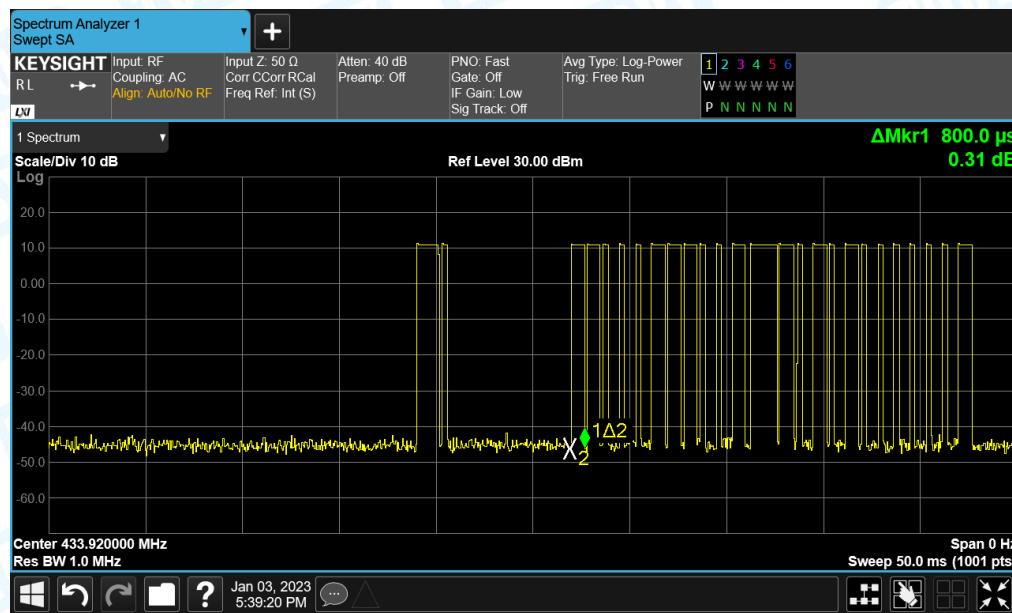

### Plot 4

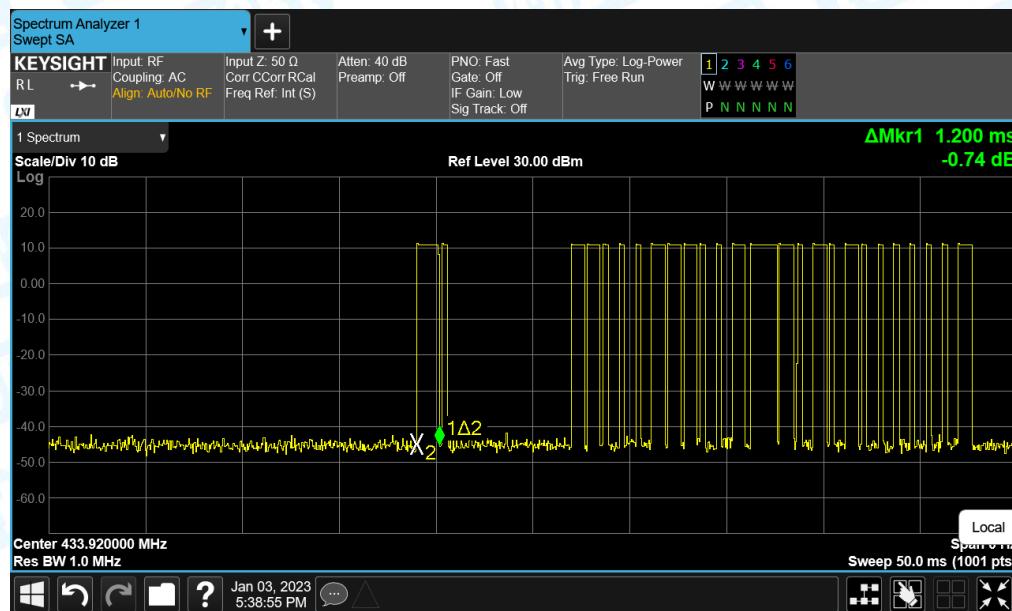

-----END OF REPORT-----