



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

### FOR

Riding motorcycle protective helmet(with video and Bluetooth features)

Model : X

Trade Name : JARVISH

Issued to

Jarvish Inc.

2F., No. 67, Zhouzi St., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Issued by

WH Technology Corp.



EMC Test Site	Xizhi Office and Lab	7F., No.262, Sec. 3, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
Tel.: +886-2-7729-7707 Fax: +886-2-8648-1311		

*Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of WH Technology Corp. This document may be altered or revised by WH Technology Corp. Personnel only, and shall be noted in the revision section of the document.*



---

<b>TABLE OF CONTENTS</b>	<b>2</b>
<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 DESCRIPTION OF THE TESTED SAMPLES	4
1.2 SUMMARY OF TEST RESULTS	5
<b>2. TEST METHODOLOGY</b>	<b>6</b>
2.1 GENERAL TEST PROCEDURES	6
2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
2.3 DESCRIPTION OF TEST MODES	7
2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS	8
<b>3. TEST AND MEASUREMENT EQUIPMENT</b>	<b>9</b>
3.1 CALIBRATION	9
3.2 EQUIPMENT	9
<b>4. SECTION 15.203 ANTENNA REQUIREMENTS</b>	<b>11</b>
4.1 STANDARD APPLICABLE	11
4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN	11
<b>5. SECTION 15.249 REQUIREMENTS (FUNDAMENTAL/ HARMONICS)</b>	<b>12</b>
5.1 TEST SETUP	12
5.2 LIMIT	12
5.3 RESULT: PASSED	12
5.4 TEST DATA	13
<b>6. SECTION 15.205 REQUIREMENTS (BAND EDGE)</b>	<b>18</b>
6.1 TEST SETUP	18
6.2 LIMIT	18
6.3 RESULT: PASSED	18
6.4 TEST DATA	19
<b>7. SECTION 15.209 REQUIREMENTS (GENERAL RADIATED EMISSION)</b>	<b>22</b>
7.1 TEST SETUP	22
7.2 LIMIT	23
7.3 TEST PROCEDURE	23
7.4 RESULT: PASSED	23
7.5 TEST DATA	23
<b>8. SECTION 15.207 REQUIREMENTS (POWERLINE CONDUCTED EMISSIONS)</b>	<b>27</b>
8.1 TEST SETUP	27
8.2 LIMIT	27
8.3 TEST PROCEDURE	27
8.4 TEST SPECIFICATION	28
8.5 RESULT: PASSED	28
8.6 TEST DATA	29
<b>9. SECTION 15.215 REQUIREMENT (20DB BANDWIDTH TEST)</b>	<b>31</b>
9.1 TEST SETUP	31
9.2 TEST PROCEDURE	31
9.3 RESULT: PASSED	31
9.4 TEST DATA	32



## 1. GENERAL INFORMATION

**Applicant** : Jarvish Inc.  
**Address** : 2F., No. 67, Zhouzi St., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)  
**Manufacturer** : Jarvish Inc.  
**Address** : 2F., No. 67, Zhouzi St., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)  
**EUT** : Riding motorcycle protective helmet(with video and Bluetooth features)  
**Model Name** : X  
**Model Differences** : N/A

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.10:2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

## FCC part 15 subpart C

Receipt Date : 08/02/2019

Final Test Date : 07/01/2020

Tested By:

Jul. 01, 2020  
Date

  
Bing Zhang / Engineer

Reviewed by:

Jul. 01, 2020  
Date

  
Bell Wei / Manager

Designation Number: TW2954



## 1.1 DESCRIPTION OF THE TESTED SAMPLES

EUT Name : Riding motorcycle protective helmet(with video and Bluetooth features)

Model Number : X

FCC ID : 2AUDGJAR9010801M25H

Receipt Date : 08/02/2019

Input Voltage : DC 5V / DC 3.7V

Power From : Inside Outside  
Battery Adaptor AC Power Source  
DC Power Source Support Unit PC

Operate Frequency : Refer to the channel list as described below (2402~2480MHz)

Modulation Technique : GFSK

Number of Channels : 40

Channel spacing : N/A  2 MHz

Operating Mode : Simplex Half Duplex

Antenna Type : FPC Antenna

Antenna gain : 4.96 dBi



Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

## 1.2 SUMMARY OF TEST RESULTS

FCC Rule	Description of Test	Result
15.203	Antenna Requirements	Pass
15.249	Fundamental/ Harmonics	Pass
15.205	Band Edge	Pass
15.209	Radiated Emission	Pass
15.207	Conducted Emission	Pass
15.215	20dB bandwidth test	Pass



## 2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI C63.10:2013 and FCC CFR 47 Part 15 Subpart C.

### 2.1 GENERAL TEST PROCEDURES

#### **Conducted Emissions**

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.10:2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

#### **Radiated Emissions**

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.



## 2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## 2.3 DESCRIPTION OF TEST MODES

The EUT was tested under following modes:

**Modes:**

1. Continuous transmitting

**Channels:**

1. 2.402 GHz (Lowest Channel)
2. 2.440 GHz (Middle Channel)
3. 2.480 GHz (Highest Channel)



## 2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

### Setup Diagram

See test photographs attached in appendix for the actual connections between EUT and support equipment.

### Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID	Trade name	Data Cable	Power Cord
1	Notebook	HSTNN-Q95C	5CD5514JLJ	R3A304	HP	N/A	Unshielded 1.8m
2	Adapter	APC-01	NA	R38700	amber	N/A	N/A

**Note:** All the above equipment /cable were placed in worse case position to maximize emission signals during emission test.

**Grounding:** Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



## 3. TEST AND MEASUREMENT EQUIPMENT

### 3.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 3.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

**Tablelist of Test and Measurement Equipment**

Conducted emission				
Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
EMI Test Receiver	R&S	ESHS10	830223/008	2020/08/11
Spectrum Analyzer	R&S	FSP3	833387/010	2020/12/19
Two-Line V-Network	R&S	NNB-2/16z	98062	2020/08/04
Test Cable	N/A	N/A	EMI-3	2020/10/09
Measurement Software	AUDIX	e3	V6.101222a	N/A
Radiated emission Below 1GHz				
Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
Bilog antenna	Chase	CBL6111A	1546	2020/07/30
LOOP Antenna	EMCO	6507	9301-1298	2021/01/08
Pre-amplifier	Anritsu	MH648A	M15180	2020/08/11
Cable	EMCI	EMCCFD400-N M-NM-7000	180617	2020/08/11
Cable	Marvelous Microwave	260260.F141	120A	2020/08/11
Receiver	R&S	ESCI3	101131	2020/09/08
Measurement Software	AUDIX	e3	V9.160707	N/A
Radiated emission Above 1GHz				



Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
Horn antenna	ETS LINDGREN	3117	00114397	2021/04/08
Horn antenna	com-power	AH-826	81000	2020/09/16
Horn antenna	Schwarzbeck	BBHA9170	#687	2021/06/11
Pre-amplifier	EMCI	EMC051845	980108	2020/12/19
Pre-amplifier	MITEQ	JS4-18002600-30-5A	808329	2020/09/04
Pre-amplifier	EMC INSTRUMENT	EMC264035SE	980288	2021/05/06
RF CABLE	SUCOFLEX	104PEA	27348/4PEA	2021/06/10
RF CABLE	AGILENT	EMC102-KM-K M-3000	160101	2020/08/18
RF CABLE	AGILENT	EMC102-KM-K M-600	160102	2020/08/18
Spectrum Analyzer	R&S	FSP7	830180/006	2021/04/23
Spectrum Analyzer	ADVANTEST	R3182	150900201	2021/02/19
Measurement Software	AUDIX	e3	V9.160707	N/A

● CALIBRATION INTERVAL OF INSTRUMENTS LISTED ABOVE IS ONE YEAR



## 4. SECTION 15.203 ANTENNA REQUIREMENTS

### 4.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN: MEET FCC 47 CFR SECTION 15.203 REQUIREMENT.

#### BT:

Antenna Type: FPC antenna

Antenna Gain: 4.96 dBi



## 5. SECTION 15.249 REQUIREMENTS (FUNDAMENTAL/ HARMONICS)

### 5.1 TEST SETUP

Refer to paragraph 6.1.

### 5.2 LIMIT

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB $\mu$ V/m at 3-meter)	Detector
902 - 928 2400 – 2483 5725 - 5875	114	Peak
902 - 928 2400 – 2483 5725 - 5875	94	AV

Fundamental Frequency (MHz)	Field Strength of Harmonics (dB $\mu$ V/m at 3-meter)	Detector
902 - 928 2400 – 2483 5725 - 5875	74	Peak
902 - 928 2400 – 2483 5725 - 5875	54	AV


### 5.3 RESULT: PASSED



## 5.4 TEST DATA

### Fundamental

Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode 1	: TX-LO 2402-MI 2440-HI 2480 MHz	Temperature	: 33 °C
Memo	: FPC Antenna	Humidity	: 56 %

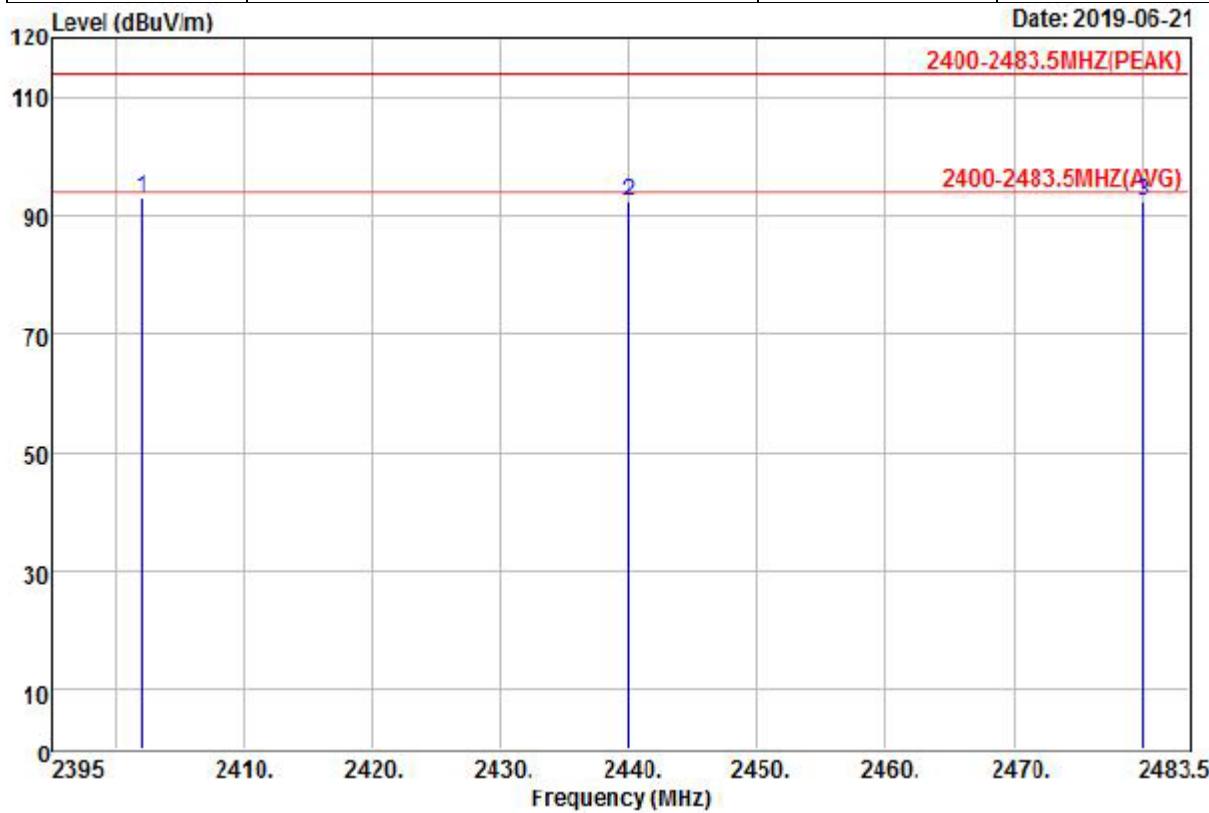


Remarks : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor-Cable loss-  
: Amplifier Factor

Freq	Read		Limit	Over	Over	Remark
	Level	Factor		Line	Line	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @ 2402.00	106.17	-13.20	92.97	114.00	-21.03	Peak
2 2440.00	105.46	-13.01	92.45	114.00	-21.55	Peak
3 2480.00	104.96	-12.70	92.26	114.00	-21.74	Peak



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode 1	: TX-LO 2402-MI 2440-HI 2480 MHz	Temperature	: 33 °C
Memo	: FPC Antenna	Humidity	: 56 %

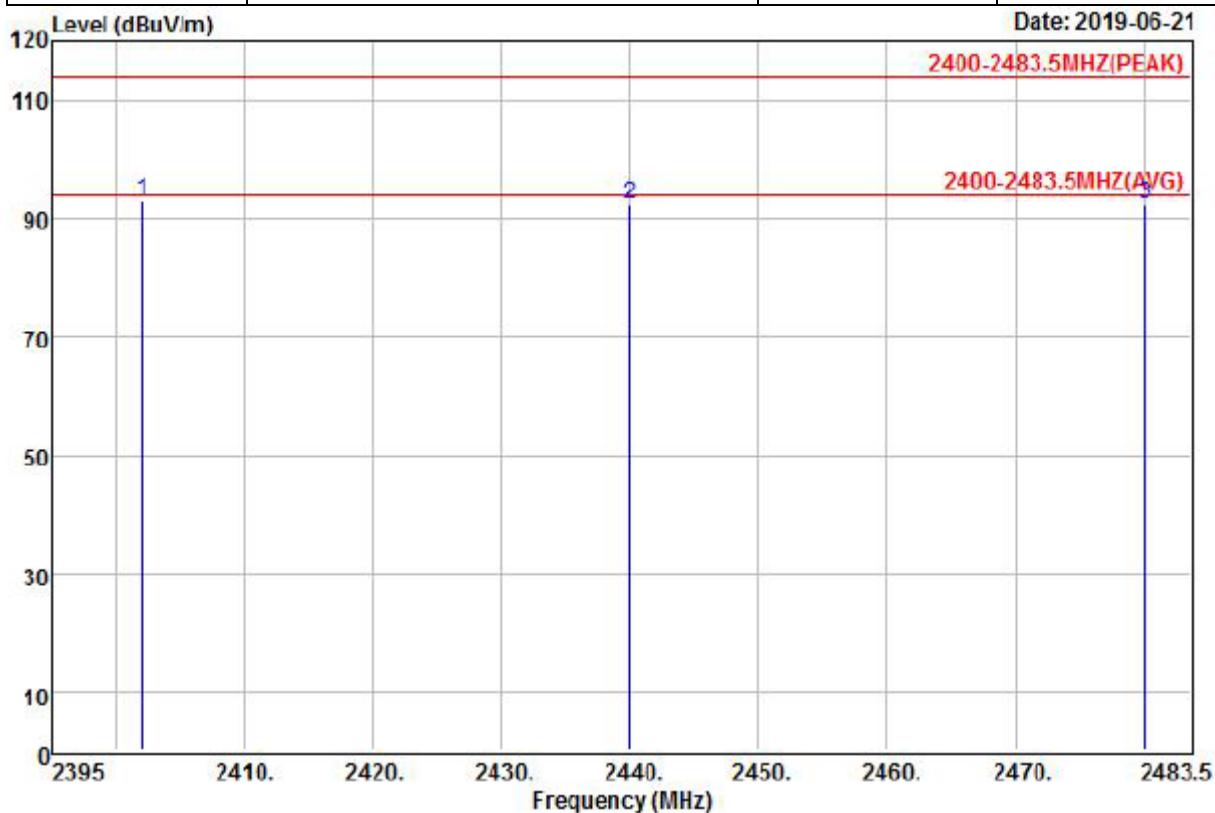


Remarks : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor-Cable loss-  
: Amplifier Factor

Freq	Read		Limit Level	Over Line	Over Limit	Remark
	Level	Factor				
	MHz	dB <sub>uV</sub>	dB/m	dB <sub>uV/m</sub>	dB <sub>uV/m</sub>	dB
1 @	2402.00	106.08	-13.20	92.88	114.00	-21.12 Peak
2	2440.00	105.38	-13.01	92.37	114.00	-21.63 Peak
3	2480.00	104.89	-12.70	92.19	114.00	-21.81 Peak



## Harmonics

Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode 1	: TX-LO 2402-MI 2440-HI 2480 MHz	Temperature	: 33 °C
Memo	: FPC Antenna	Humidity	: 56 %

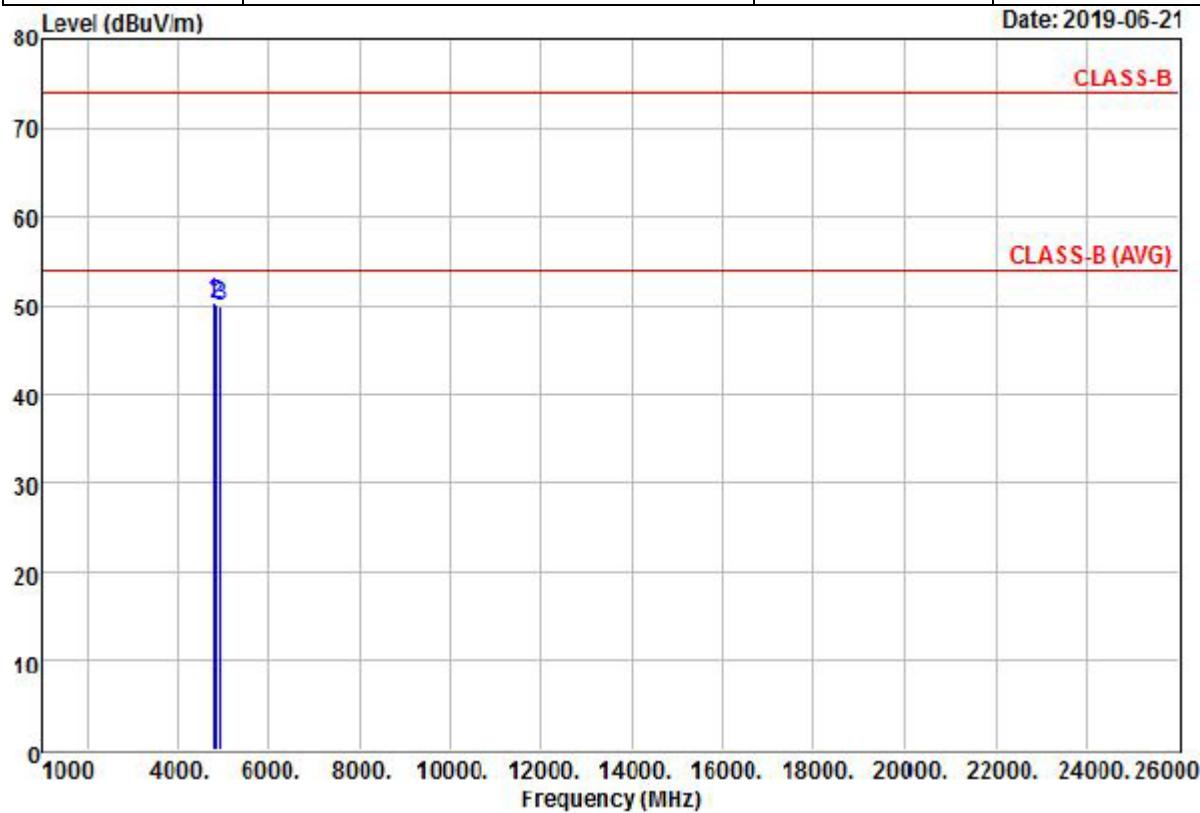


Remarks : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor-Cable loss-  
: Amplifier Factor

Freq	Read		Limit Level	Over Line	Over Limit	Remark
	Level	Factor				
1 @ 4804.00	56.27	-5.93	50.34	74.00	-23.66	Peak
2 4880.00	55.50	-5.33	50.17	74.00	-23.83	Peak
3 4960.00	54.32	-4.26	50.06	74.00	-23.94	Peak



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode 1	: TX-LO 2402-MI 2440-HI 2480 MHz	Temperature	: 33 °C
Memo	: FPC Antenna	Humidity	: 56 %

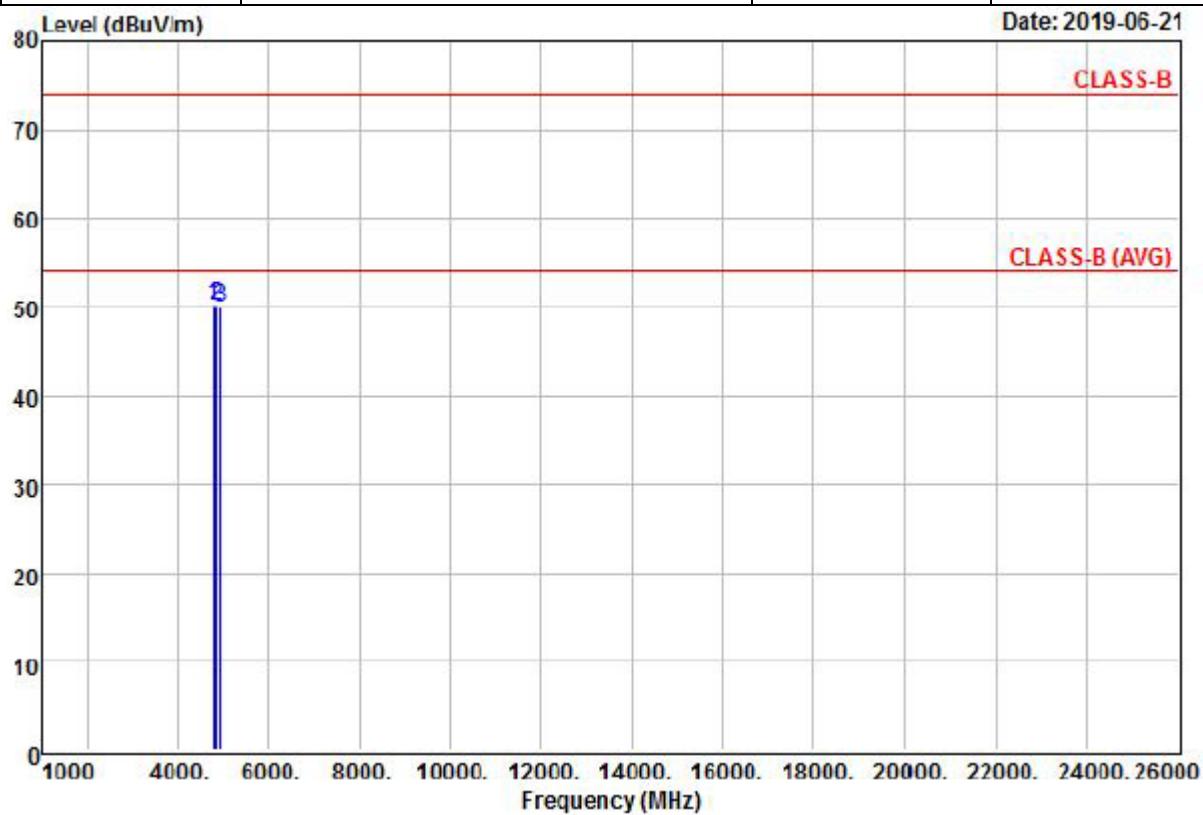

Remarks : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor-Cable loss-  
: Amplifier Factor

Freq	Read	Level	Factor	Limit	Over	Remark	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	4804.00	56.21	-5.93	50.28	74.00	-23.72	Peak
2	4880.00	55.47	-5.33	50.14	74.00	-23.86	Peak
3	4960.00	54.27	-4.26	50.01	74.00	-23.99	Peak



Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW
6. Peak detector measurement data will represent the worst case results.
7. “---” denotes the data which is not available.



## 6. SECTION 15.205 REQUIREMENTS (BAND EDGE)

### 6.1 TEST SETUP

Refer to paragraph 6.1.

### 6.2 LIMIT

Restricted Bands:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.


Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
1.705-30	30 (at 30-meter)	49.5
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54

### 6.3 RESULT: PASSED



## 6.4 TEST DATA

Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode 1	: CH LO & HI -Restricted Bands	Temperature	: 33 °C
Memo	: FPC Antenna	Humidity	: 56 %

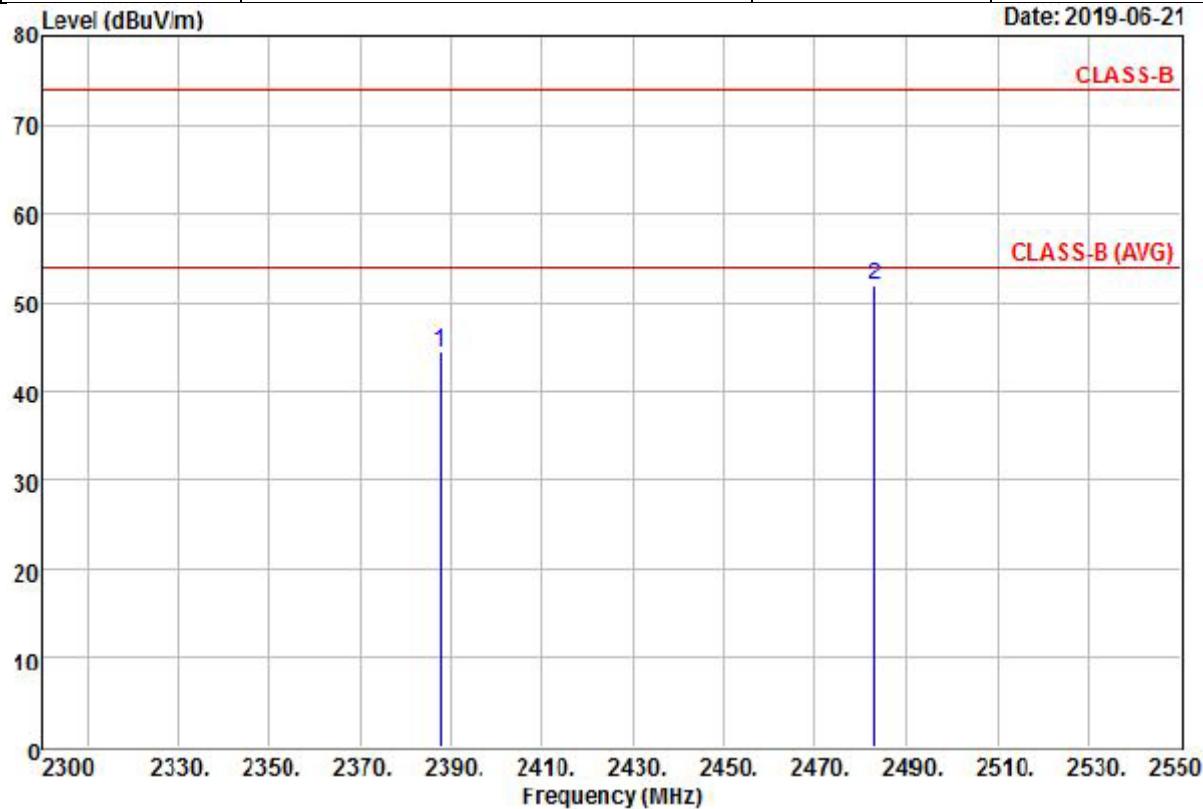


Remarks : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor-Cable loss-  
: Amplifier Factor

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
<hr/>						
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	2387.60	57.73	-13.24	44.49	74.00	-29.51 Peak
2 @	2483.50	64.59	-12.67	51.92	74.00	-22.08 Peak



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode 1	: CH LO & HI -Restricted Bands	Temperature	: 33 °C
Memo	: FPC Antenna	Humidity	: 56 %

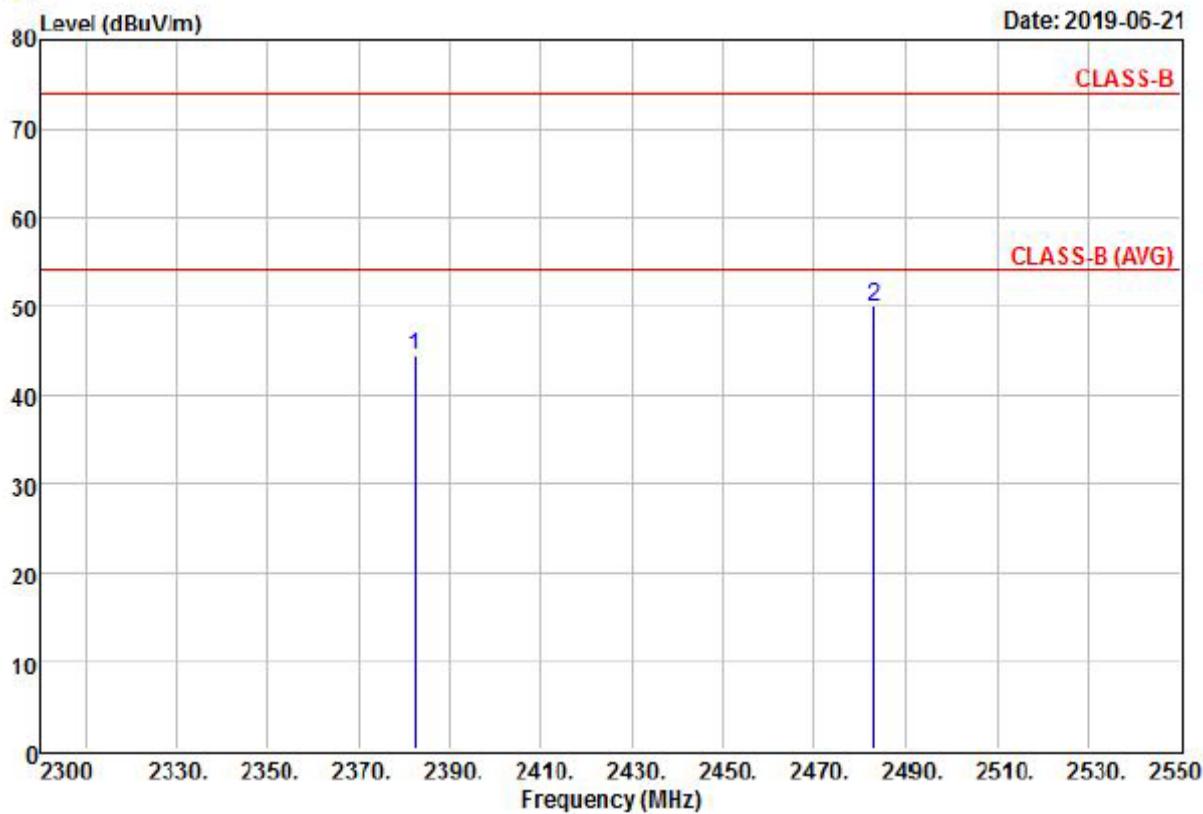

Remarks : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor-Cable loss-  
: Amplifier Factor

Freq	Read		Limit	Over	Remark
	Level	Factor			
1	2382.50	57.54	-13.25	44.29	74.00 -29.71 Peak
2 @	2483.50	62.72	-12.67	50.05	74.00 -23.95 Peak




Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW.
6. Peak detector measurement data will represent the worst case results.



## 7. SECTION 15.209 REQUIREMENTS (GENERAL RADIATED EMISSION)

### 7.1 TEST SETUP

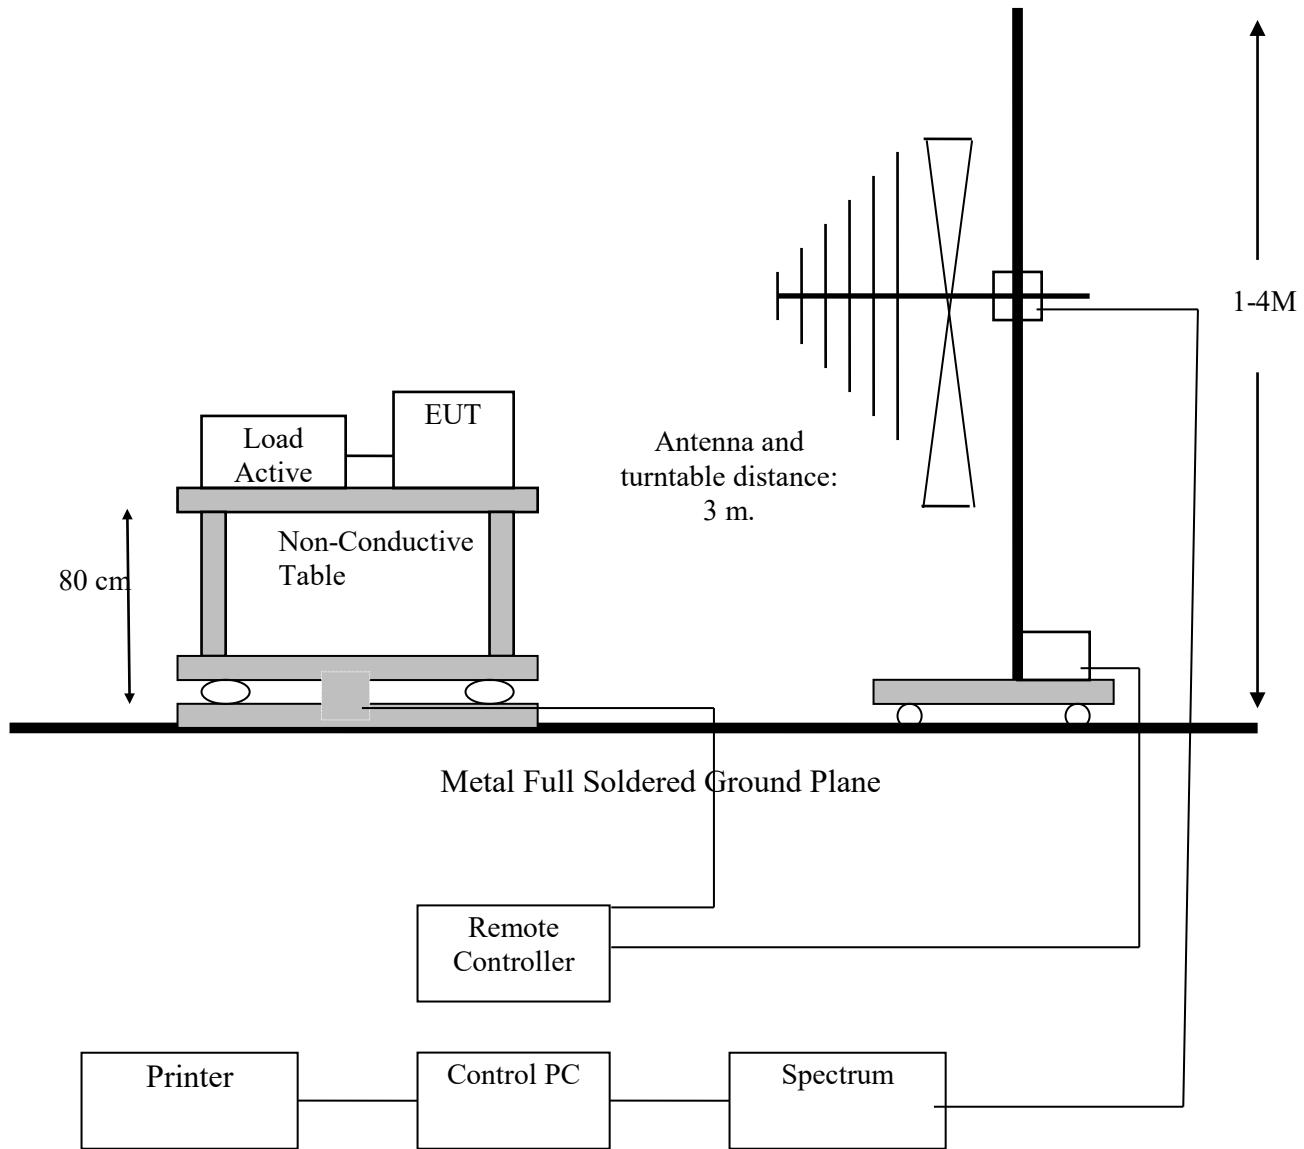



## 7.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
1.705-30	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500*	3

*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

*In the above emission table, the tighter limit applies at the band edges.*

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
1.705-30	30 (at 30-meter)	49.5
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54

## 7.3 TEST PROCEDURE

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.


## 7.4 RESULT: PASSED

## 7.5 TEST DATA

All frequencies not described in this test report and within the range of the general radiated emission limits are not detectable significantly. The table as below is representing worst emissions found.



Power	: DC 3.7V	Pol/Phase	: HORIZONTAL
Test Mode 1	: TX 2402 MHz	Temperature	: 28 °C
Memo	: FPC Antenna	Humidity	: 70 %

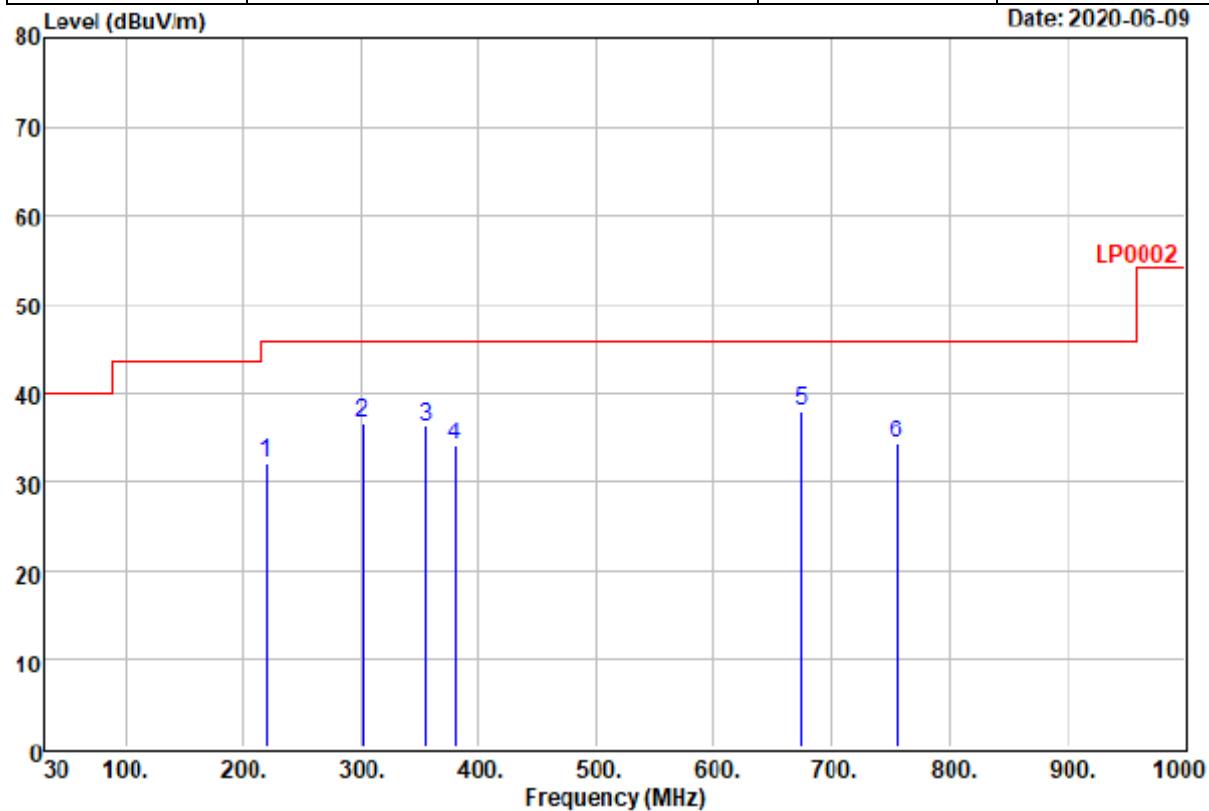


	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark

	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	220.050	49.06	-16.94	32.12	46.00	-13.88	QP
2	301.790	49.42	-12.82	36.60	46.00	-9.40	QP
3	355.600	47.78	-11.49	36.29	46.00	-9.71	QP
4	381.400	44.72	-10.58	34.14	46.00	-11.86	QP
5 @	676.370	43.34	-5.32	38.02	46.00	-7.98	QP
6	757.000	39.34	-5.13	34.21	46.00	-11.79	QP



Power	: DC 3.7V	Pol/Phase	: VERTICAL
Test Mode 1	: TX 2402 MHz	Temperature	: 28 °C
Memo	: FPC Antenna	Humidity	: 70 %

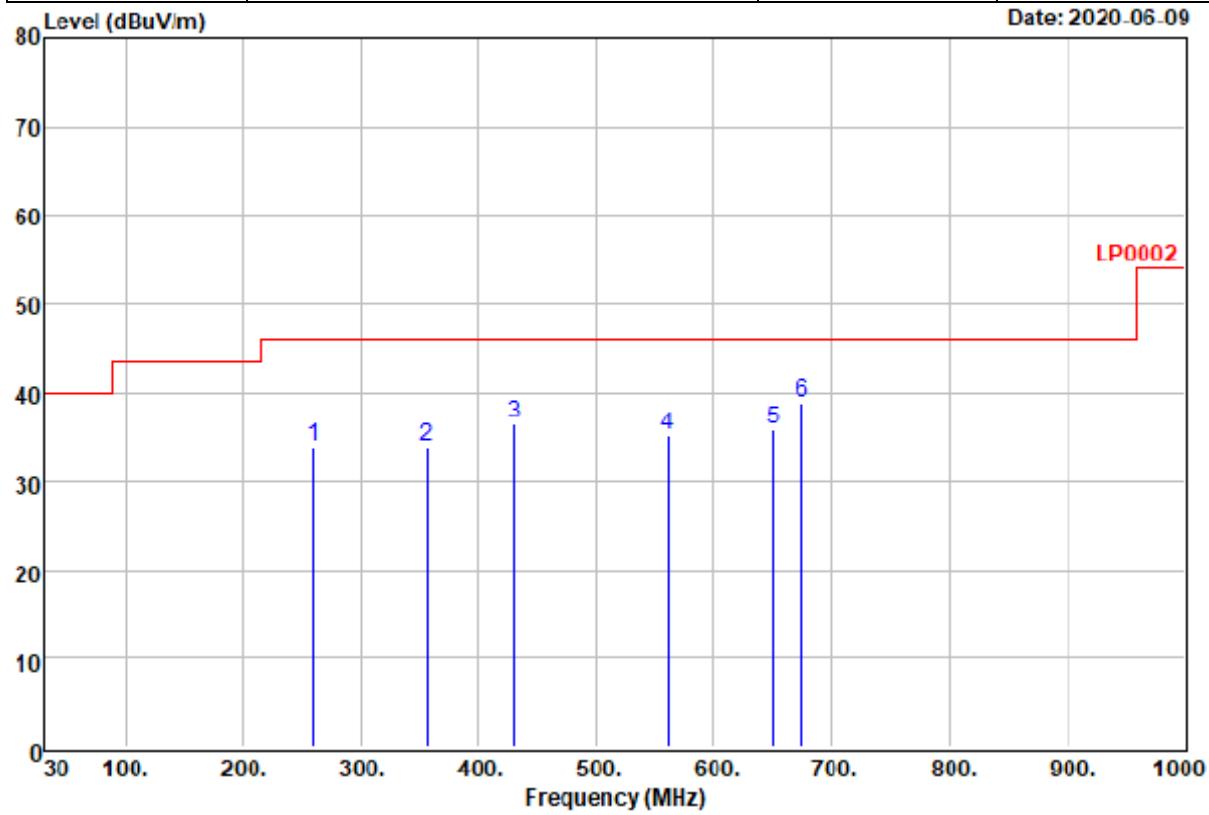

Remarks : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor-Cable loss-  
: Amplifier Factor

	Read	Limit	Over		
Freq	Level	Level	Line	Limit	Remark

	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	260.050	48.05	-14.19	33.86	46.00	-12.14	QP
2	356.620	45.38	-11.46	33.92	46.00	-12.08	QP
3	431.110	46.08	-9.62	36.46	46.00	-9.54	QP
4	561.740	43.05	-7.88	35.17	46.00	-10.83	QP
5	652.060	40.71	-4.91	35.80	46.00	-10.20	QP
6 @	676.450	44.21	-5.32	38.89	46.00	-7.11	QP




Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements from 9 kHz to 150 kHz, Peak detector setting: 100 Hz RBW
5. Measurements from 150 kHz to 30MHz, Peak detector setting: 10 kHz RBW
6. Measurements from 30 MHz to 1000 MHz, Peak detector setting: 100 kHz RBW
7. Measurements from 9 kHz to 150 kHz, CISPR Quasi-Peak detector: 200 Hz RBW
8. Measurements from 150 kHz to 30MHz, CISPR Quasi-Peak detector: 9 kHz RBW
9. Measurements from 30 MHz to 1000 MHz, CISPR Quasi-Peak detector: 120 kHz RBW
10. Peak detector measurement data will represent the worst case results.



## 8. SECTION 15.207 REQUIREMENTS (POWERLINE CONDUCTED EMISSIONS)

## 8.1 TEST SETUP

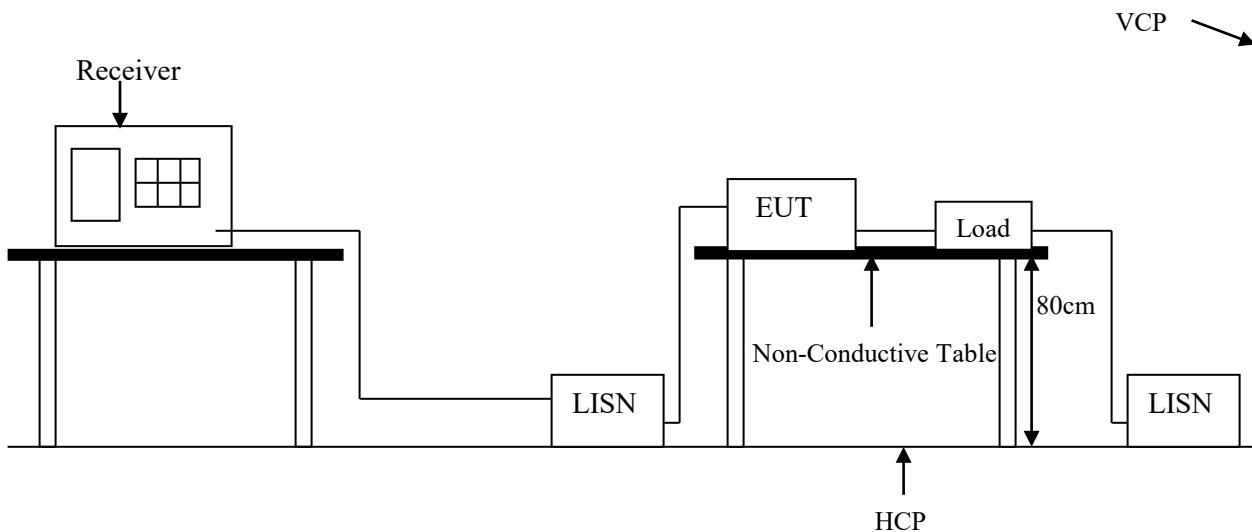

## 8.2 LIMIT

Frequency range (MHz)	CLASS B	
	QP dB(uV)	Average dB(uV)
0.15-0.5	66 - 56 dBuV	56 - 46 dBuV
0.5-5.0	56 dBuV	46 dBuV
5.0-30.0	60 dBuV	50 dBuV

Remark: In the above table, the tighter limit applies at the band edges.

### 8.3 TEST PROCEDURE

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50  $\mu$ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50  $\mu$ H coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to EN 55022 regulations: The measurement procedure on conducted emission interference.

The resolution bandwidth of the field strength meter is set at 9 KHz.



## 8.4 TEST SPECIFICATION

According to PART15.207

## 8.5 RESULT: PASSED


EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz



## 8.6 TEST DATA


Power	: DC 5V	Pol/Phase	: LINE
Test Mode 1	: TX 2402 MHz	Temperature	: 26.9 °C
Memo		Humidity	: 51 %

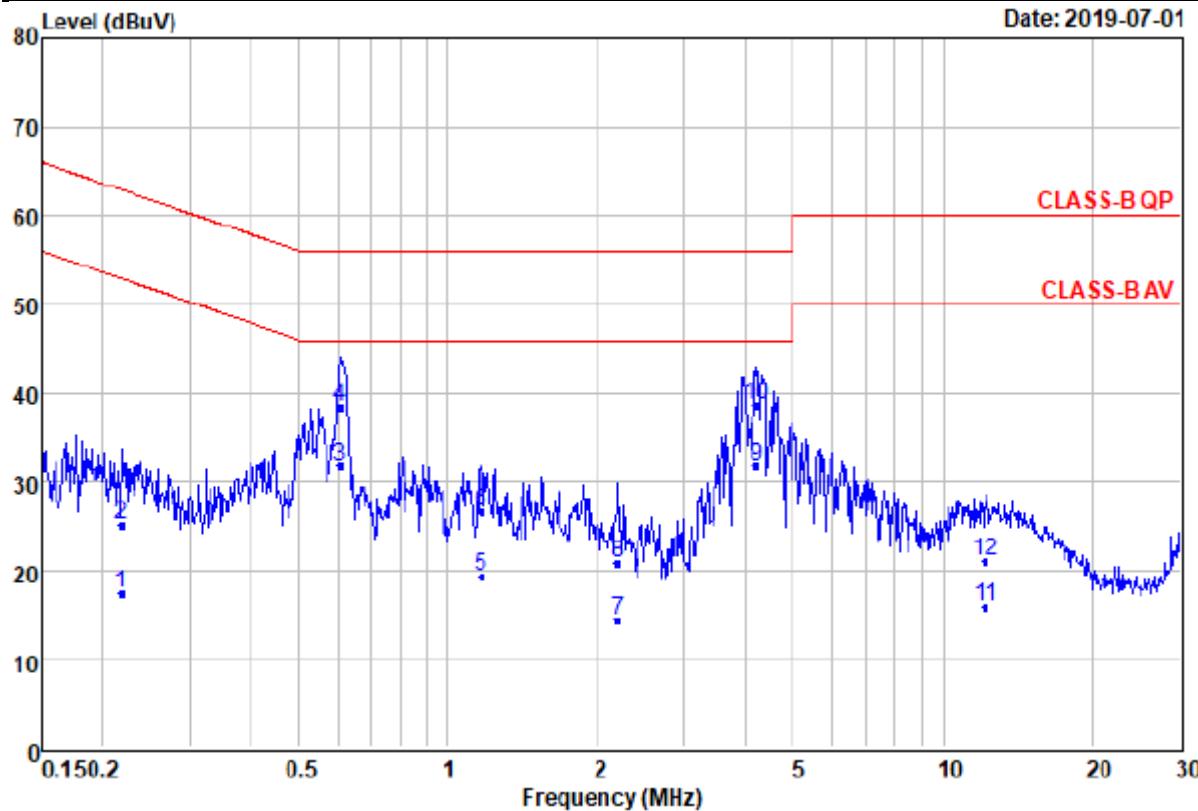

Remarks	: Factor=Insertion loss+Cable loss						
	Read	Over	Line	Remark	Freq	Level	Level
	Level	Factor	Limit	dB	dB	dBuV	MHz
1	0.22	7.20	17.29	10.09	-35.63	52.92	Average
2	0.22	14.96	25.05	10.09	-37.87	62.92	QP
3 @	0.60	21.67	31.78	10.11	-14.22	46.00	Average
4	0.60	28.34	38.45	10.11	-17.55	56.00	QP
5	1.17	9.17	19.31	10.14	-26.69	46.00	Average
6	1.17	16.52	26.66	10.14	-29.34	56.00	QP
7	2.20	4.25	14.44	10.19	-31.56	46.00	Average
8	2.20	10.60	20.79	10.19	-35.21	56.00	QP
9	4.22	21.43	31.69	10.26	-14.31	46.00	Average
10	4.22	28.38	38.64	10.26	-17.36	56.00	QP
11	12.12	5.35	15.82	10.47	-34.18	50.00	Average
12	12.12	10.62	21.09	10.47	-38.91	60.00	QP



Power	:	DC 5V	Pol/Phase	:	NEUTRAL
Test Mode 1	:	TX 2402 MHz	Temperature	:	26.9 °C
Memo	:		Humidity	:	51 %

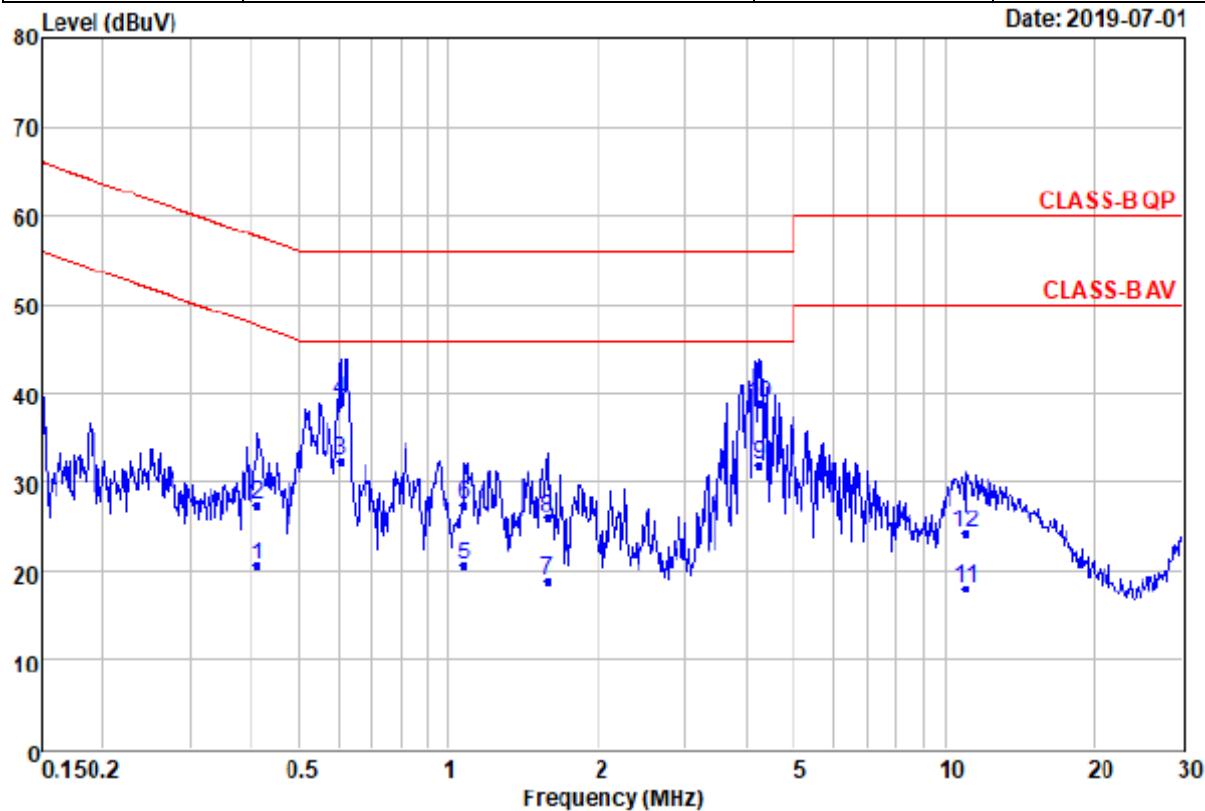


Remarks : Factor=Insertion loss+Cable loss

Freq	Read Level	Level Factor	Over Limit		Line	Remark
			dB	dB		
1	0.41	10.46	20.55	10.09	-27.09	47.64 Average
2	0.41	17.36	27.45	10.09	-30.19	57.64 QP
3 @	0.60	22.18	32.28	10.10	-13.72	46.00 Average
4	0.60	29.22	39.32	10.10	-16.68	56.00 QP
5	1.07	10.41	20.53	10.12	-25.47	46.00 Average
6	1.07	17.42	27.54	10.12	-28.46	56.00 QP
7	1.58	8.68	18.83	10.15	-27.17	46.00 Average
8	1.58	15.88	26.03	10.15	-29.97	56.00 QP
9	4.25	21.67	31.91	10.24	-14.09	46.00 Average
10	4.25	28.62	38.86	10.24	-17.14	56.00 QP
11	11.02	7.68	18.10	10.42	-31.90	50.00 Average
12	11.02	13.72	24.14	10.42	-35.86	60.00 QP



## 9. SECTION 15.215 REQUIREMENT (20DB BANDWIDTH TEST)

### 9.1 TEST SETUP



### 9.2 TEST PROCEDURE

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW=30KHz and VBW=100KHz.
- c. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.
- d. The 20 dB Bandwidth was measured and recorded.

### 9.3 RESULT: PASSED



## 9.4 TEST DATA

Test Date: Aug. 26, 2019

Temperature: 25°C

Atmospheric pressure: 1008 hPa


Humidity: 50%

Modulation Standard	Channel	Frequency (MHz)
GFSK	00	2402MHz
GFSK	19	2440MHz
GFSK	39	2480MHz

Modulation Standard: GFSK

Channel: 00

Date: 2019-08-26

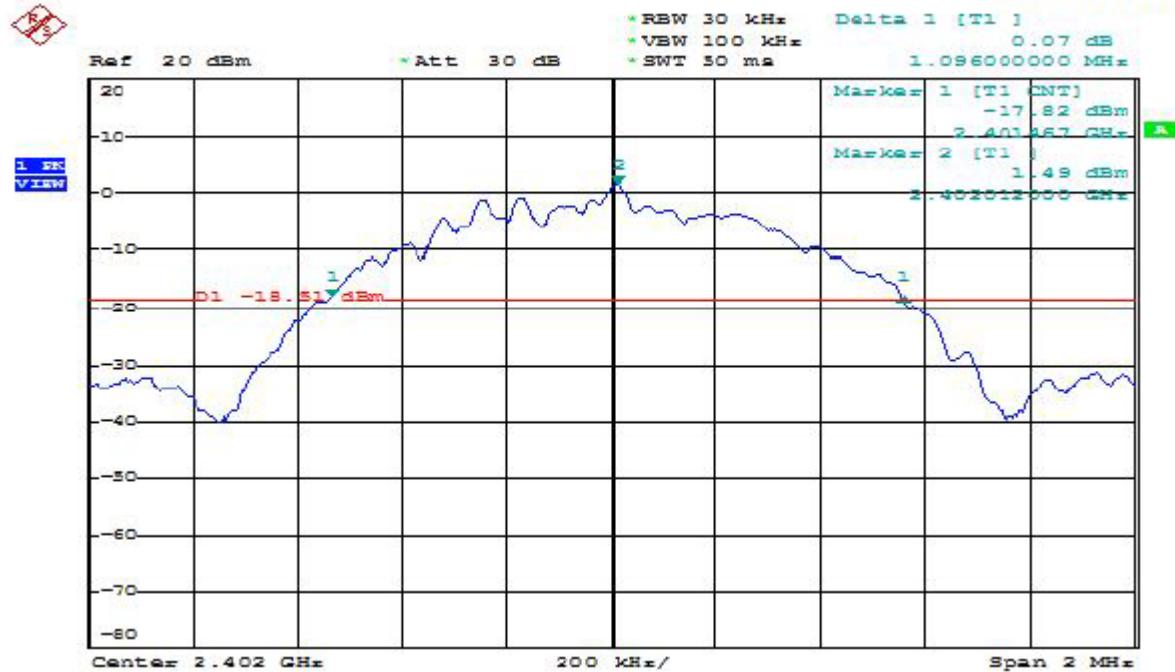




Modulation Standard: GFSK

Channel: 19

Date: 2019-08-26

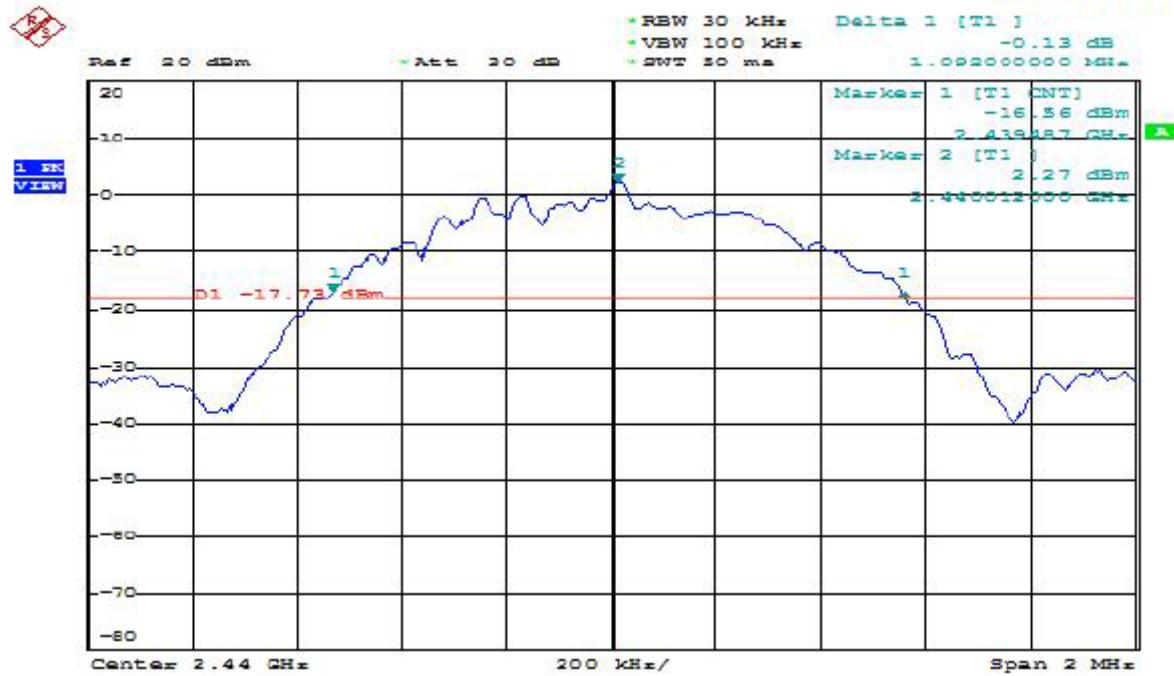

Modulation Standard: GFSK

Channel: 39

Date: 2019-08-26

