



## Appendix A

### RF Test Data for 2.4G BLE (Conducted Measurement)

Product Name: smart RGBIC light strip kit

Test Model: STWSC6-43T5

#### Environmental Conditions

Temperature:	21.1 ° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Kay Hu
Supervised by:	Huan Li





## A.1 DTS Bandwidth

### Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.684	2401.664	2402.348	≥0.5	PASS
		2440	0.664	2439.672	2440.336	≥0.5	PASS
		2480	0.688	2479.652	2480.340	≥0.5	PASS

### Test Graphs

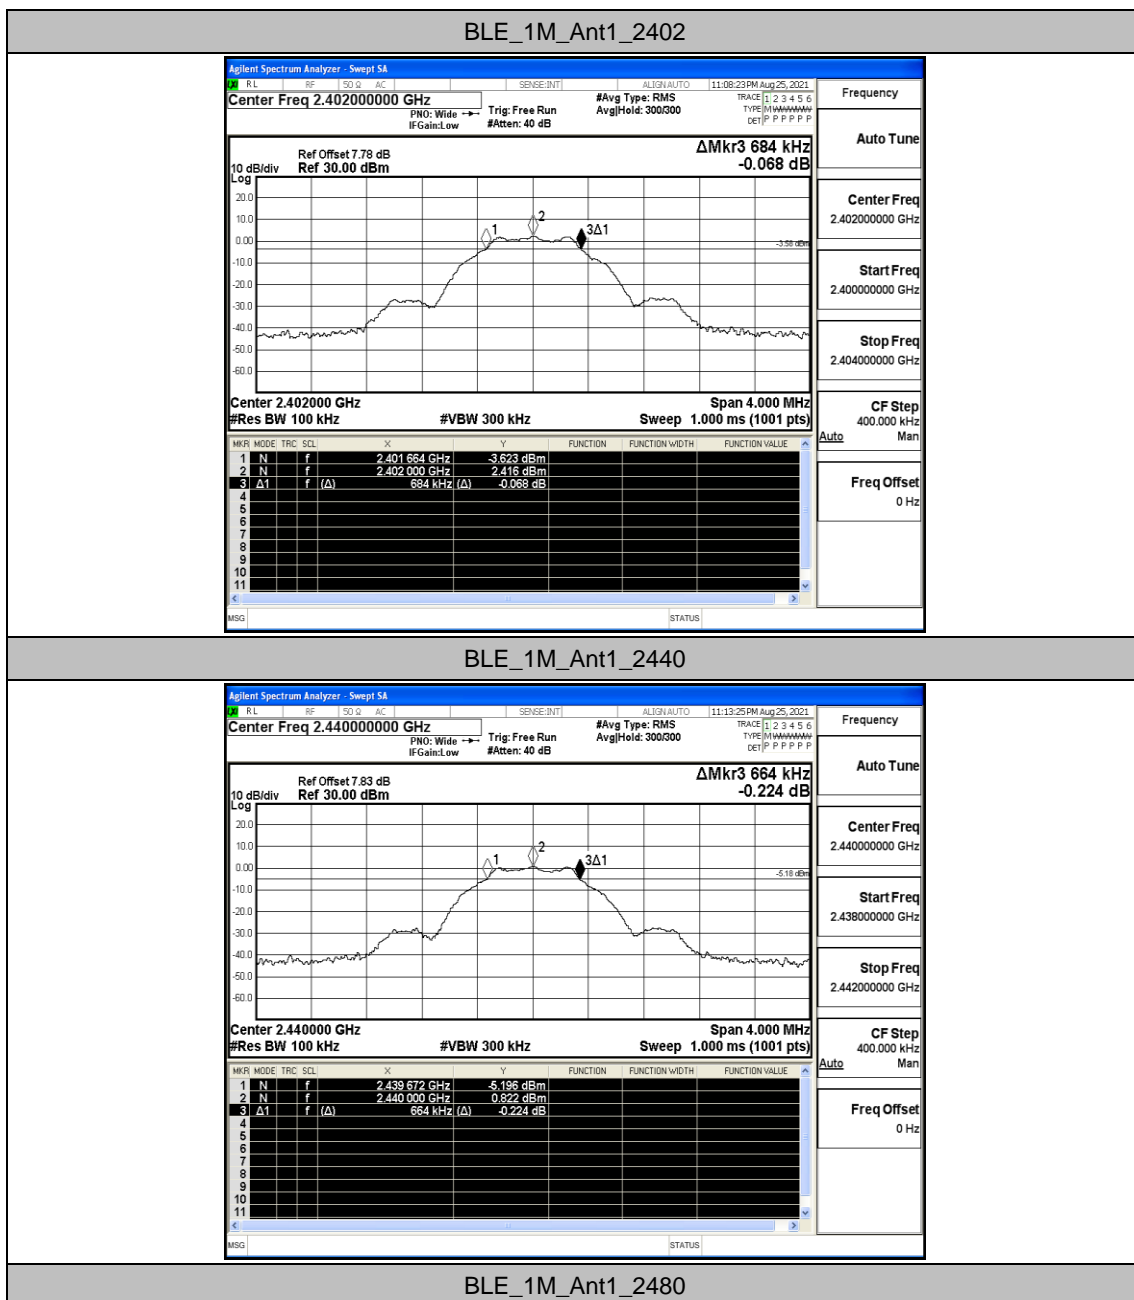

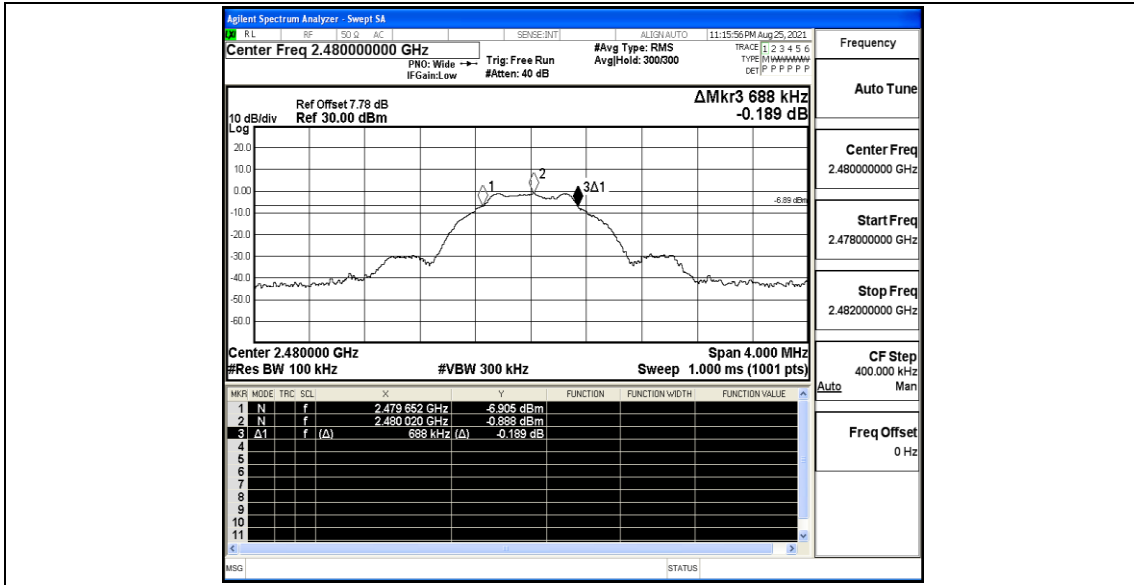





## A.2 Maximum conducted output power

### Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0.28	≤30	PASS
		2440	1.42	≤30	PASS
		2480	0.05	≤30	PASS

### Test Graphs

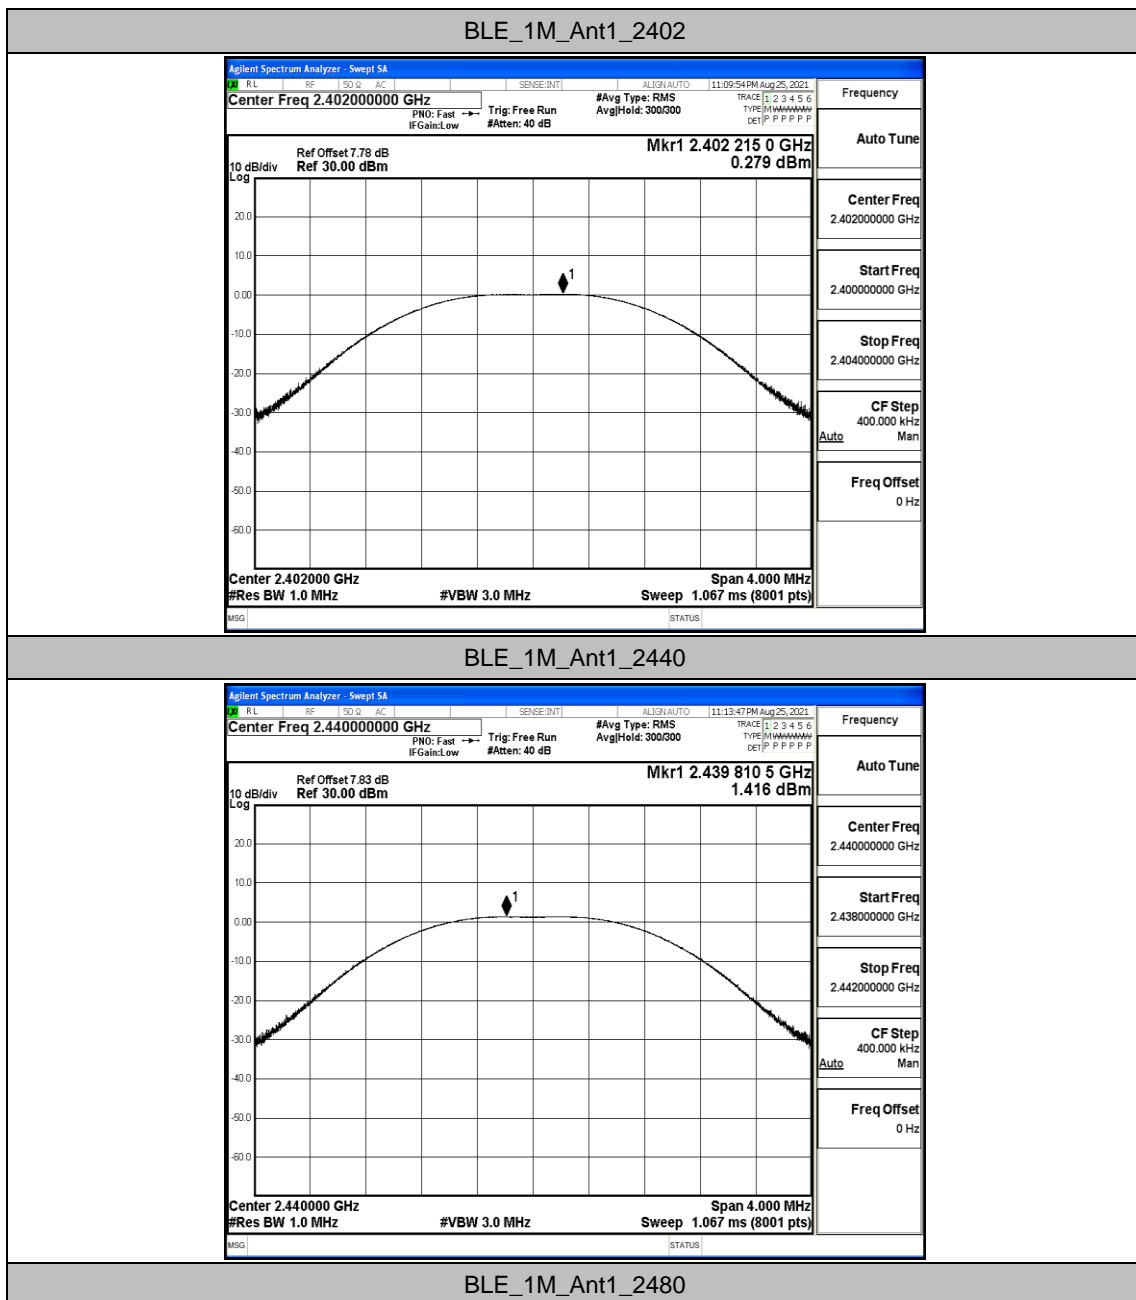

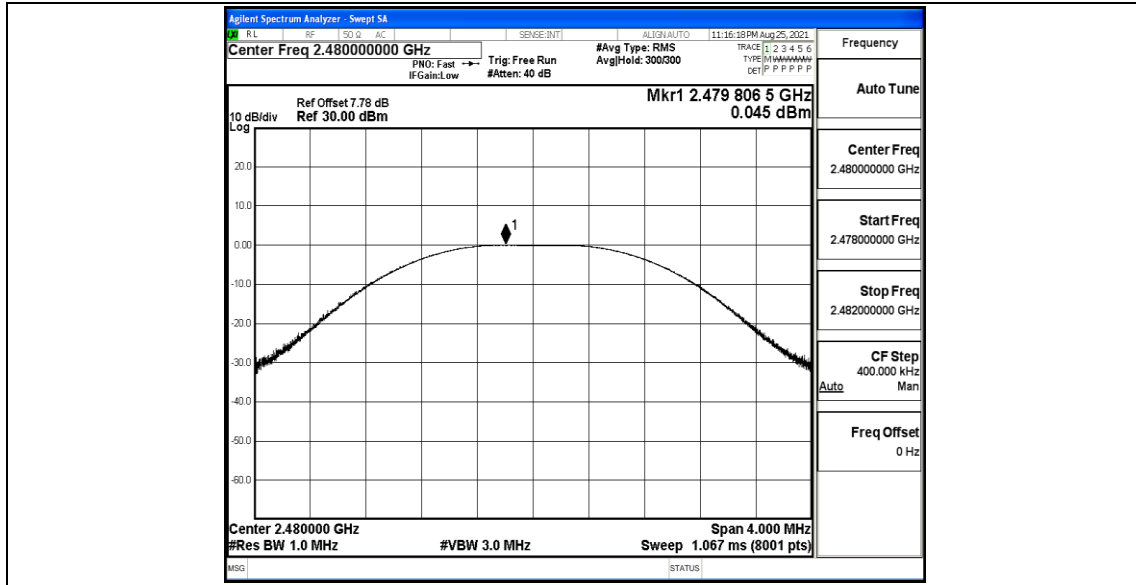





### A.3 Maximum power spectral density

#### Test Result

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-14.60	≤8	PASS
		2440	-13.43	≤8	PASS
		2480	-14.85	≤8	PASS

#### Test Graphs

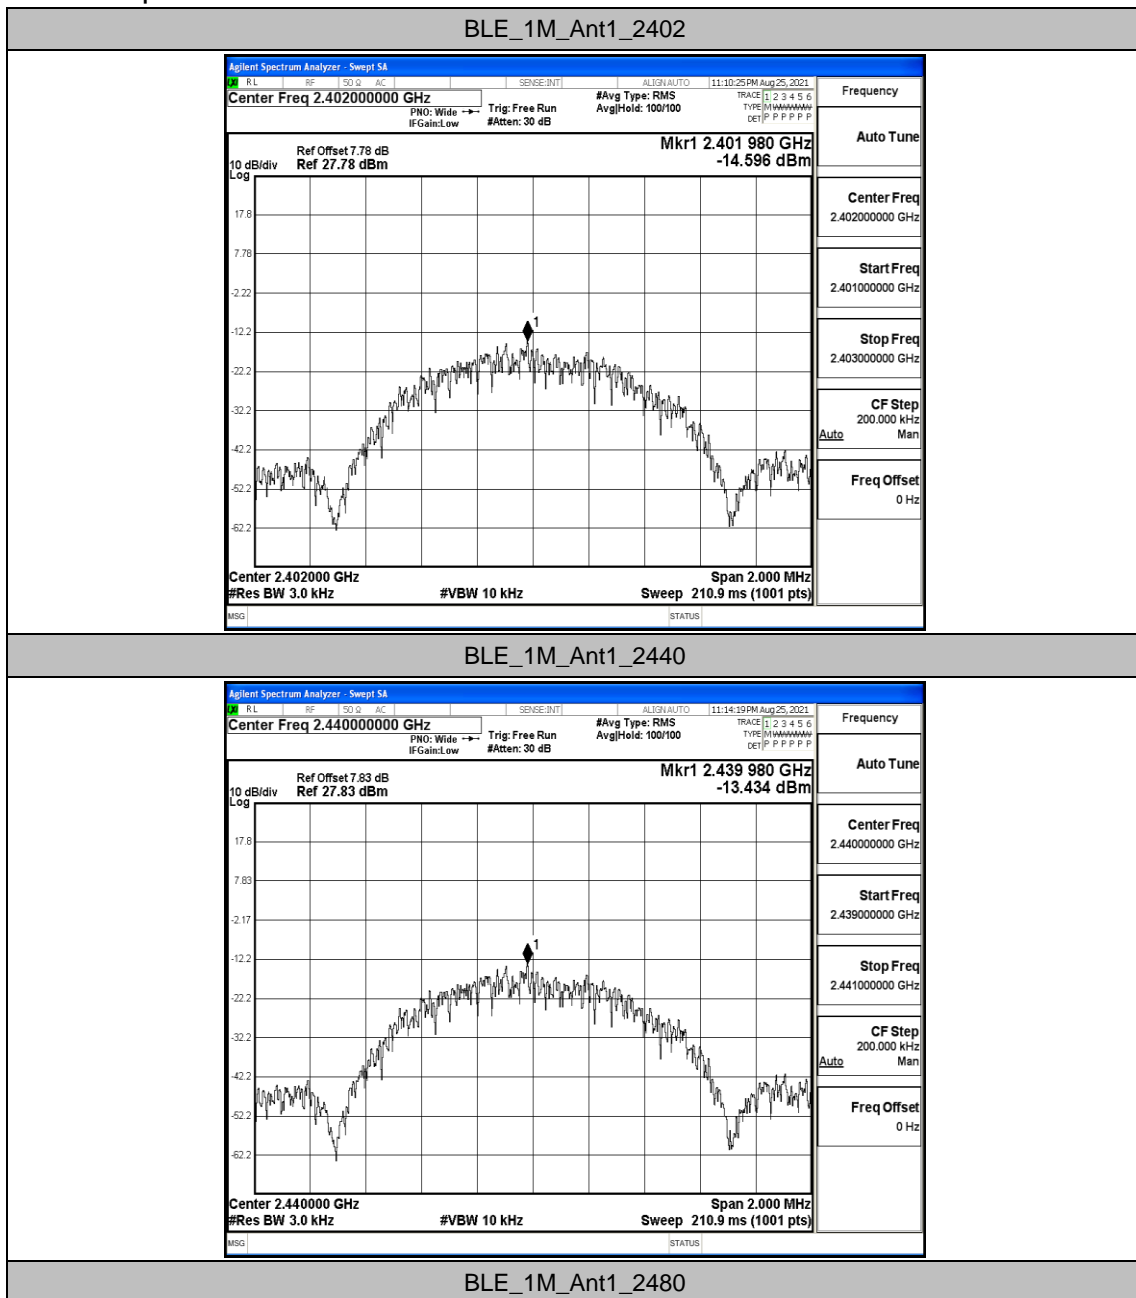

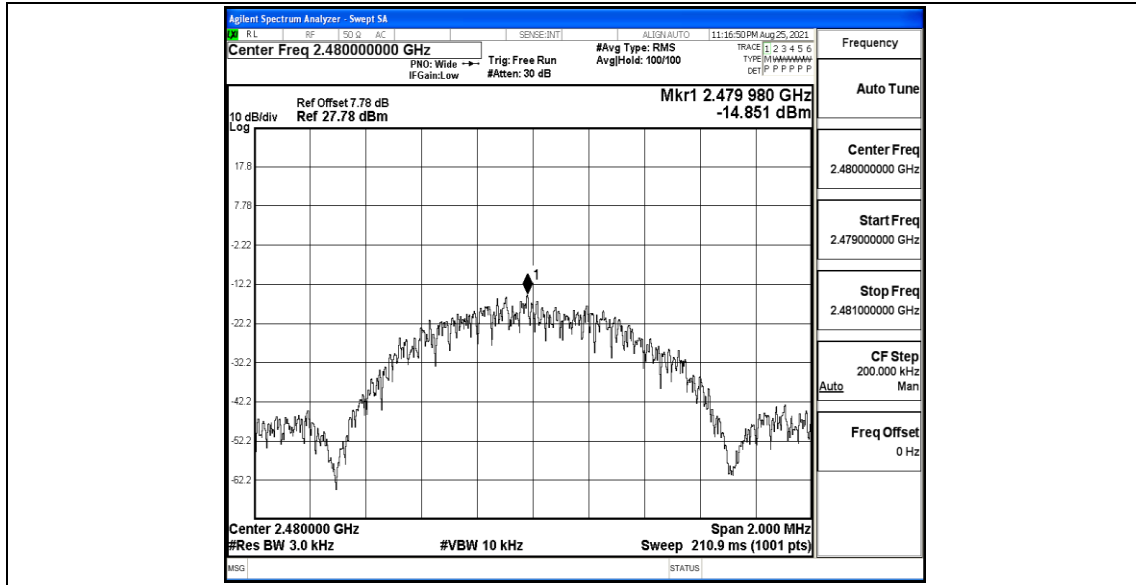




## A.4 Band edge measurements

### Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.24	-50.16	≤-20.24	PASS
		High	2480	-0.61	-49.35	≤-20.61	PASS

### Test Graphs

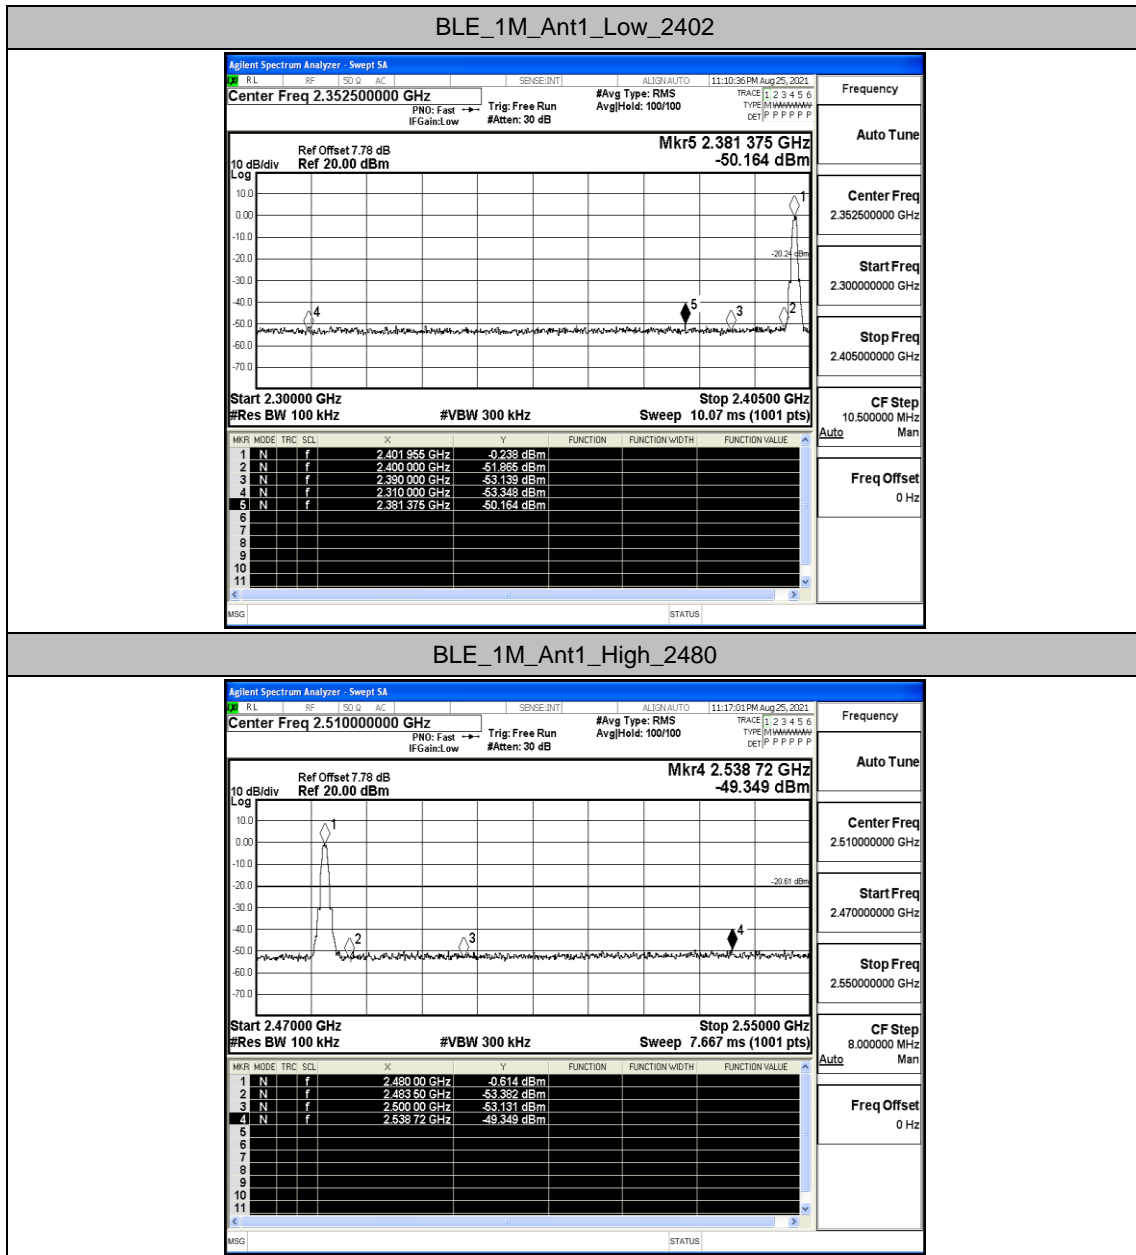







## A.5 Conducted Spurious Emission

### Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-1.08	-1.08	---	PASS
			30~1000	-1.08	-62.03	≤-21.08	PASS
			1000~26500	-1.08	-46.85	≤-21.08	PASS
		2440	Reference	0.79	0.79	---	PASS
			30~1000	0.79	-61.57	≤-19.21	PASS
			1000~26500	0.79	-47.56	≤-19.21	PASS
		2480	Reference	-0.68	-0.68	---	PASS
			30~1000	-0.68	-61.85	≤-20.68	PASS
			1000~26500	-0.68	-47.33	≤-20.68	PASS

### Test Graphs

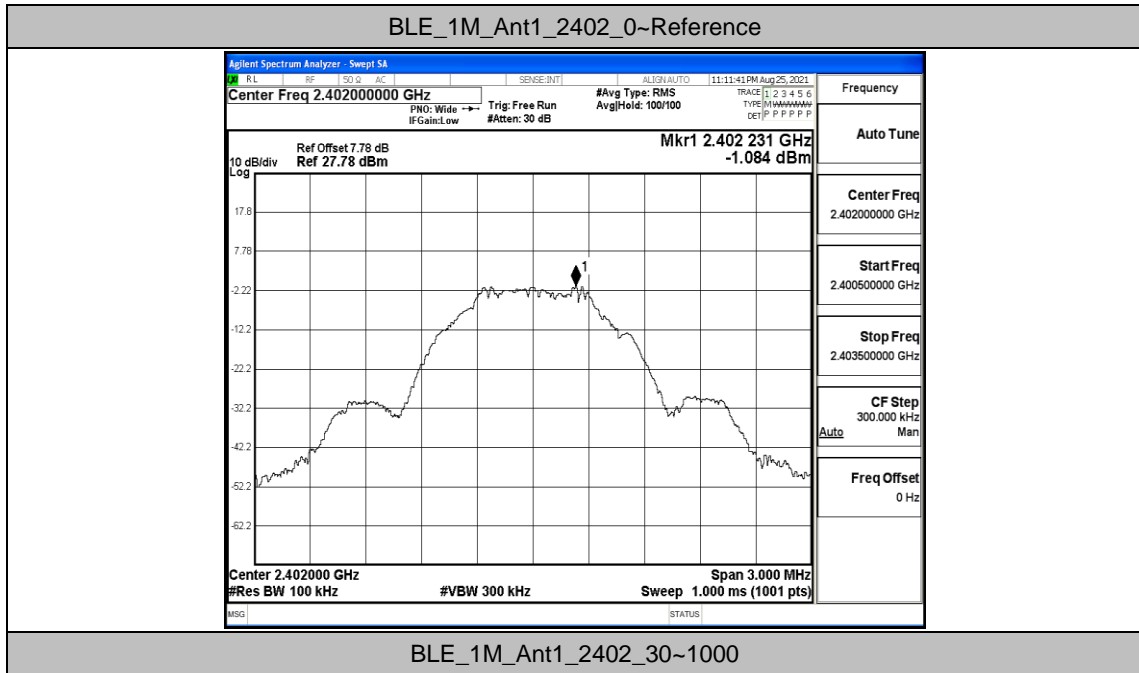


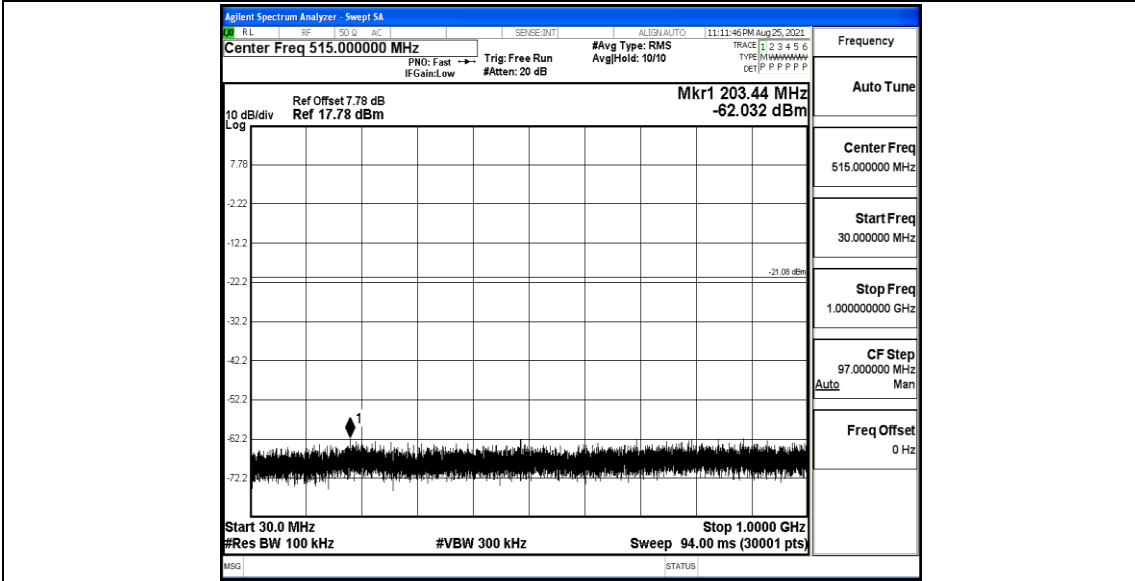

BLE\_1M\_Ant1\_2402\_1000~26500

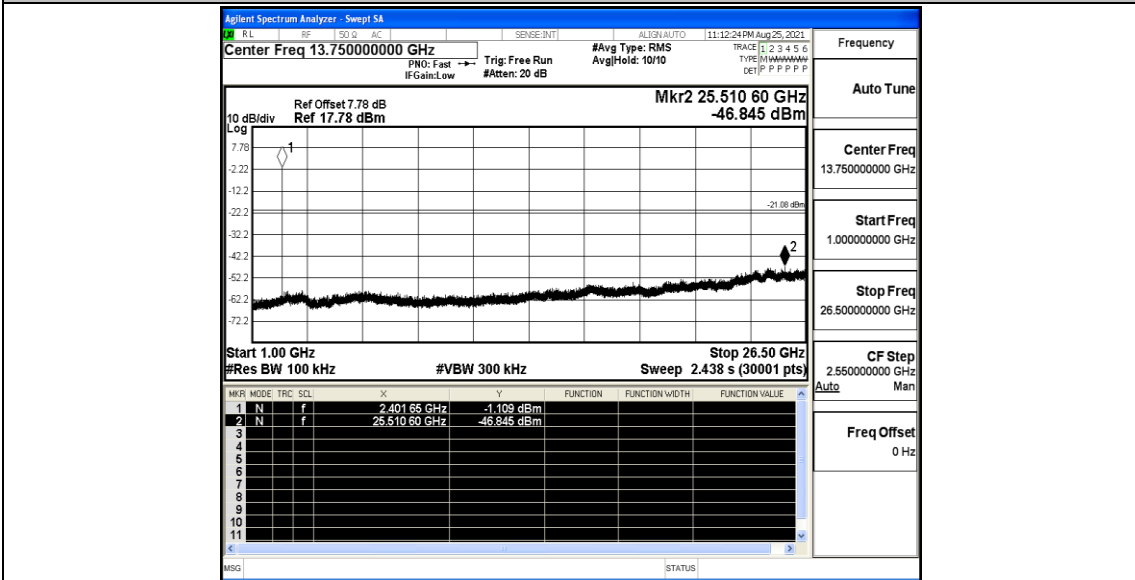


BLE\_1M\_Ant1\_2440\_0~Reference

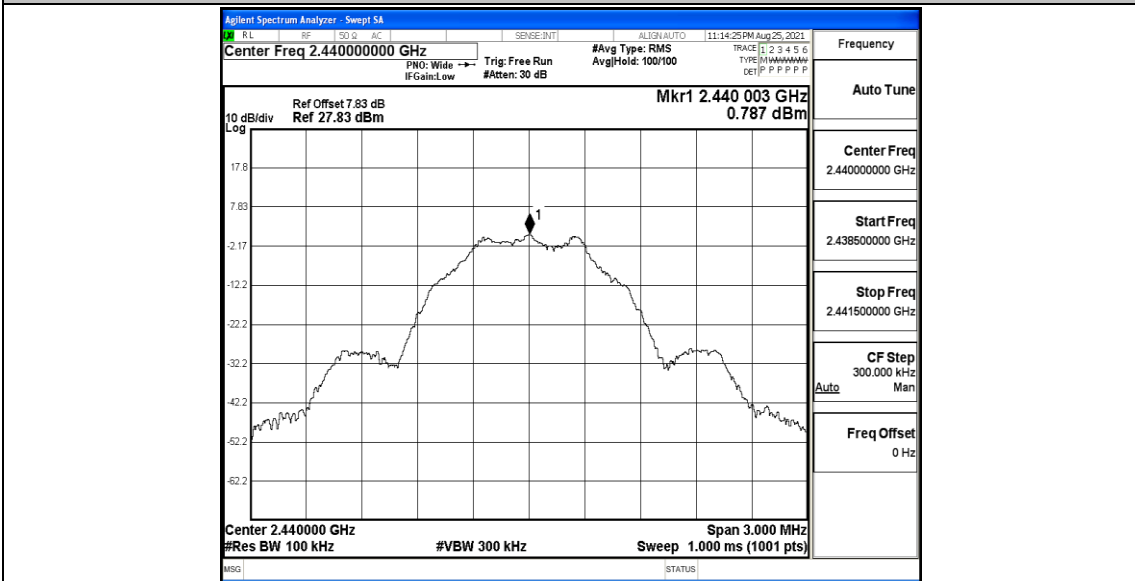





BLE\_1M\_Ant1\_2440\_30~1000

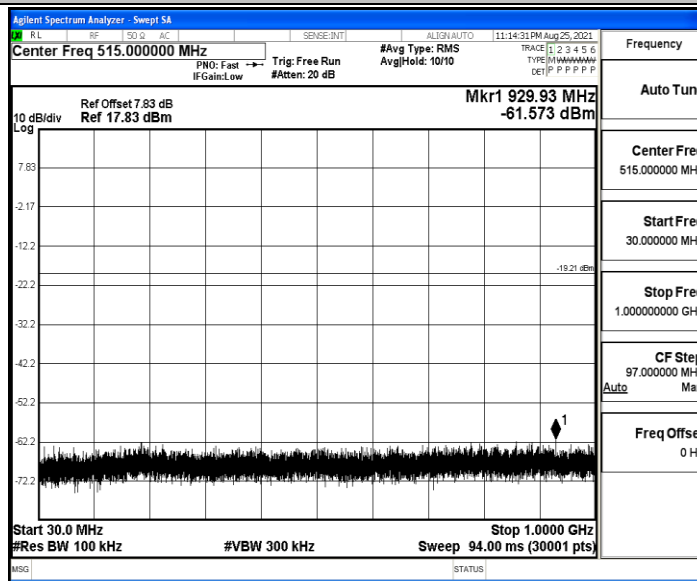


BLE\_1M\_Ant1\_2440\_1000~26500

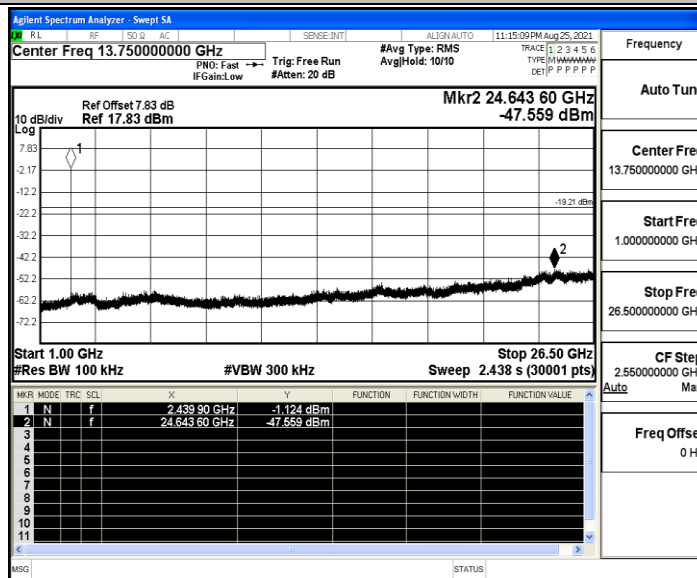


BLE\_1M\_Ant1\_2480\_0~Reference

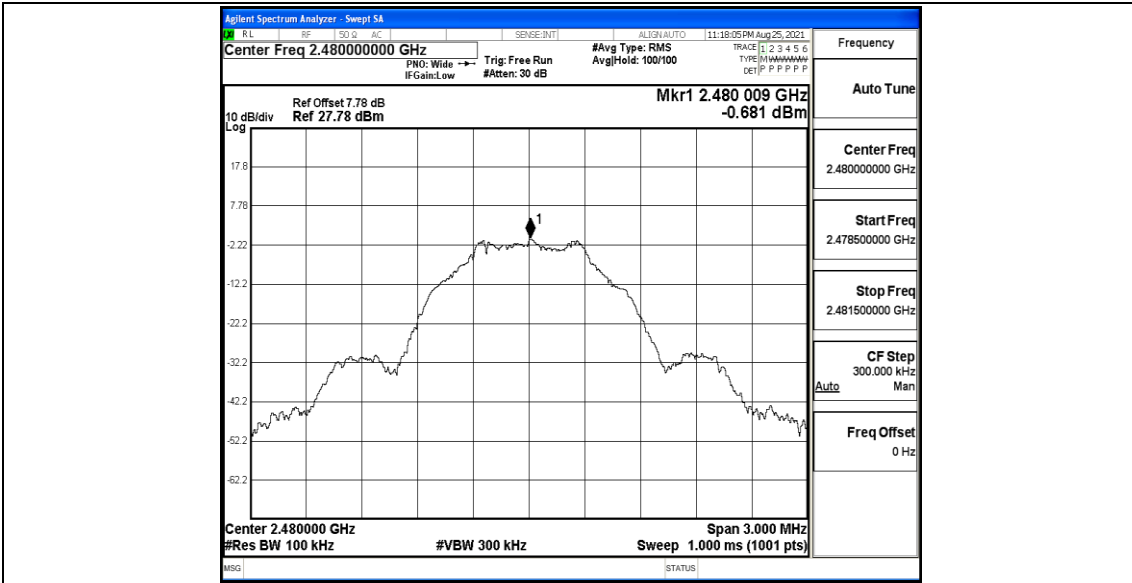

BLE\_1M\_Ant1\_2480\_30~1000

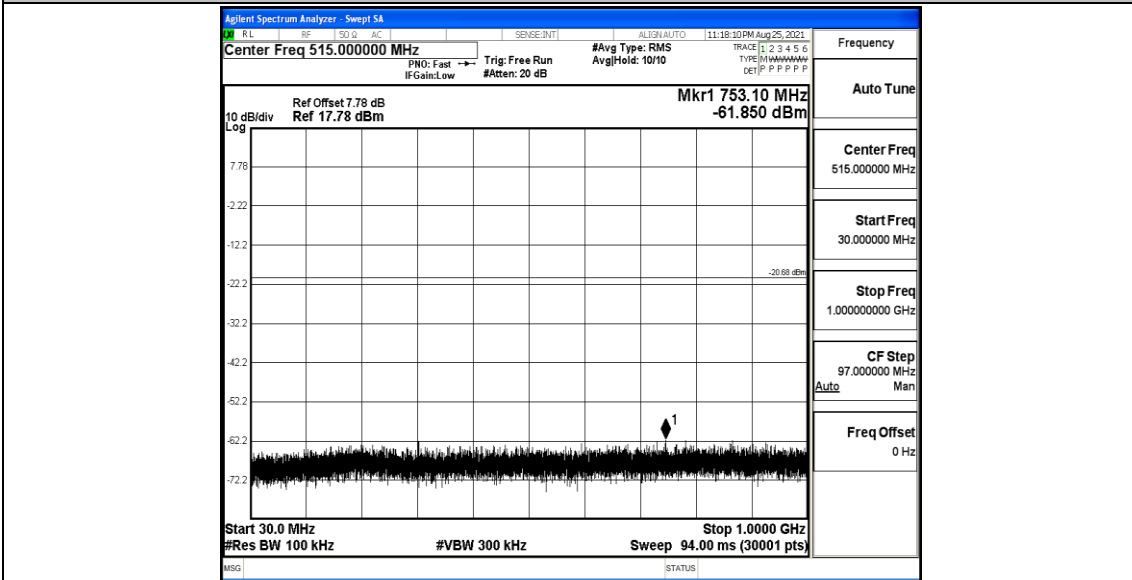

BLE\_1M\_Ant1\_2480\_1000~26500

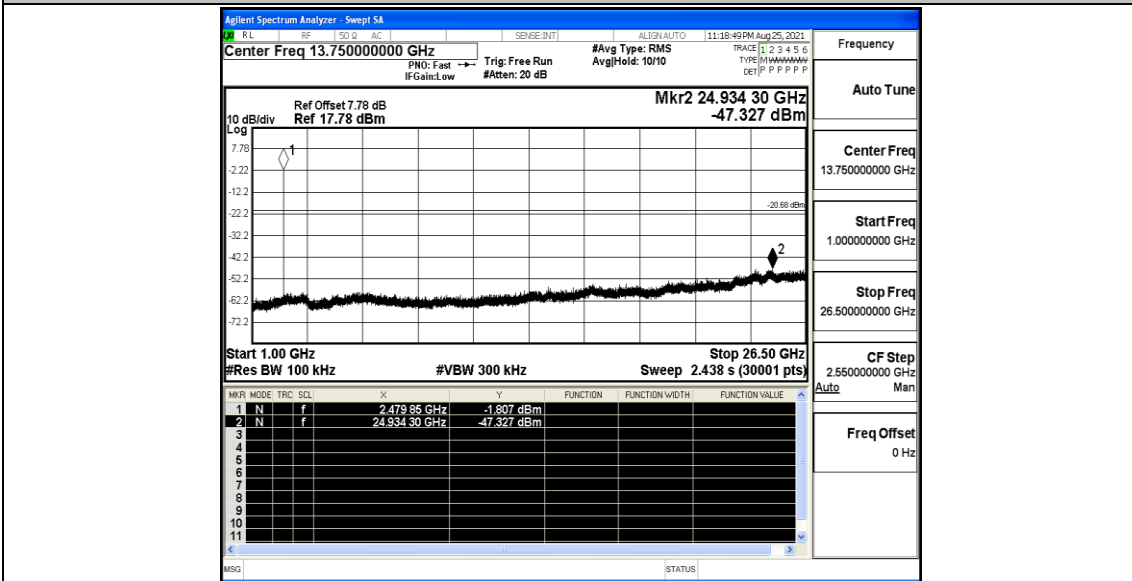





## A.6 Duty Cycle

### Test Result

TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	Limit	Verdict
BLE_1M	Ant1	2402	0.38	0.62	0.6129	61.29	2.13	---	PASS
		2440	0.38	0.62	0.6129	61.29	2.13	---	PASS
		2480	0.38	0.62	0.6129	61.29	2.13	---	PASS

### Test Graphs

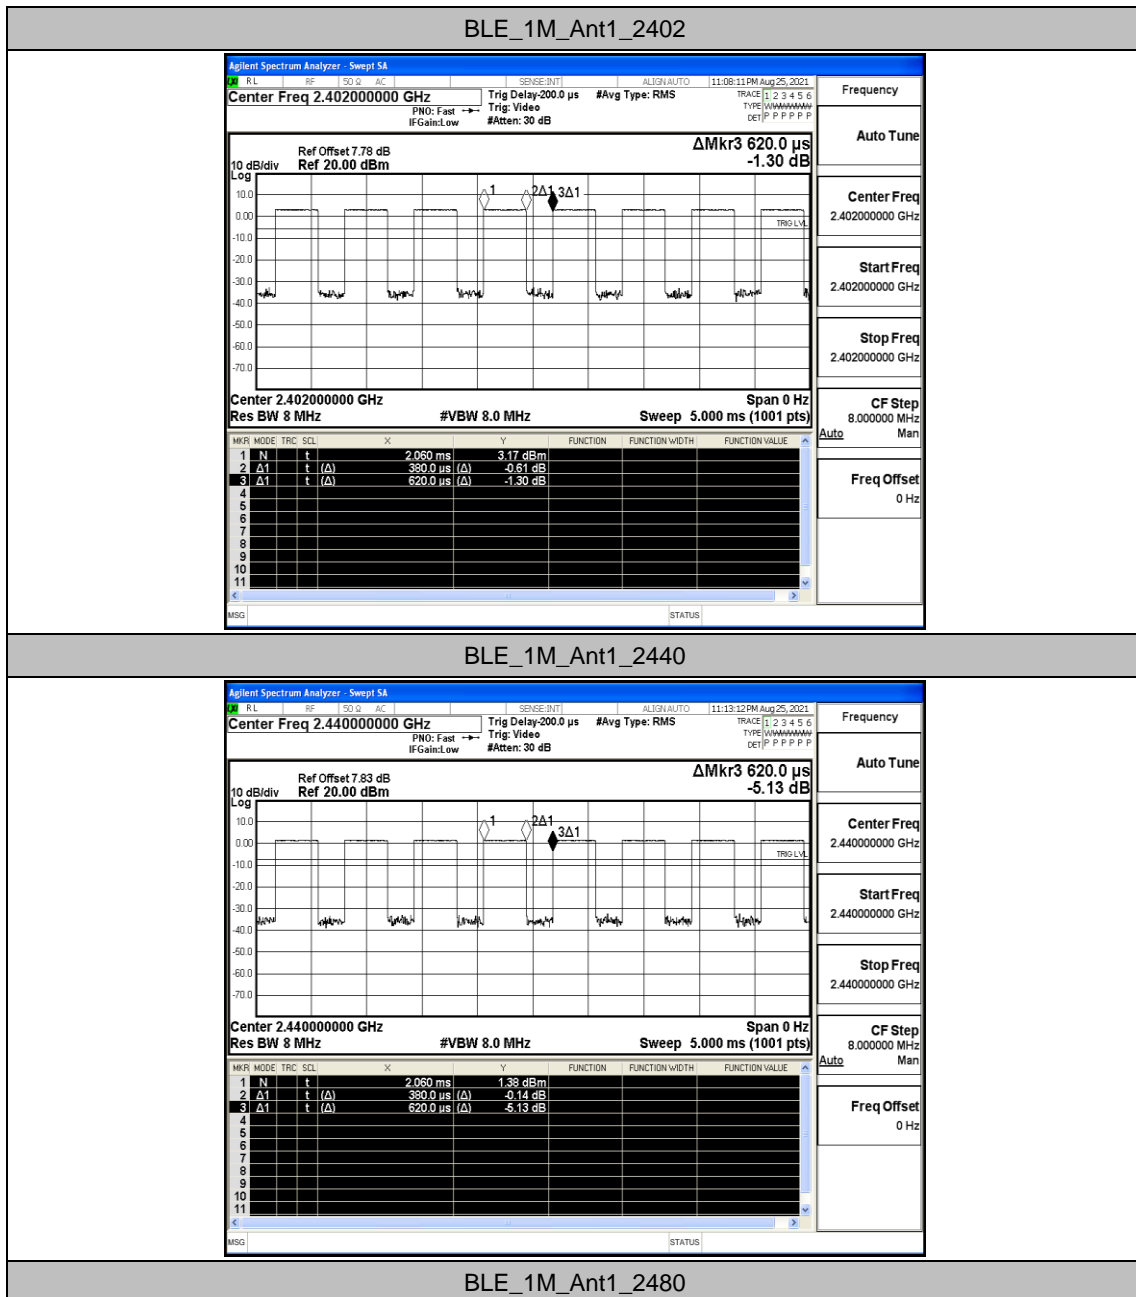

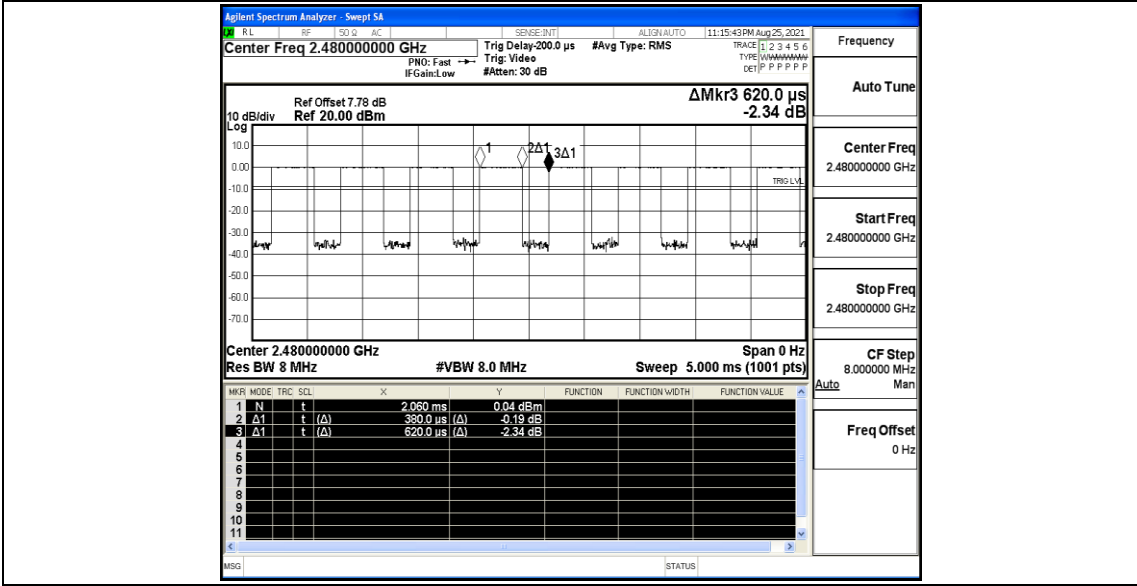



## A.7 Emissions in Restricted Bands

### Test Result


TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-48.35	≤-41.20	46.85	≤54	PASS
				AV	2383.160	-47.7	≤-41.20	47.50	≤54	PASS
				AV	2390.000	-48.08	≤-41.20	47.12	≤54	PASS
				Peak	2310.000	-42.14	≤-21.20	53.06	≤74	PASS
				Peak	2325.200	-38.36	≤-21.20	56.84	≤74	PASS
				Peak	2390.000	-41.53	≤-21.20	53.67	≤74	PASS
		High	2480	AV	2483.500	-46.95	≤-41.20	48.25	≤54	PASS
				AV	2498.560	-46.95	≤-41.20	48.25	≤54	PASS
				AV	2500.000	-47.45	≤-41.20	47.75	≤54	PASS
				Peak	2483.500	-41.63	≤-21.20	53.57	≤74	PASS
				Peak	2499.520	-38.24	≤-21.20	56.96	≤74	PASS
				Peak	2500.000	-41.91	≤-21.20	53.29	≤74	PASS

Note:


1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.



### Test Graphs

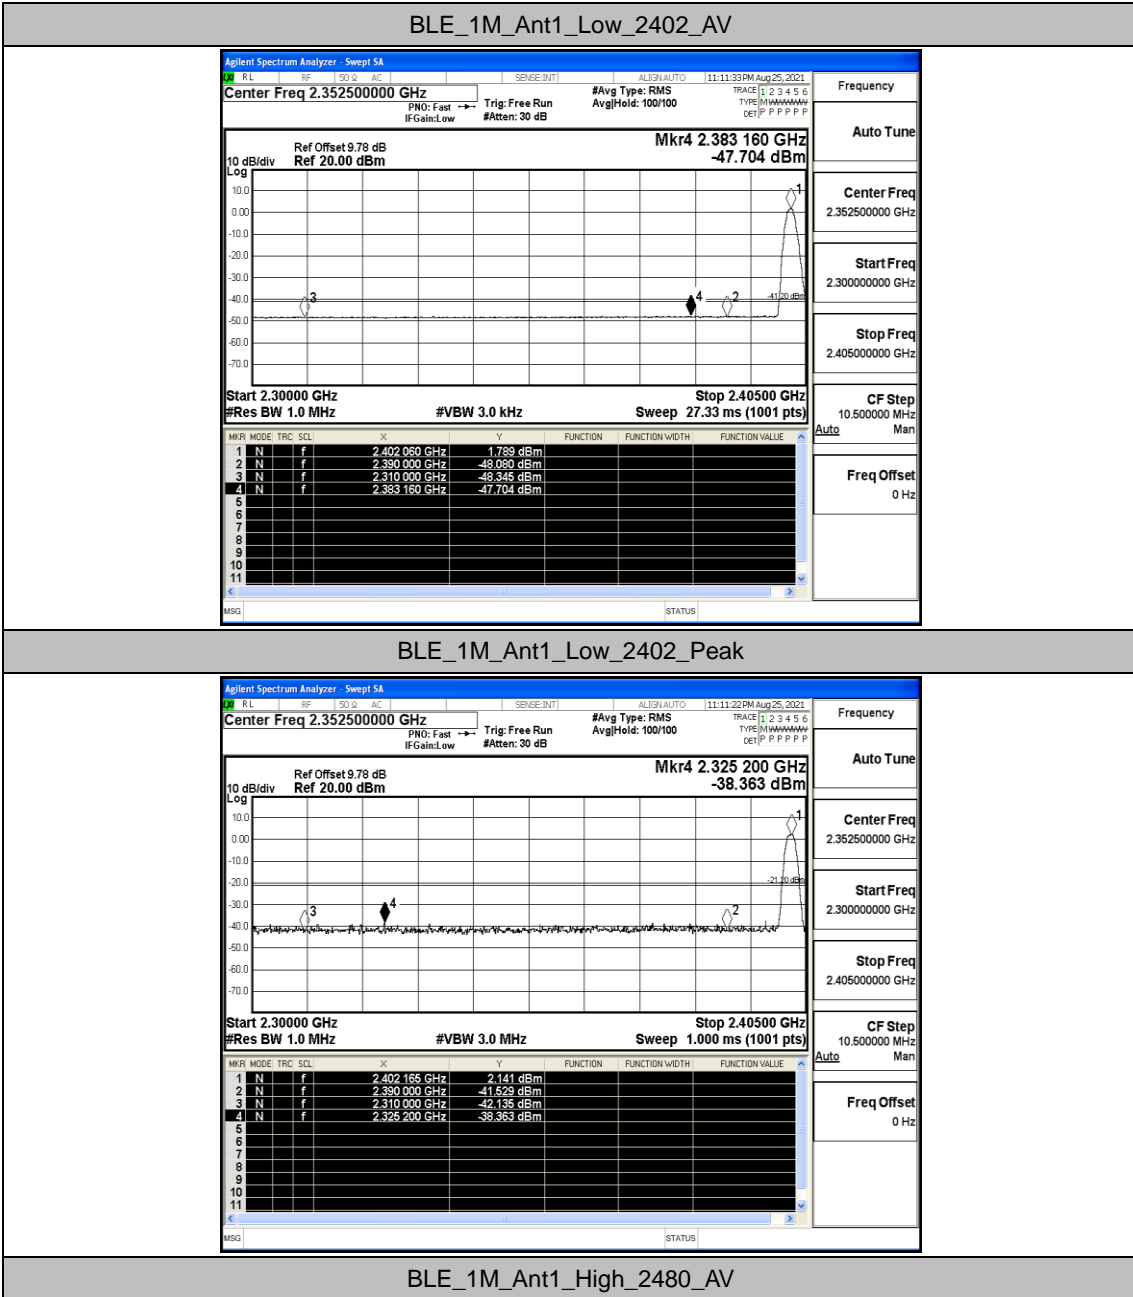



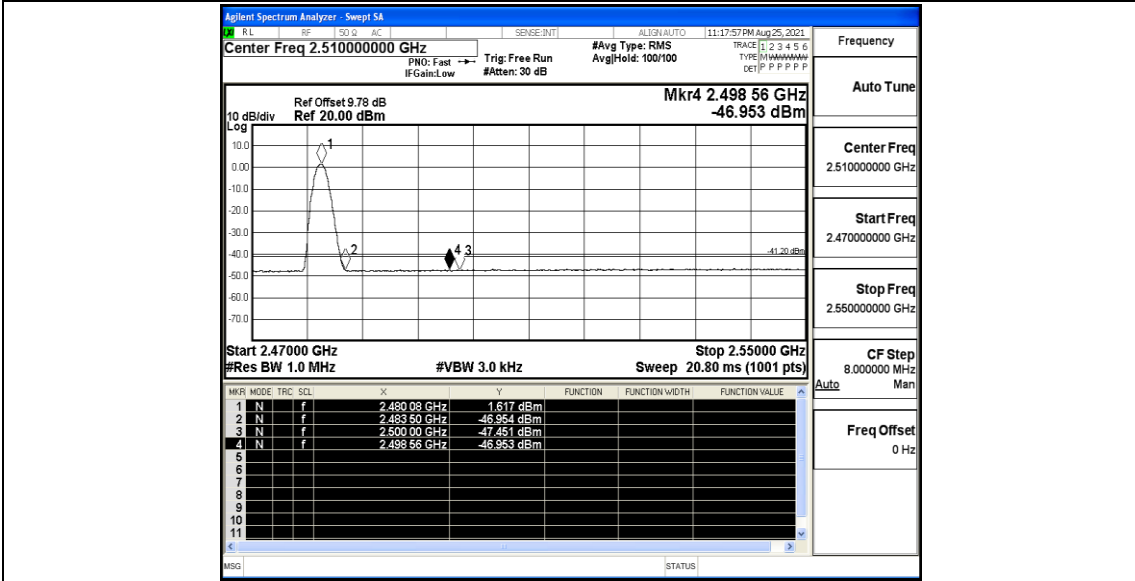

BLE\_1M\_Ant1\_High\_2480\_Peak

