

Testing Tomorrow's Technology

**Application
For**

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an
Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247**

For the

Okyanus Teknoloji Bilgisayar ve Yazilim San. Tic.

Model Number: FT-05DCH

FCC ID: 2AIFI-FT-05DCH

UST Project: 19-0286

Issue Date: October 24, 2019

Total Pages: 54

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Compliance Engineer – President

Date: October 24, 2019



This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AIFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Okyanus Teknoloji Bilgisayar Ve Yazılım San. Tic.
Alparslan is merkezi, Haldun Taner Sk. No. 27B Blok
Kat: 4 Daire: 15, İstanbul, Turkey 334173

MODEL: FT-05DCH
FCC ID: 2AIFI-FT-05DCH
DATE: October 24, 2019

This report concerns (check one): Original grant Class II change

Equipment type: 2.4 GHz Transmitter (802.15.4)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes No

If yes, defer until: N/A

date

agrees to notify the Commission by N/A

date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transmitter details:

IEEE 802.15.4 (ZigBee) transceiver device

Output power: 20.5 dBm (113 mW)

Frequency of operation: 2405-2480 MHz

Summary of Test Results

FCC Rule	Description of Test	Result
15.247(b)(3)	Peak Output Power	PASS
15.247(a)(2)	6 dB Bandwidth	PASS
15.247(d)	Conducted & Radiated Spurious Emissions	PASS
15.247(e)	Power Spectral Density	PASS
15.209	Spurious Radiated Emissions	PASS
15.207	Power line Conducted Emissions	PASS

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

Table of Contents

<u>Paragraph Title</u>	<u>Page</u>
1 General Information.....	7
1.1 Purpose of this Report	7
1.2 Characterization of Test Sample.....	7
1.3 Product Description	7
1.4 Configuration of Tested System.....	8
1.5 Test Facility.....	8
1.6 Related Submittal(s)/Grant(s)	8
2 Tests and Measurements	10
2.1 Test Equipment.....	10
2.2 Modifications to EUT Hardware	11
2.3 Number of Measurements for Intentional Radiators (15.31(m))	11
2.4 Frequency Range of Radiated Measurements (Part 15.33).....	12
2.4.1 Intentional Radiator.....	12
2.4.2 Unintentional Radiator	12
2.5 Measurement Detector Function and Bandwidth (CFR 15.35)	12
2.5.1 Detector Function and Associated Bandwidth	12
2.5.2 Corresponding Peak and Average Requirements.....	12
2.6 EUT Antenna Requirements (CFR 15.203)	13
2.7 Restricted Bands of Operation (Part 15.205)	14
2.8 Transmitter Duty Cycle (Part15.35 (c))	14
2.9 Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d)) (IC RSS 210, A2.9 (a)).....	15
2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d))	28
2.11 Band Edge Measurements – (CFR 15.247 (d))	31
2.12 Six (6) dB Bandwidth per CFR 15.247(a)(2).....	36
2.13 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))	40
2.14 Power Spectral Density (CFR 15.247(e))	44
2.15 Intentional Radiator Power Lines Conducted Emissions (CFR 15.207)...	48
2.16 Intentional Radiator, Radiated Emissions (CFR 15.209)	50
2.17 Measurement Uncertainty	54
2.17.1 Conducted Emissions Measurement Uncertainty	54
2.17.2 Radiated Emissions Measurement Uncertainty	54
3 Conclusions	54

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration	13
Figure 2.	Duty Cycle Screen Shot.....	14
Figure 3.	Conducted Spurious Emissions, Low Channel, 30 MHz - 1000 MHz	16
Figure 4.	Conducted Spurious Emissions, Low Channel, 1GHz – 2.91 GHz	17
Figure 5.	Conducted Spurious Emissions, Low Channel, 2.91 GHz – 6 GHz	18
Figure 6.	Conducted Spurious Emissions, Low Channel, 6 GHz – 26 GHz	19
Figure 7.	Conducted Spurious Emissions, Mid Channel, 30 MHz - 1000 MHz	20
Figure 8.	Conducted Spurious Emissions, Mid Channel, 1 GHz – 2.91 GHz.....	21
Figure 9.	Conducted Spurious Emissions, Mid Channel, 2.91 GHz – 6 GHz.....	22
Figure 10.	Conducted Spurious Emissions, Mid Channel, 6 GHz – 26 GHz.....	23
Figure 11.	Conducted Spurious Emissions, High Channel, 30 MHz – 1 GHz	24
Figure 12.	Conducted Spurious Emissions, High Channel, 1 GHz – 2.91 GHz	25
Figure 13.	Conducted Spurious Emissions, High Channel, 2.91 GHz – 6 GHz	26
Figure 14.	Conducted Spurious Emissions, High Channel, 6 GHz – 26 GHz	27
Figure 15.	Band Edge Compliance, Low Channel, Delta - Peak.....	32
Figure 16.	Restricted Band, Low Channel	33
Figure 17.	Band Edge Compliance, High Channel, Delta – Peak.....	34
Figure 18.	Restricted Band, High Channel.....	35
Figure 19.	6 dB Bandwidth, Low Channel.....	37
Figure 20.	6 dB Bandwidth, Mid Channel.....	38
Figure 21.	6 dB Bandwidth, High Channel	39
Figure 22.	Peak Antenna Conducted Output Power, Low Channel	41
Figure 23.	Peak Antenna Conducted Output Power, Mid Channel	42
Figure 24.	Peak Antenna Conducted Output Power, High Channel	43
Figure 25.	Peak Power Spectral Density, Low Channel.....	45
Figure 26.	Peak Power Spectral Density, Mid Channel	46
Figure 27.	Peak Peak Power Spectral Density, High Channel.....	47

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	Supporting Equipment	9
Table 2.	Test Instruments	10
Table 3.	Number of Test Frequencies for Intentional Radiators.....	11
Table 4.	Allowed Antenna(s).....	13
Table 5.	Peak Radiated Fundamental & Harmonic Emissions.....	29
Table 6.	Average Radiated Fundamental & Harmonic Emissions	30
Table 7.	Six (6) dB Bandwidth	36
Table 8.	Peak Antenna Conducted Output Power per Part 15.247 (b)(3)	40
Table 9.	Power Spectral Density for Low, Mid and High Bands	44
Table 10.	Power Line Conducted Emissions	49
Table 11.	Spurious Radiated Emissions (9 kHz – 30 MHz)	51
Table 12.	Spurious Radiated Emissions (30 MHz – 1000 MHz)	52
Table 13.	Spurious Radiated Emissions (> 1 GHz).....	53

List of Attachments

FCC Agency Agreement	External Photographs
FCC Application Forms	Internal Photographs
Letter of Confidentiality	Theory of Operation
Equipment Label(s)	RF Exposure
Block Diagram(s)	User's Manual
Schematic(s)	PAG Letter
Test Configuration Photographs	

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to FCC Rules and Regulations Part 15, Section 247.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on July 25, 2019 in good operating condition.

1.3 Product Description

The Equipment Under Test (EUT) is the Okyanus Teknoloji Bilgisayar ve Yazılım San. Tic., Model FT-05DCH. It is a reader device that is part of a real time location system (RTLS). The EUT collects signals from the tags, readers and other sensors within the system and sends them to a router. The EUT operates over a frequency range of 2.4 GHz (Zigbee) and 4.4 GHz (Ultra Wide Band).

This test report covers the 2.4 GHz (Zigbee) compliance testing. The evaluation of the UWB radio feature has been performed in a separate test report.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AIFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for the intentional radiator aspect of the device and *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for the unintentional radiator aspect of the device as well as FCC subpart B and C of Part 15 and per FCC KDB Publication number 558074 v03r05 for Digital Transmission Systems Operating Under section 15.247.

Digital RF conducted and radiated emissions data below 1 GHz were taken with the measuring receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz respectively. All measurements performed above 1.0 GHz were made with a RBW of 1 MHz. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was set to 3 times the RBW or as required per the standard throughout the evaluation process.

A list of EUT and peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are provided in separate appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5301. Additionally, this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

1.6 Related Submittal(s)/Grant(s)

The EUT is subject to the following FCC Equipment Authorizations:

- a) Certification of the Zigbee transmitter incorporated within the EUT, see test data presented herein.
- b) Certification of the UWB transmitter under FCC Part 15.519; test results included in a separate report.
- c) Verification as a Class B Digital Device.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

Table 1. Supporting Equipment

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/IC ID	CABLES P/D
EUT Wipelot	FT-05DCH	Engineering Sample	2AUFI-FT-05DCH	P
Antenna See antenna details	--	--	--	--

S= Shielded, U= Unshielded, P= Power, D= Data

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are included herein.

Table 2. Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	9/17/2020 2 yr.
SPECTRUM ANALYZER	8593E*	HEWLETT-PACKARD	3205A00124	10/25/2019
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT-PACKARD	1937A02980	5/7/2020
PREAMP 1.0 GHz to 26.0 GHz	8449B	HEWLETT-PACKARD	3008A00480	4/8/2020
LOOP ANTENNA	6502	EMCO	9810-3246	1/22/2020 2 yr.
BICONICAL ANTENNA	3110B	EMCO	9307-1431	10/23/2019 2 yr.
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	2/1/2021 2 yr.
HORN ANTENNA	3115	EMCO	9107-3723	11/28/2020 2 yr.
HIGH PASS FILTER	H3R020G2	MICROWAVE CHIRCUITS	001DC9528	4/2/2020
8 dB ATTENUATOR	VAT-8 15542	MINI-CIRCUITS	30519	10/31/2019
LISN	9247-50-TS-50-N	Solar Electronics	955824	4/3/2020
LISN	9247-50-TS-50-N	Solar Electronics	955825	4/3/2020

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

(*)= used for power line conducted emissions testing

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUF1-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.2 Modifications to EUT Hardware

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 15.247 requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 as follows:

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates over 2.4 GHz to 2.4835 GHz, 3 test frequencies will be used.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be investigated from 30 MHz to 1000 MHz or to the range specified in 2.4.1 above, whichever is the higher range of investigation.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
External Antenna	Pulse Electronics	Dipole	W1010	2.0	SMA (Male)

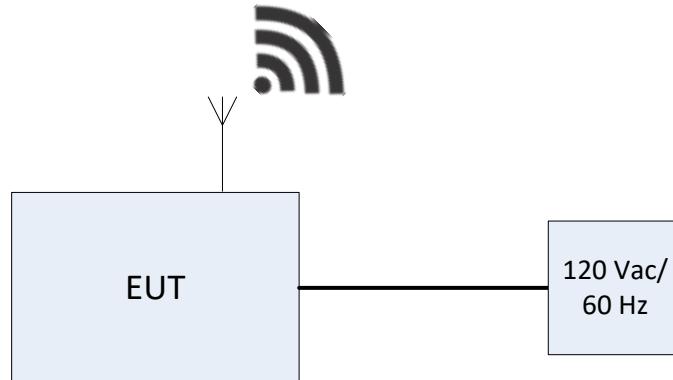


Figure 1. Block Diagram of Test Configuration

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.7 Restricted Bands of Operation (Part 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other Spurious are examined for this requirement see paragraph 2.10.

2.8 Transmitter Duty Cycle (Part15.35 (c))

The EUT employs pulse transmission however for testing purpose the EUT was programmed to transmit at a rate >98%. The pulse transmission requirements of this subpart were acknowledge and considered during testing.

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may also be expressed logarithmically in dB.

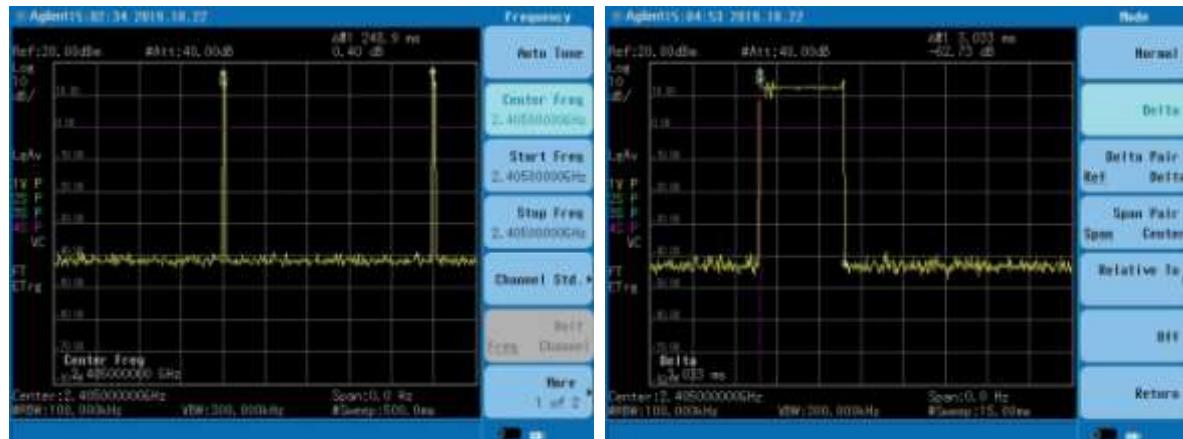


Figure 2. Duty Cycle Screen Shot

Note: There is only a single pulse in a 100 mSec time interval.

DC correction factor = $20 \log (TXon/100mSec) = 20 * \log (0.0303) = -30.4 \text{ dB}$

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUF1-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.9 Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d)) (IC RSS 210, A2.9 (a))

The EUT was put into a continuous-transmit mode of operation and tested per ANSI C63.10-2013 for conducted out of band emissions radiating from the antenna port over the frequency range of 30 MHz to ten times the highest clock frequency generated or used in this case, 25 GHz. A conducted scan was performed on the EUT to identify and record spurious signals that were related to the transmitter. Antenna conducted emissions of a significant magnitude that fell within restricted bands were then measured as radiated emissions inside the semi-anechoic chamber. The conducted emissions graphs are found in Figures 3 through 8 below. The limit for antenna conducted power is 1 Watt (30 dBm) per CFR 15.247 (b)(3).

For conducted RF antenna tests, the RBW was set to 100 kHz, video bandwidth (VBW) > RBW, and scanned up through the 10th harmonic of the fundamental frequency. All harmonics and spurious emissions must be at least 20 dB down from the fundamental frequency.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

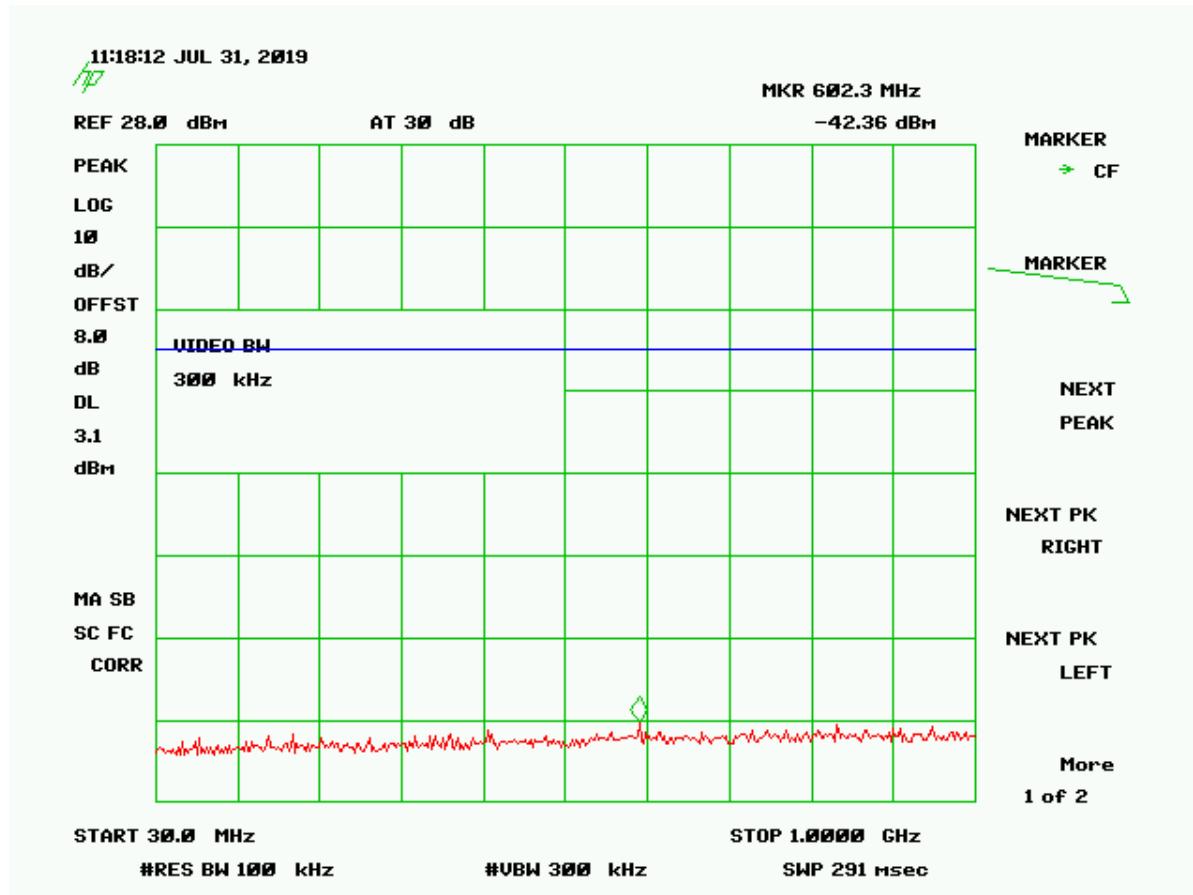


Figure 3. Conducted Spurious Emissions, Low Channel, 30 MHz - 1000 MHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

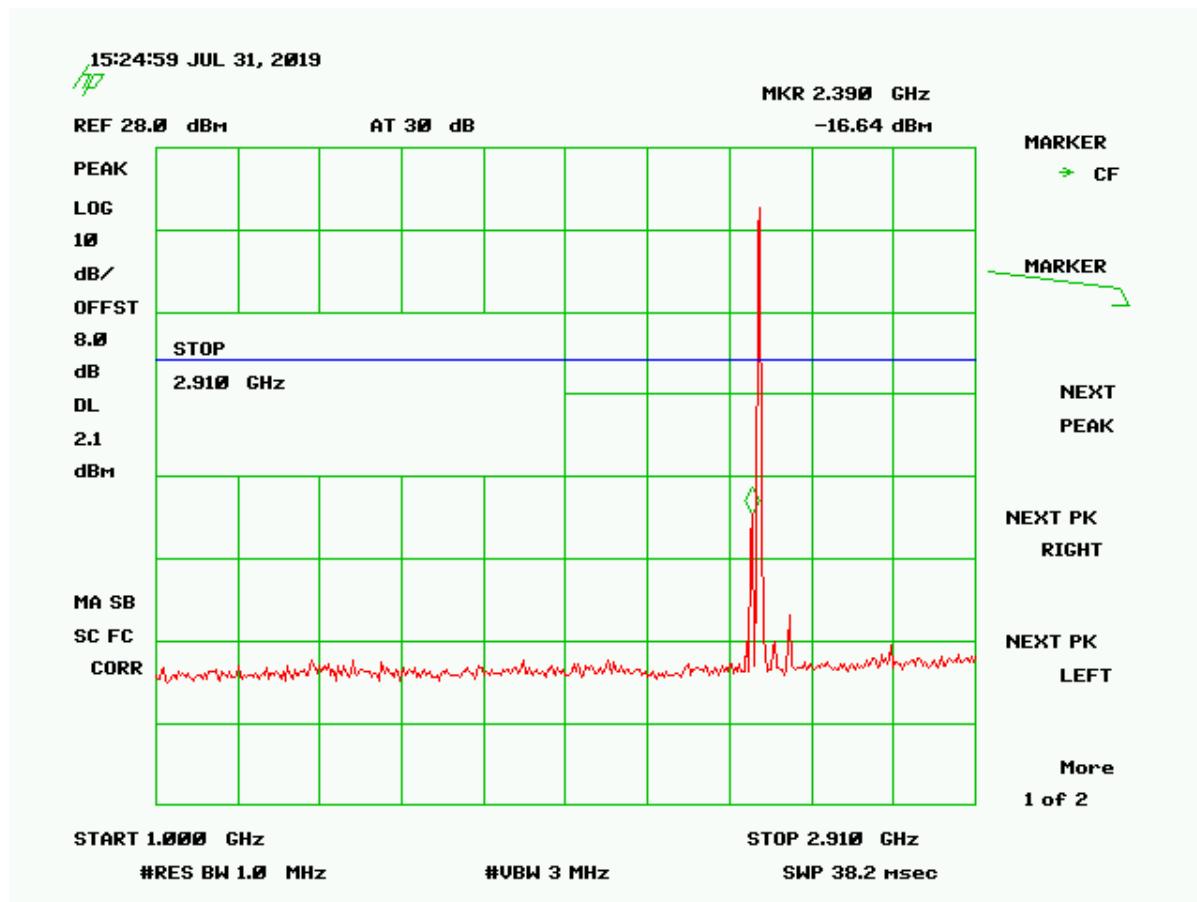


Figure 4. Conducted Spurious Emissions, Low Channel, 1GHz – 2.91 GHz

** Large emission shown is the fundamental frequency.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

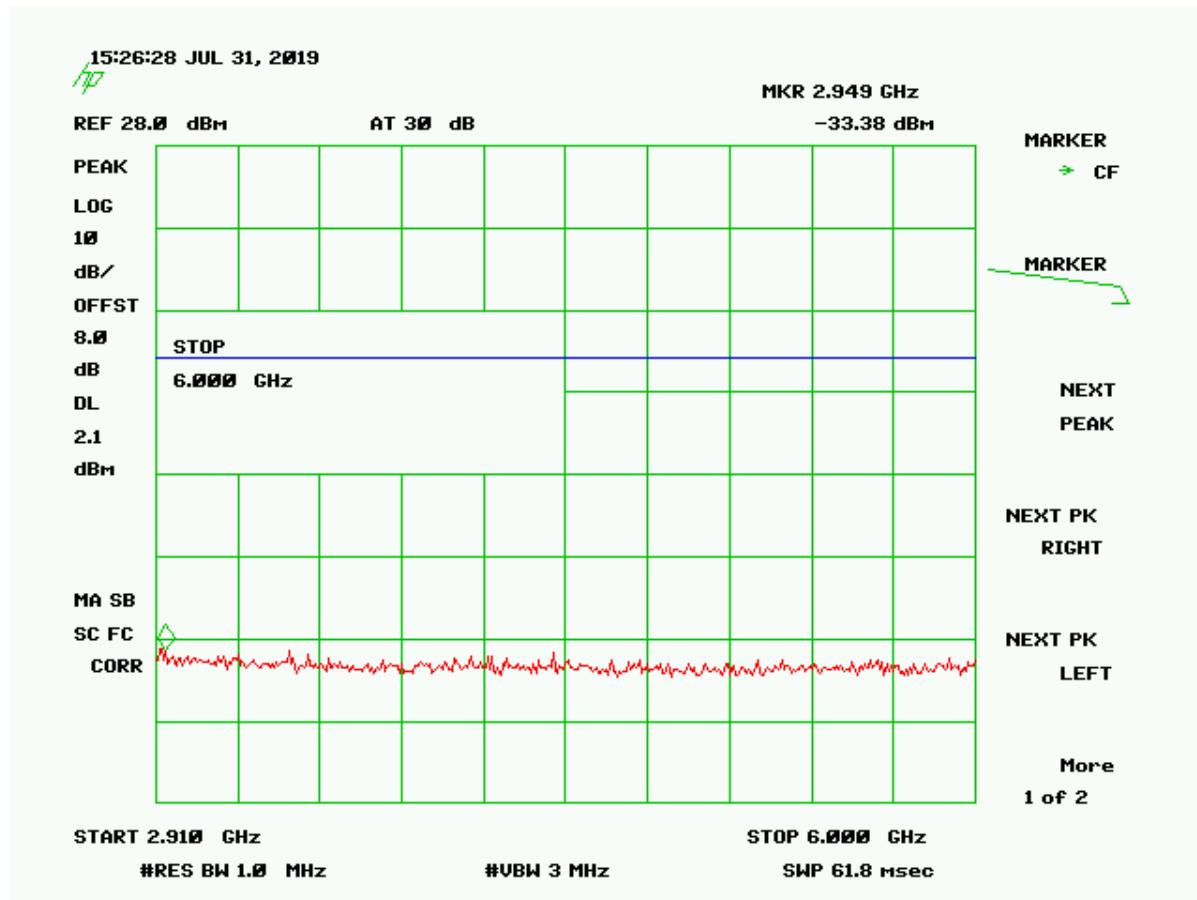


Figure 5. Conducted Spurious Emissions, Low Channel, 2.91 GHz – 6 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH



Figure 6. Conducted Spurious Emissions, Low Channel, 6 GHz – 26 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

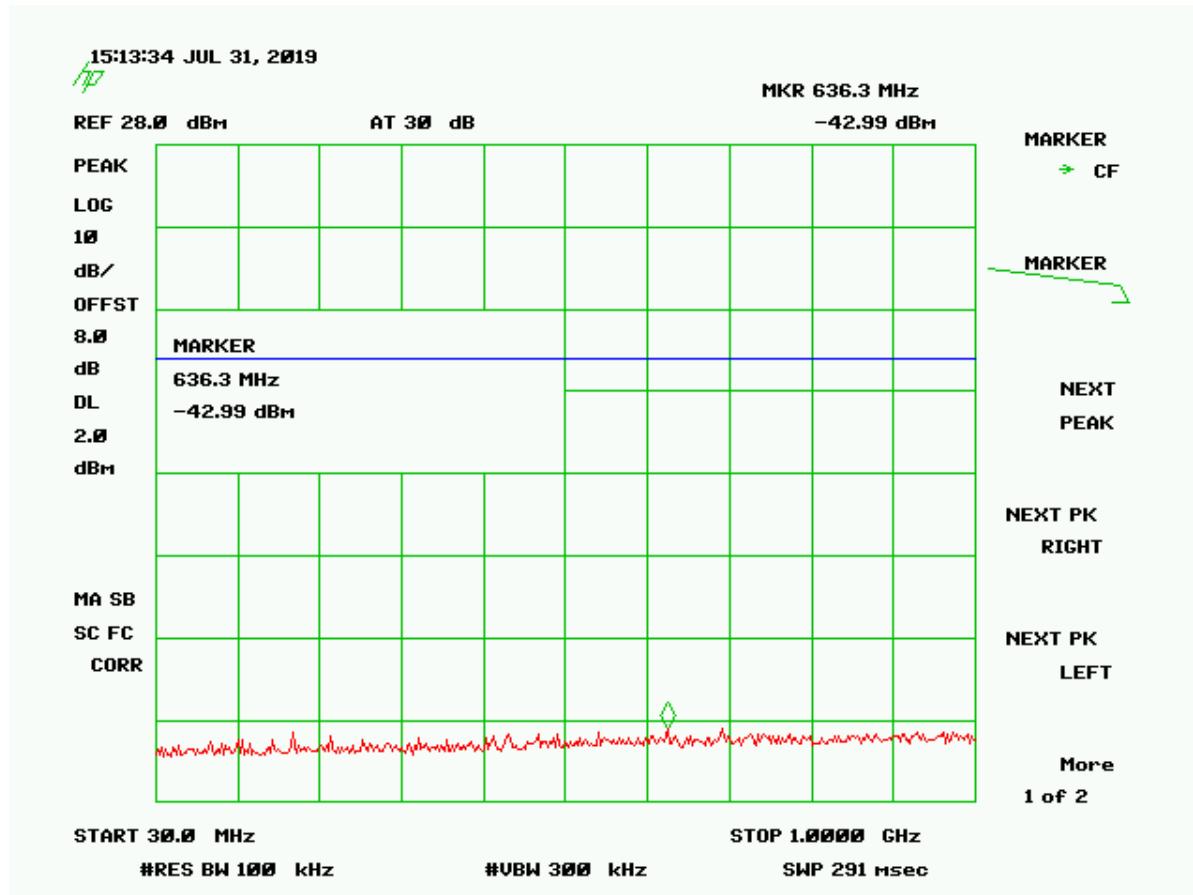


Figure 7. Conducted Spurious Emissions, Mid Channel, 30 MHz - 1000 MHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

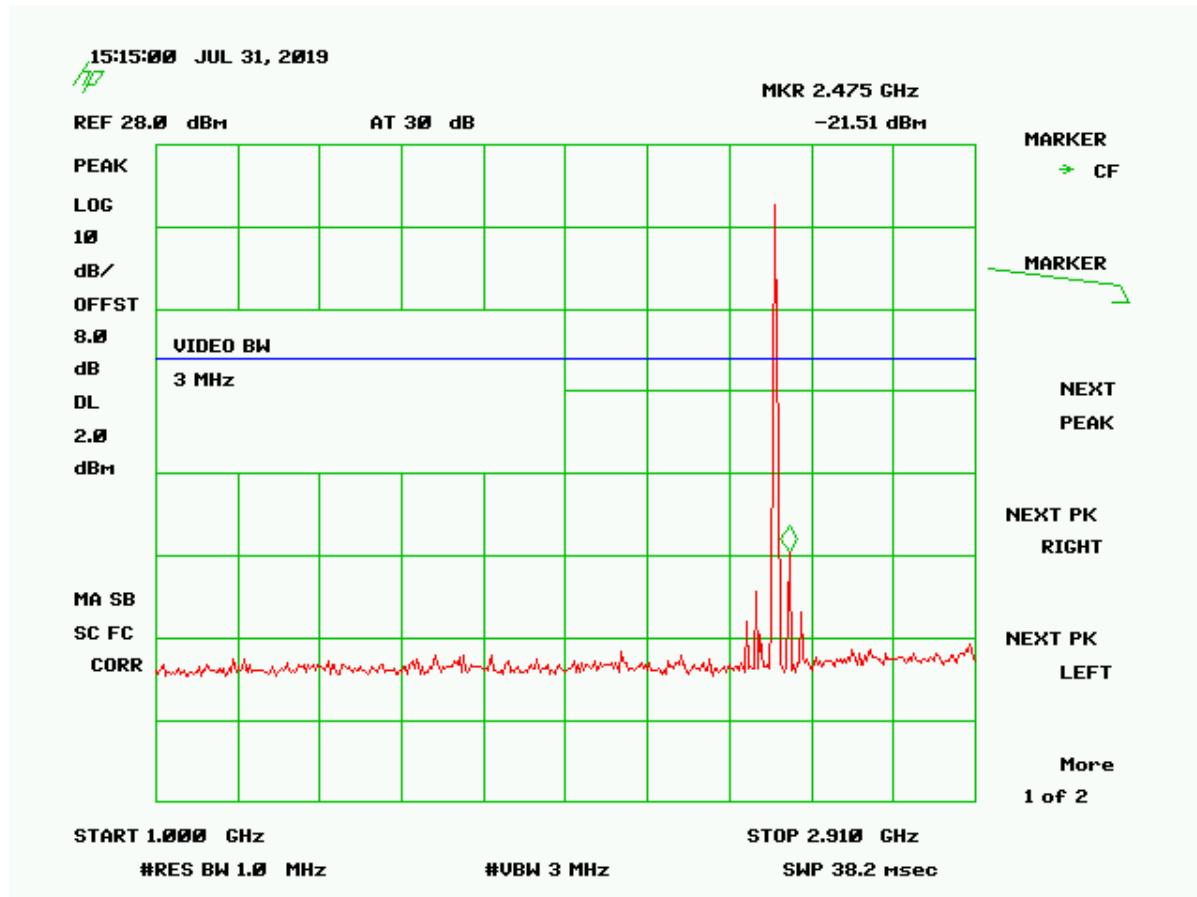


Figure 8. Conducted Spurious Emissions, Mid Channel, 1 GHz – 2.91 GHz

** Large emission shown is the fundamental frequency.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

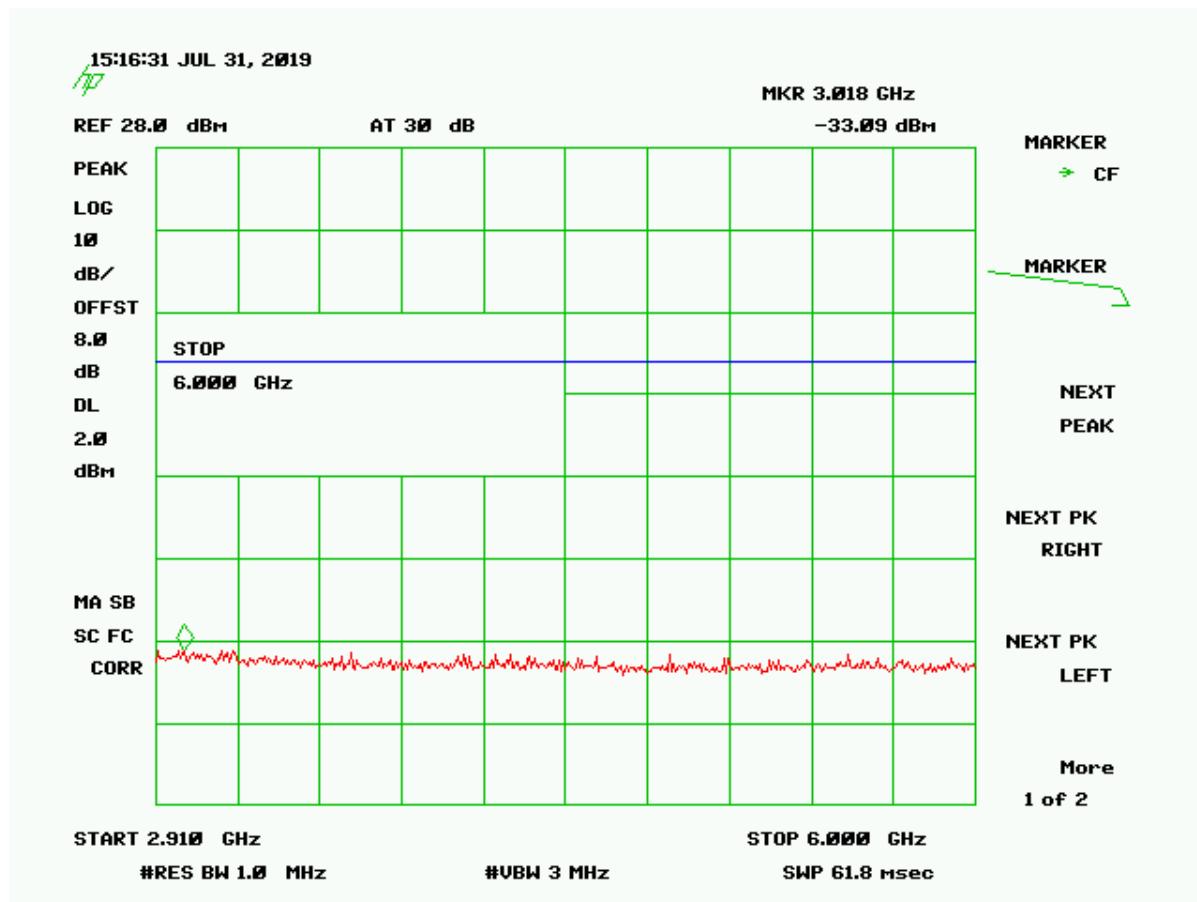


Figure 9. Conducted Spurious Emissions, Mid Channel, 2.91 GHz – 6 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH



Figure 10. Conducted Spurious Emissions, Mid Channel, 6 GHz – 26 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

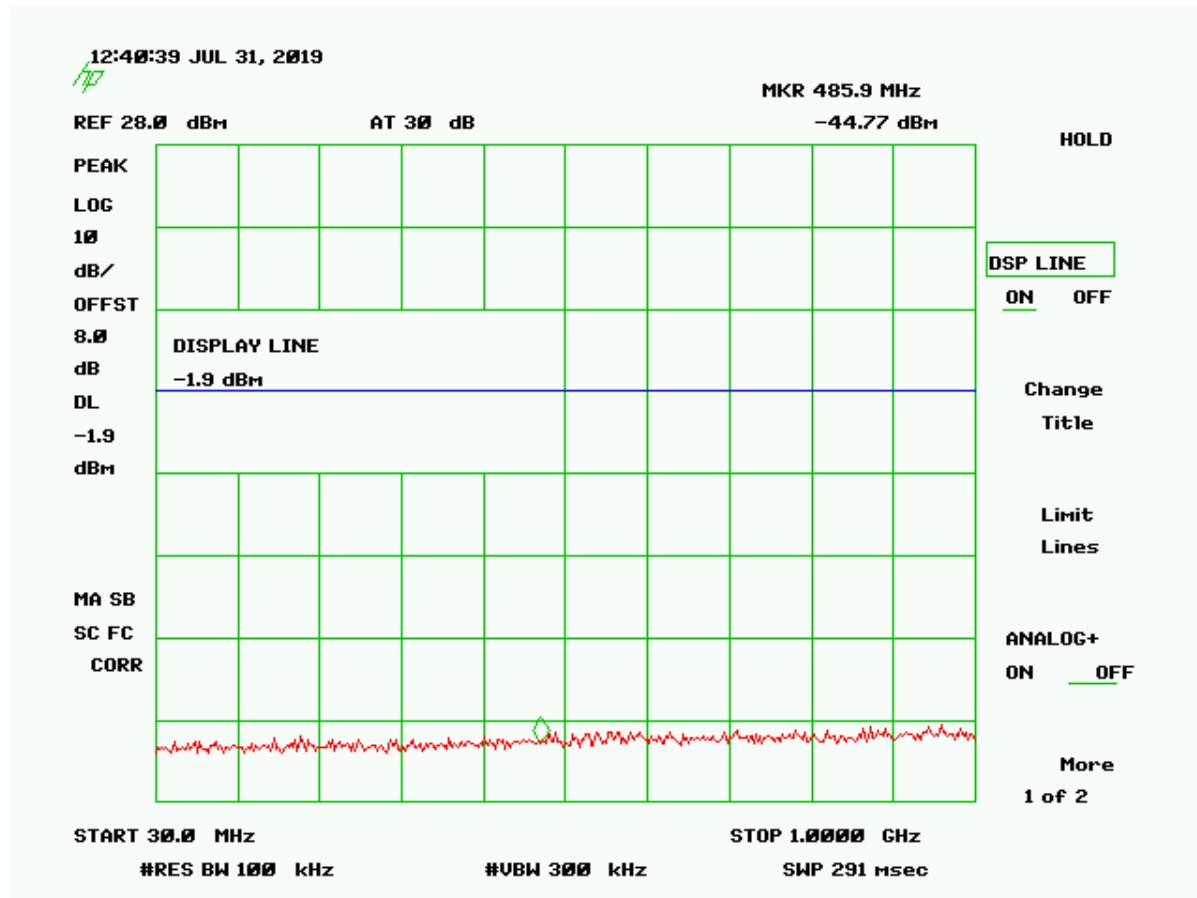


Figure 11. Conducted Spurious Emissions, High Channel, 30 MHz – 1 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

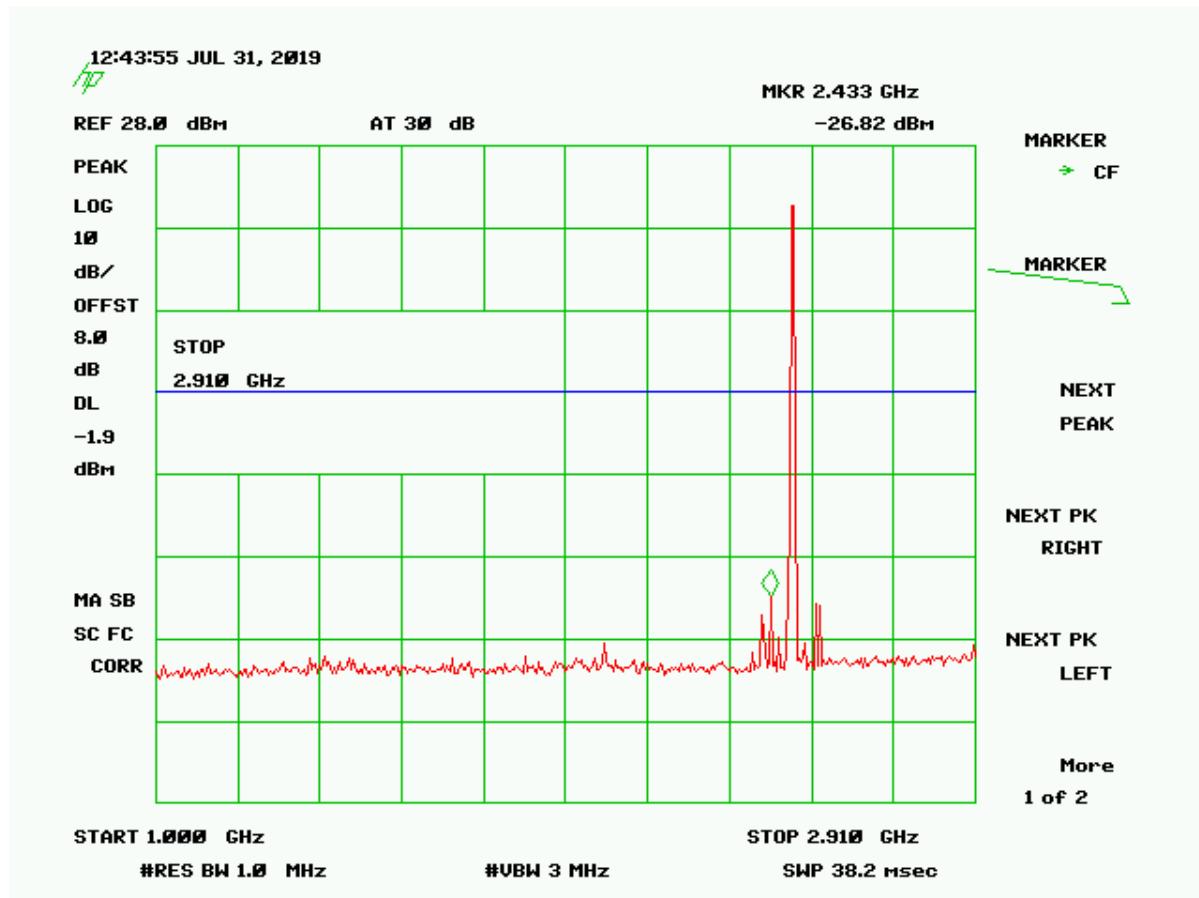


Figure 12. Conducted Spurious Emissions, High Channel, 1 GHz – 2.91 GHz

** Large emission shown is the fundamental frequency.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

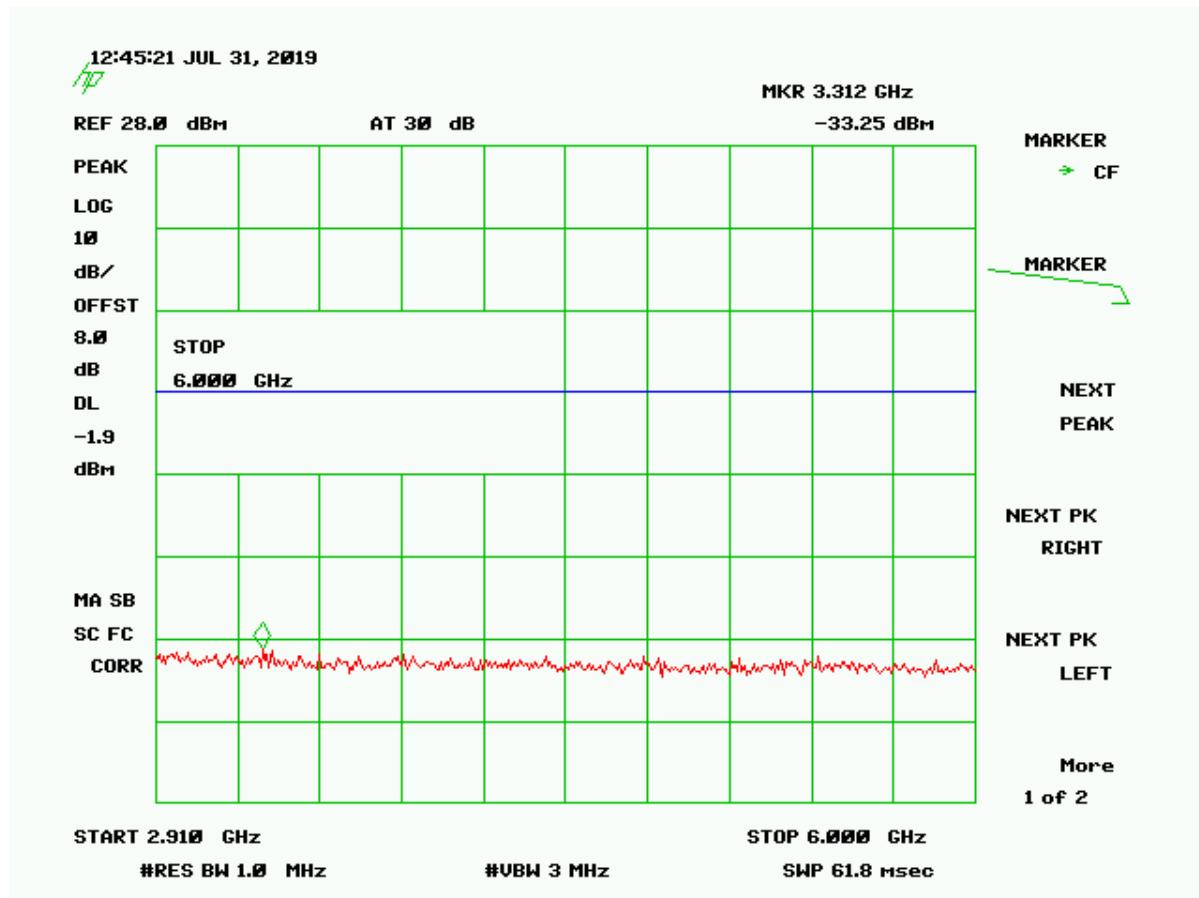


Figure 13. Conducted Spurious Emissions, High Channel, 2.91 GHz – 6 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

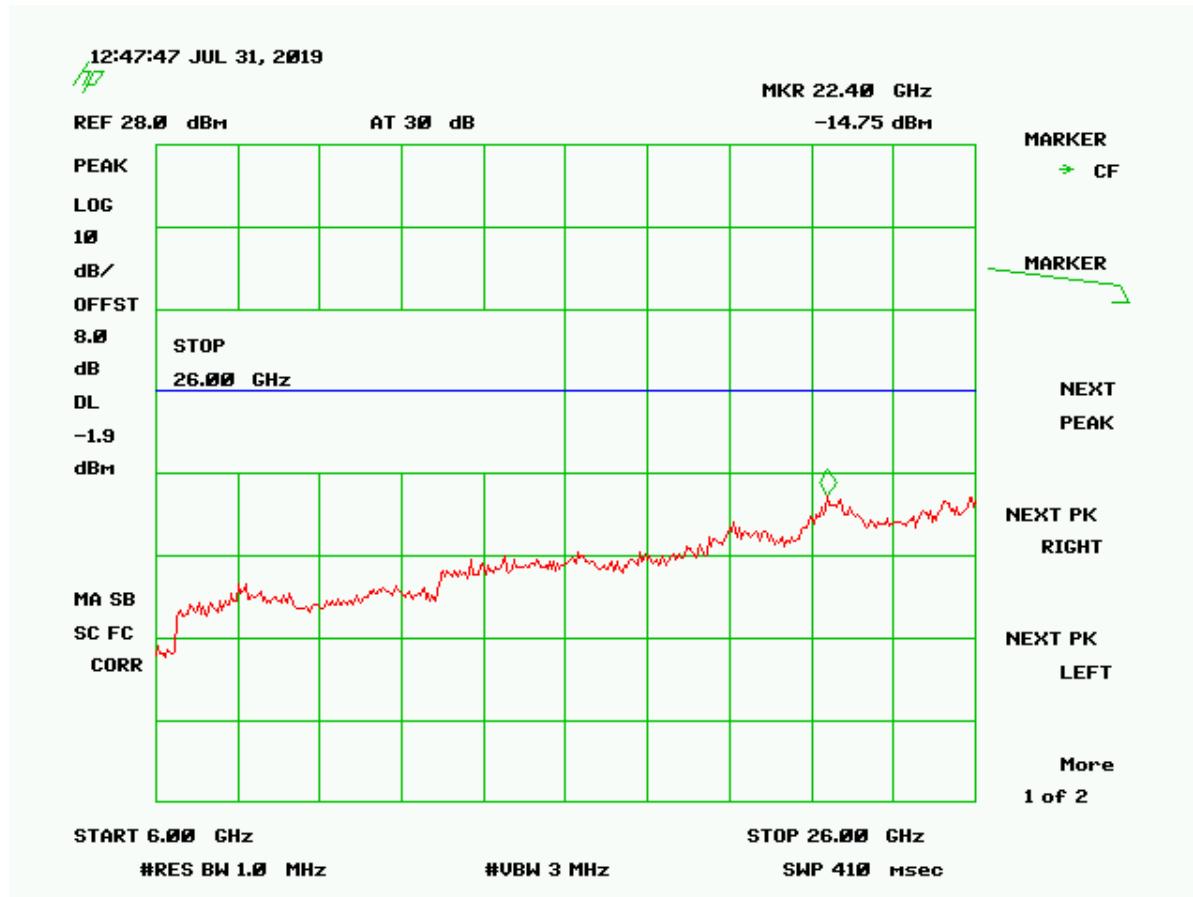


Figure 14. Conducted Spurious Emissions, High Channel, 6 GHz – 26 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AIFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d))

On the test site, the EUT was placed on top of a non-conductive table, 80 cm above the floor for measurements below 1 GHz and 150 cm above the floor for measurements > 1 GHz. The EUT was also evaluated in three orthogonal positions to determine the worst case position. The front of the EUT faced the measurement antenna located 3 meters away. Each signal measured was maximized by raising and lowering the receive antenna between 1 and 4 meters in height while monitoring the ever changing spectrum analyzer display (with channel A in the Clear-Write mode and channel B in the Max-Hold mode) for the largest signal visible. That exact antenna height where the signal was maximized was recorded for reproducibility purposes. Also, the EUT was rotated about its Y-axis 360 degrees clockwise and counterclockwise while monitoring the Spectrum Analyzer display for maximum. The EUT azimuth was recorded for reproducibility purposes. The EUT was measured when both maxima were simultaneously satisfied.

For radiated measurements, the EUT was set into a continuous transmission mode. Below 1 GHz, the RBW of the measuring instrument was set equal to 120 kHz with a $VBW \geq RBW$. Peak measurements above 1 GHz were measured using a $RBW = 1 \text{ MHz}$, with a $VBW \geq RBW$. The results of peak radiated spurious emissions falling within restricted bands are given in Table 5 below.

For Average measurements above 1 GHz, the emissions were measured using $RBW = 1 \text{ MHz}$ and $VBW = 10 \text{ Hz}$ or the duty cycle correction factor was applied to the Peak recorded value. The results of average radiated spurious emissions falling within restricted bands are given in Table 5 below.

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 2AIFI-FT-05DCH
 19-0286
 October 24, 2019
 OKYANUS TEKNOLOJİ
 FT-05DCH

Table 5. Peak Radiated Fundamental & Harmonic Emissions

Tested By: MA	Test: FCC Part 15,247(d)			Client: Okyanus Teknoloji				
	Project: 19-0286			Model: FT-05DCH				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - PEAK								
2405.00	120.30	--	-3.13	117.17	--	3.0m./HORZ	--	PK
*4810.00	47.10	--	7.72	54.82	74.0	3.0m./VERT	19.2	PK
*12025.00	41.68	-9.5	23.00	55.18	74.0	1.0m./VERT	18.8	PK
Mid Channel - PEAK								
2440.00	119.80	--	-3.01	116.79	--	3.0m./HORZ	--	PK
*4880.00	46.54	--	7.83	54.37	74.0	3.0m./VERT	19.6	PK
*7320.00	53.89	-9.5	17.68	62.07	74.0	1.0m./VERT	11.9	PK
High Channel- PEAK								
2480.00	117.60	--	-3.68	113.90	--	3.0m./HORZ	--	PK
*4960.00	47.14	--	8.44	55.58	74.0	3.0m./VERT	18.4	PK
*7440.00	54.52	-9.5	19.32	64.34	74.0	1.0m./VERT	9.7	PK

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Sample Calculation at 2405.00 MHz:

Magnitude of Measured Frequency	120.30	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	-3.13	dB/m
Corrected Result	117.17	dBuV/m

Test Date: August 1, 2019

Tested By
 Signature: 

Name: Mark Afroozi

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 2AUFI-FT-05DCH
 19-0286
 October 24, 2019
 OKYANUS TEKNOLOJİ
 FT-05DCH

Table 6. Average Radiated Fundamental & Harmonic Emissions

Tested By: MA	Test: FCC Part 15,247(d)			Client: Okyanus Teknoloji				
	Project: 19-0286			Model: FT-05DCH				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL- PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
Low Channel - Average								
2405.00	120.30	-30.4	-3.13	86.77	--	3.0m./HORZ	--	AVG ¹
*4810.00	26.72	--	7.72	34.44	54.0	3.0m./VERT	19.6	AVG
*12025.00	24.71	-9.5	23.00	38.21	54.0	1.0m./VERT	15.8	AVG
Mid Channel-Average								
2440.00	119.80	-30.4	-3.01	86.39	--	3.0m./HORZ	--	AVG ¹
*4880.00	26.73	--	7.83	34.56	54.0	3.0m./VERT	19.4	AVG
*7320.00	27.27	-9.5	17.68	35.45	54.0	1.0m./VERT	18.6	AVG
High Channel-Average								
2480.00	117.60	-30.4	-3.68	83.50	--	3.0m./HORZ	--	AVG ¹
*4960.00	26.96	--	8.44	35.40	54.0	3.0m./VERT	18.6	AVG
*7440.00	26.30	-9.5	19.32	36.12	54.0	1.0m./VERT	17.9	AVG

1.(*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 CFR 15.35.
 2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic

Note 1: Duty cycle applied to Peak value to correct for AVG. The EUT was programmed to transmit at >98% duty cycle during all testing.

Sample Calculation at 2405.00 MHz:

Magnitude of Measured Frequency	120.30	dBuV
+Additional Factor (filter + duty cycle)	-30.40	dB
+Antenna Factor + Cable Loss+ Amplifier Gain – Duty Cycle	-3.13	dB/m
Corrected Result	86.77	dBuV/m

Test Date: August 1, 2019

Tested By
 Signature: 

Name: Mark Afroozi

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AIFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.11 Band Edge Measurements – (CFR 15.247 (d))

Band Edge measurements are made following the guidelines in ANSI C63.10-2013 with the EUT initially operating on the lowest channel and then operating on the highest channel within its band of operation. Antenna port conducted measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band). Because these frequencies occur above 1000 MHz they have both a peak and average requirement.

To capture the band edge, the spectrum analyzer frequency span was set large enough (usually around 10 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Conducted measurements are performed with RBW at 100 kHz and VBW is set \geq RBW. See figures and calculations below for more detail.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

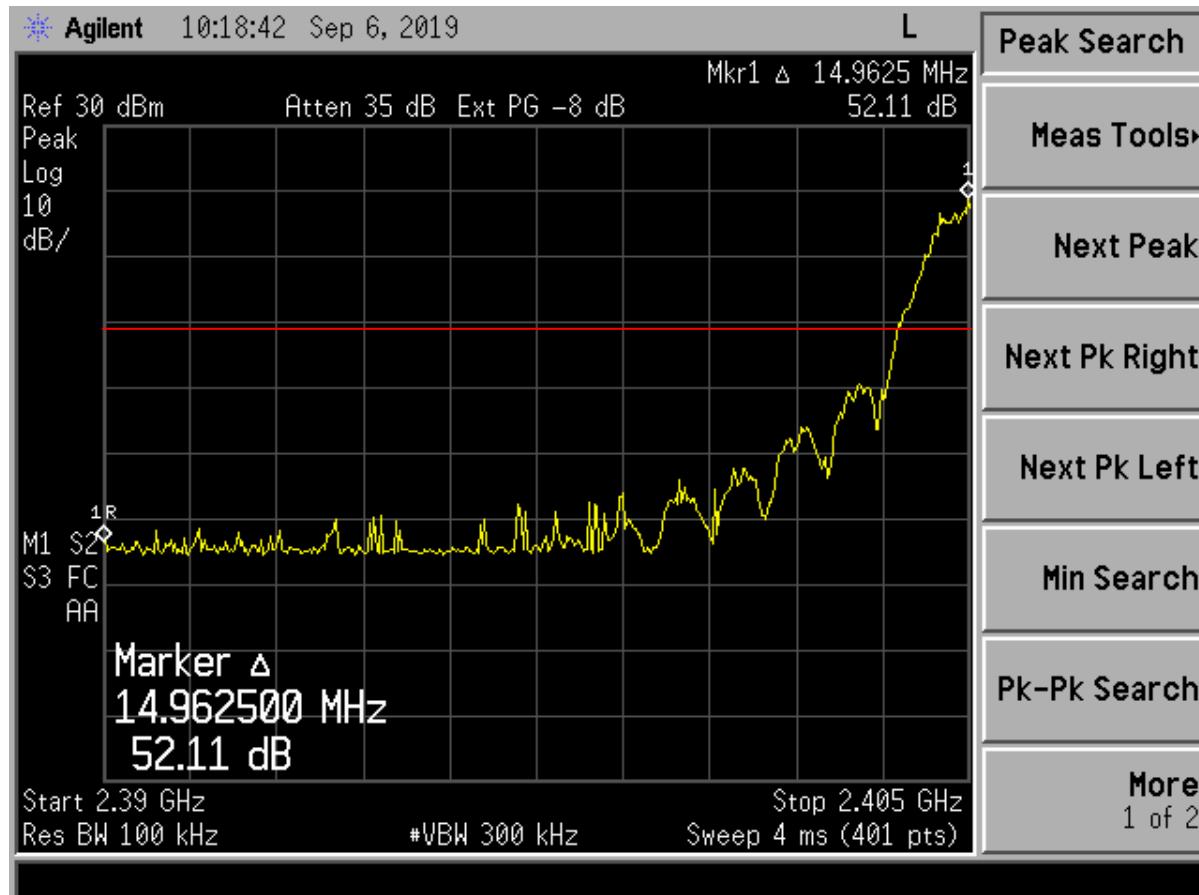


Figure 15. Band Edge Compliance, Low Channel, Delta - Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	52.11	dB
<u>Band Edge Limit</u>	20.00	dB
Band Edge Margin	32.11	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

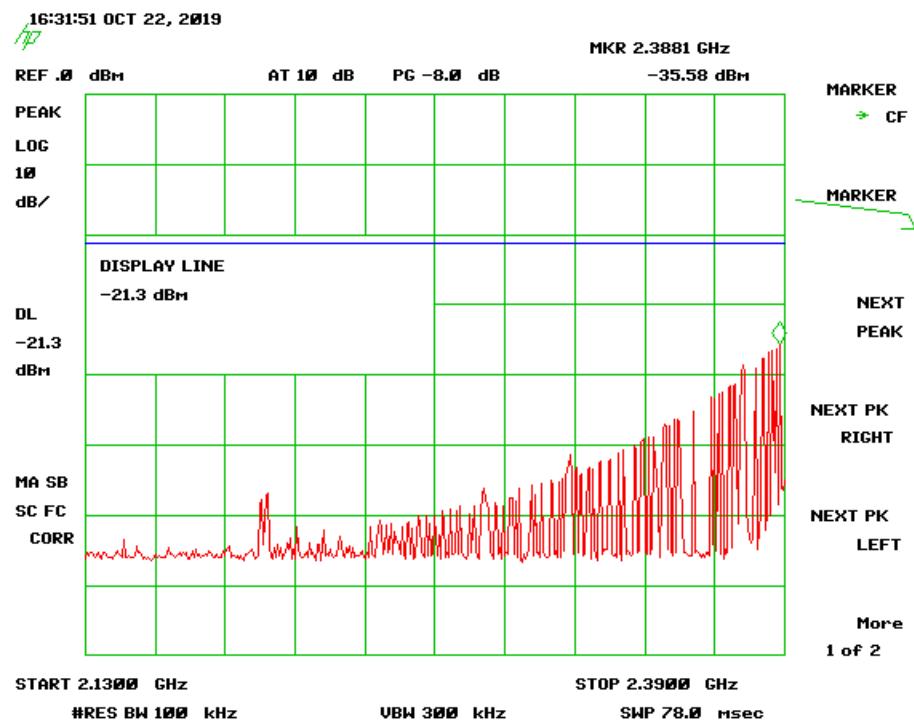


Figure 16. Restricted Band, Low Channel

Frequency MHz	Measured (dBm)	Limit (dBuV/m)	Limit (dBm)	Detector	Result
2388.10	-35.58	74.0	-21.25	Peak	PASS
2388.10	-35.58 + -39.0* = -74.58 dBm	54.0	-41.25	Average	PASS

(*)= Duty cycle correction factor applied to Peak value.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

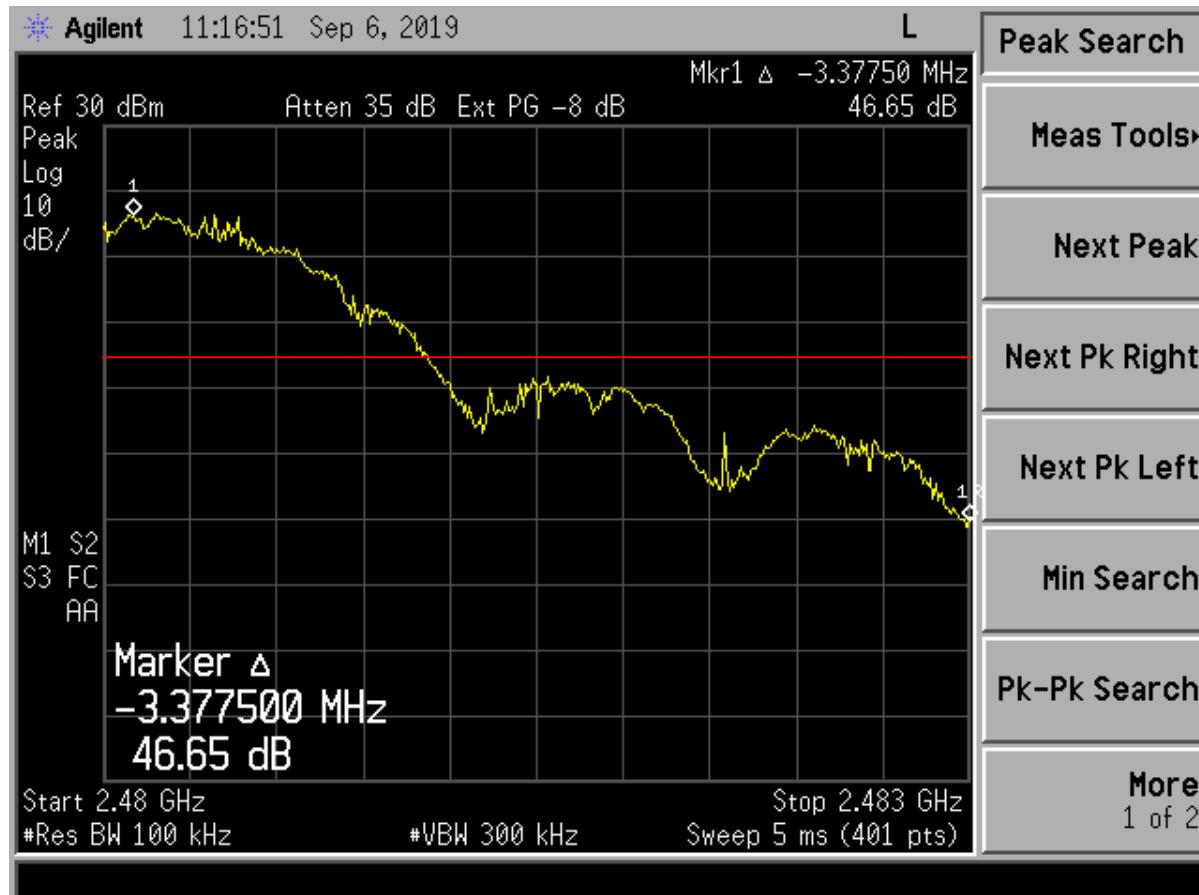


Figure 17. Band Edge Compliance, High Channel, Delta – Peak

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	46.65	dB
<u>Band Edge Limit</u>	20.00	dB
Band Edge Margin	26.65	dB

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

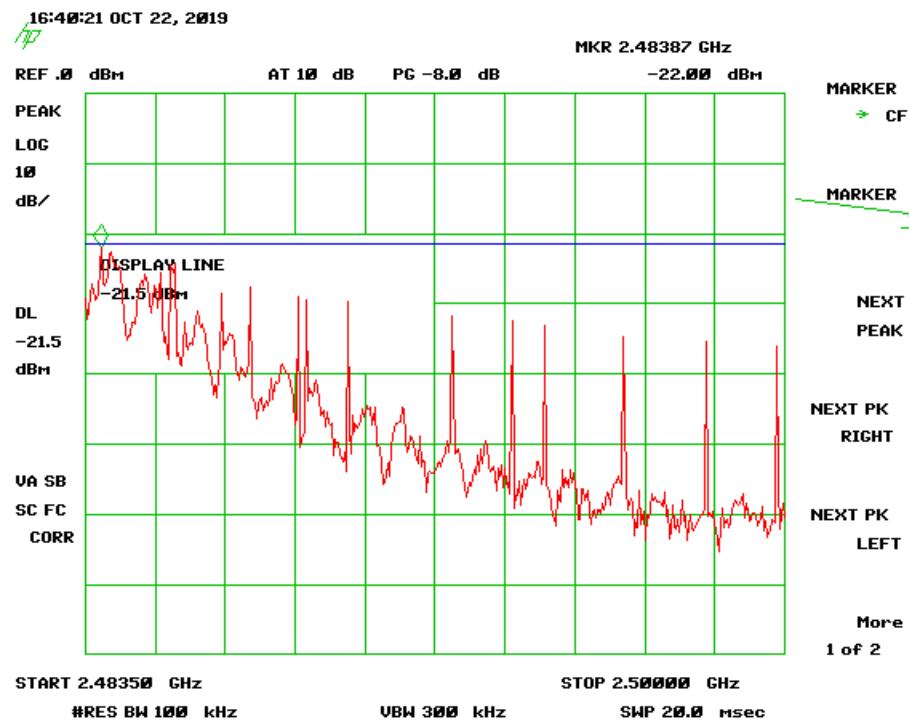


Figure 18. Restricted Band, High Channel

Frequency MHz	Measured (dBm)	Limit (dBuV/m)	Limit (dBm)	Detector	Result
2483.87	-22.00	74.0	-21.25	Peak	PASS
2483.87	-22.00 + -39.0*= -61.00 dBm	54.0	-41.25	Average	PASS

(*)=Duty cycle correction factor applied to Peak value.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.12 Six (6) dB Bandwidth per CFR 15.247(a)(2)


The EUT antenna port was connected to a spectrum analyzer having a $50\ \Omega$ input impedance. Measurements were performed per ANSI C63.10-2013, clause 11.8. The RBW was set to 100 kHz and the $\text{VBW} \geq \text{RBW}$. The results of this test are given in the table and figures following

Table 7. Six (6) dB Bandwidth

Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum FCC Bandwidth (MHz)
2405.00	1.438	0.5
2440.00	1.675	0.5
2480.00	1.500	0.5

Test Date: September 6, 2019

Tested By

Signature: 

Name: Mark Afroosi

Test Date: October 22, 2019

Tested By

Signature: 

Name: George Yang

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

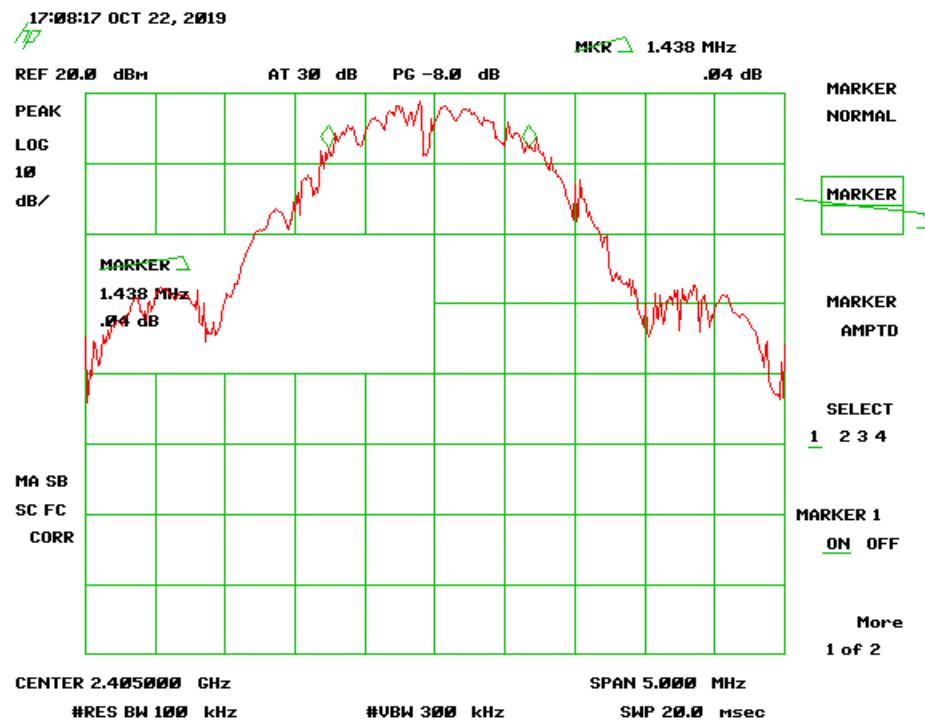


Figure 19. 6 dB Bandwidth, Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

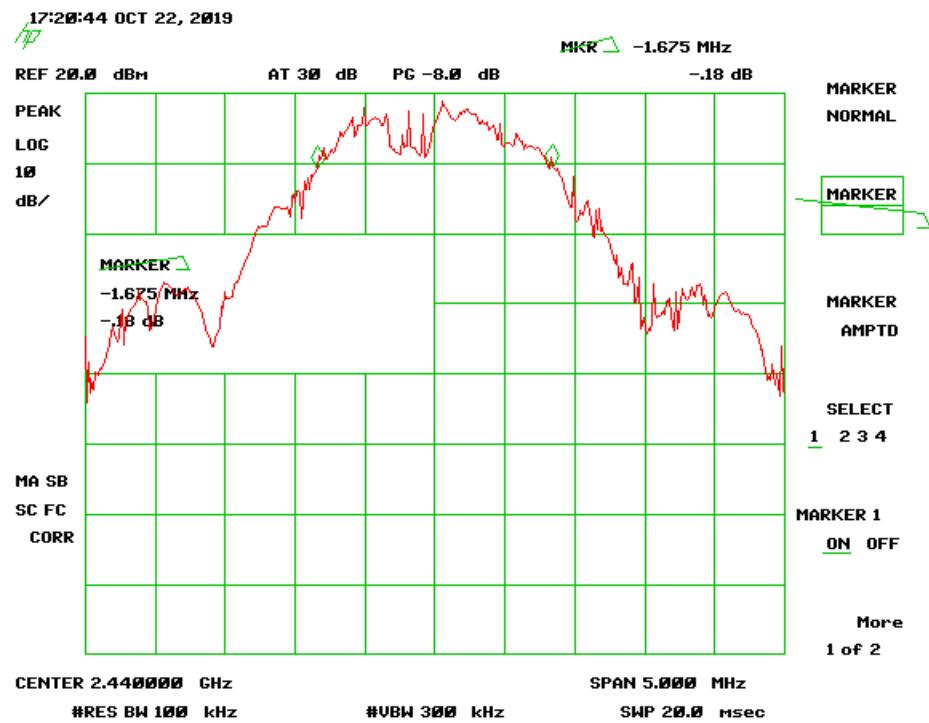


Figure 20. 6 dB Bandwidth, Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

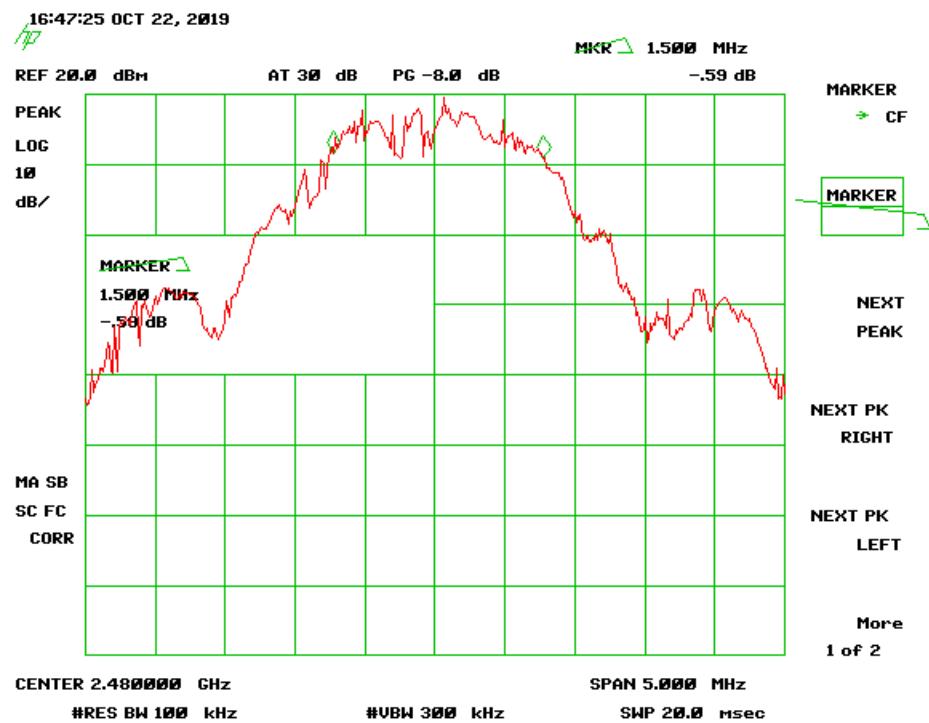


Figure 21. 6 dB Bandwidth, High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.13 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))

The transmitter was programmed to operate at a maximum output power across the bandwidth.


Peak power within the band 2400 MHz to 2483.5 MHz was measured per ANSI C63.10-2013 as an antenna conducted test with a spectrum analyzer by connecting the spectrum analyzer directly, via a short RF cable, and attenuators to the antenna output terminals on the EUT. The spectrum analyzer was set to an RBW of 3 MHz, and the VBW \geq RBW. Peak antenna conducted output power is tabulated below.

Table 8. Peak Antenna Conducted Output Power per Part 15.247 (b)(3)

Frequency of Fundamental (MHz)	Raw Test Data dBm	Converted Data (mW)	FCC Limit (mW Maximum)
2405	20.44	111	1000
2440	20.53	113	1000
2480	20.33	108	1000

Test Date: September 6, 2019

Tested By

Signature: 

Name: Mark Afrooz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

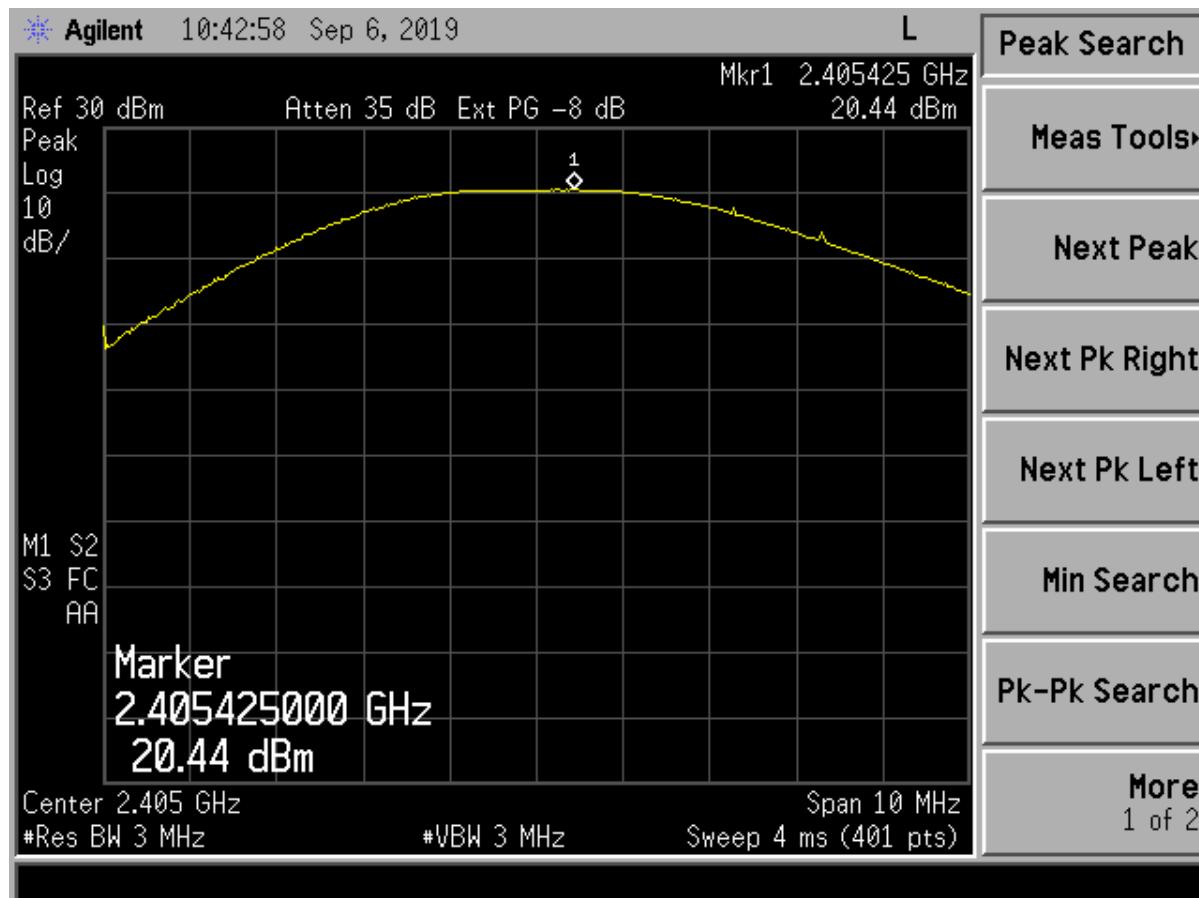


Figure 22. Peak Antenna Conducted Output Power, Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

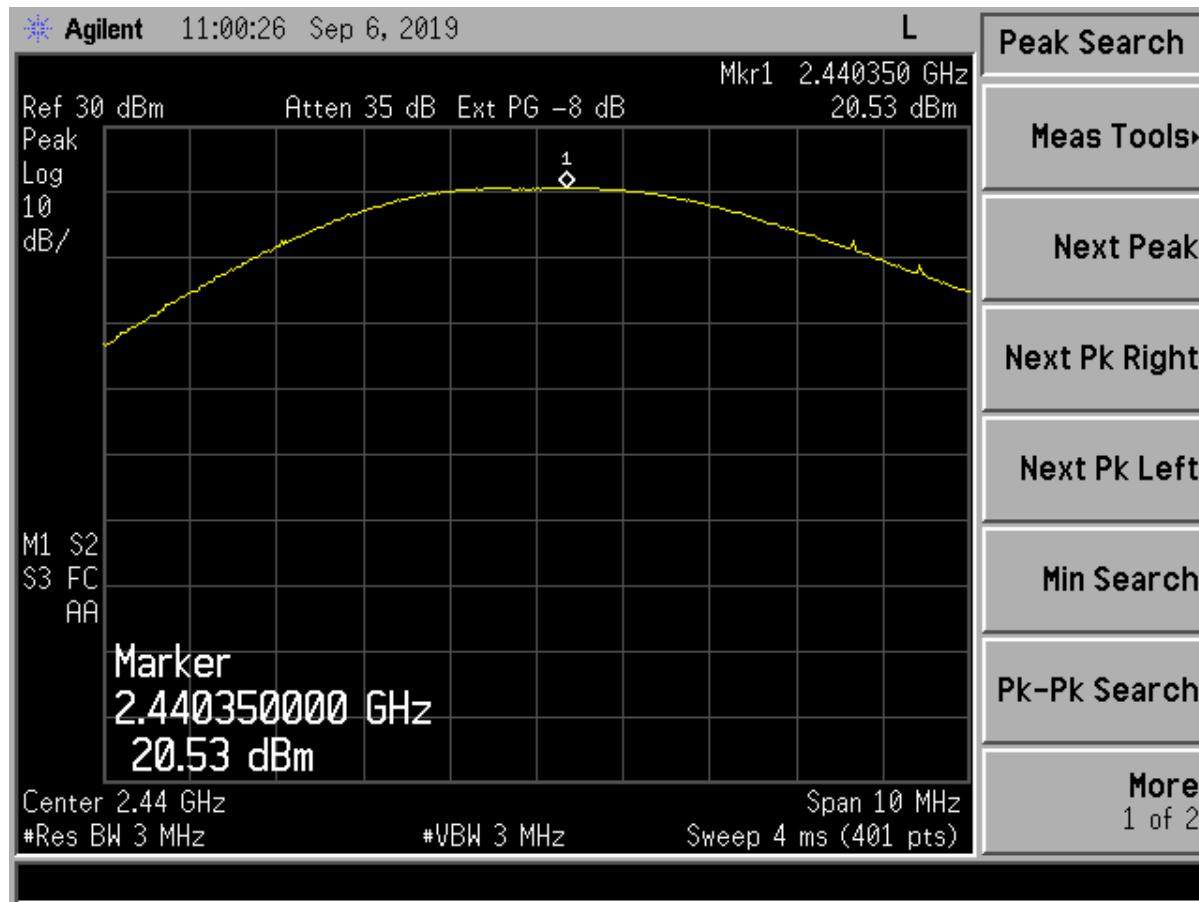


Figure 23. Peak Antenna Conducted Output Power, Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

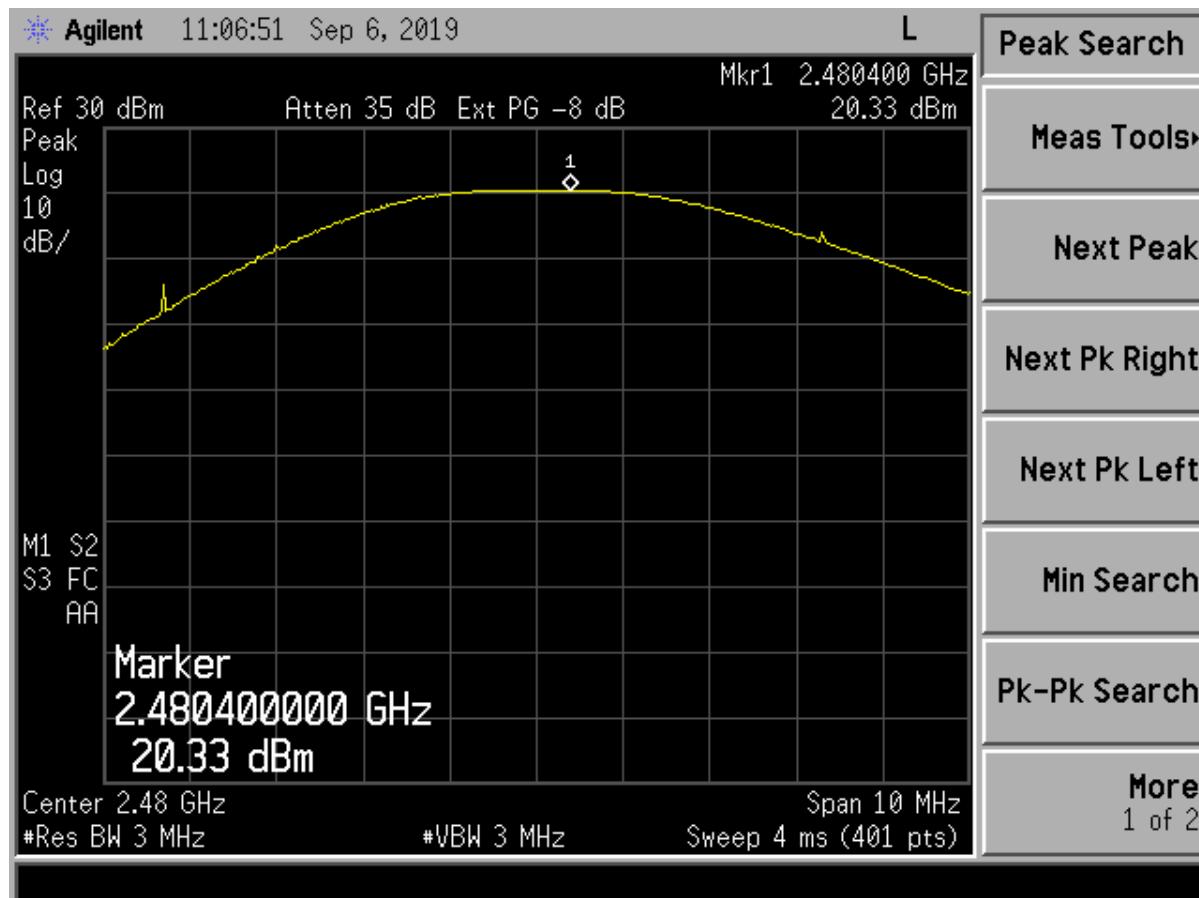


Figure 24. Peak Antenna Conducted Output Power, High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.14 Power Spectral Density (CFR 15.247(e))

The transmitter was placed into a continuous mode of operation at all applicable frequencies. The measurements were performed per the procedures of ANSI C63.10-2013. The RBW was set to 3 kHz and the Video Bandwidth was set to \geq RBW. The trace capture time was set to (Span/3 kHz).

In accordance with 15.247 (e), the power spectral density shall be no greater than +8 dBm per any 3 kHz band.

Results are shown in the table and figures below. All are less than +8 dBm per 3 kHz band.

Note: dBm/Hz correct to dBm/kHz using the following formula, $10 \log \text{RBWref/RBW measured}$.


Table 9. Power Spectral Density for Low, Mid and High Bands

Frequency (MHz)	Measured (dBm/Hz)	Results (dBm/3 kHz)	FCC Limit (dBm/3 kHz)
2405	-46.48	-11.71	+8.0
2440	-47.96	-13.19	+8.0
2480	-47.19	-12.42	+8.0

Sample calculation: $-46.48 \text{ dBm/Hz} + (10 \log (3000/1)) = -11.71 \text{ dBm/3 kHz}$

Test Date: September 10, 2019

Tested By

Signature: 

Name: Mark Afrooz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

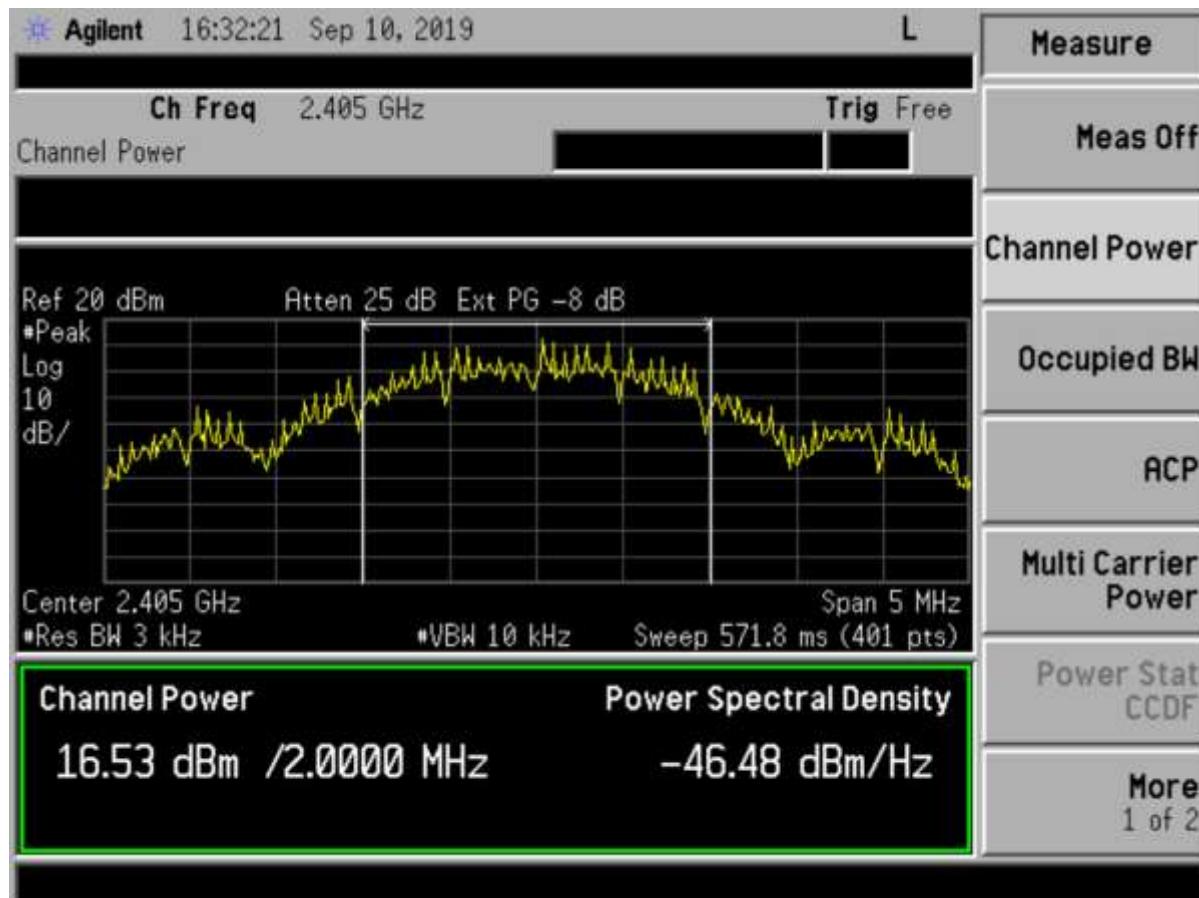


Figure 25. Peak Power Spectral Density, Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

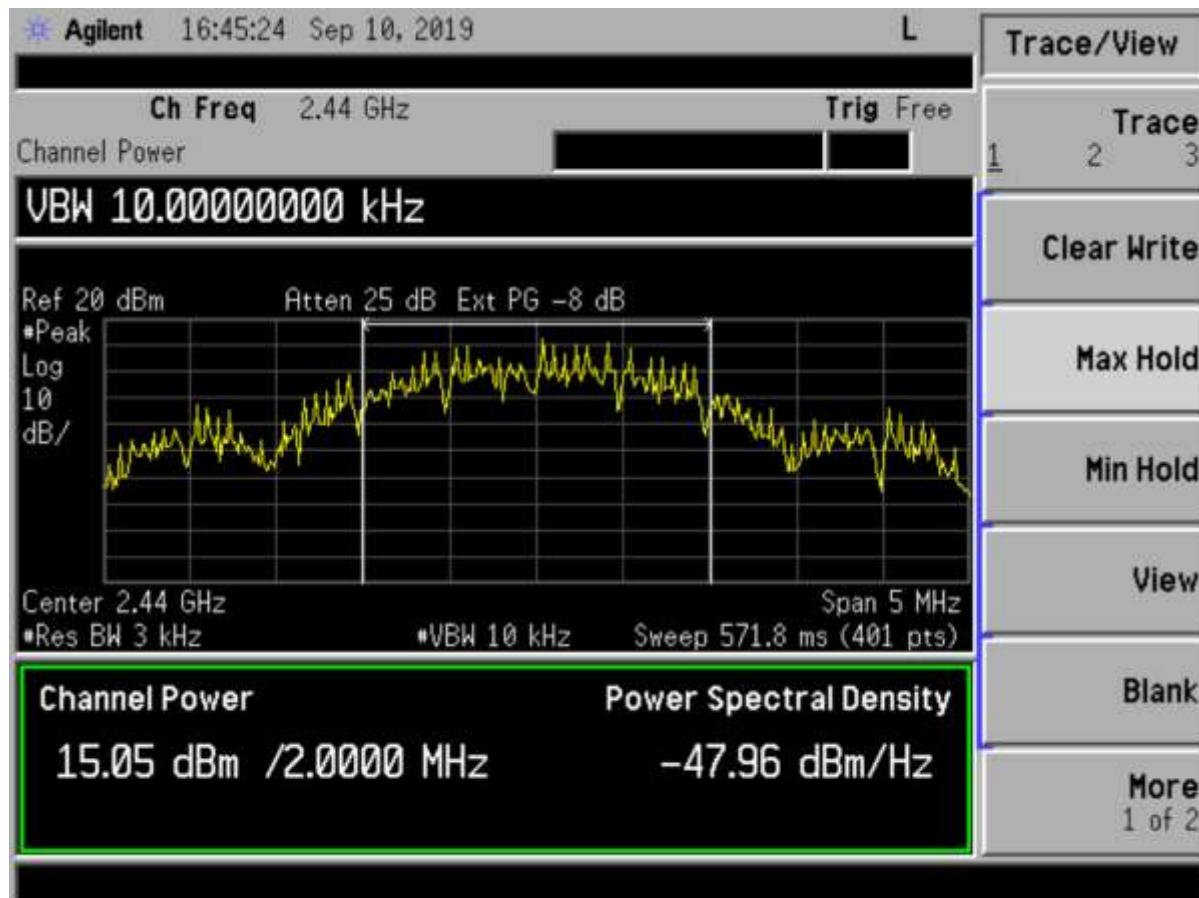


Figure 26. Peak Power Spectral Density, Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

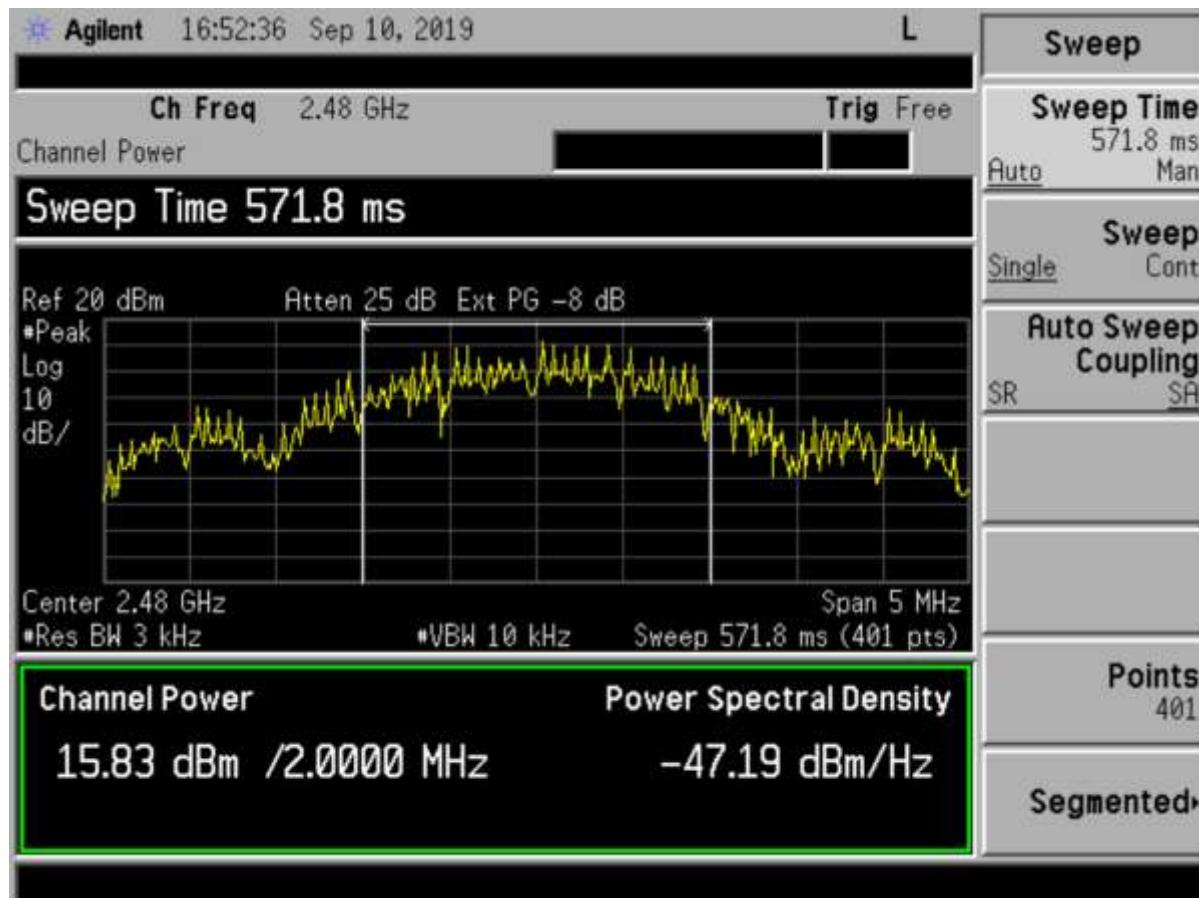


Figure 27. Peak Peak Power Spectral Density, High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUF1-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.15 Intentional Radiator Power Lines Conducted Emissions (CFR 15.207)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.207, per ANSI C63.10:2013, Clause 6.2, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmission.

The worst-case results for conducted emissions were determined to be produced when the EUT was operating under continuous transmission. The worst case measurement was 0.6 dB from the applicable limit on the Phase line at 0.5000 MHz. All other emissions were at least 0.7 dB from the limit. Those results are given in the table following.

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 2AUF1-FT-05DCH
 19-0286
 October 24, 2019
 OKYANUS TEKNOLOJİ
 FT-05DCH

Table 10. Power Line Conducted Emissions


CONDUCTED EMISSIONS 150 kHz to 30 MHz						
Tested By: MA						
Frequency (MHz)	Test Data (dBuV)	LISN+CL (dB)	Corrected Results (dBuV)	Limits (dBuV)	Margin (dB)	Detector
Phase @ 120 Vac/60Hz						
0.4554	53.40	2.69	56.09	*56.8	0.7	QP
0.4554	42.55	2.69	45.24	46.8	1.5	AVG
0.5000	52.68	2.68	55.36	*56.0	0.6	QP
0.5000	41.00	2.68	43.68	46.0	2.3	AVG
1.0900	32.24	0.86	33.10	46.0	12.9	PK
7.5130	25.53	0.32	25.85	50.0	24.2	PK
12.2000	21.49	0.74	22.23	50.0	27.8	PK
29.2800	19.48	1.83	21.31	50.0	28.7	PK
Neutral @ 120 Vac/60Hz						
0.4554	54.90	0.06	54.96	*56.8	1.8	QP
0.4554	43.60	0.06	43.66	46.8	3.1	QP
0.5013	53.67	0.05	53.72	*56.0	2.3	PK
0.5013	42.50	0.05	42.55	46.0	3.5	PK
1.1000	30.77	0.50	31.27	46.0	14.7	PK
7.5130	29.70	0.49	30.19	50.0	19.8	PK
10.0800	26.44	0.69	27.13	50.0	22.9	PK
22.2300	15.89	1.45	17.34	50.0	32.7	PK

(*) Denotes that Quasi-Peak Limits were used.

SAMPLE CALCULATION AT: 0.4554 MHz

Magnitude of Measured Frequency	53.40	dBuV
+LISN+ Cable Loss	2.69	dB
Corrected Result	56.09	dBuV/m

Test Date: July 31, 2019

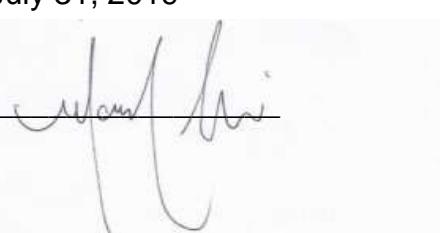Tested By
 Signature: 

Name: Mark Afroozi

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.16 Intentional Radiator, Radiated Emissions (CFR 15.209)

The test data provided herein is to support the verification requirement for radiated emissions coming from the EUT in a transmitting state per 15.109 and 15.209 and were investigated from 9kHz or the lowest operating clock frequency to 12 GHz and tested as detailed in ANSI C63.10:2013, Clause 6.4-6.6. Data is presented in the tables below.

Radiated emissions within the band of 9 kHz to 30 MHz were investigated using a calibrated loop antenna and per the requirements of ANSI C63.10:2013.

Measurements were made with the analyzer's resolution bandwidth set to 120 kHz for measurements made below 1 GHz and 1 MHz for measurements made above 1 GHz. The video bandwidth was set to three times the resolution bandwidth: 1 MHz RBW and 3 MHz VBW. The test data were maximized for magnitude by rotating the turntable 360 degrees clockwise and counterclockwise and raising and lowering the receiving antenna between 1 to 4 meters in height as a part of the measurement procedure.

The worst case configuration was determined to be the EUT set along its X plane. The test data is presented in the following paragraph.

The worst-case radiated emission was 6.1 dB below the specification limit at 54.23 MHz. All other measured signals were at least 6.9 dB below the specification limit. The results are shown in the table below. These results are meant to show that this EUT has met the intentional and unintentional transmitter requirements of CFR Part 15.209 and Part 15.109.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH


Table 11. Spurious Radiated Emissions (9 kHz – 30 MHz)

Test By: MA	Test: FCC Part 15.209			Client: Okyanus Teknoloji			
	Project: 19-0286			Model: FT-05DCH			
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
All emissions were more than 20 dB below the applicable limit.							

SAMPLE CALCULATION AT: N/A

Test Date: September 11, 2019

Tested By
Signature:

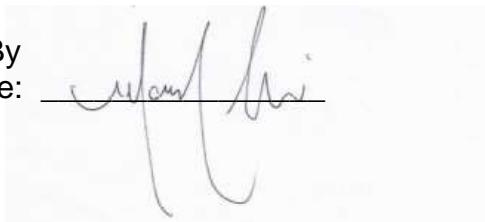

Name: Mark Afrozzi

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUF1-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

Table 12. Spurious Radiated Emissions (30 MHz – 1000 MHz)


Test By: MA	Test: FCC Part 15.209				Client: Okyanus Teknoloji		
	Project: 19-0286				Model: FT-05DCH		
Frequency (MHz)	Test Data (dBuV)	AF+CL- PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
54.23	49.00	-16.12	32.88	39.0	3m./VERT	6.1	PK
80.15	41.15	-17.50	23.65	39.0	3m./VERT	15.4	PK
97.15	53.53	-16.94	36.59	43.5	3m./VERT	6.9	PK
128.60	46.56	-14.63	31.93	43.5	3m./VERT	11.6	PK
97.15	47.40	-16.94	30.46	43.5	3m./HORZ	13.0	PK
54.23	36.65	-16.12	20.53	39.0	3m./HORZ	18.5	PK
All other emissions were more than 20 dB below the applicable limit.							

SAMPLE CALCULATION AT: 54.23 MHz

Magnitude of Measured Frequency	49.00	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-16.12	dB
Corrected Result	32.88	dBuV/m

Test Date: September 11, 2019

Tested By

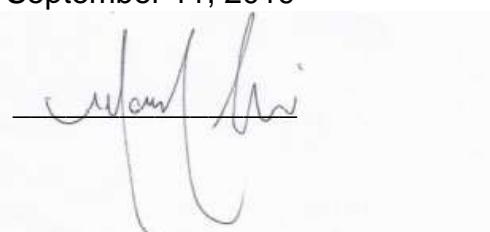Signature: 

Name: Mark Afrooz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:


FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

Table 13. Spurious Radiated Emissions (> 1 GHz)

Test By: MA	Test: FCC Part 15.209				Client: Okyanus Teknoloji		
	Project: 19-0286				Model: FT-05DCH		
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
All emissions were more than 20 dB BELOW the applicable limit.							

Test Date: August 2, 2019

Tested By
Signature:

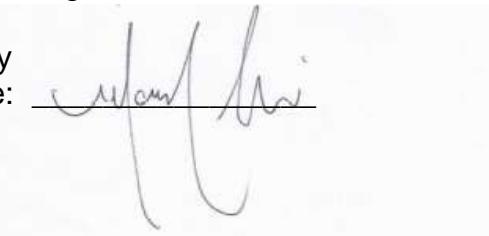

Name: Mark Afroozi

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
2AUFI-FT-05DCH
19-0286
October 24, 2019
OKYANUS TEKNOLOJİ
FT-05DCH

2.17 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2:2011. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.17.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.78 dB.

2.17.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.3 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.1 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.1 dB.

3 Conclusions

The EUT is deemed to have met the requirements of the standards cited within the test report when tested as detailed in the present test report.