

*Testing Tomorrow's Technology*

**Application  
For**

**Title 47 USC, Part 2, Subpart J, Paragraph 2.902, Equipment Authorization of  
Verification for an Unintentional Radiator per Part 15, Subpart B, Paragraphs  
15.107 and 15.109**

**And**

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an  
Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247**

**For the**

**Okyanus Teknoloji Bilgisayar ve Yazilim San. Tic.**

**Model Number: MT-02DC  
(Wireless Mobile Tag)**

**FCC ID: 2AIFI-MT-02DC**

**UST Project: 19-0288**

**Issue Date: September 24, 2019**

**Total Pages: 47**

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
www.ustech-lab.com**



*Testing Tomorrow's Technology*

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Compliance Engineer – President

Date: September 23, 2019



NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
www.ustech-lab.com**

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer:

Model:

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

MT-02DC

## MEASUREMENT TECHNICAL REPORT

**COMPANY NAME:** OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC

**MODEL:** MT-02DC

**FCC ID:** 2AIFI-MT-02DC

**DATE:** September 23, 2019

This report concerns (check one): Original grant  Class II change

Equipment type: High Precision Active RFID Mobile Personnel Tag (IP54)

Transmitter Details:

2.4 GHz, IEEE 802.15.4 Radio module

Modulation: O-QPSK

Data rate: 250 kbps

Frequency band of operation: 2405 – 2480 MHz

### Summary of Test Results

FCC Rule	Description of Test	Result
15.247(b)(3)	Peak Output Power	PASS
15.247(a)(2)	6 dB Bandwidth	PASS
15.247(d)	Conducted & Radiated Spurious Emissions	PASS
15.247(e)	Power Spectral Density	PASS
15.209	Spurious Radiated Emissions	PASS
15.207	Power line Conducted Emissions	PASS

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
<b>1</b>	<b>General Information.....</b>	<b>7</b>
1.1	Purpose of this Report .....	7
1.2	Characterization of Test Sample.....	7
1.3	Product Description .....	7
1.4	Configuration of Tested System.....	8
1.5	Test Facility.....	8
1.6	Related Submittal(s)/Grant(s) .....	8
<b>2</b>	<b>Tests and Measurements.....</b>	<b>10</b>
2.1	Test Equipment.....	10
2.2	Modifications to EUT Hardware .....	11
2.3	Number of Measurements for Intentional Radiators (15.31(m)) .....	11
2.4	Frequency Range of Radiated Measurements (Part 15.33).....	12
2.4.1	Intentional Radiator .....	12
2.4.2	Unintentional Radiator.....	12
2.5	Measurement Detector Function and Bandwidth (CFR 15.35) .....	12
2.5.1	Detector Function and Associated Bandwidth .....	12
2.5.2	Corresponding Peak and Average Requirements .....	12
2.6	EUT Antenna Requirements (CFR 15.203) .....	13
2.7	Restricted Bands of Operation (Part 15.205) .....	15
2.8	Transmitter Duty Cycle (Part15.35 (c)) .....	15
2.9	Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d)).....	15
2.10	Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d)) .....	16
2.11	Band Edge Measurements – (CFR 15.247 (d)) .....	19
2.12	Six (6) dB Bandwidth per CFR 15.247(a)(2) .....	26
2.13	Maximum Peak Conducted Output Power (CFR 15.247 (b) (3)) .....	30
2.14	Power Spectral Density (CFR 15.247(e)) .....	31
2.15	Intentional Radiator Power Lines Conducted Emissions (CFR 15.207) .....	35
2.16	Intentional Radiator, Radiated Emissions (CFR 15.209) .....	37
2.17	Measurement Uncertainty .....	43
2.17.1	Conducted Emissions Measurement Uncertainty .....	43
2.17.2	Radiated Emissions Measurement Uncertainty .....	43
<b>3</b>	<b>Conclusions .....</b>	<b>43</b>

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration .....	14
Figure 2.	Band Edge Compliance – Low Channel Delta .....	20
Figure 3.	Low Channel Restricted Band – Peak .....	21
Figure 4.	Low Channel Restricted Band – Average .....	22
Figure 5.	Band Edge Compliance – High Channel Delta .....	23
Figure 6.	High Channel Restricted Band – Peak .....	24
Figure 7.	High Channel Restricted Band – Average .....	25
Figure 8.	6 dB Bandwidth Low Channel .....	27
Figure 9.	6 dB Bandwidth Mid Channel .....	28
Figure 10.	6 dB Bandwidth High Channel .....	29
Figure 11.	Power Spectral Density, Low Channel .....	32
Figure 12.	Power Spectral Density, Mid Channel .....	33
Figure 13.	Power Spectral Density, High Channel .....	34
Figure 14.	Radiated Emissions Graphical Data, TX, 30-1000 MHz - Horizontal .....	40
Figure 15.	Radiated Emissions Graphical Data, TX, 30-1000 MHz – Vertical .....	40
Figure 16.	Radiated Emissions Graphical Data, TX, 1 -18GHz - Horizontal .....	42
Figure 17.	Radiated Emissions Graphical Data, TX, 1 -18GHz – Vertical .....	42

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

### List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	9
Table 2.	Test Instruments .....	10
Table 3.	Number of Test Frequencies for Intentional Radiators.....	11
Table 4.	Allowed Antenna(s) .....	13
Table 5.	Peak Radiated Fundamental & Harmonic Emissions.....	17
Table 6.	Average Radiated Fundamental & Harmonic Emissions .....	18
Table 7.	Six (6) dB Bandwidth .....	26
Table 8.	Peak Antenna Conducted Output Power per Part 15.247 (b)(3) .....	30
Table 9.	Power Spectral Density for Low, Mid and High Bands .....	31
Table 10.	Power Line Conducted Emissions .....	36
Table 11.	Spurious Radiated Emissions – (150 KHz-30MHz).....	38
Table 12.	Spurious Radiated Emissions Below 1 GHz .....	39
Table 13.	Spurious Radiated Emissions Above 1 GHz.....	41

### List of Attachments

FCC Agency Agreement  
FCC Application Forms  
Letter of Confidentiality  
Equipment Label(s)  
Block Diagram(s)  
Schematic(s)  
Test Configuration Photographs  
External Photographs  
Internal Photographs  
Theory of Operation  
RF Exposure

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## 1 General Information

### 1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to FCC Rules and Regulations Part 15, Section 247.

### 1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on July 25, 2019 in good operating condition.

### 1.3 Product Description

The Equipment Under Test (EUT) is the Okyanus Teknoloji Bilgisayar ve Yazılım San. Tic. Model MT-02DC mobile tag. The EUT is a member of the Wipelot solution family. Mobiles send signals to the high precision readers within the system to find the distance between mobile and readers. Also, Mobiles sends signals to all fixed readers to transmit emergency situations on the Mobiles.

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model: FCC Part 15 Certification  
2AUF1-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

---

## 1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for the intentional radiator aspect of the device and *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for the unintentional radiator aspect of the device as well as FCC subpart B and C of Part 15 and per FCC KDB Publication number 558074 v05 for Digital Transmission Systems Operating Under section 15.247.

Digital RF conducted and radiated emissions data below 1 GHz were taken with the measuring receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements performed above 1.0 GHz were made with a RBW of 1 MHz. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was set to 3 times the RBW or as required per the standard throughout the evaluation process.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are provided in separate Appendices.

## 1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 0004. This site has been fully described and registered with the FCC. Its designation number is US5301. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

## 1.6 Related Submittal(s)/Grant(s)

The EUT is subject to the following FCC Equipment Authorizations:

- a) Certification of the transmitter incorporated within the EUT; see test data presented herein.
- b) Verification as a class B digital device.

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer:

Model:

FCC Part 15 Certification

2AUFI-MT-02DC

19-0288

September 23, 2019

OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

MT-02DC

**Table 1. EUT and Peripherals**

MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/IC ID	CABLES P/D
EUT Okyanus Teknoloji Bilgisayar Ve Yazılım San.Tic.	MT-02DC	Engineering Sample	2AUFI-MT-02DC	--
Antenna See antenna details	--	--	--	--

S= Shielded, U= Unshielded, P= Power, D= Data

US Tech Test Report:	FCC Part 15 Certification
FCC ID:	2AUF1-MT-02DC
Test Report Number:	19-0288
Issue Date:	September 23, 2019
Customer:	OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.
Model:	MT-02DC

## 2 Tests and Measurements

### 2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are included herein.

**Table 2. Test Instruments**

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	8/17/2020 2 yr.
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	10/25/2019
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT-PACKARD	1937A02980	5/7/2020
PREAMP 1.0 GHz to 26.0 GHz	8449B	HEWLETT-PACKARD	3008A00480	4/8/2020
LOOP ANTENNA	6502	EMCO	9810-3246	1/22/2020 2 yr.
BICONICAL ANTENNA	3110B	EMCO	9307-1431	10/23/2019 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	2/1/2021 2 yr
HORN ANTENNA	3115	EMCO	9107-3723	11/28/2020 2 yr
HIGH PASS FILTER	H3R020G2	MICROWAVE CHIRCUITS	001DC9528	4/2/2020
LISN x 2	9247-50-TS-50-N	SOLAR ELECTRONICS	955824 and 955825	4/3/2020

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

(\*)= used for power line conducted emissions testing

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## 2.2 Modifications to EUT Hardware

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 15.247 requirements.

## 2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated, with the device operating at the number of frequencies in each band specified in the Table below.

**Table 3. Number of Test Frequencies for Intentional Radiators**

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates over 2.4 GHz to 2.4835 GHz, 3 test frequencies were used.

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## 2.4 Frequency Range of Radiated Measurements (Part 15.33)

### 2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

### 2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to the range specified in 2.4.1 above, whichever is the higher range of investigation.

## 2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

### 2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

### 2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

## 2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

**Table 4. Allowed Antenna(s)**

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB <sub>i</sub>	TYPE OF CONNECTOR
PCB Antenna	Okyanus Teknoloji Bilgisayar Ve Yazilim San. Tic.	Meander Trace Antenna	Trace Antenna	1.6	SMA (Male)

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC



**Figure 1. Block Diagram of Test Configuration**

Note: for intentional radiated emissions testing above 1 GHz, foam blocks were used to elevate the EUT to a height of 1.5m above the ground plane.

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## **2.7 Restricted Bands of Operation (Part 15.205)**

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other Spurious are examined for this requirement see paragraph 2.10.

## **2.8 Transmitter Duty Cycle (Part15.35 (c))**

The EUT employs pulse transmission however for testing purpose the EUT was programmed to transmit at a rate >98%. The pulse transmission requirements of this subpart were acknowledge and considered during testing.

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may also be expressed logarithmically in dB.

## **2.9 Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d))**

The EUT did not have a conducted antenna port. Therefore conducted radio spurious emissions were not performed. Radiated spurious emissions were performed. The test data is presented in clause 2.10 and 2.16 below.

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AUF1-MT-02DC

19-0288

September 23, 2019

## 2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d))

On the test site, the EUT was placed on top of a non-conductive table, 80 cm above the floor for measurements below 1 GHz and 150 cm above the floor for measurements > 1 GHz. The EUT was also evaluated in three orthogonal positions to determine the worst case position. The front of the EUT faced the measurement antenna located 3 meters away. Each signal measured was maximized by raising and lowering the receive antenna between 1 and 4 meters in height while monitoring the ever changing spectrum analyzer display (with channel A in the Clear-Write Mode and channel B in the Max-Hold Mode) for the largest signal visible. That exact antenna height where the signal was maximized was recorded for reproducibility purposes. Also, the EUT was rotated about its Y-axis while monitoring the Spectrum Analyzer display for maximum. The EUT azimuth was recorded for reproducibility purposes. The EUT was measured when both maxima were simultaneously satisfied.

For radiated measurements, the EUT was set into a continuous transmission Mode. Below 1 GHz, the RBW of the measuring instrument was set equal to 120 kHz. Peak measurements above 1 GHz were measured using a RBW = 1 MHz, with a VBW  $\geq$  RBW. The results of peak radiated spurious emissions falling within restricted bands are given in Table 6 below.

For Average measurements above 1 GHz, the emissions were measured using RBW = 1 MHz and VBW = 10 Hz or the duty cycle correction factor was applied to the Peak recorded value.

US Tech Test Report:

FCC Part 15 Certification

FCC ID:

2AUF1-MT-02DC

Test Report Number:

19-0288

Issue Date:

September 23, 2019

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

**Table 5. Peak Radiated Fundamental & Harmonic Emissions**

Tested By: AF	Test: FCC Part 15.247(d)			Client: Okyanus Teknoloji Bilgisayar ve Yazılım San. Tic.				
	Project: 19-0288			Model: MT-02DC				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
<b>Low Channel- PEAK</b>								
2405.00	65.78	0.00	32.85	98.63	--	3.0m./HORZ	--	<b>PK</b>
*4810.00	54.45	0.00	6.08	60.53	74.0	3.0m./HORZ	13.5	<b>PK</b>
*7215.00	41.67	-9.50	11.07	43.24	74.0	1.0m./HORZ	30.8	<b>PK</b>
<b>Mid Channel – PEAK</b>								
2440.00	63.37	0.00	34.05	97.42	--	3.0m./HORZ	--	<b>PK</b>
*4880.00	44.37	0.00	7.30	51.67	74.0	3.0m./HORZ	22.3	<b>PK</b>
*7320.00	41.25	-9.50	16.09	47.84	74.0	1.0m./HORZ	26.2	<b>PK</b>
<b>High Channel- PEAK</b>								
2480.00	60.64	0.00	34.41	95.05	--	3.0m./HORZ	--	<b>PK</b>
*4960.00	50.85	0.00	8.75	59.60	74.0	3.0m./HORZ	14.4	<b>PK</b>
*7440.00	40.97	-9.50	15.50	46.97	74.0	1.0m./HORZ	27.0	<b>PK</b>

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. For measurements collected at 1 meter test distance an inverse extrapolation factor of -9.5 dB was added to the value to correct the value back to 3 meters.

Sample Calculation at 2405.00 MHz:

Magnitude of Measured Frequency	65.78	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	32.85	dB/m
Corrected Result	98.63	dBuV/m

Test Date: August 1, 2019

Tested By

Signature: Afzal FazalName: Afzal Fazal

US Tech Test Report:

FCC Part 15 Certification

FCC ID:

2AIFI-MT-02DC

Test Report Number:

19-0288

Issue Date:

September 23, 2019

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

**Table 6. Average Radiated Fundamental & Harmonic Emissions**

Tested By: AF	Test: FCC Part 15.247(d)			Client: Okyanus Teknoloji Bilgisayar ve Yazılım San. Tic.				
	Project: 19-0288			Model: MT-02DC				
Frequency (MHz)	Test Data (dBuV)	Additional Factor	AF+CL-PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detector
<b>Low Channel- AVERAGE</b>								
2405.00	19.84	0.00	32.85	52.69	--	3.0m./HORZ	--	<b>AVG</b>
*4810.00	25.67	0.00	6.08	31.75	54.0	3.0m./HORZ	22.3	<b>AVG</b>
*7215.00	24.52	-9.50	11.07	26.09	54.0	1.0m./HORZ	27.9	<b>AVG</b>
<b>Mid Channel – AVERAGE</b>								
2440.00	19.87	0.00	34.05	53.92	--	3.0m./HORZ	--	<b>AVG</b>
*4880.00	22.76	0.00	7.30	30.06	54.0	3.0m./HORZ	23.9	<b>AVG</b>
*7320.00	24.27	-9.50	16.09	30.86	54.0	1.0m./HORZ	23.1	<b>AVG</b>
<b>High Channel- AVERAGE</b>								
2480.00	19.86	0.00	34.41	54.37	--	3.0m./HORZ	--	<b>AVG</b>
*4960.00	25.87	0.00	8.75	34.62	54.0	3.0m./HORZ	19.4	<b>AVG</b>
*7440.00	23.92	-9.50	15.50	29.92	54.0	1.0m./HORZ	24.1	<b>AVG</b>

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209& 15.247.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. For measurements collected at 1 meter test distance an inverse extrapolation factor of -9.5 dB was added to the value to correct the value back to 3 meters.

Sample Calculation at 2405.00 MHz:

Magnitude of Measured Frequency	19.84	dBuV
+Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	32.85	dB/m
Corrected Result	52.69	dBuV/m

Test Date: August 1, 2019

Tested By

Signature: Afzal FazalName: Afzal Fazal

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TIC.  
MT-02DC

## 2.11 Band Edge Measurements – (CFR 15.247 (d))

Band Edge measurements are made following the guidelines in ANSI C63.10-2013 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Radiated measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band). Because these frequencies occur above 1000 MHz they have both a peak and average requirement.

To capture the band edge set the Spectrum Analyzer frequency span large enough (usually around 10 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation.

The screen shots are presented below.


Test Date: August 1, 2019

Tested By

Signature:



Name: Afzal Fazal

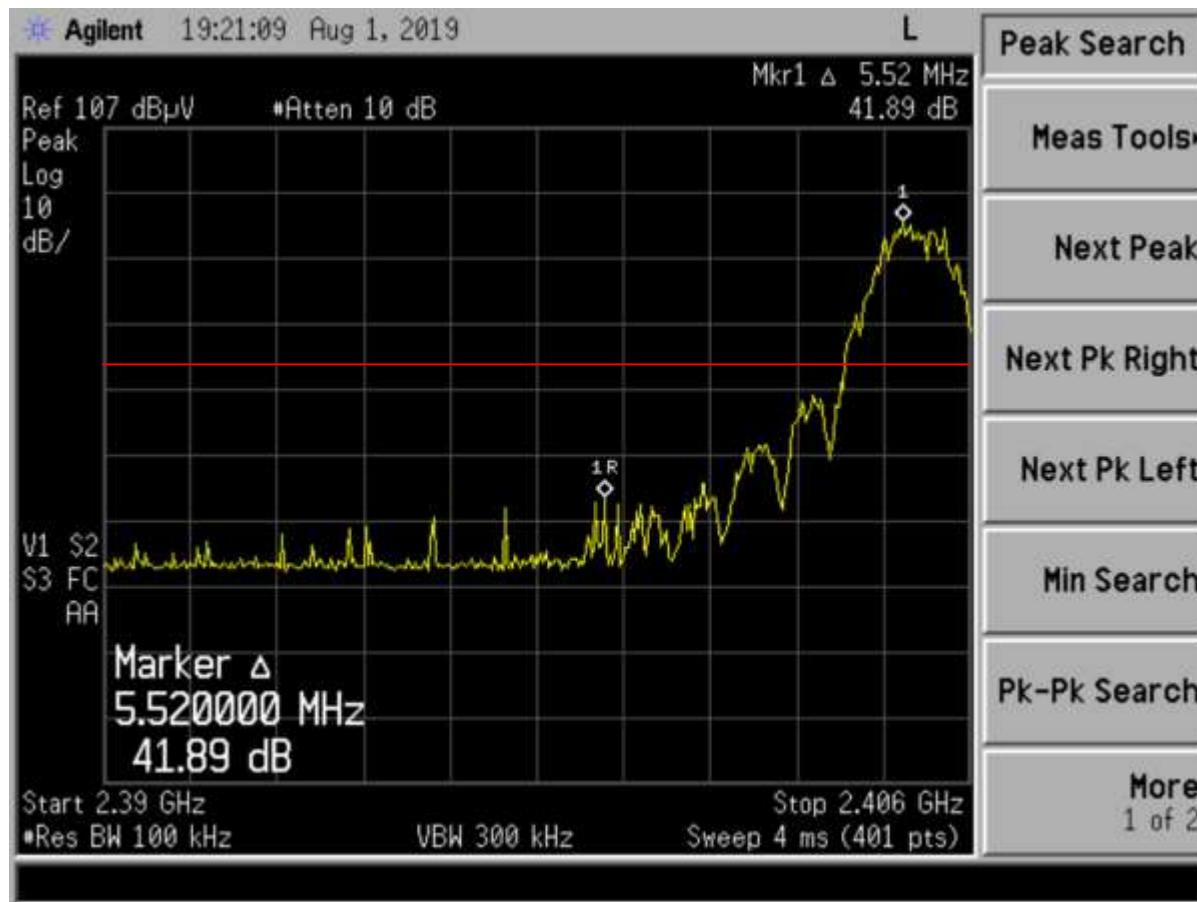

**Figure 2. Band Edge Compliance – Low Channel Delta**

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	41.89	dB
<u>Band Edge Limit</u>	20.00	dB
Band Edge Margin	21.89	dB

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

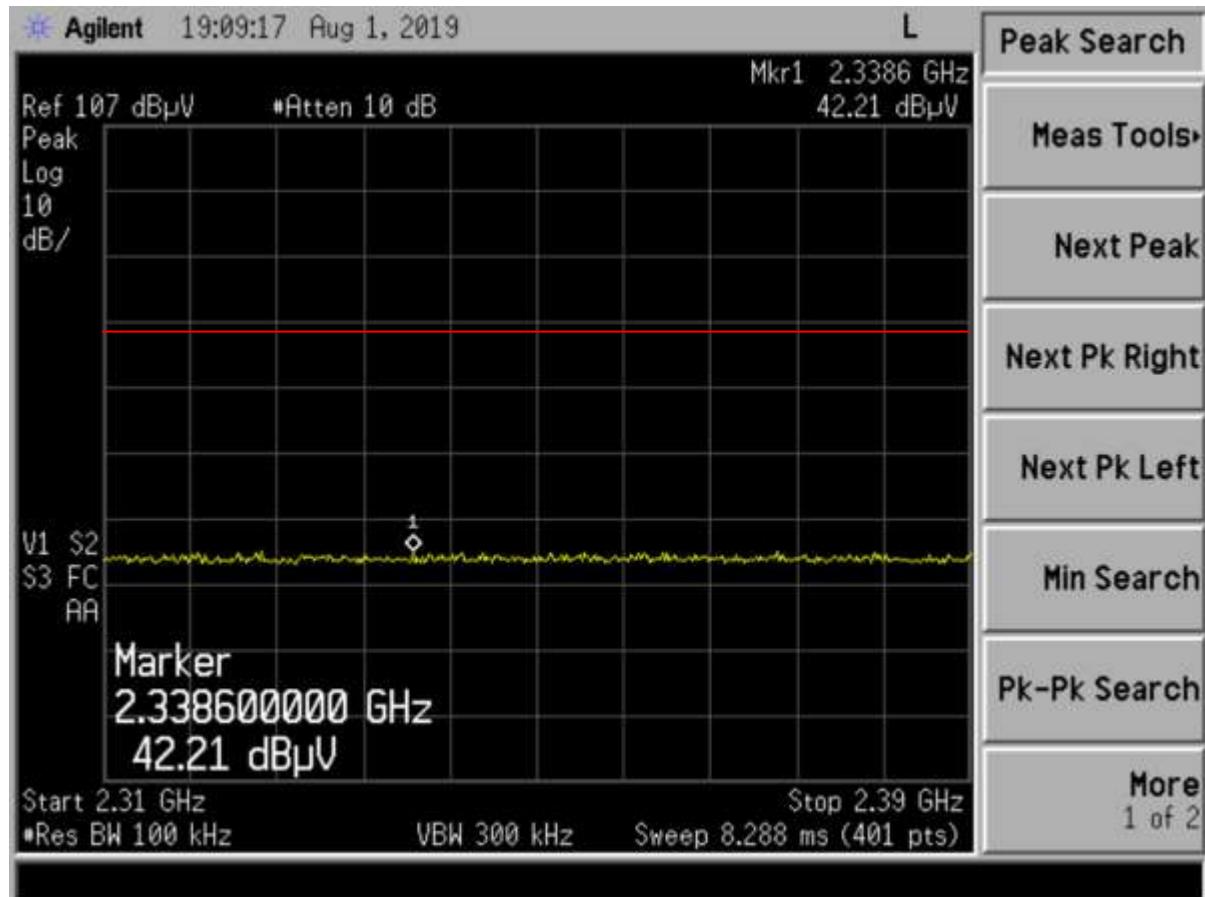


Figure 3. Low Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dB $\mu$ V)	AF+CA-AMP+DC (dB/m)	Results (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2338.60	42.21	-2.67	39.54	74.0	3.0m./HORZ	34.5	PK

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

MT-02DC

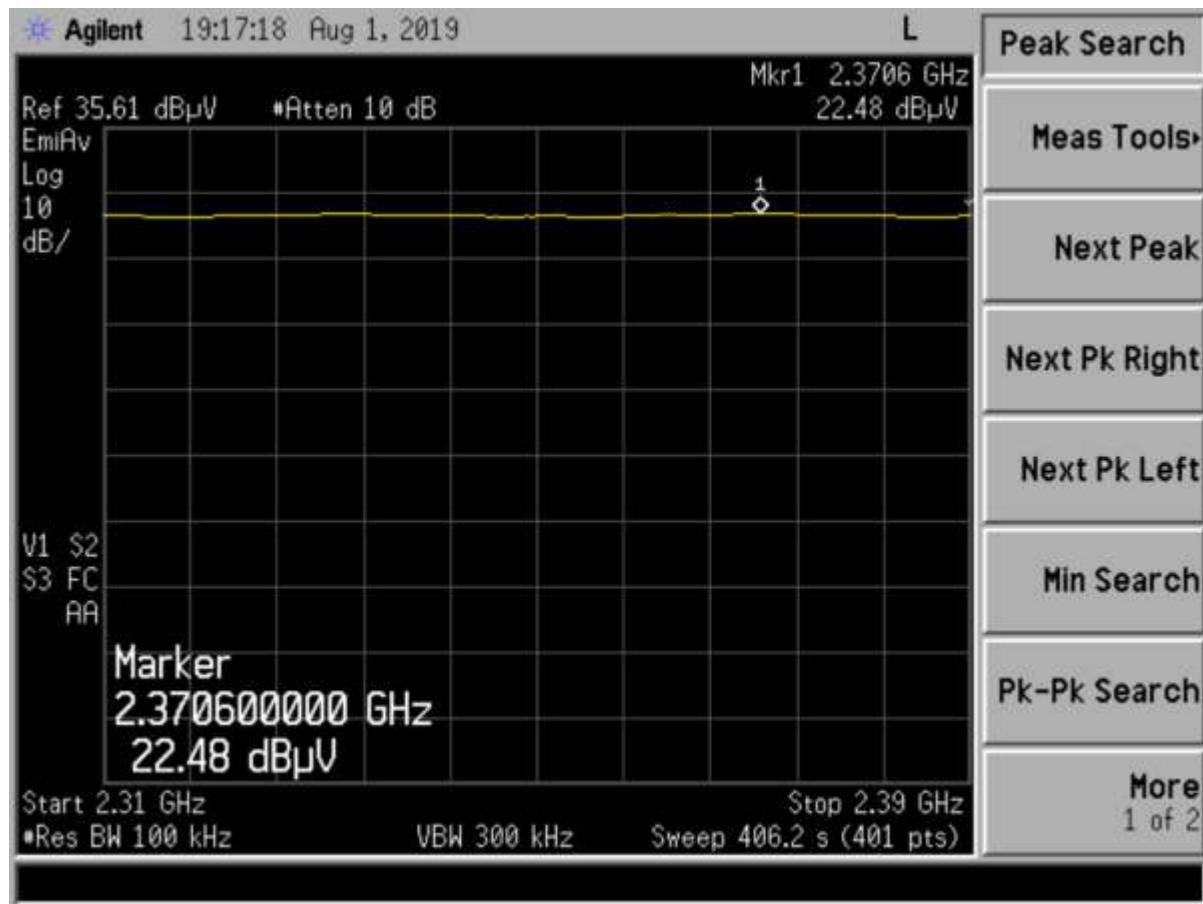


Figure 4. Low Channel Restricted Band – Average

Frequency (MHz)	Test Data (dB <sub>u</sub> V)	AF+CA-AMP+DC (dB/m)	Results (dB <sub>u</sub> V/m)	Limits (dB <sub>u</sub> V/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2370.60	22.48	-2.95	18.53	54.0	3.0m./HORZ	34.5	AVG



**Figure 5. Band Edge Compliance – High Channel Delta**

Lower band edge must be 20 dB below the fundamental. This requirement is met.

Measured Result	47.03	dB
<u>Band Edge Limit</u>	20.00	dB
Band Edge Margin	27.03	dB

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

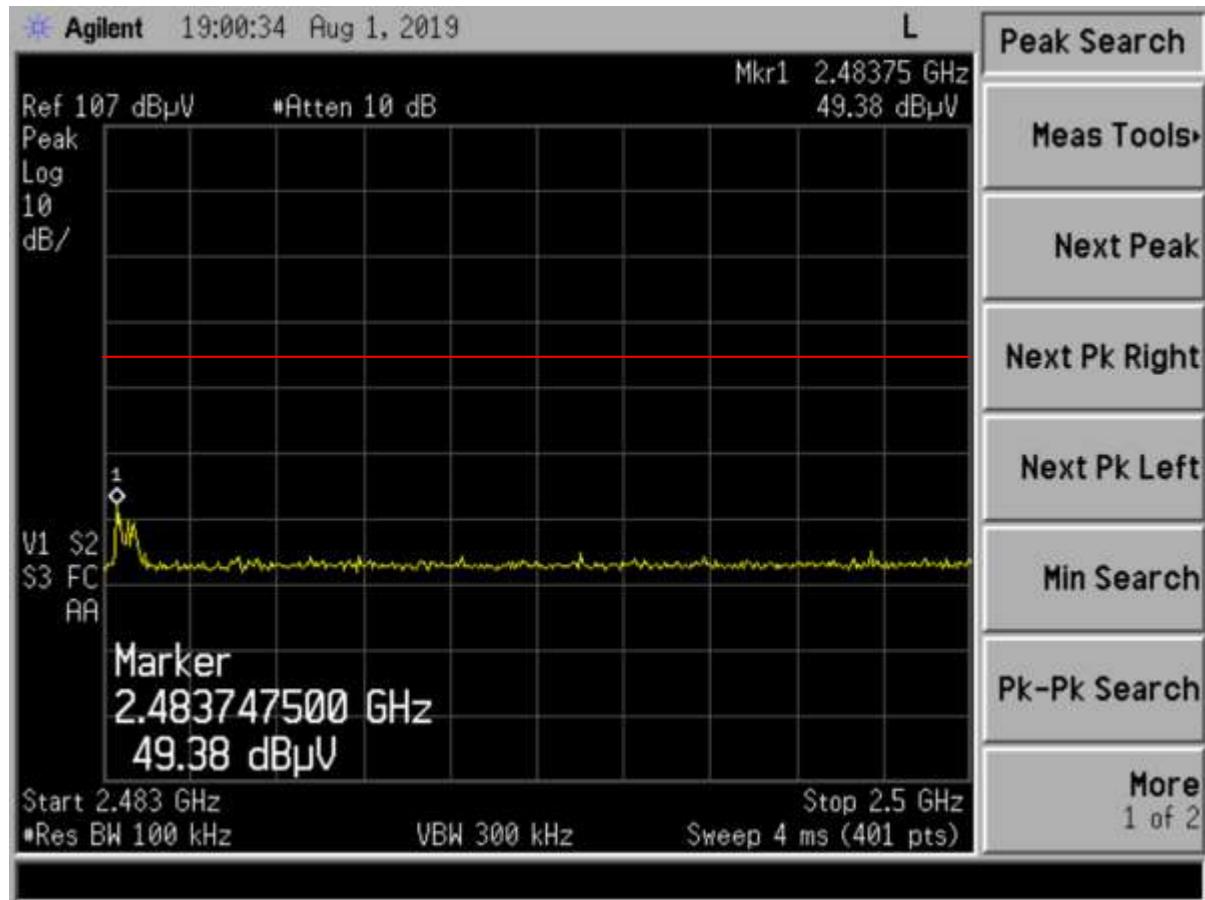


Figure 6. High Channel Restricted Band – Peak

Frequency (MHz)	Test Data (dB $\mu$ V)	AF+CA-AMP+DC (dB/m)	Results (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2483.75	49.38	-1.66	47.72	74.0	3.0m./HORZ	26.3	PK

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

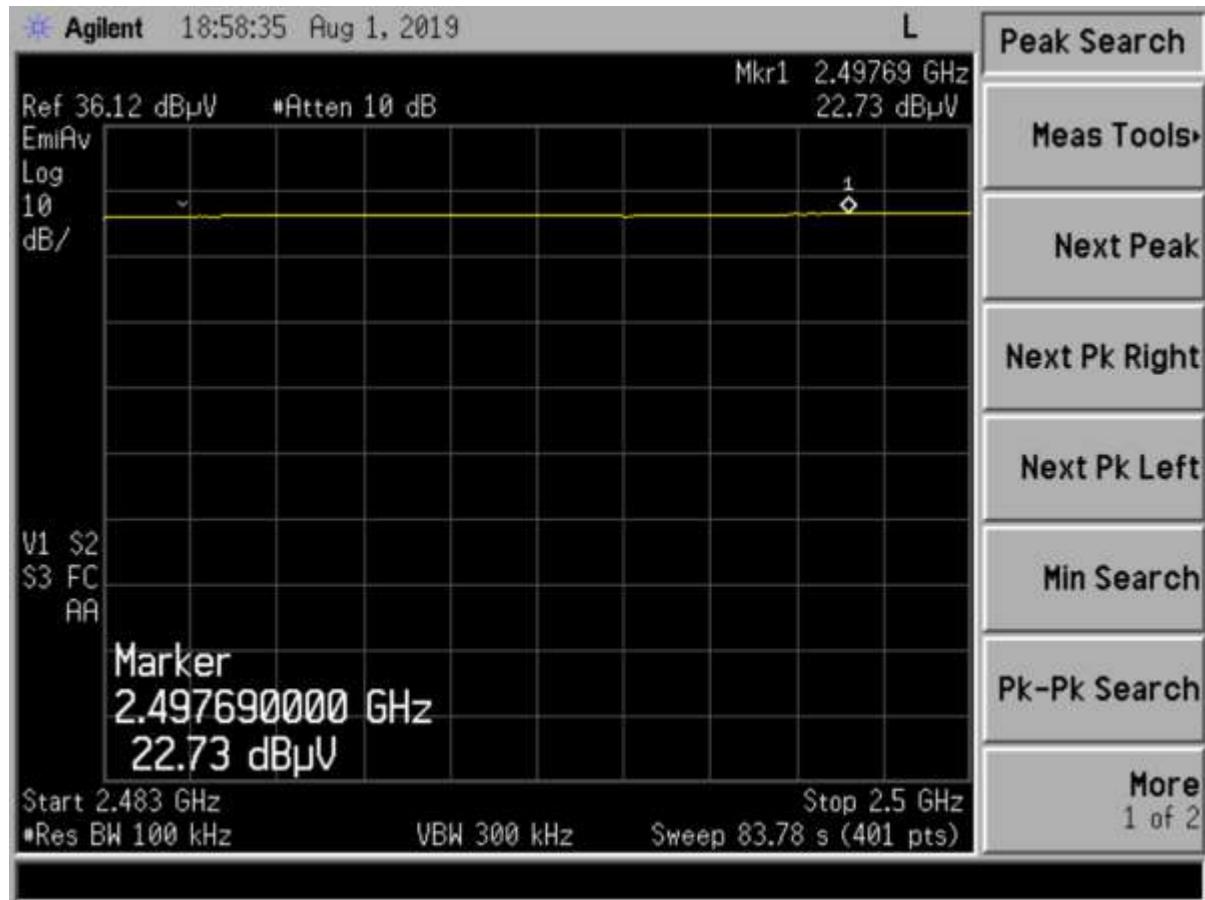


Figure 7. High Channel Restricted Band – Average

Frequency (MHz)	Test Data (dB <sub>u</sub> V)	AF+CA-AMP+DC (dB/m)	Results (dB <sub>u</sub> V/m)	Limits (dB <sub>u</sub> V/m)	Distance / Polarization	Margin (dB)	Detector PK/QP/AVG
2497.69	22.73	-1.66	21.07	54.0	3.0m./HORZ	32.9	AVG

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer:

Model:

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

MT-02DC

## 2.12 Six (6) dB Bandwidth per CFR 15.247(a)(2)

The EUT antenna port was connected to a spectrum analyzer having a  $50 \Omega$  input impedance. Measurements were performed per ANSI C63.10-2013, clause 11.8. The RBW was set to 100 kHz and the  $VBW \geq RBW$ . The results of this test are given in the table below and figures below.

**Table 7. Six (6) dB Bandwidth**

Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum FCC Bandwidth (MHz)
2405	1.274	0.5
2440	1.347	0.5
2480	1.522	0.5

Test Date: August 5, 2019

Tested By

Signature: Afzal Fazal

Name: Afzal Fazal

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer:

Model:

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

MT-02DC



Figure 8. 6 dB Bandwidth Low Channel

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer:

Model:

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

MT-02DC



Figure 9. 6 dB Bandwidth Mid Channel

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer:

Model:

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

MT-02DC

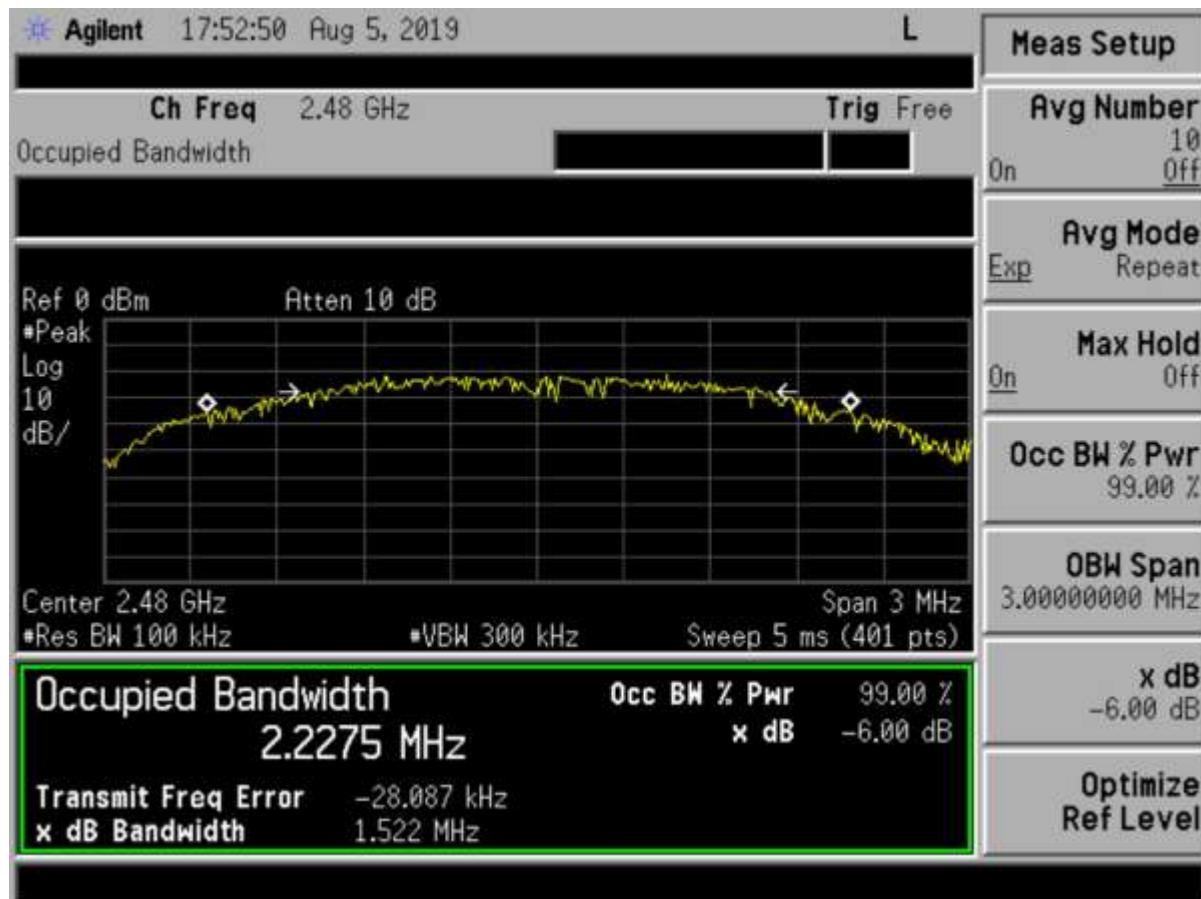


Figure 10. 6 dB Bandwidth High Channel

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## 2.13 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))

Peak power within the band 2400 MHz to 2483.5 MHz was measured per ANSI C63.10-2013 as an Antenna Conducted test with a spectrum analyzer by connecting the spectrum analyzer directly, via a short RF cable, and attenuators to the antenna output terminals on the EUT. The spectrum analyzer was set to a RBW of 1 MHz, and the VBW  $\geq$  RBW. The integration method was used. Peak antenna conducted output power is tabulated in the table below.

**Table 8. Peak Antenna Conducted Output Power per Part 15.247 (b)(3)**

Frequency of Fundamental (MHz)	Raw Test Data dBuV/m from Table 5	Converted Data (dBm)	FCC Limit dBm
2405	98.63	3.37	30.0
2440	97.42	2.16	30.0
2480	95.05	-0.21	30.0

EIRP (dBm)= E(dBuV/m) + 20 log (D) – 104.8; where D = 3 meter test distance

Test Date: August 1, 2019

Tested By

Signature: Afzal Fazal

Name: Afzal Fazal

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TIC.  
MT-02DC

## 2.14 Power Spectral Density (CFR 15.247(e))

The transmitter was placed into a continuous Mode of operation at all applicable frequencies. The measurements were performed per the procedures of ANSI C63.10-2013. The RBW was set to 3 kHz and the Video Bandwidth was set to  $\geq$  RBW. The trace capture time was set to (Span/3 kHz).

In accordance with 15.247 (e), the power spectral density shall be no greater than +8 dBm per any 3 kHz band.

Results are shown in the table below and figures below. All are less than +8 dBm per 3 kHz band.

Note: dBm/Hz correct to dBm/kHz using the following formula,  $10 \log \text{RBWref}/\text{RBWmeasured}$ .

**Table 9. Power Spectral Density for Low, Mid and High Bands**

Frequency (MHz)	Results (dBm/kHz)	FCC Limit (dBm/3 kHz)
2405	-72.25	+8.0
2440	-75.27	+8.0
2480	-78.63	+8.0

Sample Calculation:  $-107.02 \text{ dB/Hz} + (10 \log (3000/1)) = -72.25 \text{ dB/3kHz}$

Test Date: September 13, 2019

Tested By

Signature: Afzal Fazal

Name: Afzal Fazal

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer:

Model:

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

MT-02DC

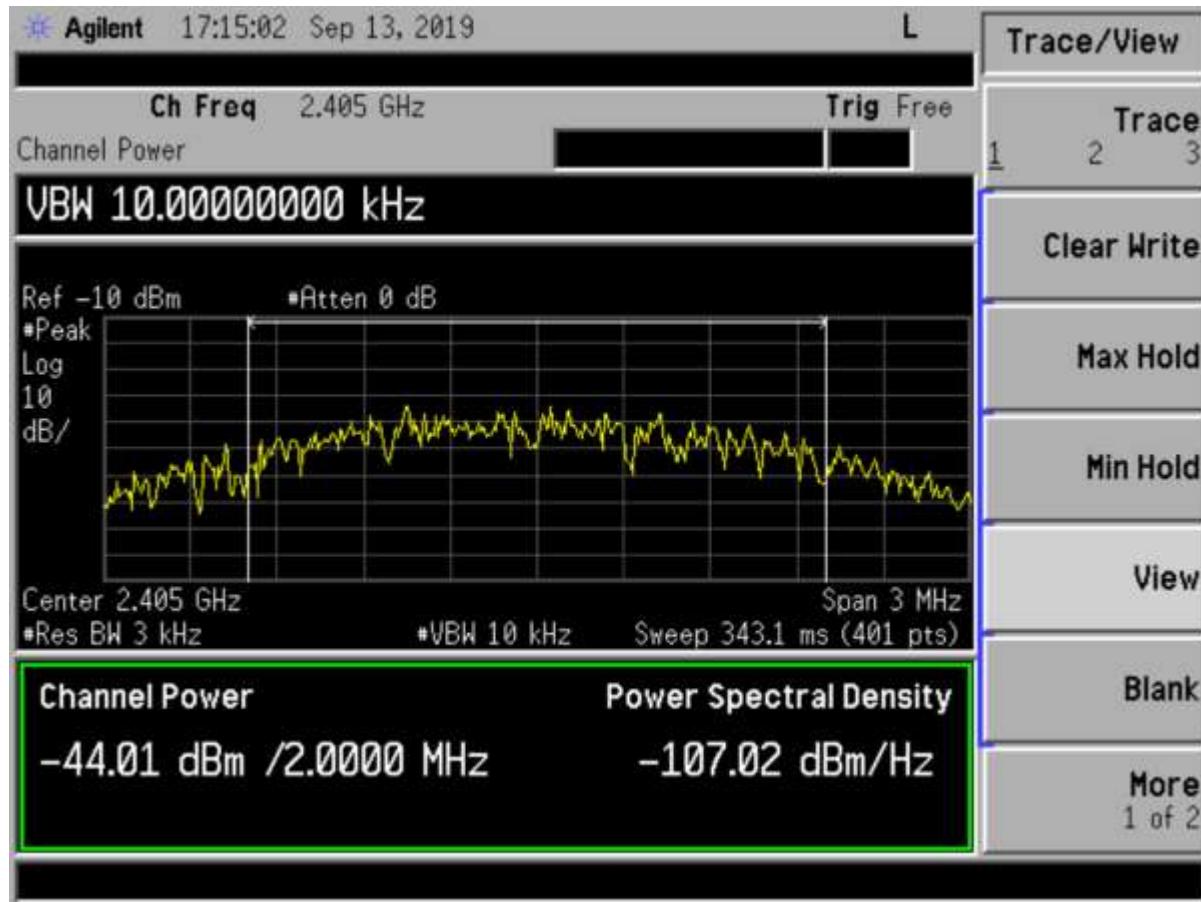


Figure 11. Power Spectral Density, Low Channel

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

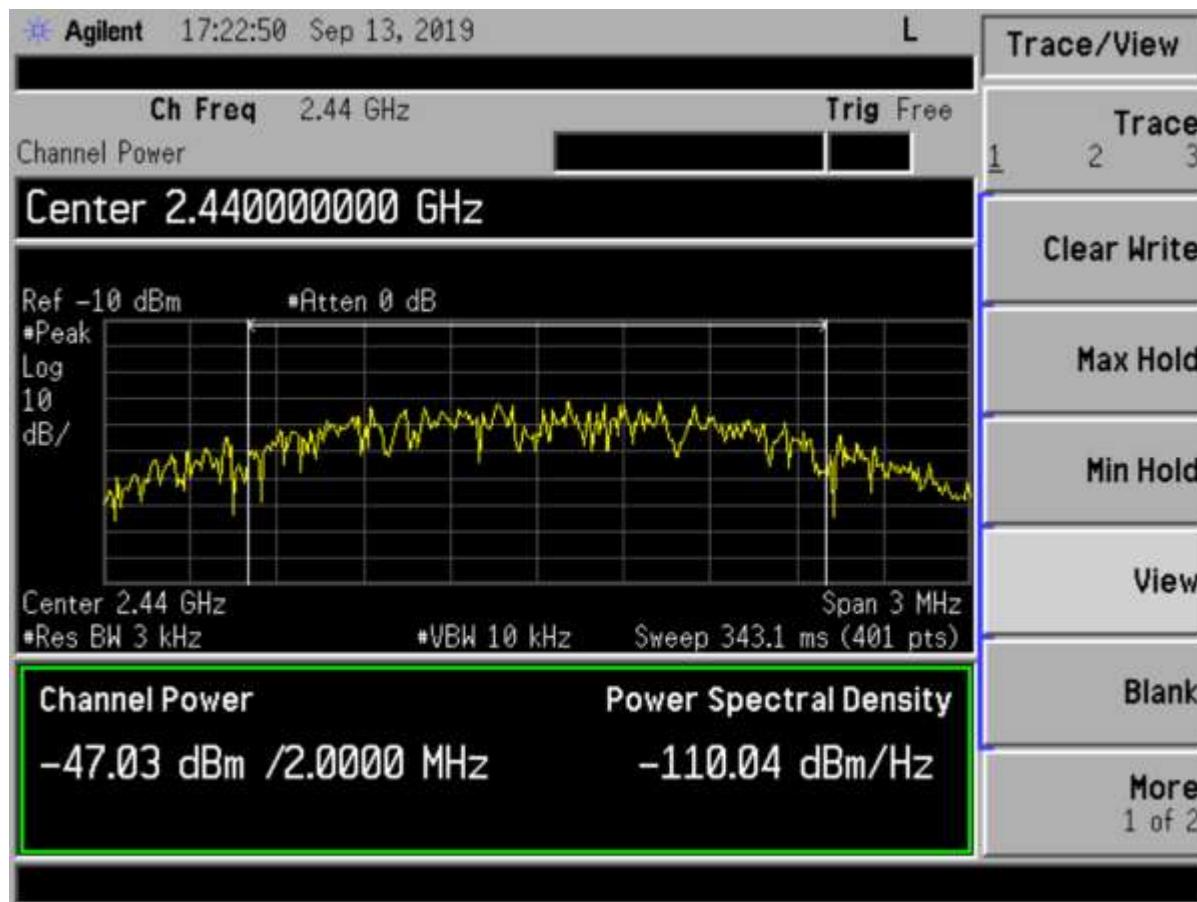


Figure 12. Power Spectral Density, Mid Channel

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

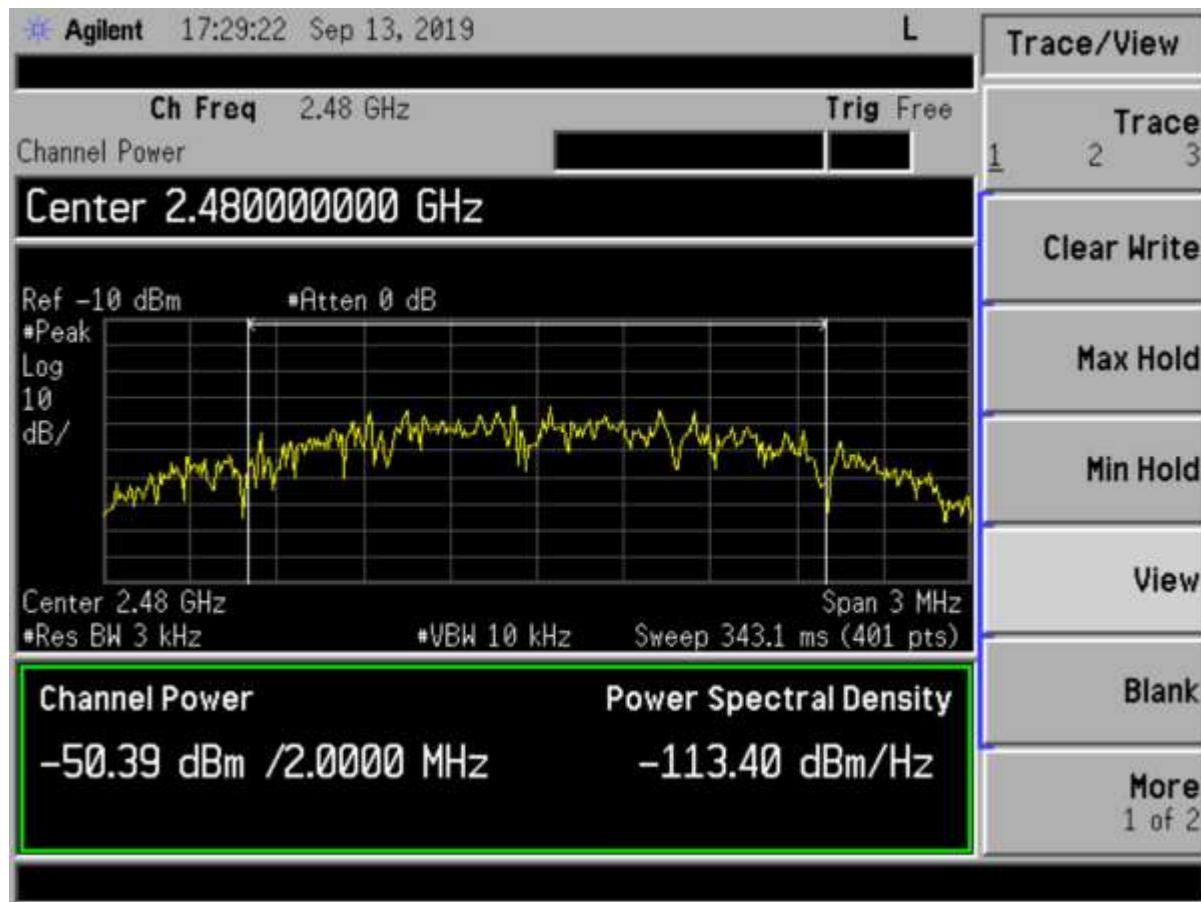


Figure 13. Power Spectral Density, High Channel

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

## 2.15 Intentional Radiator Power Lines Conducted Emissions (CFR 15.207)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.207, per ANSI C63.10:2013, Clause 6.2, with a spectrum analyzer connected to an LISN and the EUT placed into a continuous Mode of transmission.

The worst-case result for conducted emissions was 9.2 dB below the specification limit at 0.1605 MHz on NEUTRAL. All other measured signals were at least 9.6 dB below the specification limit. Those results are given in the table below.

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

**Table 10. Power Line Conducted Emissions**

<b>CONDUCTED EMISSIONS 150 kHz to 30 MHz</b>						
Tested By: AF	Specification Requirement: FCC Part 15.207		Project No.: 19-0288	Manufacturer: Okyanus Teknoloji Biligisayar ve Yazilim San. Tic. Model: MT-02DC		
Frequency (MHz)	Test Data (dBuV)	LISN+CL (dB)	Corrected Results (dBuV)	Limits (dBuV)	Margin (dB)	Detector
<b>Phase @ 120VAC/60Hz</b>						
0.1510	45.83	0.50	46.33	55.9	9.6	PK
0.7925	31.46	0.14	31.60	46.0	14.4	PK
1.0100	31.23	0.13	31.36	46.0	14.6	PK
5.1750	29.98	0.24	30.22	50.0	19.8	PK
10.9500	29.79	0.44	30.23	50.0	19.8	PK
25.2200	31.94	0.75	32.69	50.0	17.3	PK
<b>Neutral @ 120VAC/60Hz</b>						
0.1605	45.86	0.41	46.27	55.4	9.2	PK
0.9250	26.74	0.13	26.87	46.0	19.1	PK
1.9200	26.31	0.16	26.47	46.0	19.5	PK
9.6250	27.23	0.33	27.56	50.0	22.4	PK
11.8800	27.86	0.42	28.28	50.0	21.7	PK
25.3200	26.01	0.77	26.78	50.0	23.2	PK

Test Date: August 16, 2019

Tested By

Signature:



Name: Afzal Fazal

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AUF1-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## 2.16 Intentional Radiator, Radiated Emissions (CFR 15.209)

The test data provided herein is to support the verification requirement for radiated emissions coming for the EUT in a transmitting state per 15.209 and were investigated from 9kHz or the lowest operating clock frequency to 25 GHz and tested as detailed in ANSI C63.10:2013, Clause 6.4-6.6. Data is presented in the table below.

Radiated emissions within the band of 9 kHz to 30 MHz were investigated using a calibrated Loop Antenna and per the requirements of ANSI C63.10:2013.

Measurements were made with the analyzer's resolution bandwidth set to 120 kHz for measurements made below 1 GHz and 1 MHz for measurements made above 1 GHz. The video bandwidth was set to three times the resolution bandwidth; 1 MHz RBW and 3 MHz VBW. The test data were maximized for magnitude by rotating the turn-table through 360 degrees and raising and lowering the receiving antenna between 1 to 4 meters in height as a part of the measurement procedure.

The measurements were taken at the transmitter set to the mid channel.

The worst-case radiated emission was 12.8 dB below the specification limit at 187.07 MHz. All other measured signals were at least 13.0 dB below the specification limit. The results are shown in the table below. These results are meant to show that this EUT has met the intentional transmitter requirements of CFR Part 15.209.

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

**Table 11. Spurious Radiated Emissions – (150 KHz-30MHz)**

Test By: AF	Test: FCC Part 15.209			Client: Okyanus Teknoloji Bilgisayar ve Yazılım San Tic			
	Project: 19-0288 Class B			Model: MT-02DC			
Frequency (MHz)	Test Data (dBuV)	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
All emissions were at more than 20 dB below the applicable limit.							

No other emissions detected other than those presented in this table and the tables in section 2.10 above.

AF is antenna factor. CL is cable loss. PA is preamplifier gain.

SAMPLE CALCULATION: N/A

Test Date: August 2, 2019

Tested By

Signature:



Name: Afzal Fazal

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

**Table 12. Spurious Radiated Emissions Below 1 GHz**

Test By: AF	Test: FCC Part 15.109/15.209				Client: Okyanus Teknoloji Bilgisayarlar ve Yazılım San. Tic.			
	Project: 19-0288 Class B				Model: MT-02DC			
Frequency (MHz)	Test Data (dBuV)	Additional Factors	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
<b>Tested from 30 MHz to 1 GHz</b>								
176.75	42.22	-	-13.64	28.58	43.5	3m./HORZ	14.9	PK
187.07	42.05	-	-11.33	30.72	43.5	3m./VERT	12.8	PK
450.00	39.72	-	-8.80	30.92	46.0	3m./HORZ	15.1	PK
450.00	40.31	-	-8.60	31.71	46.0	3m./VERT	14.3	PK
847.29	18.71	-	-1.38	17.33	46.0	3m./VERT	28.7	QP
860.32	18.54	-	-0.35	18.19	46.0	3m./HORZ	27.8	QP

AF is antenna factor. CL is cable loss. PA is preamplifier gain.

SAMPLE CALCULATION AT: 176.75 MHz

Magnitude of Measured Frequency	42.22	dBuV
Additional Factor	0.00	dB
+Antenna Factor + Cable Loss+ Amplifier Gain	-13.64	dB
Corrected Result	38.58	dBuV/m

Test Date: August 2, 2019

Tested By

Signature:



Name: Afzal Fazal

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AUFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

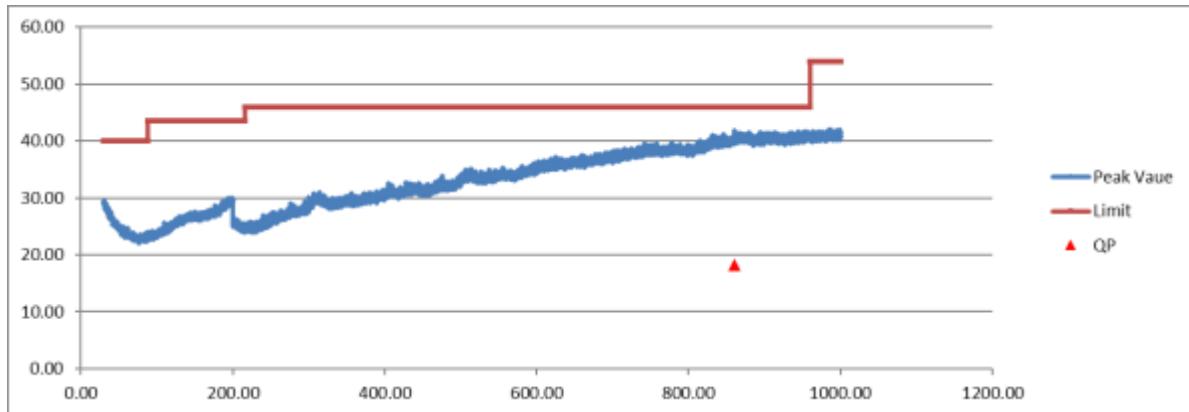


Figure 14. Radiated Emissions Graphical Data, TX, 30-1000 MHz - Horizontal

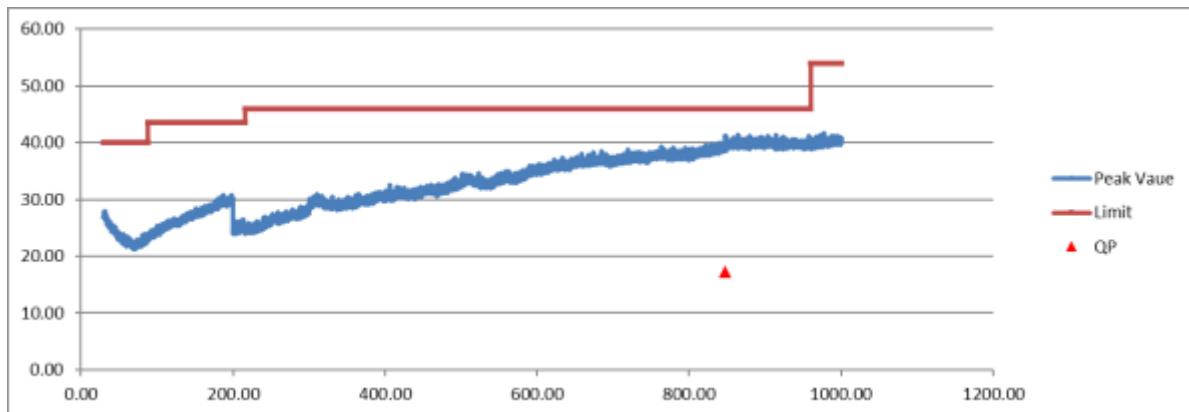


Figure 15. Radiated Emissions Graphical Data, TX, 30-1000 MHz – Vertical

US Tech Test Report:

FCC ID:

Test Report Number:

Issue Date:

Customer: OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.

Model: MT-02DC

FCC Part 15 Certification

2AIFI-MT-02DC

19-0288

September 23, 2019

**Table 13. Spurious Radiated Emissions Above 1 GHz**

Test By: AF	Test: FCC Part 15.109/15.209				Client: Okyanus Teknoloji Bilgisayar ve Yazılım San. Tic.			
	Project: 19-0288 Class B				Model: MT-02DC			
Frequency (MHz)	Test Data (dBuV)	Additional Factors	AF+CL-PA (dB)	Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	DETECTOR PK / QP/AVG
<b>Tested from 1 GHz to 25 GHz</b>								
1134.07	47.56	-	-9.12	38.44	54.0	3.0m./HORZ	15.6	PK
1482.24	48.89	-	-8.73	40.16	54.0	3.0m./VERT	13.8	PK
6813.09	42.22	-9.50	7.33	40.05	54.0	1.0m./HORZ	13.9	PK
7844.49	42.16	-9.50	8.37	41.03	54.0	1.0m./VERT	13.0	PK
13500.00	22.38	-9.50	21.33	34.21	54.0	1.0m./HORZ	19.8	AVG
13500.00	22.08	-9.50	21.53	34.11	54.0	1.0m./VERT	19.9	AVG
<b>All other emissions were more than 20 dB below the applicable limit.</b>								

AF is antenna factor. CL is cable loss. PA is preamplifier gain.

SAMPLE CALCULATION AT: 1134.07 MHz

Magnitude of Measured Frequency 47.56 dBuV

Additional Factor -0.00 dB

+Antenna Factor + Cable Loss+ Amplifier Gain -9.12 dB

Corrected Result 38.44 dBuV/m

Test Date: August 2, 2019


Tested By

Signature: Afzal Fazal

Name: Afzal Fazal


US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AIFI-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

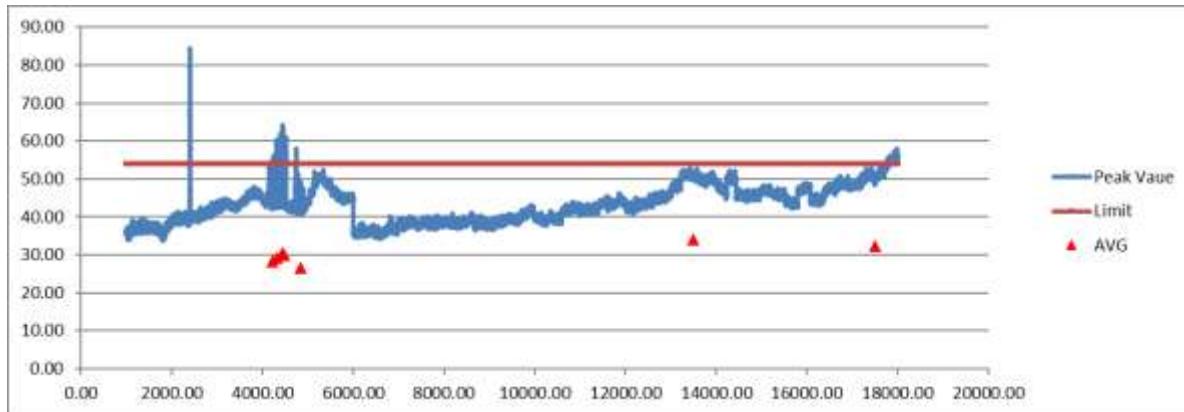

**Figure 16. Radiated Emissions Graphical Data, TX, 1 -18GHz - Horizontal**

Note: Intentional emission around 2.4 GHz is for ZigBee transmitter.

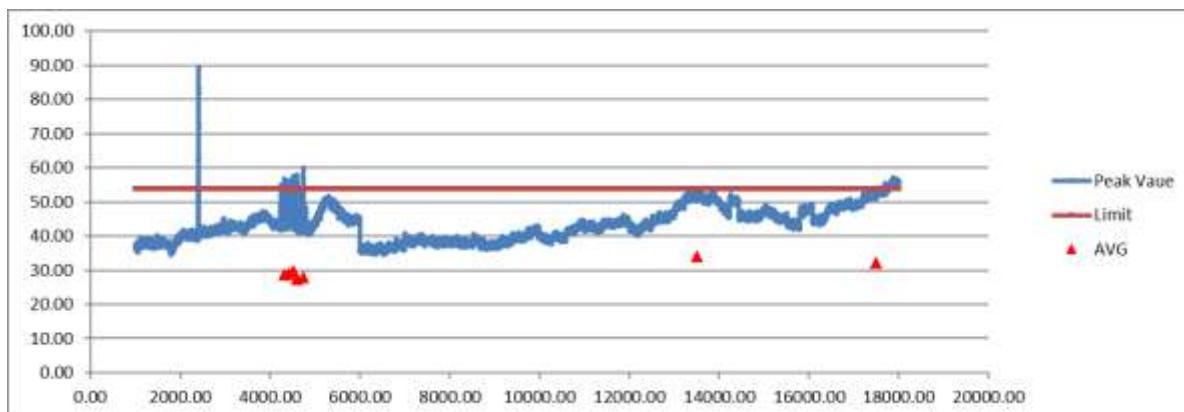

**Figure 17. Radiated Emissions Graphical Data, TX, 1 -18GHz – Vertical**

Note: Intentional emission around 2.4 GHz is for ZigBee transmitter.

US Tech Test Report:  
FCC ID:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification  
2AUF1-MT-02DC  
19-0288  
September 23, 2019  
OKYANUS TEKNOLOJİ BİLGİSAYAR VE YAZILIM SAN. TİC.  
MT-02DC

## 2.17 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2:2011. A coverage factor of  $k=2$  was used to give a level of confidence of approximately 95%.

### 2.17.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is  $\pm 2.78$  dB.

### 2.17.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is  $\pm 5.3$  dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is  $\pm 5.1$  dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is  $\pm 5.1$  dB.

## 3 Conclusions

The EUT is deemed to have met the requirements of the standards cited within the test report when tested as detailed in the present test report.