

RF TEST REPORT

FCC ID: 2AUGG-G307002

Test Report No.....: RF250707005-01-002

Product(s) Name.....: Panel PC

Model(s).....: G307-002

Trade Mark.....: GOGET.

Applicant.....: Goget AB

Address.....: Viktor Rydbergsgatan 10, 411 32 Gothenburg, Sweden

Receipt Date.....: 2025.07.14

Test Date.....: 2025.07.16~2025.08.08

Issued Date.....: 2025.08.11

Standards.....: 47 CFR FCC Part 15, Subpart E(Section 15.407);
ANSI C63.10:2013

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Jason Huang	Black Ding	Tim Zhang	
<i>Jason Huang</i>	<i>Black Ding</i>	<i>Tim Zhang</i>	

Table of Contents

History of this test report.....	4
1. General Information	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Basic Description of Equipment Under Test.....	5
2. Summary of Test Results	6
2.1 Summary of Test Items	6
2.2 Application of Standard	6
2.3 Test Instruments.....	7
2.4 Operation Mode.....	8
2.5 Test Condition	8
2.6 Duty Cycle of Test Signal	8
2.7 Measurement Uncertainty	12
2.8 Test Location	12
2.9 SUPPORT UNITS	12
3. Test Procedure And Results	13
3.1 AC Power Line Conducted Emission.....	13
3.1.1 Limit	13
3.1.2 Test Procedure	13
3.1.3 Test Setup.....	13
3.1.4 Test Result.....	14
3.2 Radiated Emission.....	18
3.2.1 Limit	18
3.2.2 Test Procedure	19
3.2.3 Test Setup.....	20
3.2.4 Test Result.....	21
3.3 Spectrum Bandwidth	69
3.3.1 Limit	69
3.3.2 Test Procedure	69
3.3.3 Test Setup.....	70

3.3.4	Test Result	71
3.4	Conducted Output Power	109
3.4.1	Limit	109
3.4.2	Test Procedure	109
3.4.3	Test Setup.....	110
3.4.4	Table of Parameters of Text Software Setting	110
3.4.5	The Result.....	111
3.5	Power Spectral Density	112
3.5.1	Limit	112
3.5.2	Test Procedure	112
3.5.3	Test Setup.....	113
3.5.4	The Result.....	114

History of this test report

Original Report Issue Date: 2025.08.11

- No additional attachment
- Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

Goget AB

Viktor Rydbergsgatan 10, 411 32 Gothenburg, Sweden

1.2 Manufacturer

Goget AB

Viktor Rydbergsgatan 10, 411 32 Gothenburg, Sweden

1.3 Basic Description of Equipment Under Test

Sample No.	POC250707005-S001	
Product name	Panel PC	
Model name	G307-002	
Trade mark	GOGET.	
Power supply	DC 12V from adapter or POE 48V	
Adapter information	Model name: MS-H2000R120-024Q0-ZZ Input: 100-240V~, 50/60Hz, 0.7A Max Output: 24.0W, 12.0V==2.0 A	
Operating Temperature	0°C-45°C	
EUT Stage	○ Product Unit	● Final-Sample
Operating Band & Max Conducted Output Power	5150MHz ~5250MHz	802.11n40: 16.82dBm(0.048W)
	5725MHz ~5850MHz	802.11ac40: 10.73dBm(0.012W)
Product Type	IEEE 802.11a/n/ac: WLAN (SISO)	
Nominal Bandwidth	20MHz / 40MHz / 80MHz	
Modulation	OFDM	
Antenna gain	5150MHz ~5250MHz: 2.14dBi; 5725MHz ~5850MHz: 2.44dBi	
Antenna type	FPC antenna	
Data Rate (Mbps)	IEEE 802.11a mode : 6/9/12/18/24/36/48/54 IEEE 802.11n mode : up to 150 IEEE 802.11ac mode : up to 433.3	

Channel Information			
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	802.11a /n /ac (20MHz)	5180-5240	36-48
5725-5850		5745-5825	149-165
5150-5250	802.11n /ac (40MHz)	5190-5230	38-46
5725-5850		5755-5795	151-159
5150-5250	802.11ac (80MHz)	5210	42
5725-5850		5775	155

2. Summary of Test Results

2.1 Summary of Test Items

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Test item	Standard	Results	Remarks
AC Power Conducted Emission	15.207 15.407(b)	Pass	Meet the requirement of the limit
Radiated Emission	15.205(a) 15.209(a) 15.407(b)	Pass	Meet the requirement of the limit
Antenna Requirements	15.203	Compliance	Note
Spectrum Bandwidth	15.407(a) 15.407(e)	Pass	Meet the requirement of the limit
Conducted Output Power	15.407(a)	Pass	Meet the requirement of the limit
Power Spectral Density	15.407(a)	Pass	Meet the requirement of the limit
Note: The EUT has one FPC antenna arrangement which was permanently attached.			

2.2 Application of Standard

47 CFR FCC Part 15, Subpart E

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10:2013

2.3 Test Instruments

Radiated Emissions							
No.	Equipment	Manufacturer	Type No.	Serial No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal. Due date (yyyy/mm/dd)
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2025/3/1	2026/2/28
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2026/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2025/3/1	2026/2/28
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2025/3/1	2026/2/28
5	Horn Antenna	SCHWARZBEC K	BBHA 9120 D	02670	JLE028	2025/4/12	2026/4/11
6	Temp&Humid ity Recorder	Meideshi	JR900	/	JLE021	2025/4/15	2026/4/14
7	Horn Antenna	SCHWARZBEC K	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	SCHWARZBEC K	FMZB15 19B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2025/3/1	2026/2/28
10	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emission							
1	MXA Signal Analyzer	Keysight	N9021B	MY60080 169	JLE050	2025/3/1	2026/2/28
2	RF Control Unit	dsusoft	JS0806-2	21G8060 449	JLE053	2025/3/1	2026/2/28
3	power supply unit	dsusoft	JS0806-4 ADC	N/A	JLE055	2025/3/1	2026/2/28
4	VXG Signal Generator	Keysight	N5182B	MY59100 855	JLE068	2025/4/15	2026/4/14
5	EXG Analog Signal Generator	Keysight	N5173B	MY59101 282	JLE052	2025/3/1	2026/2/28
6	Wideband Radio Communicati on Tester	Rohde&Schwarz	CMW500	1201.000 2K50-116 064-Dt	JLE054	2025/3/1	2026/2/28
7	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2025/3/1	2026/2/28
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2025/2/21	2026/2/20
3	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2025/3/1	2026/2/28
4	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2025/3/1	2026/2/28
5	Temp&Humid ity Recorder	Meideshi	JR900	/	JLE020	2025/4/15	2026/4/14
6	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				

2.4 Operation Mode

Transmit Operating Mode					Transmit Multiple Antennas					
☒	Operating mode 1 (single antenna)				☒	1TX				
☐	Operating mode 2 (multiple antenna, no beam forming)				☐	2TX	☐	3TX	☐	4TX
☐	Operating mode 3 (multiple antenna, with beam forming)				☐	2TX	☐	3TX	☐	4TX
☒	802.11a	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11n(20MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11n(40MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ac(20MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ac(40MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ac(80MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX

Note: All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.

2.5 Test Condition

Test Item	Environmental conditions	Input Power	Tested by
AC Power Conducted Emission	25.0°C, 52% RH	AC 120V/60Hz	Keith Huang
Radiated Emission	23.4°C, 49% RH	AC 120V/60Hz	Lemon He
Spectrum Bandwidth	23.2°C, 55% RH	DC 12V	Freedom Zhuo
Conducted Power	23.2°C, 55% RH	DC 12V	Freedom Zhuo
Power Spectral Density	23.2°C, 55% RH	DC 12V	Freedom Zhuo

Note: Adapter supply voltage AC 120V/60Hz.

The applicant declare the operating environment of EUT as below:

Normal conditions: 12V DC, 0~45°C

2.6 Duty Cycle of Test Signal

If duty cycle is $\geq 98\%$, duty factor is not required.


If duty cycle is $< 98\%$, duty factor shall be considered.

All the duty factor of other test mode have been considered.


Test Mode	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	5180	1.39	1.43	97.20
11N20	5180	1.31	1.35	97.04
11N40	5190	0.64	0.68	94.12
11AC20	5180	1.31	1.35	97.04
11AC40	5190	0.65	0.69	94.20
11AC80	5210	0.33	0.37	89.19

Test Graphs


11A_5180

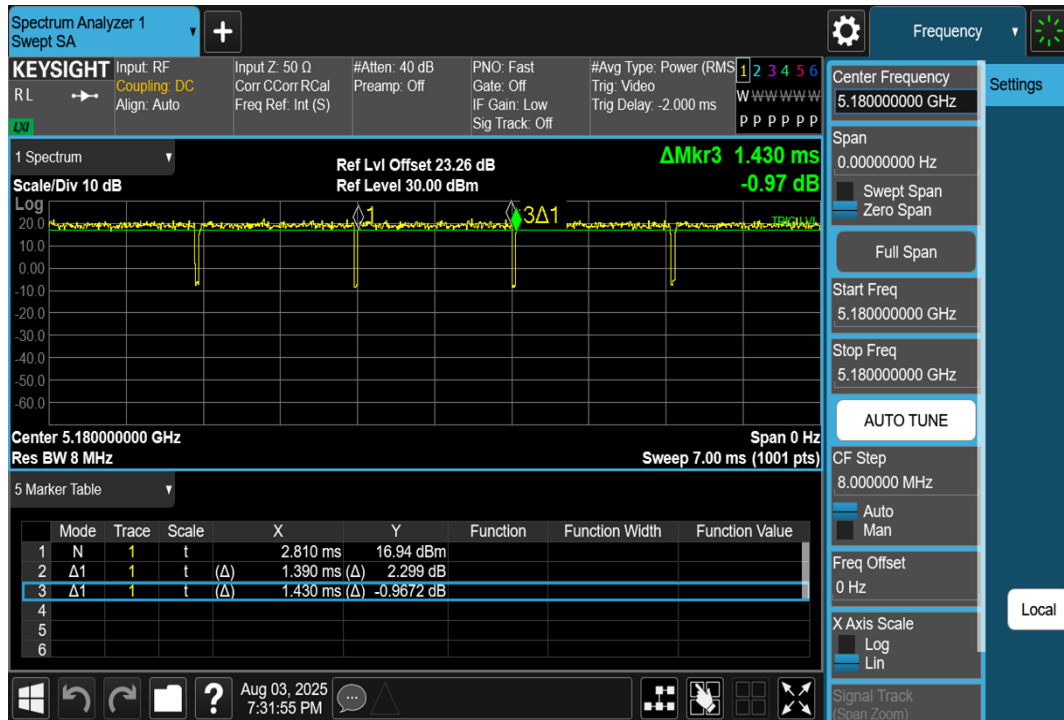


11N20_5180

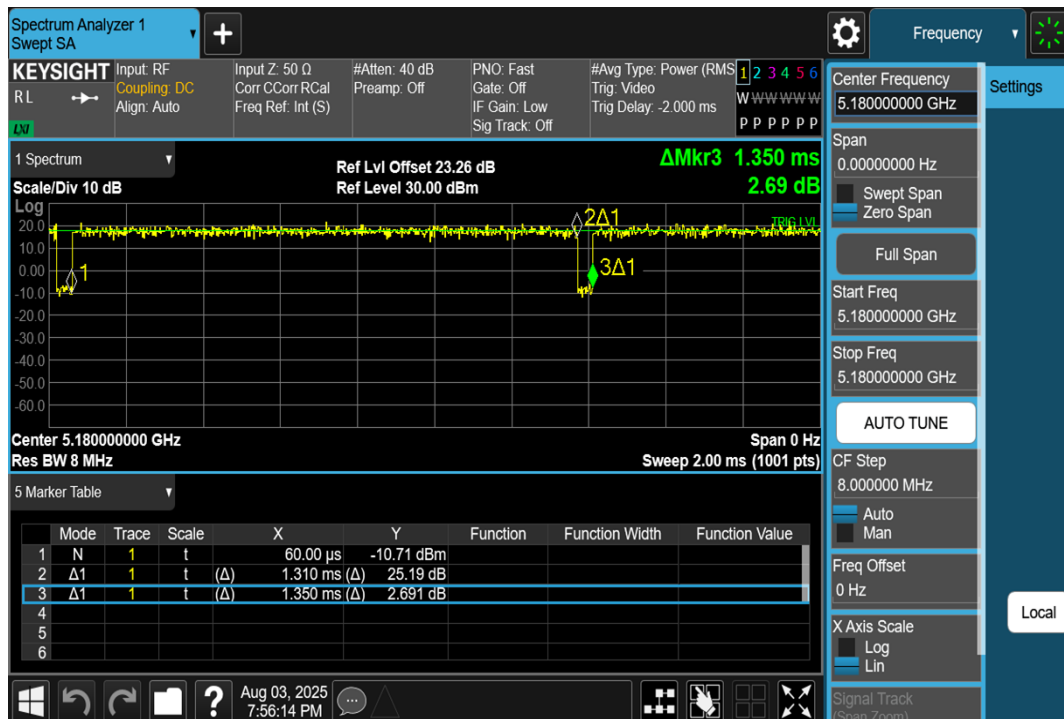


11N40_5190

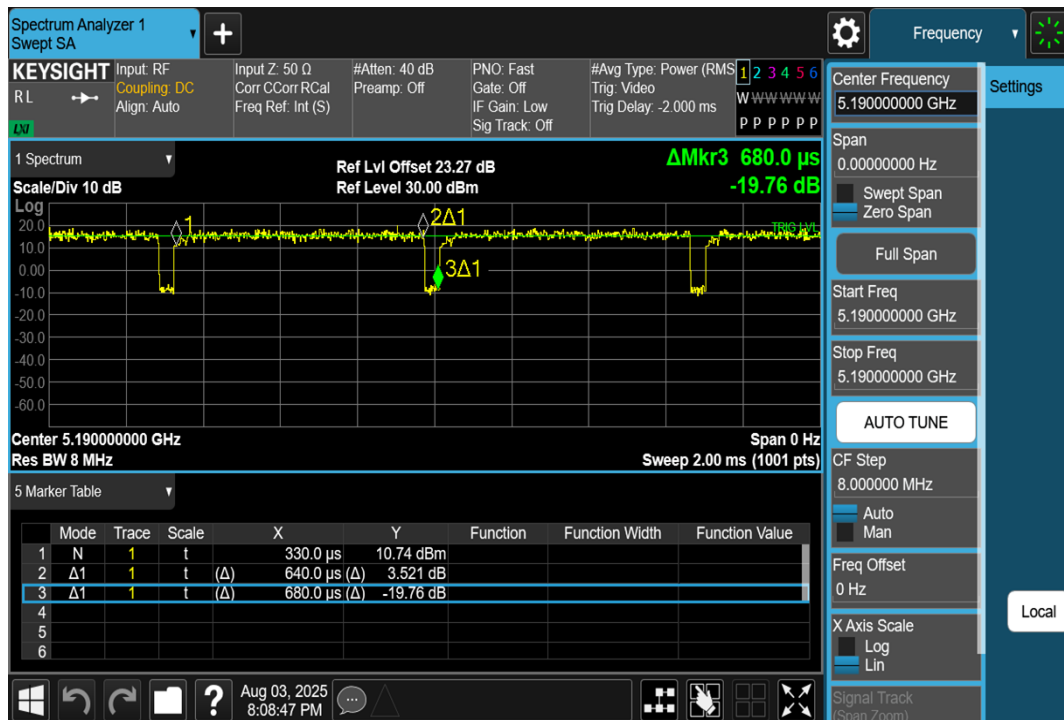


11AC20_5180

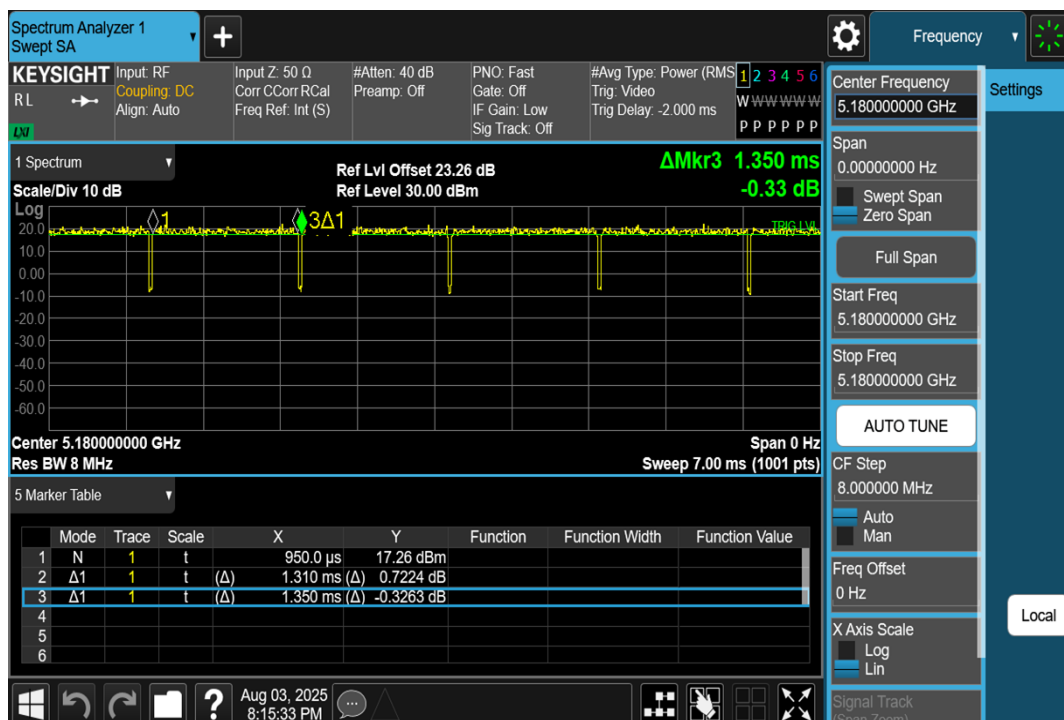

11AC40_5190

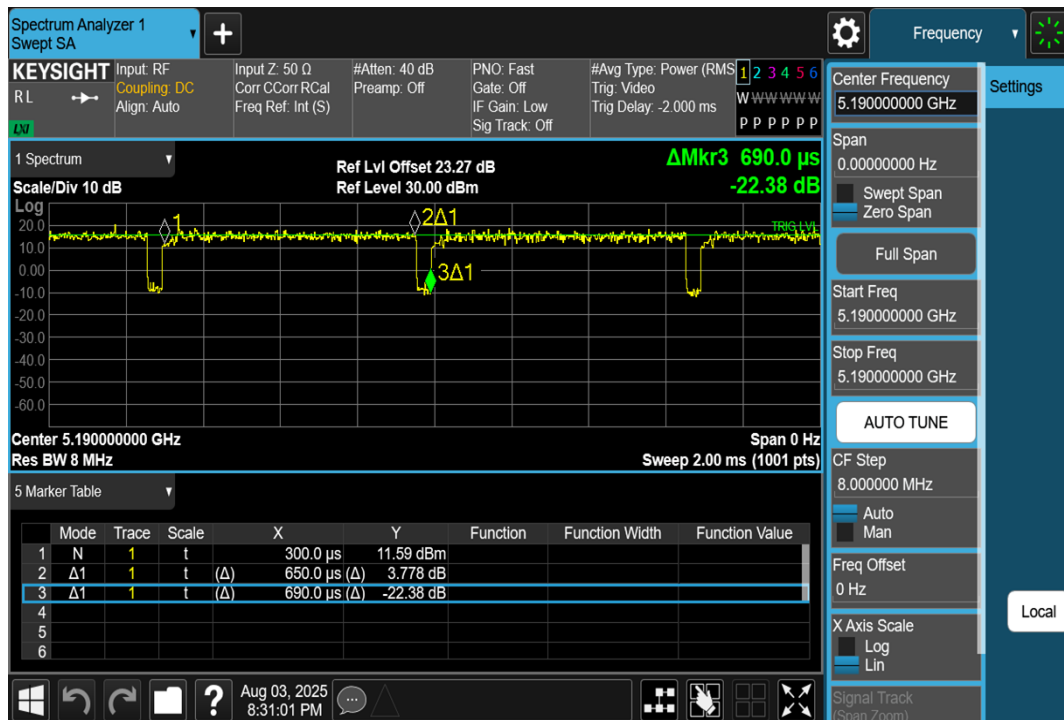

11AC80_5210

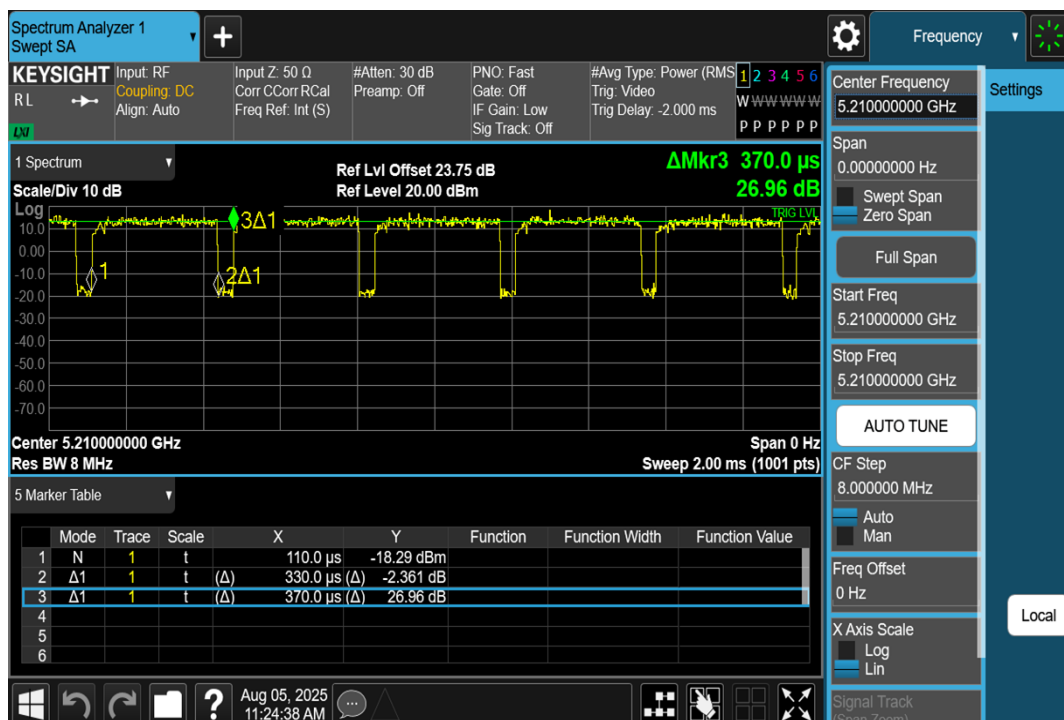

2.7 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 102\text{kHz}$
RF power conducted	$\pm 0.243\text{dB}$
Power Spectral Density	$\pm 0.743\text{dB}$
Conducted Spurious Emission	$\pm 1.328\text{dB}$
Conducted emission(9kHz~30MHz) AC main	$\pm 2.68\text{dB}$
Radiated emission(9kHz~30MHz)	$\pm 3.50\text{dB}$
Radiated emission (30MHz~1GHz)	$\pm 4.20\text{dB}$
Radiated emission (1GHz~18GHz)	$\pm 5.10\text{dB}$
Radiated emission (18GHz~40GHz)	$\pm 5.26\text{dB}$

2.8 Test Location

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier:	CN0145
A2LA Certificate Number:	6823.01
Telephone:	0755-26024411

2.9 SUPPORT UNITS

No.	Equipment	Model	Manufacturer	Series No
1	TF Card	4GB	Kingston	/
2	USB disk	32GB	Kingston	/
3	Earphone	/	Xiaomi	/
4	POE adapter	S24C0Z-480A050-04	Gongjin	221506050669190

3. Test Procedure And Results

3.1 AC Power Line Conducted Emission

3.1.1 Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3.1.2 Test Procedure

Test Method	
●Conducted Measurement	○Radiated Measurement
Test Channels	
○ Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme

Note: ●:Test ○:No Test

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

3.1.3 Test Setup

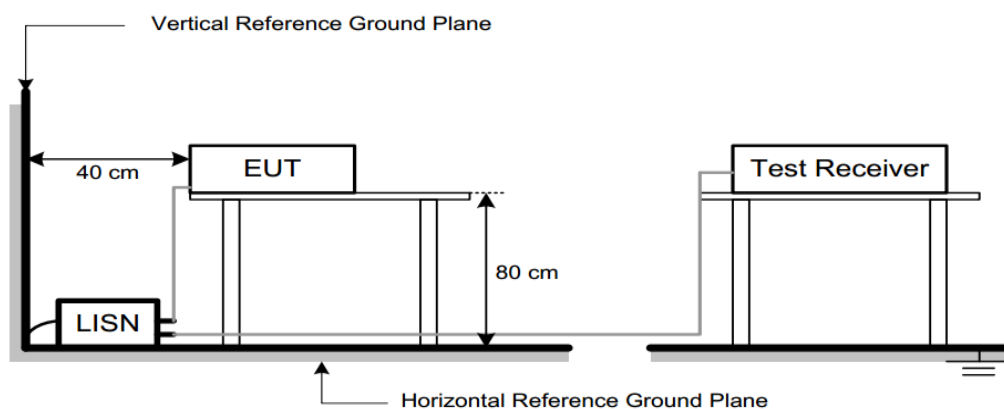

3.1.4 Test Result


Note:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Measurement = Reading + Correct Factor.
3. Over = Measurement – Limit
4. The TX 11N40 Mode Channel 38 is found to be the worst case and recorded.

For adapter

150kHz~30MHz	TX 11N40 Channel 38
--------------	---------------------

Line

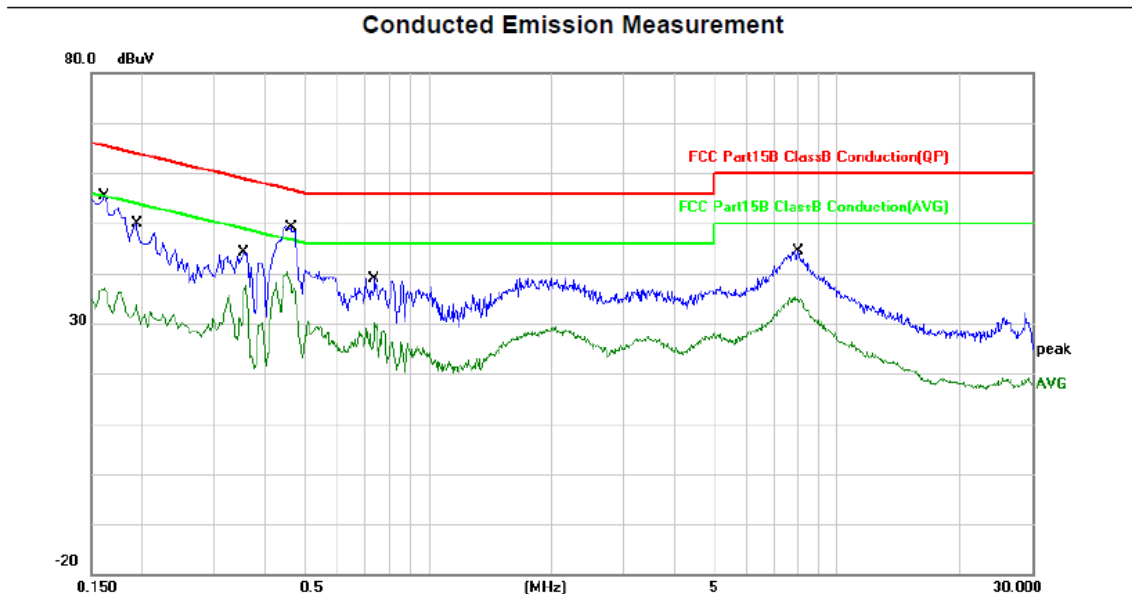


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1620	31.79	19.50	51.29	65.36	-14.07	QP	
2		0.1620	15.11	19.50	34.61	55.36	-20.75	AVG	
3		0.1940	26.40	19.51	45.91	63.86	-17.95	QP	
4		0.1940	12.65	19.51	32.16	53.86	-21.70	AVG	
5		0.3540	22.56	19.47	42.03	58.87	-16.84	QP	
6		0.3540	17.37	19.47	36.84	48.87	-12.03	AVG	
7		0.4620	27.78	19.49	47.27	56.66	-9.39	QP	
8	*	0.4620	18.05	19.49	37.54	46.66	-9.12	AVG	
9		0.7420	14.49	19.52	34.01	56.00	-21.99	QP	
10		0.7420	9.03	19.52	28.55	46.00	-17.45	AVG	
11		8.0420	19.42	20.12	39.54	60.00	-20.46	QP	
12		8.0420	14.01	20.12	34.13	50.00	-15.87	AVG	

150kHz~30MHz

TX 11N40 Channel 38

Neutral

Conducted Emission Measurement

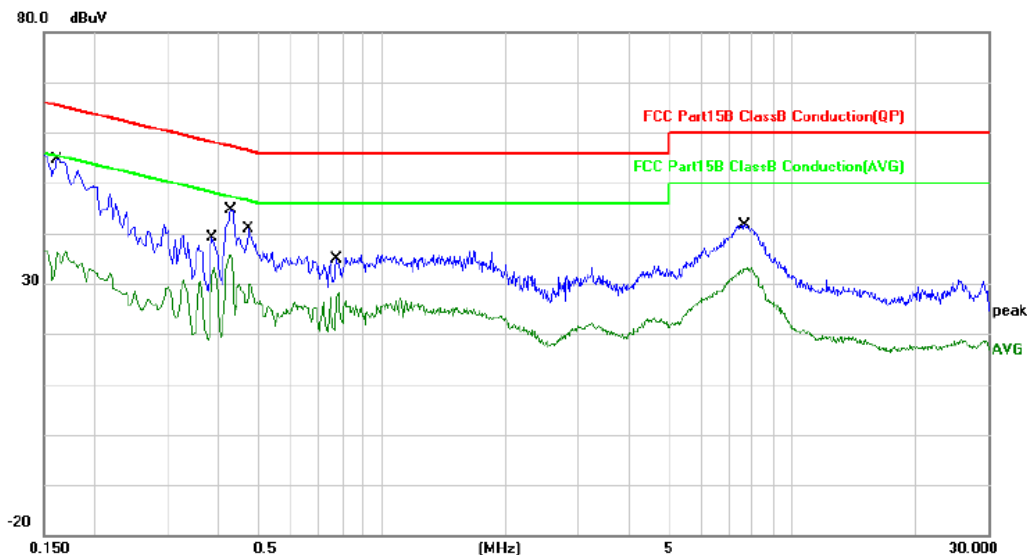

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1620	30.66	19.50	50.16	65.36	-15.20	QP	
2		0.1620	14.20	19.50	33.70	55.36	-21.66	AVG	
3		0.3860	14.80	19.42	34.22	58.15	-23.93	QP	
4		0.3860	7.87	19.42	27.29	48.15	-20.86	AVG	
5		0.4300	22.64	19.46	42.10	57.25	-15.15	QP	
6	*	0.4300	14.96	19.46	34.42	47.25	-12.83	AVG	
7		0.4740	18.88	19.52	38.40	56.44	-18.04	QP	
8		0.4740	9.90	19.52	29.42	46.44	-17.02	AVG	
9		0.7780	11.10	19.47	30.57	56.00	-25.43	QP	
10		0.7780	5.80	19.47	25.27	46.00	-20.73	AVG	
11		7.6820	17.56	20.10	37.66	60.00	-22.34	QP	
12		7.6820	12.11	20.10	32.21	50.00	-17.79	AVG	


For POE

150kHz~30MHz

TX 11N40 Channel 38

Line

Conducted Emission Measurement

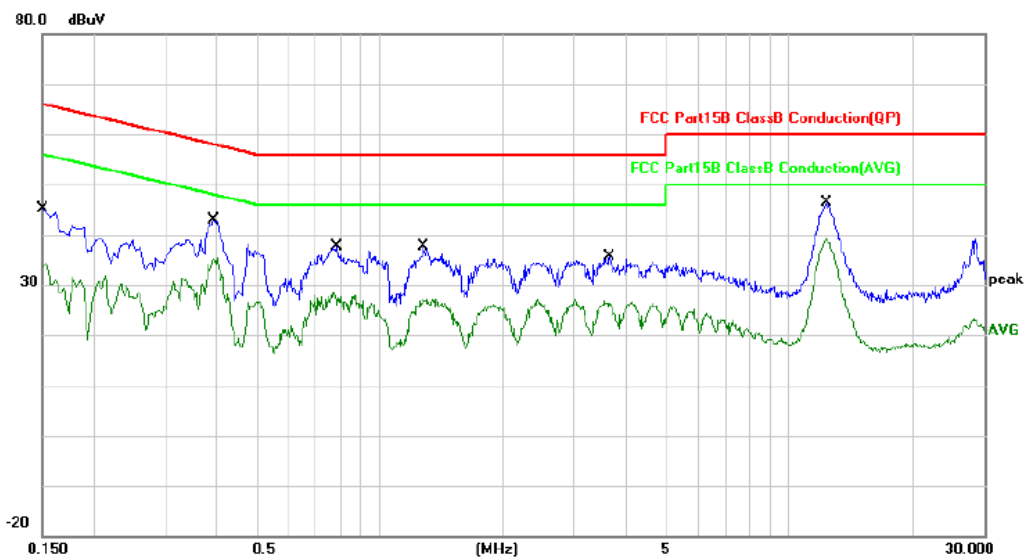


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	21.45	19.52	40.97	66.00	-25.03	QP	
2		0.1500	11.36	19.52	30.88	56.00	-25.12	AVG	
3		0.3940	21.58	19.46	41.04	57.98	-16.94	QP	
4		0.3940	13.89	19.46	33.35	47.98	-14.63	AVG	
5		0.7860	14.61	19.53	34.14	56.00	-21.86	QP	
6		0.7860	7.89	19.53	27.42	46.00	-18.58	AVG	
7		1.2860	13.03	19.59	32.62	56.00	-23.38	QP	
8		1.2860	7.18	19.59	26.77	46.00	-19.23	AVG	
9		3.6420	10.12	19.83	29.95	56.00	-26.05	QP	
10		3.6420	5.03	19.83	24.86	46.00	-21.14	AVG	
11		12.3540	22.24	20.36	42.60	60.00	-17.40	QP	
12	*	12.3540	17.43	20.36	37.79	50.00	-12.21	AVG	

150kHz~30MHz

TX 11N40 Channel 38

Neutral

Conducted Emission Measurement

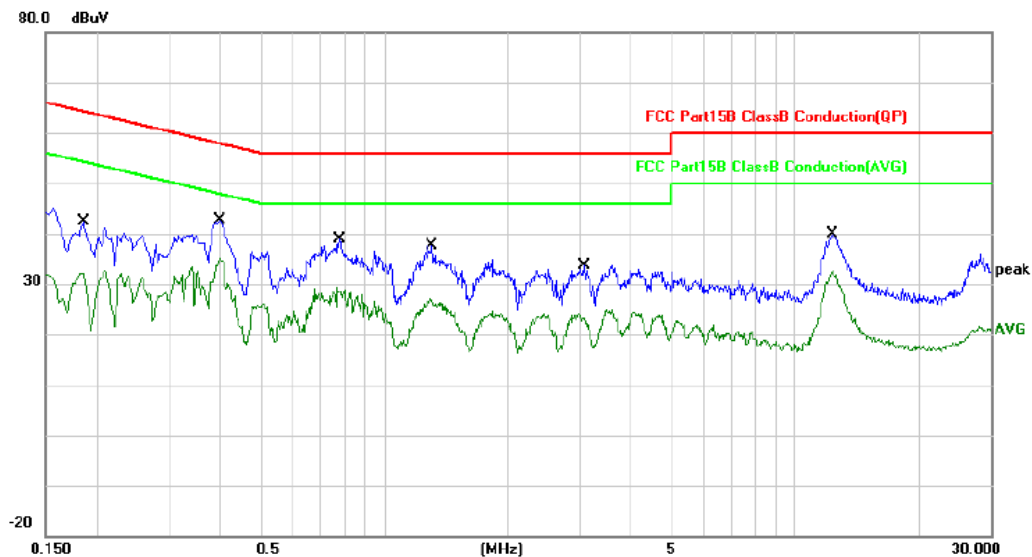

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1860	18.88	19.52	38.40	64.21	-25.81	QP	
2		0.1860	10.08	19.52	29.60	54.21	-24.61	AVG	
3		0.3980	21.74	19.42	41.16	57.90	-16.74	QP	
4	*	0.3980	14.67	19.42	34.09	47.90	-13.81	AVG	
5		0.7820	15.57	19.47	35.04	56.00	-20.96	QP	
6		0.7820	9.02	19.47	28.49	46.00	-17.51	AVG	
7		1.3140	12.23	19.58	31.81	56.00	-24.19	QP	
8		1.3140	6.37	19.58	25.95	46.00	-20.05	AVG	
9		3.0820	7.95	19.78	27.73	56.00	-28.27	QP	
10		3.0820	2.77	19.78	22.55	46.00	-23.45	AVG	
11		12.3260	15.73	20.33	36.06	60.00	-23.94	QP	
12		12.3260	11.03	20.33	31.36	50.00	-18.64	AVG	

3.2 Radiated Emission

3.2.1 Limit

1) Limit of radiated emission measurement:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Distance Meters(m)	Field Strength Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 – 0.49	300	$2400/F(\text{kHz})$	-
0.490 – 1.705	30	$24000/F(\text{kHz})$	-
1.705 – 30	30	30	-
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

2) Limit of unwanted emission out of the restricted bands:

Frequency(MHz)	EIRP Limit(dBm/MHz)	Equivalent Field Strength at 3m($\text{dB}\mu\text{V}/\text{m}$)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 NOTE (2)	68.2
	10 NOTE (2)	105.2
	15.6 NOTE (2)	110.8
	27 NOTE (2)	122.2

Note: (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d=3\text{m}$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


3.2.2 Test Procedure

Test Method	
○Conducted Measurement	●Radiated Measurement
Test Channels	
●Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	


- a) The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b) The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c) The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e) The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f) The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h) All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i) For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.2.3 Test Setup


(A) Radiated Emission Test Set-Up Frequency Below 30 MHz

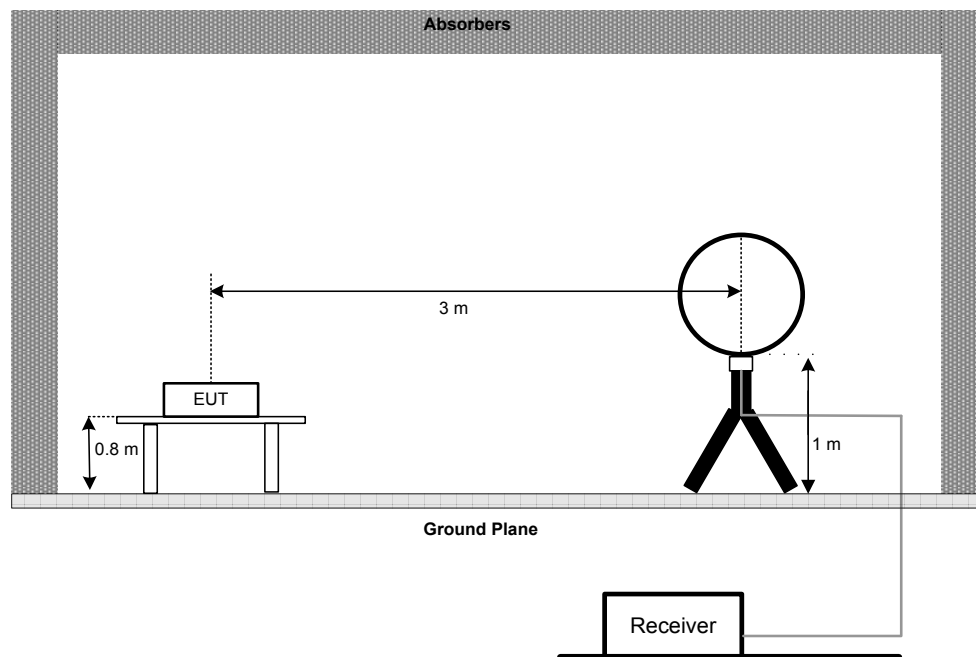

(B) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

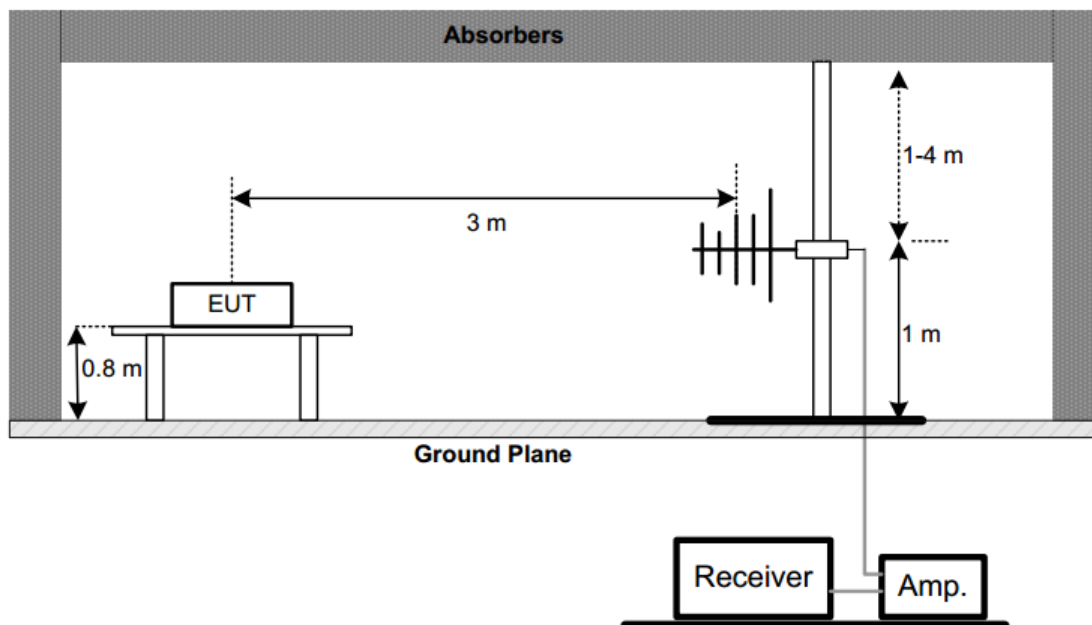

(C) Radiated Emission Test Set-Up Frequency Above 1 GHz

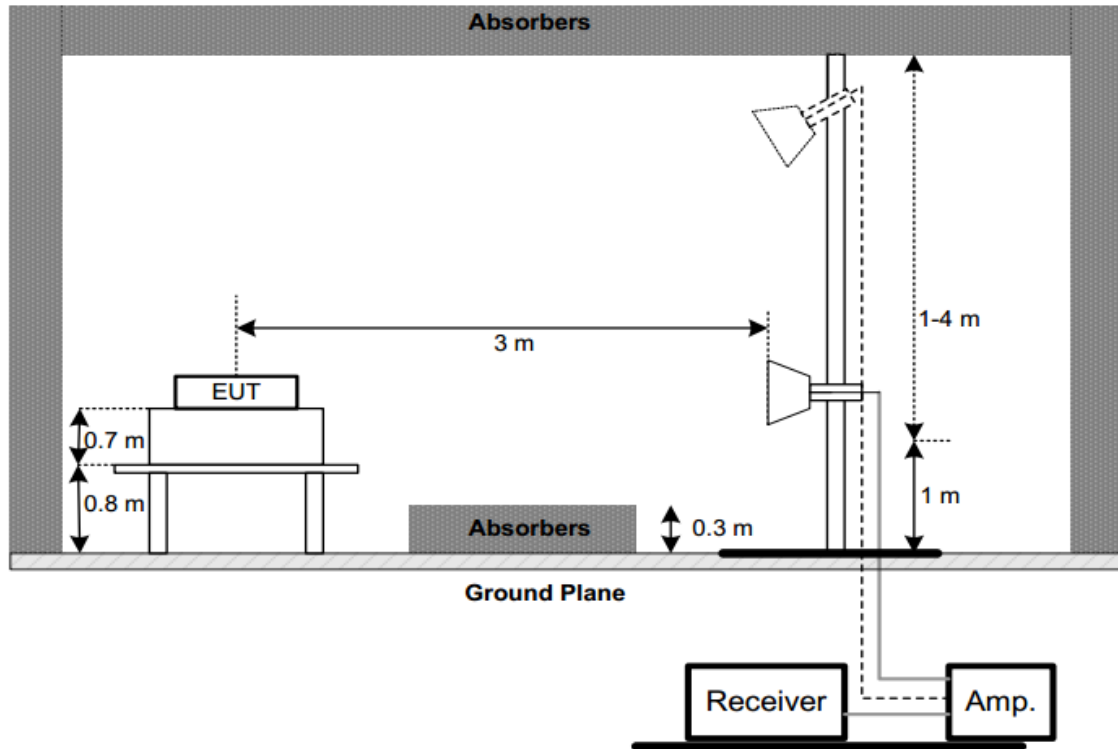

3.2.4 Test Result

1) Radiated emission: 9kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.

2) Radiated emission: 30MHz-1GHz

Note:


1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit
3. The TX 11N40 Channel 38 is found to be the worst case and recorded.

For adapter


Below 1GHz (30MHz~1GHz)

TX 11N40 Channel 38

VERTICAL

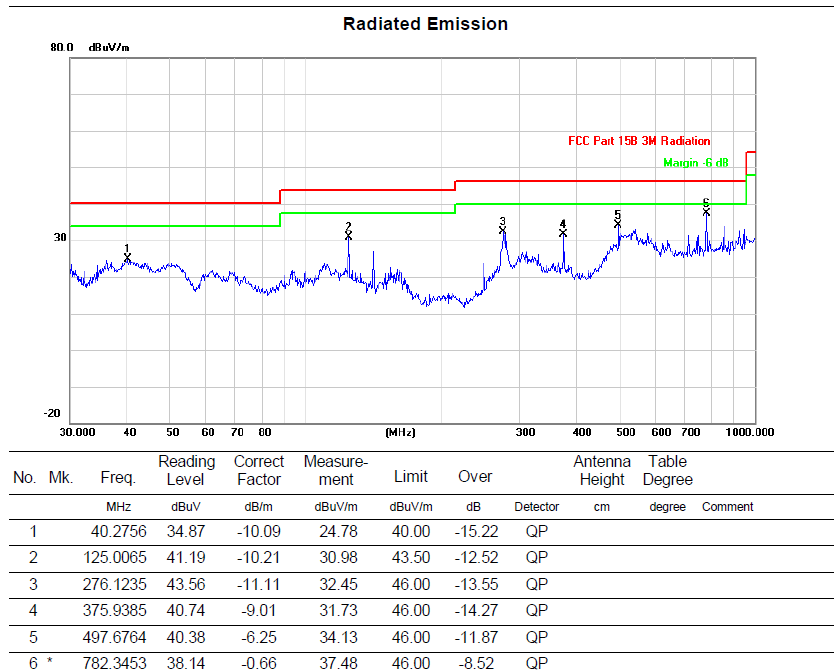

HORIZONTAL

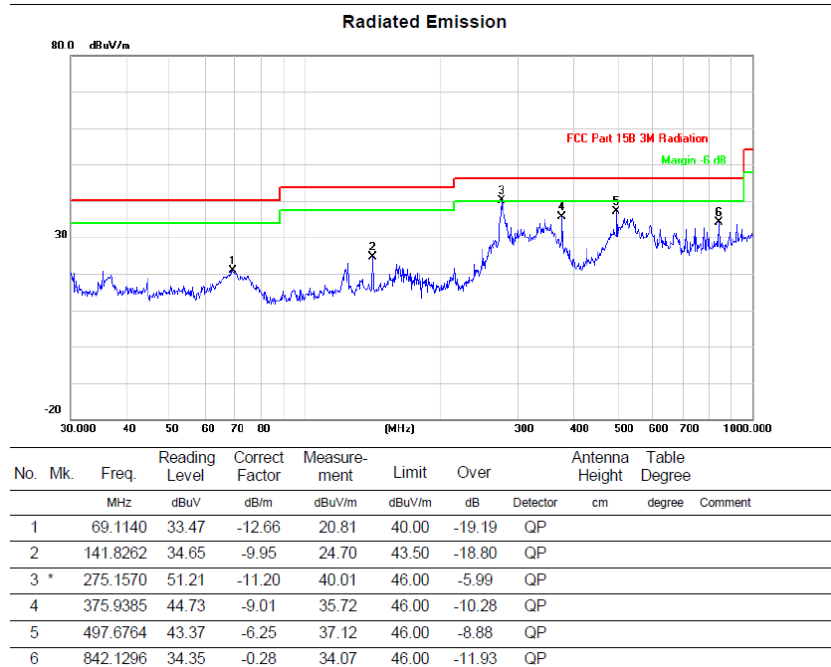


For POE


Below 1GHz (30MHz~1GHz)

TX 11N40 Channel 38

VERTICAL

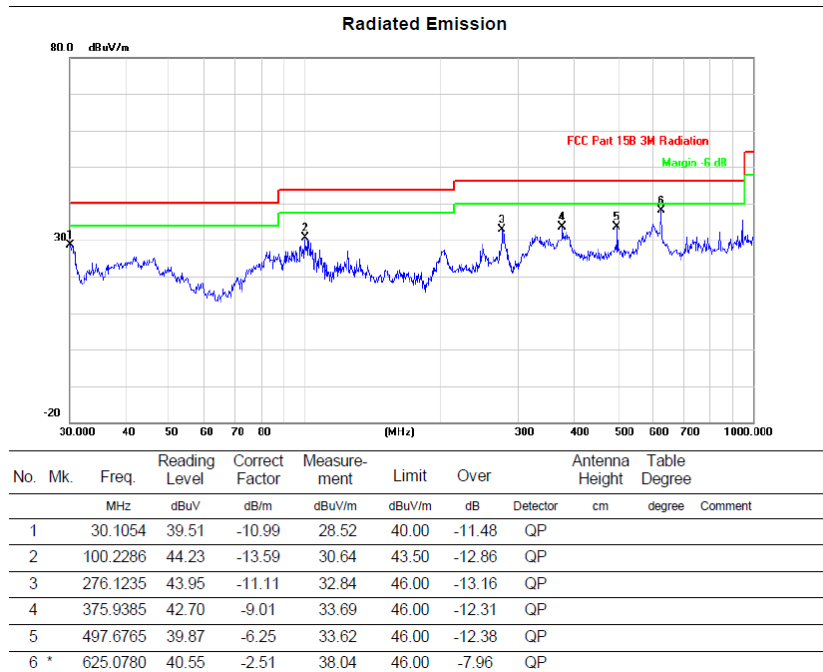

HORIZONTAL

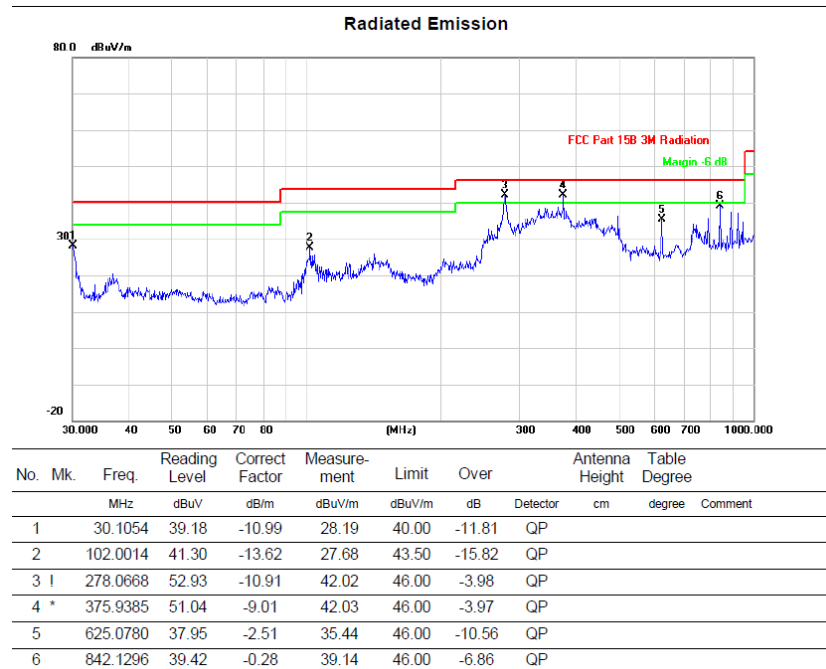



3) Radiated emission: Above 1GHz

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit


Above 1GHz (1GHz~18GHz)	Test mode:11A	Test Channel:36
-------------------------	---------------	-----------------

VERTICAL

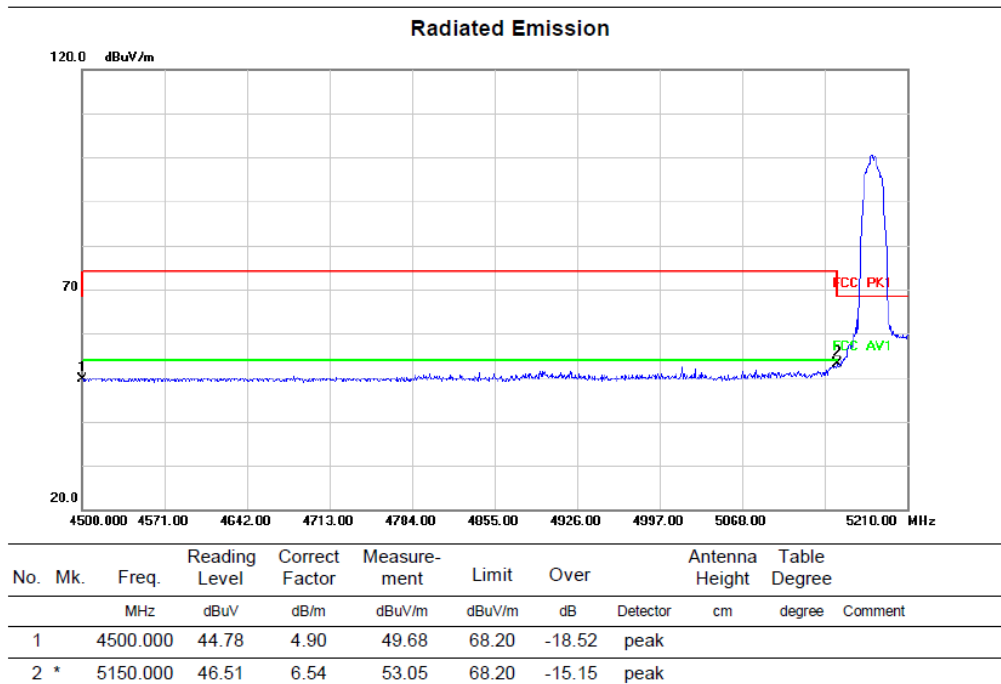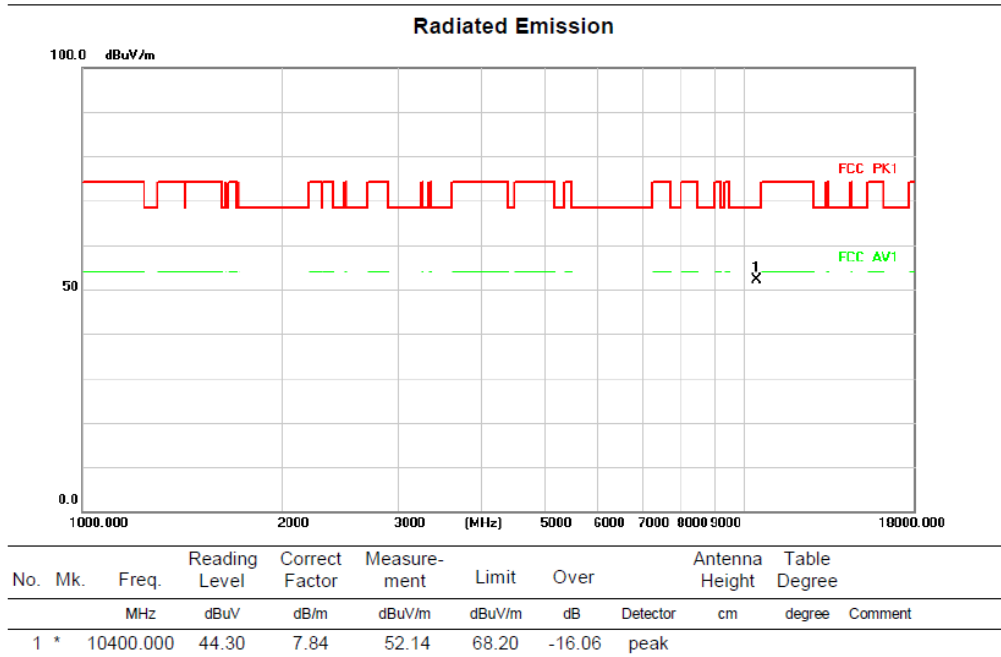


HORIZONTAL

Radiated Emission

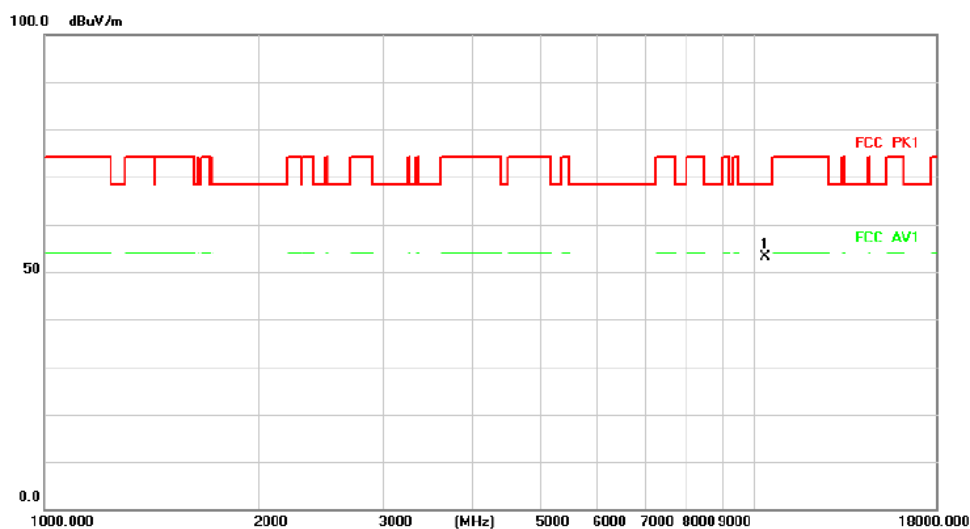

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10360.000	44.85	8.36	53.21	68.20	-14.99	peak	

Radiated Emission

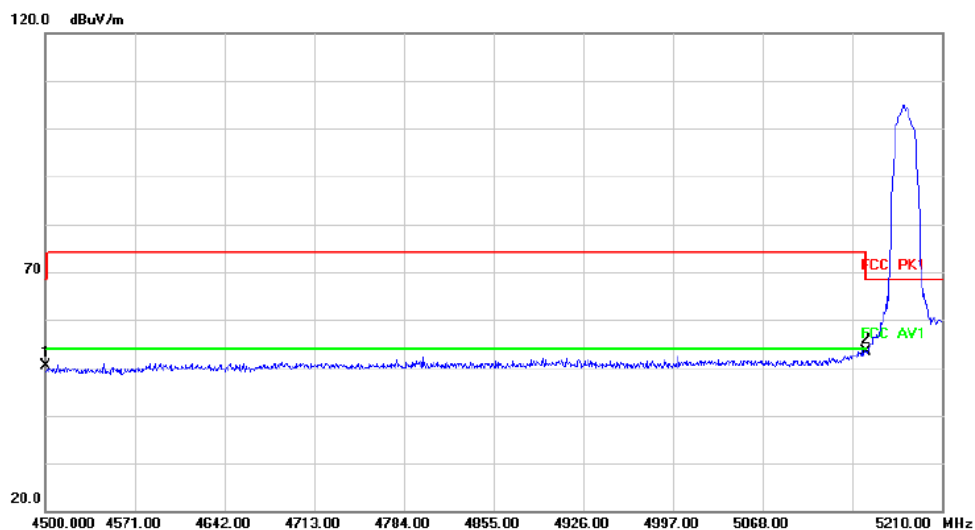

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	45.37	4.90	50.27	68.20	-17.93	peak	
2	*	5150.000	46.90	6.54	53.44	68.20	-14.76	peak	


Above 1GHz (1GHz~18GHz)

Test mode: 11A

Test Channel:40

VERTICAL


Radiated Emission

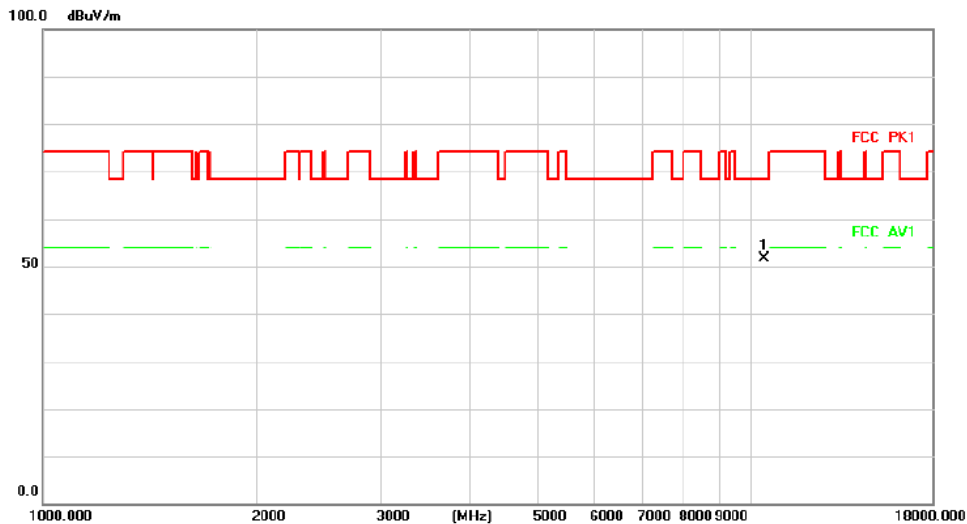

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	43.83	7.84	51.67	68.20	-16.53	peak		Comment

HORIZONTAL

Radiated Emission

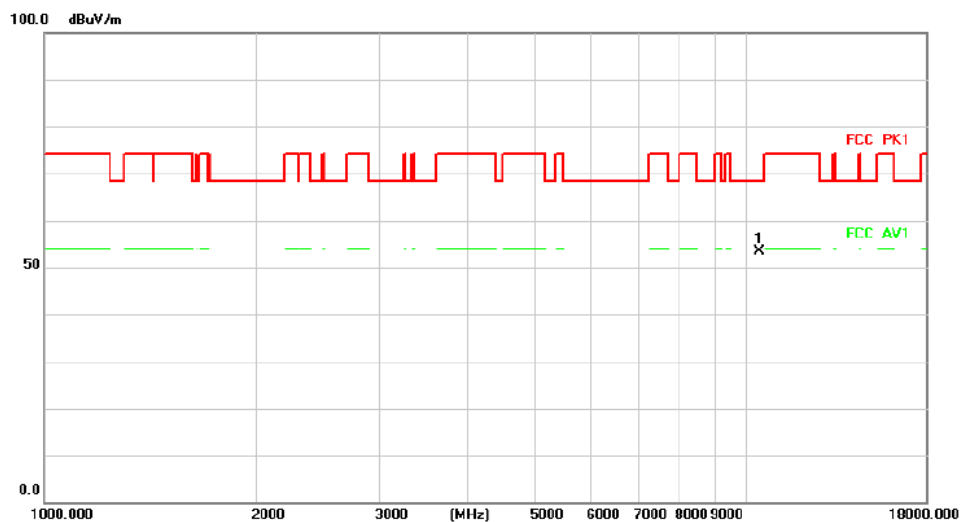


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	45.60	7.84	53.44	68.20	-14.76	peak		Comment

Above 1GHz (1GHz~18GHz)


Test mode: 11A

Test Channel:48

VERTICAL

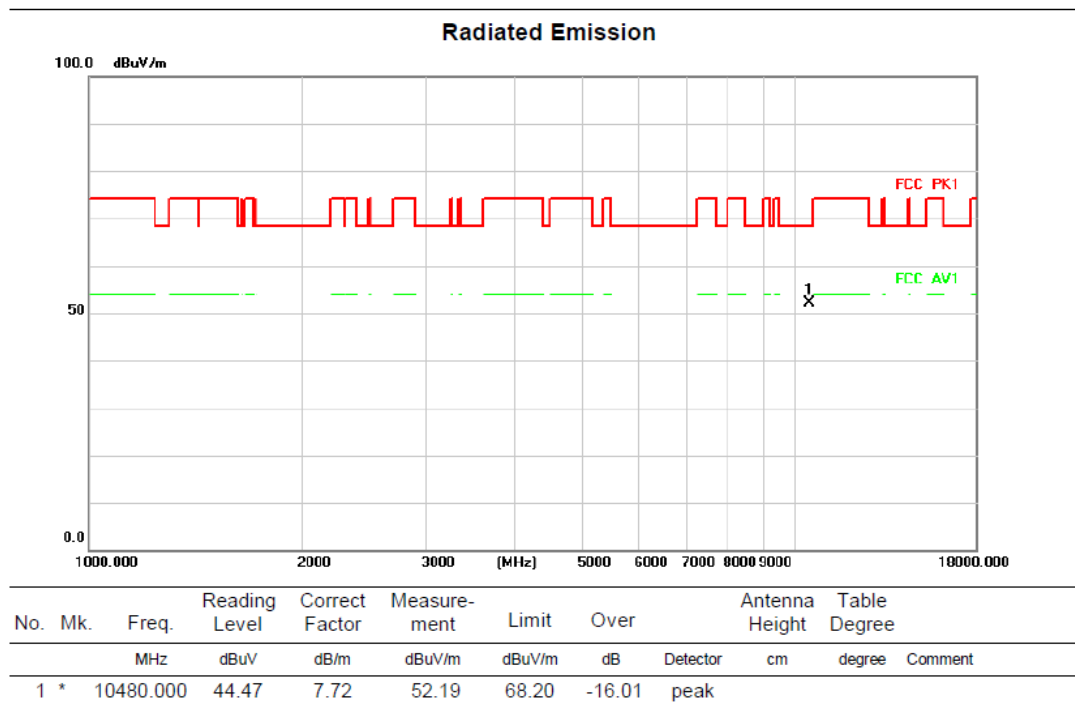

HORIZONTAL

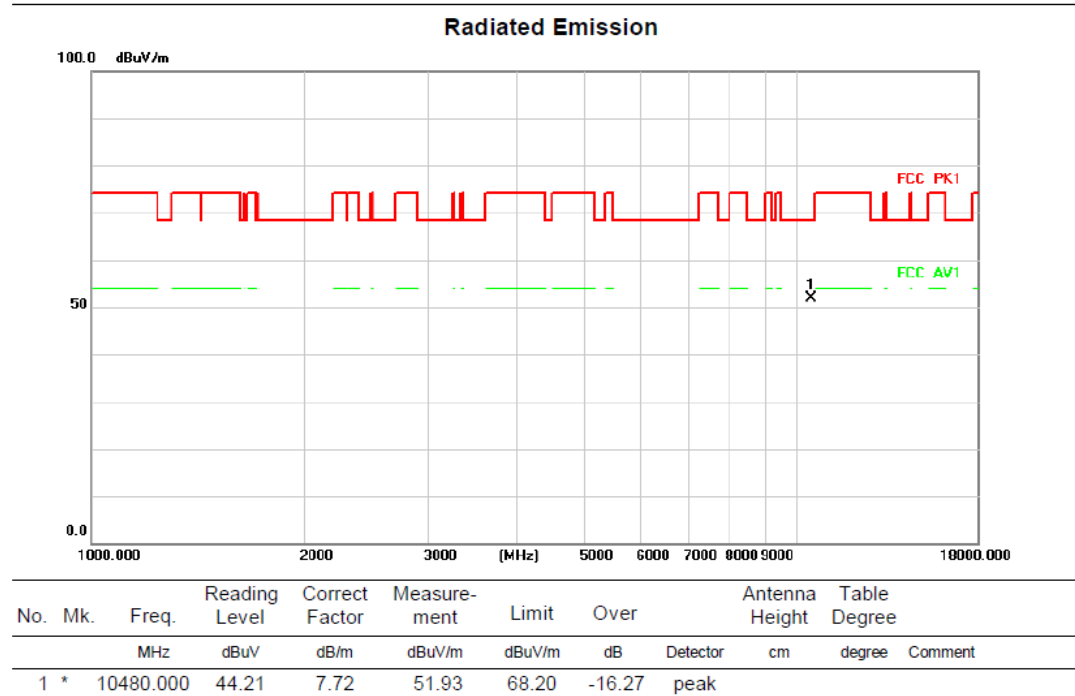


Above 1GHz (1GHz~18GHz)

Test mode: 11A

Test Channel:149


VERTICAL

Radiated Emission

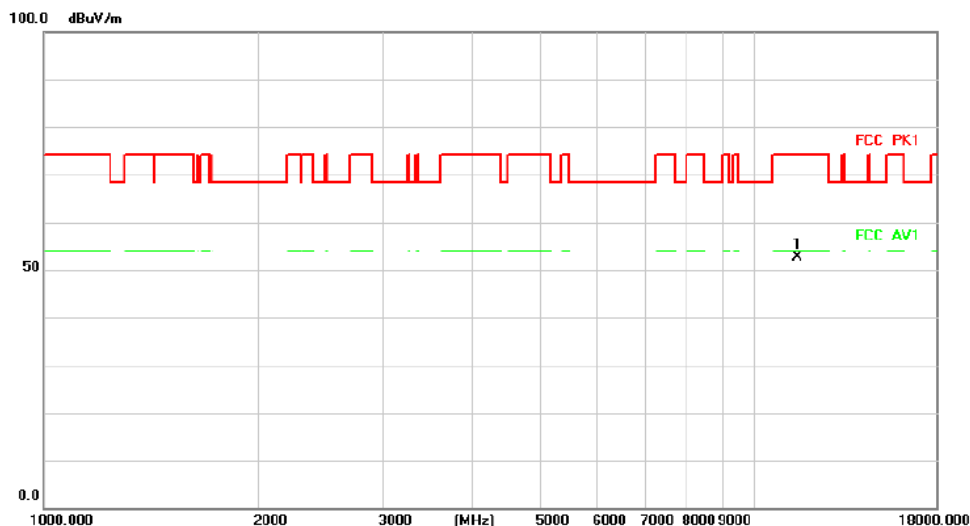

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11490.000	1.64	50.92	52.56	74.00	-21.44	peak		


Radiated Emission

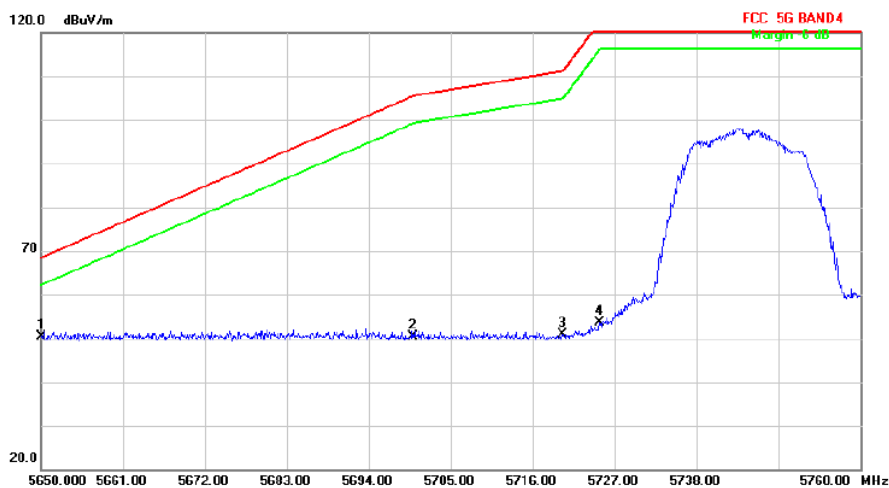

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	44.05	6.22	50.27	68.20	-17.93	peak		
2		5700.000	44.00	6.50	50.50	105.20	-54.70	peak		
3		5720.000	44.52	6.32	50.84	110.80	-59.96	peak		
4		5725.000	47.27	6.28	53.55	122.20	-68.65	peak		


HORIZONTAL

Radiated Emission

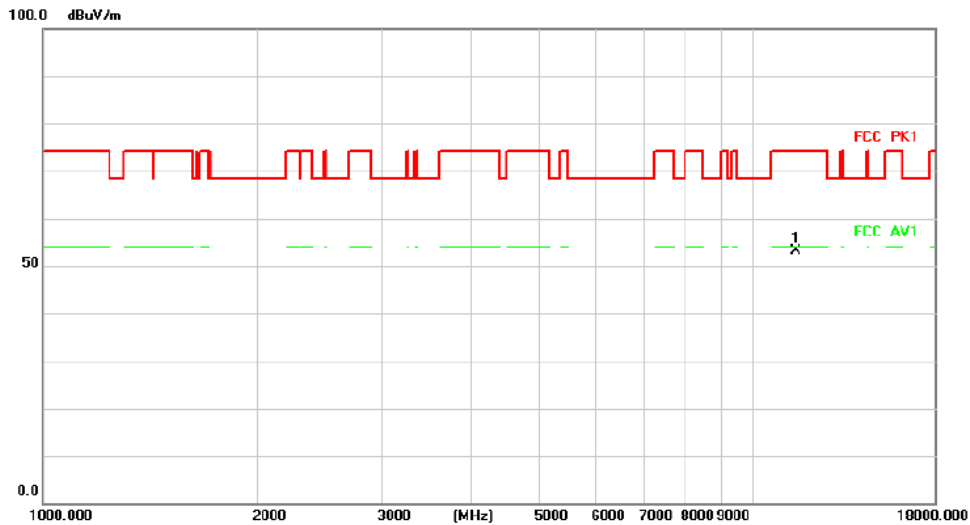

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11490.000	2.18	50.92	53.10	74.00	-20.90	peak	

Radiated Emission

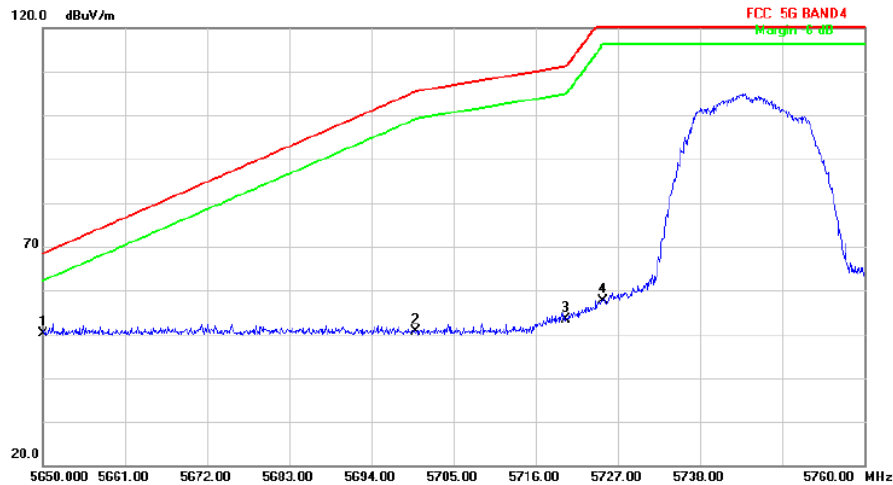


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	43.92	6.22	50.14	68.20	-18.06	peak	
2		5700.000	44.19	6.50	50.69	105.20	-54.51	peak	
3		5720.000	47.10	6.32	53.42	110.80	-57.38	peak	
4		5725.000	51.30	6.28	57.58	122.20	-64.62	peak	

Above 1GHz (1GHz~18GHz)


Test mode: 11A

Test Channel:157

VERTICAL

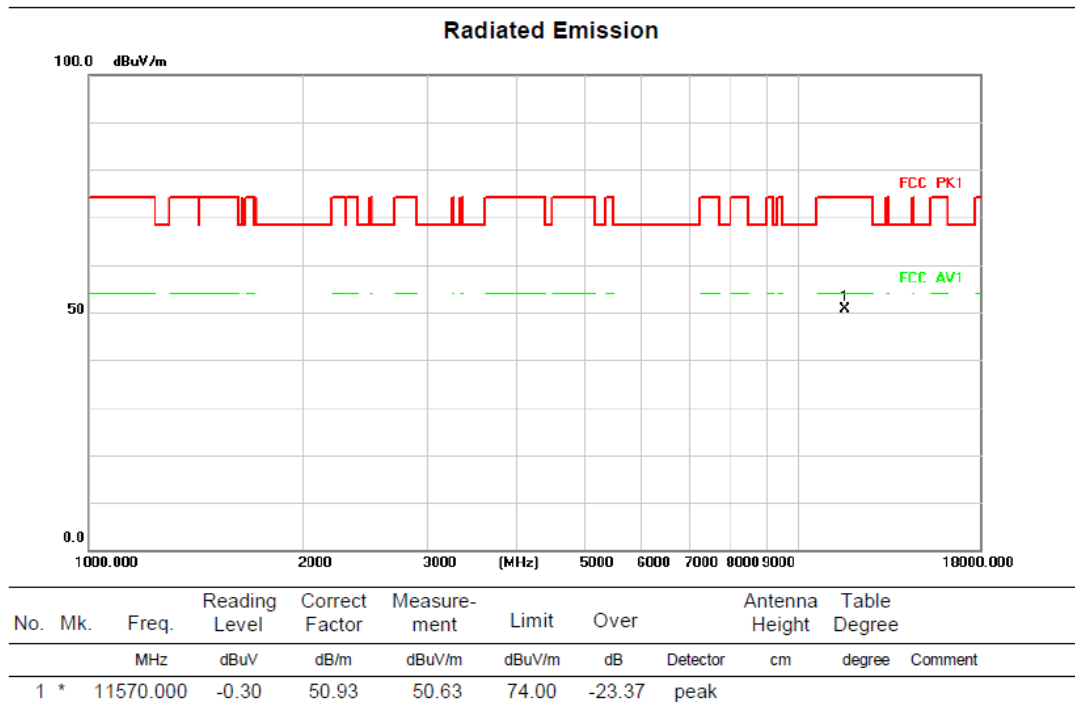

HORIZONTAL

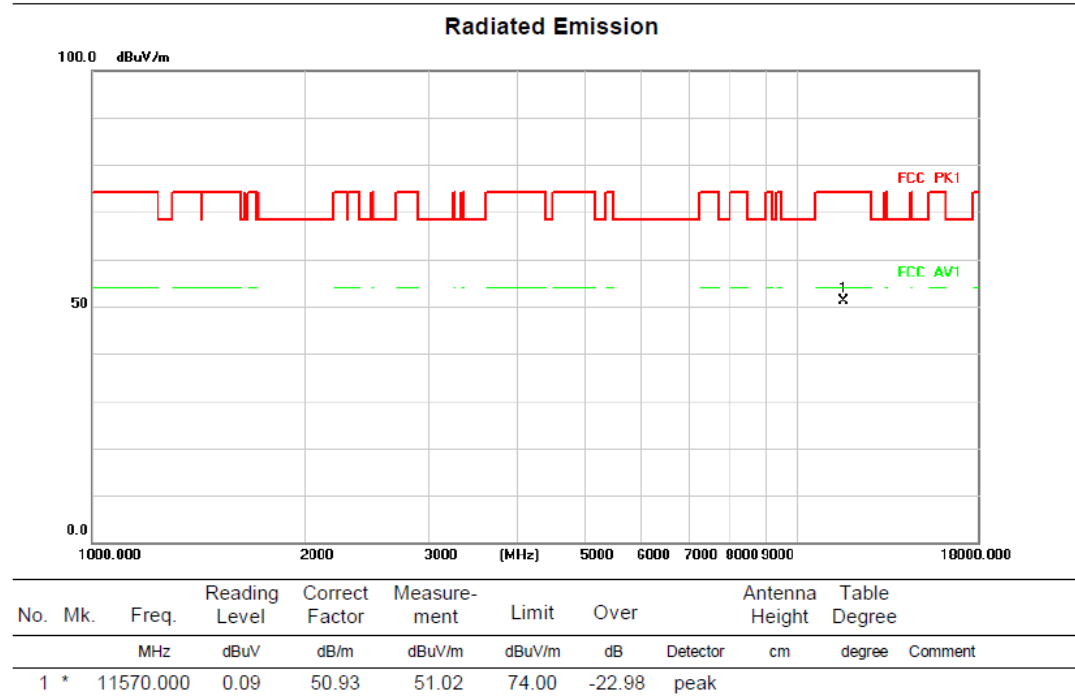


Above 1GHz (1GHz~18GHz)

Test mode: 11A

Test Channel:165


VERTICAL

Radiated Emission

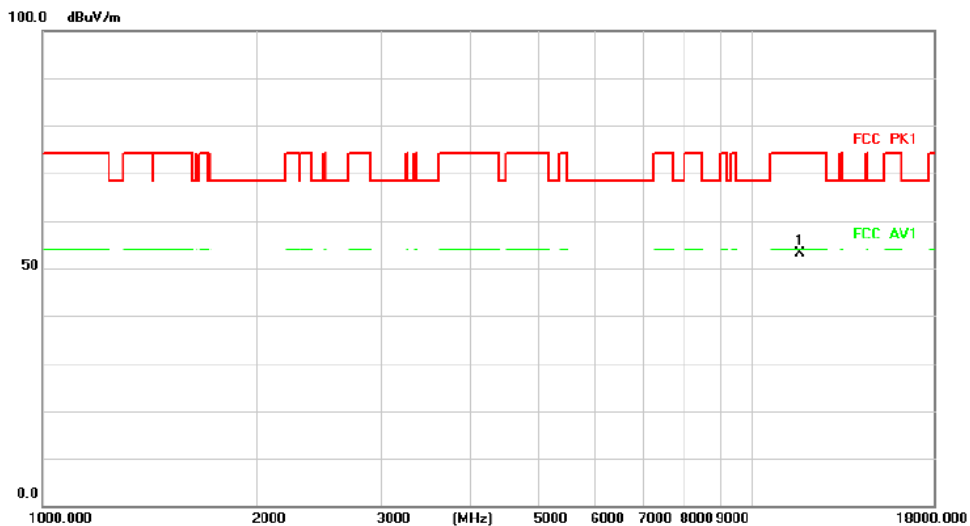

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	2.10	50.92	53.02	74.00	-20.98	peak		


Radiated Emission

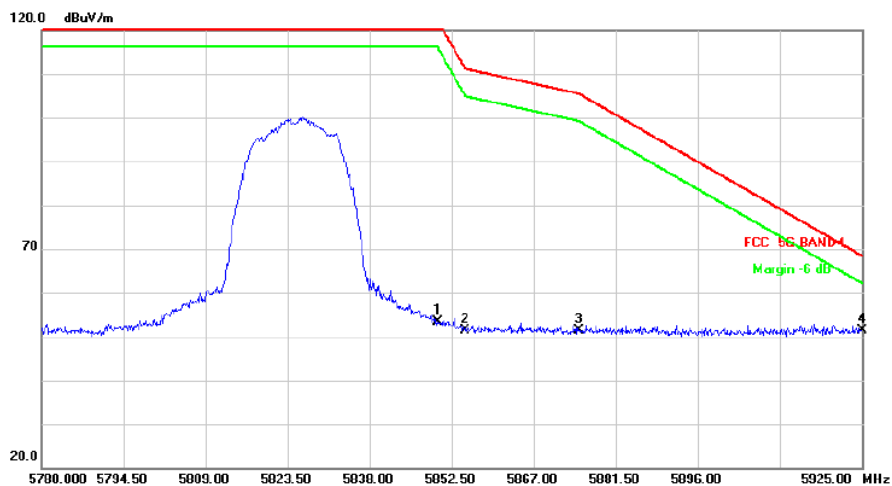

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	46.10	7.29	53.39	122.20	-68.81	peak		
2		5855.000	44.25	7.22	51.47	110.80	-59.33	peak		
3		5875.000	44.44	6.96	51.40	105.20	-53.80	peak		
4	*	5925.000	44.42	6.96	51.38	68.20	-16.82	peak		


HORIZONTAL

Radiated Emission

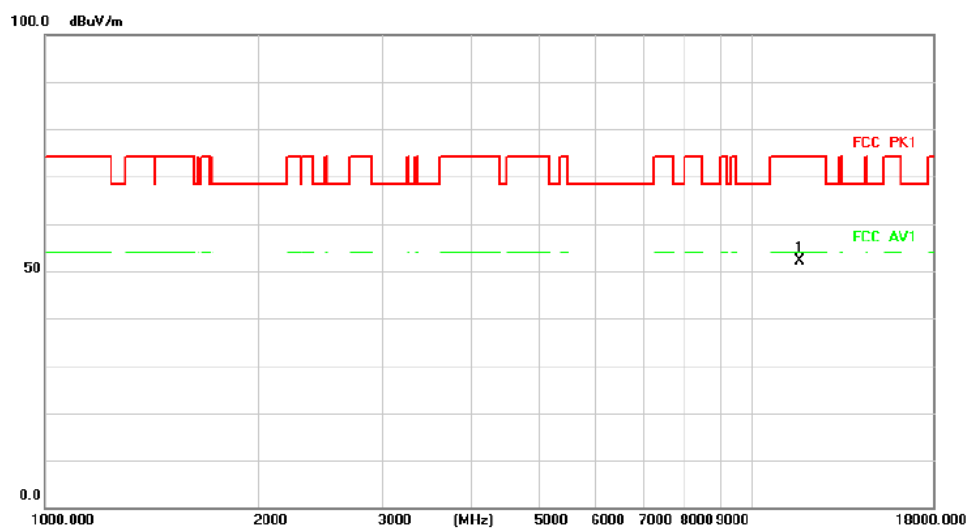

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	1.15	50.92	52.07	74.00	-21.93	peak		

Radiated Emission

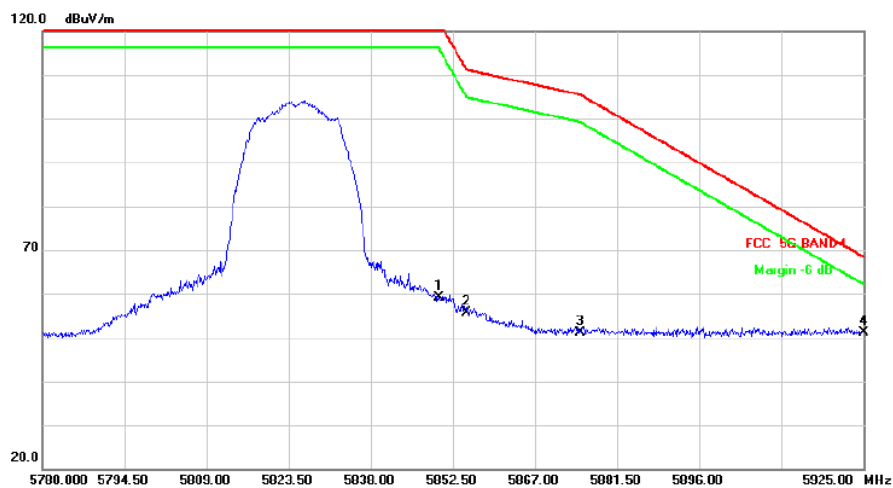

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	51.77	7.29	59.06	122.20	-63.14	peak		
2		5855.000	48.52	7.22	55.74	110.80	-55.06	peak		
3		5875.000	44.18	6.96	51.14	105.20	-54.06	peak		
4	*	5925.000	44.26	6.96	51.22	68.20	-16.98	peak		


Above 1GHz (1GHz~18GHz)

Test mode: 11N20

Test Channel:36


VERTICAL

Radiated Emission

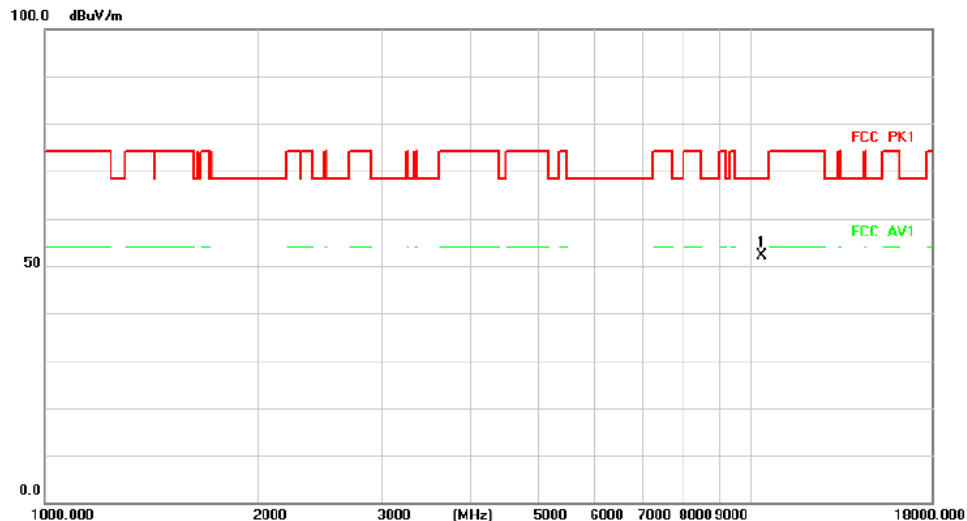

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	43.65	8.36	52.01	68.20	-16.19	peak		


Radiated Emission

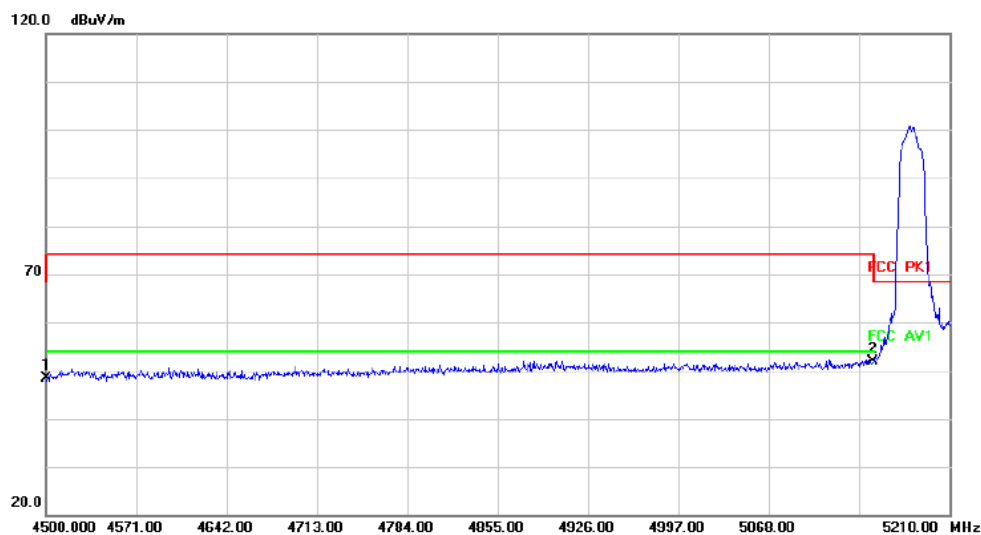

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	43.45	4.90	48.35	68.20	-19.85	peak		
2	*	5150.000	45.22	6.54	51.76	68.20	-16.44	peak		


HORIZONTALA

Radiated Emission

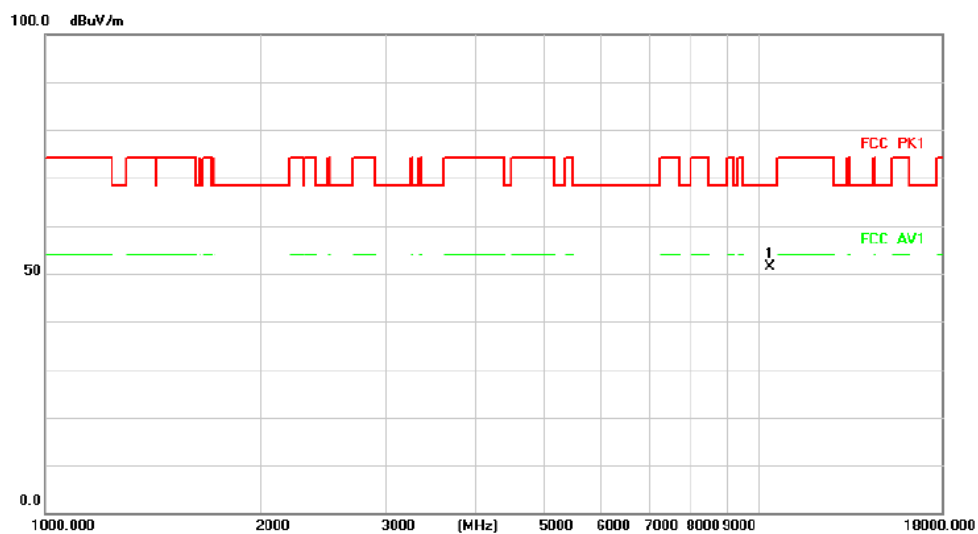

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	43.05	8.36	51.41	68.20	-16.79	peak		

Radiated Emission

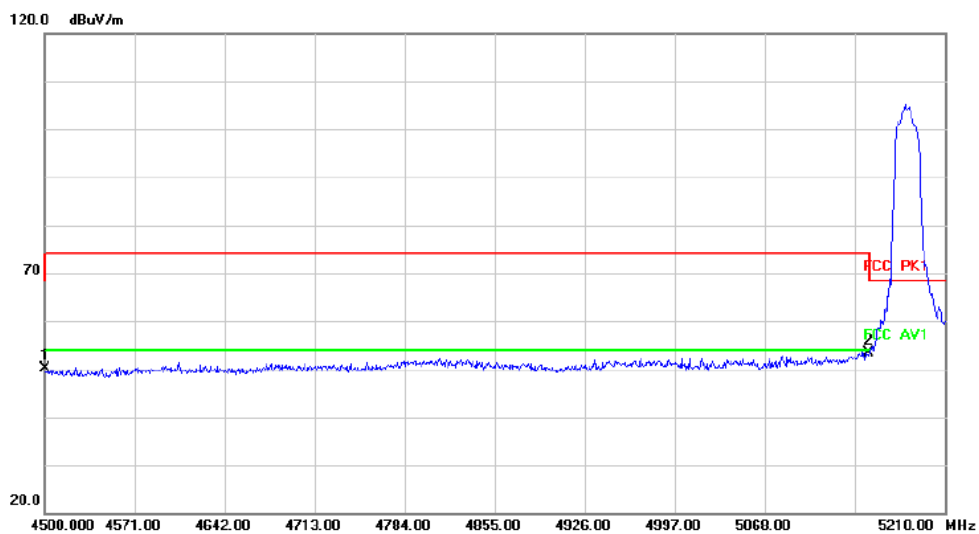


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	45.15	4.90	50.05	68.20	-18.15	peak		
2	*	5150.000	46.76	6.54	53.30	68.20	-14.90	peak		

Above 1GHz (1GHz~18GHz)


Test mode: 11N20

Test Channel:40

VERTICAL

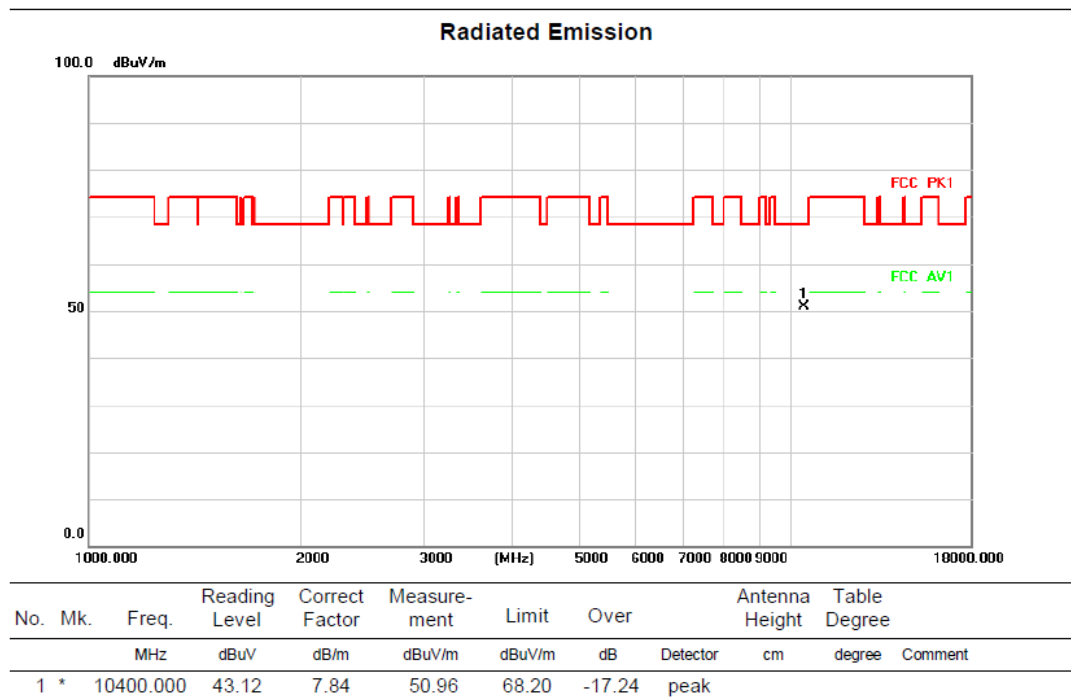

HORIZONTAL

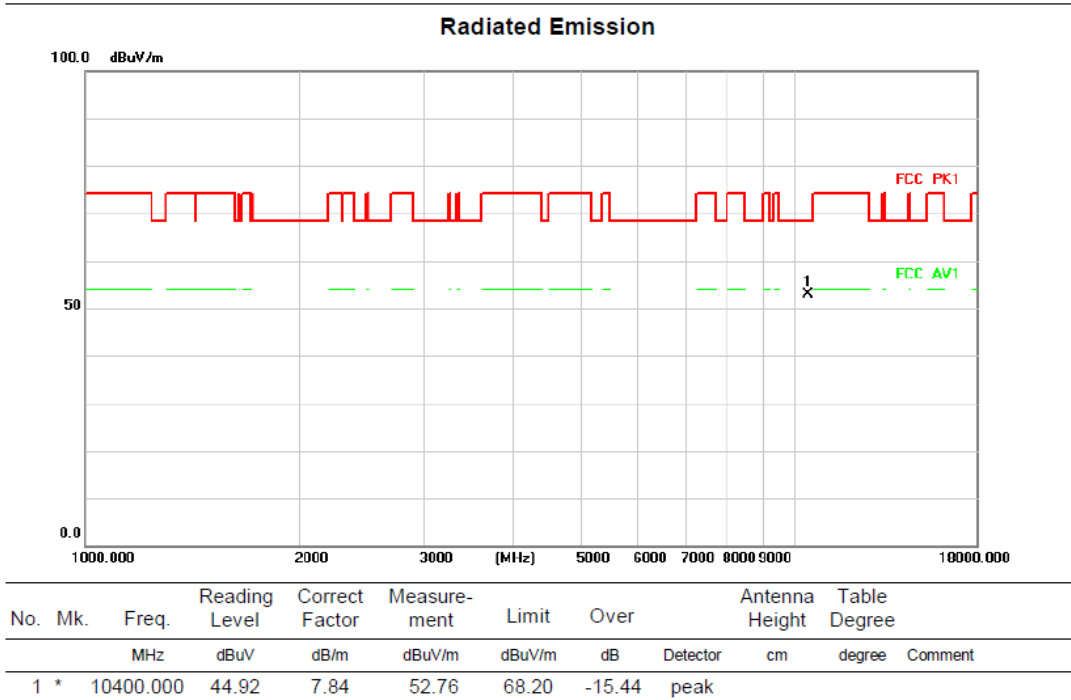


Above 1GHz (1GHz~18GHz)


Test mode: 11N20

Test Channel:48

VERTICAL

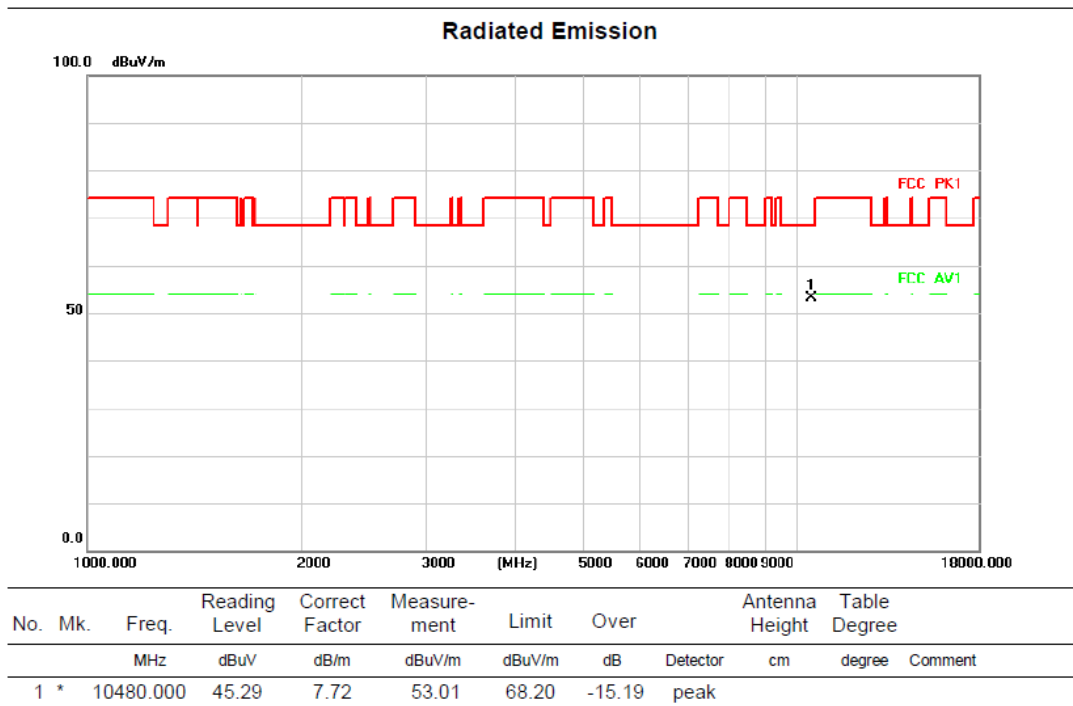

HORIZONTAL


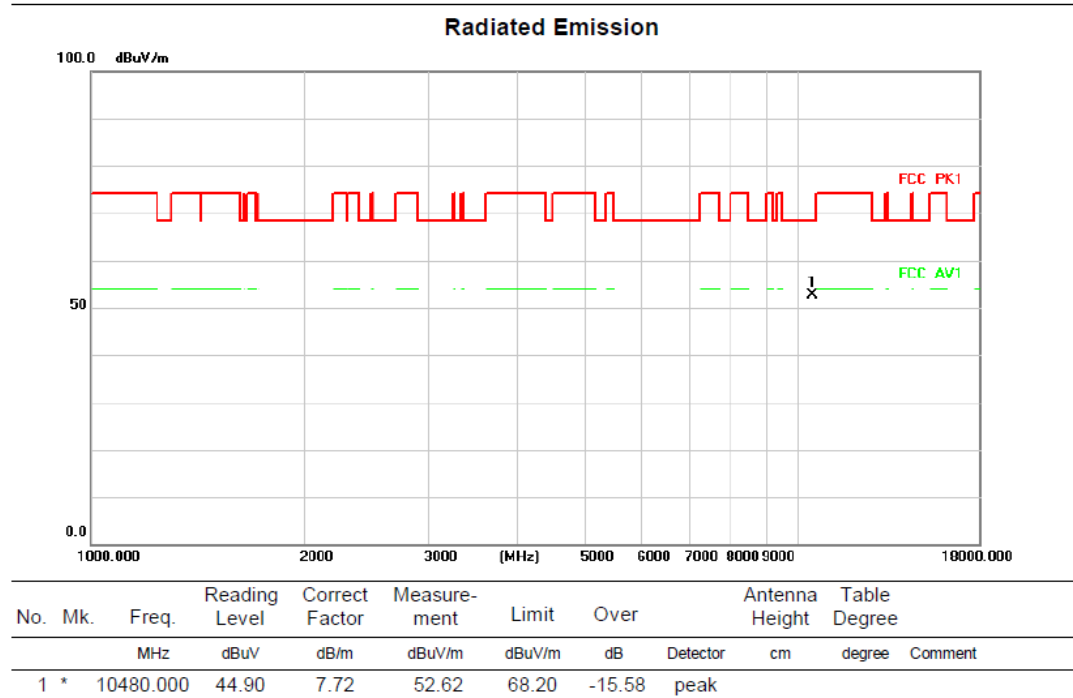


Above 1GHz (1GHz~18GHz)

Test mode: 11N20


Test Channel:149

VERTICAL

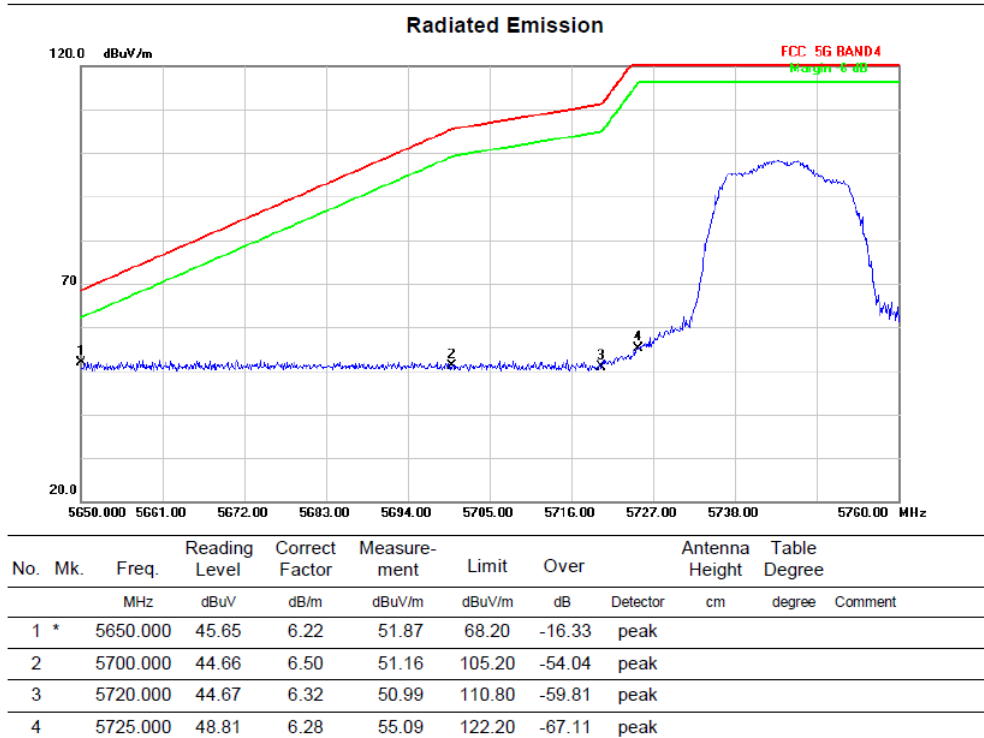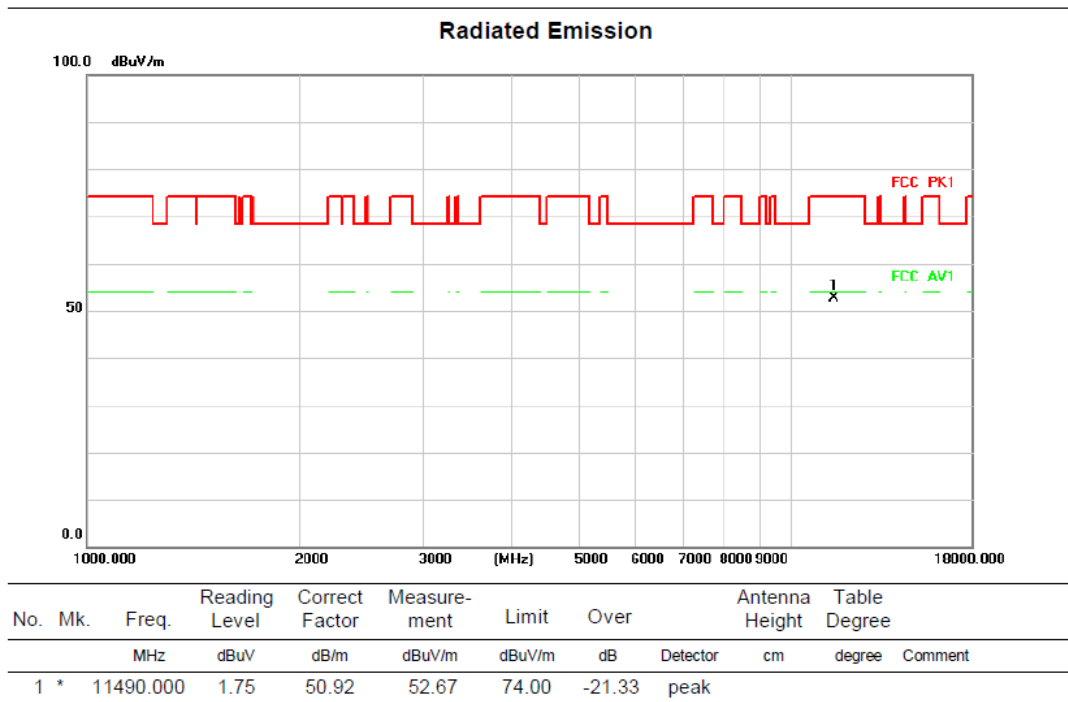


HORIZONTALA

Radiated Emission

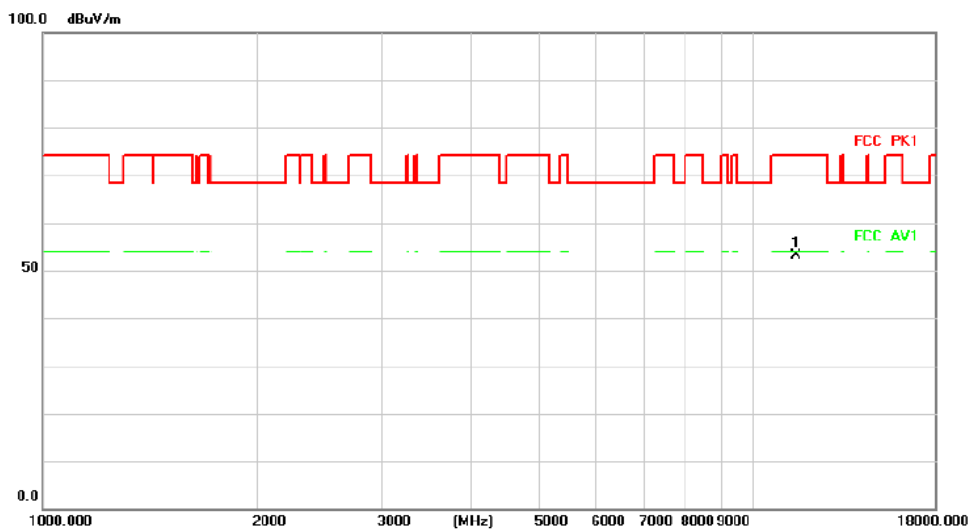

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11490.000	2.12	50.92	53.04	74.00	-20.96	peak		

Radiated Emission

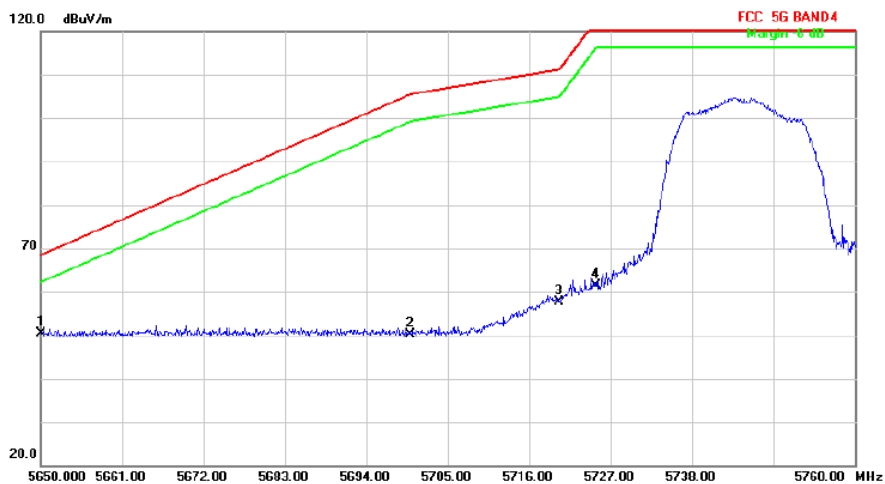


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	44.06	6.22	50.28	68.20	-17.92	peak		
2		5700.000	43.62	6.50	50.12	105.20	-55.08	peak		
3		5720.000	51.27	6.32	57.59	110.80	-53.21	peak		
4		5725.000	55.12	6.28	61.40	122.20	-60.80	peak		

Above 1GHz (1GHz~18GHz)


Test mode: 11N20

Test Channel:157

VERTICAL

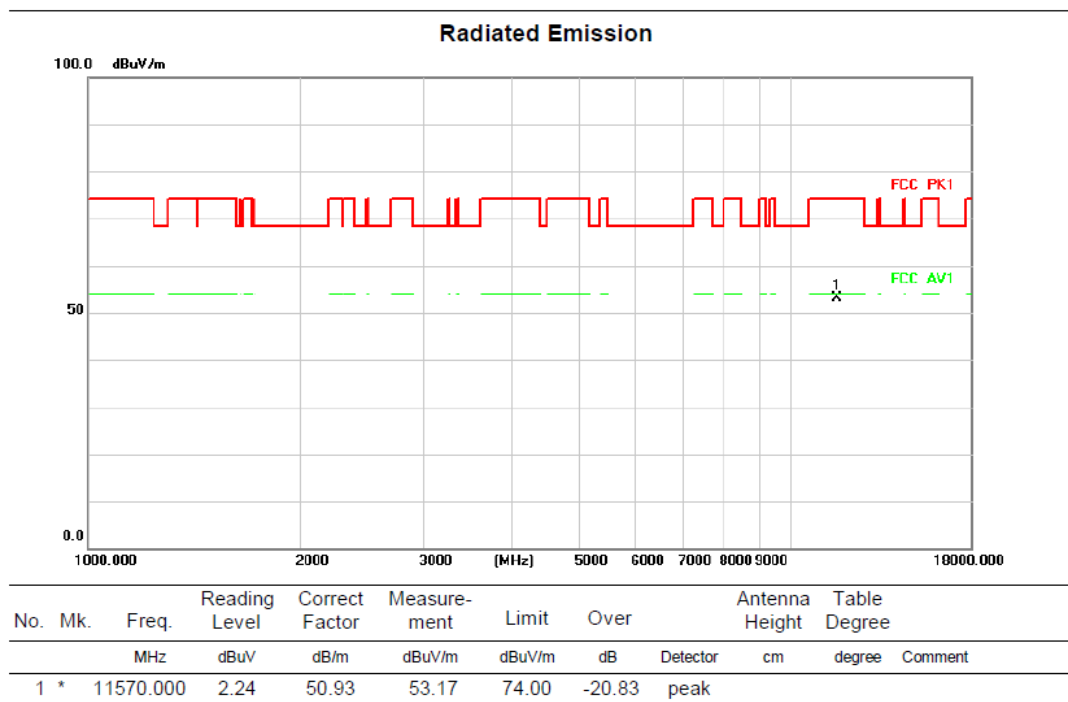

HORIZONTAL

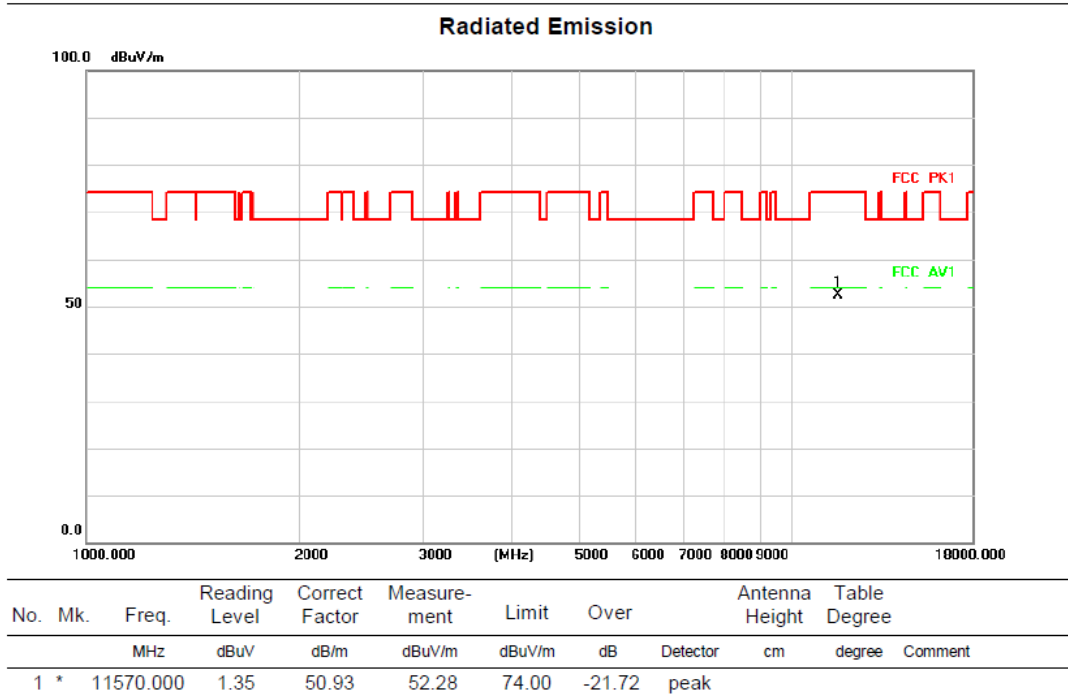


Above 1GHz (1GHz~18GHz)

Test mode: 11N20

Test Channel:165


VERTICAL

Radiated Emission

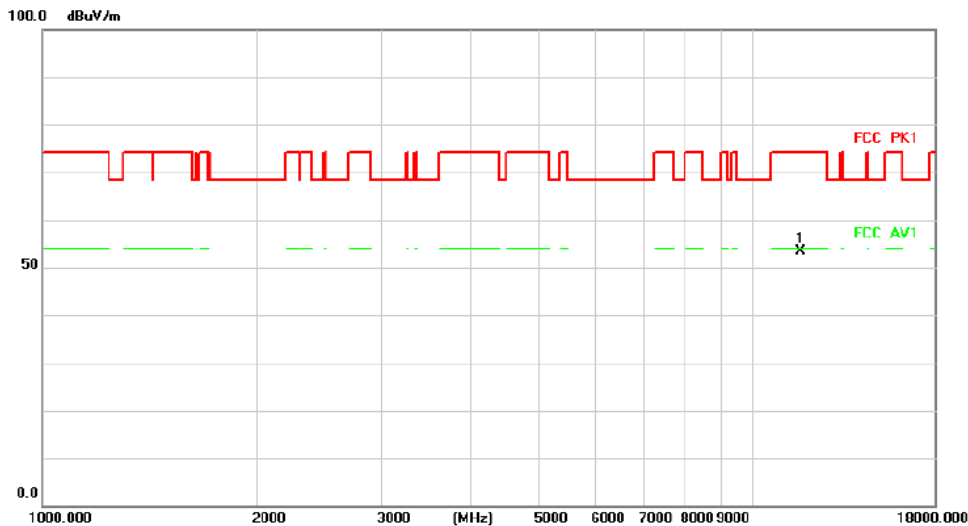

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	2.50	50.92	53.42	74.00	-20.58	peak		


Radiated Emission

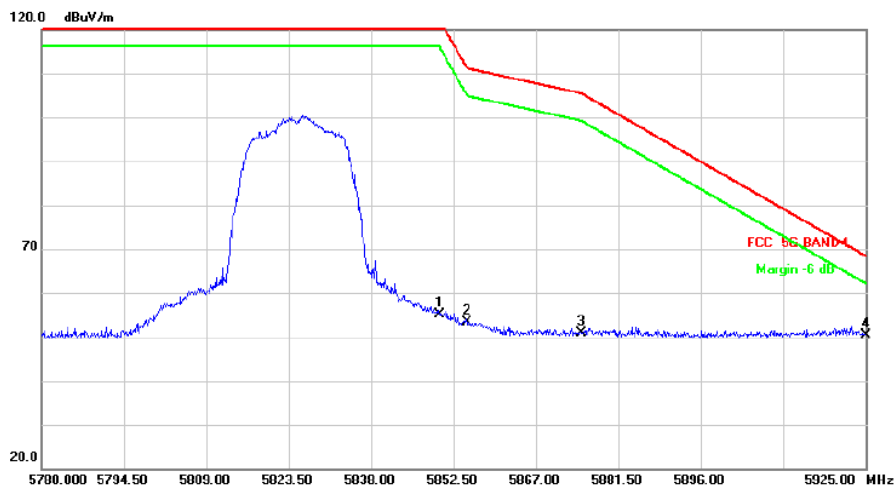

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	47.96	7.29	55.25	122.20	-66.95	peak		
2		5855.000	46.12	7.22	53.34	110.80	-57.46	peak		
3		5875.000	43.96	6.96	50.92	105.20	-54.28	peak		
4	*	5925.000	43.53	6.96	50.49	68.20	-17.71	peak		


HORIZONTALA

Radiated Emission

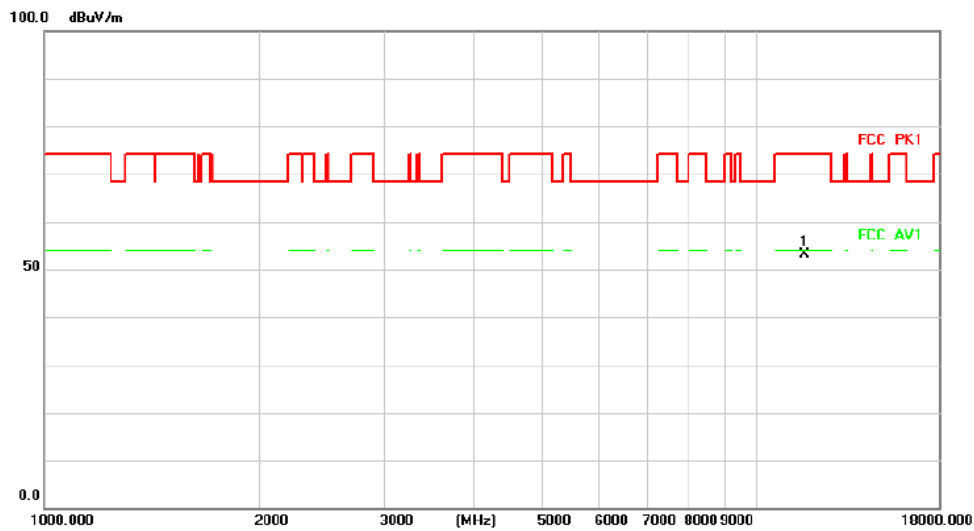

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	2.14	50.92	53.06	74.00	-20.94	peak		

Radiated Emission

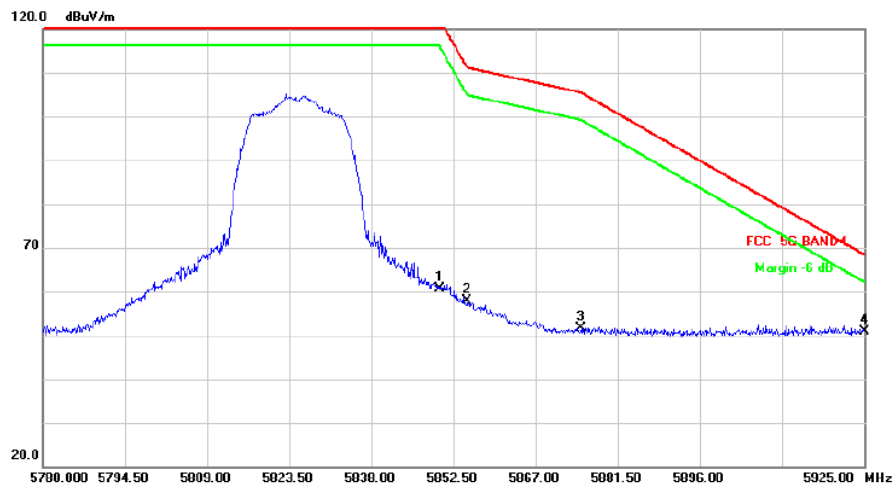



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	53.37	7.29	60.66	122.20	-61.54	peak		
2		5855.000	50.62	7.22	57.84	110.80	-52.96	peak		
3		5875.000	44.61	6.96	51.57	105.20	-53.63	peak		
4	*	5925.000	43.83	6.96	50.79	68.20	-17.41	peak		

Above 1GHz (1GHz~18GHz)

Test mode: 11N40


Test Channel:38

VERTICAL

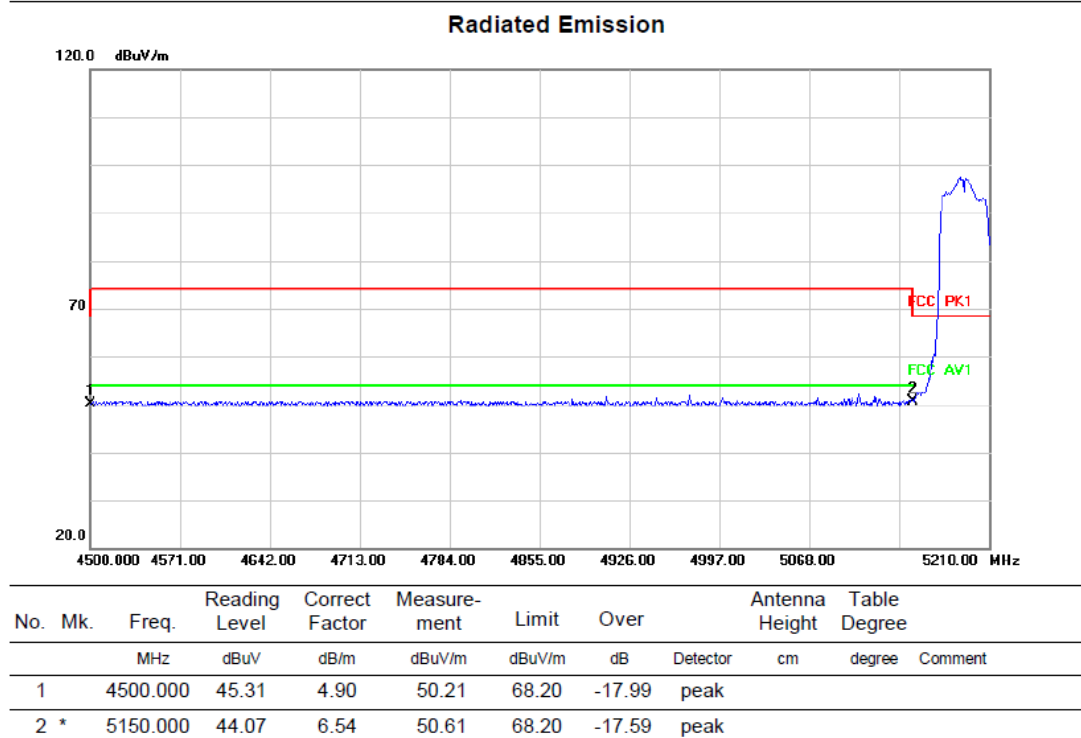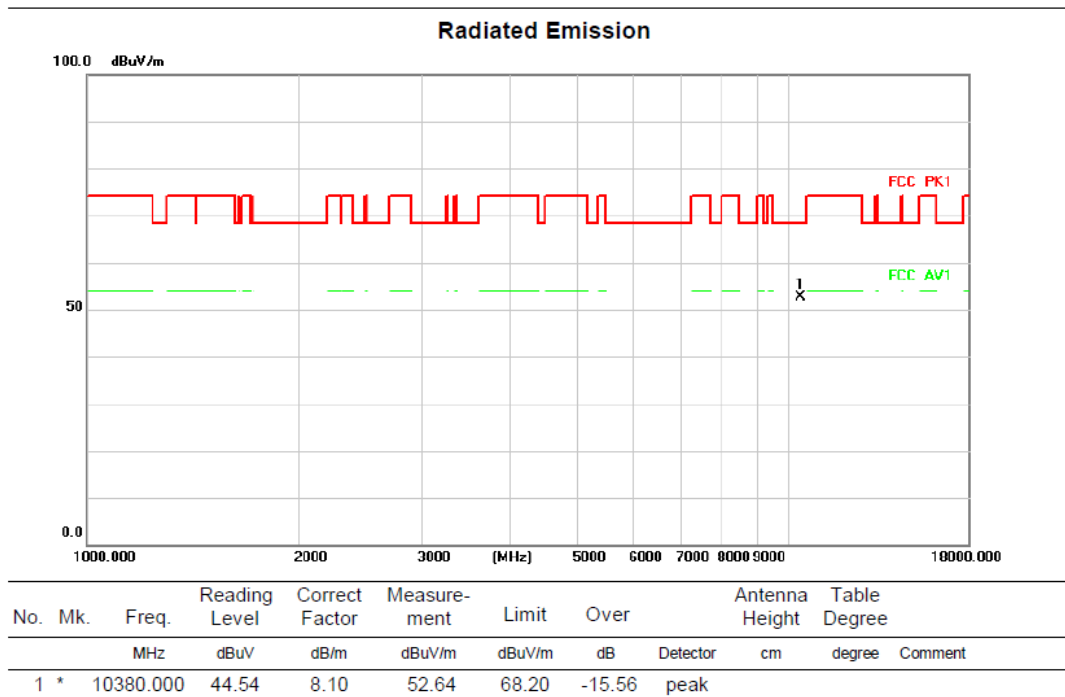


HORIZONTAL

Radiated Emission

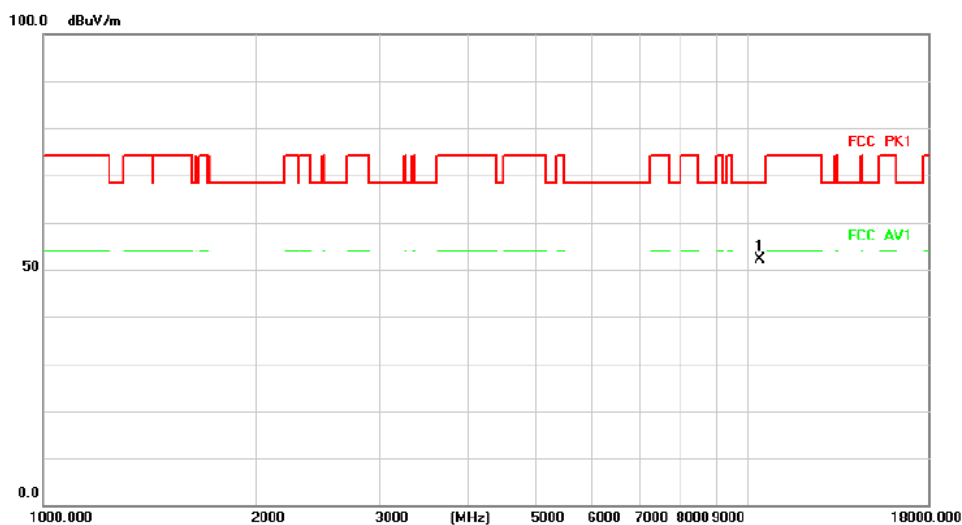

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10380.000	43.98	8.10	52.08	68.20	-16.12	peak	

Radiated Emission

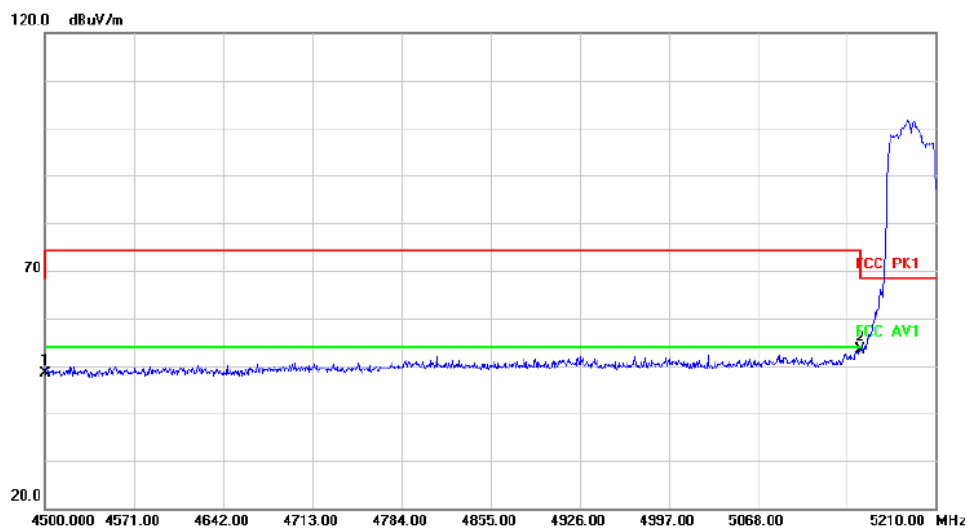

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	43.40	4.90	48.30	68.20	-19.90	peak	
2	*	5150.000	46.82	6.54	53.36	68.20	-14.84	peak	