

Report on the FCC and IC Testing of the
ART S.p.A.
Android Auto and Car play system integration
device with BT functionality. Model: TSU
In accordance with FCC 47 CFR Part 15C, and
ISED RSS-247, and ISED RSS-GEN



Product Service

Add value.
Inspire trust.

Prepared for: ART S.p.A.
Voc. Peschiello, 20
IT – 06065 Passignano sul Trasimeno (PG)
Italy

FCC ID: 2AUGZTSU
IC: 25426-TSU

COMMERCIAL-IN-CONFIDENCE

Date: 2020-08-21
Document Number: TR-69559-79827-01 | Issue: 05

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Martin Steindl	2020-08-20	 i.V. SIGN-ID 352850
Authorised Signatory	Alex Fink	2020-08-20	 SIGN-ID 391471

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Martin Steindl	2020-08-20	 i.V. SIGN-ID 352850

Laboratory Accreditation
DAkkS Reg. No. D-PL-11321-11-02
DAkkS Reg. No. D-PL-11321-11-03

Laboratory recognition
Registration No. BNetzA-CAB-16/21-15

Industry Canada test site registration
3050A-2

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C:2019 and RSS-247, Issue 2, 2017-03, and RSS-GEN, Issue 5, Amendment 1, 2019-03

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2020 TÜV SÜD Product Service.

ACCREDITATION

Our BNetzA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our BNetzA Accreditation. Results of tests not covered by our BNetzA Accreditation Schedule are marked NBA (Not BNetzA Accredited).

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuev-sued.com/imprint

Managing Directors:
Dr. Peter Havel (Sprecher / CEO)
Dr. Jens Butenandt
Patrick van Welij

Phone: +49 (0) 9421 55 22-0
Fax: +49 (0) 9421 55 22-99
www.tuev-sued.de

TÜV SÜD Product Service GmbH
Äußere Frühlingstraße 45
94315 Straubing
Germany

Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	4
1.4	EUT Modification Record	5
1.5	Test Location.....	5
2	Test Setups	6
3	Test Details	10
3.1	Radiated Emissions (General Requirements).....	10
4	Measurement Uncertainty	30

TR-69559-79827-1 Annex A Issue 3: Photographs of test setup:3 pages

1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2020-02-07
2	Added references to ISED standards	2020-03-13
3	Added FCC and IC IDs Updated FCC and KdB standard references Moved photo of marking plate in to section 1.2, Renamed Annex A to "Photographs of test setups". Added note to photo of test setup 1 GHz – 40 GHz Added note on page 2.	2020-04-17
4	Corrected typo in FCC ID	2020-07-16
5	Corrected typo in FCC ID	2020-08-20

Table 1

1.2 Introduction

Applicant	ART S.p.A.
Manufacturer	ART S.p.A.
Model Number(s)	TSU
Serial Number(s)	AFTSU000324 and AFTSU0034C6 (For WLAN 5 GHz, 1 GHz – 13 GHz, only)
Note:	Mr. Nicola Scartapacchio, representing Fakt S.p.A. attended tests on 2020-02-06. The EUTs were under his care on this day.
Hardware Version(s)	1.0
Software Version(s)	99.09.00
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C:2019 ISED RSS-247, Issue 2, 2017-03 ISED RSS-GEN, Issue 5, Amendment 1, 2019-03
Test Plan/Issue/Date	---
Order Number	
Date	2020-01-22
Date of Receipt of EUT	2019-10-31 (AFTSU000324) and 2020-02-06 (AFTSU0034C6)
Start of Test	2020-01-23
Finish of Test	2020-02-06
Name of Engineer(s)	Martin Steindl
Related Document(s)	ANSI C63.10 (2013) KDB 558074 D01 V05r02



Product Service



Photo of marking plate

1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and ISED RSS-247 is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: Stand alone configuration Transmitting continuously, Bluetooth				
2.1	15.209, 15.247 RSS-247, Section 5.5	Radiated Emissions (General Requirements)	Pass	
Configuration and Mode: Stand alone configuration Transmitting continuously, WLAN 2.4 GHz				
2.1	15.209, 15.247 RSS-247, Section 5.5	Radiated Emissions (General Requirements)	Pass	
Configuration and Mode: Stand alone configuration Transmitting continuously, WLAN 5 GHz				
2.1	15.209, 15.407 RSS-247, Section 6.2.3.2	Radiated Emissions (General Requirements)	Pass	

Table 2

1.4 EUT Modification Record

The table below details modifications made to the EUT during the test programme.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

1.5 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing Test Laboratory.

Test Name	Name of Engineer(s)
Configuration and Mode: Stand alone configuration	Transmitting continuously, Bluetooth
Radiated Emissions (General Requirements)	Martin Steindl
Configuration and Mode: Stand alone configuration	Transmitting continuously, WLAN 2.4 GHz
Radiated Emissions (General Requirements)	Martin Steindl
Configuration and Mode: Stand alone configuration	Transmitting continuously, WLAN 5 GHz
Radiated Emissions (General Requirements)	Martin Steindl

Table 4


Office Address:

Äußere Frühlingstraße 45

94315 Straubing
Germany

2 Test Setups

2.1.1.1 Radiated Emission in Fully or Semi Anechoic Room

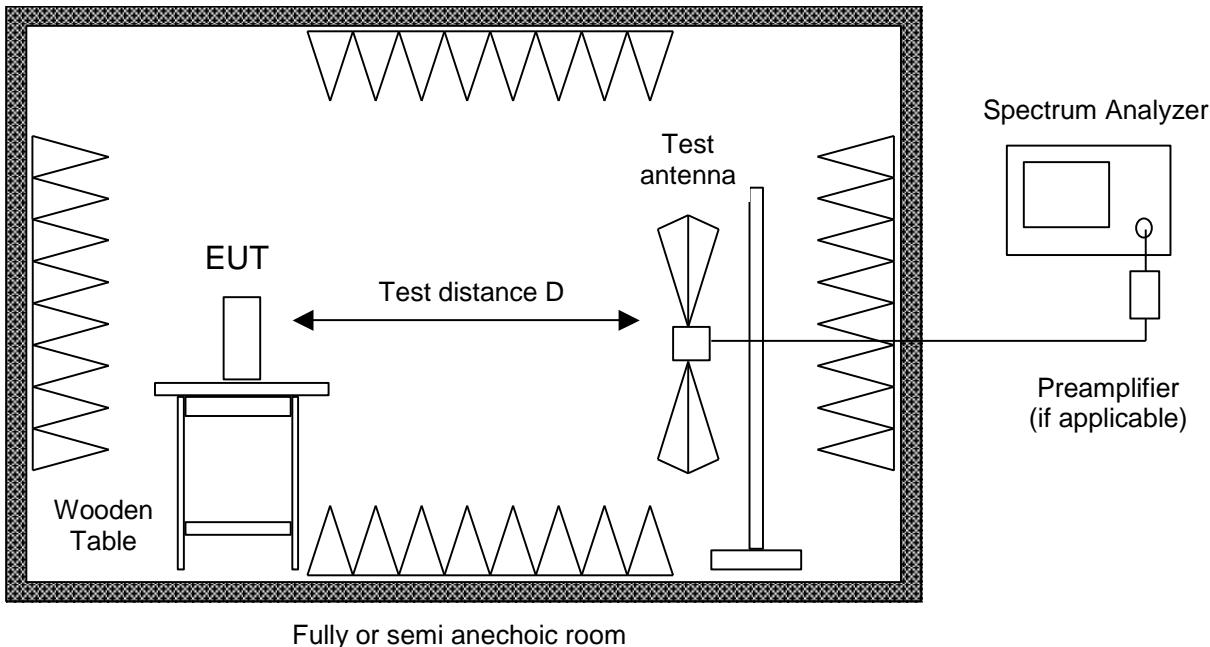

Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.

Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).

Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.

All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 2.1.1.2). If prescans are recorded in fully anechoic room they are indicated appropriately.

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a



fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.


EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

2.1.1.2 Radiated Emission at Alternative Test Site

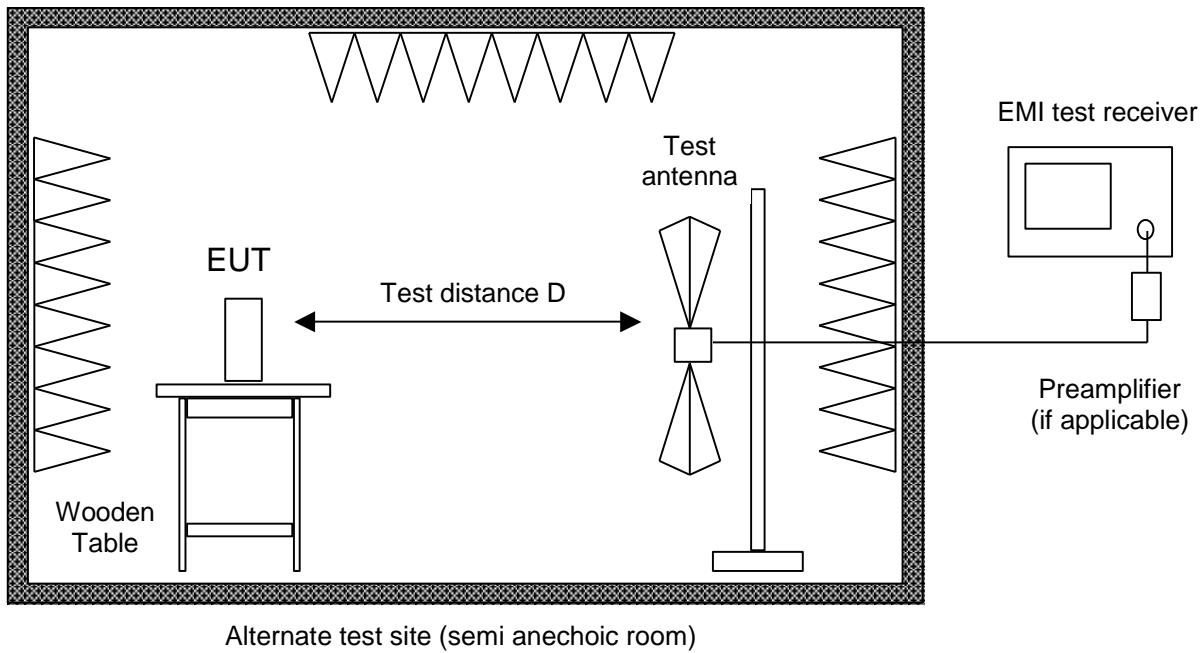

Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.

If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels. Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.

With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified



Product Service

for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.

3 Test Details

3.1 Radiated Emissions (General Requirements)

3.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.209
ISED RSS-247, Sections 5.5 and 6.2.3.2

3.1.2 Equipment Under Test and Modification State

TSU, S/N: AFTSU000324 - Modification State 0
TSU, S/N: AFTSU0034C6 - Modification State 0

3.1.3 Date of Test

2020-01-23 to 2020-02-06

3.1.4 Test Method

The EUT was set up in a semi-anechoic chamber on a remotely controlled turntable and placed on a non-conductive table 0.8m above a reference ground plane for frequencies up to 1 GHz and 1.5 m above reference ground plane for frequencies above 1 GHz. A pre-scan of the EUT emissions profile was made while varying the antenna-to-EUT azimuth and antenna-to-EUT polarization using a peak detector. Using the pre-scan list of the highest emissions detected, their bearing and associated antenna polarization, the EUT was then formally measured using a Quasi-Peak, Peak, Average detector as appropriate. The readings were maximized by adjusting the antenna height, polarization and turntable azimuth, in accordance with the specification.

Frequency range:	Test distance:	Antenna:
9 kHz – 30 MHz:	3 m	HFH2-Z2
30 MHz – 1 GHz:	3 m	HL562E
1 GHz – 13 GHz:	3 m	HF907
13 GHz – 18 GHz:	1 m	HF907
18 GHz – 40 GHz:	3 m	LB-180400H-KF+ TS-LNA1840

3.1.5 Environmental Conditions

Ambient Temperature 22.0 °C
Relative Humidity 30.0 %


3.1.6 Test Results

Stand alone configuration Transmitting continuously and Bluetooth

Limit line outside restricted bands of operations is -20 dBc (peak value relative to carrier emission). For test distances other than 3 m the limit is extrapolated with 40 dB/decade for frequencies less than 30 MHz and 20 dB/decade for frequencies of 30 MHz and above.


Sample calculation of final values:

$$\begin{aligned} \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value (dB}\mu\text{V)} \\ &+ (\text{Cable correction Factor (dB)} \\ &+ \text{Antenna Correction Factor (dB/m)}) \end{aligned}$$

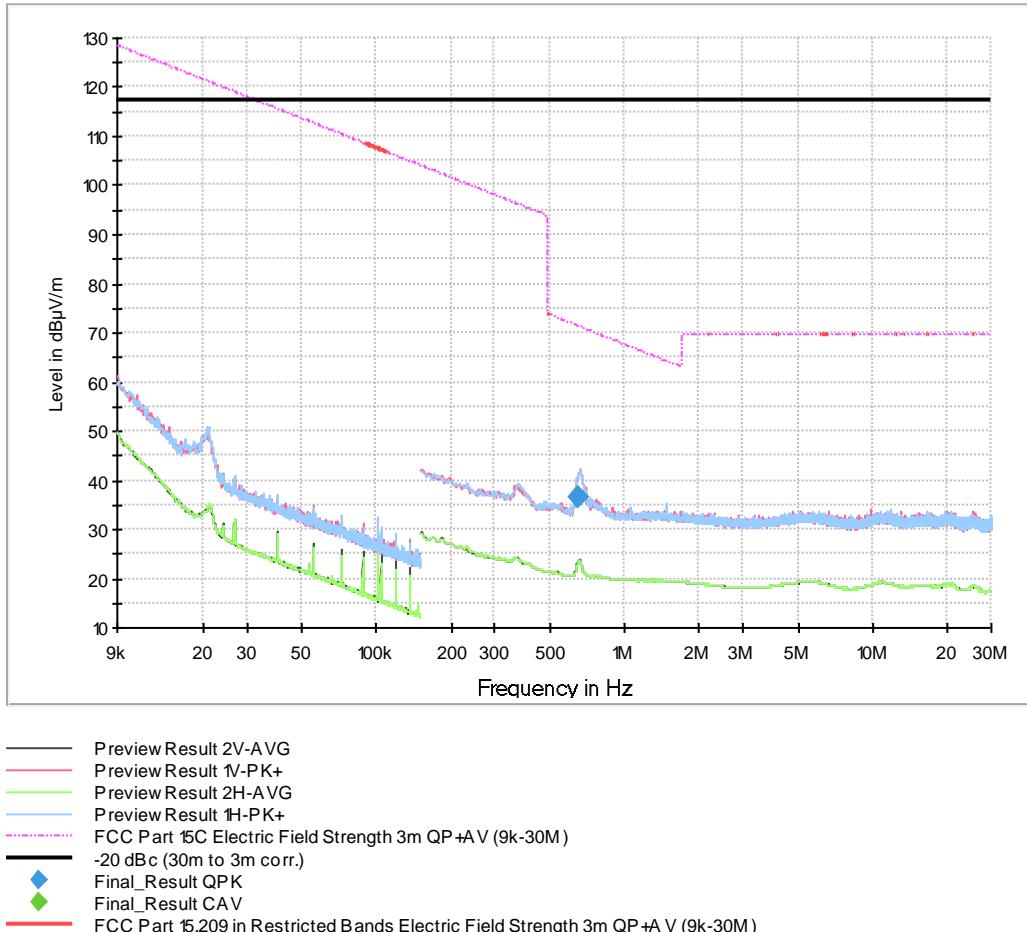


Frequency MHz	QuasiPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
0.654000	36.49		117.31	80.82	1000.0	9.000	100.0	V	-70.0	19.8

Note: -20dBc limit for frequency range 9 kHz – 490 kHz is 157.31 dB μ V/m and is not shown in diagram since not relevant.

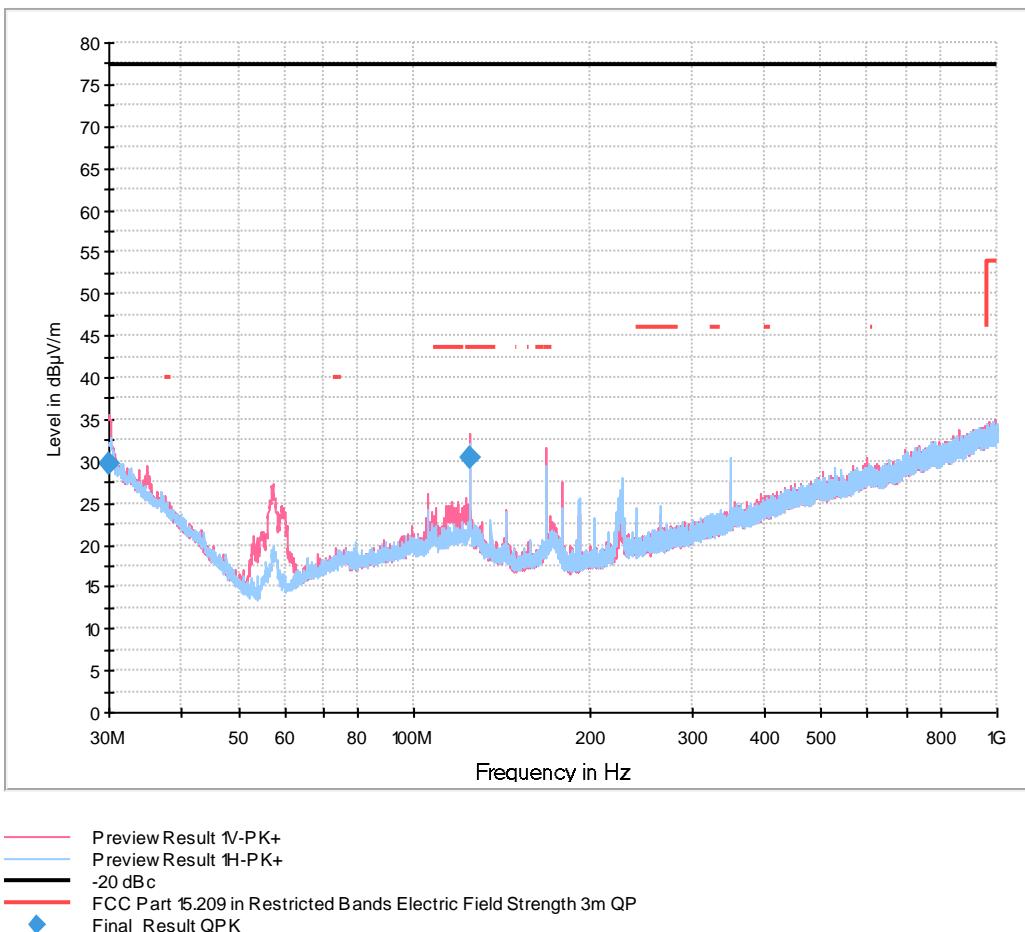


Frequency MHz	QuasiPeak dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
30.000000	29.65	77.31	47.66	1000.0	120.000	100.0	V	183.0	25.8
125.010000	30.48	43.52	13.04	1000.0	120.000	396.0	V	-17.0	17.9

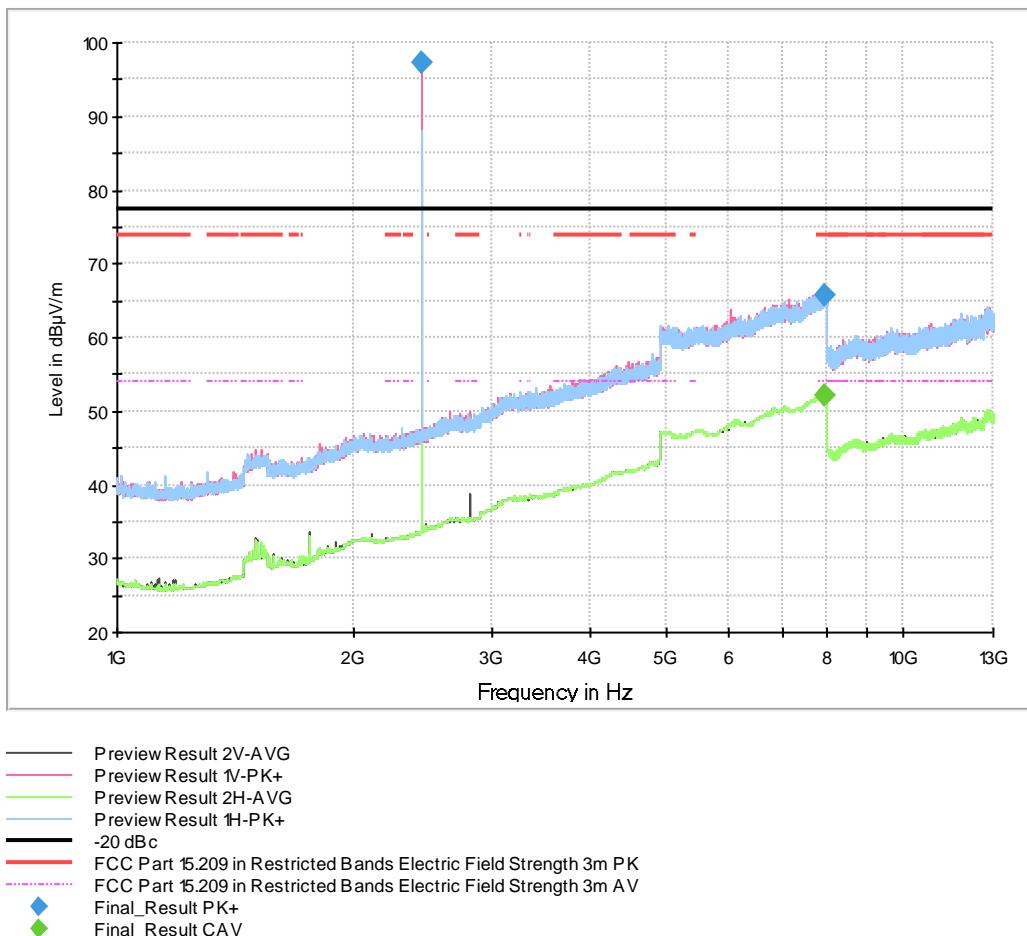


Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
2440.750000	97.31		*	---	1000.0	1000.000	203.0	V	-48.0	32.6
7954.250000	65.67		77.31	11.64	1000.0	1000.000	350.0	H	-91.0	43.4
7954.250000		52.12	**	---	1000.0	1000.000	350.0	H	-91.0	43.4

*: No radiated limit within band of wanted emission

**: No average limit outside of restricted bands of emission

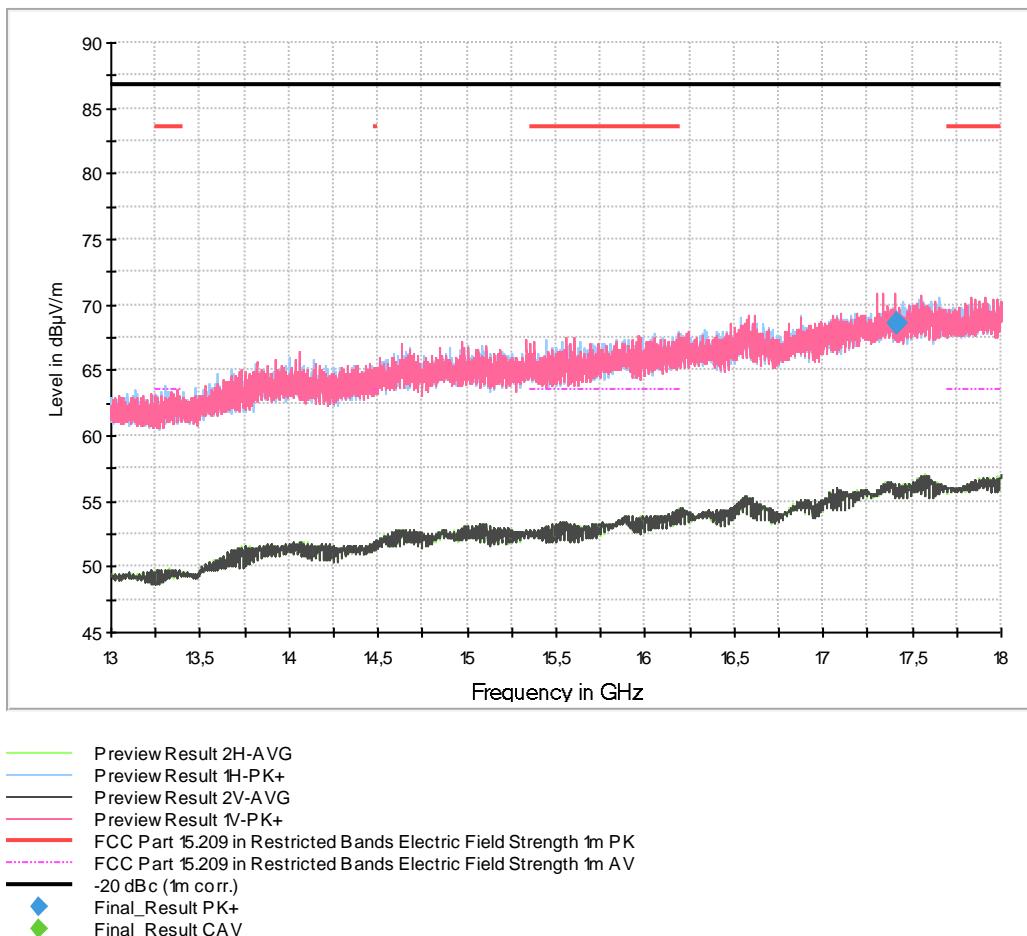

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
17410.500000	68.57		86.81	18.24	1000.0	1000.000	325.0	V	148.0	54.1

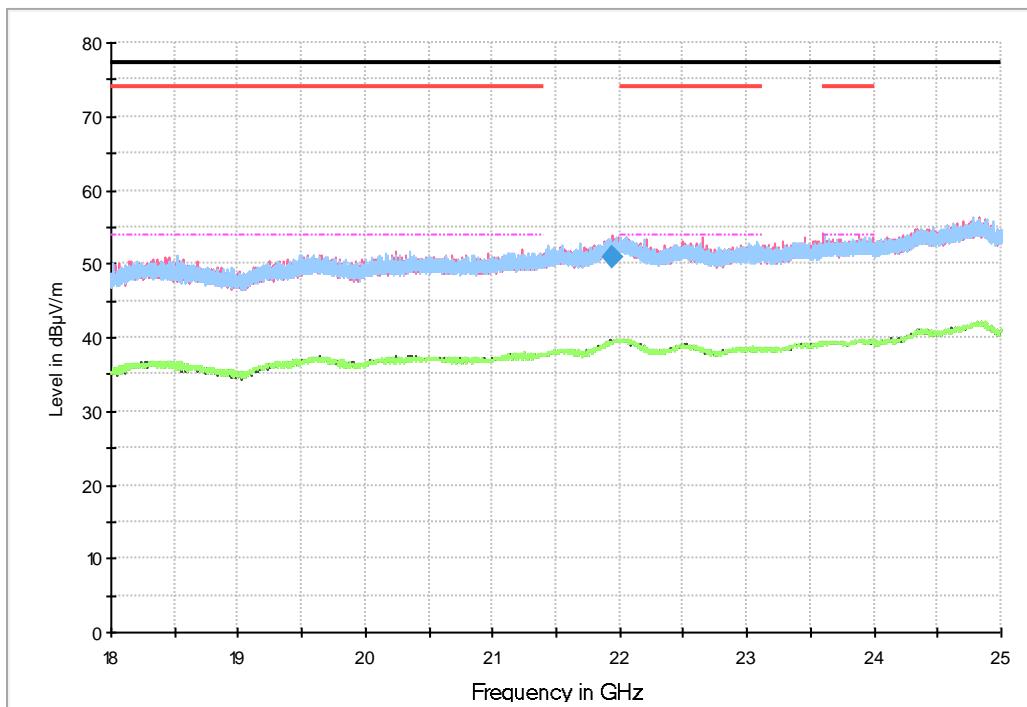

— Preview Result 2V-AVG
— Preview Result 1V-PK+
— Preview Result 2H-AVG
— Preview Result 1H-PK+
— FCC Part 15.209 in Restricted Bands Electric Field Strength 3m PK
- - - - FCC Part 15.209 in Restricted Bands Electric Field Strength 3m AV
— -20 dBc
◆ Final_Result PK+
◆ Final_Result CAV


Frequency MHz	MaxPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
21941.250000	50.90		77.31	26.41	1000.0	1000.000	270.0	V	64.0	19.2

Stand alone configuration Transmitting continuously and WLAN 2.4 GHz

Limit line outside restricted bands of operations is -20 dBc (peak value relative to carrier emission). For test distances other than 3 m the limit is extrapolated with 40 dB/decade for frequencies less than 30 MHz and 20 dB/decade for frequencies of 30 MHz and above.


Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable correction Factor (dB)} + \text{Antenna Correction Factor (dB/m)})$$

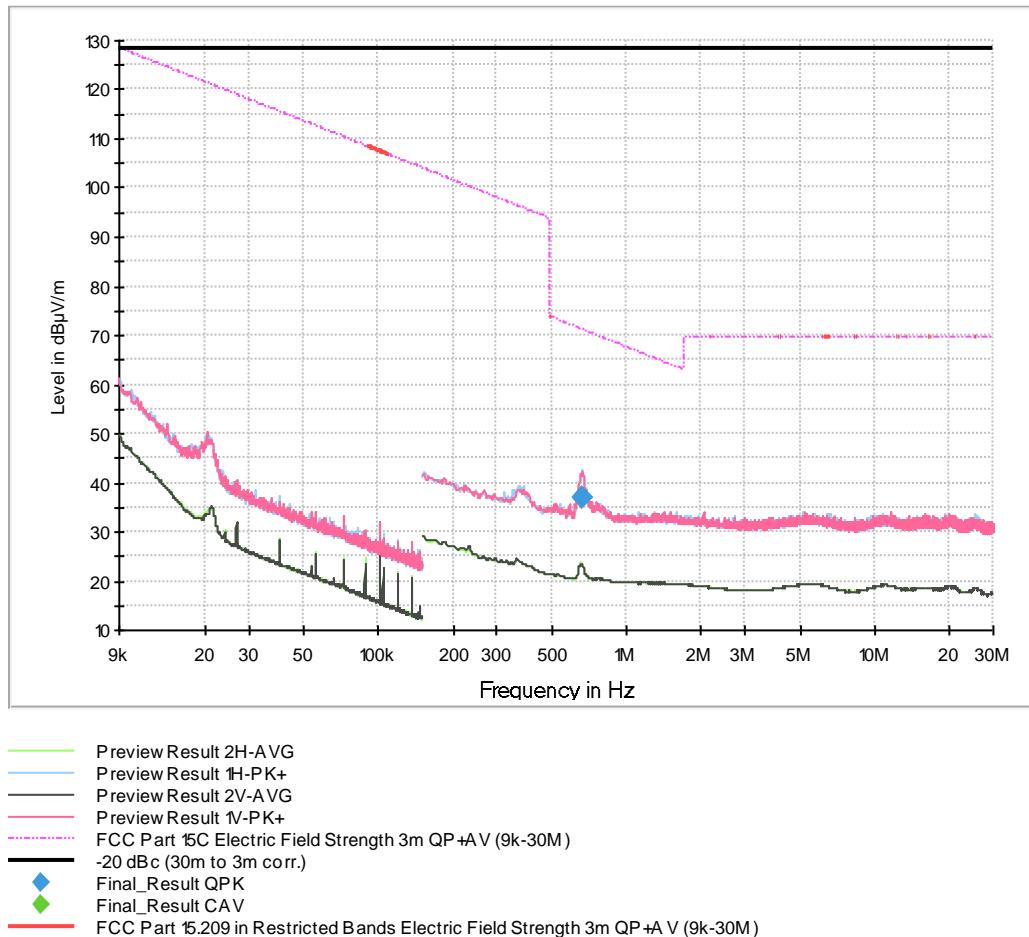


Frequency MHz	QuasiPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
0.656250	36.74		128.17	91.43	1000.0	9.000	100.0	H	-87.0	19.8

Note: -20dBc limit for frequency range 9 kHz – 490 kHz is 168.17 dB μ V/m and is not shown in diagram since not relevant.

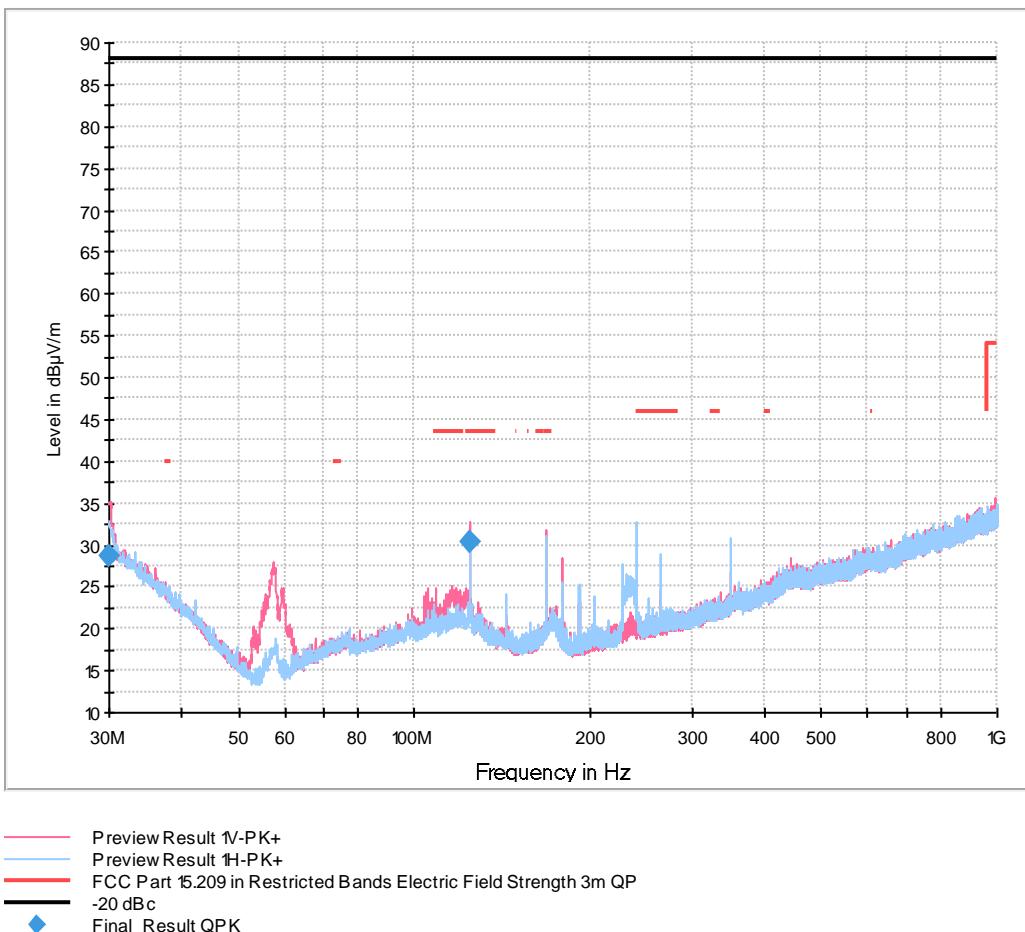


Frequency MHz	QuasiPeak dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m	Comment
30.030000	28.62	88.17	59.55	1000.0	120.000	100.0	V	214.0	25.8	
125.010000	30.35	43.52	13.17	1000.0	120.000	400.0	V	149.0	17.9	

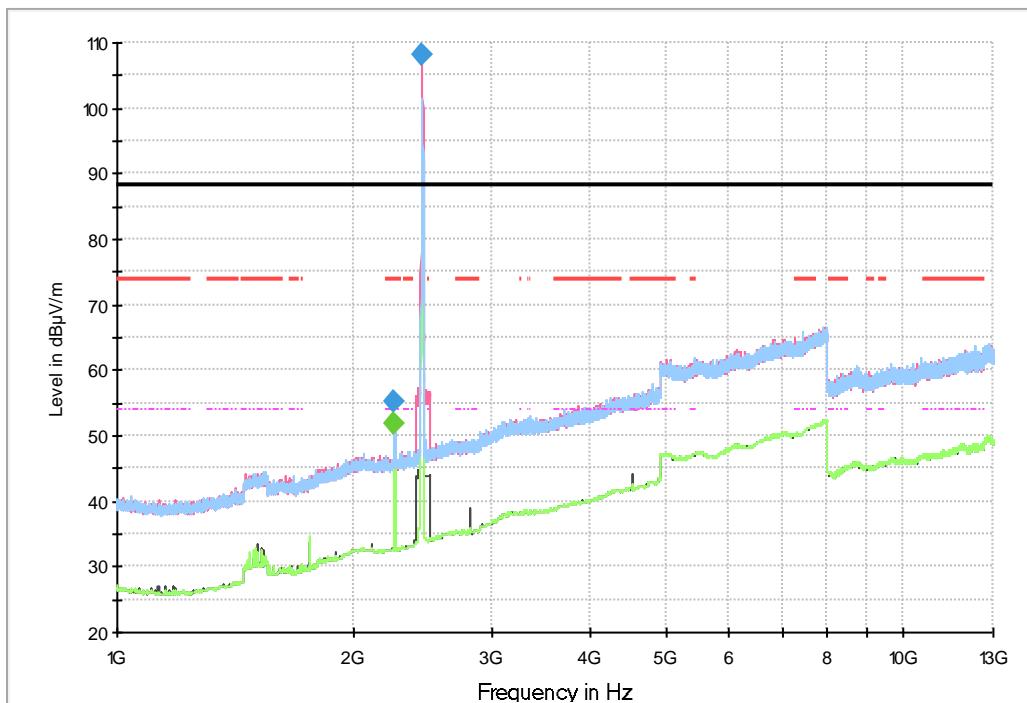

— Preview Result 2V-AVG
— Preview Result 1V-PK+
— Preview Result 2H-AVG
— Preview Result 1H-PK+
— FCC Part 15.209 in Restricted Bands Electric Field Strength 3m PK
— FCC Part 15.209 in Restricted Bands Electric Field Strength 3m AV
◆ Final_Result PK+
◆ Final_Result CAV
— -20 dBc


Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
2254.250000	55.12		73.98	18.86	1000.0	1000.000	111.0	H	195.0	31.9
2254.250000		51.81	53.98	2.17	1000.0	1000.000	111.0	H	195.0	31.9
2442.000000	108.17	*			1000.0	1000.000	200.0	V	-115.0	32.6

*: No radiated limit within band of wanted emission

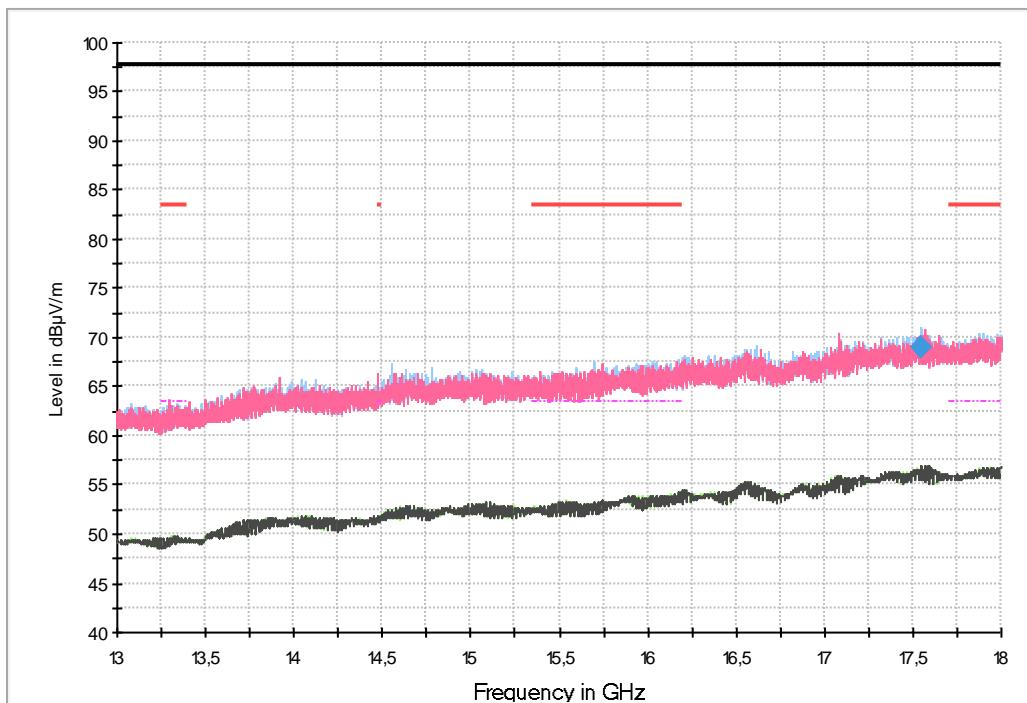

- Preview Result 2H-AVG
- Preview Result 1H-PK+
- Preview Result 2V-AVG
- Preview Result 1V-PK+
- FCC Part 15.209 in Restricted Bands Electric Field Strength 1m PK
- FCC Part 15.209 in Restricted Bands Electric Field Strength 1m AV
- 20 dBc (3m to 1m corr.)
- Final_Result PK+
- Final_Result CAV

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
17552.000000	68.88		97.67	28.79	1000.0	1000.000	125.0	H	166.0	54.4

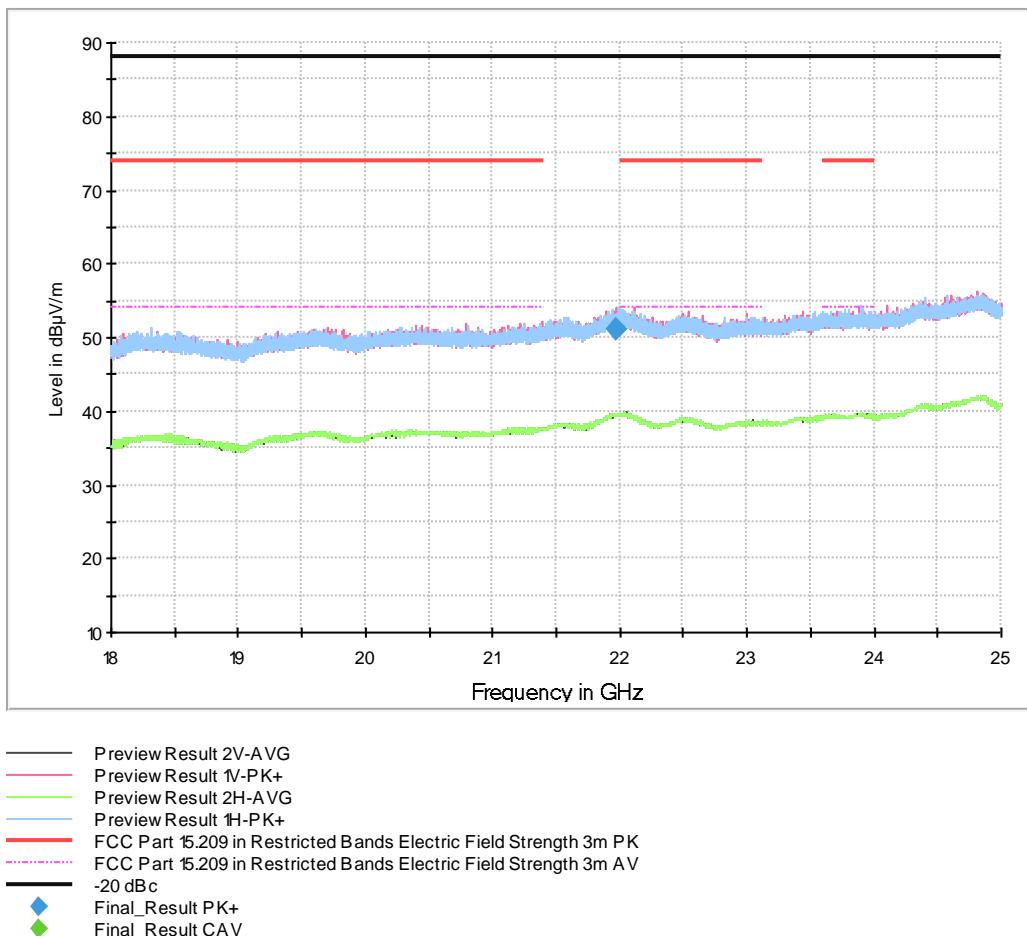

Frequency MHz	MaxPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
21971.750000	51.22		88.17	36.95	1000.0	1000.000	325.0	V	198.0	19.1


Stand alone configuration Transmitting continuously and WLAN 5 GHz


Up to 1 GHz standard radiated emission limits apply.

-20 dBm e.i.r.p. is equivalent to a electric field strength of 68.23 dB μ V/m at 3 m distance and 77.77 dB μ V/m at 1 m distance.


Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable correction Factor (dB)} + \text{Antenna Correction Factor (dB/m)})$$

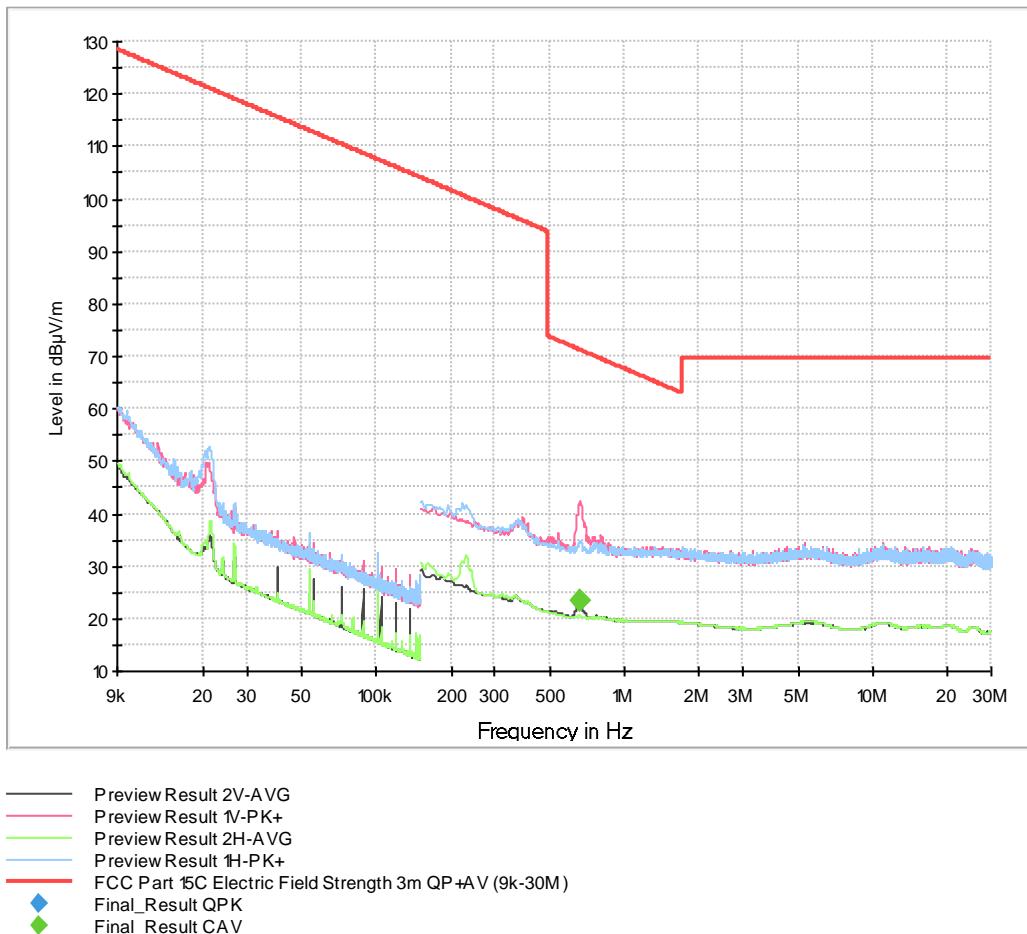

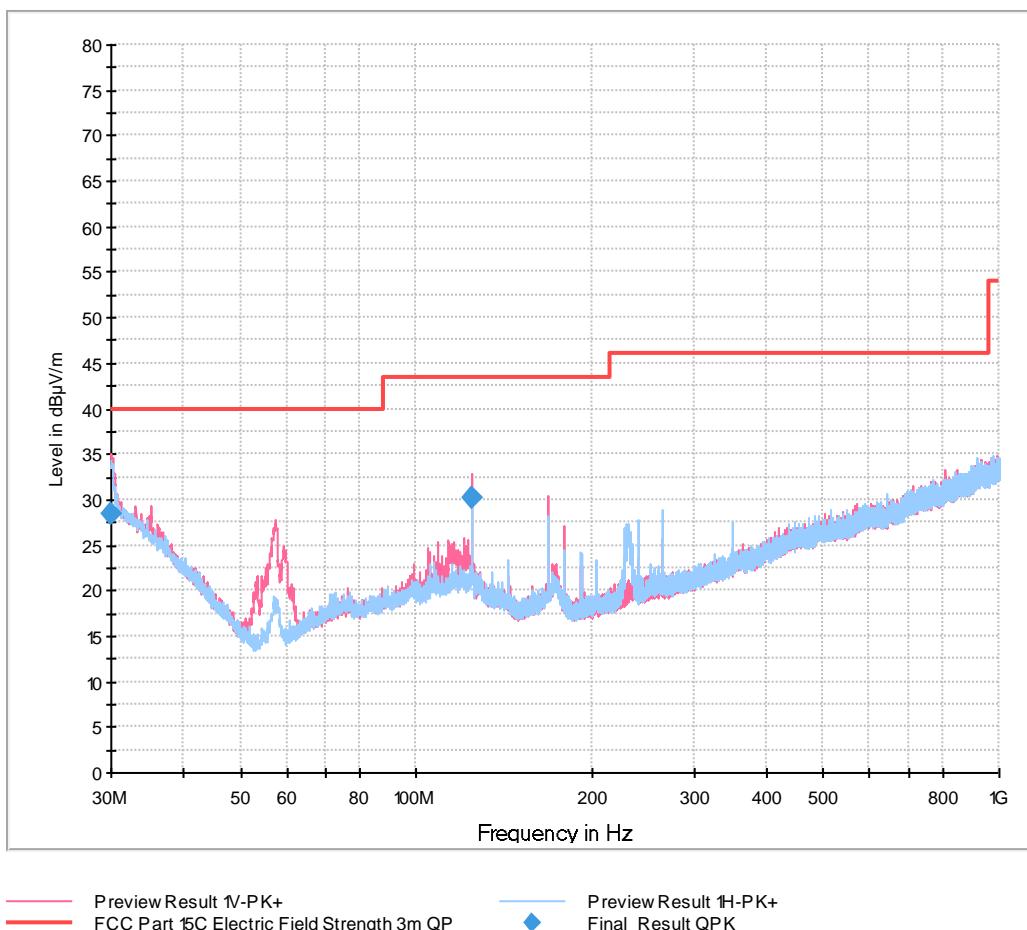


Frequency MHz	QuasiPeak dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
30.060000	28.52	40.00	11.48	1000.0	120.000	100.0	V	117.0	25.8
125.010000	30.20	43.50	13.30	1000.0	120.000	396.0	V	183.0	17.9

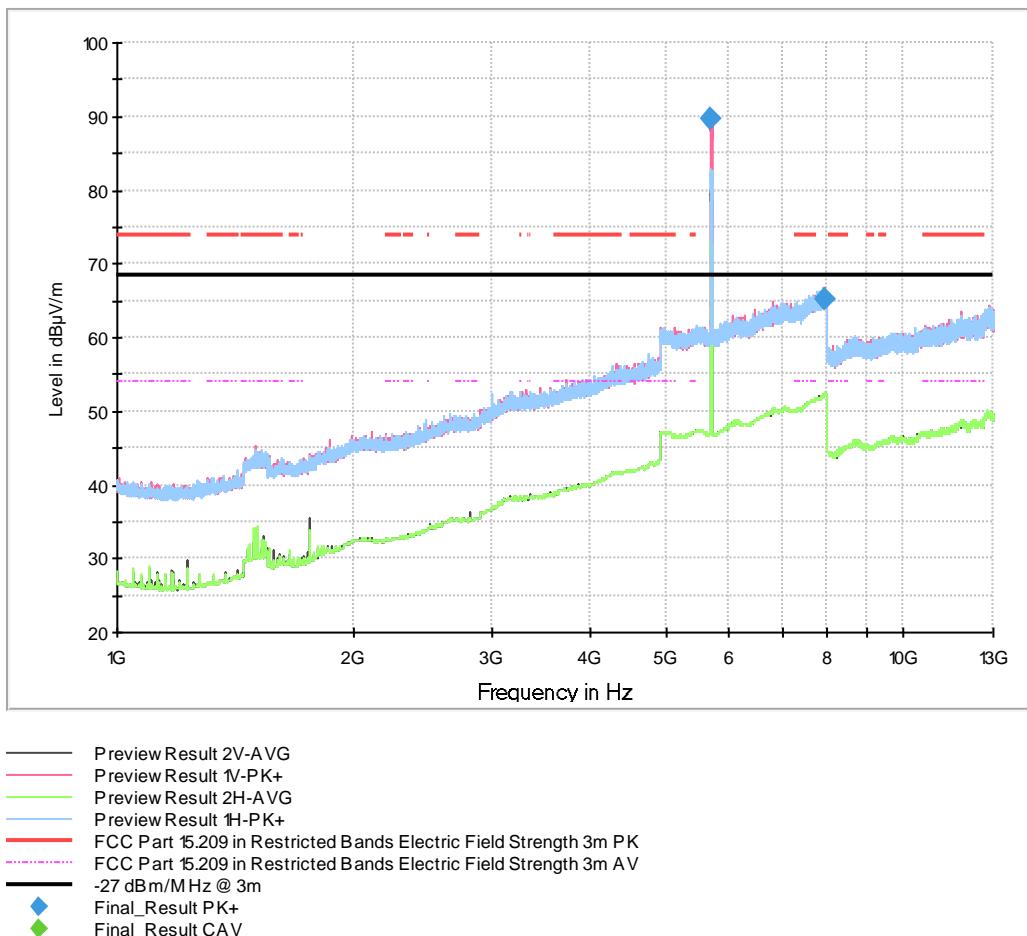


Frequency MHz	MaxPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
5697.250000	89.73		*		1000.0	1000.000	300.0	V	227.0	40.3
7956.250000	65.18		68.23	3.05	1000.0	1000.000	325.0	V	-50.0	43.4

*: No radiated limit within band of wanted emission

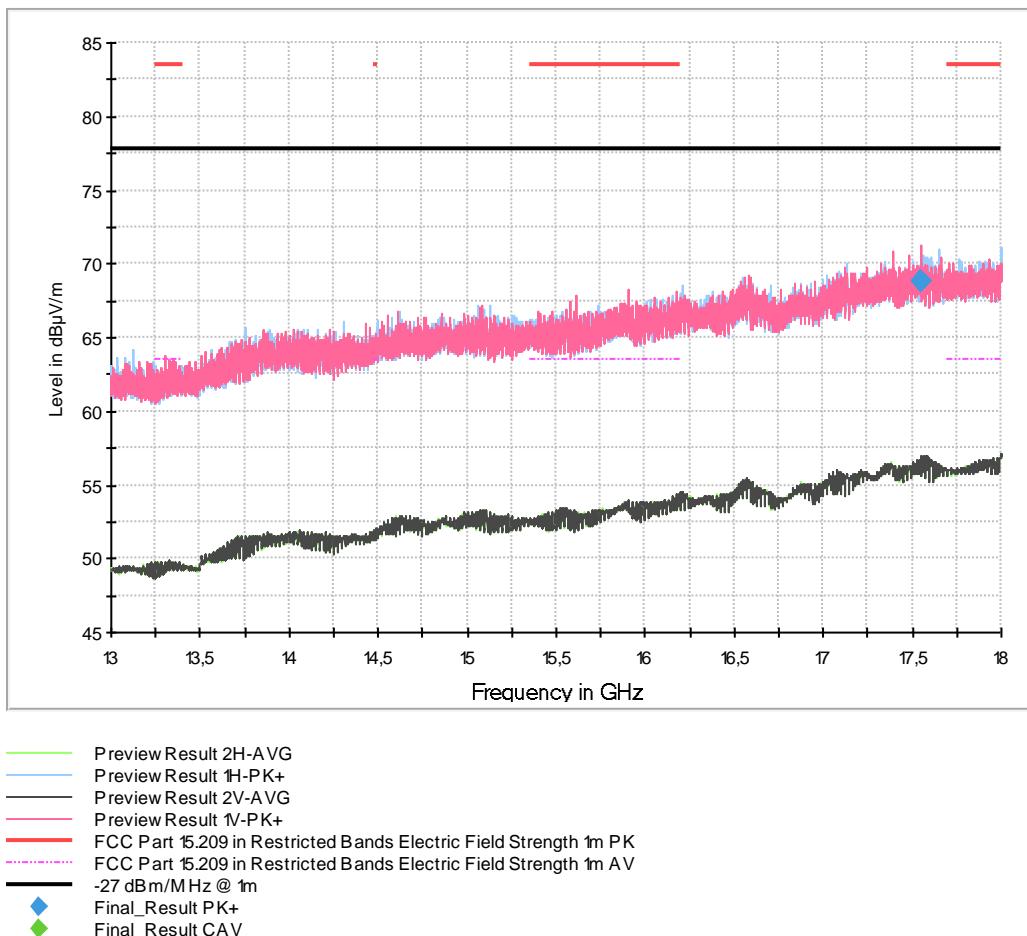

Frequency MHz	MaxPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
17553.000000	68.86		77.77	8.91	1000.0	1000.000	107.0	V	-132.0	54.4

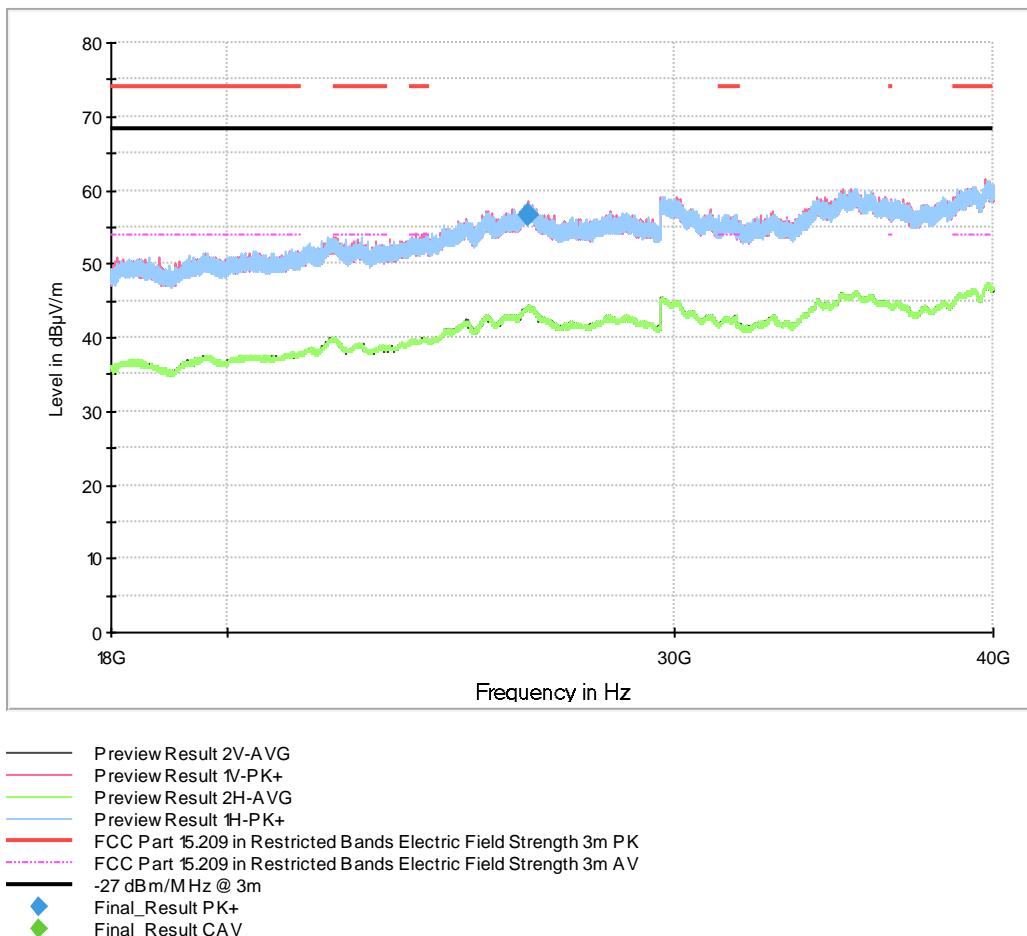

Frequency MHz	MaxPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
26252.750000	56.54		68.23	11.69	1000.0	1000.000	121.0	V	-17.0	22.6



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 to 0.490	2400/F(kHz)	300
0.490 to 1.705	24000/F(kHz)	30
1.705 to 30	30	30
30 to 88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960	500	3

Table 5 - FCC Limit Table

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuator required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).



FCC 47 CFR Part 15, Limit Clause 15.407(b)

Expect as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15 GHz – 5.25 GHz band: All emissions outside of the 5.15 GHz – 5.25 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25 GHz – 5.35 GHz band: All emissions outside of the 5.25 GHz – 5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47 GHz – 5.725 GHz band: All emissions outside of the 5.47 GHz – 5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725 GHz – 5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of -27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (5) The emission measured shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (7) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.



RSS-GEN, Section 8.9 Transmitter emission limits

Frequency (MHz)	Field Strength (μ V/m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 6 – General field strength limits at frequencies above 30 MHz

Frequency	Magnetic Field Strength (μ A/m)	Measurement Distance (m)
9 kHz – 490 kHz	6.37/F(kHz)	300
490 kHz – 1705 kHz	63.7/F(kHz)	30
1.705 MHz – 30 MHz	0.08	30
Note 1: The emission limits for the ranges 9 kHz – 90 kHz and 110 kHz – 490 kHz are based on measurements employing a linear average detector.		
Note 2: Electric field strength (E) and magnetic field strength (H) can be converted by $E = H Z_0$ with $Z_0 = 377 \Omega$		

Table 7 – General field strength limits at frequencies below 30 MHz

RSS-247, Section 5.5 Unwanted emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiate measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuator shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-GEN is not required.

RSS-247, Section 6.2.3.2 Unwanted emission limits

Devices operating in the 5470 MHz – 5850 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz at 5850 MHz instead of 5725 MHz.

3.1.7 Test Location and Test Equipment Used

This test was carried out in Semi anechoic room - cabin no. 11

T-ID	Designation	Type	Serial number	Last Cal.	Valid until	Manufacturer
18876	Loop antenna	HFH2-Z2	882964/0001	13.12.2019	31.12.2022	Rohde & Schwarz GmbH & Co. KG
39897	EMI test receiver	ESW44	101814	22.02.2019	29.02.2020	Rohde & Schwarz GmbH & Co. KG
39969	ULTRALOG Antenna	HL562E	101062	07.11.2019	30.11.2022	Rohde & Schwarz GmbH & Co. KG
40089	Double ridged horn antenna	HF907	102777	08.02.2019	28.02.2021	Rohde & Schwarz GmbH & Co. KG
42961	Semi anechoic room	Cabin no. 11		29.08.2019	31.08.2022	Frankonia
42986	EMC measurement software	EMC32 Emission K11 - V10.50.10				Rohde & Schwarz GmbH & Co. KG
42987	Tilting antenna mast	BAM 4.0P	224/2621.01			maturo GmbH
43661	Horn Antenna with preamplifier	A-INFOMW LB-180400H-KF+ TS-LNA1840	J211060442+101010	07.10.2019	31.10.2020	Rohde & Schwarz GmbH & Co. KG

4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Testing			
Test Name	kp	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	$\pm 1.14 \%$	2
RF-Frequency error	1.96	$\pm 1 \cdot 10^{-7}$	7
RF-Power, conducted carrier	2	$\pm 0.079 \text{ dB}$	2
RF-Power uncertainty for given BER	1.96	$+0.94 \text{ dB} / -1.05$	7
RF power, conducted, spurious emissions	1.96	$+1.4 \text{ dB} / -1.6 \text{ dB}$	7
RF power, radiated			
25 MHz – 4 GHz	1.96	$+3.6 \text{ dB} / -5.2 \text{ dB}$	8
1 GHz – 18 GHz	1.96	$+3.8 \text{ dB} / -5.6 \text{ dB}$	8
18 GHz – 26.5 GHz	1.96	$+3.4 \text{ dB} / -4.5 \text{ dB}$	8
40 GHz – 170 GHz	1.96	$+4.2 \text{ dB} / -7.1 \text{ dB}$	8
Spectral Power Density, conducted	2.0	$\pm 0.53 \text{ dB}$	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	$\pm 2.89 \%$	2
6 kHz – 25 kHz	2	$\pm 0.2 \text{ dB}$	2
Maximum frequency deviation for FM	2	$\pm 2.89 \%$	2
Adjacent channel power 25 MHz – 1 GHz	2	$\pm 2.31 \%$	2
Temperature	2	$\pm 0.39 \text{ K}$	4
(Relative) Humidity	2	$\pm 2.28 \%$	2
DC- and low frequency AC voltage			
DC voltage	2	$\pm 0.01 \%$	2
AC voltage up to 1 kHz	2	$\pm 1.2 \%$	2
Time	2	$\pm 0.6 \%$	2

Table 8

Radio Interference Emission Testing			
Test Name	kp	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50µH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50µH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5µH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50µH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50µH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			4
Voltage Changes, Voltage Fluctuations and Flicker			4

Table 9

Immunity Testing			
Test Name	kp	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

Table 10

Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $kp = 2.05$, providing a level of confidence of $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Note 7:

The expanded uncertainty reported according ETSI TR 100 028 V1.4.1 (all parts) to is based on a standard uncertainty multiplied by a coverage factor of $kp = 1.96$, providing a level of confidence of $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $kp = 1.96$, providing a level of confidence of $p = 95.45\%$