



FCC Part 15C Test Report

FCC ID: 2AUH9-Q83

Product Name:	Q83 Omni8 Tablet PC
Trademark:	Vizualogic
Model Name :	Q83
Prepared For :	Vizualogic LLC
Address :	1493 Bentley Drive, Corona, California 92879, United States
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Aug. 12, 2019 – Aug. 20, 2019
Date of Report :	Aug. 20, 2019
Report No.:	BCTC-LH190800839E



VERIFICATION OF COMPLIANCE

Applicant's name Vizualogic LLC

Address 1493 Bentley Drive, Corona, California 92879, United States

Manufacture's Name ... Vizualogic LLC

Address 1493 Bentley Drive, Corona, California 92879, United States

Product description

Product name..... Q83 Omni8 Tablet PC

Trademark: Vizualogic

Model Name: Q83

FCC Part15.239

Test Standards: ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result..... **Pass**

Prepared by(Engineer): Willem Wang

Willem Wang



Reviewer(Supervisor): Eric Yang

Approved(Manager): Zero Zhou



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE	13
3.1.3 DEVIATION FROM TEST STANDARD	13
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 TEST SETUP	16
3.2.4 EUT OPERATING CONDITIONS	17
3.2.5 TEST RESULTS	18
3.2.6 TEST RESULTS (1GHZ~6GHZ)	25
4 . BANDWIDTH TEST	26
4.1 APPLIED PROCEDURES / LIMIT	26
4.1.1 TEST PROCEDURE	26
4.1.2 DEVIATION FROM STANDARD	26
4.1.3 TEST SETUP	26
4.1.4 EUT OPERATION CONDITIONS	26
4.1.5 TEST RESULTS	27
5 . BAND EDGE MEASUREMENT	29
5.1 APPLICABLE STANDARD	29
5.2 TEST PROCEDURE	29
5.3 DEVIATION FROM STANDARD	29
5.4 TEST SETUP	29



Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	29
6 . ANTENNA REQUIREMENT	32
6.1 STANDARD REQUIREMENT	32
6.2 EUT ANTENNA	32
7 . EUT TEST PHOTO	33
8 . EUT PHOTO	34
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.239) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.209&15.239	Fundamental &Radiated Spurious Emission Measurement	PASS	
15.239a	Occupy Bandwidth	PASS	
15.203	Antenna Requirement	PASS	
15.239a	Band Edge Measurement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Address: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.3\text{dB}$
2	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=4.5\text{dB}$
3	3m chamber Radiated spurious emission(18GHz-40GHz)	$U=3.34\text{dB}$
4	Conducted Adjacent channel power	$U=1.38\text{dB}$
5	Conducted output power uncertainty Above 1G	$U=1.576\text{dB}$
6	Conducted output power uncertainty below 1G	$U=1.28\text{dB}$
7	humidity uncertainty	$U=5.3\%$
8	Temperature uncertainty	$U=0.59 \text{ }^{\circ}\text{C}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Q83 Omni8 Tablet PC									
Trade Name	Vizualogic									
Model Name	Q83									
Model Difference	N/A .									
Product Description	<table border="1"><tr><td>Operation Frequency:</td><td>88.1 MHz ~107.7MHz</td></tr><tr><td>Modulation Type:</td><td>FM</td></tr><tr><td>Antenna Type:</td><td>FPCB antenna</td></tr><tr><td>Antenna Gain:</td><td>4.87dBi</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>		Operation Frequency:	88.1 MHz ~107.7MHz	Modulation Type:	FM	Antenna Type:	FPCB antenna	Antenna Gain:	4.87dBi
Operation Frequency:	88.1 MHz ~107.7MHz									
Modulation Type:	FM									
Antenna Type:	FPCB antenna									
Antenna Gain:	4.87dBi									
Ratings	DC 12V									
Connecting I/O Port(s)	Please refer to the User's Manual									

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF TEST MODES

For All Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH50
Mode 3	CH99
Mode 4	Link mode(conducted emission and Radiated emission)


Channel	Frequency (MHz)
01	88.1
02	88.3
03	88.5
~	~
98	107.5
99	107.7

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test





2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Device Type	Brand	Model	Series No.	Data Cable
E-1	Q83 Omni8 Tablet PC	Vizualogic	Q83 ,	N/A	EUT
E-2	Battery	N/A	B001	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 13, 2019	Jun. 12, 2020
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 13, 2019	Jun. 12, 2020
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	Jun. 22, 2019	Jun. 21, 2020
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Jun. 22, 2019	Jun. 21, 2020
5	Horn Antenna (18GHz-40GHz)	SCHWARZBECK	BBHA9170	822	Jun. 22, 2019	Jun. 21, 2020
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
7	Amplifier (0.5GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	Jun. 17, 2019	Jun. 16, 2020
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Jul. 02, 2019	Jul. 01, 2020
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 25, 2019	Jun. 24, 2020
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 25, 2019	Jun. 24, 2020
13	Power Meter	Keysight	E4419	\	Jun. 17, 2019	Jun. 16, 2020
14	Power Sensor (AV)	Keysight	E9 300A	\	Jun. 17, 2019	Jun. 16, 2020
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 13, 2019	Jun. 12, 2020
16	Spectrum Analyzer 9kHz-40GHz	Aglient	FSP40	100363	Jun. 13, 2019	Jun. 12, 2020
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\



Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
2	LISN	SCHWARZBEC K	NSLK8127	8127739	Jun. 13, 2019	Jun. 12, 2020
3	LISN	R&S	ENV216	101375	Jun. 13, 2019	Jun. 12, 2020
4	RF cables	Huber+Suhner	9kHz-30MHz	B1702988-00 08	Jun. 25, 2019	Jun. 24, 2020
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQU□NCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

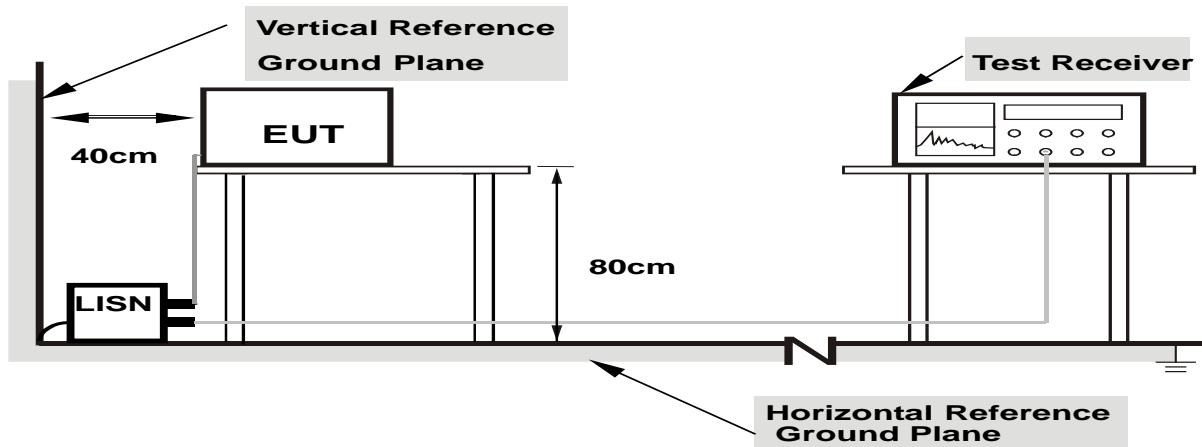

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS

NOTE: This EUT is powered by the battery only, this test item is not applicable.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.209&15.239 limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(micorvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW setting	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case was X axis and the emissions were reported




3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

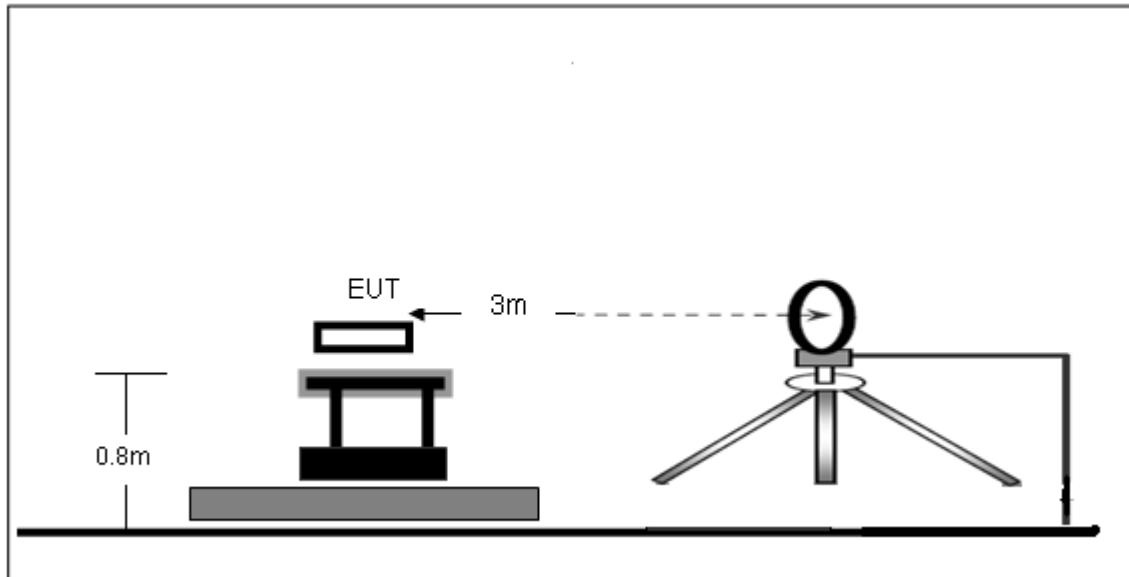

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

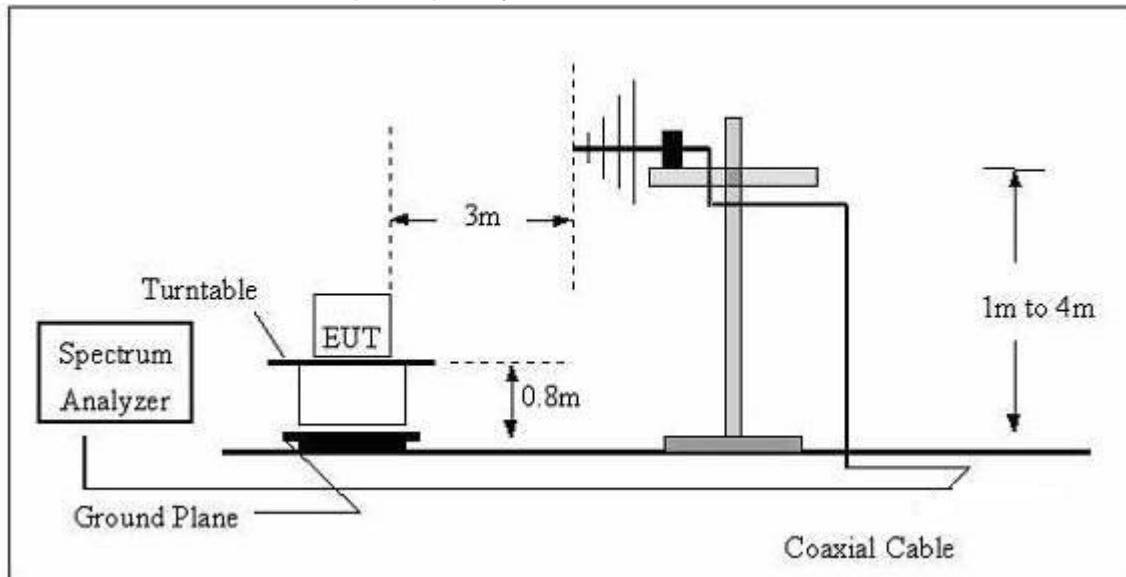

(C) Radiated Emission Test-Up Frequency Above 1GHz

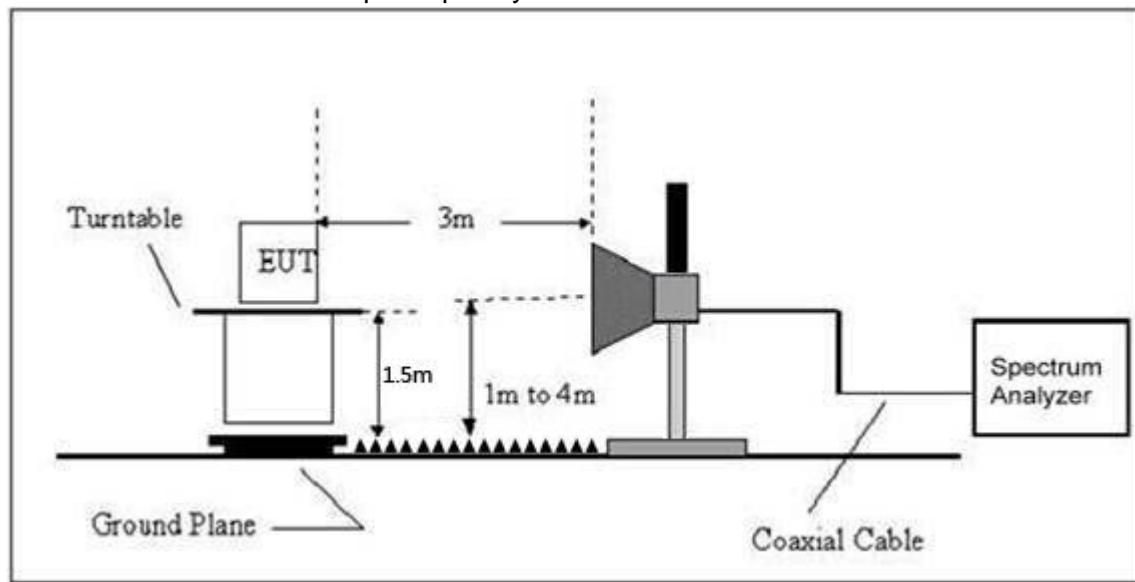

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.5 TEST RESULTS

Radiated Spurious Emission (Below 9KHz – 30MHz)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	---
Test Voltage :	DC 12V		
Test Mode :	TX Mode		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
Limit line = specific limits(dBuv) + distance extrapolation factor.

Radiated Spurious Emission (Between 30MHz – 1GHz)

Temperature :	26 °C	Relative Humidity :	54%
---------------	-------	---------------------	-----



Pressure :	101kPa	Phase :	H
Test Voltage :	DC 12V	Test Mode :	Mode 1(88.1MHz)

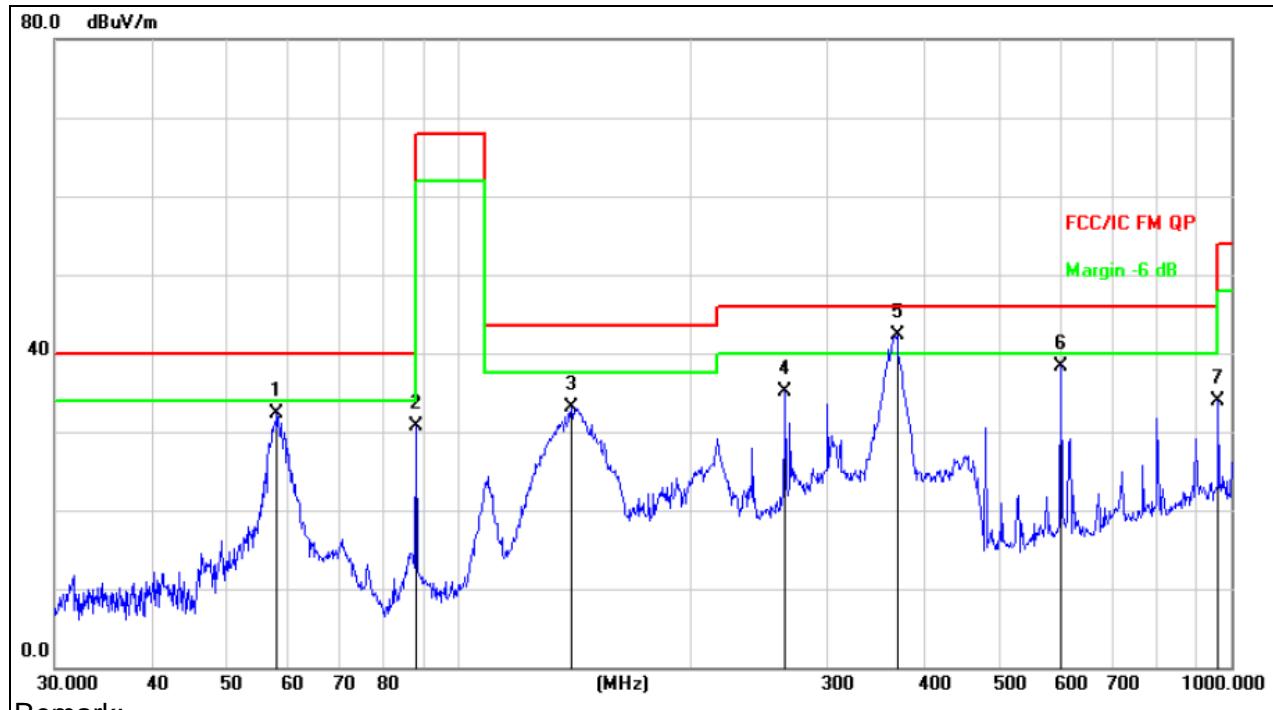


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct Factor	Measure-	Limit	Over	
			Level		m			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		58.2030	48.07	-15.72	32.35	40.00	-7.65	QP
2		88.0329	49.35	-18.55	30.80	68.00	-37.20	peak
3		139.8508	52.00	-18.85	33.15	43.50	-10.35	QP
4		264.7457	49.87	-14.69	35.18	46.00	-10.82	QP
5	*	369.4047	54.13	-11.79	42.34	46.00	-3.66	QP
6		601.4265	44.91	-6.53	38.38	46.00	-7.62	QP
7		962.1623	34.95	-1.04	33.91	54.00	-20.09	QP



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	V
Test Voltage :	DC 12V	Test Mode :	Mode 1(88.1MHz)

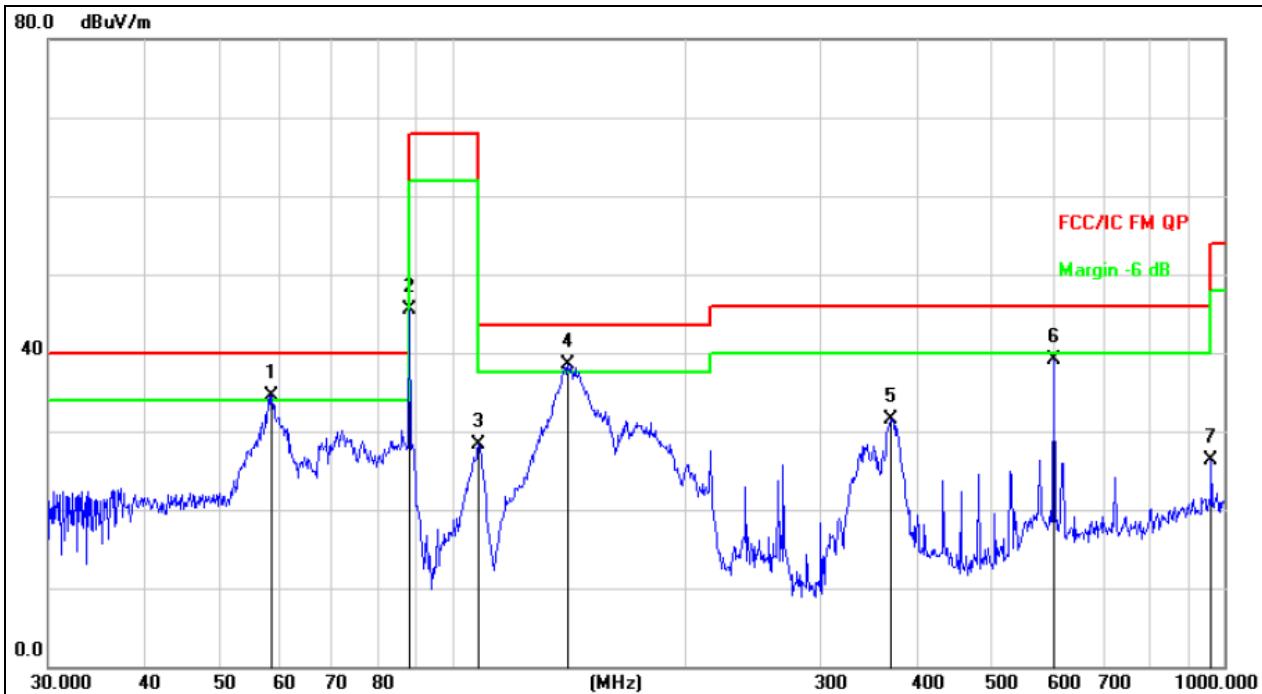


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB/m	dB
1	!	58.4074	50.28	-15.74	34.54	40.00	-5.46
2		88.0329	64.11	-18.55	45.56	68.00	-22.44
3		108.2667	45.03	-16.81	28.22	43.50	-15.28
4	*	141.3298	57.53	-18.94	38.59	43.50	-4.91
5		370.7023	43.33	-11.76	31.57	46.00	-14.43
6		601.4265	45.64	-6.53	39.11	46.00	-6.89
7		962.1623	27.25	-1.04	26.21	54.00	-27.79




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	H
Test Voltage :	DC 12V	Test Mode :	Mode 2(97.9MHz)

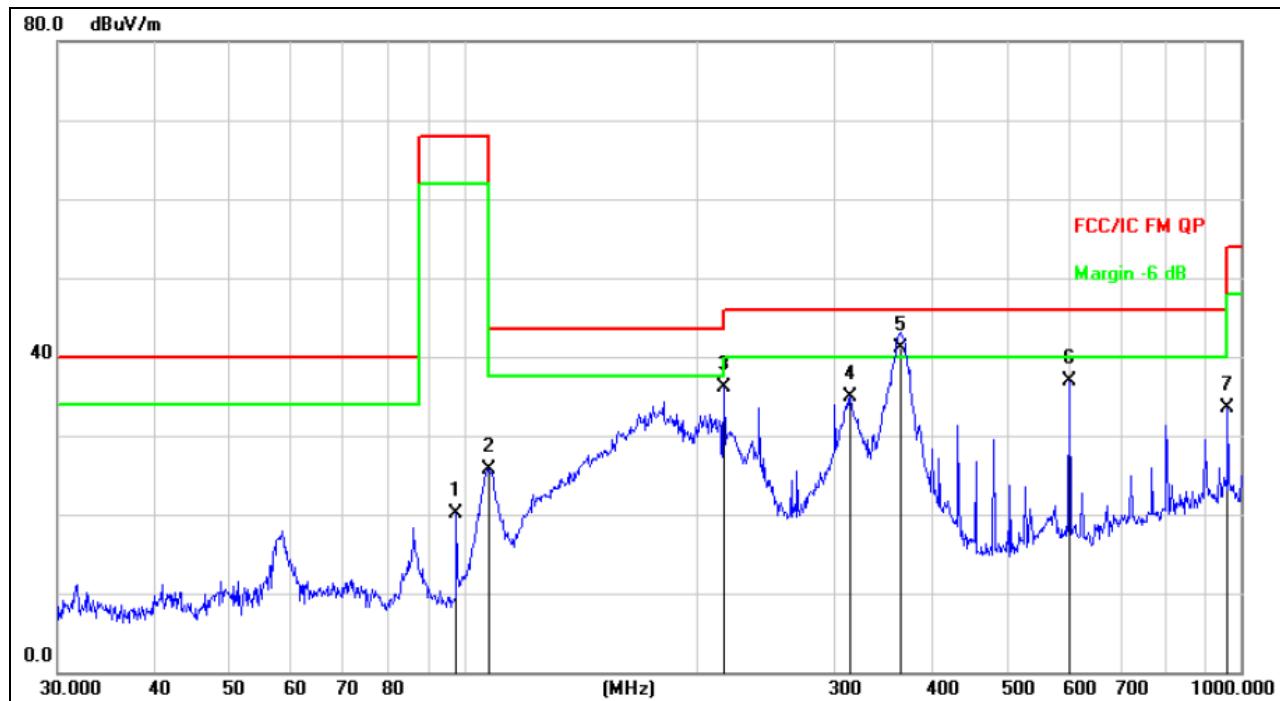

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB/m	dB
1		97.7983	36.71	-16.68	20.03	68.00	-47.97
2		107.8877	42.54	-16.79	25.75	68.00	-42.25
3		216.0240	52.04	-15.93	36.11	46.00	-9.89
4		314.3765	48.18	-13.21	34.97	46.00	-11.03
5	*	365.5391	53.08	-11.88	41.20	46.00	-4.80
6		601.4265	43.49	-6.53	36.96	46.00	-9.04
7		962.1623	34.57	-1.04	33.53	54.00	-20.47




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	V
Test Voltage :	DC 12V	Test Mode :	Mode 2(97.9MHz)

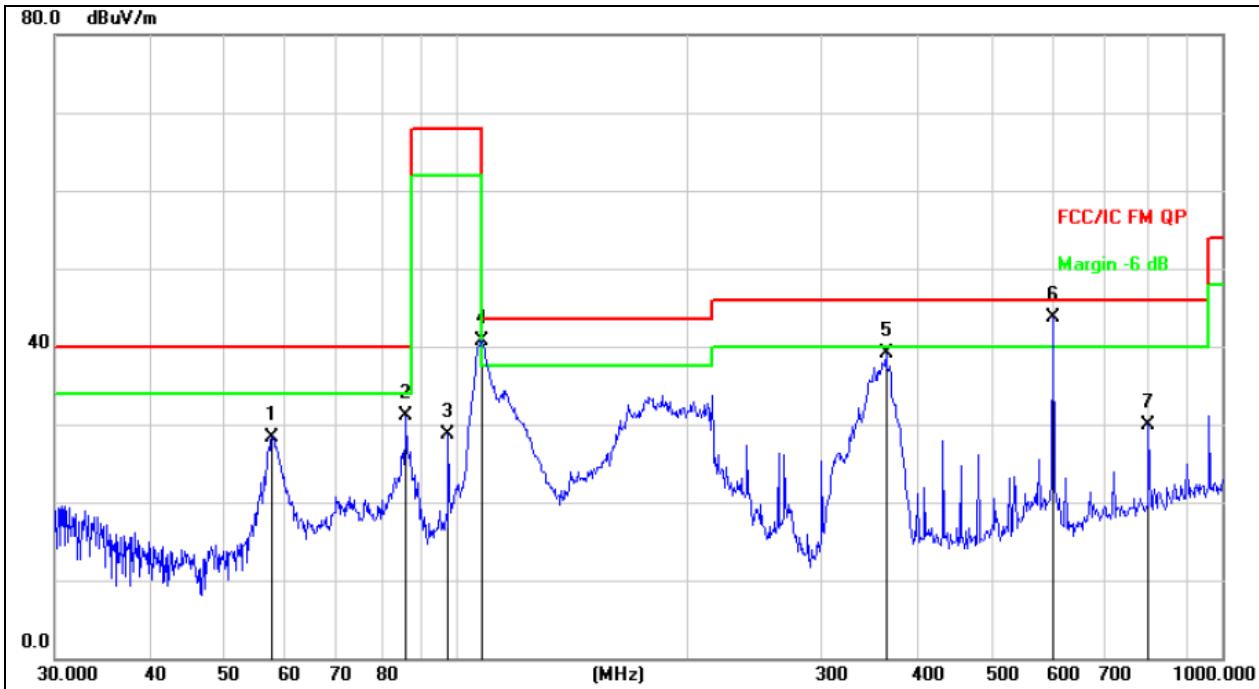

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Over Detector
1	57.5939	44.03	-15.65	28.38	40.00	-11.62	QP	
2	86.2001	50.04	-18.98	31.06	40.00	-8.94	QP	
3	97.7983	45.39	-16.68	28.71	68.00	-39.29	peak	
4	! 108.2667	57.51	-16.81	40.70	43.50	-2.80	QP	
5	364.2595	50.93	-11.90	39.03	46.00	-6.97	QP	
6	* 601.4265	50.31	-6.53	43.78	46.00	-2.22	QP	
7	801.7863	33.53	-3.60	29.93	46.00	-16.07	QP	




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	H
Test Voltage :	DC 12V	Test Mode :	Mode 3(107.7MHz)

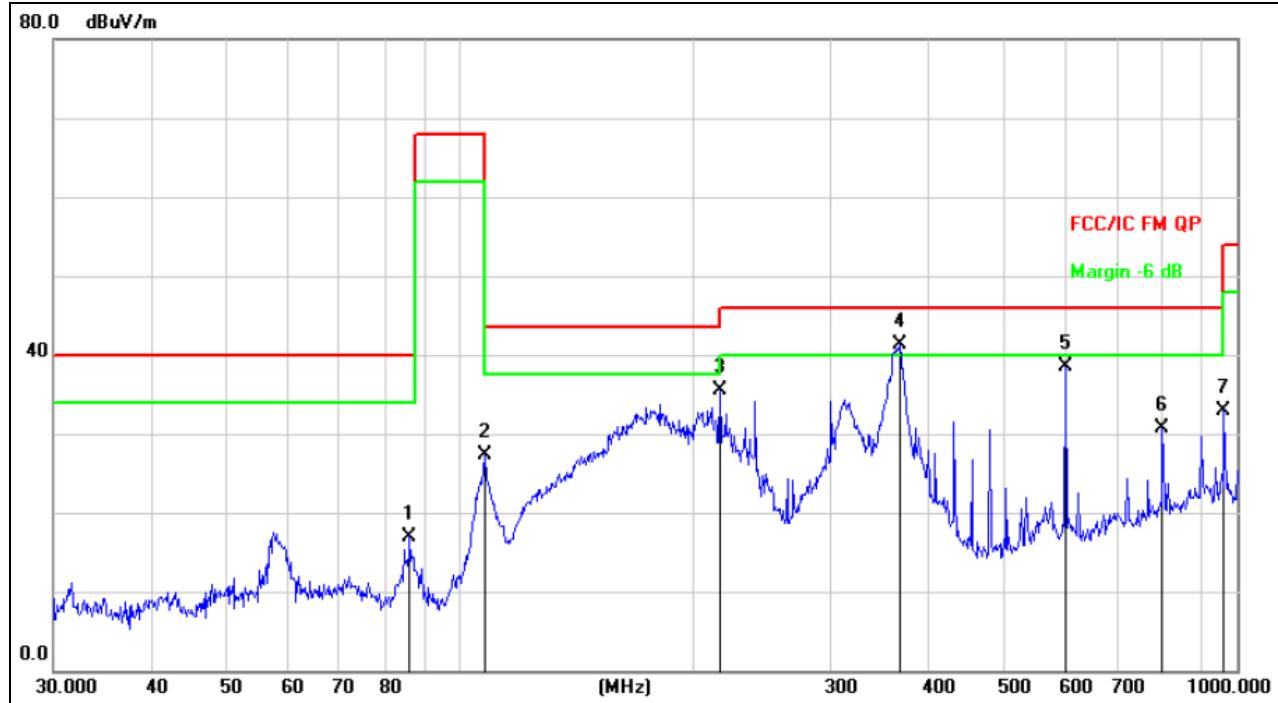

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	86.2001	35.98	-18.98	17.00	40.00	-23.00	QP	
2	107.5101	44.11	-16.76	27.35	68.00	-40.65	peak	
3	216.0240	51.45	-15.93	35.52	46.00	-10.48	QP	
4	* 368.1116	53.18	-11.82	41.36	46.00	-4.64	QP	
5	601.4265	44.94	-6.53	38.41	46.00	-7.59	QP	
6	801.7863	34.40	-3.60	30.80	46.00	-15.20	QP	
7	962.1623	33.92	-1.04	32.88	54.00	-21.12	QP	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	V
Test Voltage :	DC 12V	Test Mode :	Mode 3(107.7MHz)

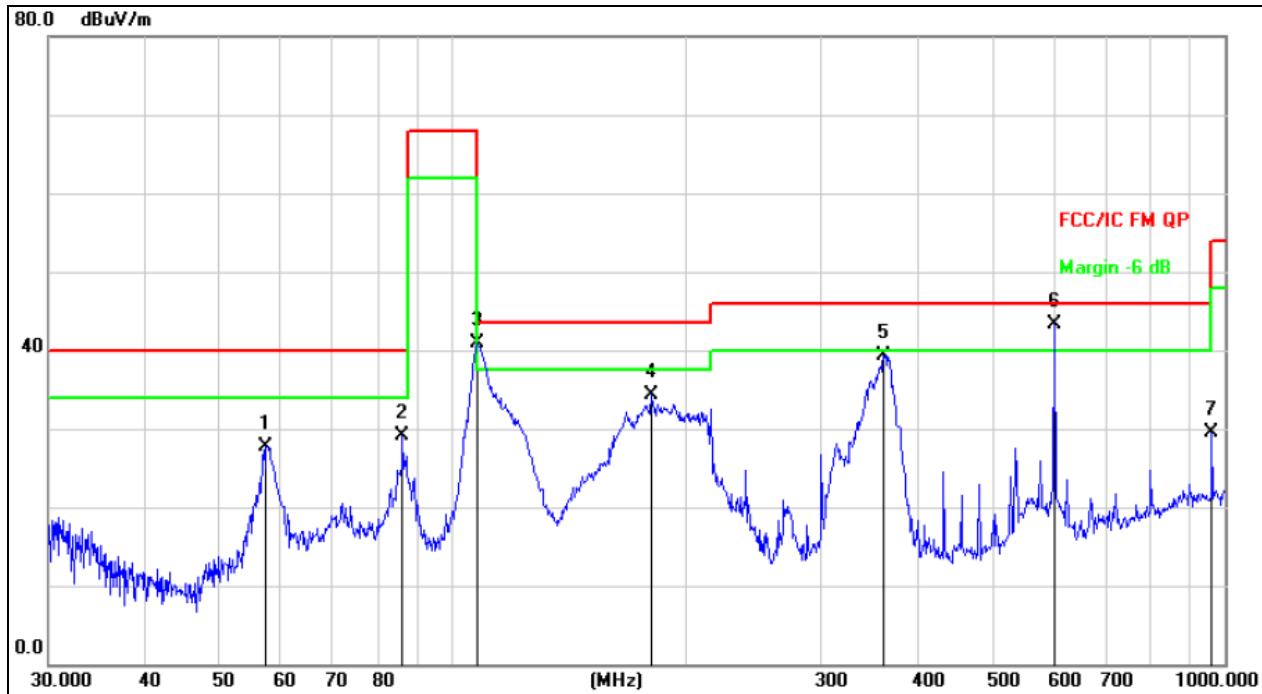

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB/m	dB
1		57.3923	43.39	-15.63	27.76	40.00	-12.24
2		86.2001	48.08	-18.98	29.10	40.00	-10.90
3		107.8877	57.61	-16.79	40.82	68.00	-27.18
4		180.6488	51.89	-17.54	34.35	43.50	-9.15
5		361.7139	51.19	-11.96	39.23	46.00	-6.77
6	*	601.4265	49.78	-6.53	43.25	46.00	-2.75
7		962.1623	30.60	-1.04	29.56	54.00	-24.44



3.2.6 TEST RESULTS (1ghz~6ghz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	1057.2	52.17	39.55	7.77	25.66	46.05	74	-27.95	PK
V	1057.2	44.15	39.55	7.77	25.66	38.03	54	-15.97	AV
V	1174.8	51.06	38.33	7.3	24.55	44.58	74	-29.42	PK
V	1174.8	44.58	38.33	7.3	24.55	38.1	54	-15.9	AV
V	1292.4	52.67	38.33	7.6	24.55	46.49	74	-27.51	PK
V	1292.4	50.14	35.23	7.6	26.59	49.1	54	-4.9	AV
H	1145.3	52.14	39.55	7.77	25.66	46.02	74	-27.98	PK
H	1145.3	52.36	39.55	7.77	25.66	46.24	54	-7.76	AV
H	1272.7	42.36	38.33	7.3	23.55	34.88	74	-39.12	PK
H	1272.7	52.17	38.33	7.3	23.22	44.36	54	-9.64	AV
H	1400.1	52.47	38.33	7.6	24.55	46.29	74	-27.71	PK
H	1400.1	44.16	35.45	7.6	27.88	44.19	54	-9.81	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



4. BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT

According to 15.209&15.239 requirement:

The bandwidth of the emission shall not exceed 200 kHz.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30kHz
VB	\geq RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30kHz, VBW \geq RBW, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





4.1.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX Mode		

Frequency	20dBc bandwidth (kHz)	Limit (kHz)	Result
88.1MHz	110.8	200	PASS
97.9 MHz	110.9	200	PASS
107.7 MHz	111.2	200	PASS

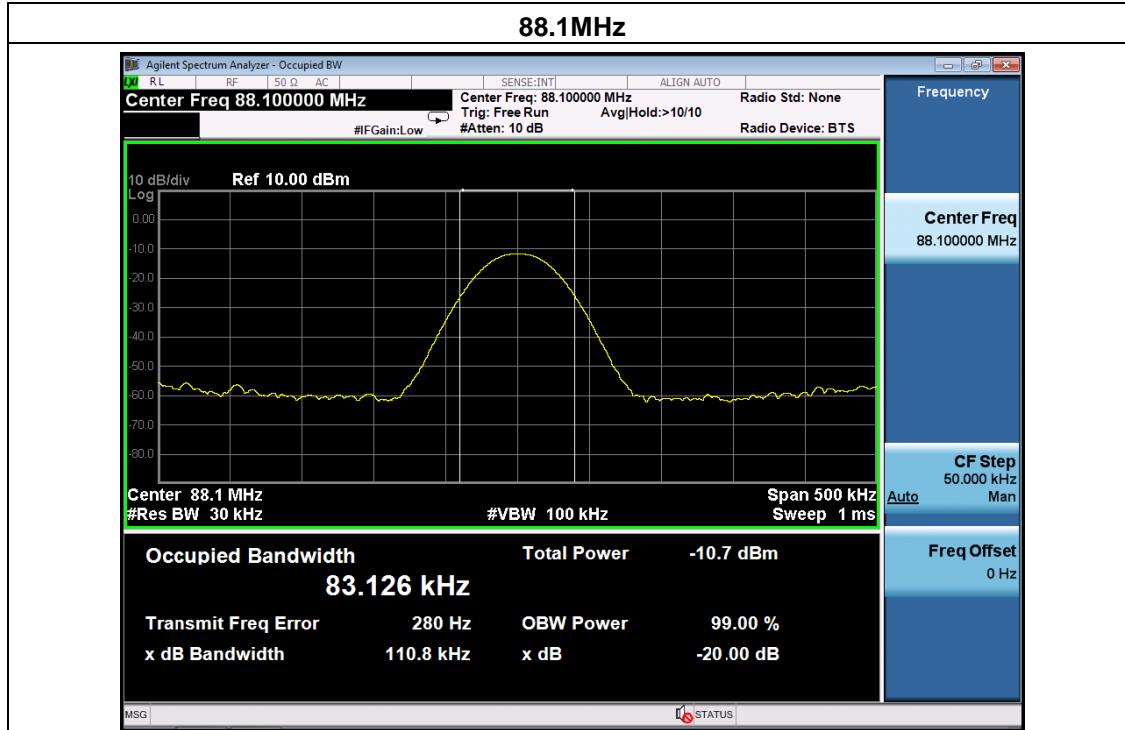

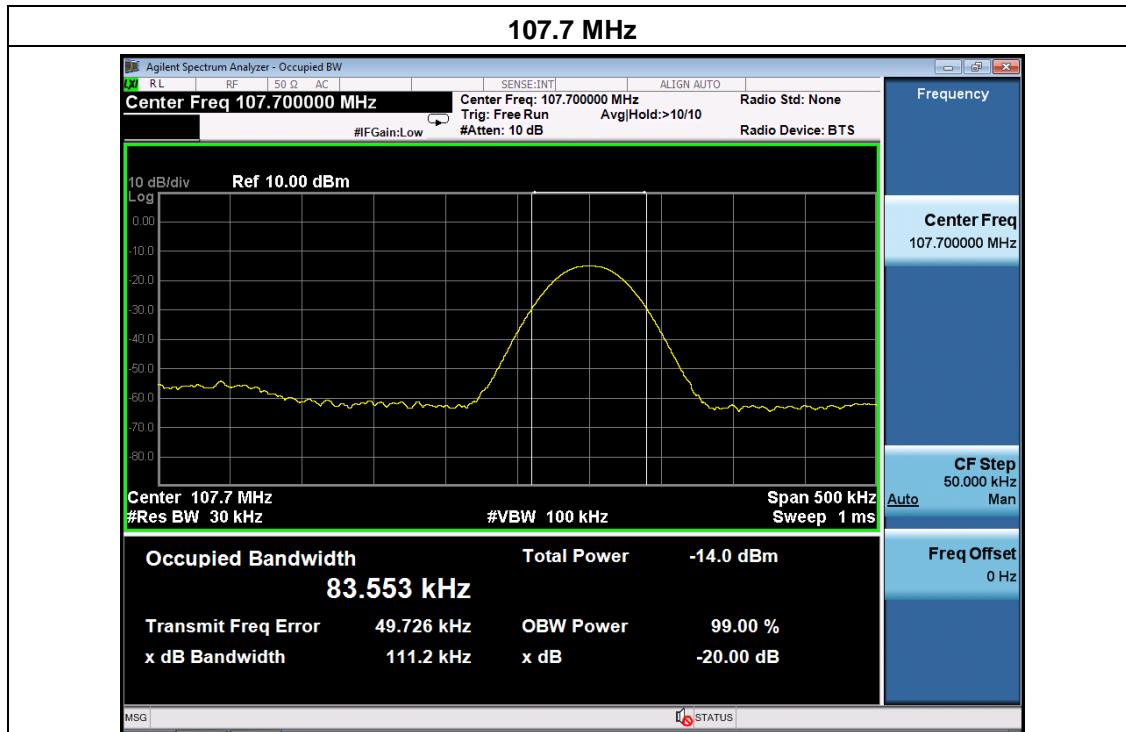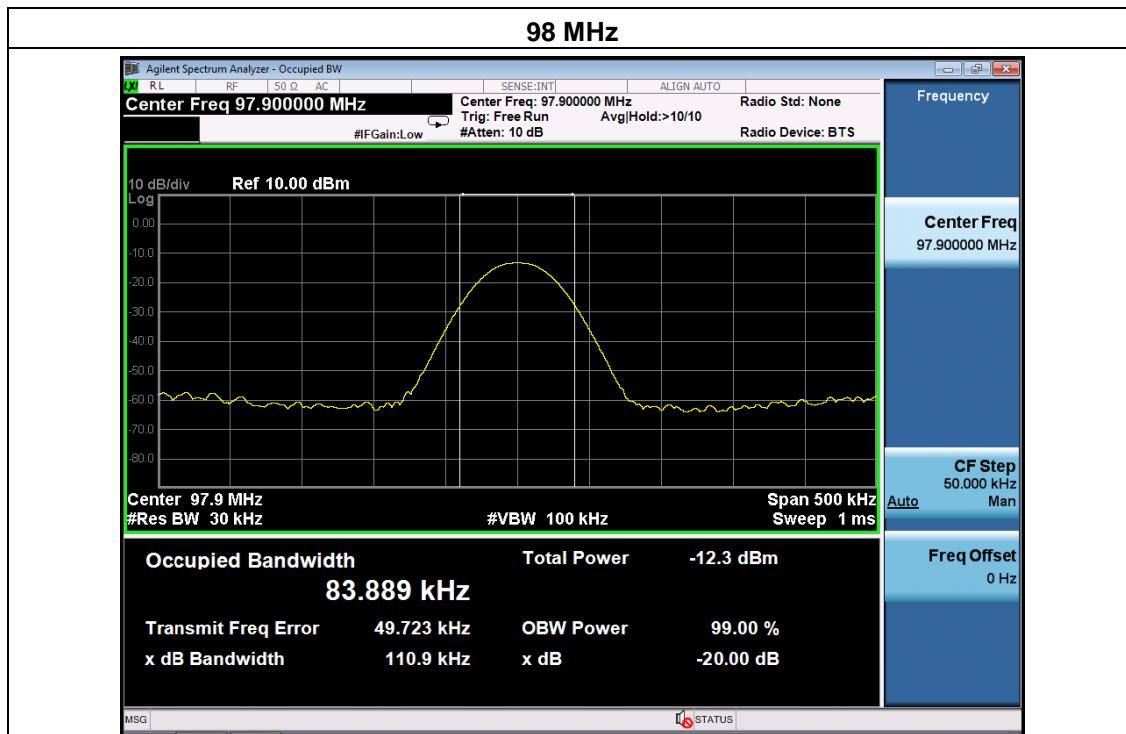



5. BAND EDGE MEASUREMENT

5.1 APPLICABLE STANDARD

FCC Part15 Paragraph 15.209&15.239

Outside the 200kHz band(as well as outside the 88-108MHz band), the general field strength limits listed in 15.209 apply.

5.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- a) Set the RBW = 3KHz.
- b) Set the VBW = 10KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP




5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.6 TEST RESULTS



88.1MHz

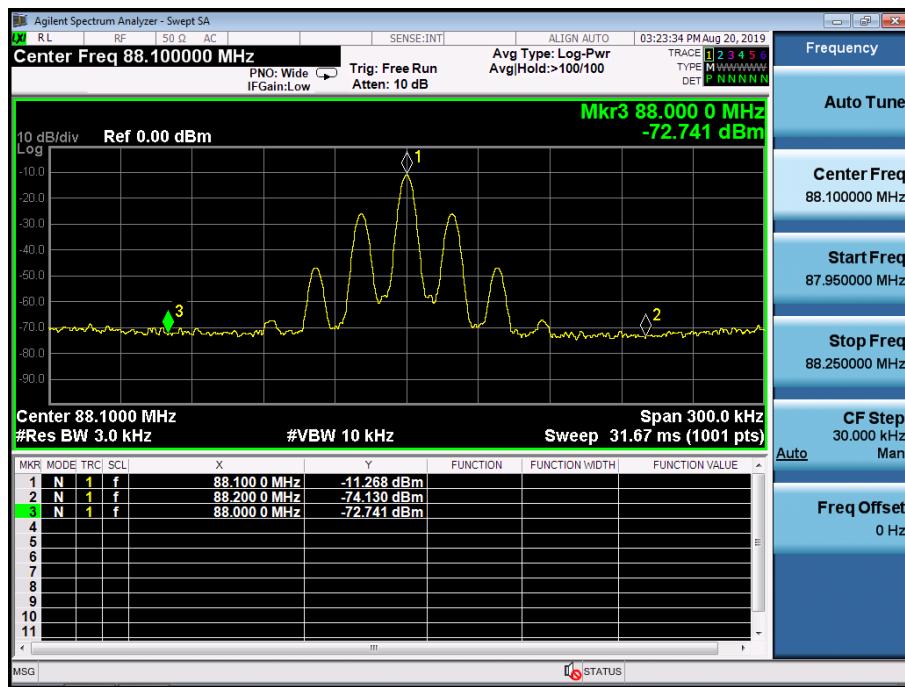


97.9MHz

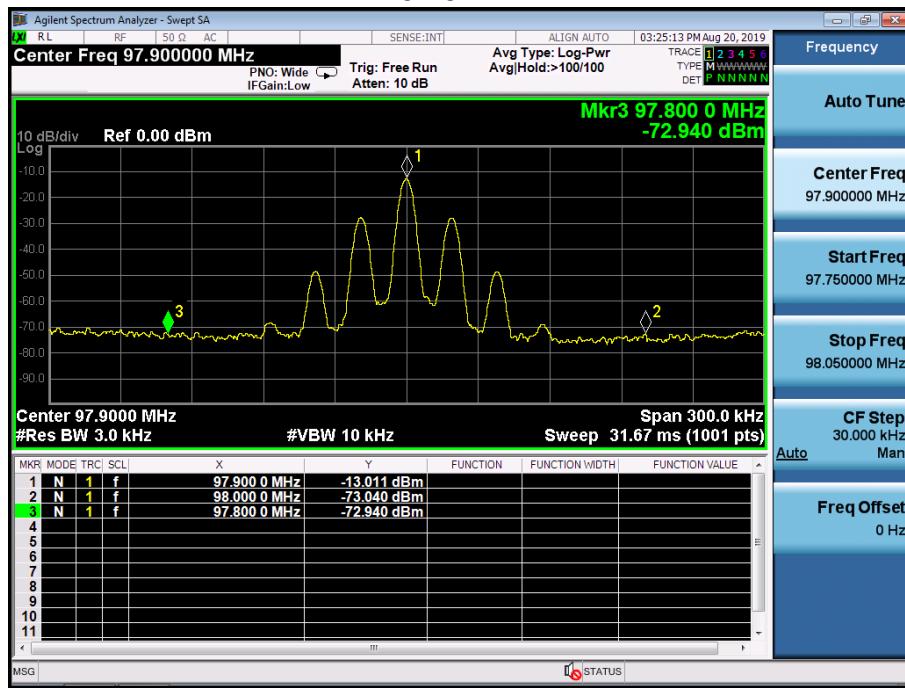



107.9MHz

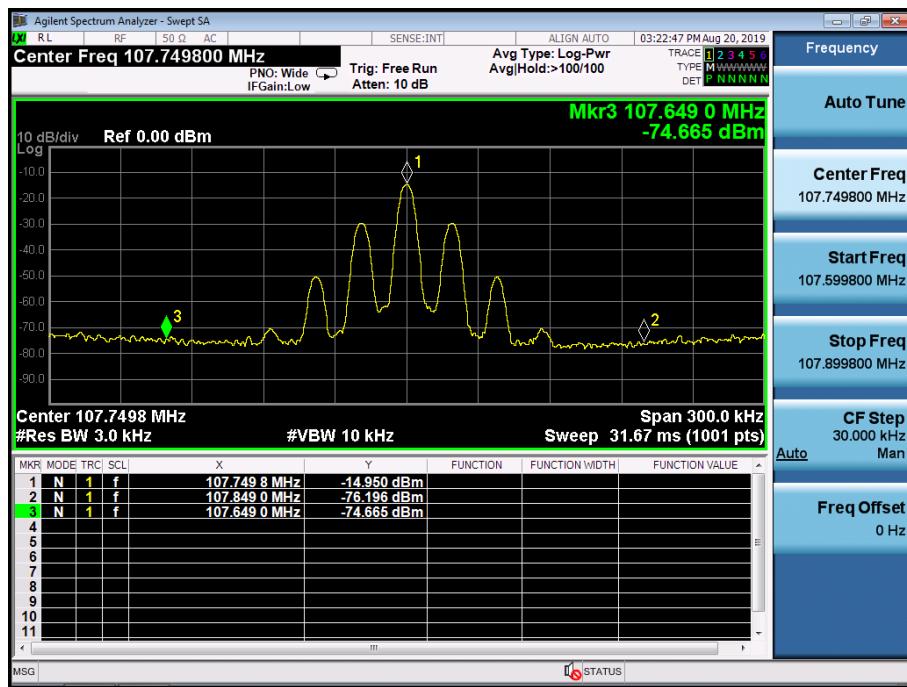



6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



6.2 EUT ANTENNA

The EUT antenna is the FPCB Antenna. It comply with the standard requirement.



7. EUT TEST PHOTO

Radiated Measurement Photos

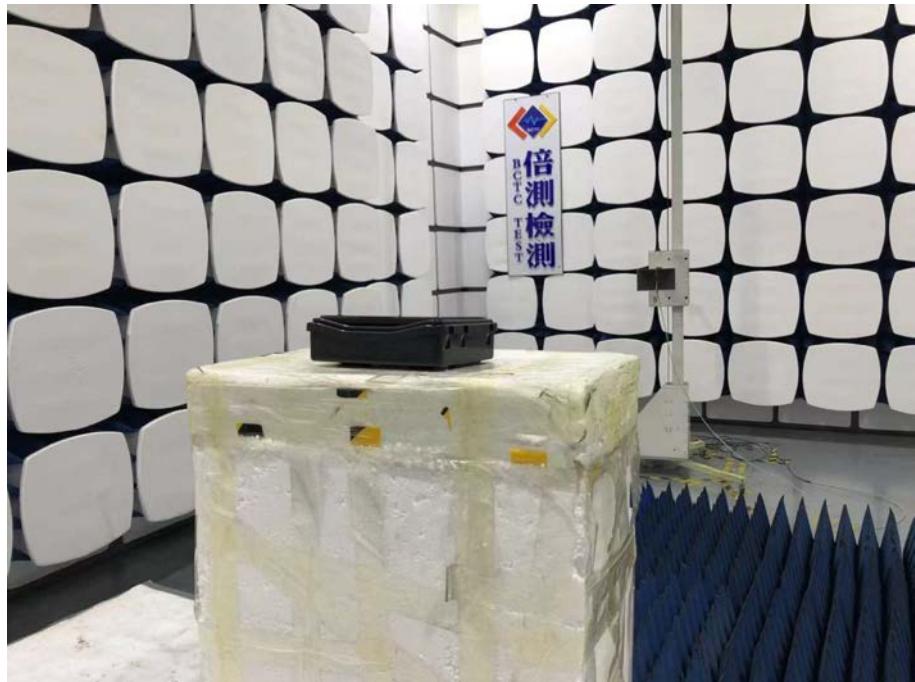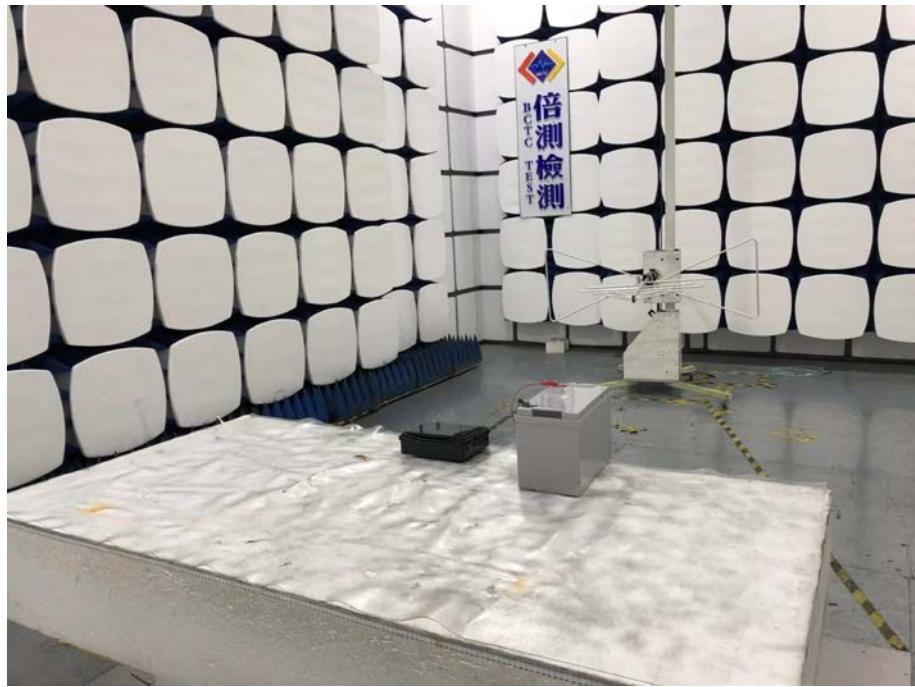



8. EUT PHOTO






倍测检测
BCTC TEST

Shenzhen BCTC Testing Co., Ltd.

Report No.: BCTC-LH190800839E

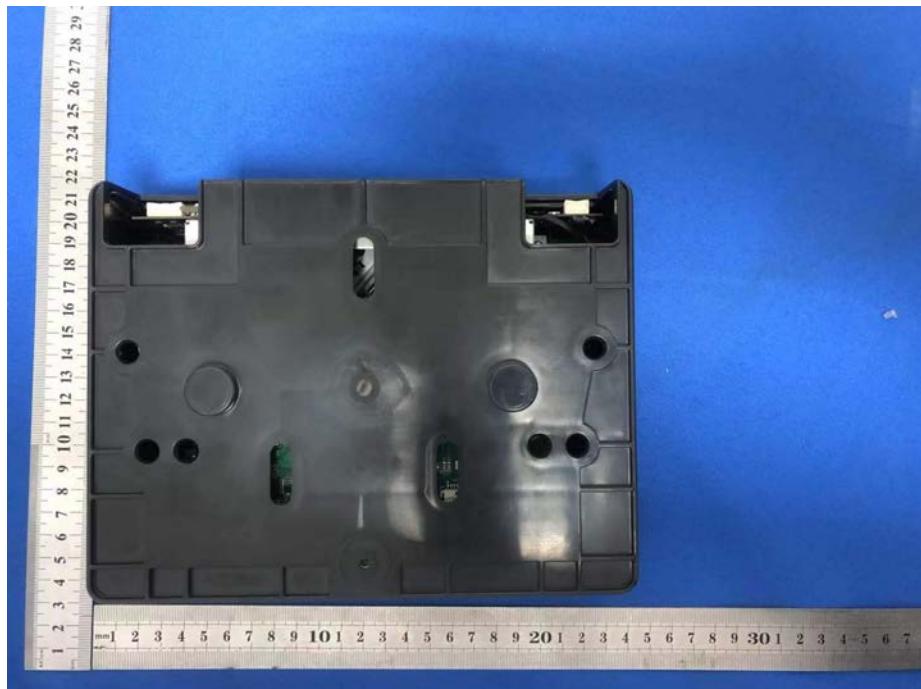

※※※※※ END OF REPORT ※※※※※