



FCC TEST REPORT

For

ARTIKA FOR LIVING INC

Accent 3 CCT, rechargeable 3PK

Test Model: UCL-ACCPBA

Additional Model No.: UCL-ACCPBA-XXXXXXXX("XXXXXXXX" can be A to Z
and/or 0 to 9 and/or blank (commercial code))

Prepared for : ARTIKA FOR LIVING INC
Address : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Address : Yabianxueziwei, Shajing Street, Baoan District,
Shenzhen, 518000, China

Tel : +(86) 0755-82591330
Fax : +(86) 0755-82591332
Web : www.lcs-cert.com
Mail : webmaster@lcs-cert.com

Date of receipt of test sample : August 30, 2024
Number of tested samples : 1
Serial number : Prototype
Sample No. : B240822029002
Date of Test : August 30, 2024 to September 04, 2024
Date of Report : September 06, 2024



**TEST REPORT****Report No.** : LCSA08064175E**Date of Issue** : September 06, 2024**Testing Laboratory Name** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Address** : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District,
Shenzhen, 518000, China**Testing Location/ Procedure** : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name** : ARTIKA FOR LIVING INC**Address** : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5**Test Specification****Standard** : FCC 47 CFR Part 15, Subpart B
ANSI C63.4-2014**Test Report Form No.** : TRF-4-E-010 A/0**TRF Originator** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF** : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Accent 3 CCT, rechargeable 3PK**Trade Mark** : ARTIKA**Test Model** : UCL-ACCPBA**Result** : Positive**Compiled by:**

Emma wang / File Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang / Manager





TEST REPORT

Test Report No.: LCSA08064175E	<u>September 06, 2024</u> Date of issue
---------------------------------------	--

Test Model	UCL-ACCPBA
EUT	Accent 3 CCT, rechargeable 3PK
Applicant	ARTIKA FOR LIVING INC
Address	1756 50th avenue, Lachine, Qc, Canada H8T 2V5
Telephone	/
Fax	/
Manufacturer	FOSHAN ECCO LIGHTING CO., LTD.
Address	No.70 East Development Zone, Donglian Shichen Village, Danzao Town, Nanhai District, Foshan City, Guangdong Province.
Telephone	/
Fax	/
Factory	FOSHAN ECCO LIGHTING CO., LTD.
Address	No.70 East Development Zone, Donglian Shichen Village, Danzao Town, Nanhai District, Foshan City, Guangdong Province.
Telephone	/
Fax	/

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Report Version	Issue Date	Revision Content	Revised By
000	September 06, 2024	Initial Issue	/





TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1 Description of Standards and Results	6
1.2 Description of Test Modes	7
2. GENERAL INFORMATION	8
2.1 Description of Device (EUT)	8
2.2 Support equipment List	8
2.3 Description of Test Facility	8
2.4 Measurement Uncertainty	8
3. MEASURING DEVICES AND TEST EQUIPMENT	9
4. EMISSION TEST RESULTS (EMI)	10
4.1 Conducted emissions on AC mains	10
4.2 Radiated emissions (Below 1GHz)	13
5. TEST SETUP PHOTOS	16
6. EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	17





1. SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

Description of Test Item	Standard	Limits	Result
Conducted emissions on AC mains	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014	15.107, Class B	Pass
Radiated emissions (Below 1GHz)	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014	15.109, Class B	Pass





1.2 Description of Test Modes

No	Title	Description
TM1	Charging+Working (DC 5V From USB Host Unit)	Record
TM2	Working(DC 3.7V From battery)	Record





2. GENERAL INFORMATION

2.1 Description of Device (EUT)

EUT	: Accent 3 CCT, rechargeable 3PK
Test Model	: UCL-ACCPBA
Additional Model No.	: UCL-ACCPBA-XXXXXXXX("XXXXXXXX" can be A to Z and/or 0 to 9 and/or blank (commercial code))
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Power Supply	: Input: DC 5V Battery: DC 3.7V
Highest Internal Frequency	: 1.705-108MHz
Classification of Equipment	: Class B

Highest internal frequency (Fx)	Highest measured frequency
$Fx \leq 1.705\text{MHz}$	30MHz
$1.705\text{MHz} < Fx \leq 108\text{MHz}$	1GHz
$108\text{MHz} < Fx \leq 500\text{MHz}$	2GHz
$500\text{MHz} < Fx \leq 1000\text{MHz}$	5GHz
$Fx > 1\text{GHz}$	5 x Fx up to a maximum of 40GHz

2.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Xiaomi Communication Technology Co., LTD	Power adapter	MDY-12-EF	TA62305N201981 G	/

2.3 Description of Test Facility

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

2.4 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emission (150kHz to 30MHz)	$\pm 2.35\text{ dB}$
Radiated Emission (30MHz to 1000MHz)	$\pm 3.48\text{ dB}$
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	





3. MEASURING DEVICES AND TEST EQUIPMENT

Conducted emissions on AC mains

Equipment	Manufacturer	Model No	Serial No.	Cal Date	Due Date
EMI Test Software	Farad	EZ	/	/	/
Artificial Mains	R&S	ENV216	101288	2024-06-06	2025-06-05
Pulse Limiter	R&S	ESH3-Z2	102750-NB	2024-06-06	2025-06-05
EMI Test Receiver	R&S	ESR3	102312	2024-03-02	2025-03-01

Radiated emissions (Below 1GHz)

Equipment	Manufacturer	Model No	Serial No.	Cal Date	Due Date
EMI Test Software	Farad	EZ	/	/	/
EMI Test Software	AUDIX	E3	/	/	/
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
EMI Test Receiver	R&S	ESR3	102311	2024-06-06	2025-06-05
Broadband Preamplifier	/	BP-01M18G	P190501	2024-06-06	2025-06-05
EMI Test Receiver	R&S	ESCI7	101173	2023-10-25	2024-10-24
By-log Antenna	SchwarzZBECK	VULB9163	01565	2024-07-13	2025-07-12





4. EMISSION TEST RESULTS (EMI)


4.1 Conducted emissions on AC mains

Test Requirement:	15.107, Class B		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.4-2014		
Procedure:	An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected. Remark: Level= Read Level+ Cable Loss+ LISN Factor		

4.1.1 E.U.T. Operation:

Operating Environment:			
Temperature:	22.5 °C	Humidity:	53.7 %
Pre test mode:	TM1		
Final test mode:	TM1		


4.1.2 Test Setup Diagram:

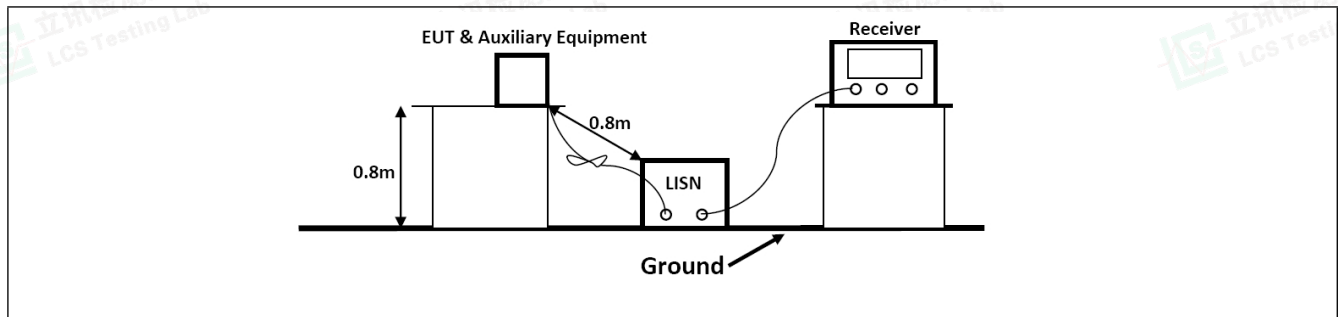



4.1.3 Test Data:

TM1 / Line: Line

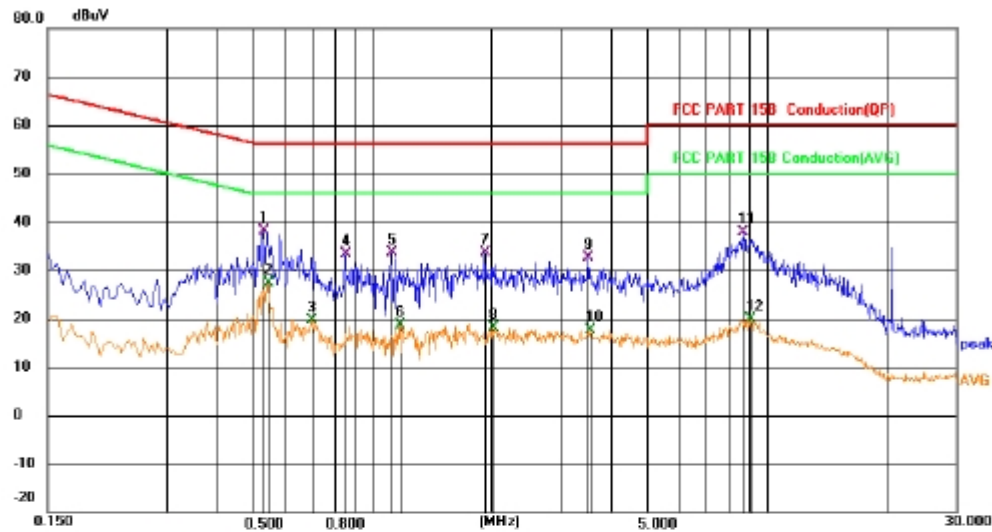

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
1	*	0.5281	18.48	19.65	38.13	56.00	-17.87	QP	
2		0.5416	7.82	19.65	27.47	46.00	-18.53	AVG	
3		0.6991	-0.08	19.65	19.57	46.00	-26.43	AVG	
4		0.8566	13.75	19.64	33.39	56.00	-22.61	QP	
5		1.1131	13.98	19.65	33.63	56.00	-22.37	QP	
6		1.1671	-1.06	19.65	18.59	46.00	-27.41	AVG	
7		1.9231	14.01	19.68	33.69	56.00	-22.31	QP	
8		2.0131	-1.53	19.68	18.15	46.00	-27.85	AVG	
9		3.5206	12.83	19.70	32.53	56.00	-23.47	QP	
10		3.5746	-2.01	19.70	17.69	46.00	-28.31	AVG	
11		8.6911	17.99	19.80	37.79	60.00	-22.21	QP	
12		9.0691	0.06	19.82	19.88	50.00	-30.12	AVG	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM1 / Line: Neutral

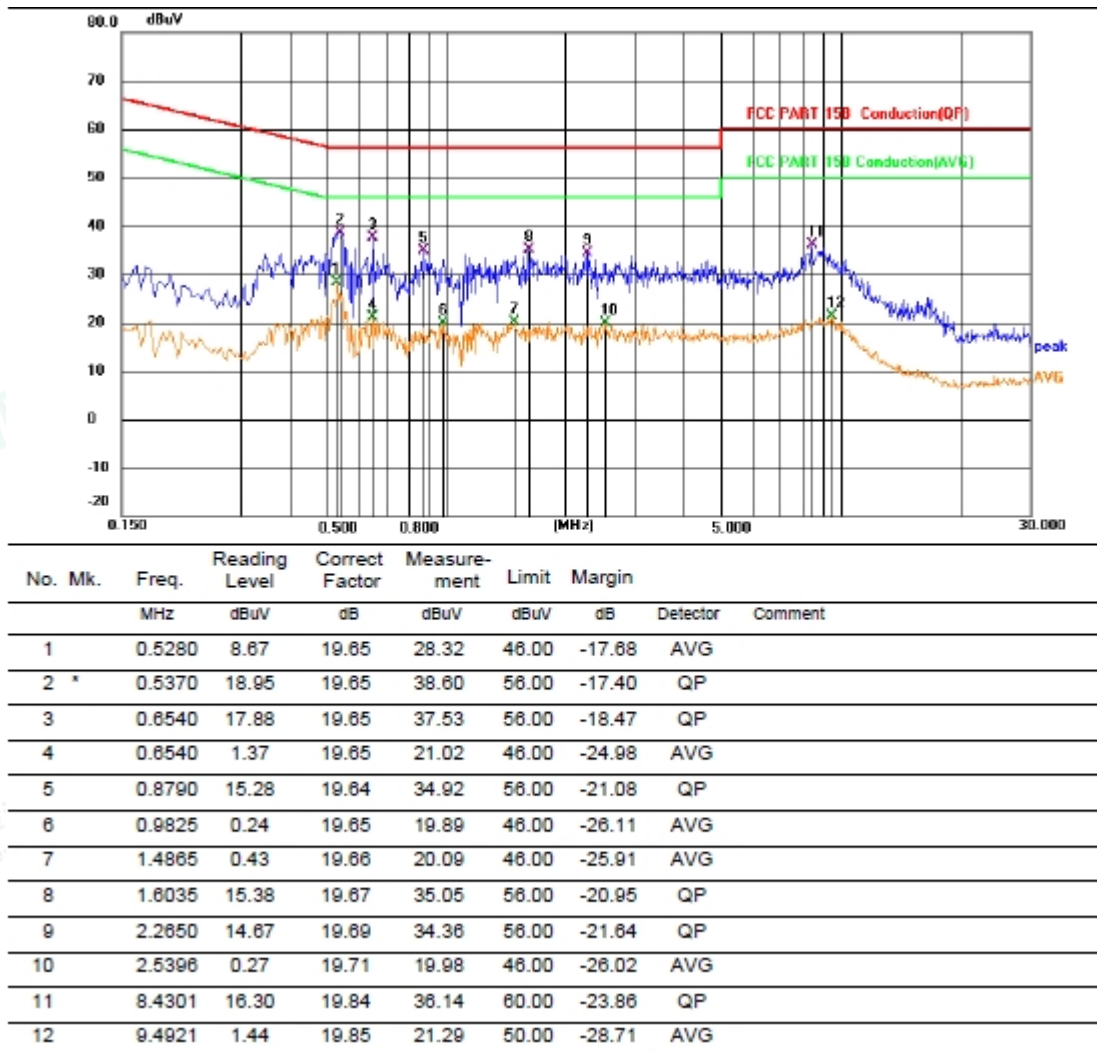

***Note: 1) Pre-scan all modes and recorded the worst case results in this report.

2) Margin= Reading level + Correct factor-Limit

Correct Factor=Liscn Factor+Cable Factor+Insertion loss of Pulse Limiter



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




4.2 Radiated emissions (Below 1GHz)

Test Requirement:	15.109, Class B				
Test Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:				
	Frequency of emission (MHz)	Field strength @3m		Field strength @10m	
		(uV/m)	(dBuV/m)	(uV/m)	(dBuV/m)
	30 – 88	100	40	30	29.5
	88 – 216	150	43.5	45	33.1
	216 – 960	200	46	60	35.6
	Above 960	500	54	150	43.5
Test Method:	ANSI C63.4-2014				
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor				

4.2.1 E.U.T. Operation:

Operating Environment:			
Temperature:	26.4 °C	Humidity:	54.2 %
Pre test mode:	TM1, TM2		
Final test mode:	TM1, TM2		


4.2.2 Test Setup Diagram:

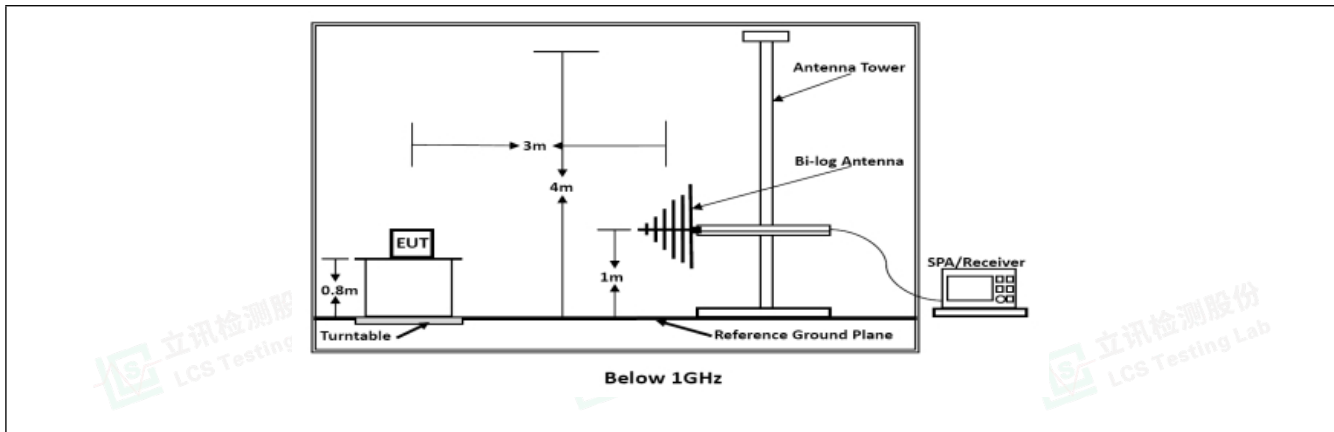



4.2.3 Test Data:

TM1 / Polarization: Horizontal

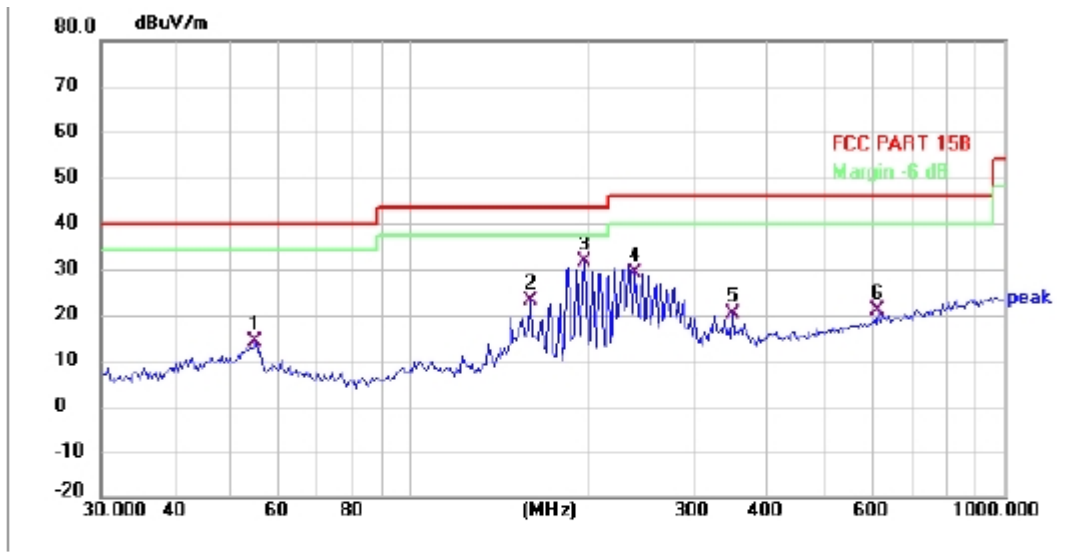

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	54.452	30.86	-16.87	13.99	40.00	-26.01	QP	P	
2	159.225	44.32	-21.41	22.91	43.50	-20.59	QP	P	
3 *	196.510	50.39	-18.76	31.63	43.50	-11.87	QP	P	
4	239.147	46.65	-17.38	29.27	46.00	-16.73	QP	P	
5	349.250	35.33	-15.23	20.10	46.00	-25.90	QP	P	
6	612.064	30.97	-10.14	20.83	46.00	-25.17	QP	P	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM1 / Polarization: Vertical

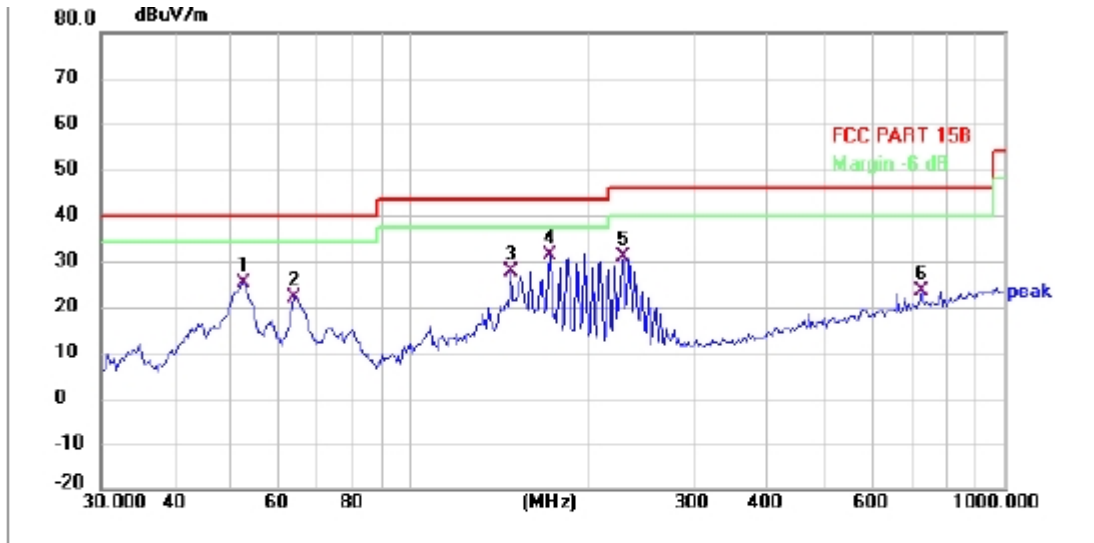

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	52.208	41.68	-16.47	25.21	40.00	-14.79	QP	P	
2	63.536	40.75	-18.73	22.02	40.00	-17.98	QP	P	
3	147.404	49.58	-21.95	27.63	43.50	-15.87	QP	P	
4 *	171.995	52.02	-20.85	31.17	43.50	-12.33	QP	P	
5	227.691	48.48	-17.68	30.80	46.00	-15.20	QP	P	
6	724.261	32.60	-9.05	23.55	46.00	-22.45	QP	P	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM2 / Polarization: Horizontal

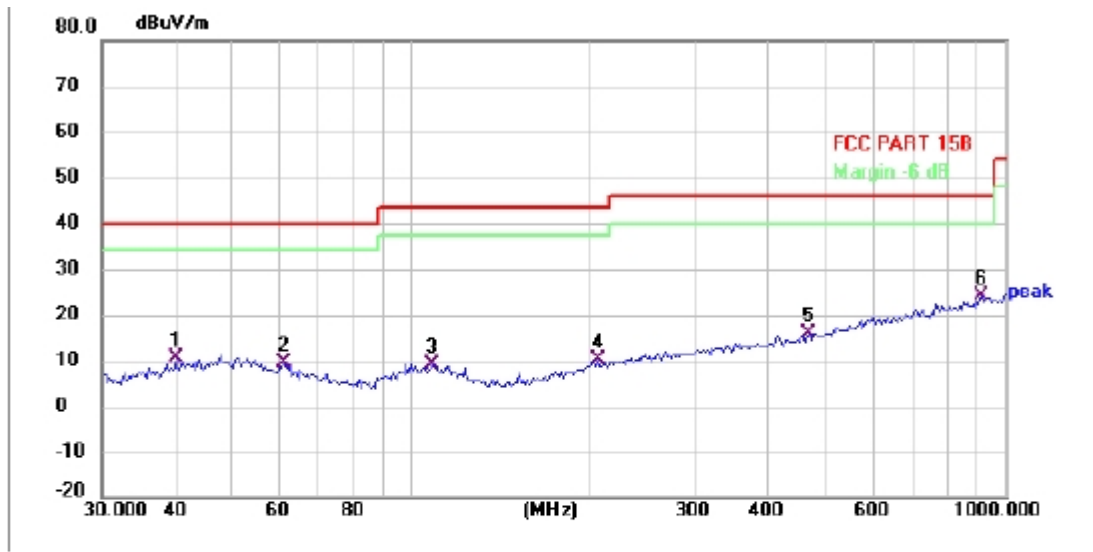

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	39.994	27.80	-17.32	10.48	40.00	-29.52	QP	P	
2	60.918	27.48	-18.10	9.38	40.00	-30.62	QP	P	
3	108.267	27.58	-18.47	9.11	43.50	-34.39	QP	P	
4	208.398	28.49	-18.22	10.27	43.50	-33.23	QP	P	
5	485.599	28.83	-13.11	15.72	46.00	-30.28	QP	P	
6 *	912.862	30.25	-6.30	23.95	46.00	-22.05	QP	P	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM2 / Polarization: Vertical

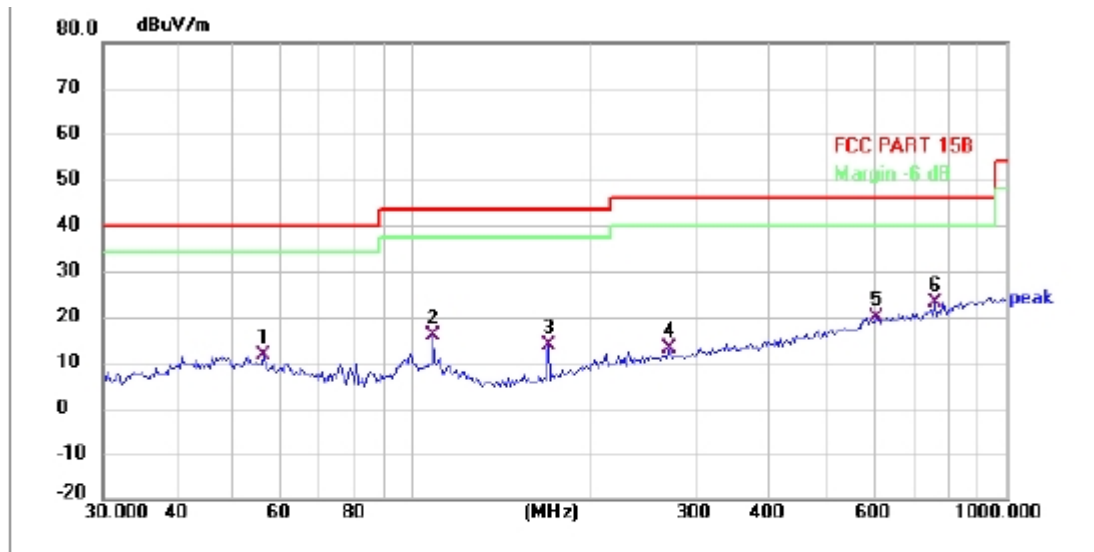

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	56.001	28.67	-17.15	11.52	40.00	-28.48	QP	P	
2	108.267	34.30	-18.47	15.83	43.50	-27.67	QP	P	
3	169.599	34.62	-20.96	13.66	43.50	-29.84	QP	P	
4	271.325	29.56	-16.64	12.92	46.00	-33.08	QP	P	
5	603.539	29.93	-10.22	19.71	46.00	-26.29	QP	P	
6 *	760.704	31.60	-8.61	22.99	46.00	-23.01	QP	P	

Note: 1). Pre-Scan all mode, Thus record worse case mode result in this report.

2) Margin = Reading level + Correct factor - Limit

Correct Factor = Antenna Factor + Cable Factor - Pre-amplifier Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5. TEST SETUP PHOTOS

Refer to Appendix - Test Setup Photos for LCSA08064175E.docx

6. EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

Refer to Appendix - EUT Photos for LCSA08064175E.docx

--- End of Report ---

