

TEST REPORT

Product Name : Set-Top Box
Brand Mark : Infomir
Model No. : MAG500A
Extension Model : MAG520w3, MAG522w3, MAG524w3
FCC ID : 2AUIR-IM010CXXX1
Report Number : BLA-EMC-202105-A0703
Date of Sample Receipt : 2021/5/6
Date of Test : 2021/5/6 to 2021/7/21
Date of Issue : 2021/7/21
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

TELECOMMUNICATION TECHNOLOGIES, LLC
1, Mytna Sq., Odesa, 65026, Ukraine

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

**Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by:

hagan

Review by:

Sweller

Approved by:

BlueZhong

Date:

2021/7/21



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/7/21	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	8
9	TEST INSTRUMENTS LIST	9
10	CONDUCTED BAND EDGES MEASUREMENT	13
10.1	LIMITS	13
10.2	BLOCK DIAGRAM OF TEST SETUP	13
10.3	TEST DATA	14
11	POWER SPECTRUM DENSITY	15
11.1	LIMITS	15
11.2	BLOCK DIAGRAM OF TEST SETUP	15
11.3	TEST DATA	15
12	CONDUCTED PEAK OUTPUT POWER	16
12.1	LIMITS	16
12.2	BLOCK DIAGRAM OF TEST SETUP	16
12.3	TEST DATA	17
13	MINIMUM 6DB BANDWIDTH	18
13.1	LIMITS	18
13.2	BLOCK DIAGRAM OF TEST SETUP	18
13.3	TEST DATA	18
14	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	19
14.1	LIMITS	19
14.2	BLOCK DIAGRAM OF TEST SETUP	19
14.3	PROCEDURE	19
14.4	TEST DATA	21

15 ANTENNA REQUIREMENT	23
15.1 CONCLUSION	23
16 RADIATED SPURIOUS EMISSIONS	24
16.1 LIMITS	24
16.2 BLOCK DIAGRAM OF TEST SETUP	25
16.3 PROCEDURE	25
16.4 TEST DATA	27
17 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	35
17.1 LIMITS	35
17.2 BLOCK DIAGRAM OF TEST SETUP	36
17.3 PROCEDURE	36
17.4 TEST DATA	38
18 CONDUCTED SPURIOUS EMISSIONS	42
18.1 LIMITS	42
18.2 BLOCK DIAGRAM OF TEST SETUP	42
18.3 TEST DATA	43
19 APPENDIX	44
19.1 MAXIMUM CONDUCTED OUTPUT POWER	44
19.2 -6dB BANDWIDTH	46
19.3 OCCUPIED CHANNEL BANDWIDTH	48
19.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	50
19.5 BAND EDGE	52
19.6 CONDUCTED RF SPURIOUS EMISSION	55
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	59
APPENDIX B: PHOTOGRAPHS OF EUT	61

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(1) & 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

2 GENERAL INFORMATION

Applicant	TELECOMMUNICATION TECHNOLOGIES, LLC
Address	1, Mytna Sq., Odesa, 65026, Ukraine
Manufacturer	TELECOMMUNICATION TECHNOLOGIES, LLC
Address	1, Mytna Sq., Odesa, 65026, Ukraine
Factory	TELECOMMUNICATION TECHNOLOGIES, LLC
Address	1, Mytna Sq., Odesa, 65026, Ukraine
Product Name	Set-Top Box
Test Model No.	MAG500A

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	06C
Software Version	V.1.2.0
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi(Provided by the applicant)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	5Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation

Remark: Only the data of the worst mode would be recorded in this report.

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30MHz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Power Spectrum Density					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Radiated Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11

Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11
------------------	---------	--------	------------	------------	------------

BlueAsia


10 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

10.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

10.2 BLOCK DIAGRAM OF TEST SETUP

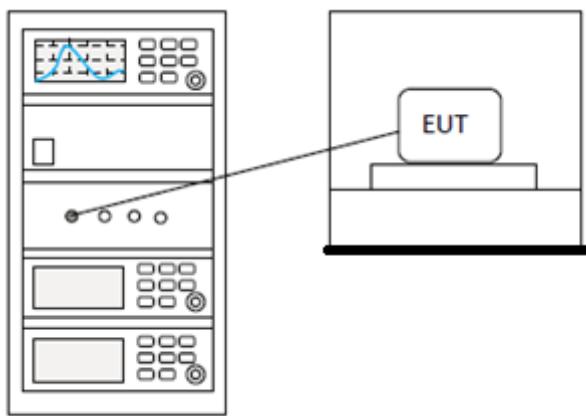

10.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


11 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

11.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

11.2 BLOCK DIAGRAM OF TEST SETUP

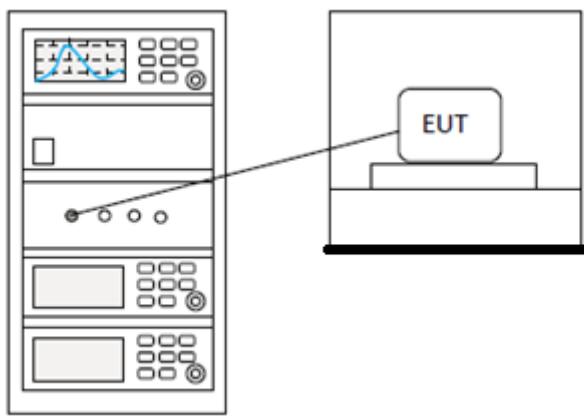

11.3 TEST DATA

Pass: Please Refer To Appendix: For Details


12 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

12.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

12.2 BLOCK DIAGRAM OF TEST SETUP

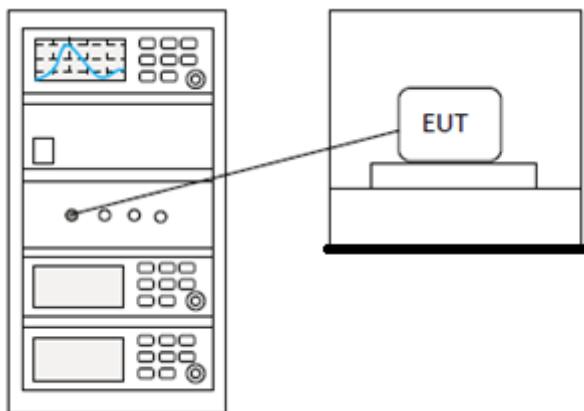

12.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


13 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

13.1 LIMITS

Limit:	≥ 500 kHz
---------------	----------------

13.2 BLOCK DIAGRAM OF TEST SETUP

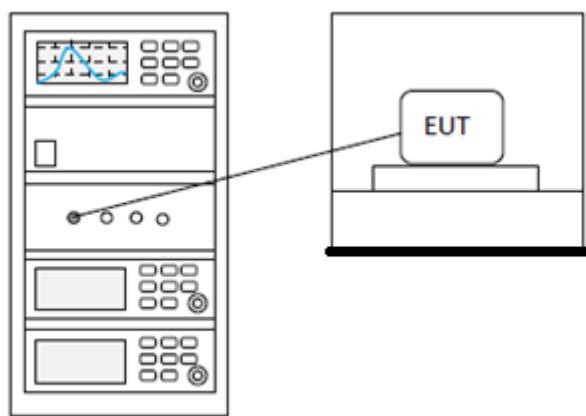

13.3 TEST DATA

Pass: Please Refer To Appendix: For Details
--

14 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

14.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

14.2 BLOCK DIAGRAM OF TEST SETUP

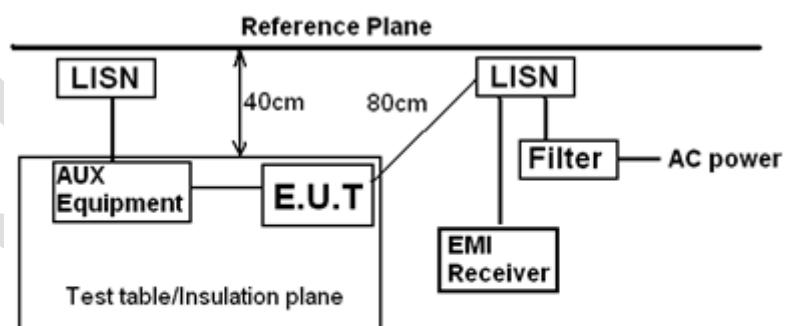

Remark
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

14.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 50hm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

14.4 TEST DATA

[TestMode: TX]; [Line: Line][Power: AC120V/60Hz]

Conducted Emission Measurement

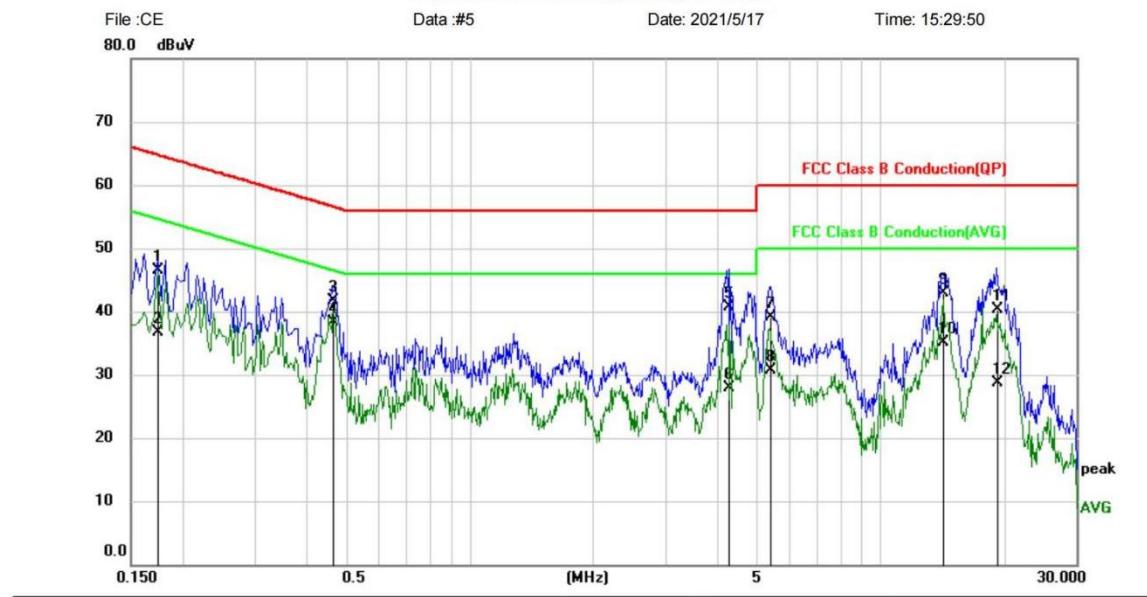

Site: **L1** Temperature:
Limit: FCC Class B Conduction(QP) Power:
EUT: Set-Top Box Humidity: %
M/N: MAG500A
Mode: BLE mode
Note:

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		Freq.	Level	Factor				
		MHz	dBuV	dB	dBuV	dB		
1	0.1740	36.75	9.82	46.57	64.77	-18.20	QP	
2	0.1740	26.87	9.82	36.69	54.77	-18.08	AVG	
3	0.4660	31.82	9.87	41.69	56.58	-14.89	QP	
4 *	0.4660	28.51	9.87	38.38	46.58	-8.20	AVG	
5	4.2780	30.81	9.99	40.80	56.00	-15.20	QP	
6	4.2780	17.87	9.99	27.86	46.00	-18.14	AVG	
7	5.3859	29.15	10.03	39.18	60.00	-20.82	QP	
8	5.3859	20.77	10.03	30.80	50.00	-19.20	AVG	
9	14.1540	32.52	10.32	42.84	60.00	-17.16	QP	
10	14.1540	24.85	10.32	35.17	50.00	-14.83	AVG	
11	19.1940	29.88	10.42	40.30	60.00	-19.70	QP	
12	19.1940	18.37	10.42	28.79	50.00	-21.21	AVG	


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX]; [Line: Nutral][Power:AC120V/60Hz]

Conducted Emission Measurement

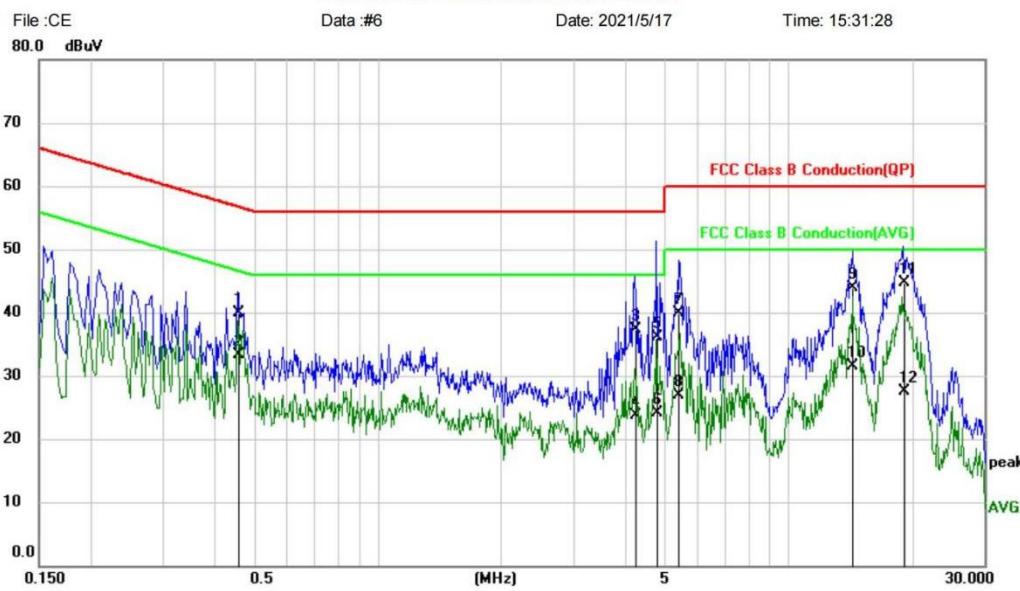

Site: **N** Phase: **N** Temperature:
Limit: FCC Class B Conduction(QP) Power: **N** Humidity: %
EUT: Set-Top Box
M/N: MAG500A
Mode: BLE mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4580	30.14	9.79	39.93	56.73	-16.80	QP	
2	*	0.4580	23.49	9.79	33.28	46.73	-13.45	AVG	
3		4.2380	27.48	9.92	37.40	56.00	-18.60	QP	
4		4.2380	13.76	9.92	23.68	46.00	-22.32	AVG	
5		4.7900	26.08	9.94	36.02	56.00	-19.98	QP	
6		4.7900	14.14	9.94	24.08	46.00	-21.92	AVG	
7		5.4140	29.99	9.96	39.95	60.00	-20.05	QP	
8		5.4140	16.85	9.96	26.81	50.00	-23.19	AVG	
9		14.3340	33.65	10.29	43.94	60.00	-16.06	QP	
10		14.3340	21.18	10.29	31.47	50.00	-18.53	AVG	
11		19.0740	34.35	10.41	44.76	60.00	-15.24	QP	
12		19.0740	17.09	10.41	27.50	50.00	-22.50	AVG	

*:Maximum data x:Over limit l:over margin

⟨Reference Only

Test Result: Pass

15 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


15.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

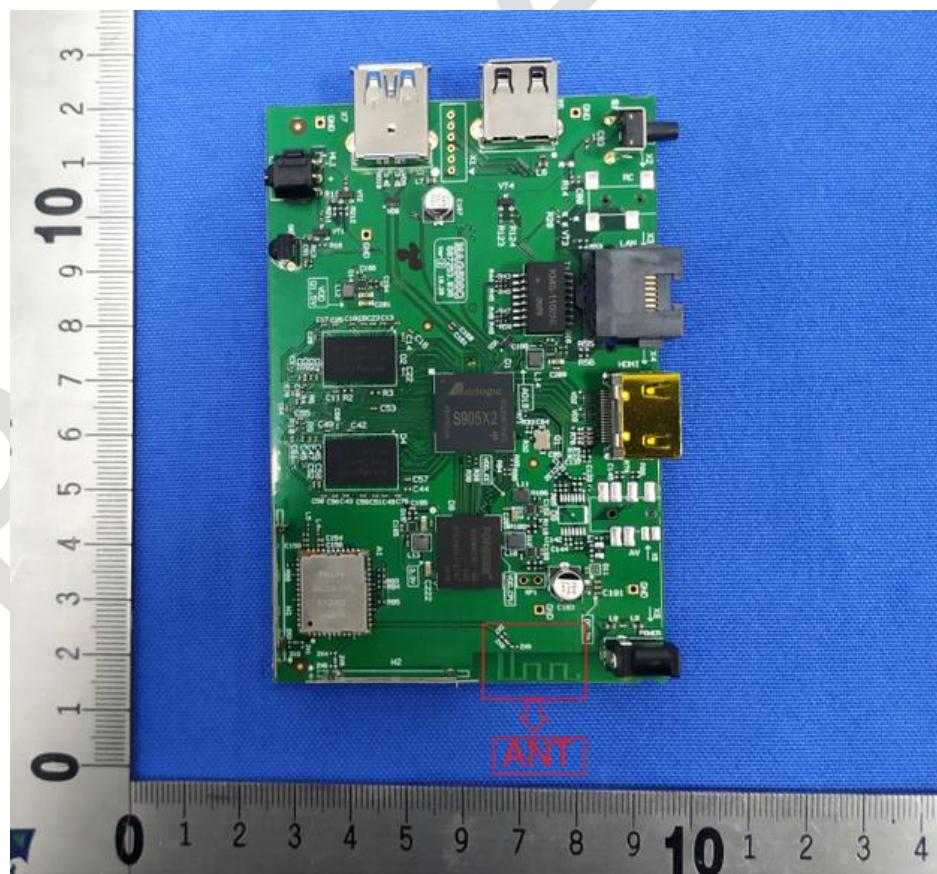

16 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

16.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

16.2 BLOCK DIAGRAM OF TEST SETUP

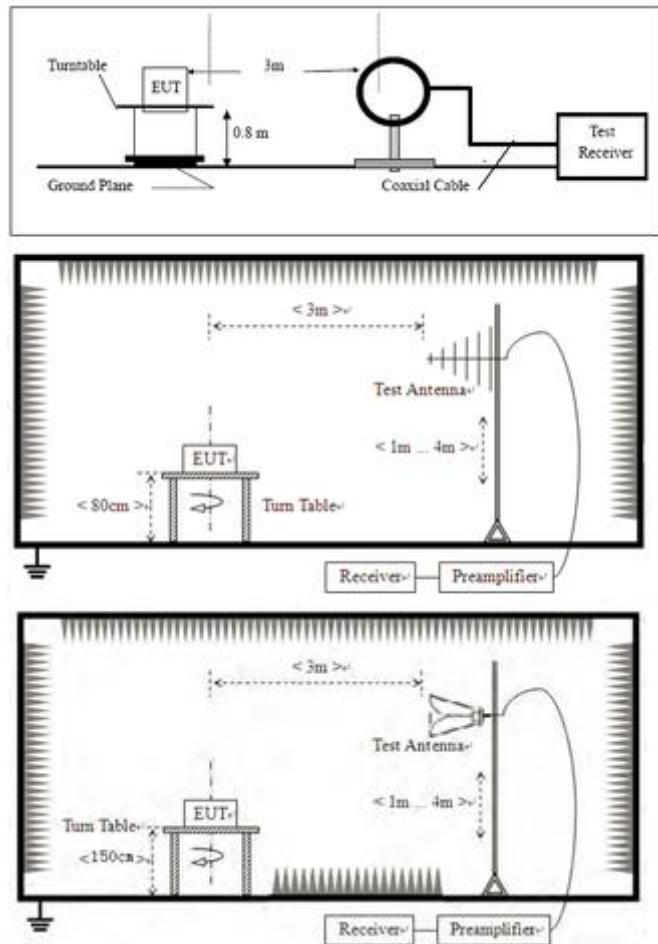

16.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

16.4 TEST DATA

[TestMode: TX]; [Polarity: Horizontal]

Radiated Emission Measurement

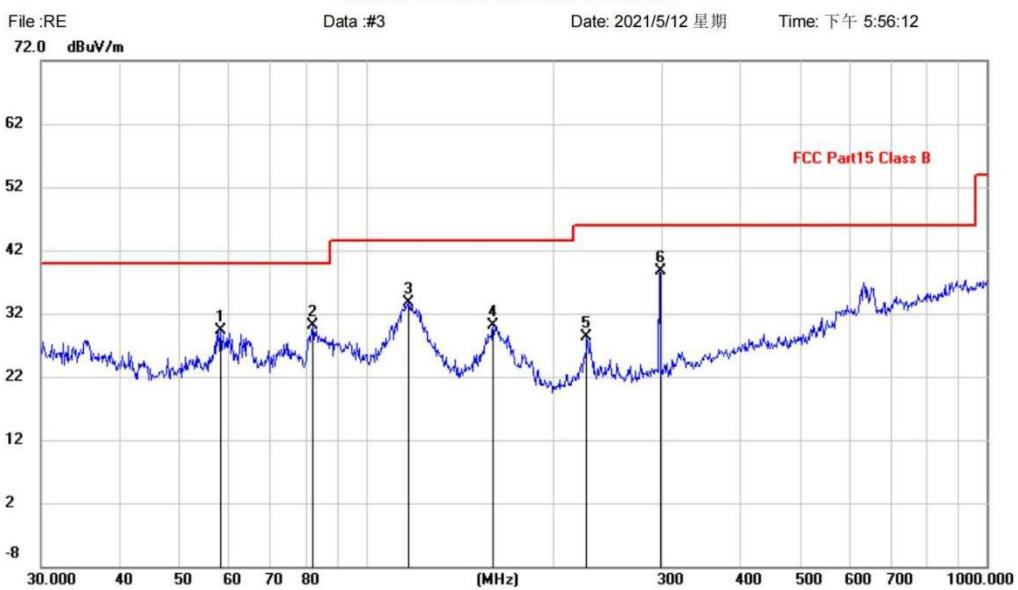

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 Class B

Power:

Humidity: %

EUT: Set-Top Box

Distance: 3m

M/N: MAG500A

Mode: BLE mode


Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		58.4074	5.83	23.50	29.33	40.00	-10.67	QP			
2		82.0704	10.42	19.59	30.01	40.00	-9.99	QP			
3		116.9495	11.39	22.25	33.64	43.50	-9.86	QP			
4		160.3454	6.95	23.15	30.10	43.50	-13.40	QP			
5		226.8934	6.10	22.24	28.34	46.00	-17.66	QP			
6	*	297.2241	14.87	23.85	38.72	46.00	-7.28	QP			

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

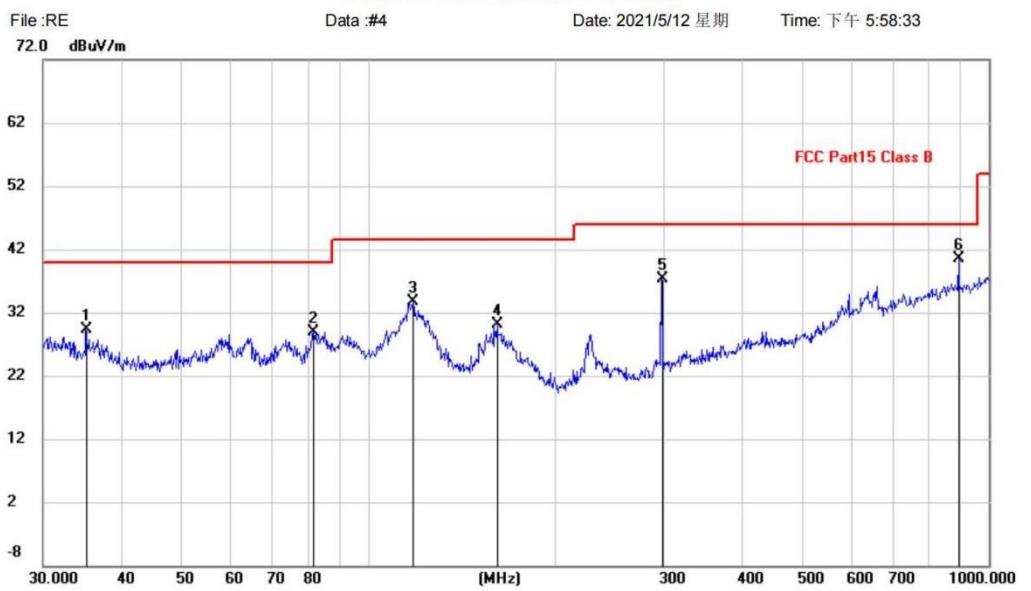[TestMode: TX]; [Polarity: Vertical]
Radiated Emission Measurement


Site Polarization: **Vertical** Temperature:
 Limit: FCC Part15 Class B Power: Humidity: %
 EUT: Set-Top Box Distance: 3m
 M/N: MAG500A
 Mode: BLE mode
 Note:

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	35.1278	6.01	23.37	29.38	40.00	-10.62	QP			
2	81.7831	9.21	19.60	28.81	40.00	-11.19	QP			
3	118.1860	11.38	22.38	33.76	43.50	-9.74	QP			
4	161.4739	6.98	23.05	30.03	43.50	-13.47	QP			
5	297.2241	13.42	23.85	37.27	46.00	-8.73	QP			
6 *	893.8567	4.79	35.67	40.46	46.00	-5.54	QP			

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Horizontal]


Radiated Emission Measurement

File :BLE

Data :#1

Date: 2021/6/3 星期

Time: 上午 11:27:28

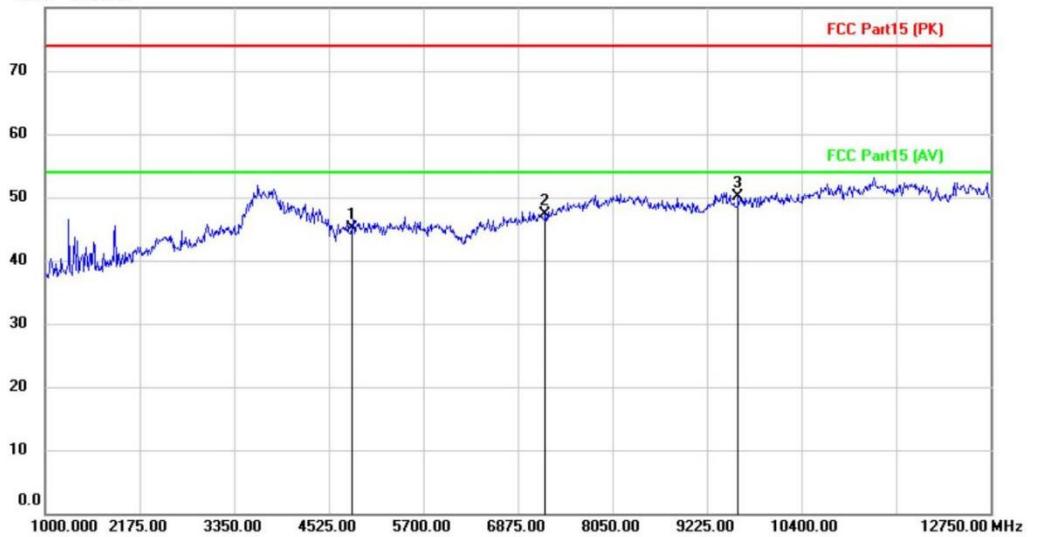

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Set-Top Box

Distance:

M/N: MAG50

Mode: TX-L

Note:

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Level	Factor	ment						
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	4804.000	41.38	3.71	45.09	74.00	-28.91	peak			
2	7206.000	41.43	5.96	47.39	74.00	-26.61	peak			
3 *	9608.000	40.88	9.29	50.17	74.00	-23.83	peak			

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]


Radiated Emission Measurement

File :BLE

Data :#2

Date: 2021/6/3 星期

Time: 上午 11:30:32

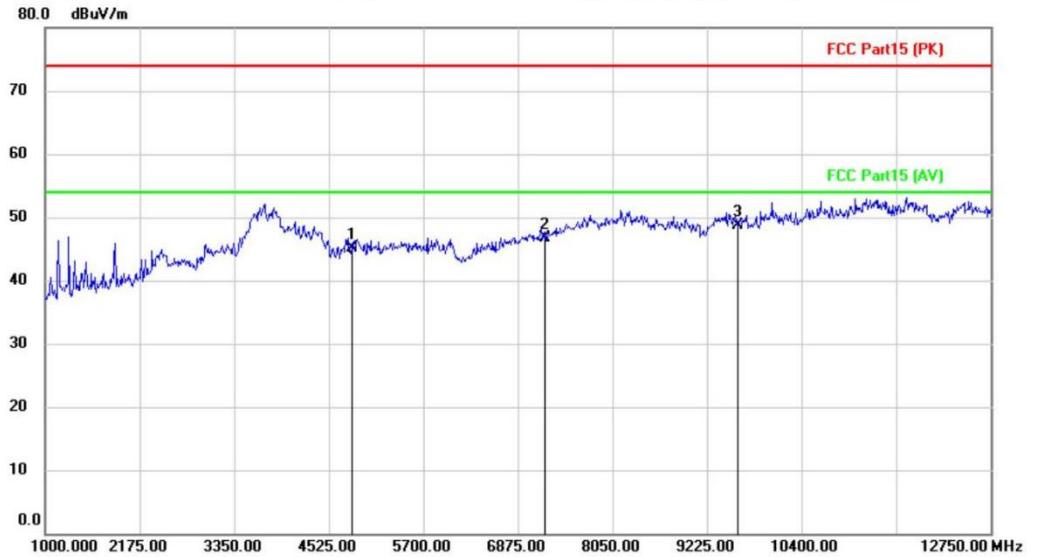

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Set-Top Box

Distance:

M/N: MAG50

Mode: TX-L

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4804.000	41.35	3.71	45.06	74.00	-28.94	peak			
2		7206.000	40.71	5.96	46.67	74.00	-27.33	peak			
3	*	9608.000	39.51	9.29	48.80	74.00	-25.20	peak			

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]


Radiated Emission Measurement

File :BLE

Data :#4

Date: 2021/6/3 星期

Time: 上午 11:37:58

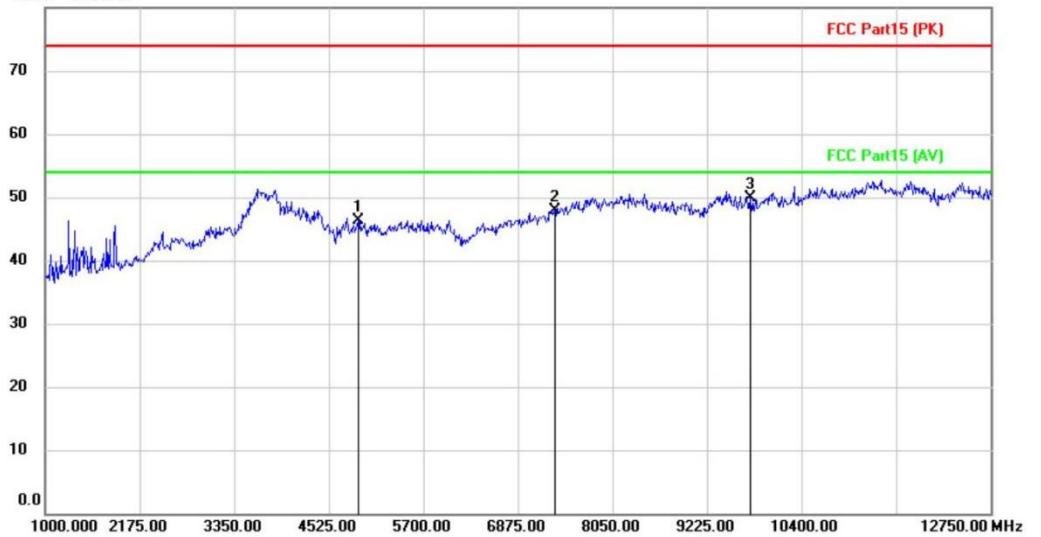

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Set-Top Box

Distance:

M/N: MAG50

Mode: TX-M

Note:

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Level	Factor	ment						
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	4882.000	42.95	3.36	46.31	74.00	-27.69	peak			
2	7323.000	41.42	6.43	47.85	74.00	-26.15	peak			
3 *	9764.000	40.27	9.63	49.90	74.00	-24.10	peak			

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]


Radiated Emission Measurement

File :BLE

Data :#3

Date: 2021/6/3 星期

Time: 上午 11:35:40

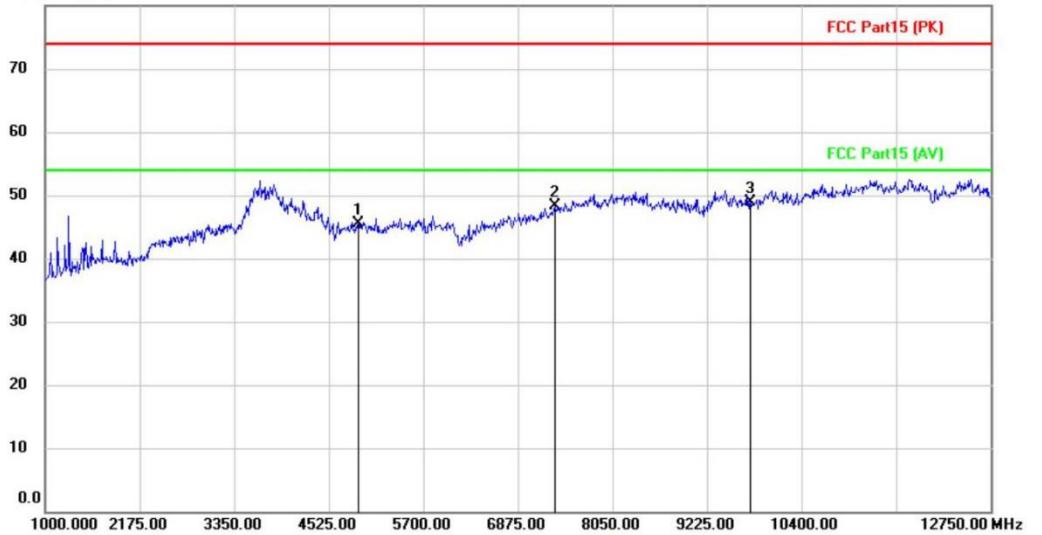

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Set-Top Box

Distance:

M/N: MAG50

Mode: TX-M

Note:

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Level	Factor	ment						
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	4882.000	42.11	3.36	45.47	74.00	-28.53	peak			
2	7323.000	41.84	6.43	48.27	74.00	-25.73	peak			
3 *	9764.000	39.35	9.63	48.98	74.00	-25.02	peak			

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass


[TestMode: TX high channel]; [Polarity: Horizontal]
Radiated Emission Measurement

File :BLE
80.0 dBuV/m

Data #:5

Date: 2021/6/3 星期

Time: 上午 11:40:55

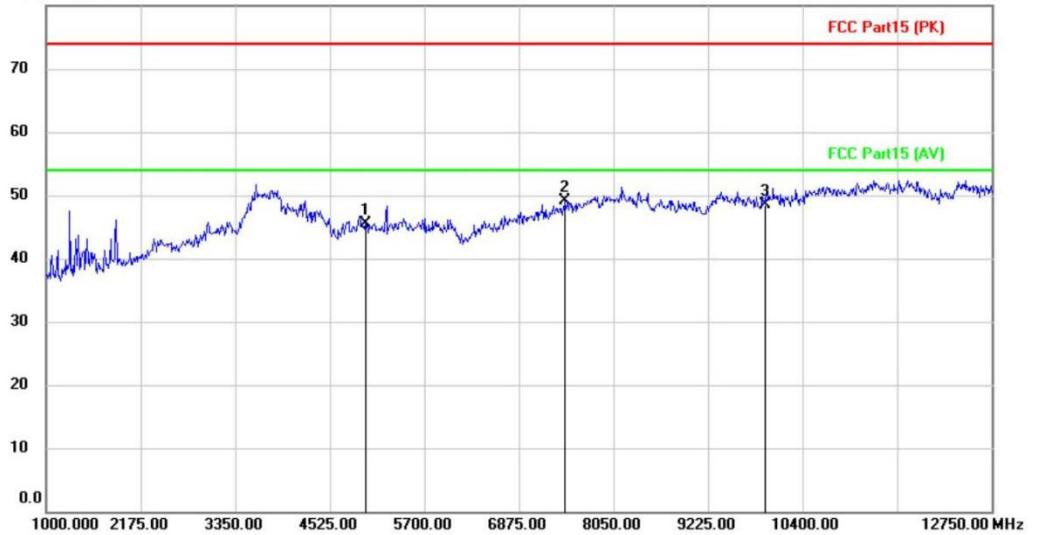

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Set-Top Box

Distance:

M/N: MAG500A

Mode: TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree
								Detector	Comment	
1		4960.000	41.83	3.75	45.58	74.00	-28.42	peak		
2	*	7440.000	42.16	6.86	49.02	74.00	-24.98	peak		
3		9920.000	38.44	10.16	48.60	74.00	-25.40	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]


Radiated Emission Measurement

File :BLE

Data :#6

Date: 2021/6/3 星期

Time: 上午 11:43:27

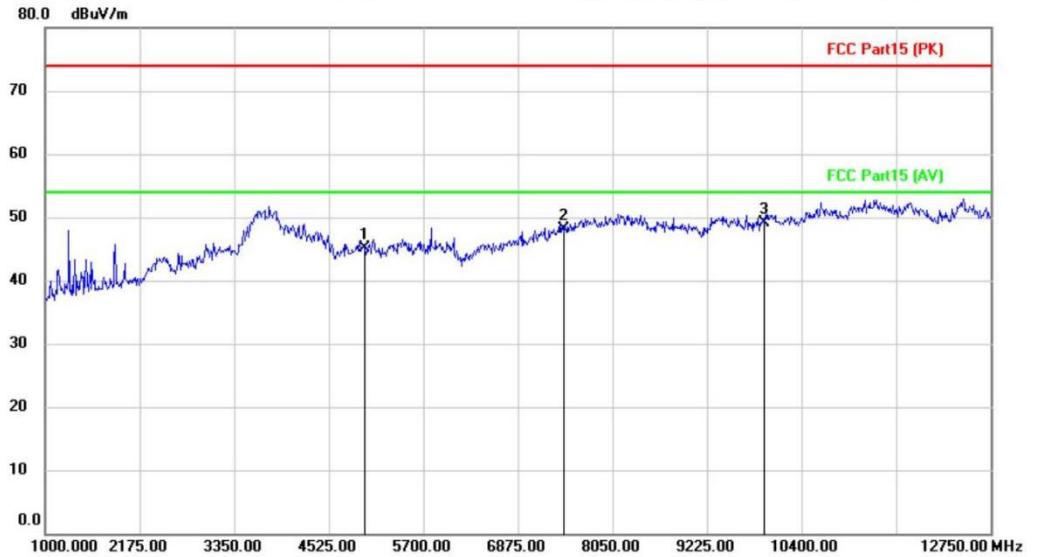

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Set-Top Box

Distance:

M/N: MAG500A

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4960.000	41.33	3.75	45.08	74.00	-28.92	peak			
2		7440.000	41.26	6.86	48.12	74.00	-25.88	peak			
3	*	9920.000	38.87	10.16	49.03	74.00	-24.97	peak			

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

17 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

17.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

17.2 BLOCK DIAGRAM OF TEST SETUP

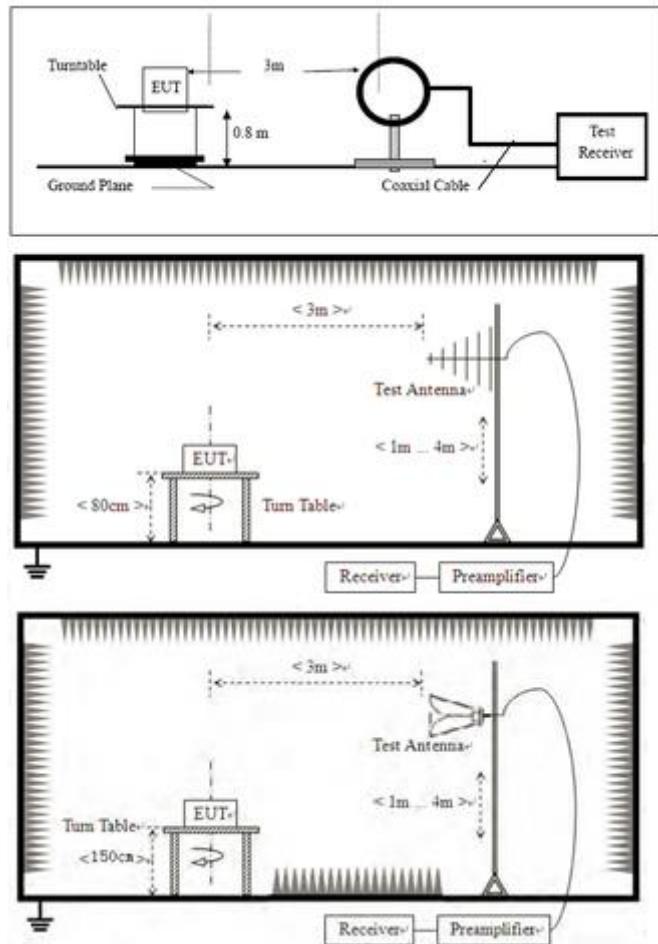

17.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

17.4 TEST DATA

[TestMode: TX Low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

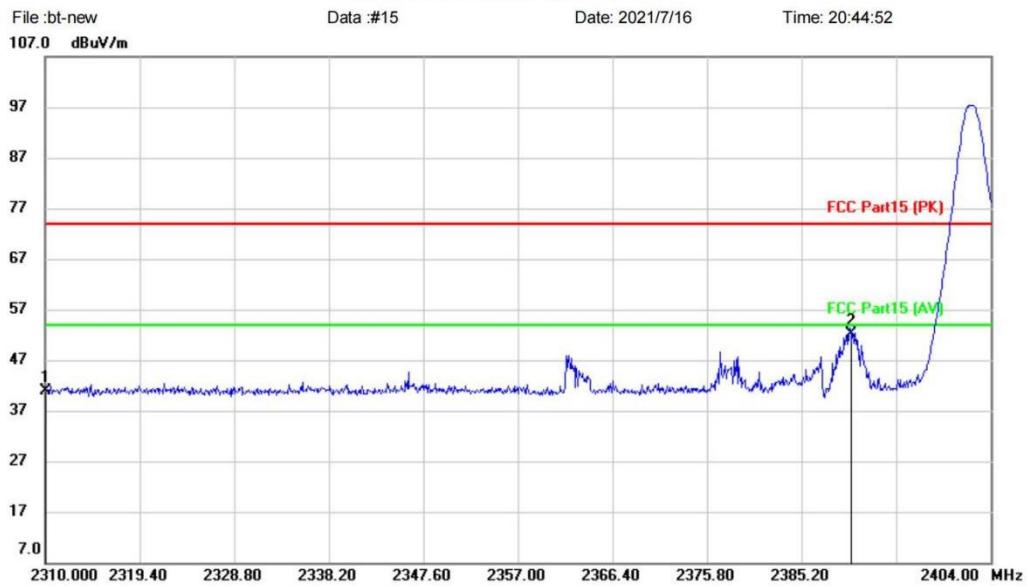


Site: FCC Part15 (PK)
Polarization: **Horizontal**
Temperature:
Power:
Humidity: %
EUT: Set-Top Box
Distance:
M/N: MAG500A
Mode: TX-L
Note:

No.	Mk.	Reading Freq. MHz	Correct Level dBuV	Measure- ment dB	Limit dBuV/m	Over dB	Antenna Detector	Table Height cm	Table Degree degree	Comment
1		2310.000	45.50	-4.61	40.89	74.00	-33.11	peak		
2	*	2390.000	56.50	-4.27	52.23	74.00	-21.77	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

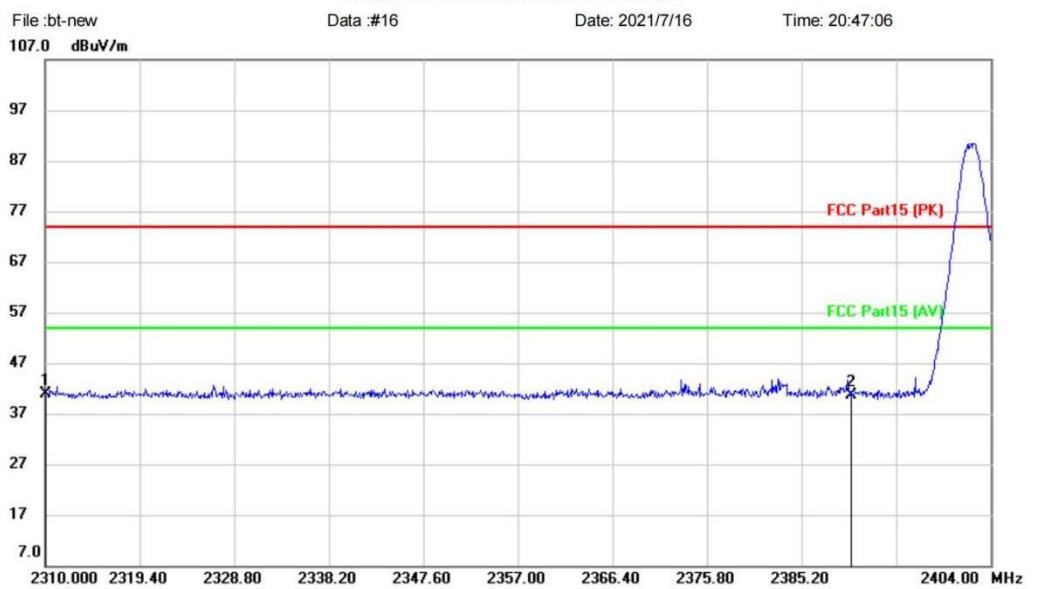[TestMode: TX Low channel]; [Polarity: Vertical]
Radiated Emission Measurement


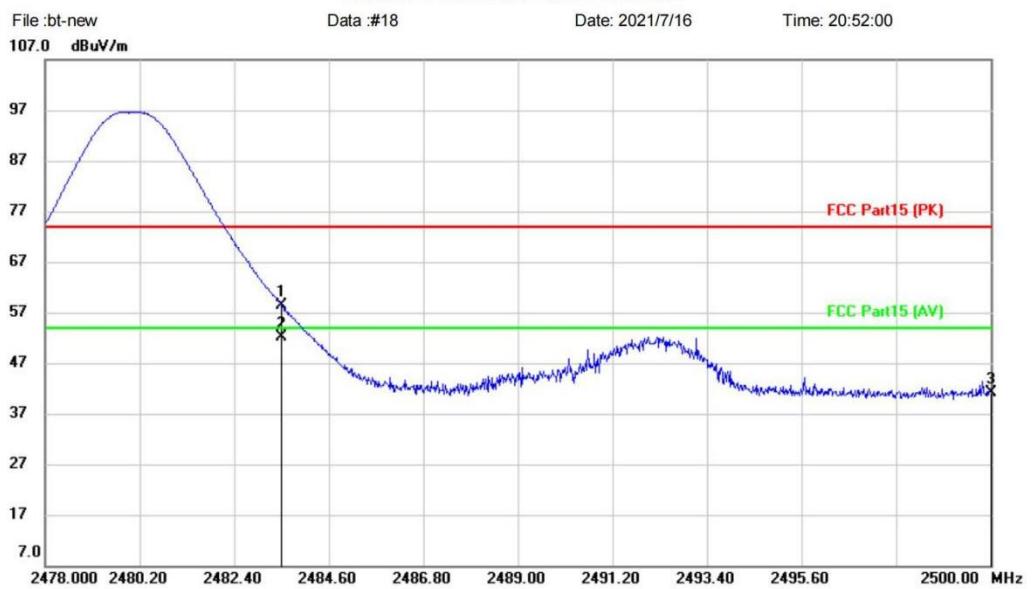
Site Polarization: **Vertical** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Set-Top Box Distance:
M/N: MAG500A
Mode: TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2310.000	45.37	-4.61	40.76	74.00	-33.24	peak			
2		2390.000	44.83	-4.27	40.56	74.00	-33.44	peak			

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]
Radiated Emission Measurement


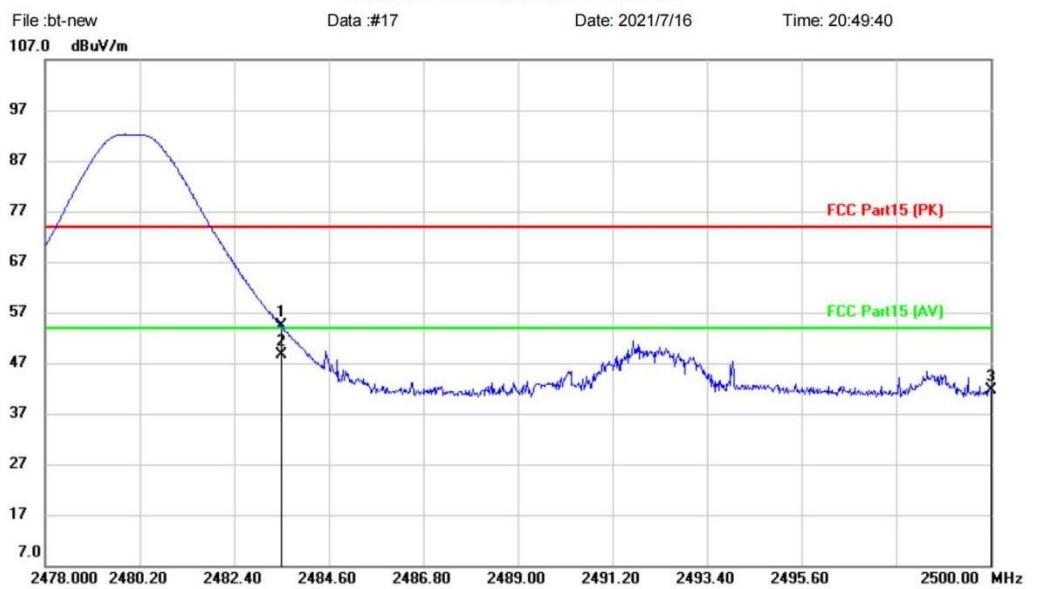
Site Polarization: **Horizontal** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Set-Top Box Distance:
M/N: MAG500A
Mode: TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	62.31	-3.84	58.47	74.00	-15.53	peak		
2	*	2483.500	56.02	-3.84	52.18	54.00	-1.82	AVG		
3		2500.000	44.82	-3.78	41.04	74.00	-32.96	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]
Radiated Emission Measurement


Site: Polarization: **Vertical** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Set-Top Box Distance:
M/N: MAG500A
Mode: TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	58.21	-3.84	54.37	74.00	-19.63	peak		
2	*	2483.500	52.57	-3.84	48.73	54.00	-5.27	AVG		
3		2500.000	45.44	-3.78	41.66	74.00	-32.34	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass


18 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25 °C
Humidity	52%

18.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

18.2 BLOCK DIAGRAM OF TEST SETUP

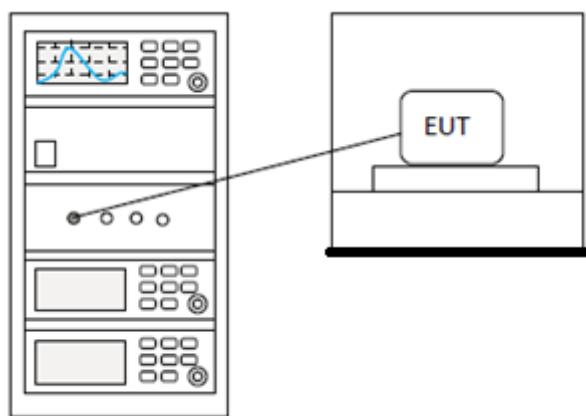

18.3 TEST DATA

Pass: Please Refer To Appendix: For Details


BlueAsia

19 APPENDIX


19.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	4.542	4.542	30	Pass
NVNT	BLE 1M	2442	Ant1	5.205	5.205	30	Pass
NVNT	BLE 1M	2480	Ant1	4.372	4.372	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

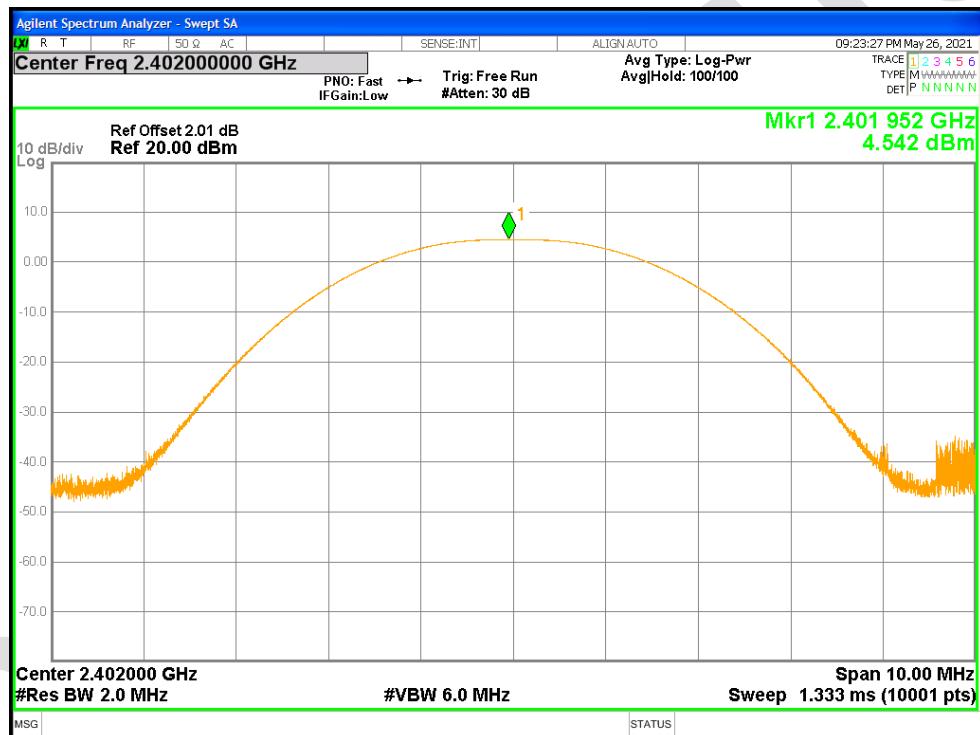

Power NVNT BLE 1M 2442MHz Ant1

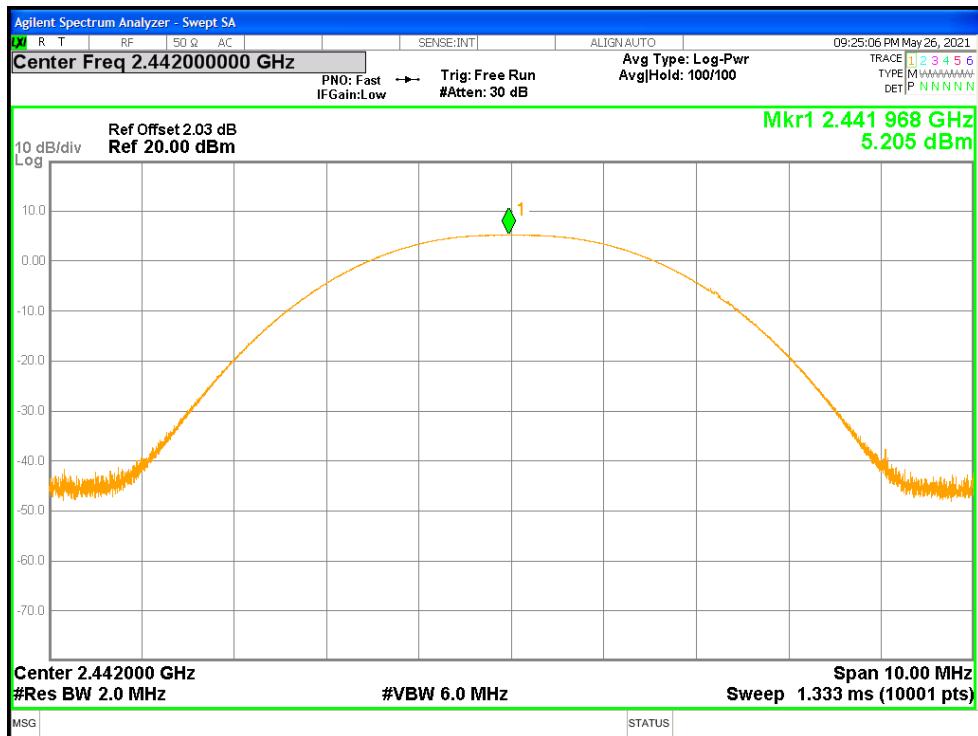


Power NVNT BLE 1M 2480MHz Ant1

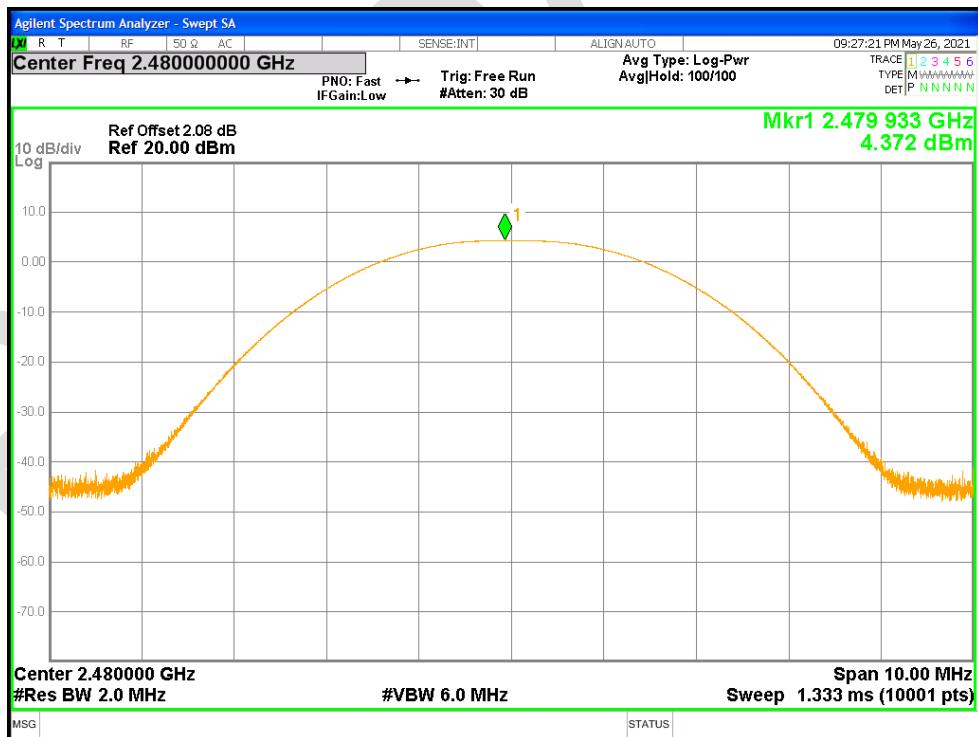


19.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.656	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.66	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.655	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

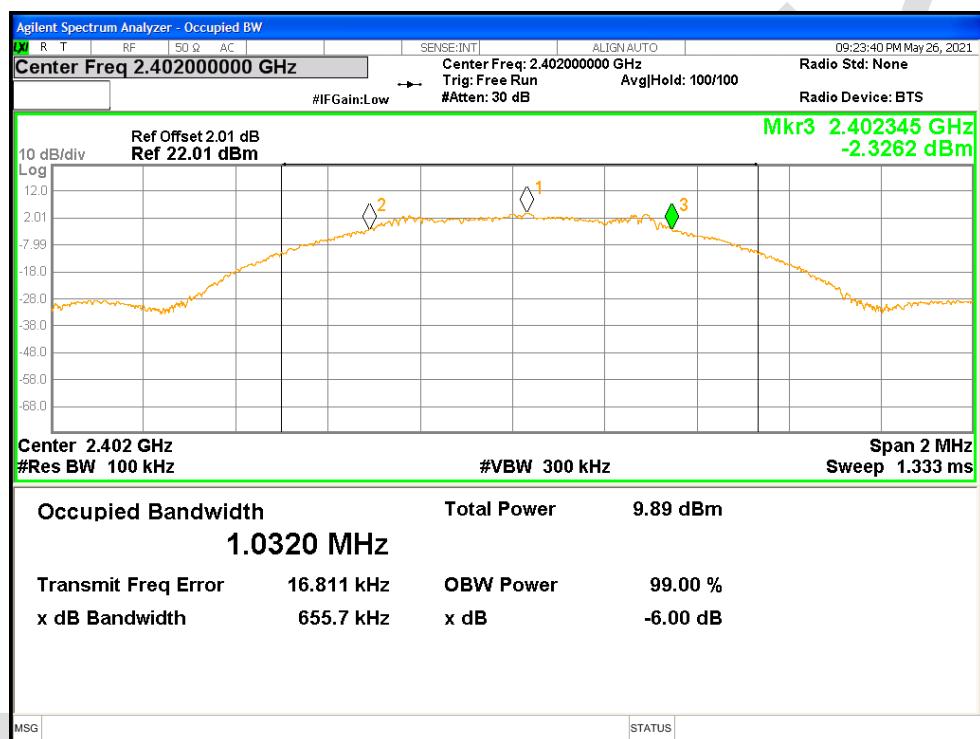

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

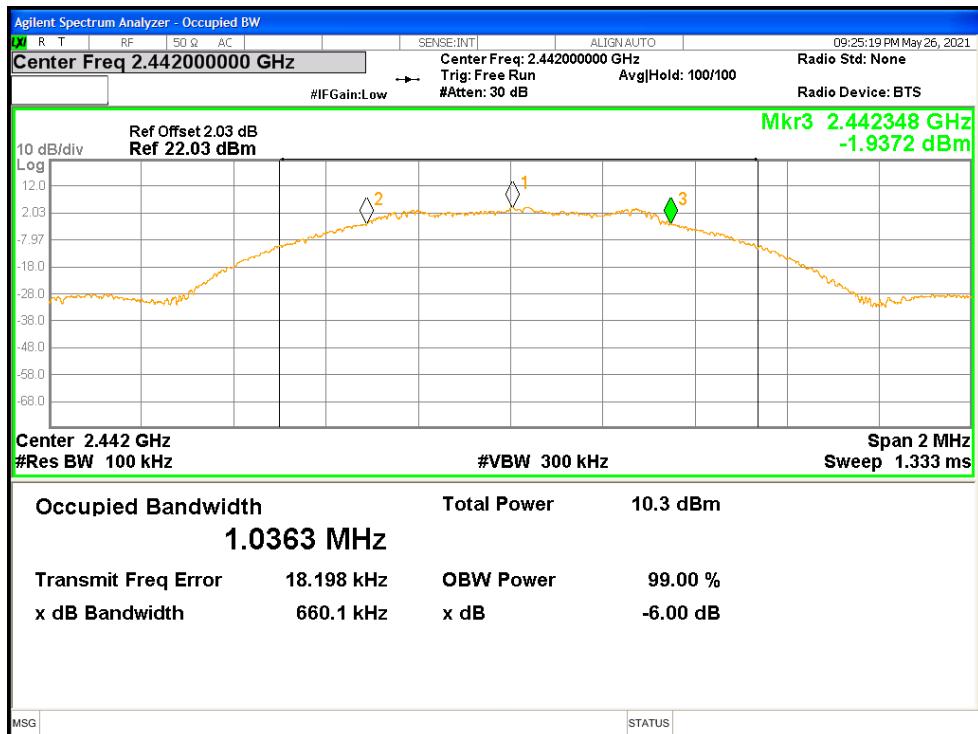


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1


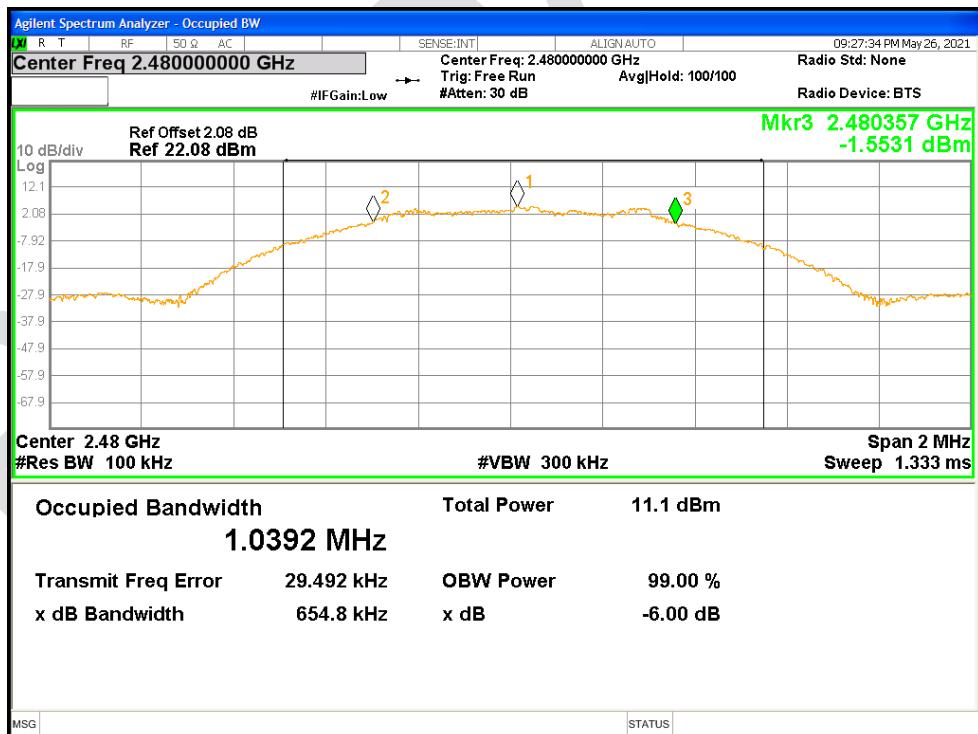


19.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.033280066
NVNT	BLE 1M	2442	Ant1	1.030770088
NVNT	BLE 1M	2480	Ant1	1.030948317

OBW NVNT BLE 1M 2402MHz Ant1

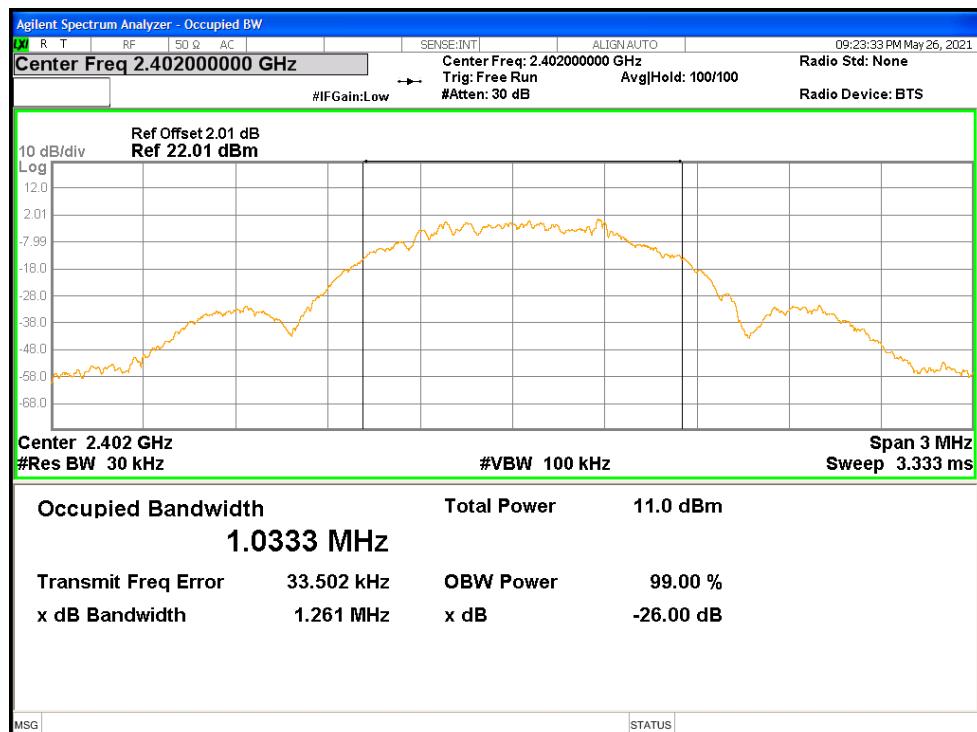


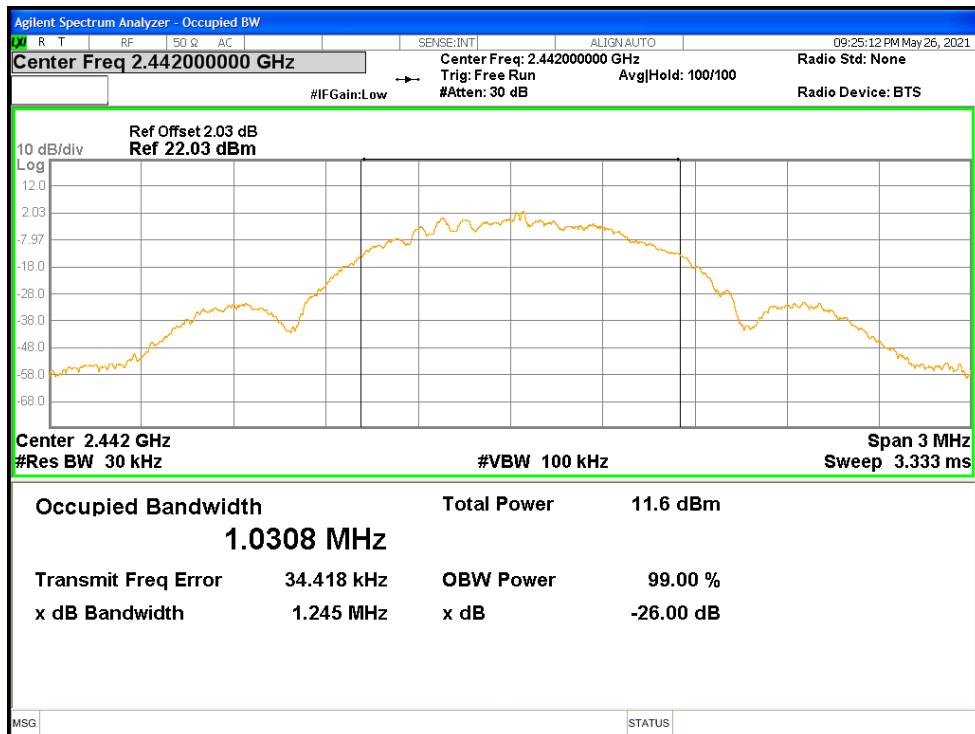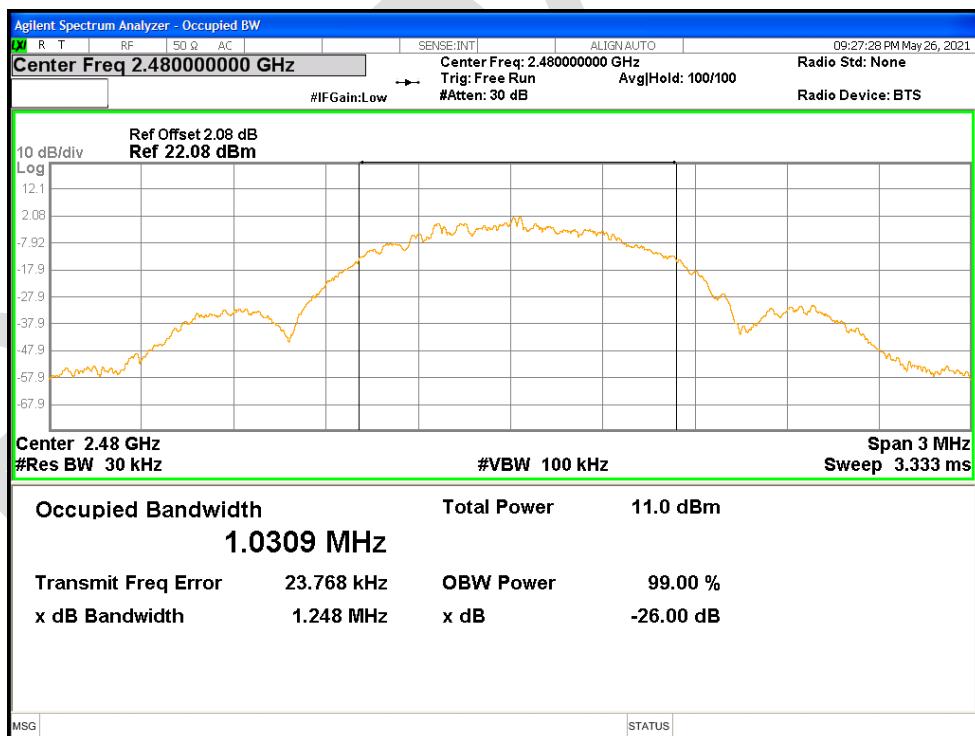OBW NVNT BLE 1M 2442MHz Ant1

OBW NVNT BLE 1M 2480MHz Ant1


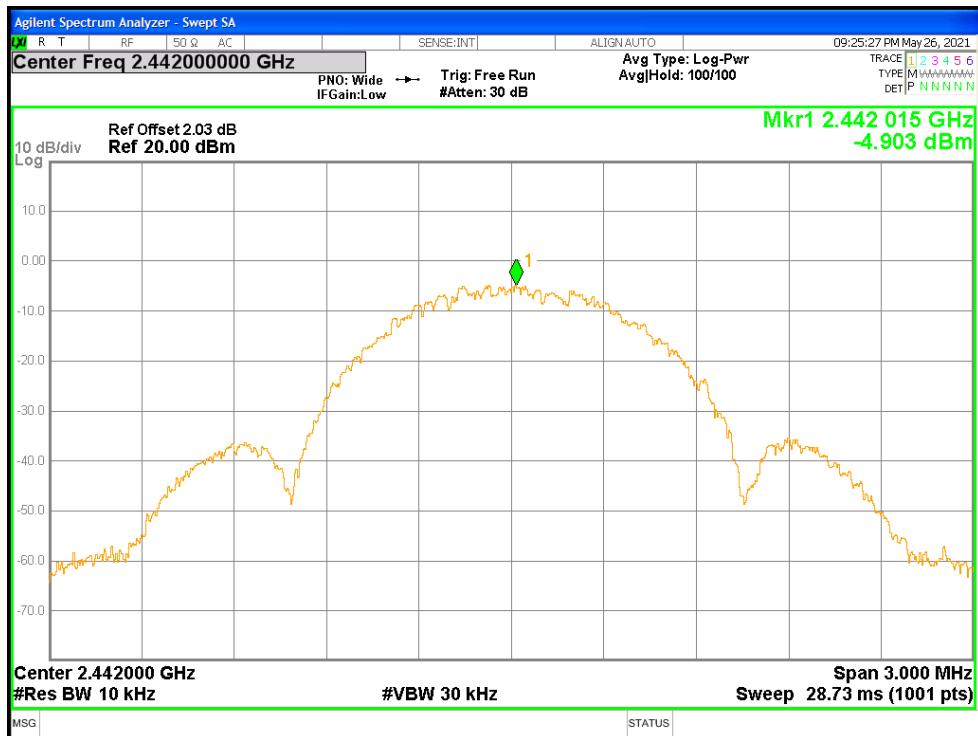
19.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-5.138	8	Pass
NVNT	BLE 1M	2442	Ant1	-4.903	8	Pass
NVNT	BLE 1M	2480	Ant1	-4.862	8	Pass

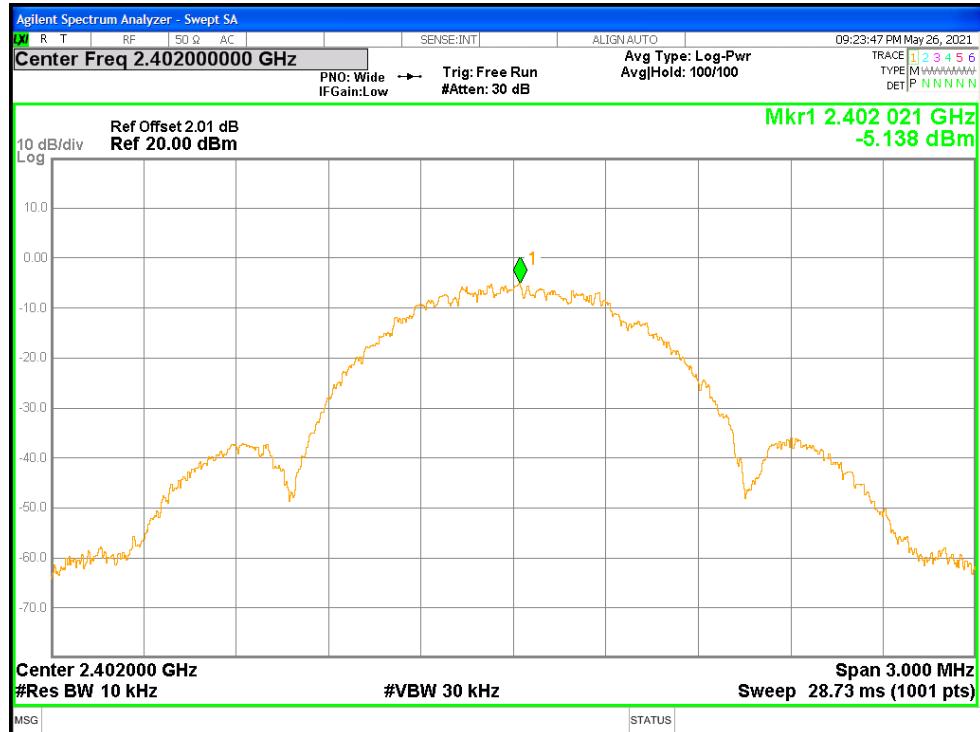
PSD NVNT BLE 1M 2402MHz Ant1



PSD NVNT BLE 1M 2442MHz Ant1




PSD NVNT BLE 1M 2480MHz Ant1

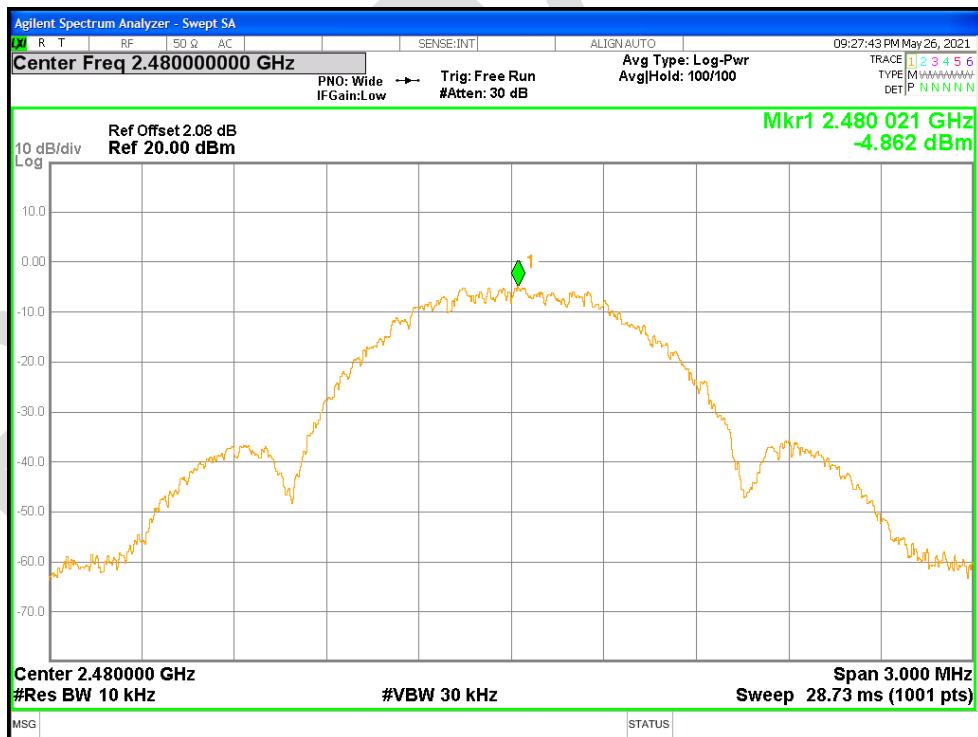


19.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-58.96	-30	Pass
NVNT	BLE 1M	2480	Ant1	-56.03	-30	Pass


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

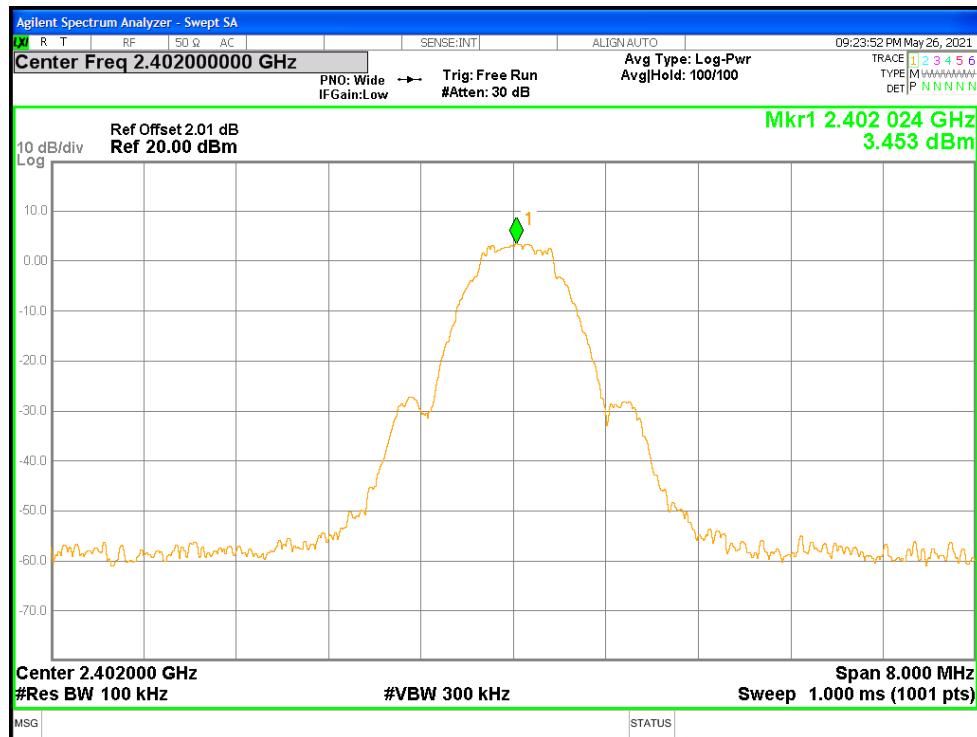


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

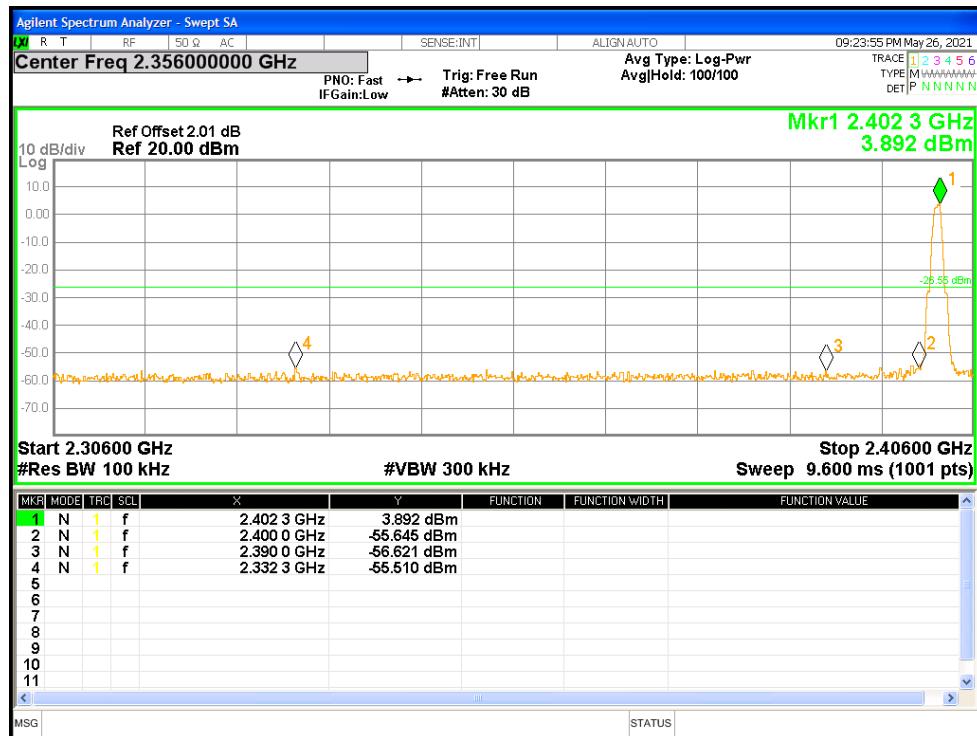

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

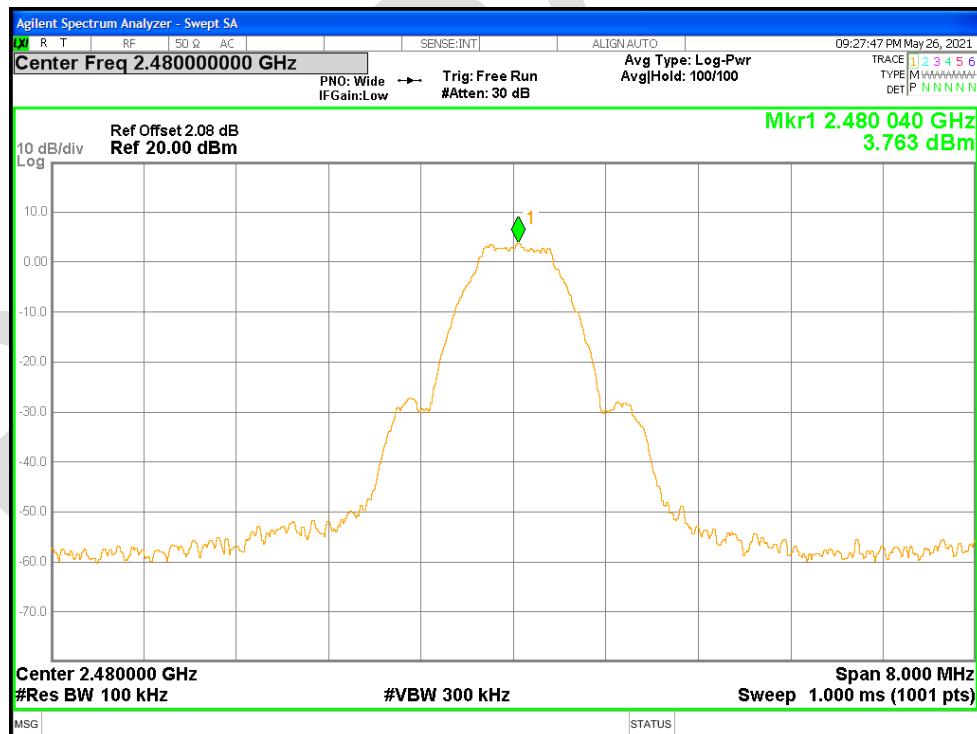


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

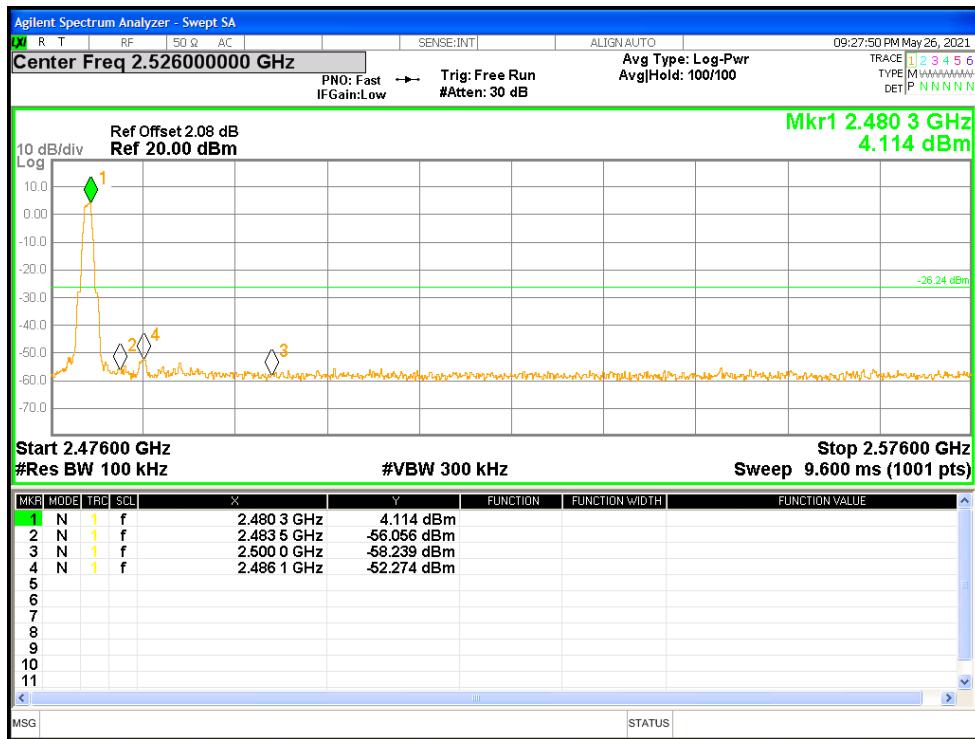


19.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-49.62	-30	Pass
NVNT	BLE 1M	2442	Ant1	-48.41	-30	Pass
NVNT	BLE 1M	2480	Ant1	-49.49	-30	Pass


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

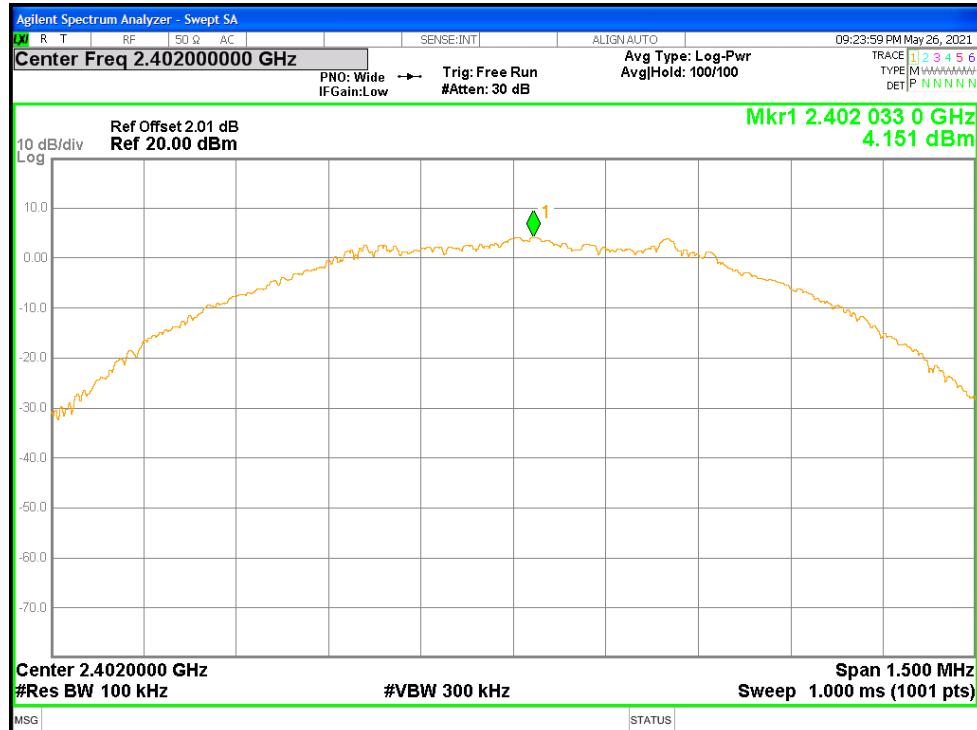


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

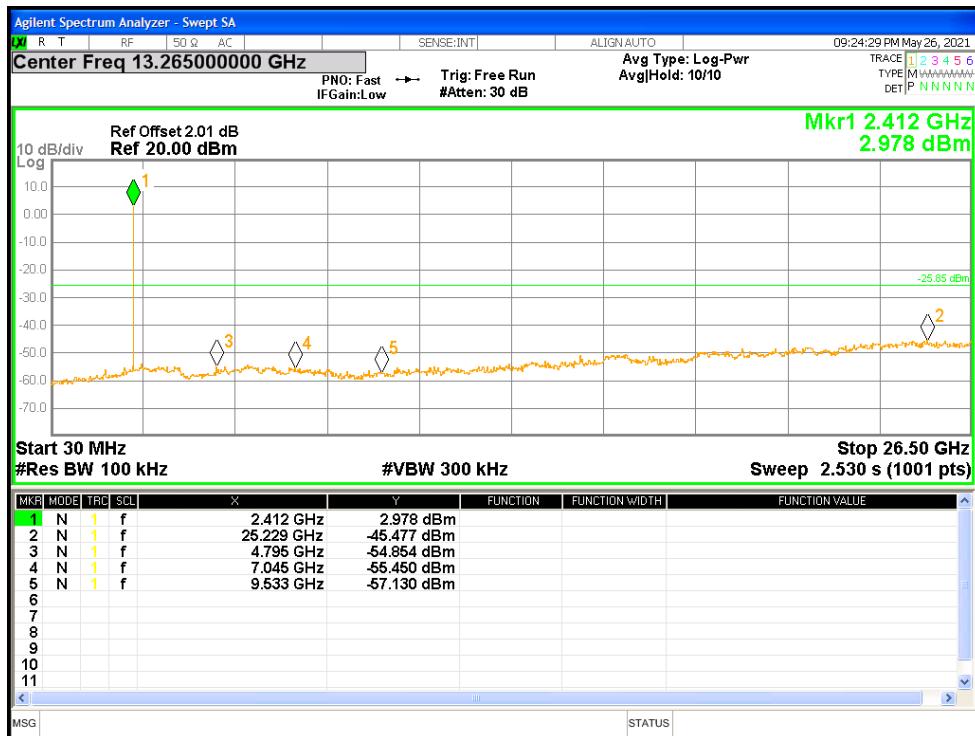


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

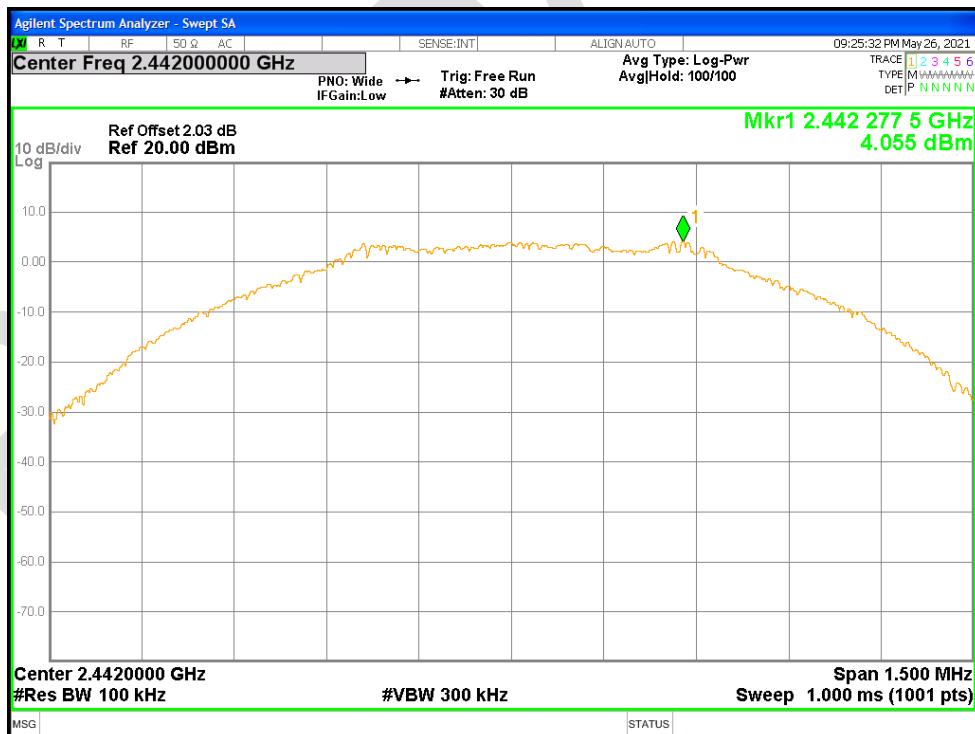


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

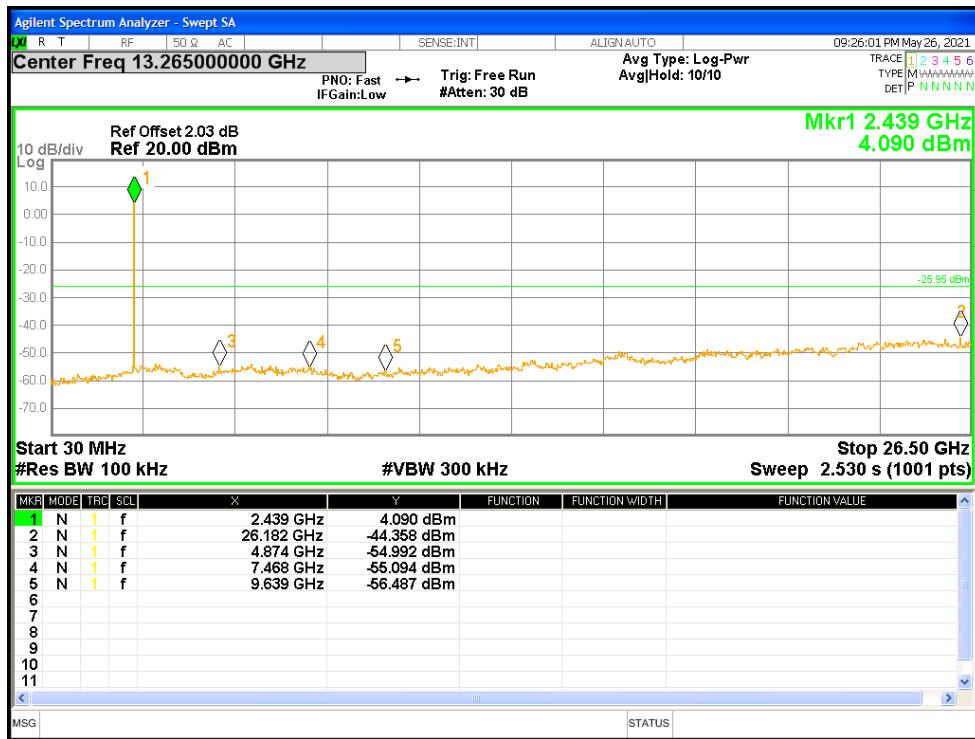

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

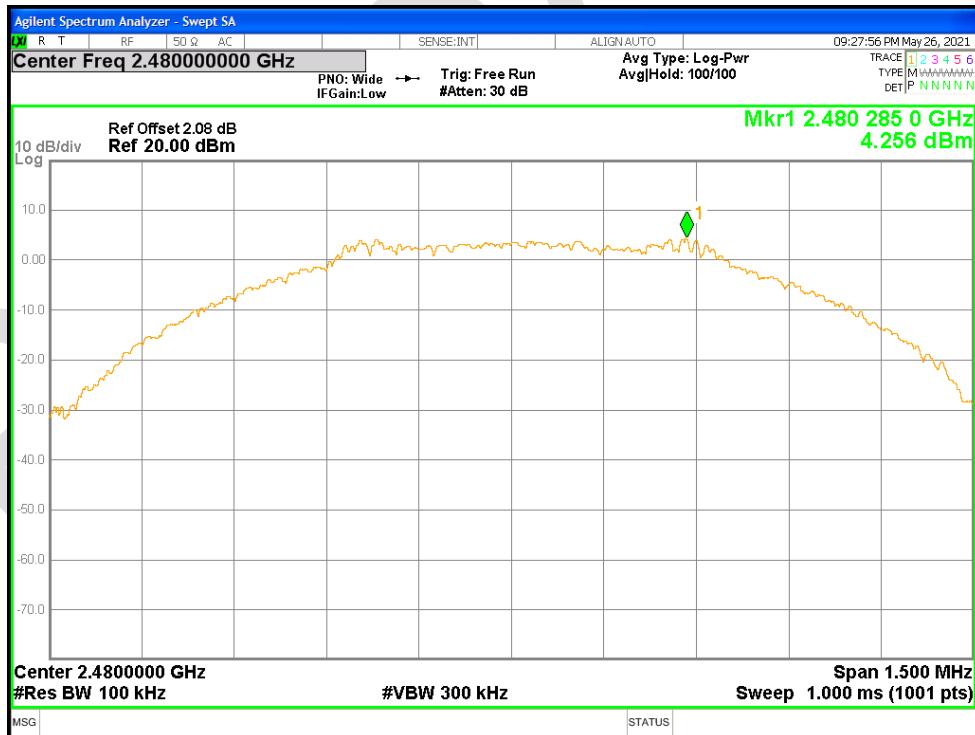


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

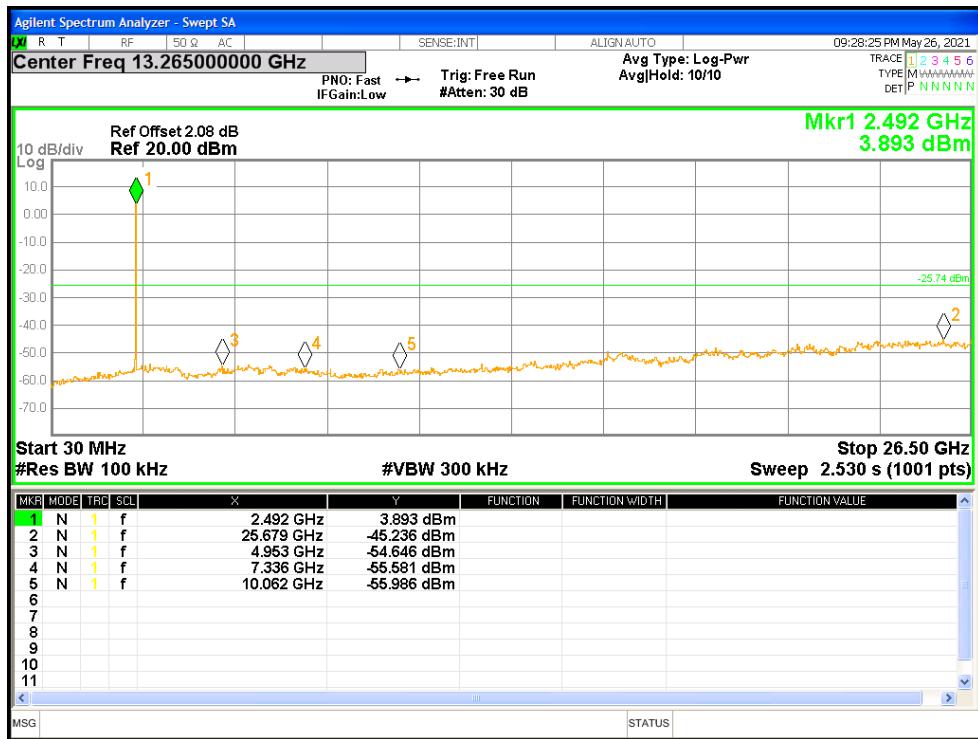

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)



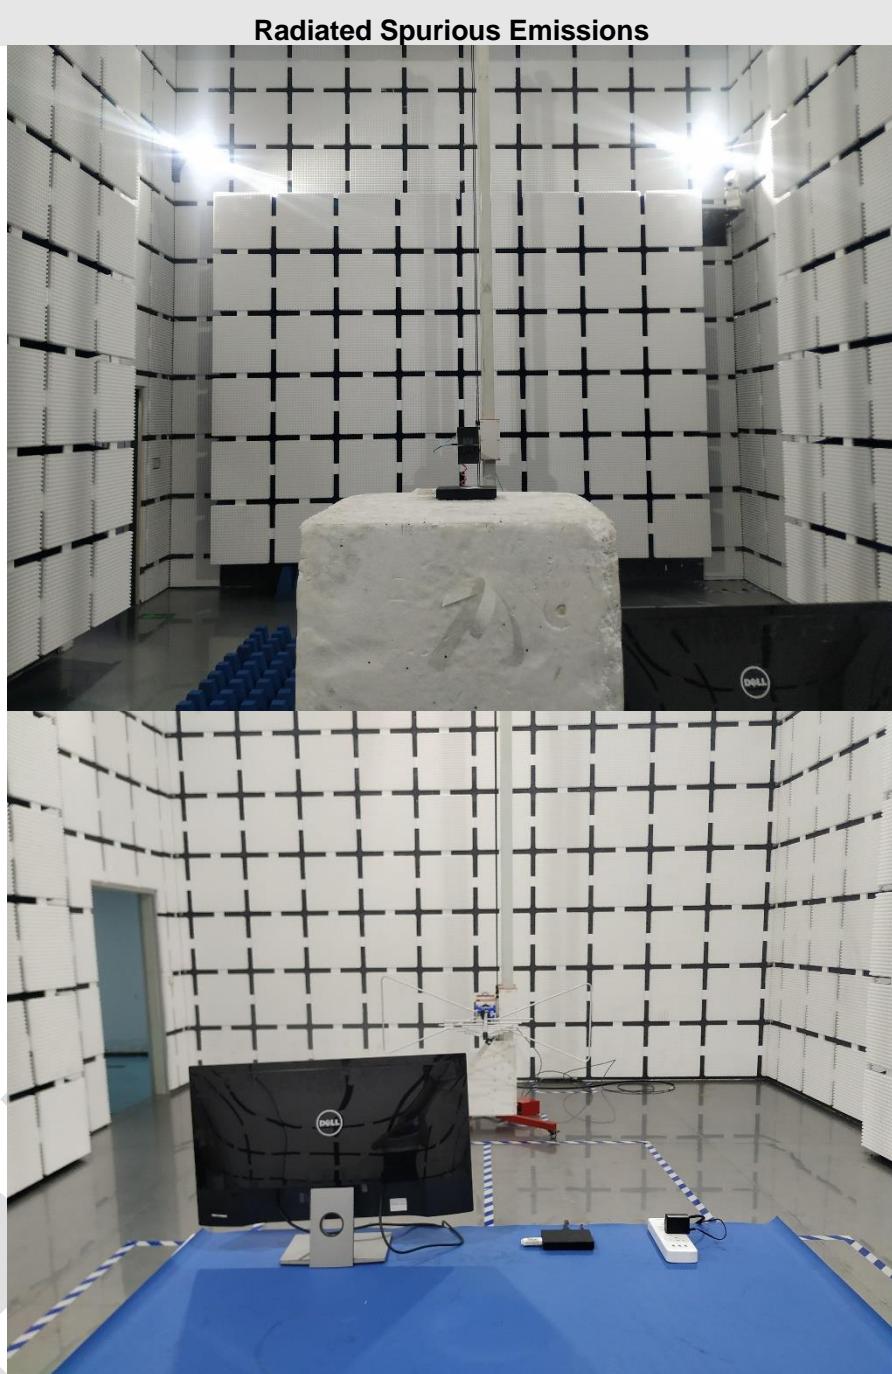

APPENDIX B: PHOTOGRAPHS OF EUT

(Reference to the report NO.BLA-EMC-202105-A0701)

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia