

TEST REPORT

Product Name : Set-Top Box
Brand Mark : Infomir
Model No. : MAG540w3
Extension model : MAG544w3, MAG555A
Report Number : BLA-EMC-202210-A8202
FCC ID : 2AUIR-IM010DXXX1
Date of Sample Receipt : 2022/11/1
Date of Test : 2022/11/3 to 2023/1/3
Date of Issue : 2023/1/6
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

TELECOMMUNICATION TECHNOLOGIES, LLC
1, Mytna Sq., Odesa, 65026, Ukraine

Prepared by:

BlueAsia Technical Services(Shenzhen) Co.,Ltd.
No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict,
Bao'an District, Shenzhen,Guangdong ,China
TEL: +86-755-23059481

Compiled by: *Jozu*
Approved by: *Blue Zheng*

Review by: *Sueels*
Date: 2023/1/6



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/1/6	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT	9
8	LABORATORY LOCATION	9
9	TEST INSTRUMENTS LIST	10
10	POWER SPECTRUM DENSITY	12
10.1	LIMITS	12
10.2	BLOCK DIAGRAM OF TEST SETUP	12
10.3	TEST DATA	12
11	ANTENNA REQUIREMENT	13
11.1	CONCLUSION	13
12	RADIATED SPURIOUS EMISSIONS	14
12.1	LIMITS	14
12.2	BLOCK DIAGRAM OF TEST SETUP	15
12.3	PROCEDURE	15
12.4	TEST DATA	17
13	CONDUCTED PEAK OUTPUT POWER	26
13.1	LIMITS	26
13.2	BLOCK DIAGRAM OF TEST SETUP	26
13.3	TEST DATA	27
14	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	28
14.1	LIMITS	28
14.2	BLOCK DIAGRAM OF TEST SETUP	29
14.3	PROCEDURE	29
14.4	TEST DATA	31

15	CONDUCTED SPURIOUS EMISSIONS	48
15.1	LIMITS	48
15.2	BLOCK DIAGRAM OF TEST SETUP	48
15.3	TEST DATA	49
16	CONDUCTED BAND EDGES MEASUREMENT	50
16.1	LIMITS	50
16.2	BLOCK DIAGRAM OF TEST SETUP	50
16.3	TEST DATA	51
17	MINIMUM 6DB BANDWIDTH	52
17.1	LIMITS	52
17.2	BLOCK DIAGRAM OF TEST SETUP	52
17.3	TEST DATA	52
18	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	53
18.1	LIMITS	53
18.2	BLOCK DIAGRAM OF TEST SETUP	53
18.3	PROCEDURE	53
18.4	TEST DATA	55
19	APPENDIX	58
19.1	APPENDIX A: DTS BANDWIDTH	58
	<i>Test Result</i>	58
	<i>Test Graphs</i>	59
19.2	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	77
	<i>Test Result</i>	77
	<i>Test Graphs</i>	78
19.3	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	96
	<i>Test Result</i>	96
	<i>Test Graphs</i>	97
19.4	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	115
	<i>Test Result</i>	115
	<i>Test Graphs</i>	116
19.5	APPENDIX E: BAND EDGE MEASUREMENTS	134
	<i>Test Result</i>	134
	<i>Test Graphs</i>	135
19.6	APPENDIX F: CONDUCTED SPURIOUS EMISSION	147

Test Result	147
Test Graphs	149

APPENDIX A: PHOTOGRAPHS OF TEST SETUP	203
--	------------

APPENDIX B: PHOTOGRAPHS OF EUT	205
---	------------

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(1) & 15.247(b)(3)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass

2 GENERAL INFORMATION

Applicant	TELECOMMUNICATION TECHNOLOGIES, LLC
Address	1, Mytna Sq., Odesa, 65026, Ukraine
Manufacturer	TELECOMMUNICATION TECHNOLOGIES, LLC
Address	1, Mytna Sq., Odesa, 65026, Ukraine
Factory	TELECOMMUNICATION TECHNOLOGIES, LLC
Address	1, Mytna Sq., Odesa, 65026, Ukraine
Product Name	Set-Top Box
Test Model No.	MAG540w3
Extension model	MAG544w3, MAG555A
Note	All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	540-06C
Software Version	v.2.20.21-pub-540
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7
Antenna Type:	Internal Antenna
Antenna Gain:	ANT1:2.69dBi; ANT2:2.69dBi (Provided by the applicant)
Note:	Antenna number : 2 SISO mode: 802.11b, 802.11g MIMO mode: 802.11n(HT20)/ 802.11n(HT40) Directional gain of MIMO mode: $2.69+10\log 2=5.70\text{dBi}<6\text{dBi}$

Remark: The Antenna Gain is supplied by the customer. BlueAsia is not responsible for this data

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC5V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (Duty cycle $\geq$ 98%)
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	± 4.34 dB
Radiated Emission(30Mz-1000MHz)	± 4.24 dB
Radiated Emission(1GHz-18GHz)	± 4.68 dB
AC Power Line Conducted Emission(150kHz-30MHz)	± 3.45 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
N/A	N/A	N/A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia Technical Services(Shenzhen) Co.,Ltd.
No.41, South of Beihuan Road, Shangwu Community, Shiyao Subdistrict, Bao'an District,
Shenzhen,Guangdong ,China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2023/08/16
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2023/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2023/6/30


10 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

10.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

10.2 BLOCK DIAGRAM OF TEST SETUP

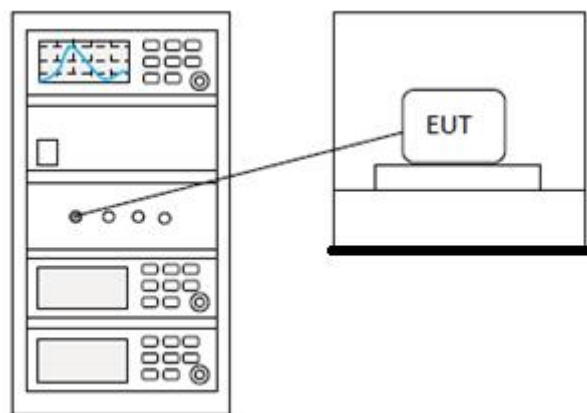

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

11 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

11.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The best case gain of the antenna is 2.69dBi.

12 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

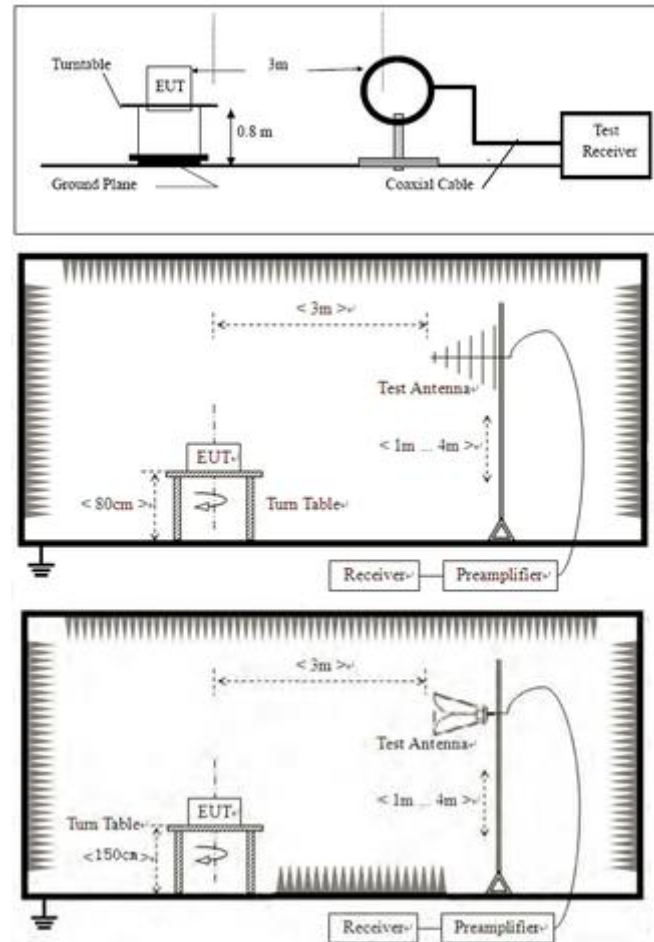

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


12.4 TEST DATA

[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

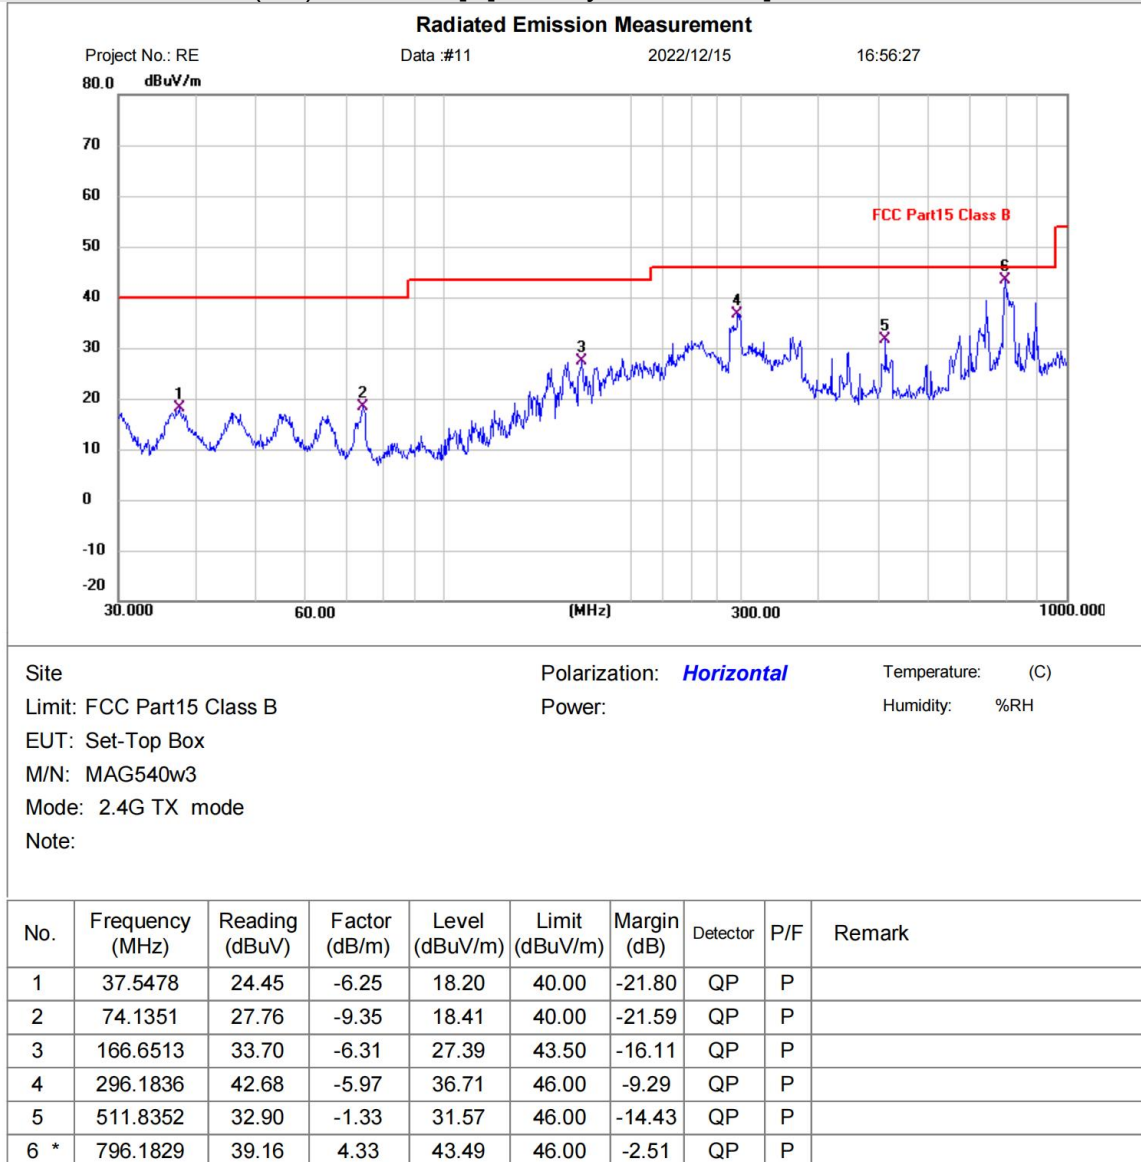

Test Result: Pass


[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

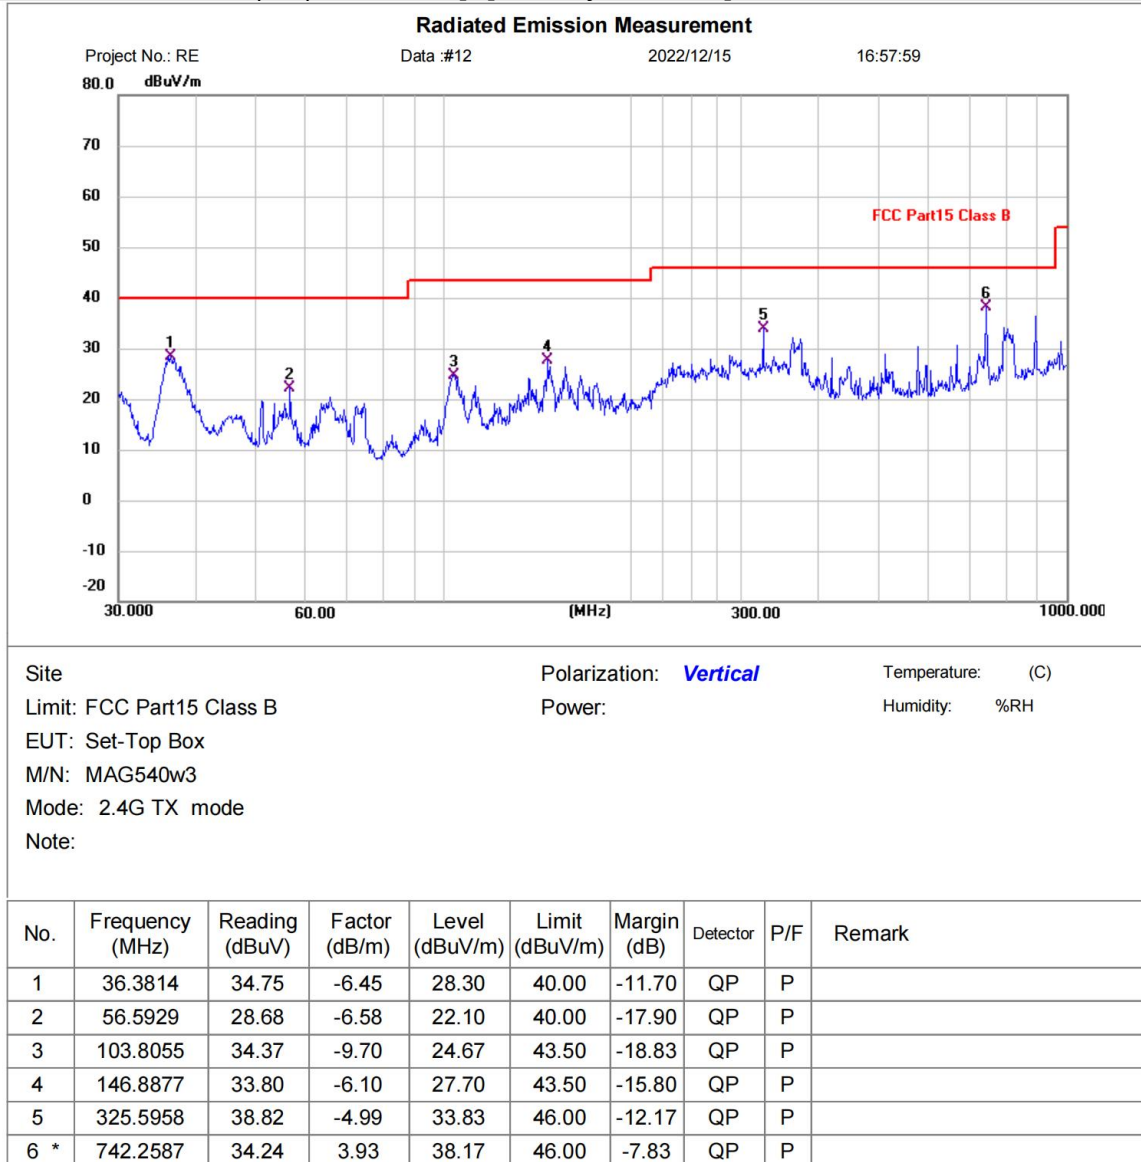

Test Result: Pass


Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11n(HT40) mode which it is worse case.

[TestMode: TX 11n(HT40) low channel]; [Polarity: Horizontal]

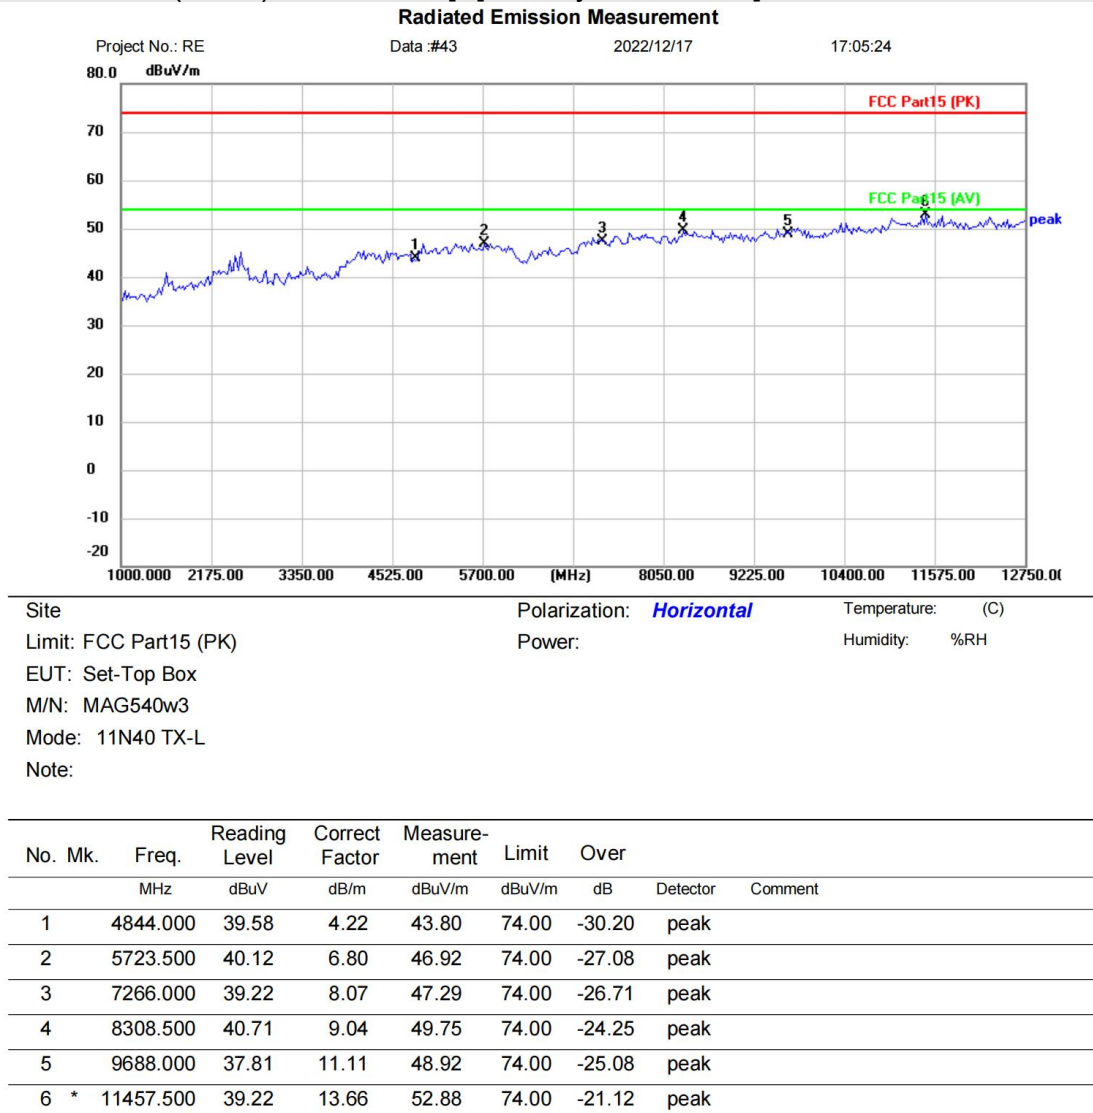

Test Result: Pass


[TestMode: TX 11n(HT40) low channel]; [Polarity: Vertical]

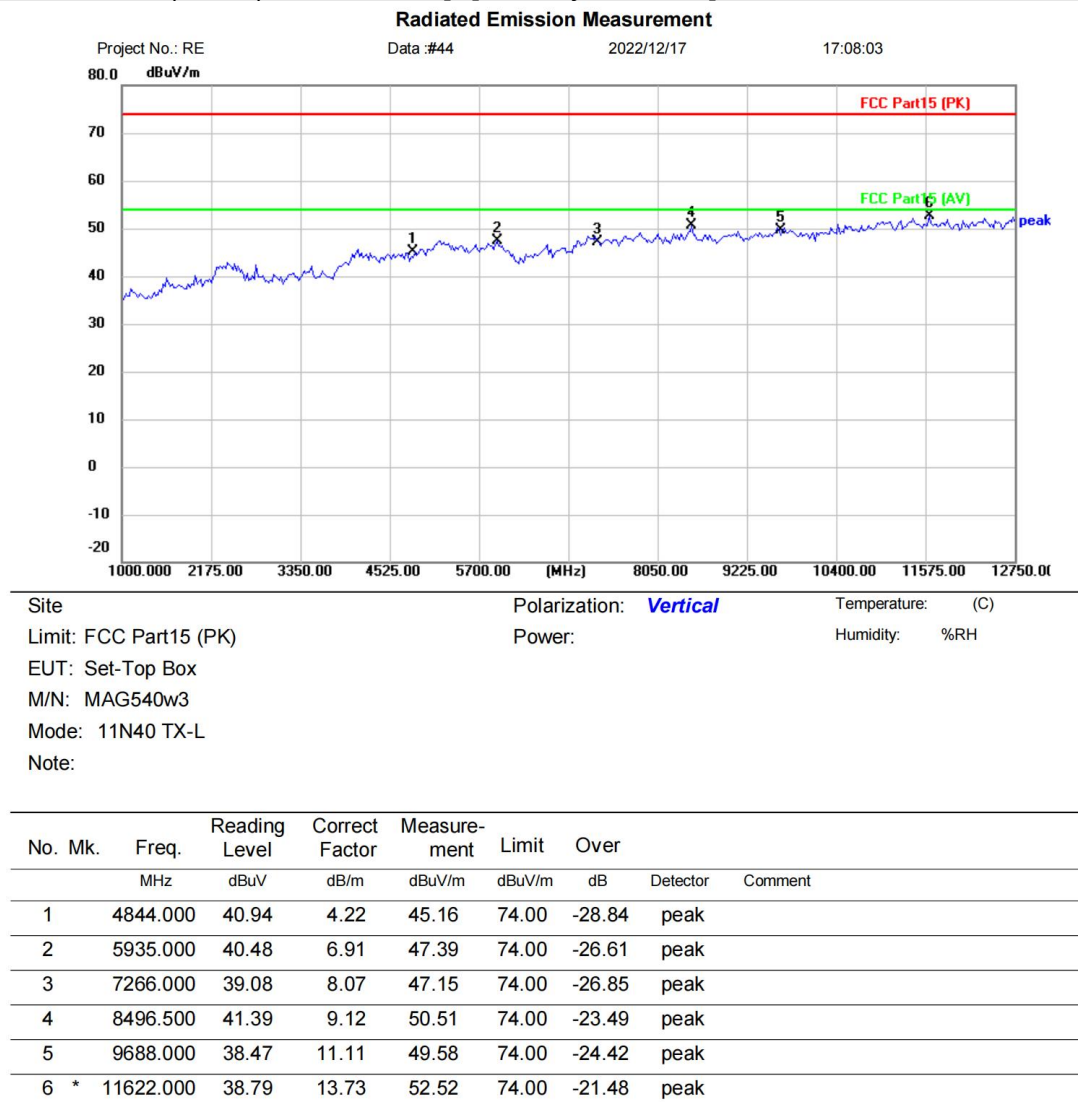

Test Result: Pass

[TestMode: TX 11n(HT40) mid channel]; [Polarity: Vertical]

Radiated Emission Measurement

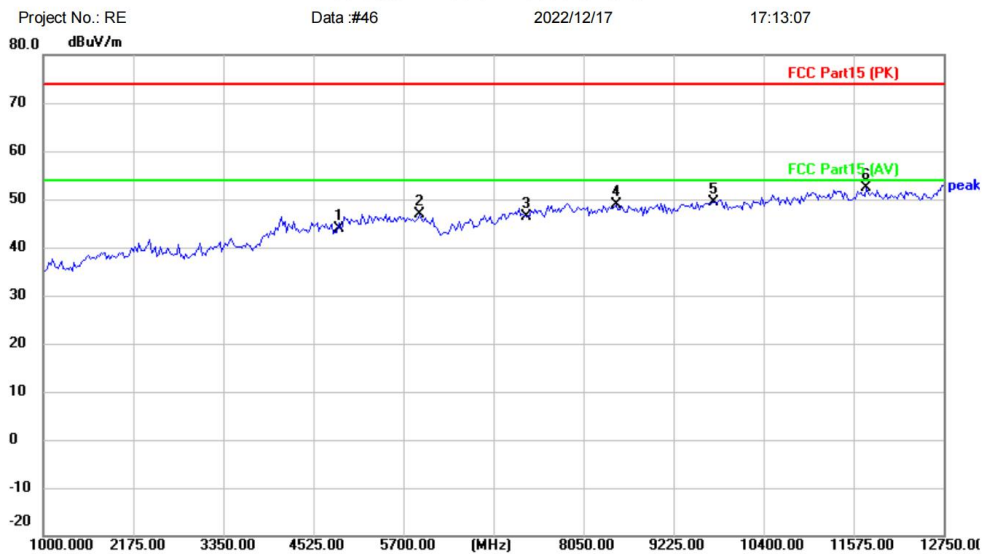

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Set-Top Box
M/N: MAG540w3
Mode: 11N40 TX-M
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		4874.000	39.68	4.32	44.00	74.00	-30.00	peak	
2		5911.500	39.96	6.85	46.81	74.00	-27.19	peak	
3		7311.000	38.30	8.18	46.48	74.00	-27.52	peak	
4		8473.000	39.77	9.12	48.89	74.00	-25.11	peak	
5		9748.000	38.01	11.26	49.27	74.00	-24.73	peak	
6	*	11739.500	38.64	13.78	52.42	74.00	-21.58	peak	

Test Result: Pass

[TestMode: TX 11n(HT40) mid channel]; [Polarity: Horizontal]

Radiated Emission Measurement



Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Set-Top Box
M/N: MAG540w3
Mode: 11N40 TX-M
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2386.500	43.00	-1.11	41.89	74.00	-32.11	peak	
2		4874.000	40.75	4.32	45.07	74.00	-28.93	peak	
3		7311.000	38.63	8.18	46.81	74.00	-27.19	peak	
4		8379.000	40.06	9.07	49.13	74.00	-24.87	peak	
5		9748.000	38.52	11.26	49.78	74.00	-24.22	peak	
6	*	11763.000	39.15	13.80	52.95	74.00	-21.05	peak	

Test Result: Pass

[TestMode: TX 11n(HT40) high channel]; [Polarity: Horizontal]

Radiated Emission Measurement




Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Set-Top Box
M/N: MAG540w3
Mode: 11N40 TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		4904.000	45.90	4.49	50.39	74.00	-23.61	peak	
2		7356.000	39.44	8.28	47.72	74.00	-26.28	peak	
3		9808.000	37.43	11.41	48.84	74.00	-25.16	peak	
4	*	12327.000	38.21	13.88	52.09	74.00	-21.91	peak	
5		8520.000	39.85	9.13	48.98	74.00	-25.02	peak	
6		5794.000	41.99	6.77	48.76	74.00	-25.24	peak	

Test Result: Pass

[TestMode: TX 11n(HT40) high channel]; [Polarity: Vertical]

Radiated Emission Measurement

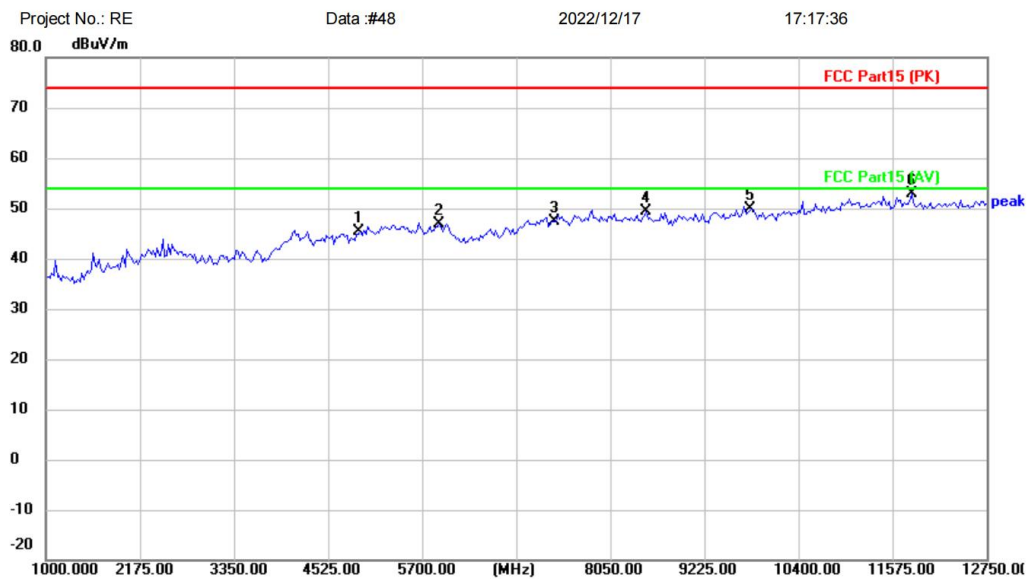

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Set-Top Box
M/N: MAG540w3
Mode: 11N40 TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		4904.000	40.80	4.49	45.29	74.00	-28.71	peak	
2		5911.500	40.09	6.85	46.94	74.00	-27.06	peak	
3		7356.000	39.02	8.28	47.30	74.00	-26.70	peak	
4		8496.500	40.19	9.12	49.31	74.00	-24.69	peak	
5		9808.000	38.39	11.41	49.80	74.00	-24.20	peak	
6	*	11810.000	39.05	13.81	52.86	74.00	-21.14	peak	

Test Result: Pass

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

BlueAsia


13 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

13.2 BLOCK DIAGRAM OF TEST SETUP

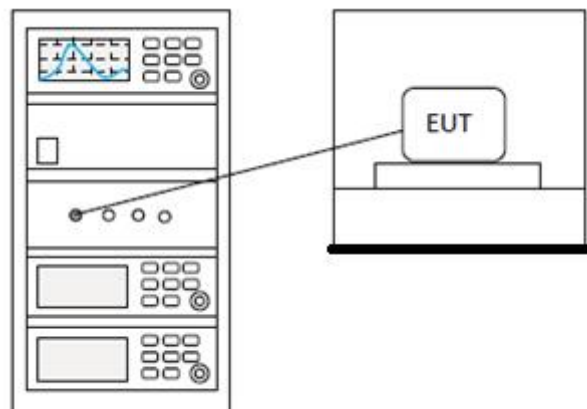

13.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

14.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

14.2 BLOCK DIAGRAM OF TEST SETUP

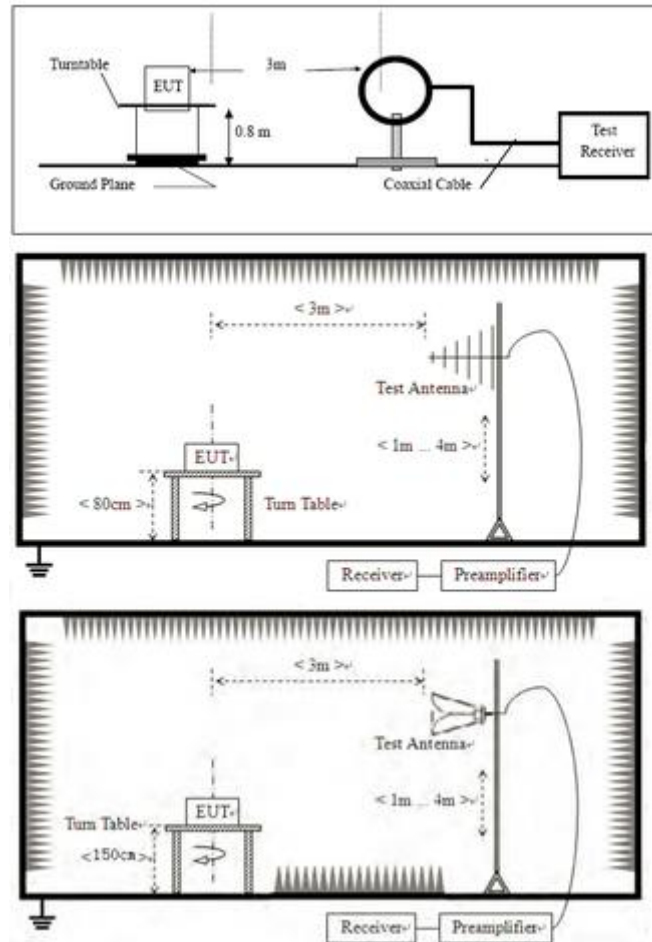

14.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia