

## HFCL Limited

8, Commercial Complex, Masjid Moth, Greater Kailash - 2,  
New Delhi-110048, India

Federal Communications Commission  
Authorization and Evaluation Division  
Equipment Authorization Branch  
7435 Oakland Mills Road  
Columbia, MD 21046

### Applicant's declaration concerning RF Radiation Exposure

We hereby indicate that the product

Product description: Dual band 4X4:4 Outdoor Access Point (AP) with integrated/external  
antenna

Model No: ion8/ion8e

The equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled  
environment. The integral antennas used for this transmitter must not be co-located or  
operating in conjunction with any other antenna or transmitter within the host device.

A safety statement concerning minimum separation distances from enclosure of the  
Product: Dual band 4X4:4 Outdoor Access Point (AP) with integrated/external antenna will be  
integrated in the user's manual to provide end-users with transmitter operating conditions for  
satisfying RF exposure compliance.


The appropriate information can be drawn from the test report no: W6M21903-18922-C-1  
W6M21903-18922-C-54 and the accompanying calculations.

Company: HFCL Limited

Address: 8, Commercial Complex, Masjid Moth, Greater Kailash - 2, New Delhi-110048,  
India

Date: 2019-09-09

Signature

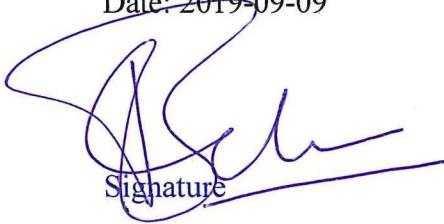



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21903-18922-C-1

FCC ID: 2AUISION8ION8E

## **3.2 Equivalent Isotropic Radiated Power (EIRP)**

FCC Rule: 15.247(b)(3)

WLAN

EIRP = max. conducted output power + antenna gain

EIRP = 21.06 dBm + (12.02 dBi [antenna gain claimed by manufacturer] = 33.08 dBm = 2032.3570 mW

BLE

EIRP = max. conducted output power + antenna gain

EIRP = 2.44 dBm + (4 dBi [antenna gain claimed by manufacturer] = 6.44 dBm = 4.4055 mW

## **3.3 Exemption Limits for Routine Evaluation according to 47 CFR FCC Part 2 Subpart J, section 2.1091**

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20 cm normally can be maintained between the user and the device.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21903-18922-C-1

FCC ID: 2AUISION8ION8E

## MPE Calculation Method

### (A) Limits for Occupational/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6

### (B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f <sup>2</sup> )*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

f = frequency in MHz

\*Plane-wave equivalent power density

E = Electric field (V/m) P = output power (W) G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to mW/cm<sup>2</sup>.

$$Pd \cdot \frac{30 \times P \times G}{377 \times d^2}$$



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21903-18922-C-1

FCC ID: 2AUISION8ION8E

## **WLAN**

Established separation distance is 20 cm.

Operating frequency band: 802.11b, g, n 20MHz: 2412-2462 MHz, 802.11n 40MHz: 2422-2452 MHz,

The product meets RF exposure requirement.

Because the power density of 0.4042 mW/cm<sup>2</sup> at 2452 MHz is below the power density limit of 1 mW/cm<sup>2</sup>.

## **BLE**

Established separation distance is 20 cm.


Operating frequency band: 2402-2480 MHz

The product meets RF exposure requirement.

Because the power density of 0.0009 mW/cm<sup>2</sup> at 2440 MHz is below the power density limit of 1 mW/cm<sup>2</sup>.

Limits:

<b>Limit for General Population / Uncontrolled Exposure</b>	
<b>Frequency (MHz)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>
1500 – 100.000	1.0



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21903-18922-C-54  
FCC ID: 2AUISION8ION8E

## **3.6 Automatic Discontinuation of transmission, FCC 15.407 (c)**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure.

This function will be declared by manufacturer.

## **3.7 Reserved, FCC 15.407 (d)**

## **3.8 Indoor Operation Restriction, FCC 15.407 (e)**

Within the 5.15–5.25 GHz band, U- NII devices will be restricted to indoor operations to reduce any potential for harmful interference to co-channel MSS operations. This equipment has to be declared by manufacturer of the final product as content of the user manual.

## **3.9 Equivalent Isotropic Radiated Power (EIRP), FCC 15.407 (f)**

Band 1

EIRP = max. conducted output power + antenna gain


EIRP = 21.82 dBm + (12.02 dBi [antenna gain claimed by manufacturer] = 33.84 dBm = 2421.0290 mW

Band 4

EIRP = max. conducted output power + antenna gain

EIRP = 20.74 dBm + (12.02 dBi [antenna gain claimed by manufacturer] = 32.76 dBm = 1887.9913 mW

Test equipment used: ETSTW-RE 055



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21903-18922-C-54

FCC ID: 2AUISION8ION8E

## **3.10 Exemption Limits for Routine Evaluation according to 47 CFR FCC Part 2 Subpart J, section 2.1091**

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20 cm normally can be maintained between the user and the device.

### **(A) Limits for Occupational/Controlled Exposure**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E <sup>2</sup> ,  H <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6

### **(B) Limits for General Population/Uncontrolled Exposure**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E <sup>2</sup> ,  H <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f <sup>2</sup> )*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

f = frequency in MHz

\*Plane-wave equivalent power density

E = Electric field (V/m) P = output power (W) G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to mW/cm<sup>2</sup>.

$$Pd \cdot \frac{30 \times P \times G}{377 \times d^2}$$



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21903-18922-C-54  
FCC ID: 2AUISION8ION8E

## **Band 1**

Established separation distance is 20 cm.

Operating frequency band: 5180-5240 MHz

The product meets RF exposure requirement.

Because the power density of 0.4818 mW/cm<sup>2</sup> at 5190 MHz is below the power density limit of 1 mW/cm<sup>2</sup>.

## **Band 4**

Established separation distance is 20 cm.

Operating frequency band: 5745-5825 MHz

The product meets RF exposure requirement.

Because the power density of 0.3757 mW/cm<sup>2</sup> at 5745 MHz is below the power density limit of 1 mW/cm<sup>2</sup>.

Limits:

<b>Limit for General Population / Uncontrolled Exposure</b>	
Frequency (MHz)	Power Density (mW/cm <sup>2</sup> )
1500 – 100.000	1.0