

# TEST REPORT

**Application No.:** KSCR2505000934AT  
**FCC ID:** 2AUIUWYZECPAN4  
**IC:** 25466-WYZECPAN4  
**Applicant:** Wyze Labs, Inc.  
**Address of Applicant:** 5808 Lake Washington Blvd NE Ste 300, Kirkland, WA 98033, United States  
**Manufacturer:** Wyze Labs, Inc.  
**Address of Manufacturer:** 5808 Lake Washington Blvd NE Ste 300, Kirkland, WA 98033, United States  
**Equipment Under Test (EUT):**  
**EUT Name:** Wyze Cam Pan v4  
**Model No.:** WYZECPAN4  
**Trade Mark:** WYZE  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
RSS-247 Issue 3, August 2023  
RSS-Gen Issue 5 Amendment 2 (February 2021)  
**Date of Receipt:** 2025-05-09  
**Date of Test:** 2025-05-22 to 2025-06-06  
**Date of Issue:** 2025-06-06

<b>Test Result:</b>	Pass*
---------------------	-------

\* In the configuration tested, the EUT complied with the standards specified above.

<b>Revision Record</b>			
<b>Version</b>	<b>Description</b>	<b>Date</b>	<b>Remark</b>
00	Original	2025-06-06	/

Authorized for issue by:			
Tested By			
		Eric_Liu/Project Engineer	
Approved By			
		Terry Hou /Reviewer	

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Pass

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Clause 8.8	ANSI C63.10 (2013) Section 6.2	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247a(2)	RSS-247 Clause 5.2(a)	ANSI C63.10 (2013) Section 11.8.1	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247(b)(3)	RSS-247 Clause 5.4(d)	ANSI C63.10 (2013) Section 11.9.1	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247(e)	RSS-247 Clause 5.2(b)	ANSI C63.10 (2013) Section 11.10.2	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.13.3.2	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.11	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass

Note: The only difference in adapter is the manufacturer and color, while other electrical properties are exactly the same. EMC difference testing has been evaluated and will not affect RF performance.

Complete all tests with adapter 1 #, Pre-scan Conducted Emissions at AC Power Line (150kHz-30MHz) and Radiated Spurious Emissions test items with other adapters.

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 Test Summary .....</b>	<b>3</b>
<b>3 Contents.....</b>	<b>4</b>
<b>4 General Information .....</b>	<b>5</b>
4.1 Details of E.U.T .....	5
4.2 Power level setting using in test.....	6
4.3 Description of Support Units .....	6
4.4 Measurement Uncertainty .....	7
4.5 Test Location.....	8
4.6 Test Facility .....	8
4.7 Deviation from Standards.....	8
4.8 Abnormalities from Standard Conditions.....	8
<b>5 Equipment List .....</b>	<b>9</b>
<b>6 Radio Spectrum Technical Requirement.....</b>	<b>10</b>
6.1 Antenna Requirement .....	10
<b>7 Radio Spectrum Matter Test Results .....</b>	<b>11</b>
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz) .....	11
7.2 Radiated Emissions which fall in the restricted bands .....	15
7.3 Radiated Spurious Emissions Below 1GHz .....	28
7.4 Radiated Spurious Emissions Above 1GHz.....	32
7.5 Conducted Peak Output Power.....	46
7.6 Minimum 6dB Bandwidth.....	48
7.7 Power Spectrum Density.....	49
7.8 Conducted Band Edges Measurement .....	50
7.9 Conducted Spurious Emissions .....	51
7.10 99% Bandwidth .....	52
<b>8 Test Setup Photo .....</b>	<b>53</b>
<b>9 EUT Constructional Details (EUT Photos).....</b>	<b>53</b>
<b>10 Appendix.....</b>	<b>54</b>

## 4 General Information

### 4.1 Details of E.U.T.

Test Power:	Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case
Power supply:	DC 5V by adapter Adapter 1# Model: AS1207A-0502000USU Input: 100-24V~ 50/60Hz Output: 5V, 2000mA MADE IN CHINA Adapter 2# Model: KA12C-0502000US Input: 100-24V~ 50/60Hz Output: 5V, 2000mA MADE IN CHINA Adapter 3# Model: AS1207A-0502000USU Input: 100-24V~ 50/60Hz Output: 5V, 2000mA MADE IN VIETNAM Adapter 4# Model: KA12C-0502000US Input: 100-24V~ 50/60Hz Output: 5V, 2000mA MADE IN VIETNAM (Black) Adapter 5# Model: KA12C-0502000US Input: 100-24V~ 50/60Hz Output: 5V, 2000mA MADE IN VIETNAM (White)
Operation Frequency:	2402MHz to 2480MHz
Bluetooth Version:	V5.0 LE
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	FPC Antenna
Antenna Gain:	3.95dBi (Provided by the manufacturer)

#### 4.2 Power level setting using in test

Channel	BLE 1M/2M
	Ant 1
0	Default
19	Default
39	Default

#### 4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645

#### 4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$8.4 \times 10^{-8}$
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz) 5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz) 4.5dB (30MHz-1GHz) 5.1dB (1GHz-18GHz) 5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

## 4.7 Deviation from Standards

None

## 4.8 Abnormalities from Standard Conditions

None

## 5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
<b>Conducted Emission at Mains Terminals</b>						
1	EMI Test Receive	R&S	ESCI	KS301196	08/01/2024	07/31/2025
2	LISN	R&S	ENV216	KS301197	01/15/2025	01/14/2026
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2025	01/14/2026
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	12/05/2024	12/04/2025
5	CE test Cable	Thermax	/	CZ301102	01/14/2025	01/13/2026
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R
<b>RF Conducted Test</b>						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2025	01/14/2026
4	Signal Generator	R&S	SMBV100B	KSEM032	02/19/2025	02/18/2026
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	02/19/2025	02/18/2026
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/13/2024	08/12/2025
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2025	01/14/2026
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/14/2025	01/13/2026
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KSES104904	08/26/2024	08/25/2025
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	02/26/2025	02/25/2026
15	Software	BST	TST-PASS	/	NCR	NCR
<b>RF Radiated Test</b>						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	02/18/2025	02/17/2026
3	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
4	Loop Antenna (9KHz-30MHz)	COM-POWER	AL-130R	KUS1806E001	03/01/2025	02/28/2027
5	Bilog Antenna (30MHz-1GHz)	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	03/23/2024	03/22/2026
7	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
8	Amplifier(30MHz~1GHz)	TST	LNA009100G30	KSEM061	01/15/2025	01/14/2026
9	Amplifier(400MHz~8GHz)	TST	LNA004080G30	KSEM062	01/15/2025	01/14/2026
10	Amplifier(1GHz~18GHz)	TST	LNA010180G45	KSEM039	08/02/2024	08/01/2025
11	Amplifier(18~40GHz)	TST	LNA180400G40	KSEM038	08/12/2024	08/11/2025
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/23/2024	08/22/2025
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	02/26/2025	02/25/2026
14	Software	Faratronic	EZ_EMCA-v 3A1	/	NCR	NCR
15	Software	ESE	E3_V 6.111221a	/	NCR	NCR

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is 3.95 dBi.

Antenna location: Refer to internal photo.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

#### 7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

#### 7.1.3 Test Setup Diagram

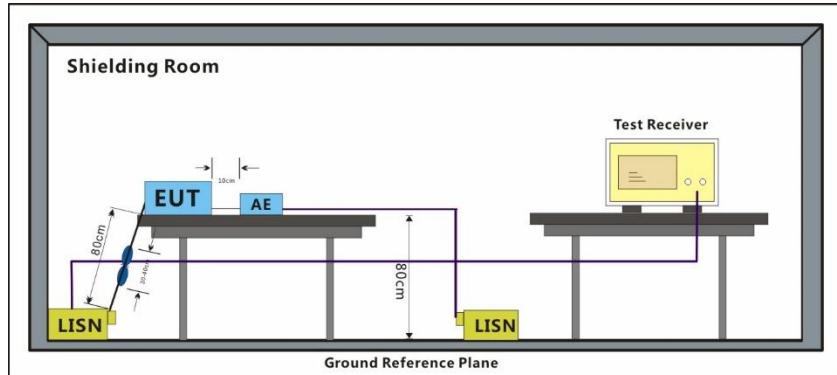


#### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 $\mu$ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark : Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 01; Line: Live line


**Test Data :**

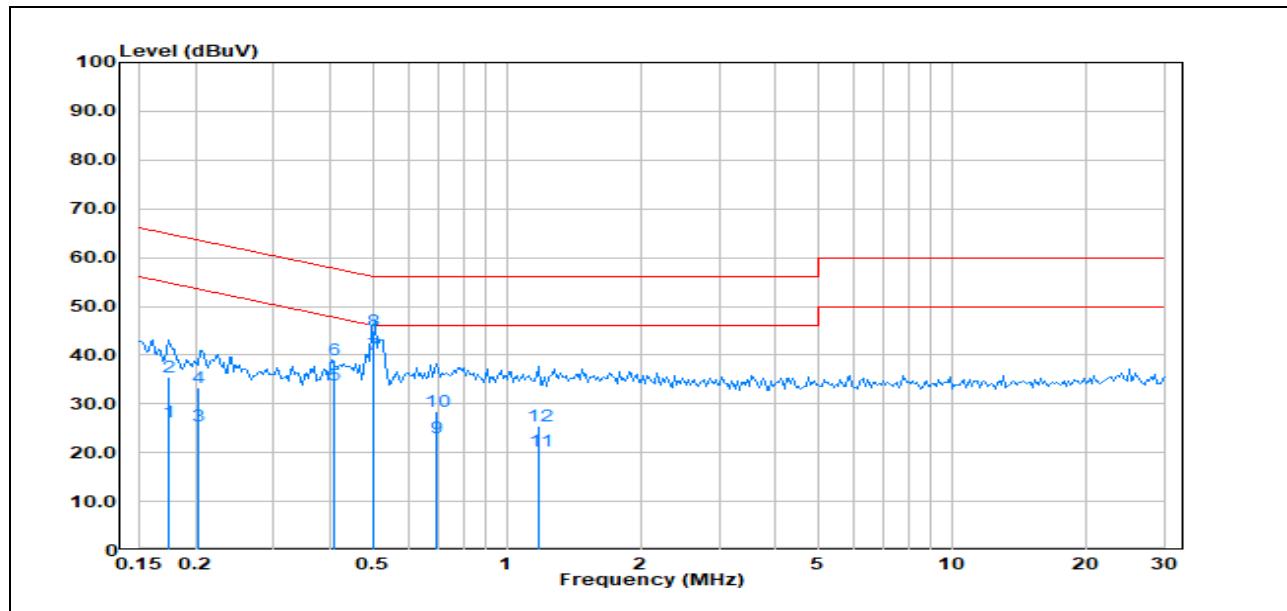

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1735	6.56	19.71	26.27	54.79	-28.52	Average
2	0.1735	15.92	19.71	35.63	64.79	-29.16	QP
3	0.2035	5.97	19.62	25.59	53.47	-27.88	Average
4	0.2035	13.65	19.62	33.27	63.47	-30.20	QP
5	0.4088	14.12	19.66	33.78	47.67	-13.89	Average
6	0.4088	19.32	19.66	38.98	57.67	-18.69	QP
7	0.5040	20.36	19.84	40.20	46.00	-5.80	Average
8	0.5040	25.17	19.84	45.01	56.00	-10.99	QP
9	0.6987	3.42	19.56	22.98	46.00	-23.02	Average
10	0.6987	8.93	19.56	28.49	56.00	-27.51	QP
11	1.1830	0.72	19.64	20.36	46.00	-25.64	Average
12	1.1830	5.91	19.64	25.55	56.00	-30.45	QP

Test Mode: 01; Line: Neutral Line

**Test Data :**

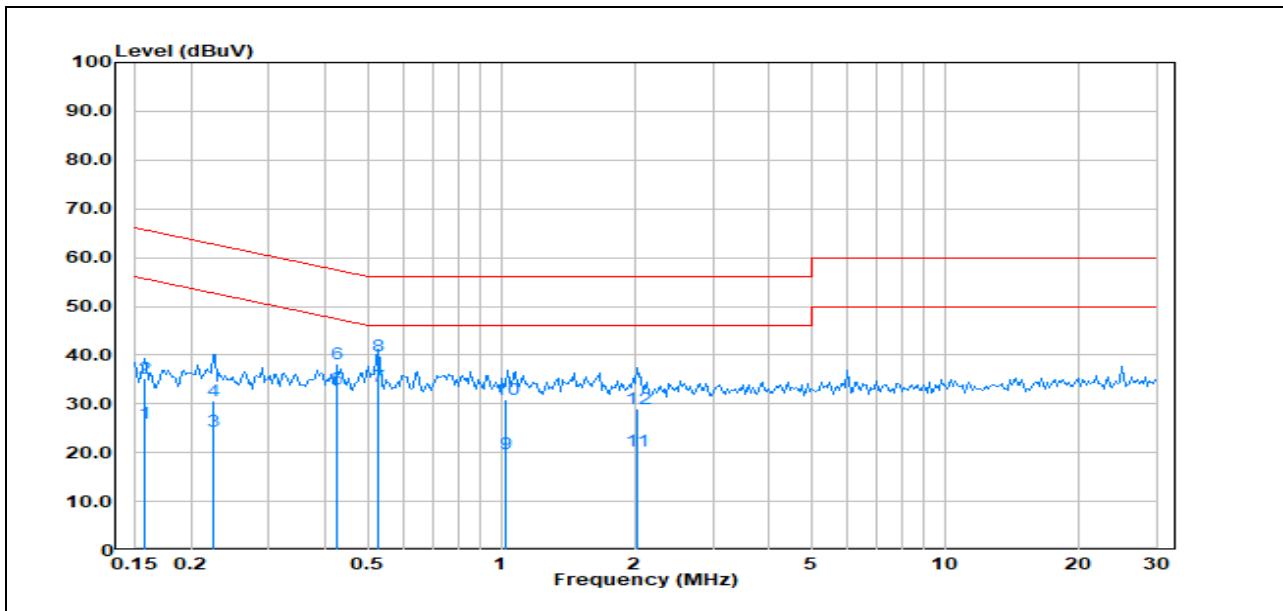

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1566	6.32	19.74	26.06	55.64	-29.58	Average
2	0.1566	15.50	19.74	35.24	65.64	-30.40	QP
3	0.2249	4.64	19.67	24.31	52.64	-28.33	Average
4	0.2249	11.06	19.67	30.73	62.64	-31.91	QP
5	0.4286	13.63	19.54	33.17	47.28	-14.11	Average
6	0.4286	18.78	19.54	38.32	57.28	-18.96	QP
7	0.5275	14.07	19.48	33.55	46.00	-12.45	Average
8	0.5275	20.47	19.48	39.95	56.00	-16.05	QP
9	1.0240	0.36	19.49	19.85	46.00	-26.15	Average
10	1.0240	11.45	19.49	30.94	56.00	-25.06	QP
11	2.0220	0.83	19.53	20.36	46.00	-25.64	Average
12	2.0220	9.44	19.53	28.97	56.00	-27.03	QP

## 7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.2.1 E.U.T. Operation


Operating Environment:

Temperature: °C      Humidity: % RH      Atmospheric Pressure: 1010 mbar

### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.2.3 Test Setup Diagram

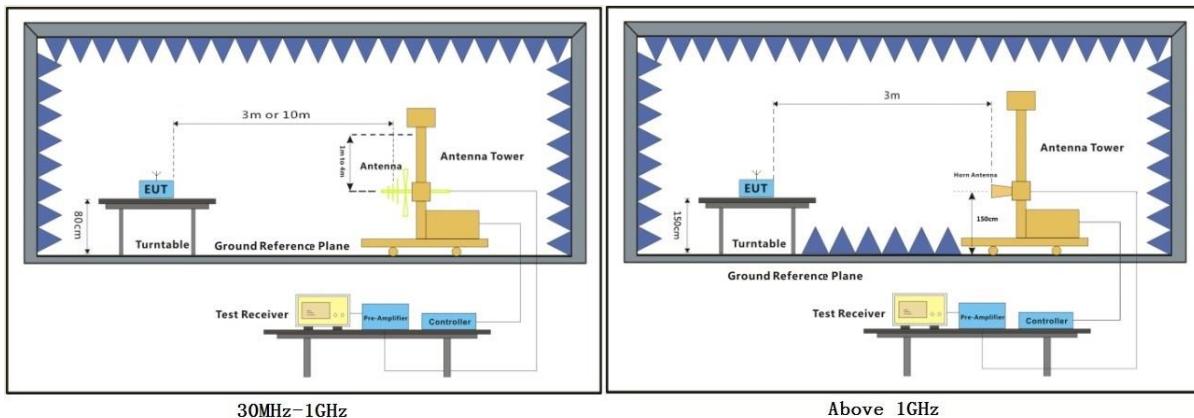

#### 7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

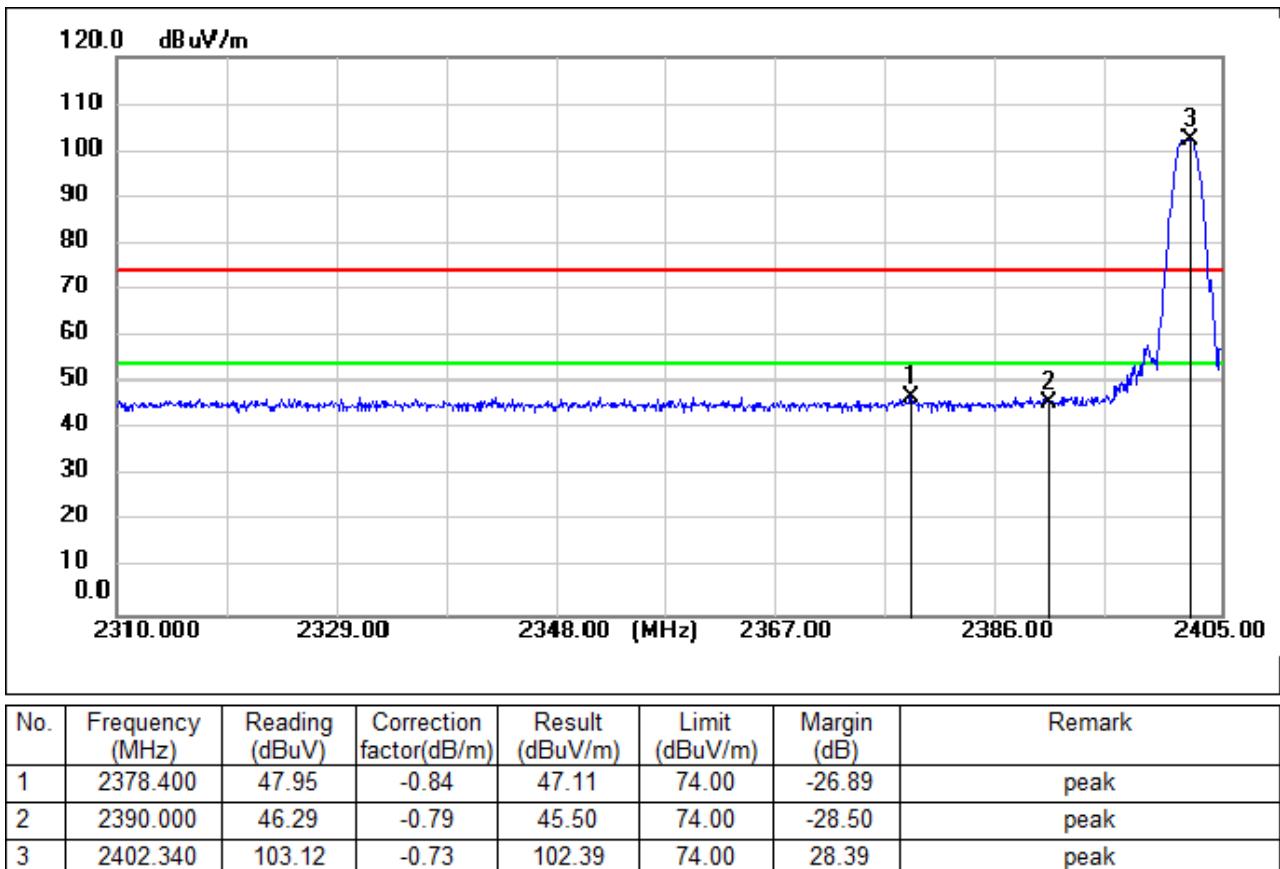


Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

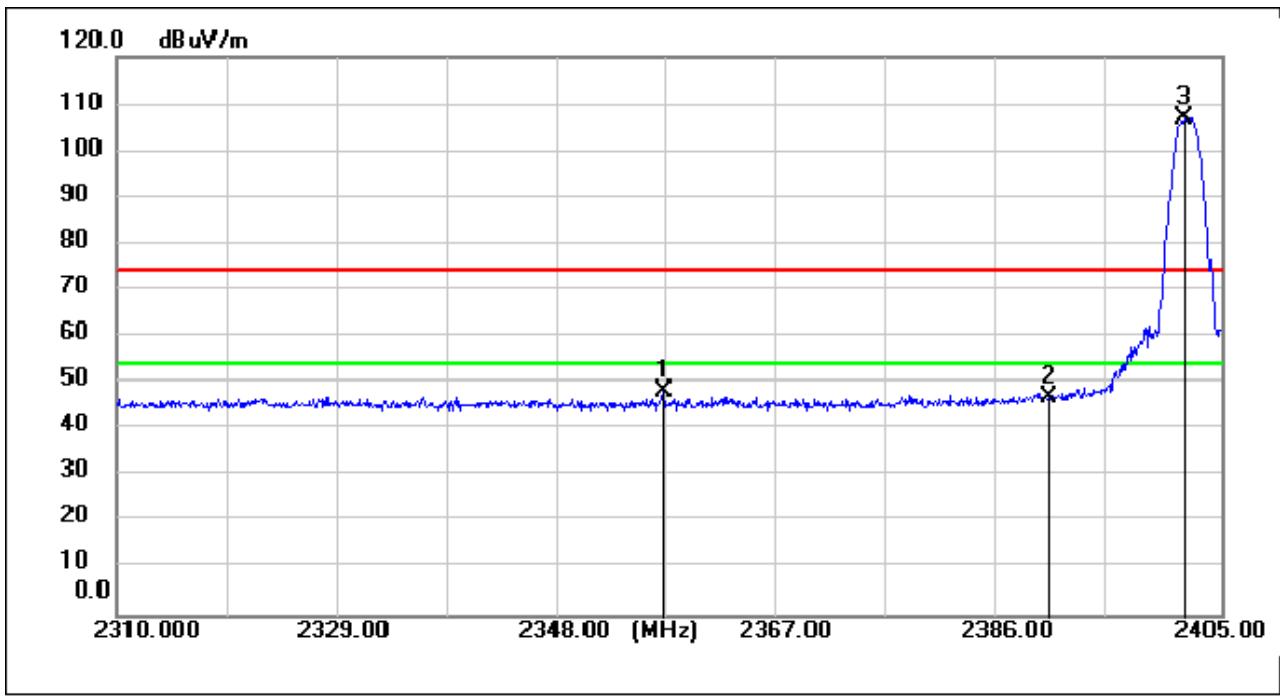


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2357.025	48.97	-0.95	48.02	74.00	-25.98	peak
2	2390.000	47.58	-0.79	46.79	74.00	-27.21	peak
3	2401.865	107.64	-0.73	106.91	74.00	32.91	peak

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

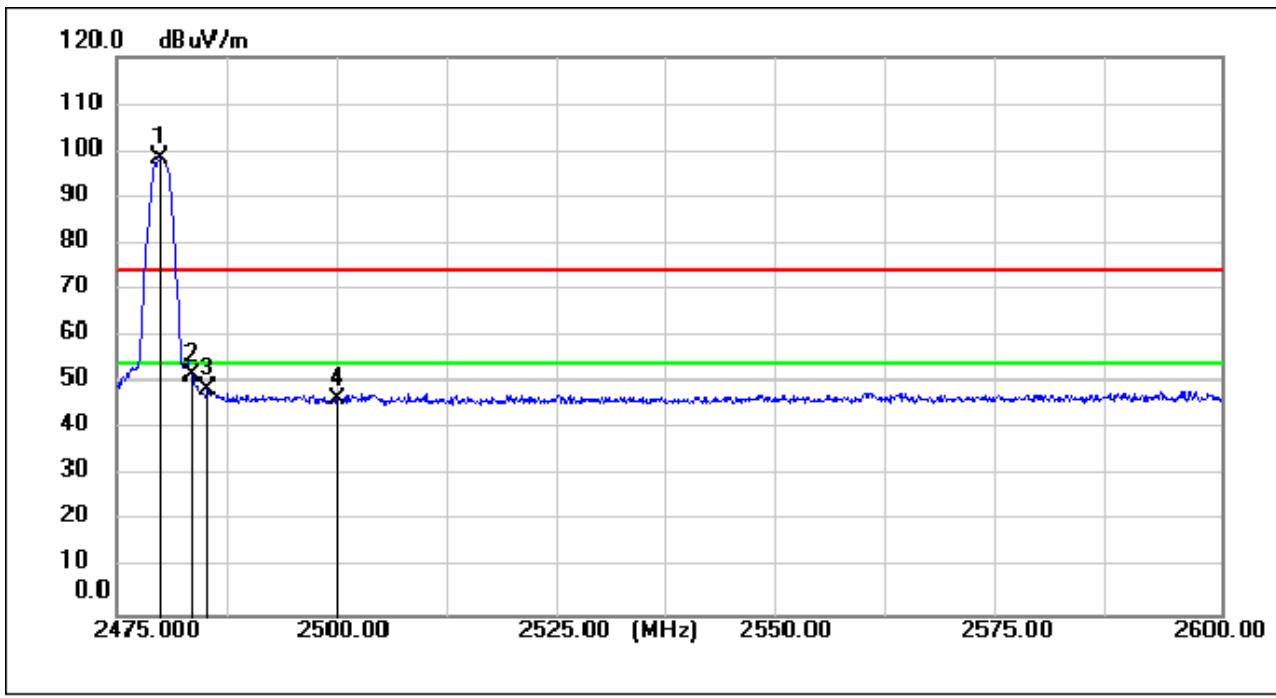


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	98.56	-0.34	98.22	74.00	24.22	peak
2	2483.500	51.97	-0.33	51.64	74.00	-22.36	peak
3	2485.375	49.03	-0.31	48.72	74.00	-25.28	peak
4	2500.000	46.78	-0.24	46.54	74.00	-27.46	peak

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

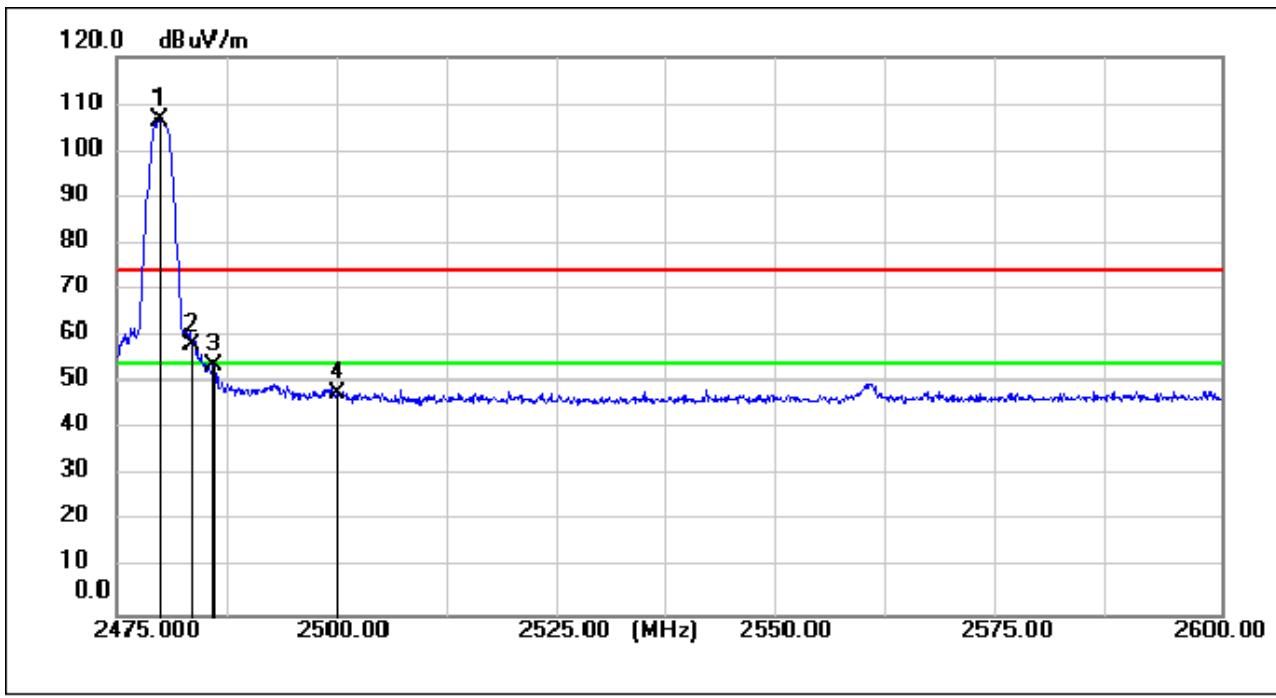


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	107.03	-0.34	106.69	74.00	32.69	peak
2	2483.500	58.42	-0.33	58.09	74.00	-15.91	peak
3	2486.000	54.04	-0.31	53.73	74.00	-20.27	peak
4	2500.000	47.84	-0.24	47.60	74.00	-26.40	peak

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

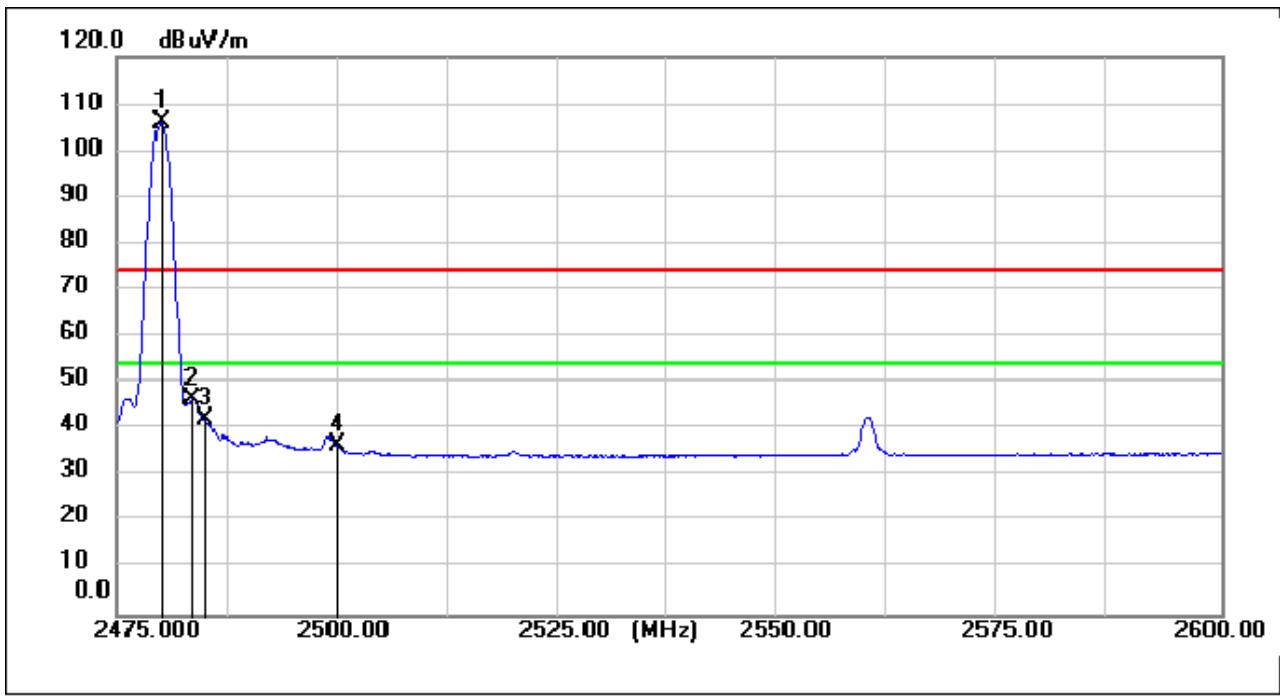


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	106.30	-0.34	105.96	54.00	51.96	AVG
2	2483.500	46.89	-0.33	46.56	54.00	-7.44	AVG
3	2485.000	42.41	-0.32	42.09	54.00	-11.91	AVG
4	2500.000	36.69	-0.24	36.45	54.00	-17.55	AVG

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:Low

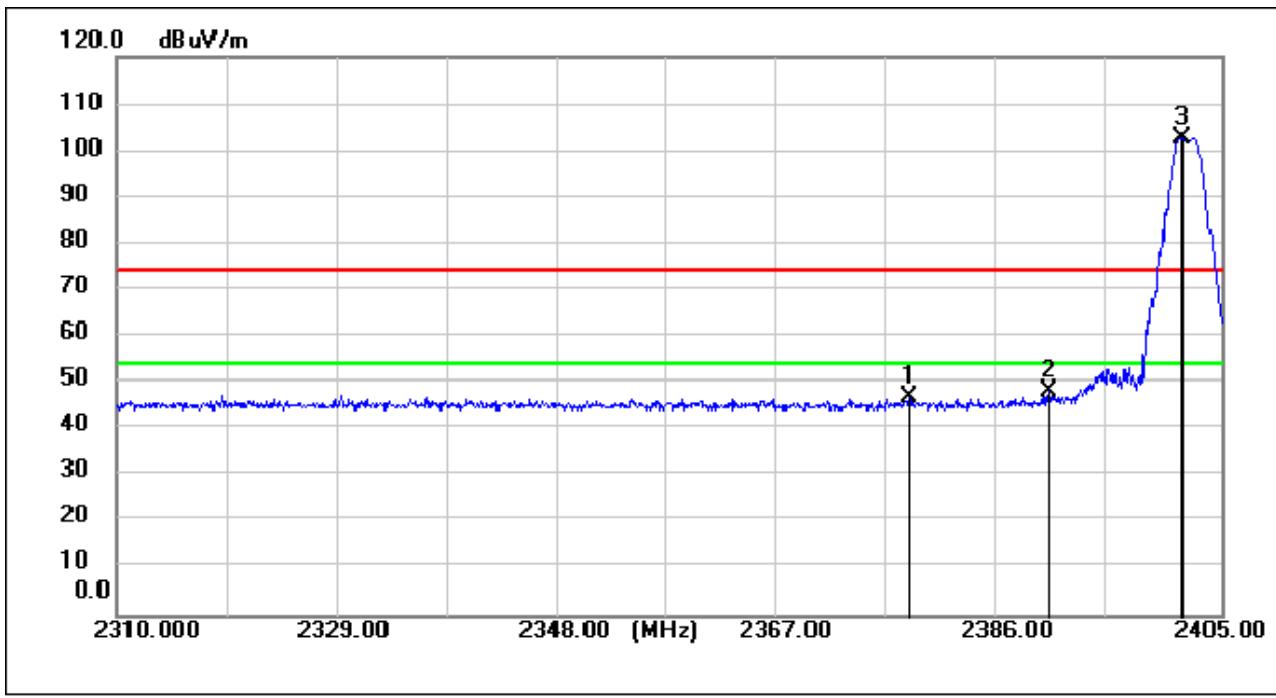


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.210	47.68	-0.85	46.83	74.00	-27.17	peak
2	2390.000	48.97	-0.79	48.18	74.00	-25.82	peak
3	2401.580	103.33	-0.73	102.60	74.00	28.60	peak

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

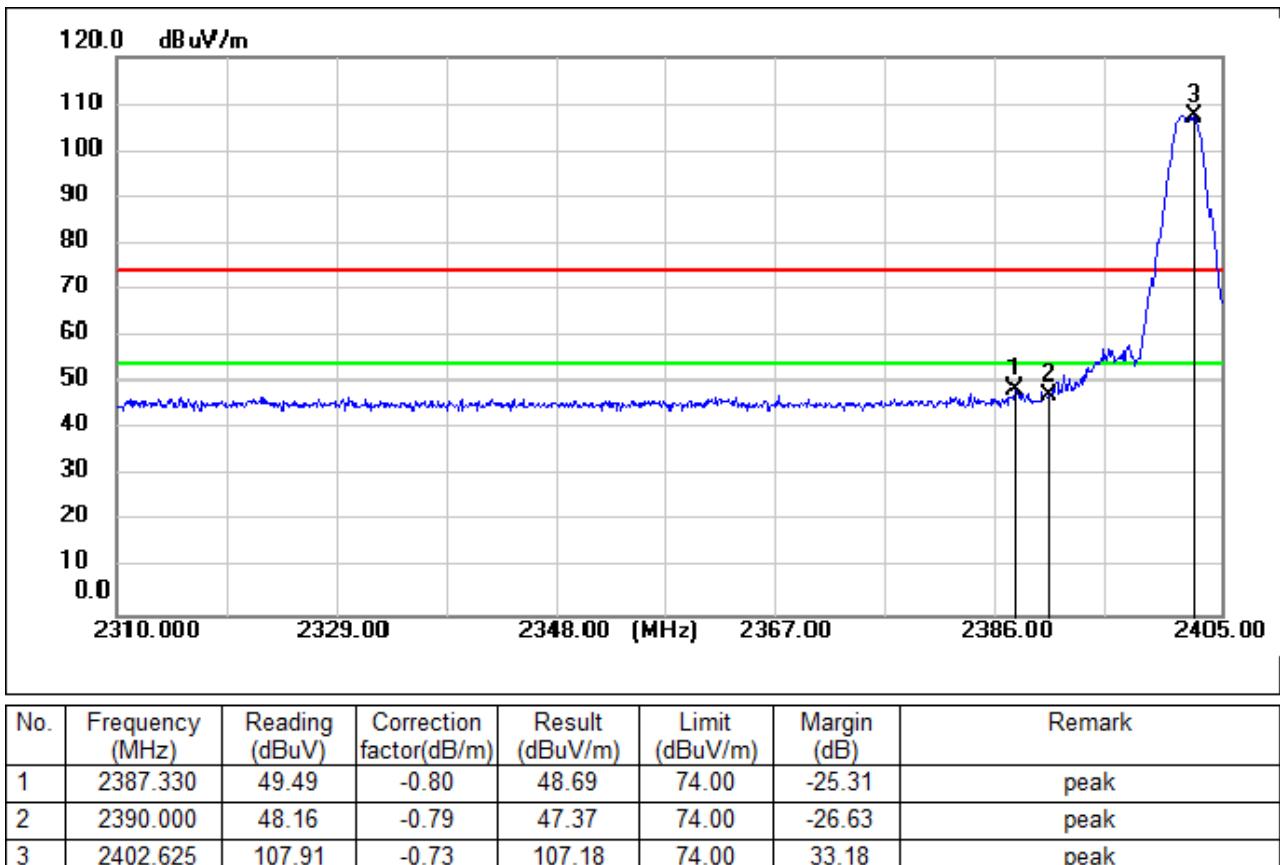


Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

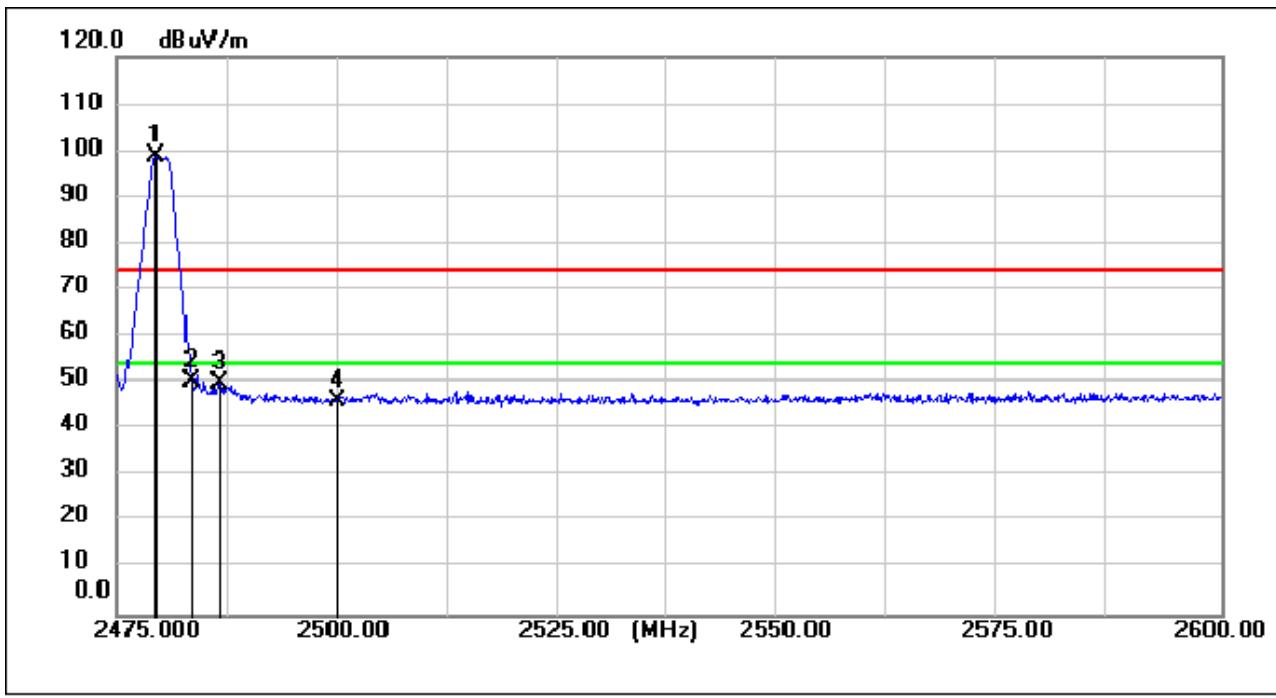


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.500	98.95	-0.34	98.61	74.00	24.61	peak
2	2483.500	50.52	-0.33	50.19	74.00	-23.81	peak
3	2486.625	50.39	-0.30	50.09	74.00	-23.91	peak
4	2500.000	46.29	-0.24	46.05	74.00	-27.95	peak

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

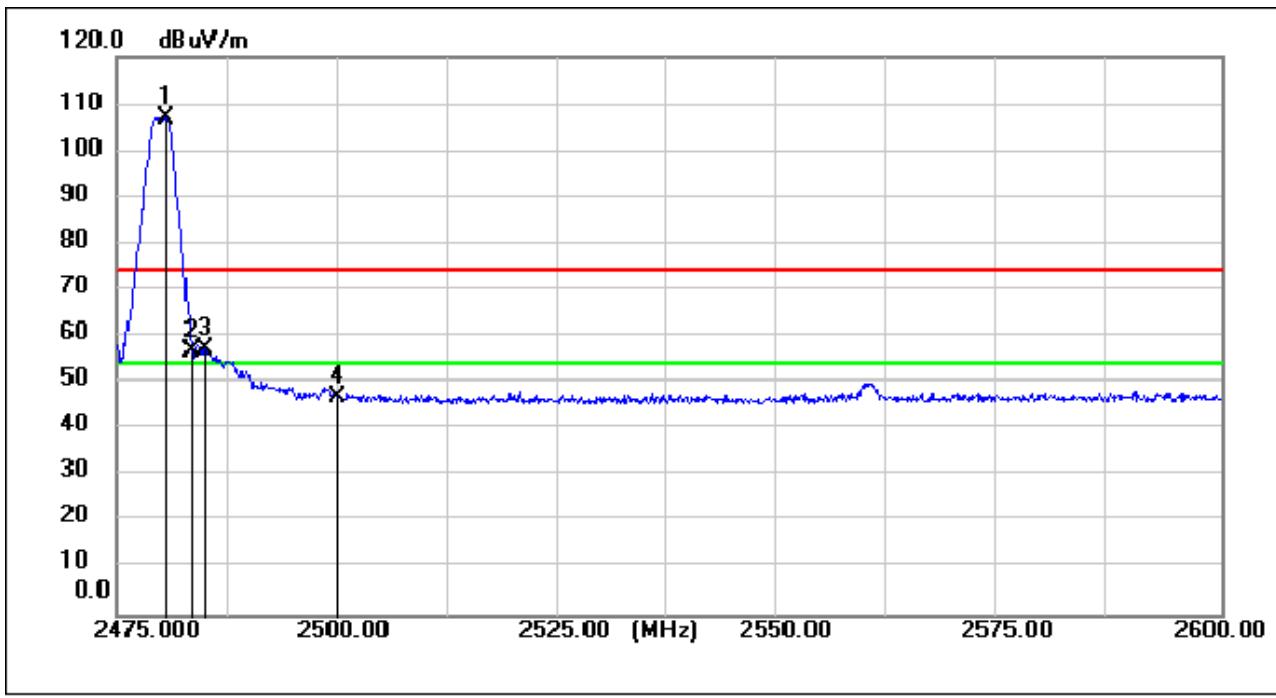

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.500	107.45	-0.34	107.11	74.00	33.11	peak
2	2483.500	57.17	-0.33	56.84	74.00	-17.16	peak
3	2485.000	57.61	-0.32	57.29	74.00	-16.71	peak
4	2500.000	47.07	-0.24	46.83	74.00	-27.17	peak

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

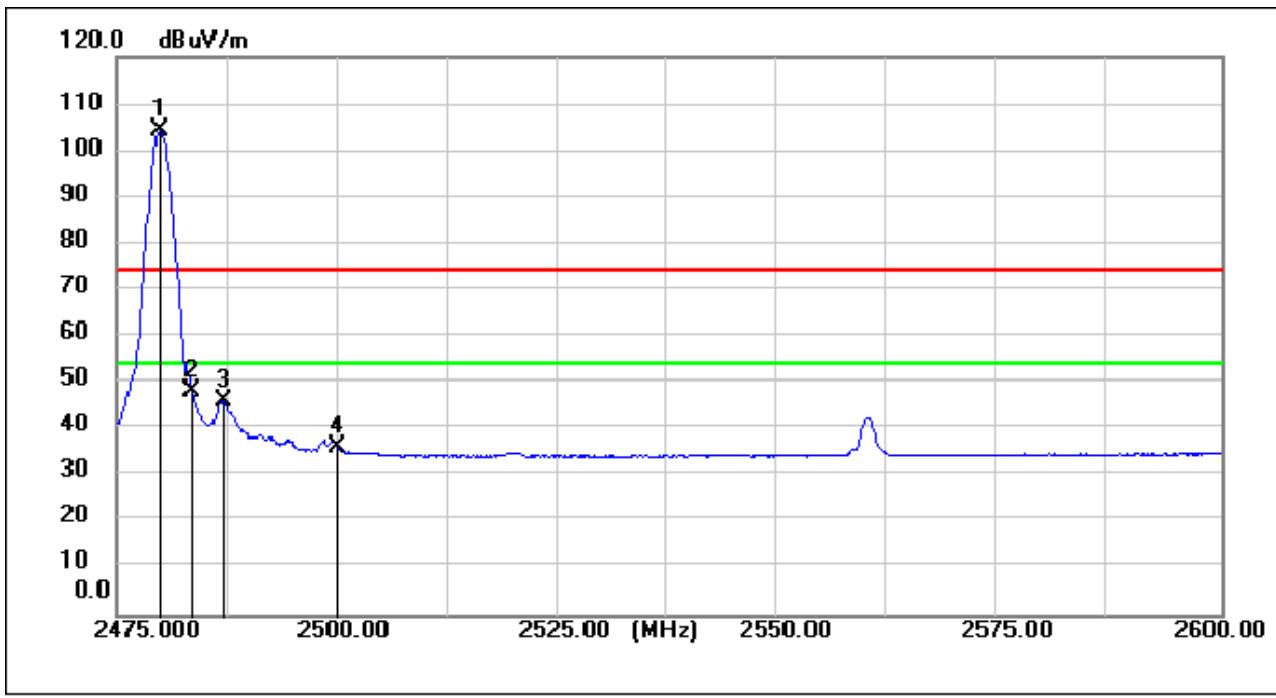

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	104.70	-0.34	104.36	54.00	50.36	AVG
2	2483.500	48.61	-0.33	48.28	54.00	-5.72	AVG
3	2487.000	46.43	-0.30	46.13	54.00	-7.87	AVG
4	2500.000	36.55	-0.24	36.31	54.00	-17.69	AVG

### 7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

#### 7.3.1 E.U.T. Operation


Operating Environment:

Temperature: °C      Humidity: % RH      Atmospheric Pressure: 1010 mbar

#### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

#### 7.3.3 Test Setup Diagram

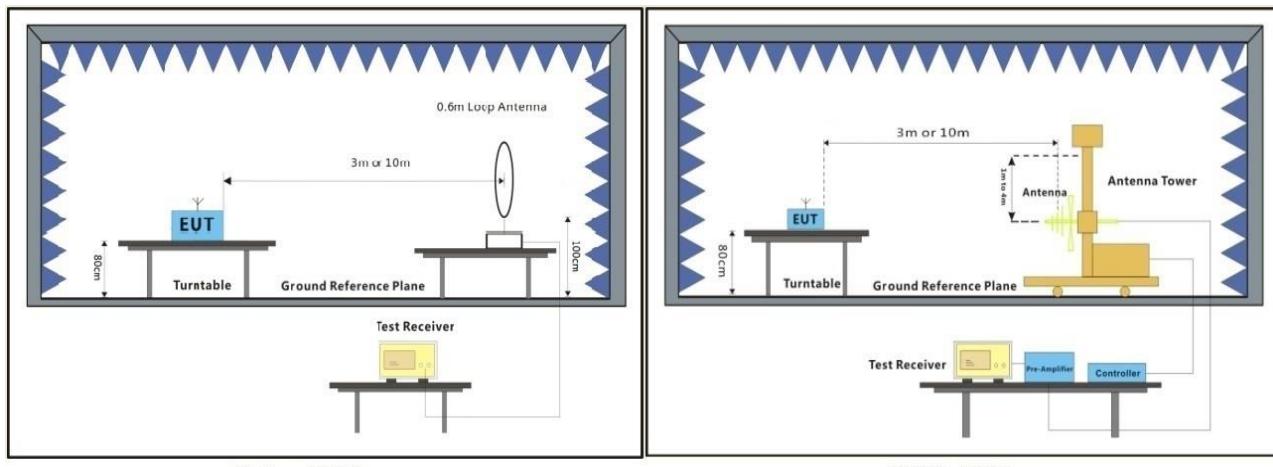


#### 7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 01; Horizontal

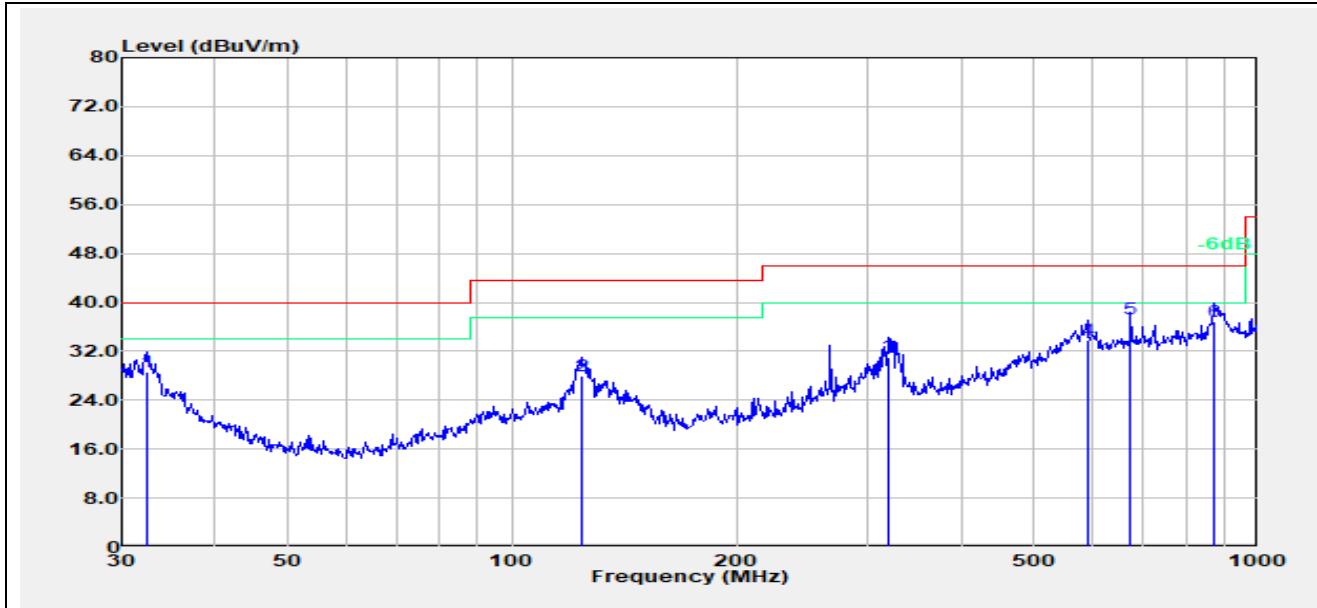

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	32.4060	5.45	23.26	28.71	40.00	-11.29	100	196	QP
2	123.6990	7.86	20.04	27.90	43.50	-15.60	200	356	QP
3	318.8170	9.41	21.70	31.11	46.00	-14.89	200	276	QP
4	590.9740	5.32	28.50	33.82	46.00	-12.18	100	155	QP
5	675.2080	7.79	29.44	37.23	46.00	-8.77	200	302	QP
6	875.2470	5.74	31.06	36.80	46.00	-9.20	100	155	QP

Test Mode: 01; Vertical

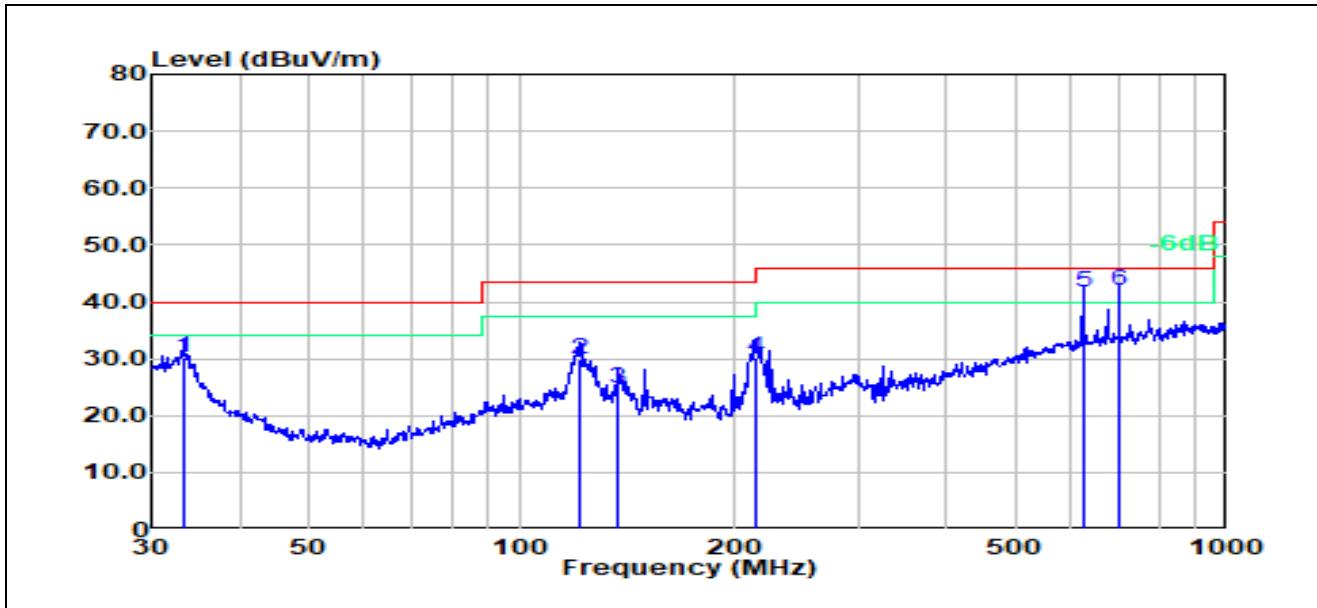

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	33.3279	7.25	22.92	30.17	40.00	-9.83	100	322	QP
2	120.6991	10.05	19.88	29.93	43.50	-13.57	100	227	QP
3	137.4202	4.48	20.40	24.88	43.50	-18.62	100	207	QP
4	214.5143	12.01	18.16	30.17	43.50	-13.33	100	352	QP
5	625.0781	13.05	28.71	41.76	46.00	-4.24	100	268	QP
6	701.7610	12.12	29.80	41.92	46.00	-4.08	100	0	QP

## 7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

### 7.4.1 E.U.T. Operation


Operating Environment:

Temperature: °C      Humidity: % RH      Atmospheric Pressure: 1010 mbar

### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.4.3 Test Setup Diagram

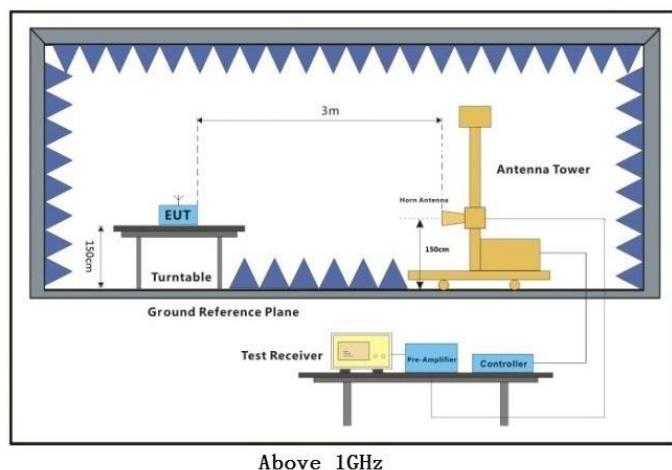


#### 7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.


Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.


Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

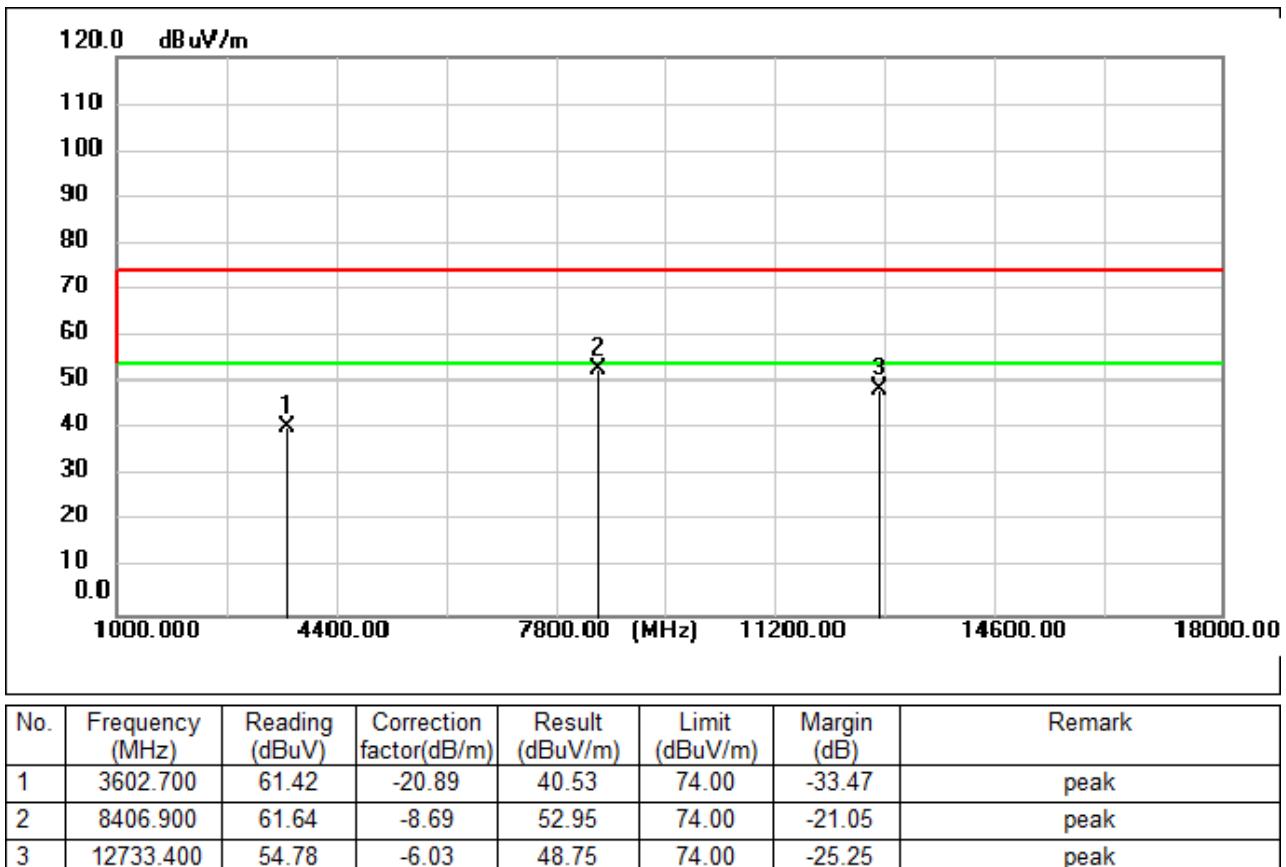

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

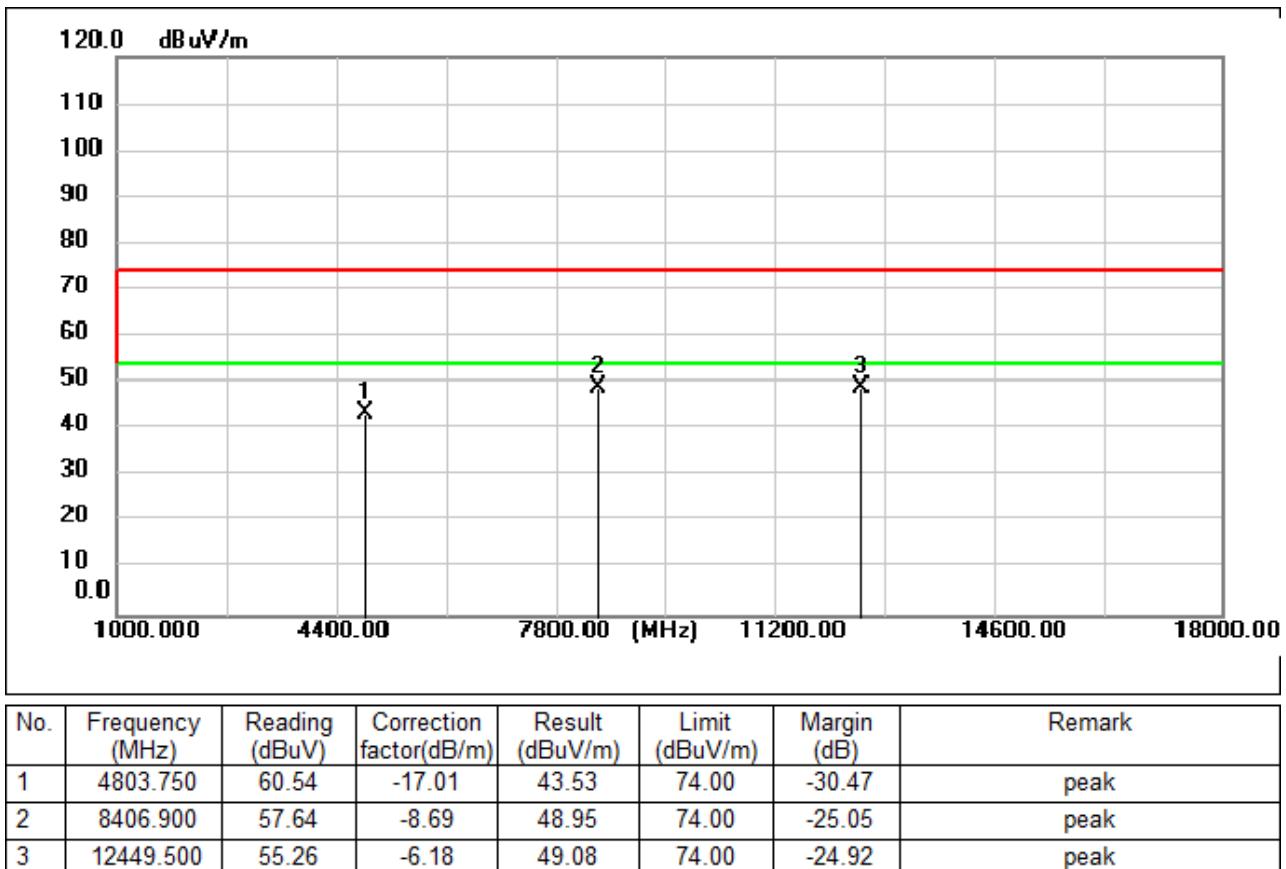


Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:middle

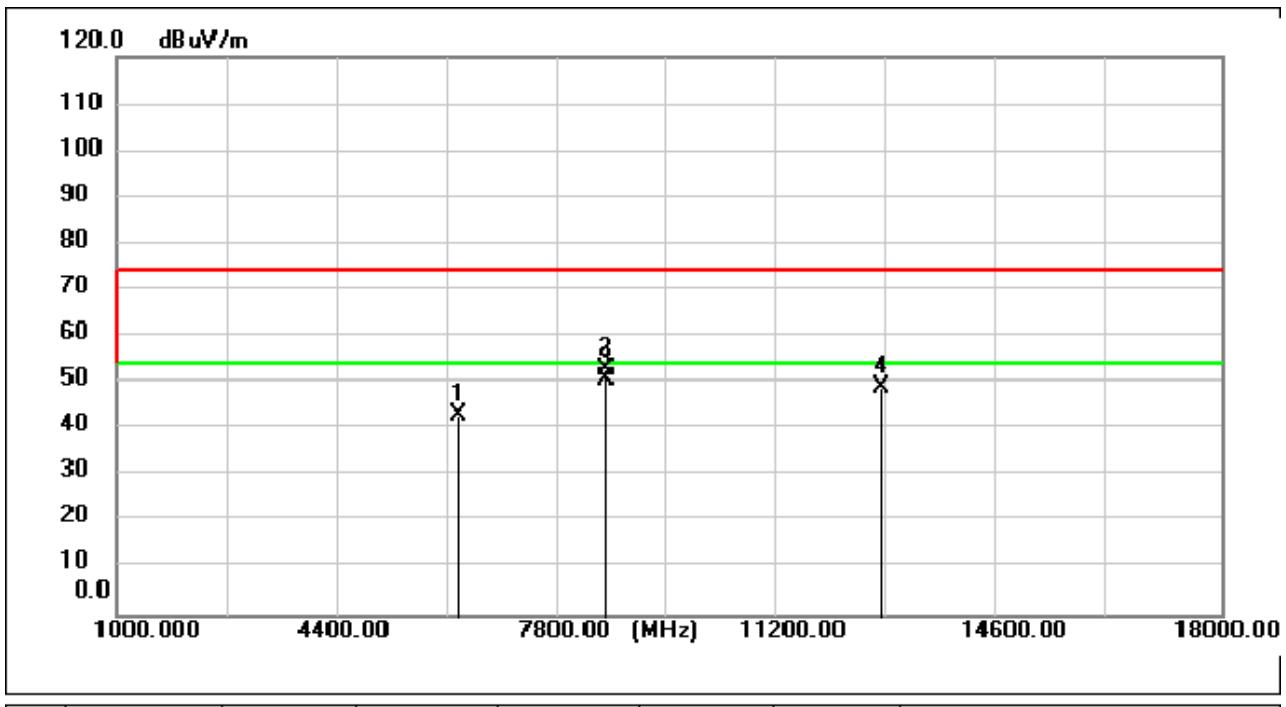


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6254.700	55.64	-12.64	43.00	74.00	-31.00	peak
2	8540.350	61.52	-8.49	53.03	74.00	-20.97	peak
3	8540.350	59.34	-8.49	50.85	54.00	-3.15	AVG
4	12754.650	55.30	-6.02	49.28	74.00	-24.72	peak

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:middle

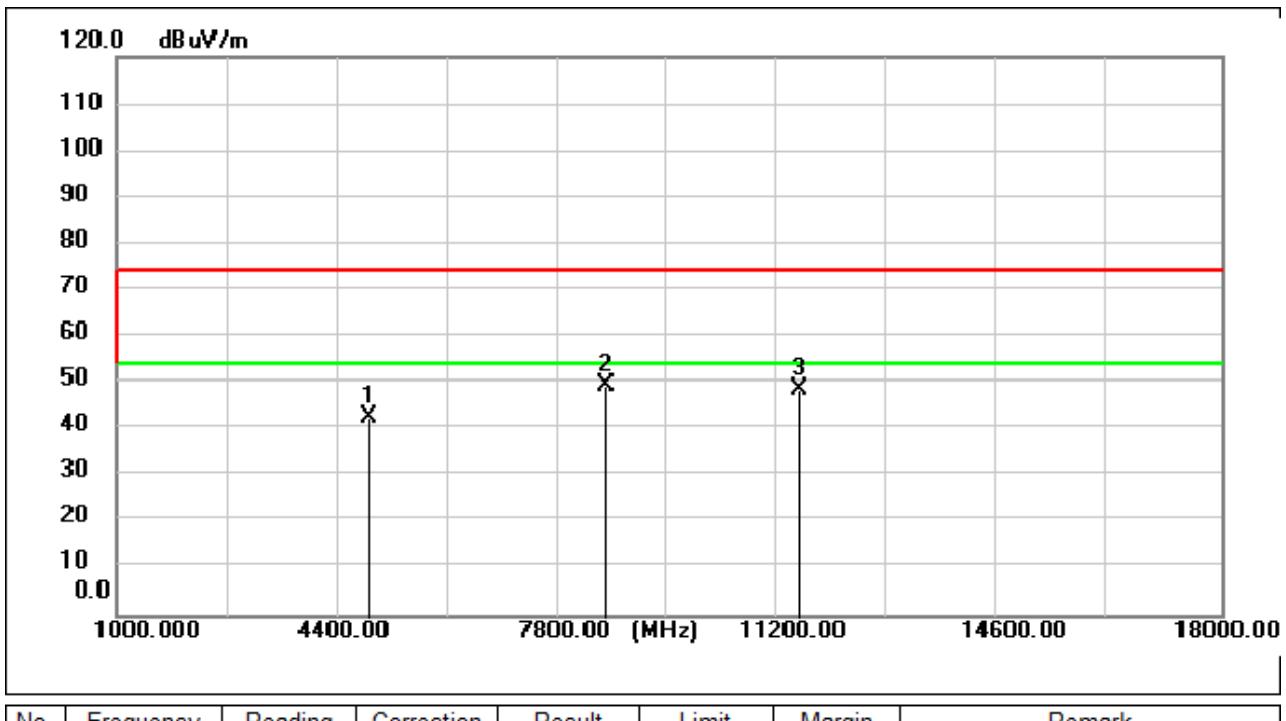


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4879.400	59.66	-16.87	42.79	74.00	-31.21	peak
2	8540.350	57.98	-8.49	49.49	74.00	-24.51	peak
3	11519.600	55.08	-6.45	48.63	74.00	-25.37	peak

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

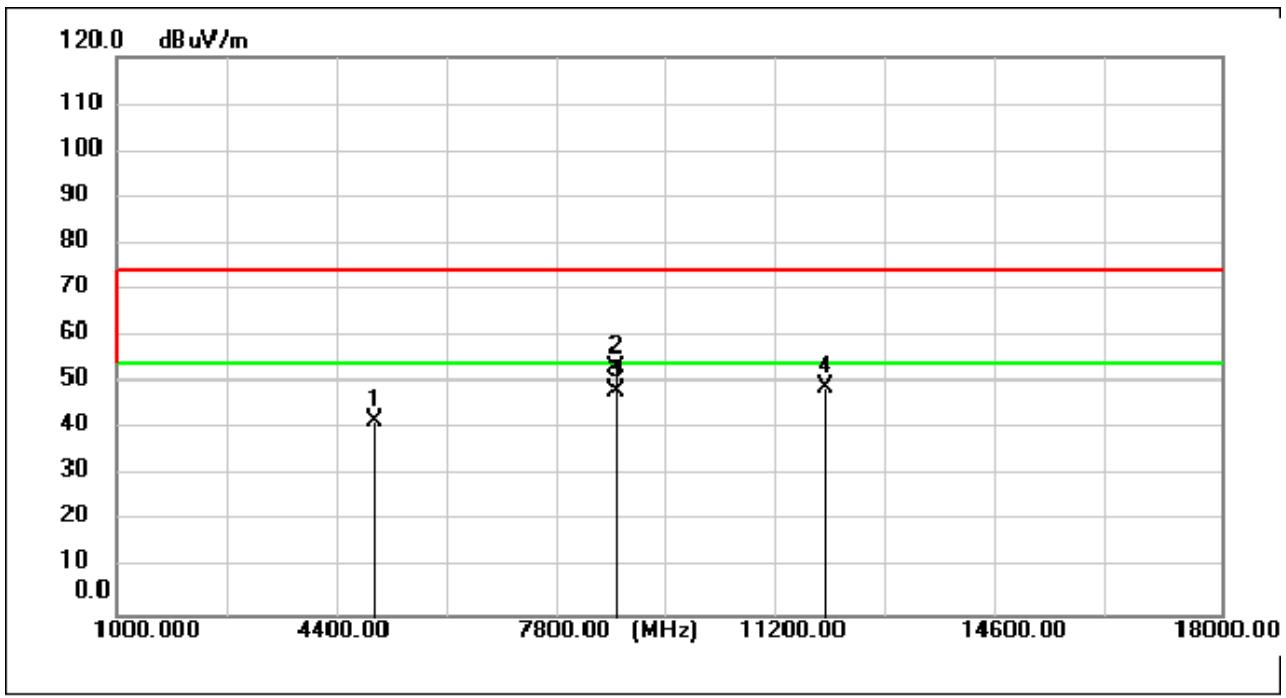


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.150	58.57	-16.72	41.85	74.00	-32.15	peak
2	8679.750	61.47	-8.29	53.18	74.00	-20.82	peak
3	8679.750	56.45	-8.29	48.16	54.00	-5.84	AVG
4	11889.350	55.43	-6.47	48.96	74.00	-25.04	peak

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

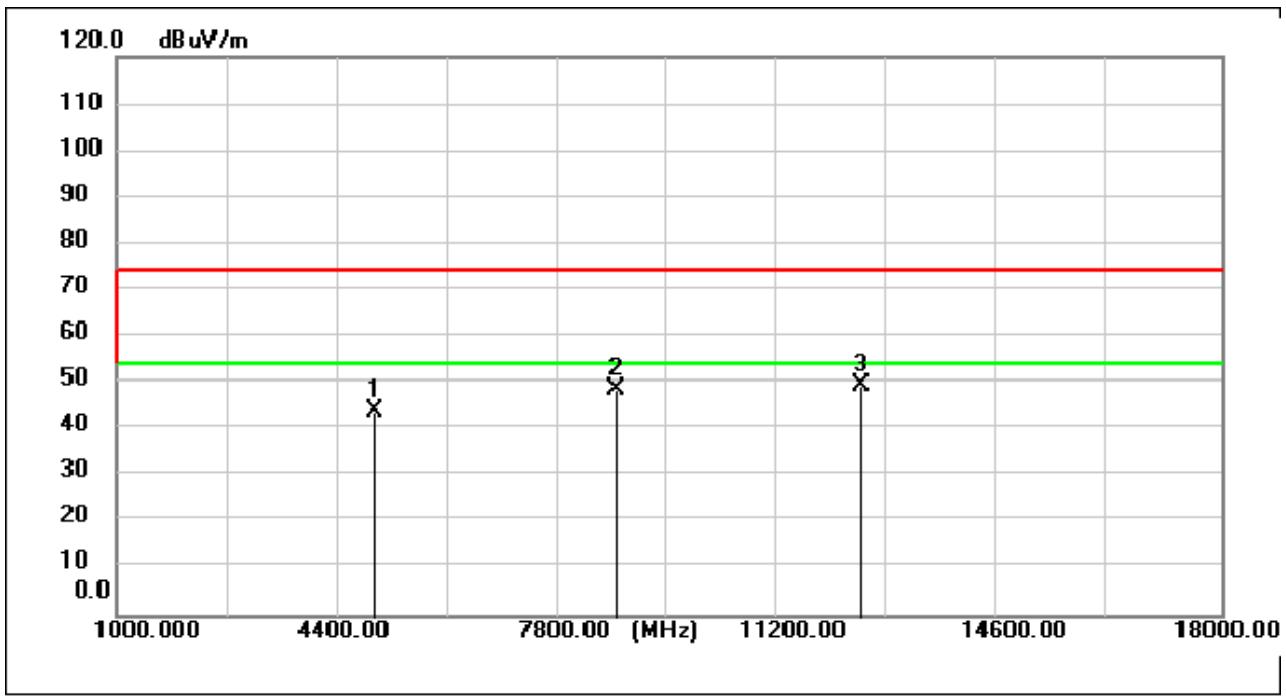


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.150	60.67	-16.72	43.95	74.00	-30.05	peak
2	8679.750	56.75	-8.29	48.46	74.00	-25.54	peak
3	12458.000	55.54	-6.17	49.37	74.00	-24.63	peak

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:Low

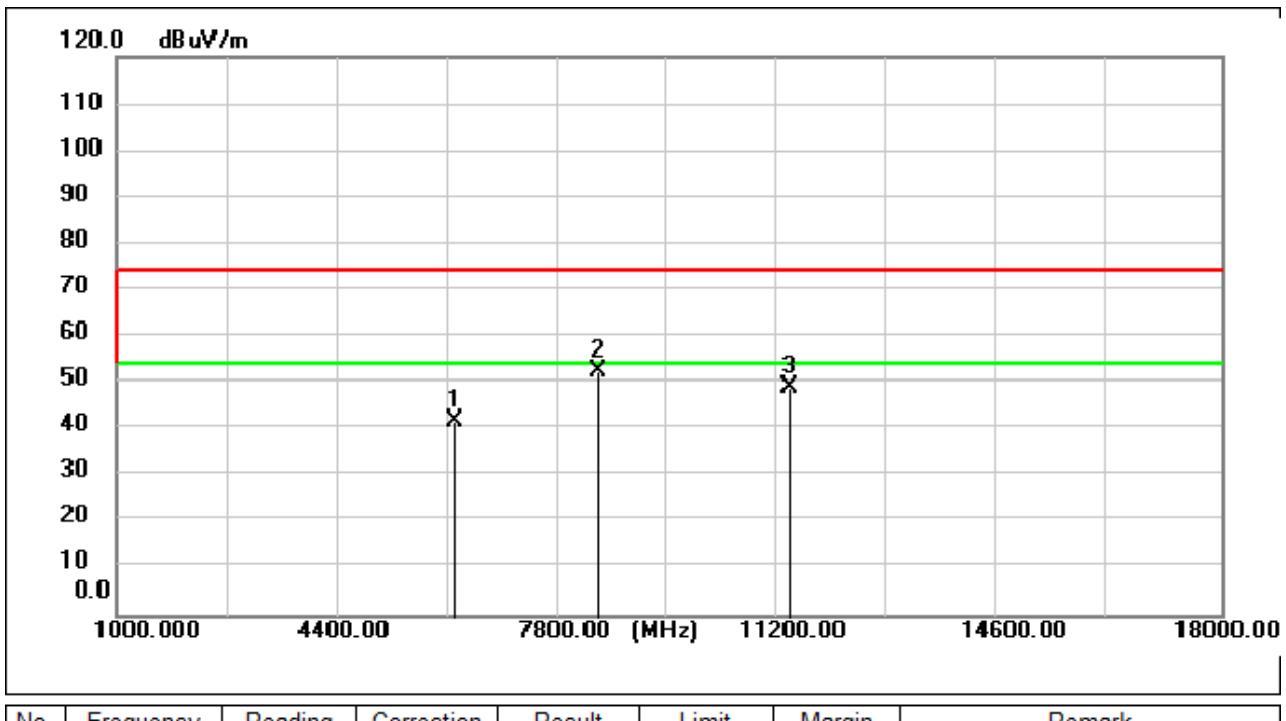


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6186.700	54.86	-12.96	41.90	74.00	-32.10	peak
2	8406.900	61.32	-8.69	52.63	74.00	-21.37	peak
3	11359.800	55.57	-6.44	49.13	74.00	-24.87	peak

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:Low

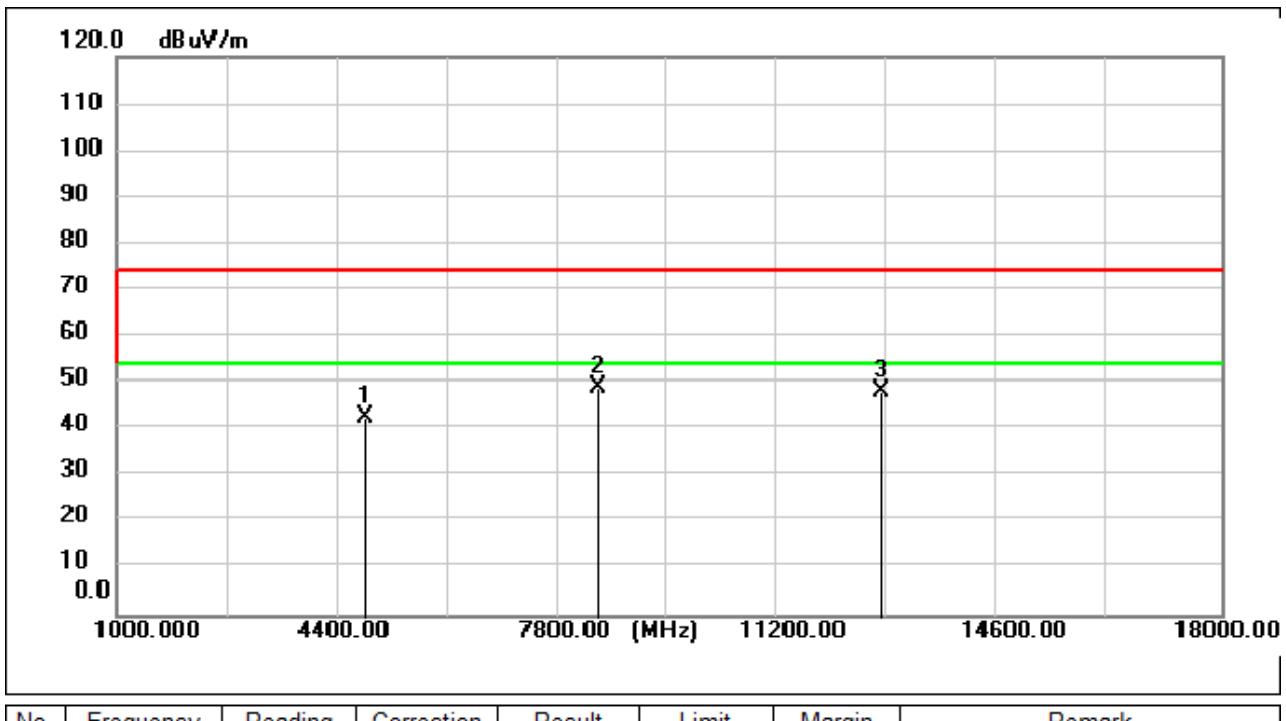


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.600	59.83	-17.01	42.82	74.00	-31.18	peak
2	8406.900	57.96	-8.69	49.27	74.00	-24.73	peak
3	12761.450	54.36	-6.02	48.34	74.00	-25.66	peak

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:middle

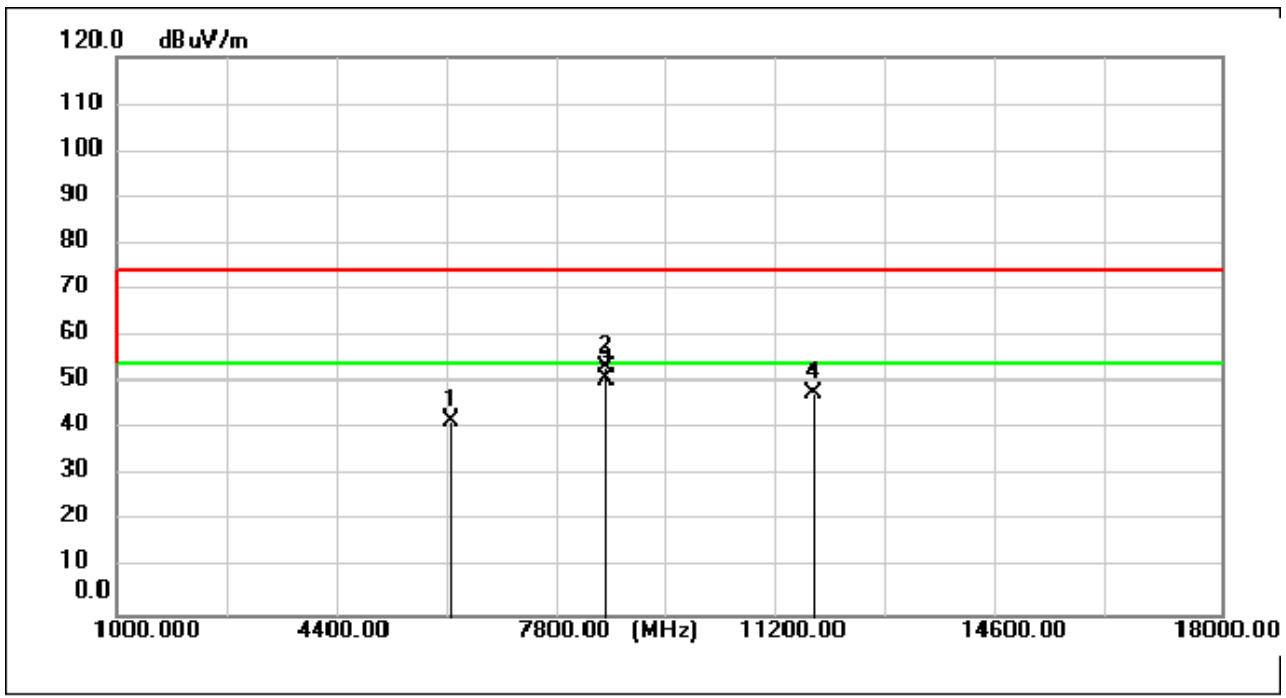


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6121.250	55.04	-13.27	41.77	74.00	-32.23	peak
2	8540.350	61.77	-8.49	53.28	74.00	-20.72	peak
3	8540.350	59.19	-8.49	50.70	54.00	-3.30	AVG
4	11726.150	54.43	-6.47	47.96	74.00	-26.04	peak

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:middle

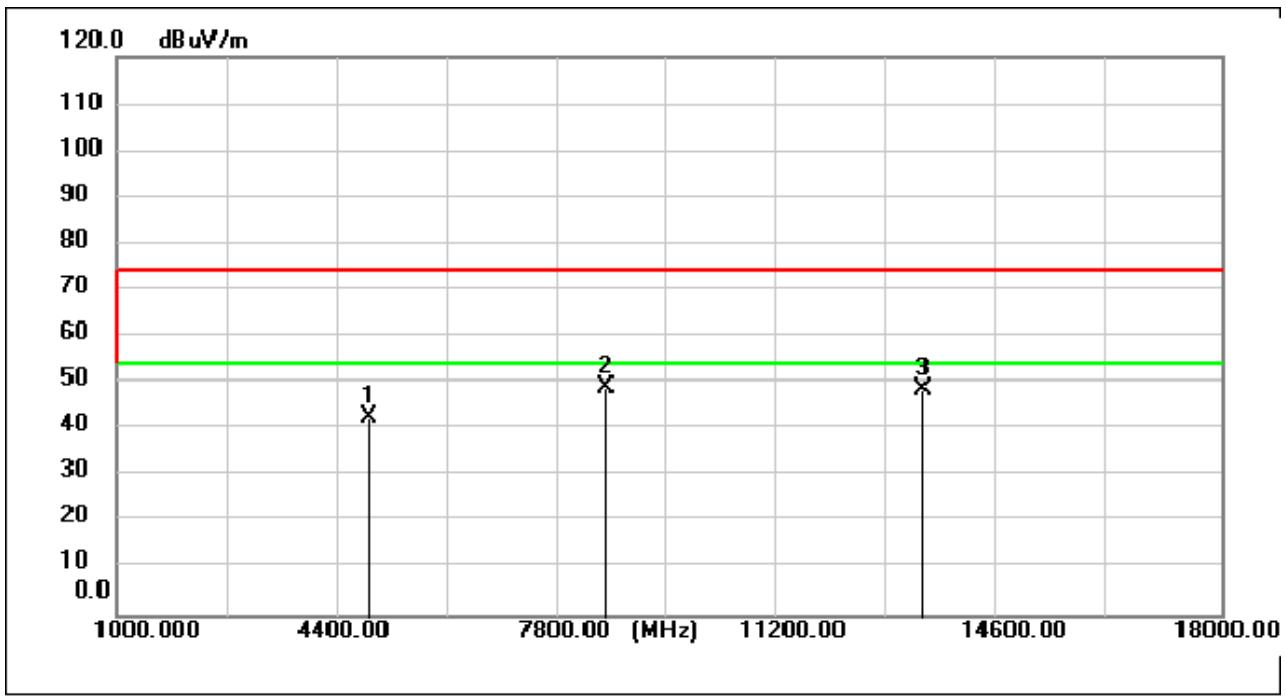


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4878.550	59.42	-16.87	42.55	74.00	-31.45	peak
2	8540.350	57.59	-8.49	49.10	74.00	-24.90	peak
3	13398.950	54.23	-5.59	48.64	74.00	-25.36	peak

Test Mode: 06; Polarity: Horizontal; Modulation:GFSK; Channel:High

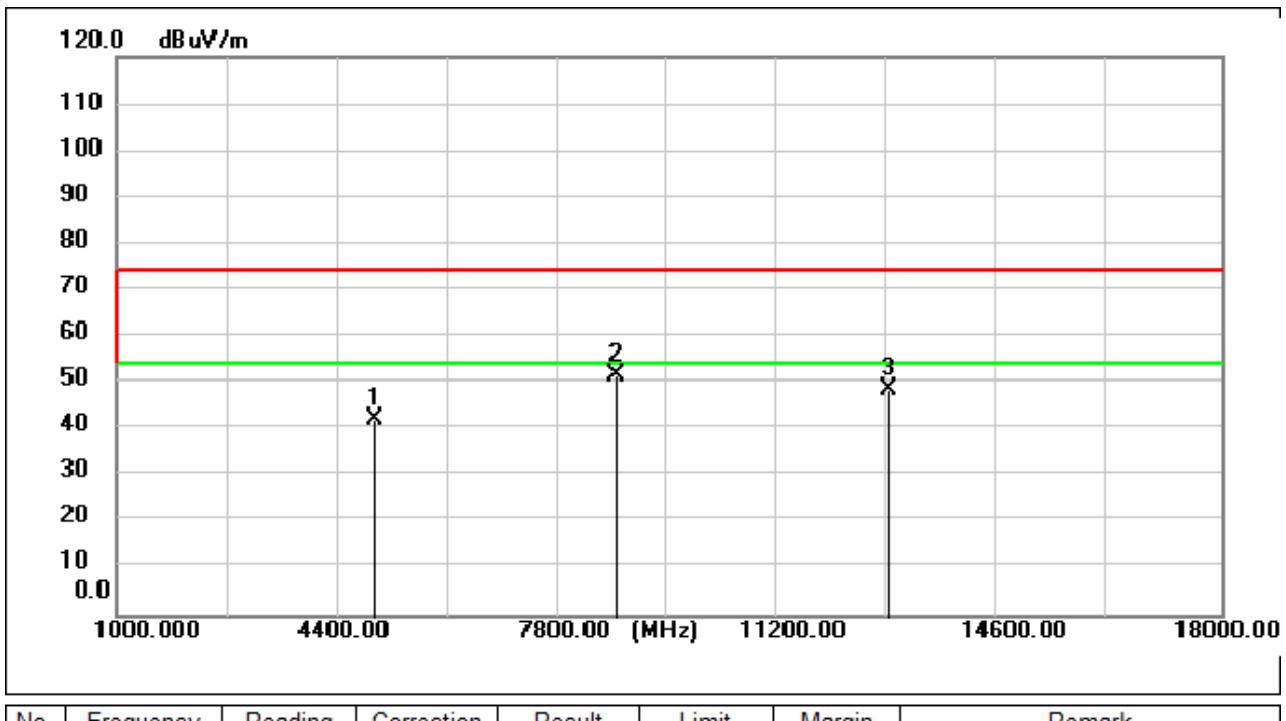

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4961.000	58.91	-16.72	42.19	74.00	-31.81	peak
2	8679.750	59.79	-8.29	51.50	74.00	-22.50	peak
3	12871.100	54.49	-5.95	48.54	74.00	-25.46	peak

Test Mode: 06; Polarity: Vertical; Modulation:GFSK; Channel:High

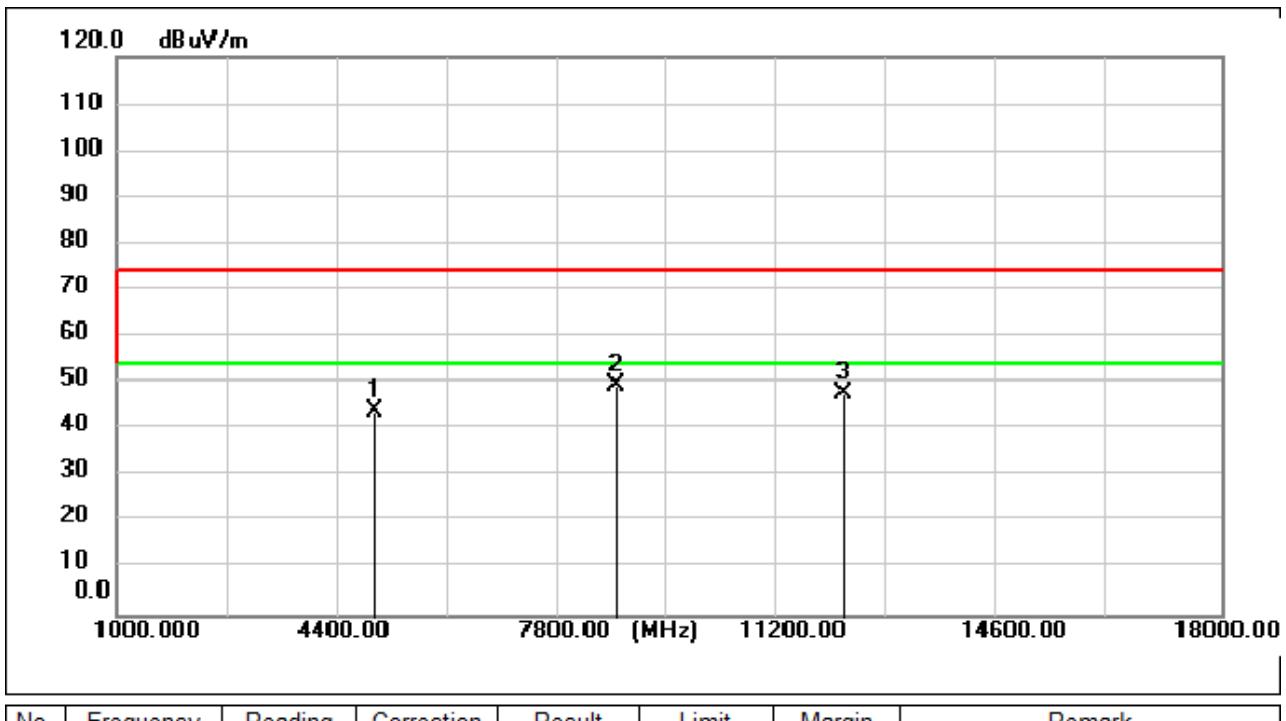

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4959.300	60.52	-16.72	43.80	74.00	-30.20	peak
2	8679.750	57.66	-8.29	49.37	74.00	-24.63	peak
3	12176.650	54.27	-6.32	47.95	74.00	-26.05	peak

## 7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)  
Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.5.3 Test Setup Diagram

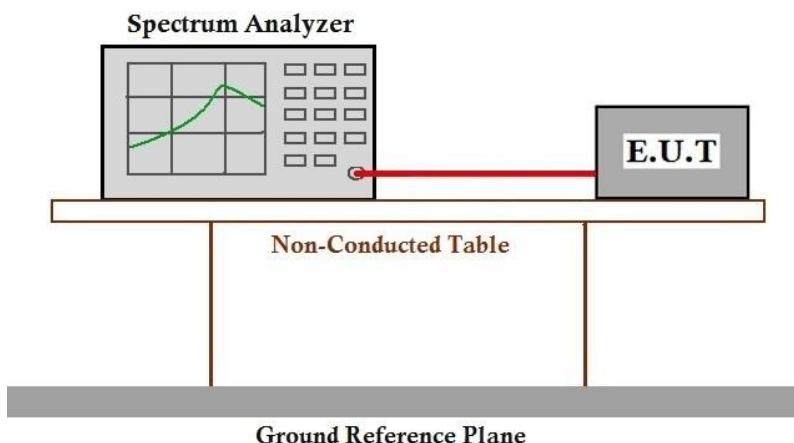

#### **7.5.4 Measurement Procedure and Data**

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

## 7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)  
Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:  
≥500 kHz

### 7.6.1 E.U.T. Operation

Operating Environment:  
Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.6.3 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)  
Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.7.3 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)  
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.8.3 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)  
Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.9.3 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.10 99% Bandwidth

Test Requirement RSS-Gen Section 6.7  
Test Method: ANSI C63.10 (2013) Section 6.9.3

### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C      Humidity: 50.5 % RH      Atmospheric Pressure: 1010 mbar

### 7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	06	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.10.3 Measurement Procedure and Data

Please Refer to Appendix for Details

## **8 Test Setup Photo**

Refer to Appendix - Test Setup Photo for KSCR2505000934AT

## **9 EUT Constructional Details (EUT Photos)**

Refer to Appendix\_Photos of EUT Constructional Details for KSCR2505000934AT

## 10 Appendix

### 1. Duty Cycle


#### 1.1 Test Result


##### 1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.128	2.780	76.55	1.16	0.00
		2440	2.128	2.780	76.55	1.16	0.00
		2480	2.127	2.780	76.51	1.16	0.00
2M	SISO	2402	1.069	2.154	49.63	3.04	0.02
		2440	1.069	2.155	49.61	3.04	0.03
		2480	1.069	2.154	49.63	3.04	0.02

## 1.2 Test Graph

### 1.2.1 Ant1

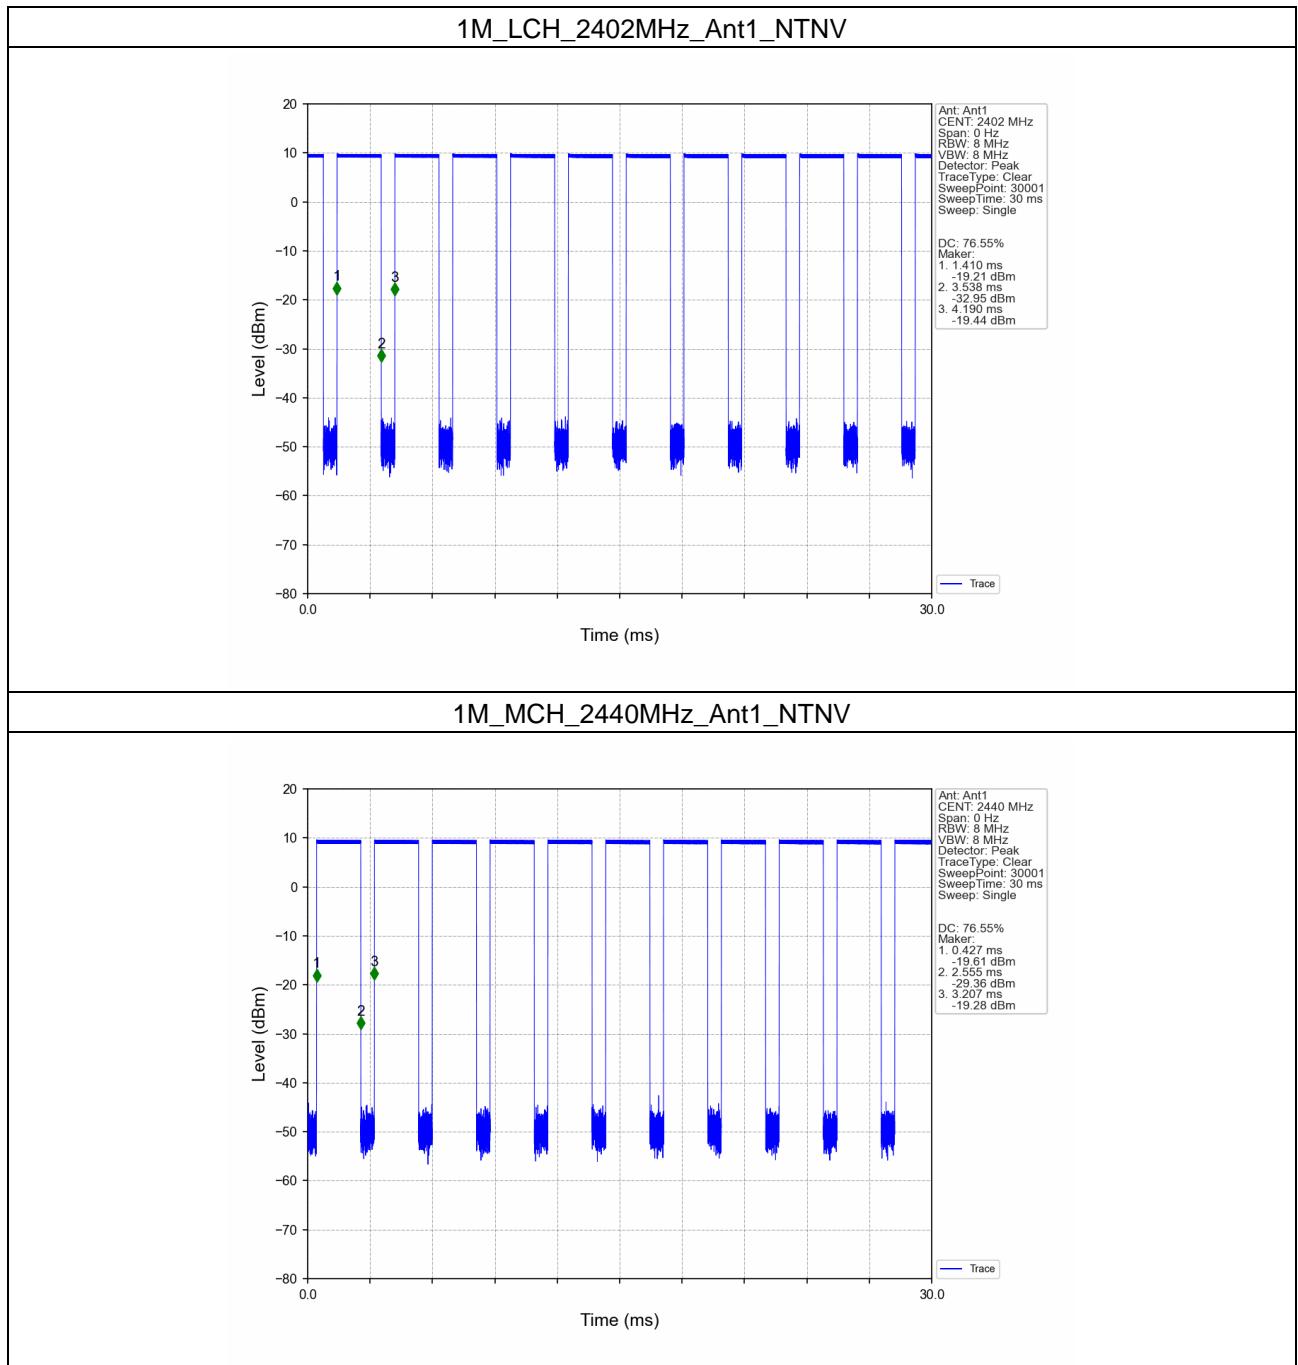

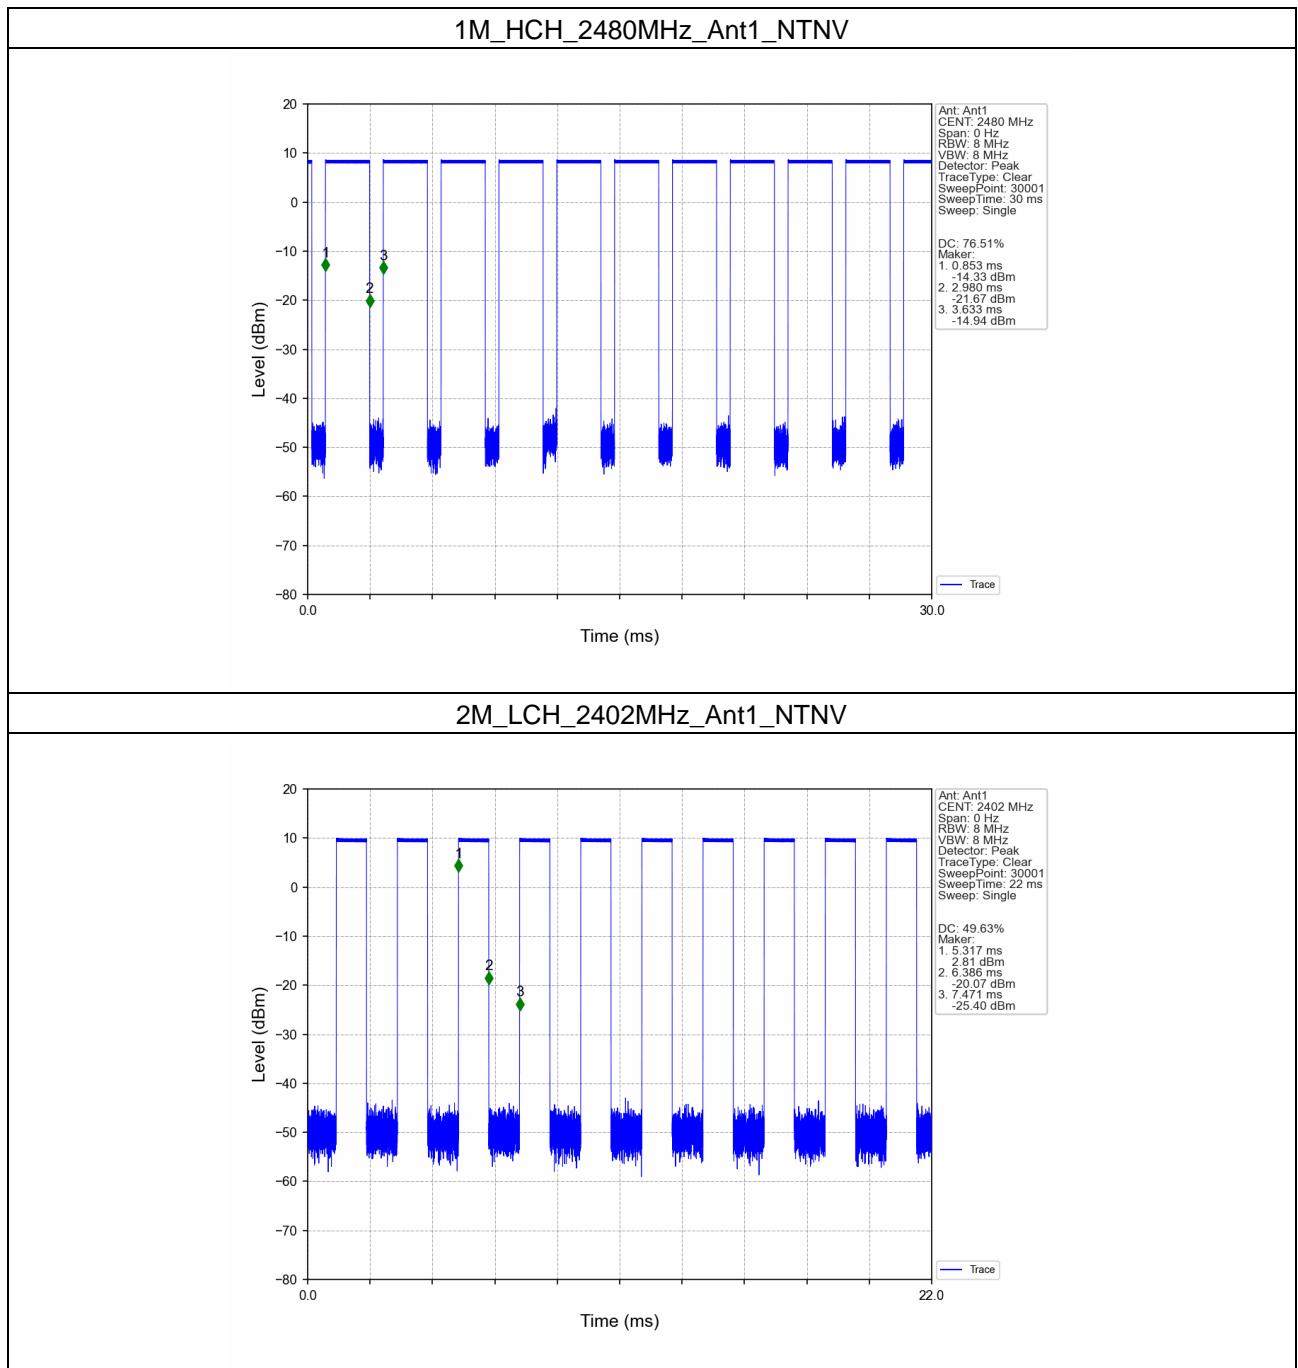

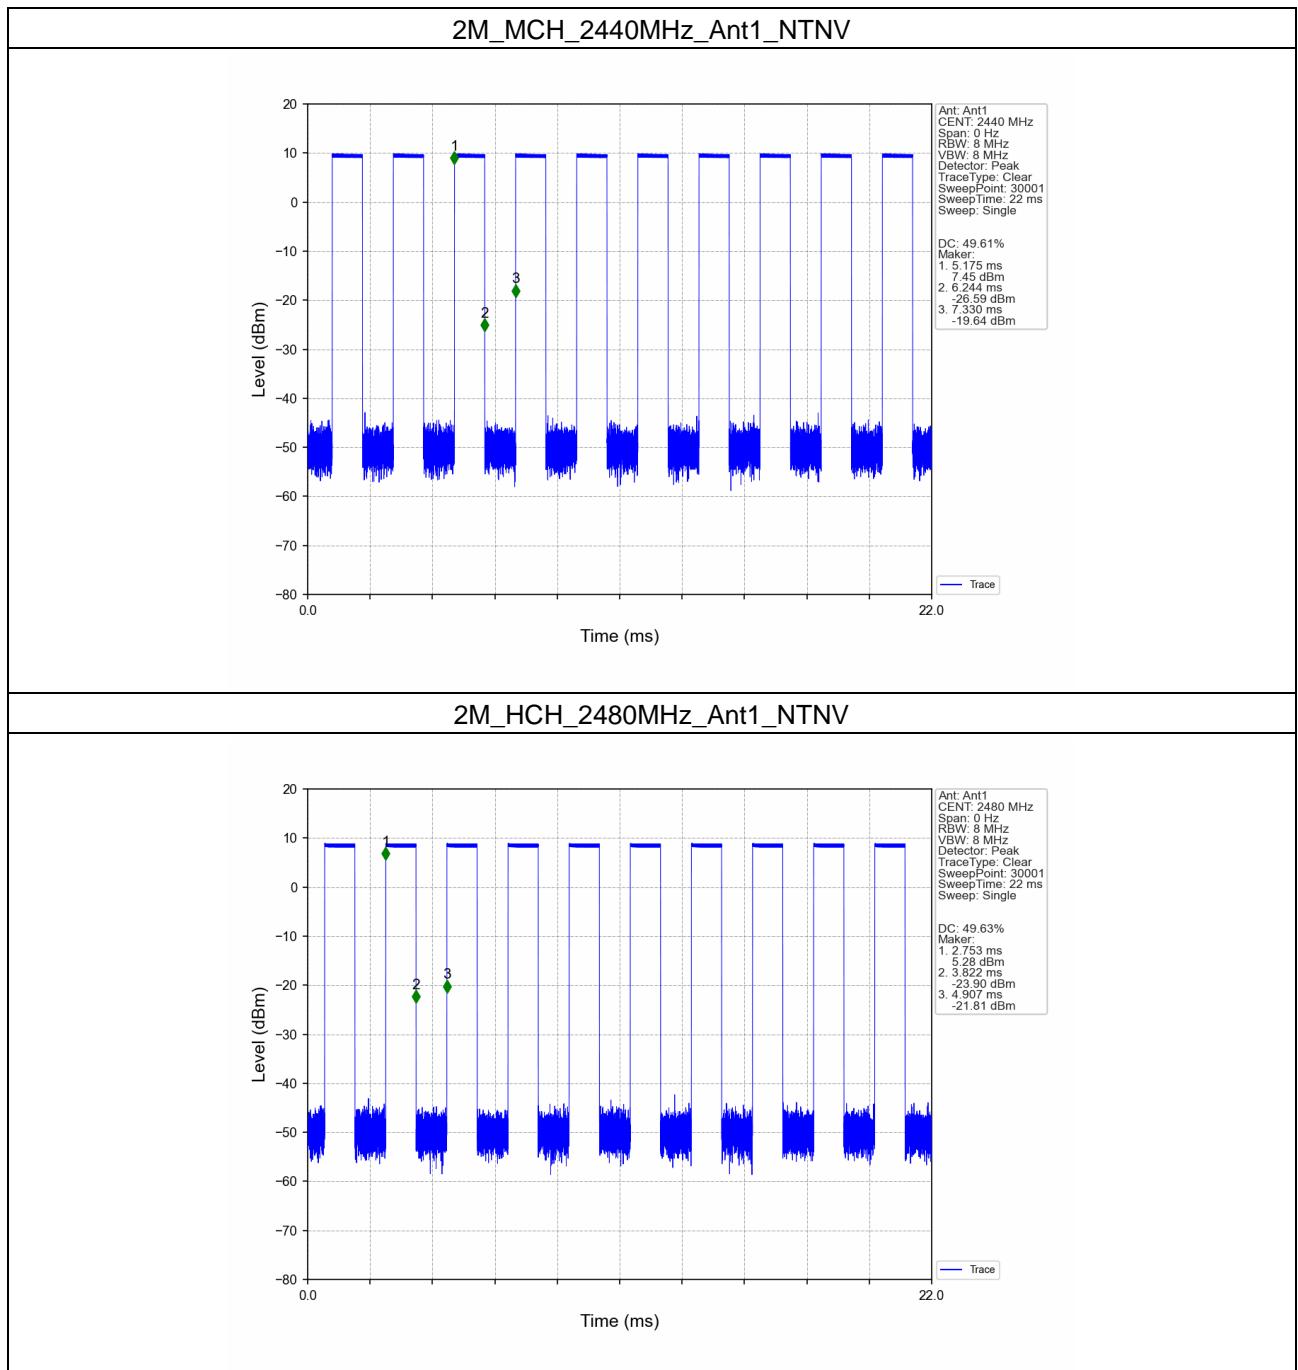

## 2. Bandwidth

### 2.1 Test Result

#### 2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.038	/	Pass
		2440	1	1.028	/	Pass
		2480	1	1.036	/	Pass
2M	SISO	2402	1	2.079	/	Pass
		2440	1	2.079	/	Pass
		2480	1	2.079	/	Pass


#### 2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.652	>=0.5	Pass
		2440	1	0.648	>=0.5	Pass
		2480	1	0.657	>=0.5	Pass
2M	SISO	2402	1	1.113	>=0.5	Pass
		2440	1	1.111	>=0.5	Pass
		2480	1	1.122	>=0.5	Pass

## 2.2 Test Graph


### 2.2.1 OBW

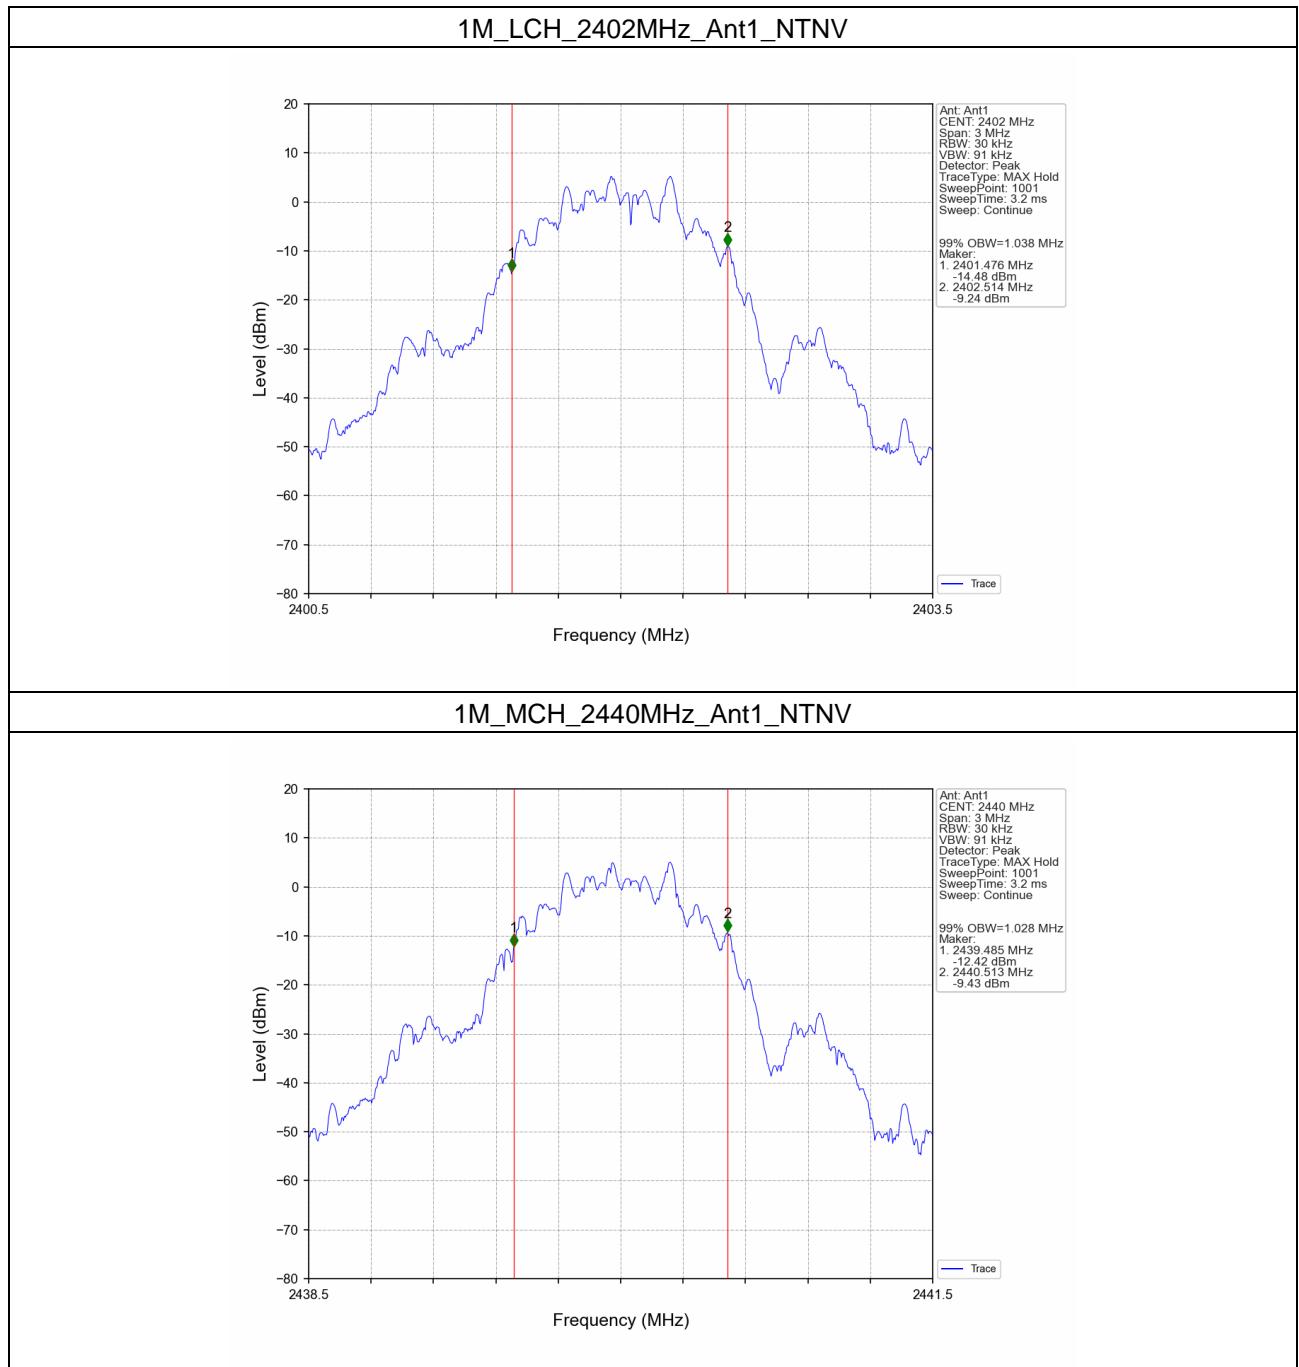


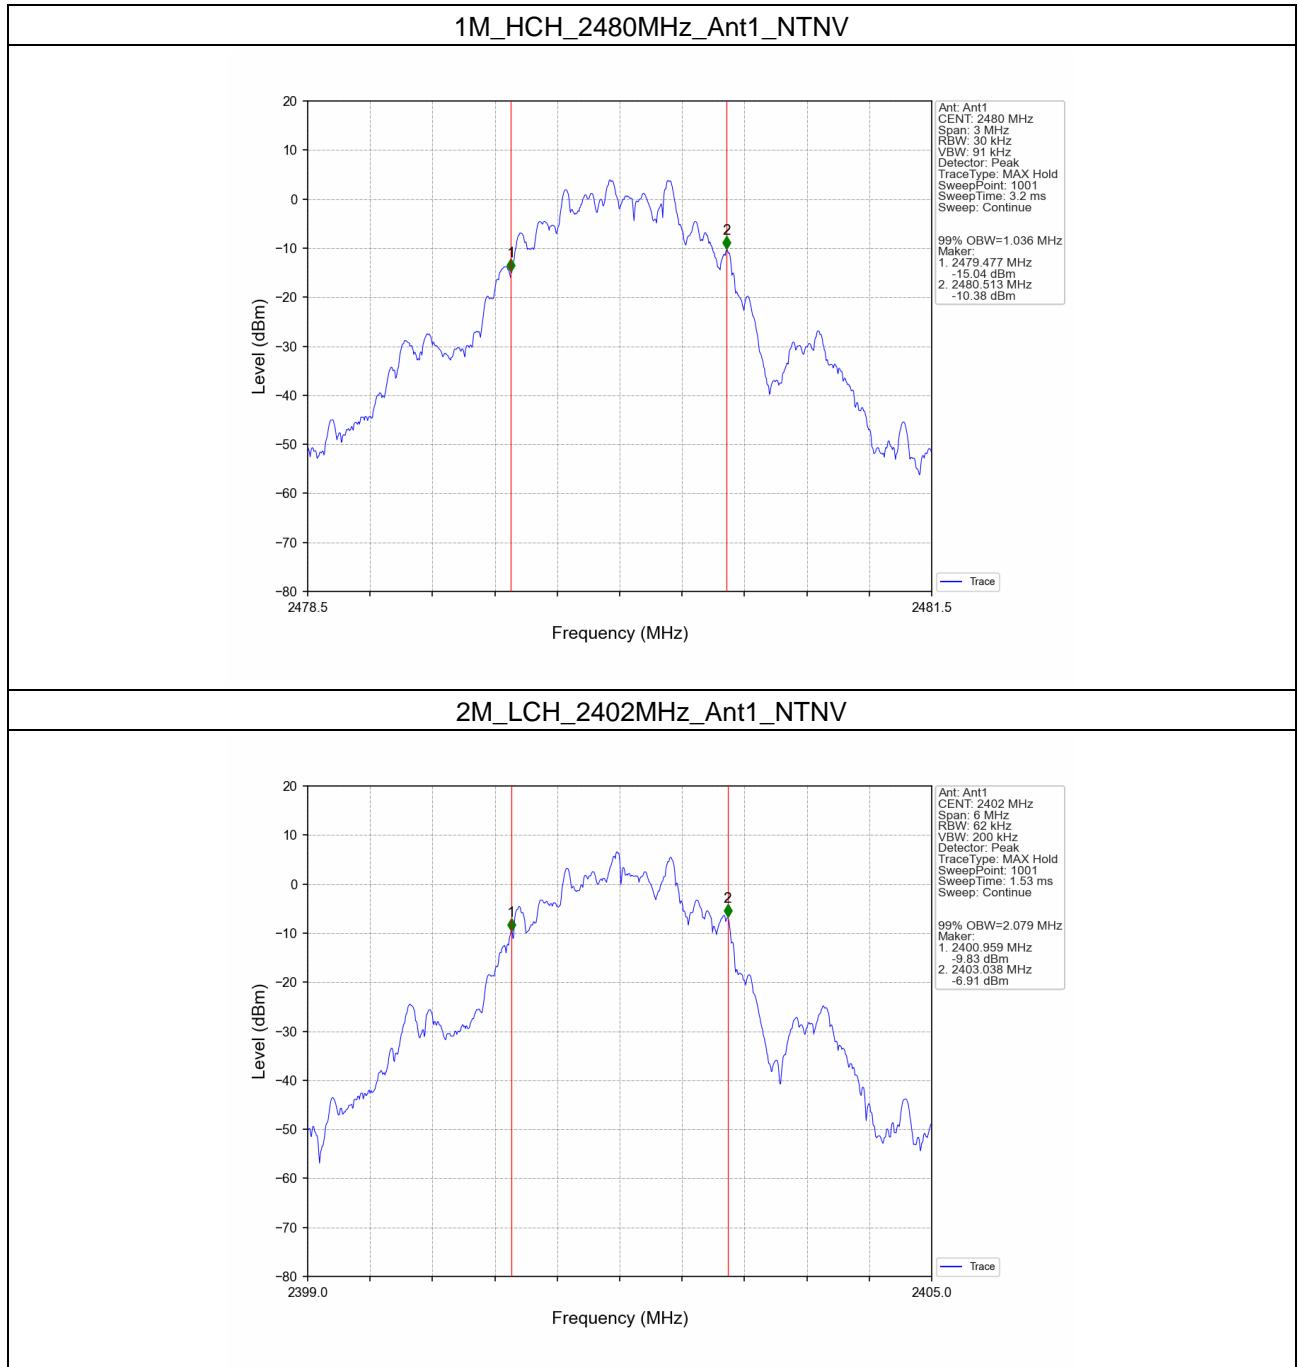


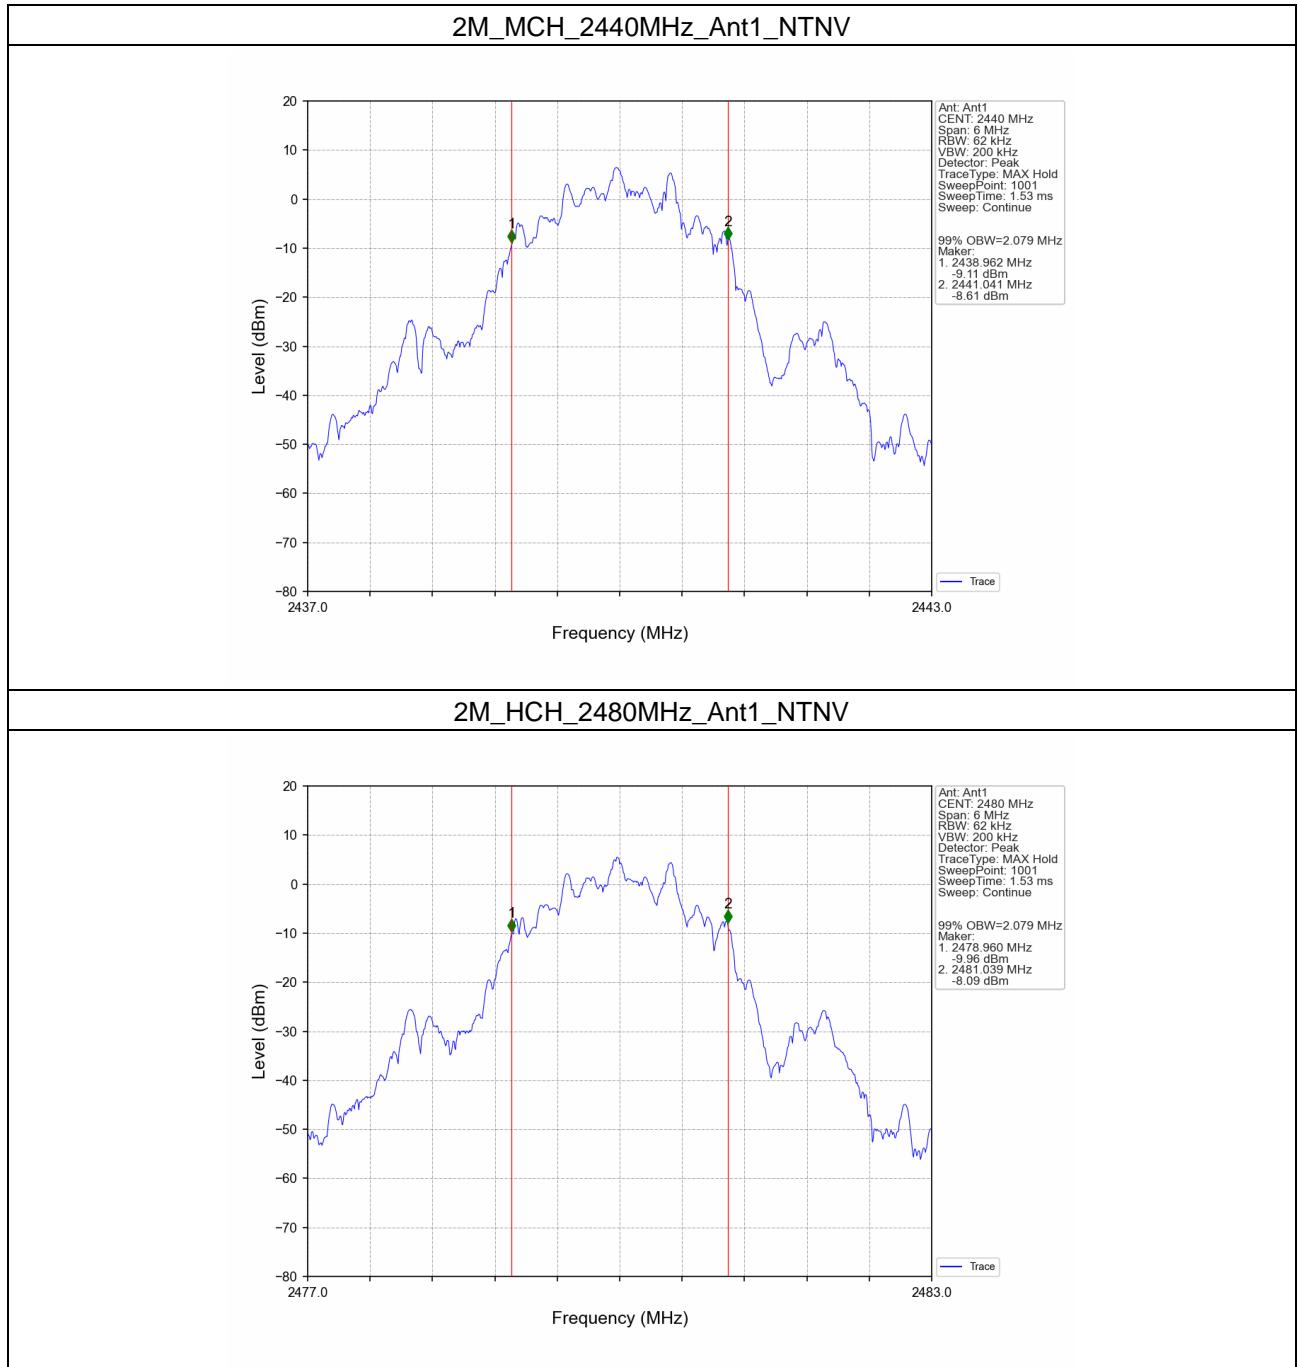

## 2.2.2 6dB BW

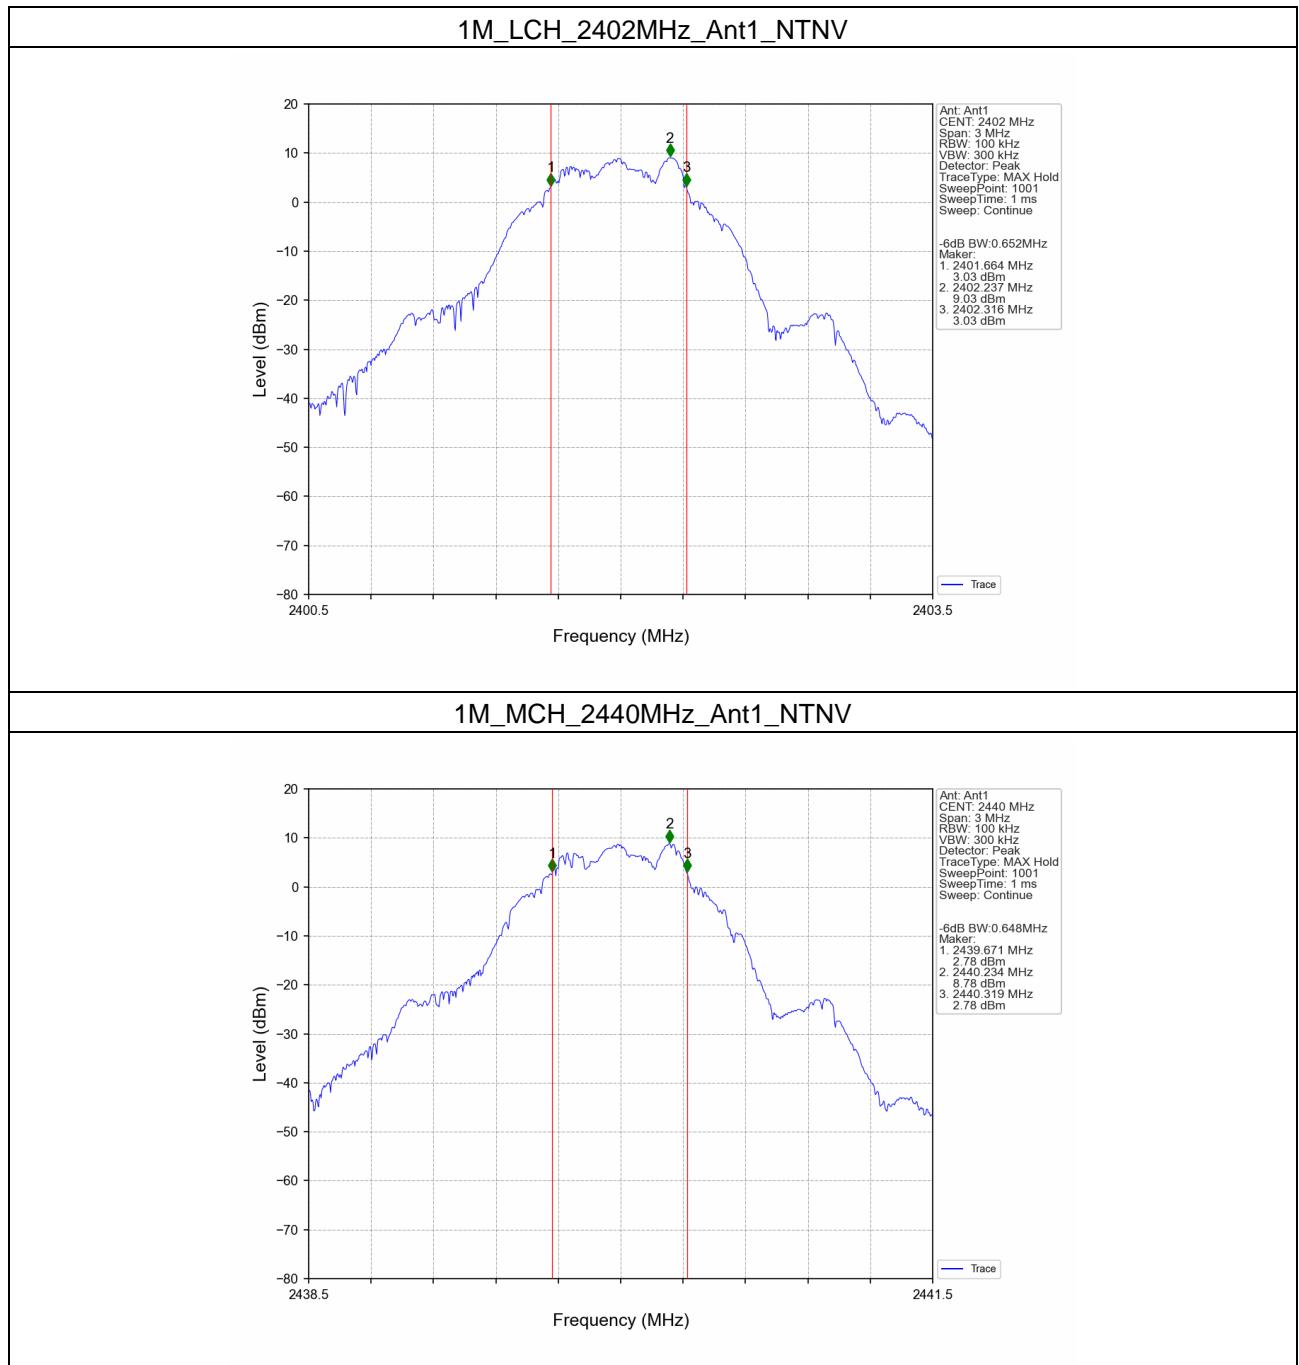

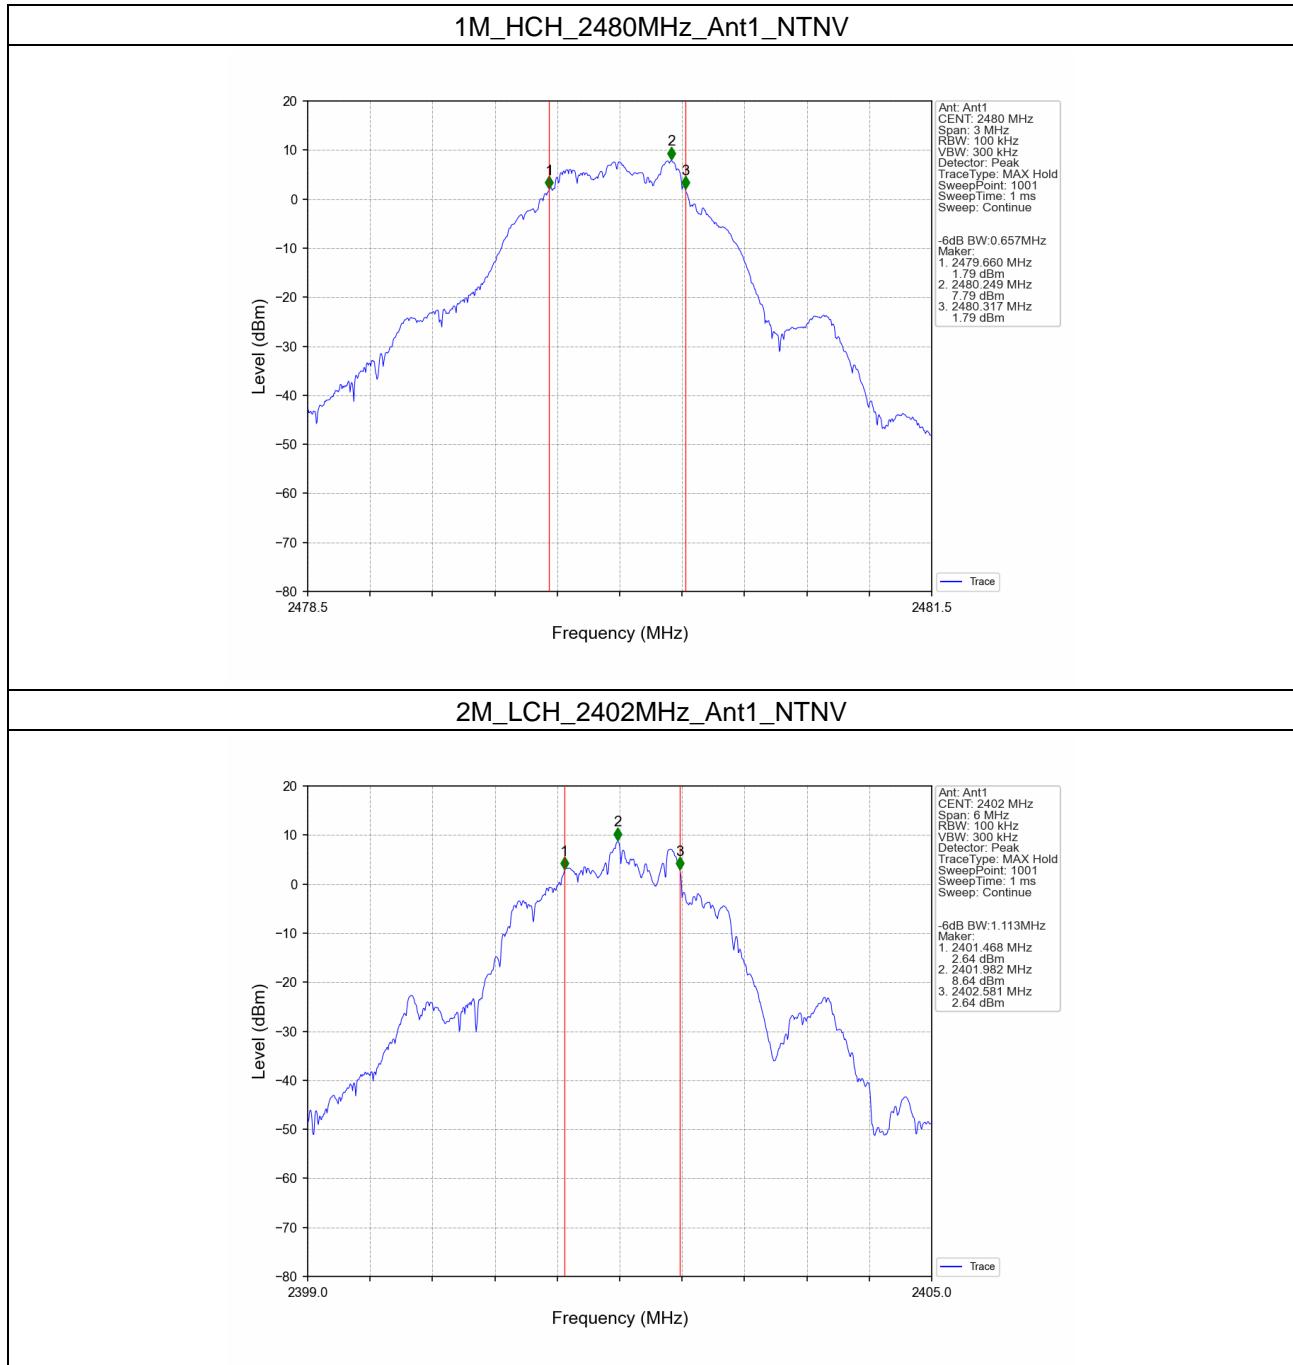

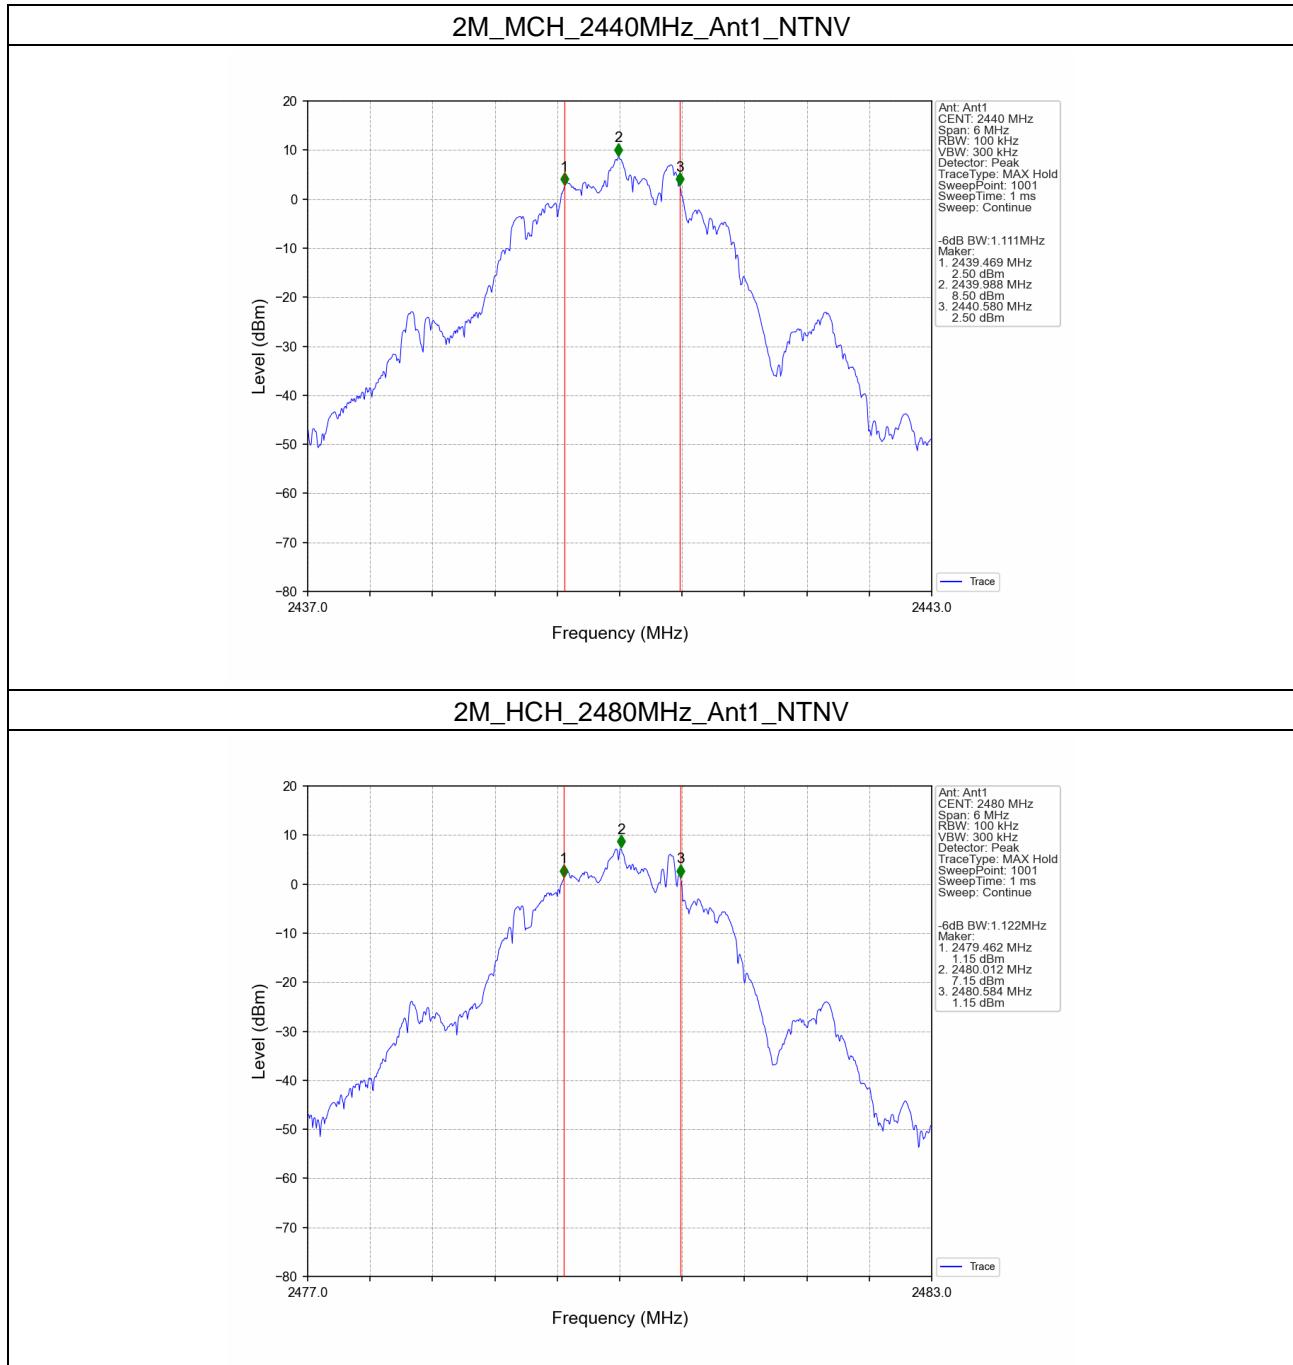

### 3. Maximum Conducted Output Power

#### 3.1 Test Result

##### 3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	9.70	<=30	Pass
		2440	9.50	<=30	Pass
		2480	8.52	<=30	Pass
2M	SISO	2402	9.85	<=30	Pass
		2440	9.71	<=30	Pass
		2480	8.80	<=30	Pass

Note1: Antenna Gain: Ant1: 3.95dBi;

##### 3.1.2 EIRP


Mode	TX Type	Frequency (MHz)	E.I.R.P (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	13.65	<=36.02	Pass
		2440	13.45	<=36.02	Pass
		2480	12.47	<=36.02	Pass
2M	SISO	2402	13.80	<=36.02	Pass
		2440	13.66	<=36.02	Pass
		2480	12.75	<=36.02	Pass


Note1: Antenna Gain: Ant1: 3.95dBi;

Note2: E.I.R.P = Measured Power + Antenna Gain


## 3.2 Test Graph

### 3.2.1 Power

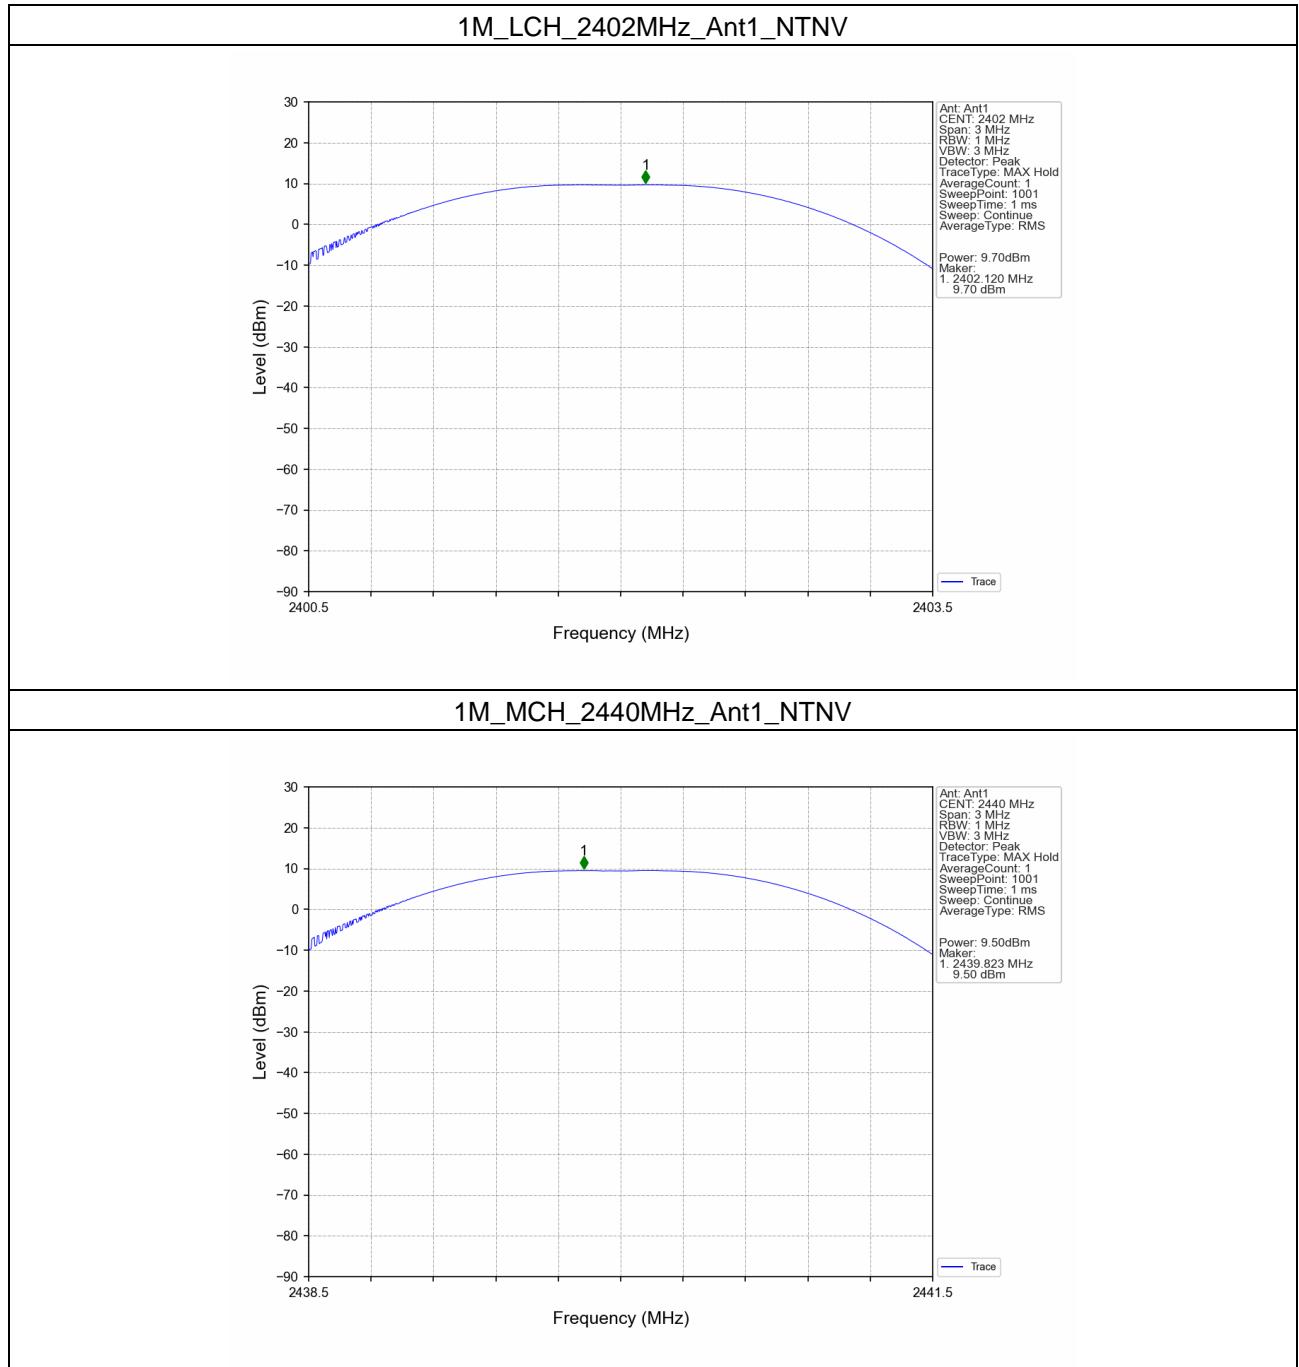


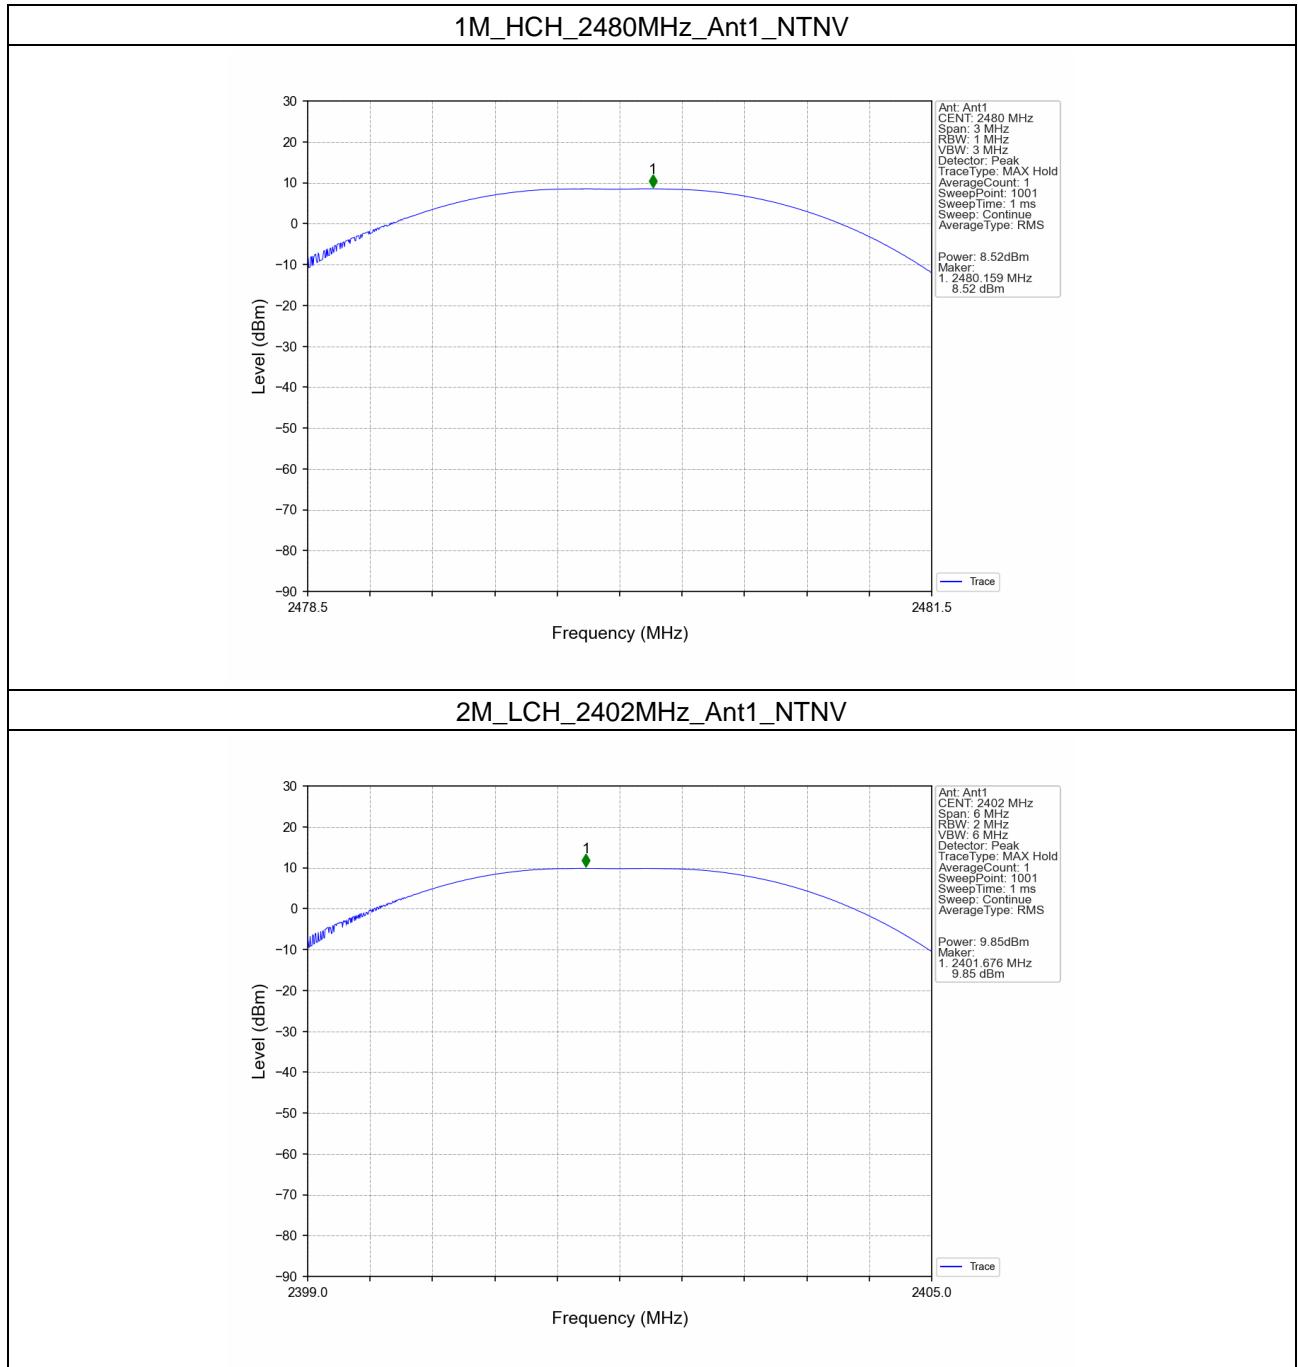

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

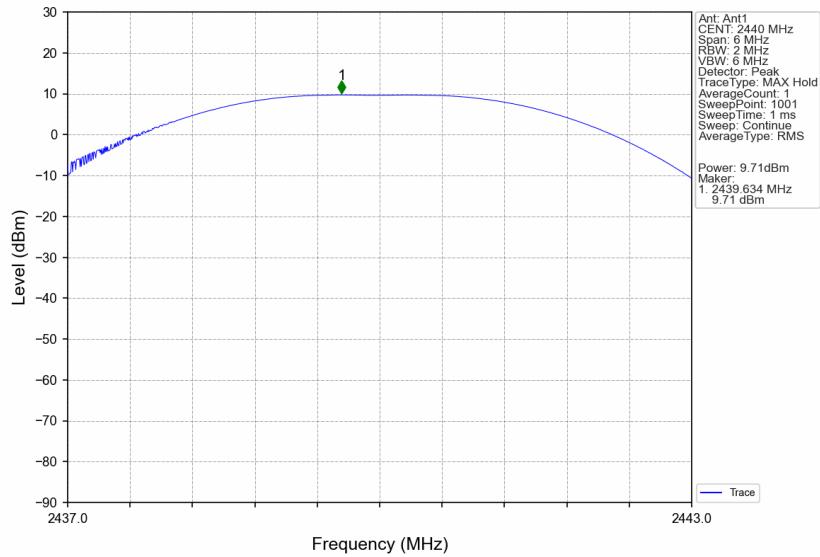

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

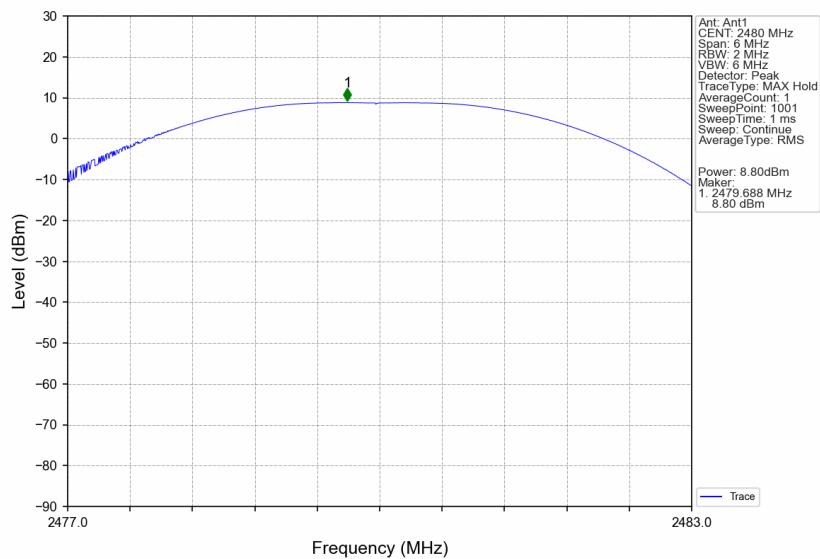

## 4. Maximum Power Spectral Density

### 4.1 Test Result


#### 4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	3.09	<=8	Pass
		2440	2.89	<=8	Pass
		2480	1.91	<=8	Pass
2M	SISO	2402	3.24	<=8	Pass
		2440	3.08	<=8	Pass
		2480	2.16	<=8	Pass

Note1: Antenna Gain: Ant1: 3.95dBi;


## 4.2 Test Graph

### 4.2.1 PSD

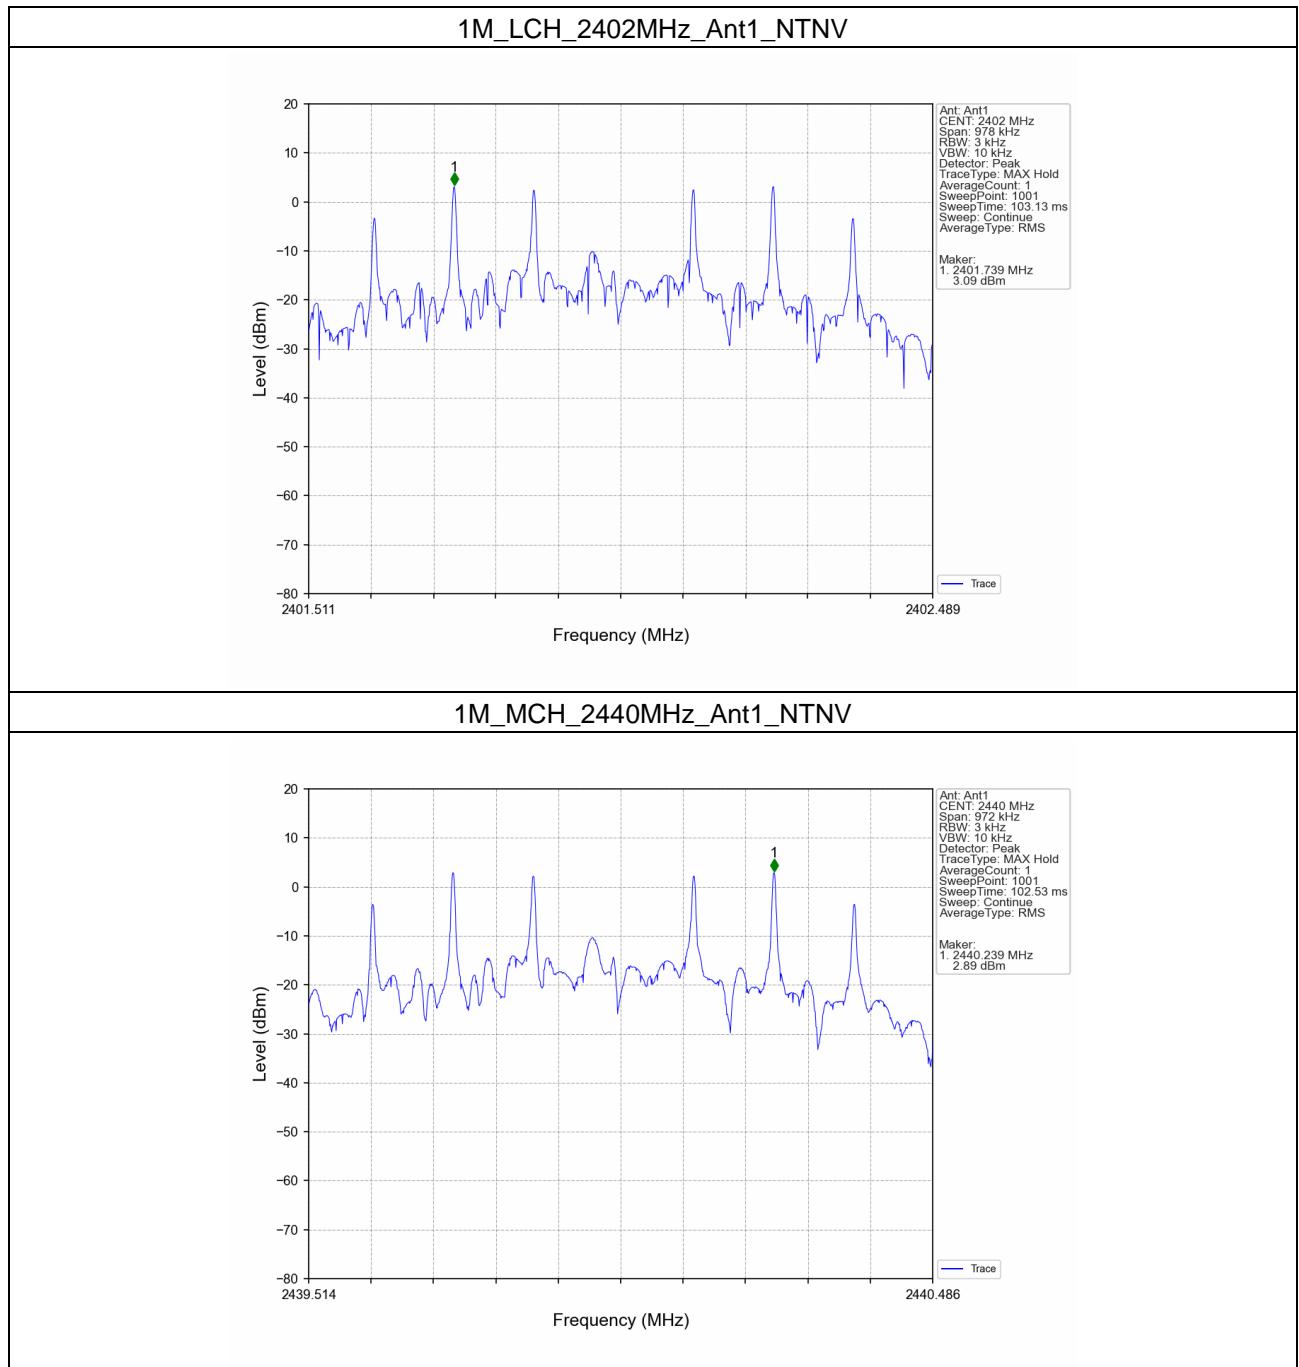


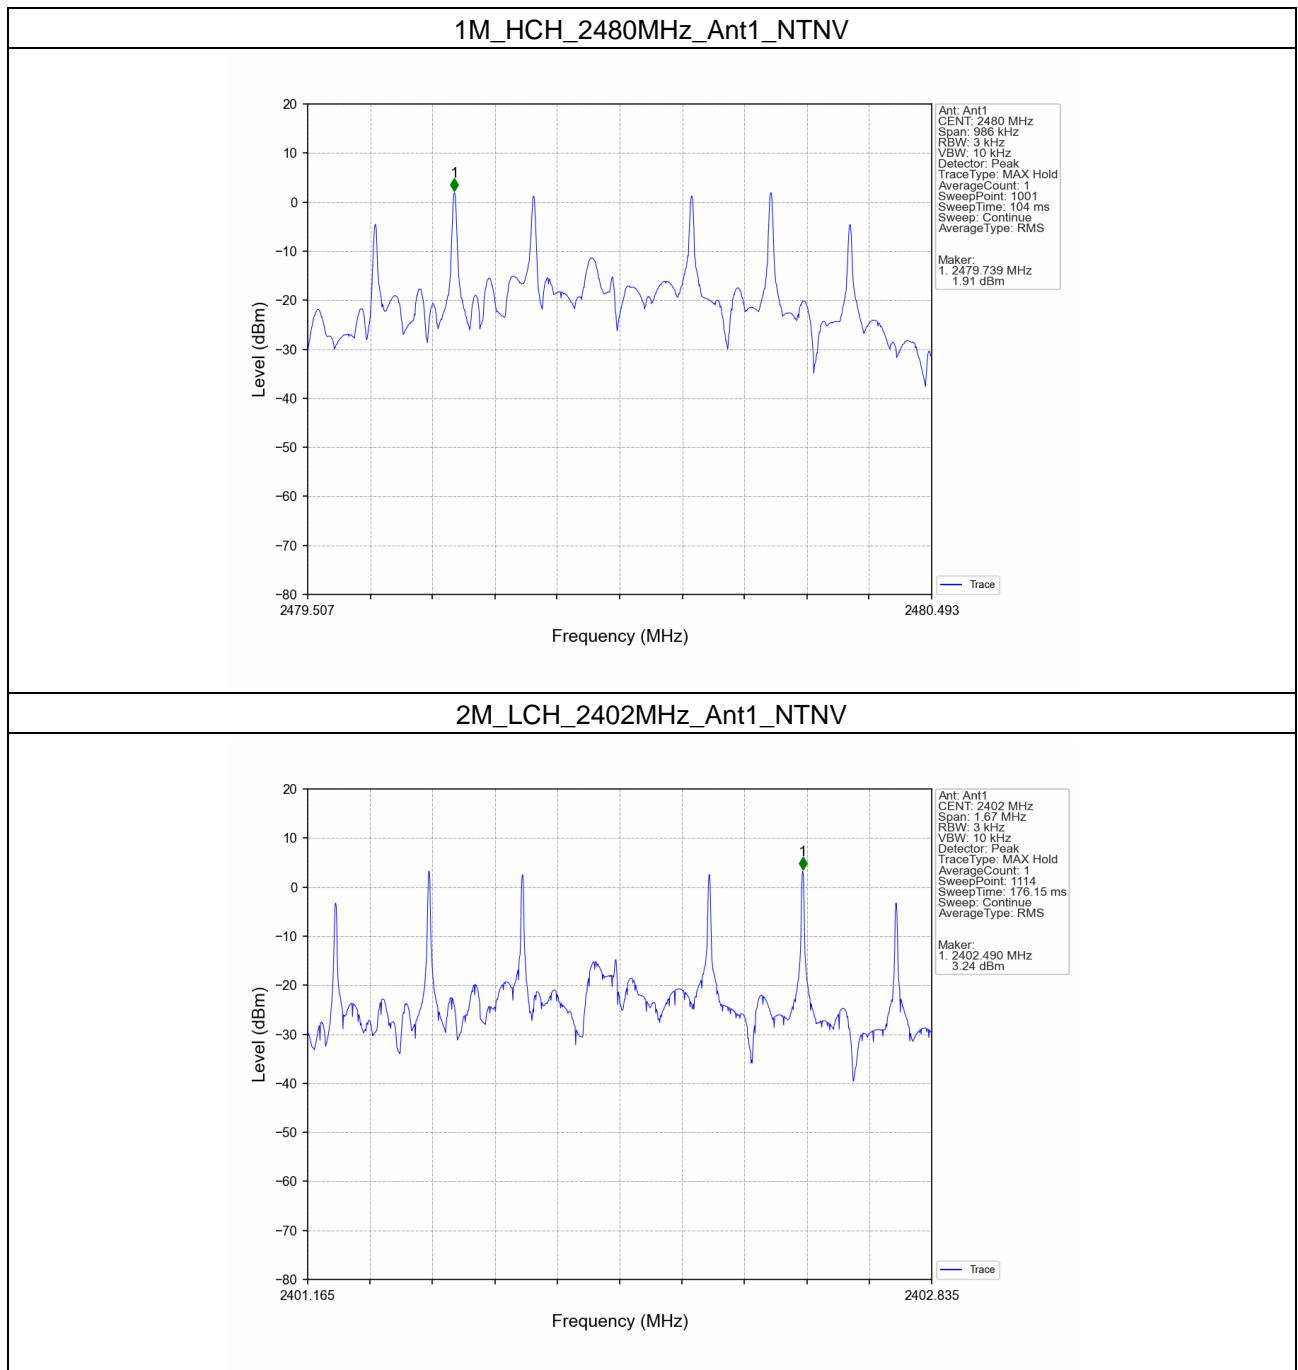

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

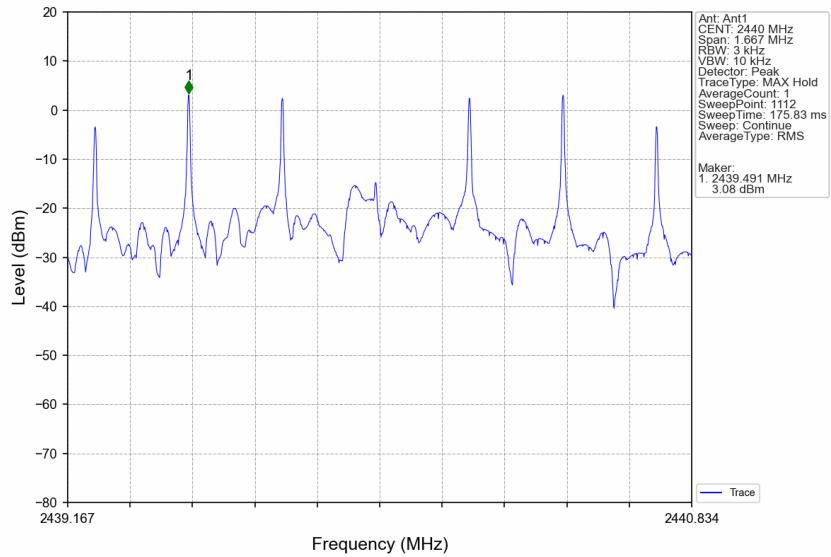

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

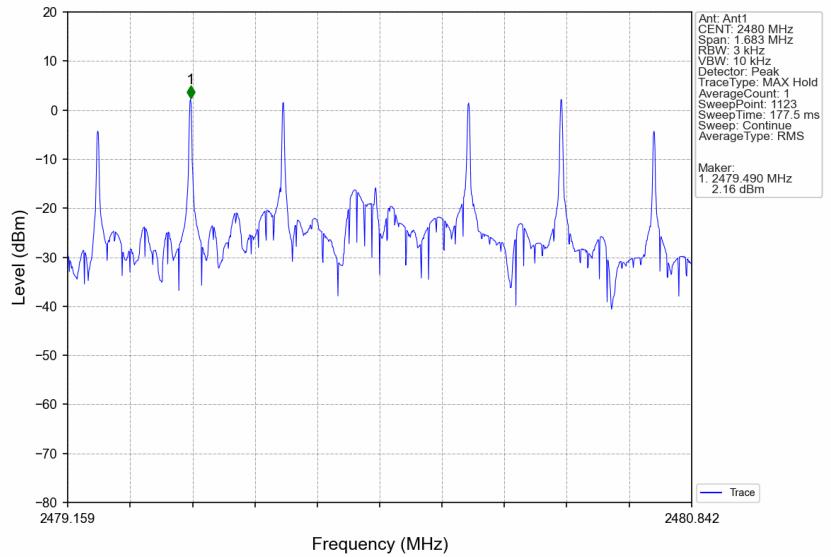

## 5. Unwanted Emissions In Non-restricted Frequency Bands

### 5.1 Test Result

#### 5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	9.02
		2440	1	8.81
		2480	1	7.84
2M	SISO	2402	1	8.64
		2440	1	8.50
		2480	1	7.59

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


#### 5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	9.02	-10.98	Pass
		2440	1	9.02	-10.98	Pass
		2480	1	9.02	-10.98	Pass
2M	SISO	2402	1	8.64	-11.36	Pass
		2440	1	8.64	-11.36	Pass
		2480	1	8.64	-11.36	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


## 5.2 Test Graph

### 5.2.1 Ref

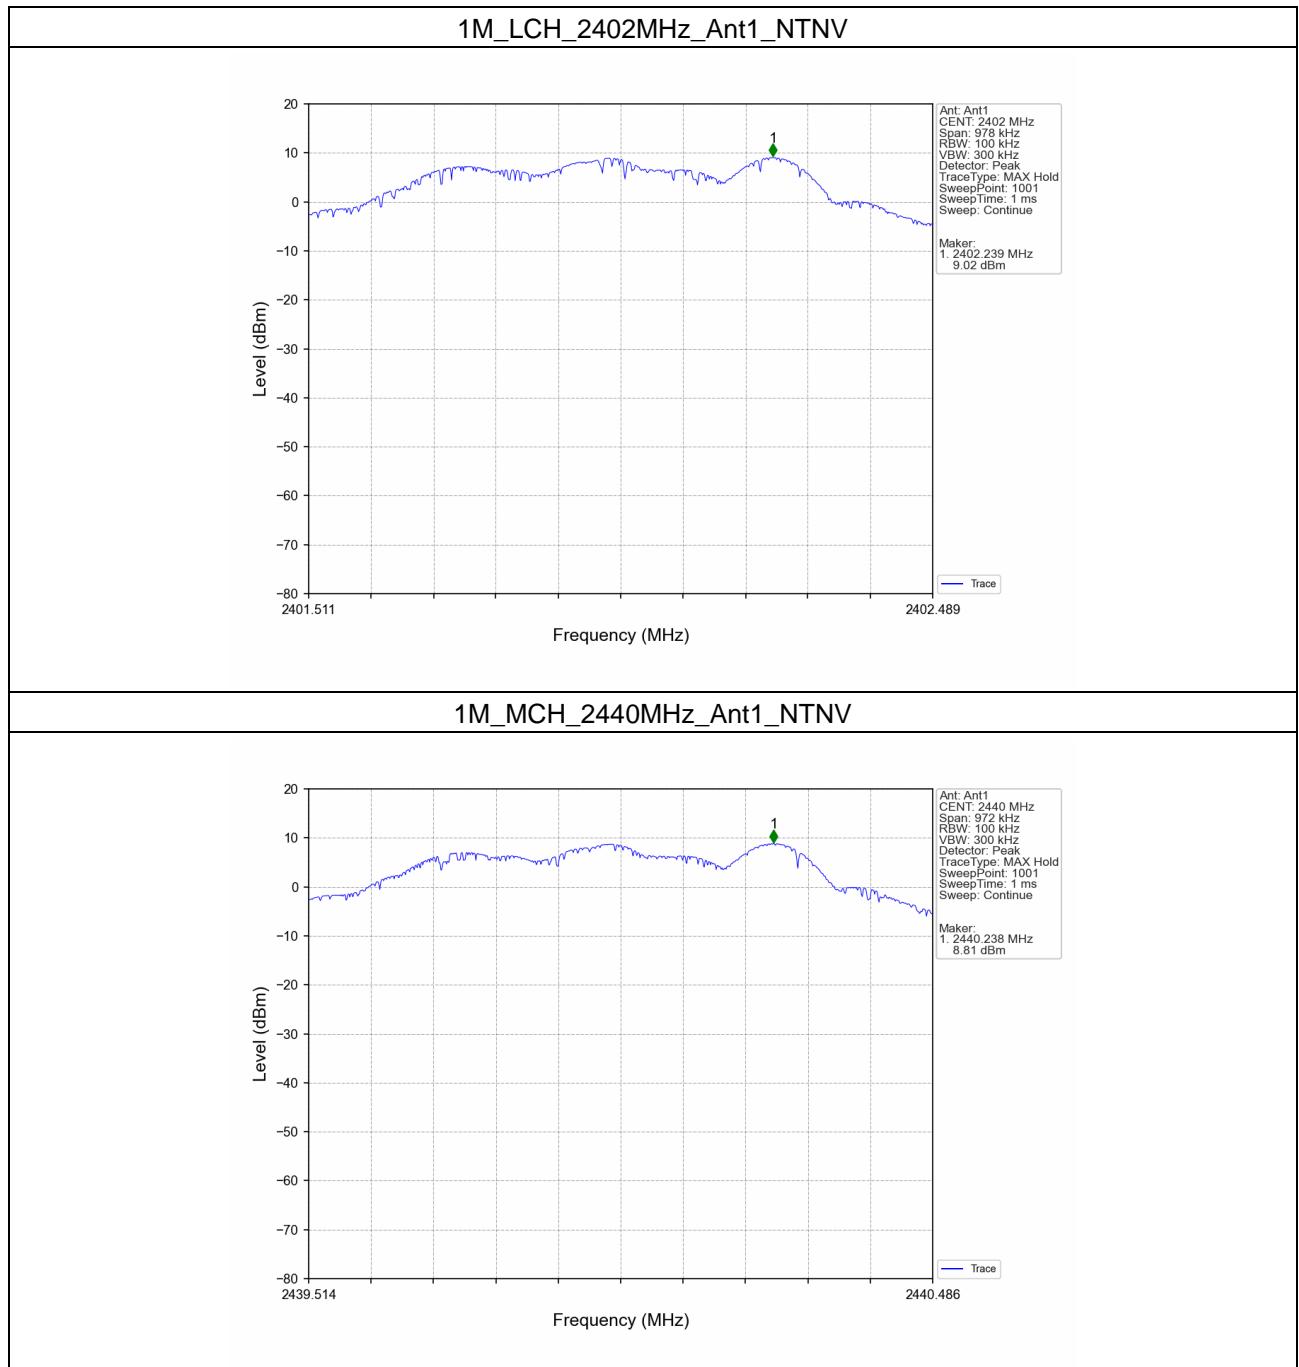


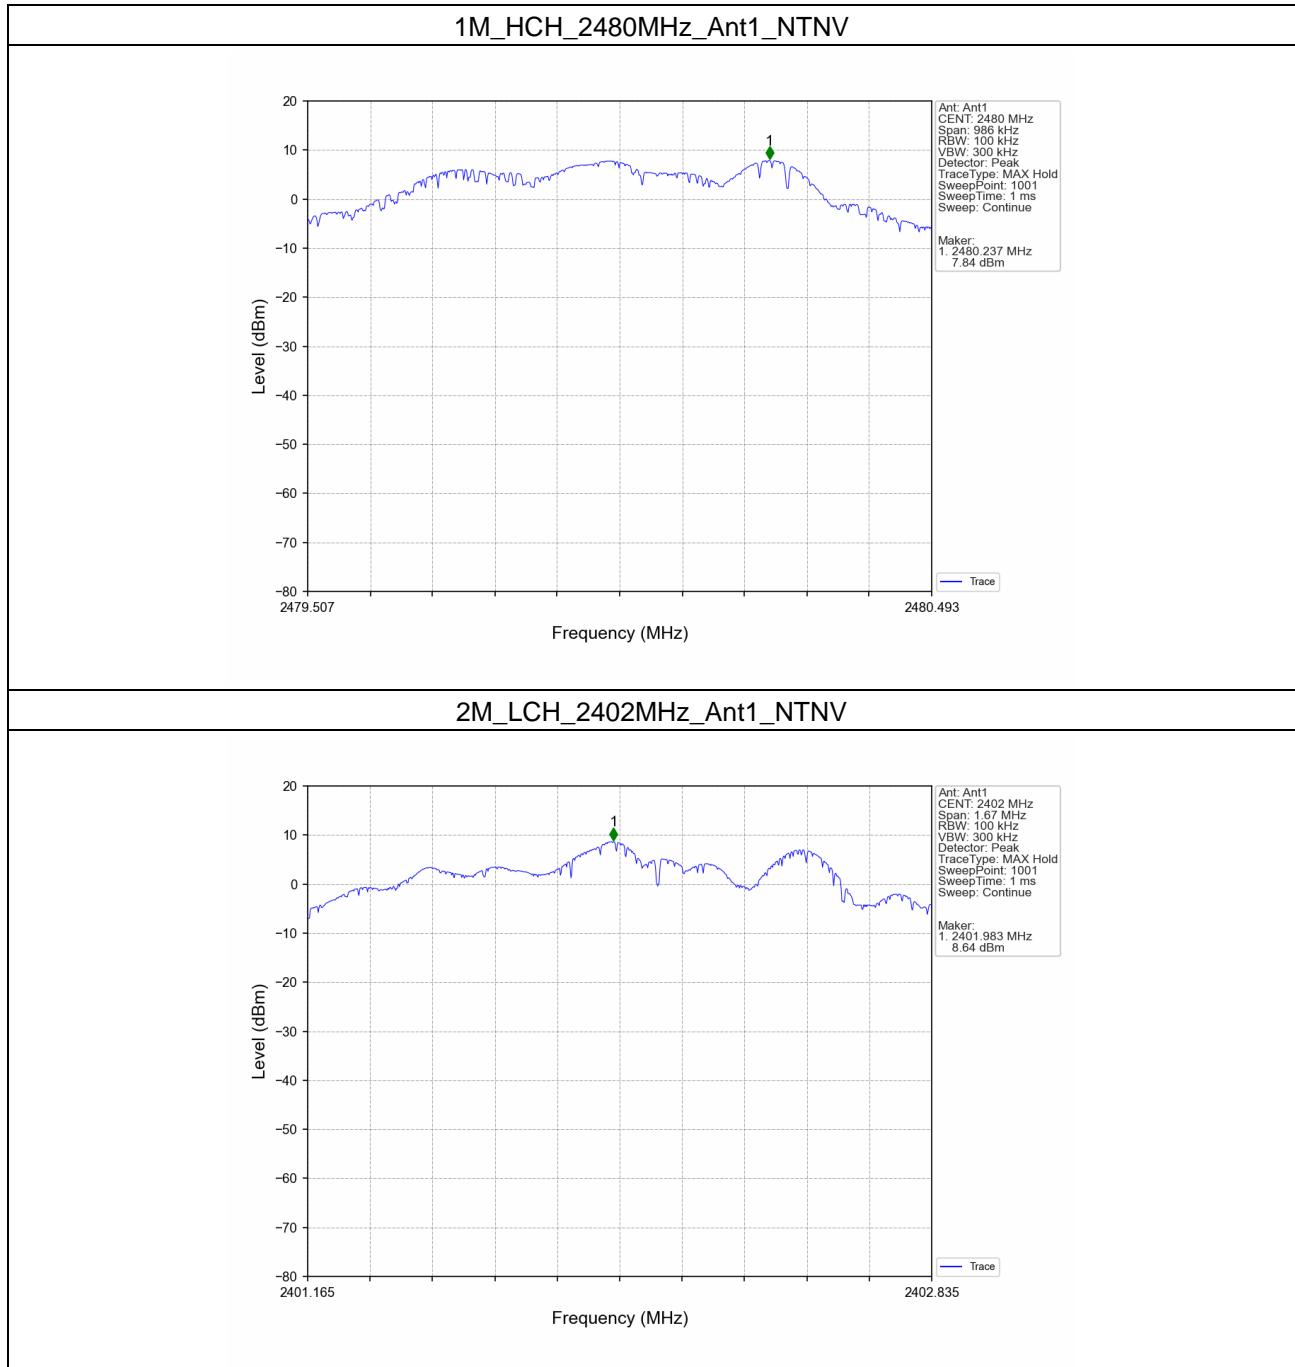


## 2M\_MCH\_2440MHz\_Ant1\_NTNV

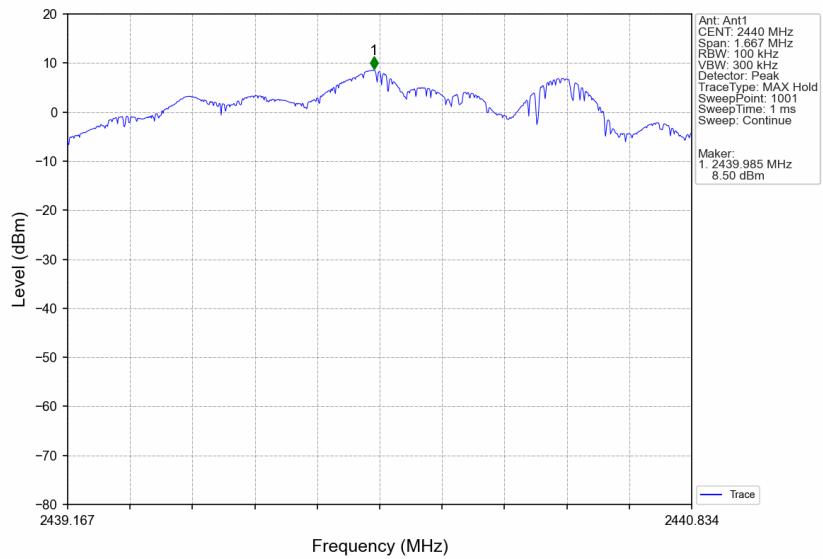



## 2M\_HCH\_2480MHz\_Ant1\_NTNV

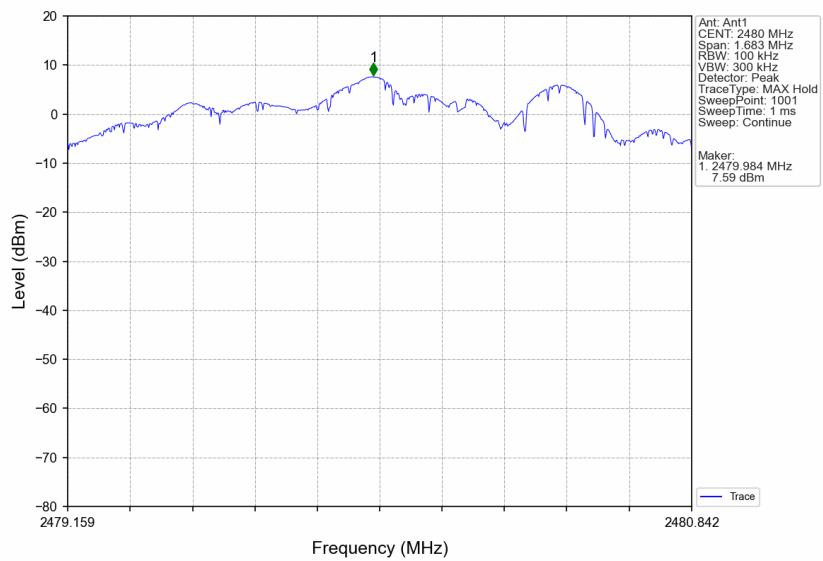



## 5.2.2 CSE

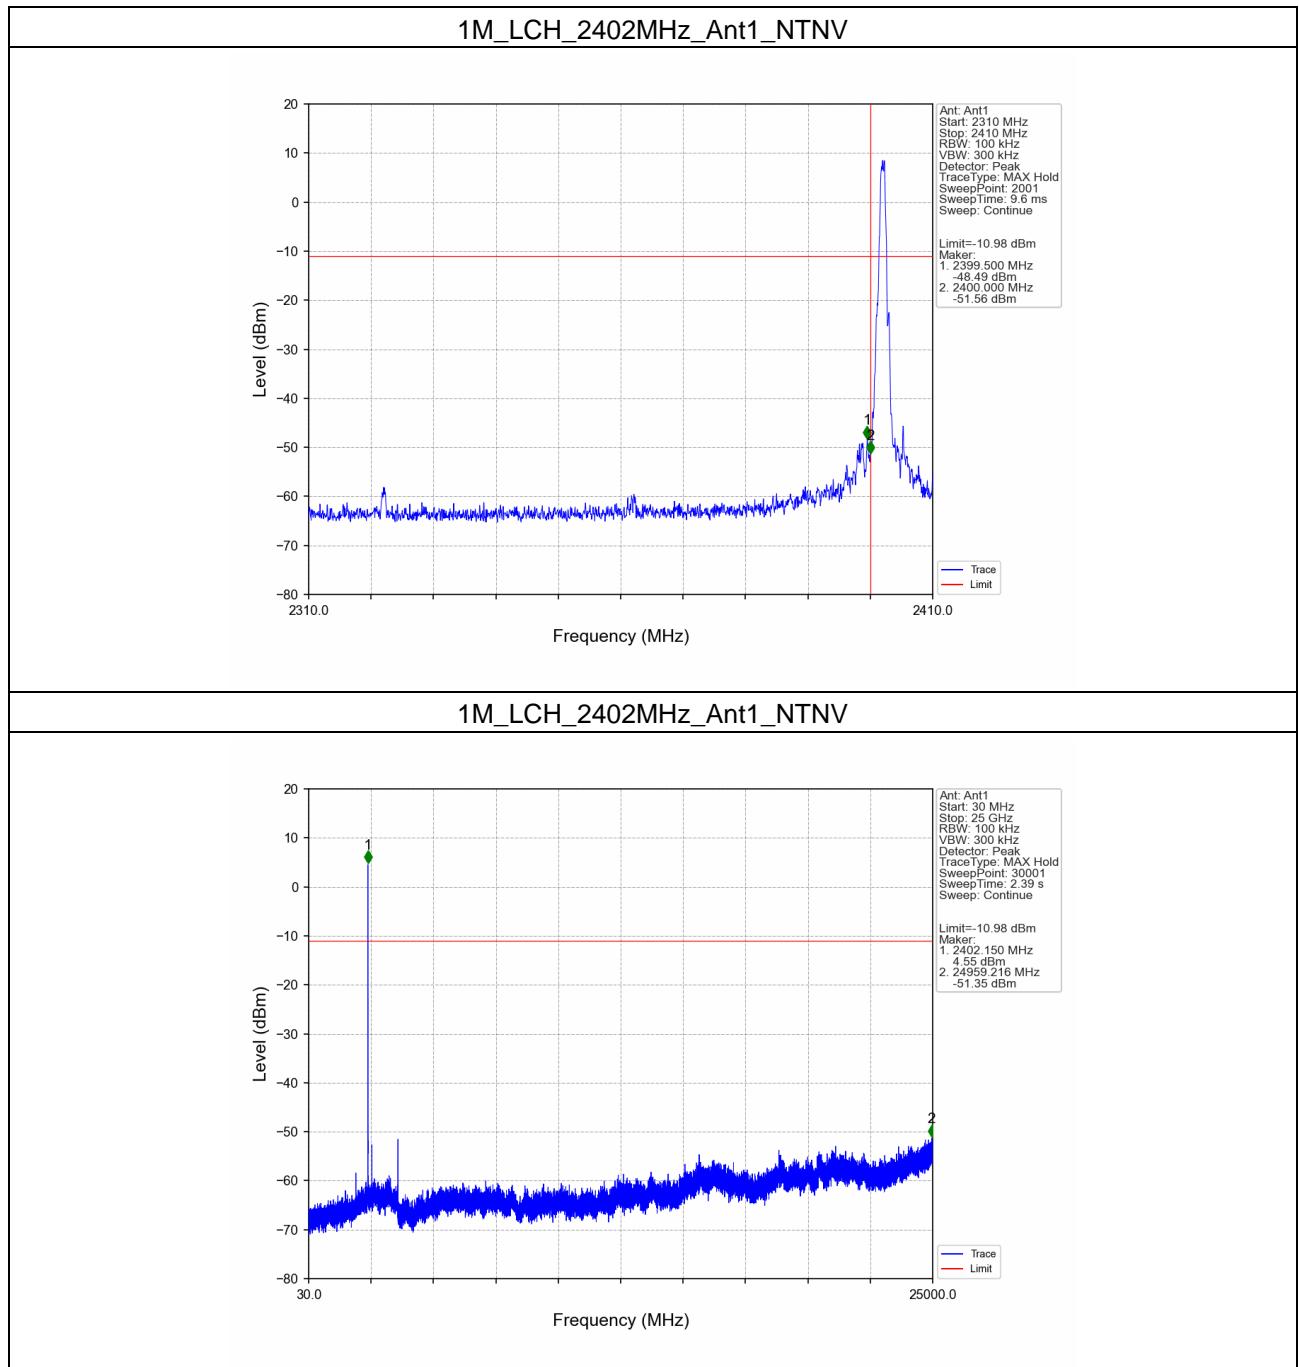

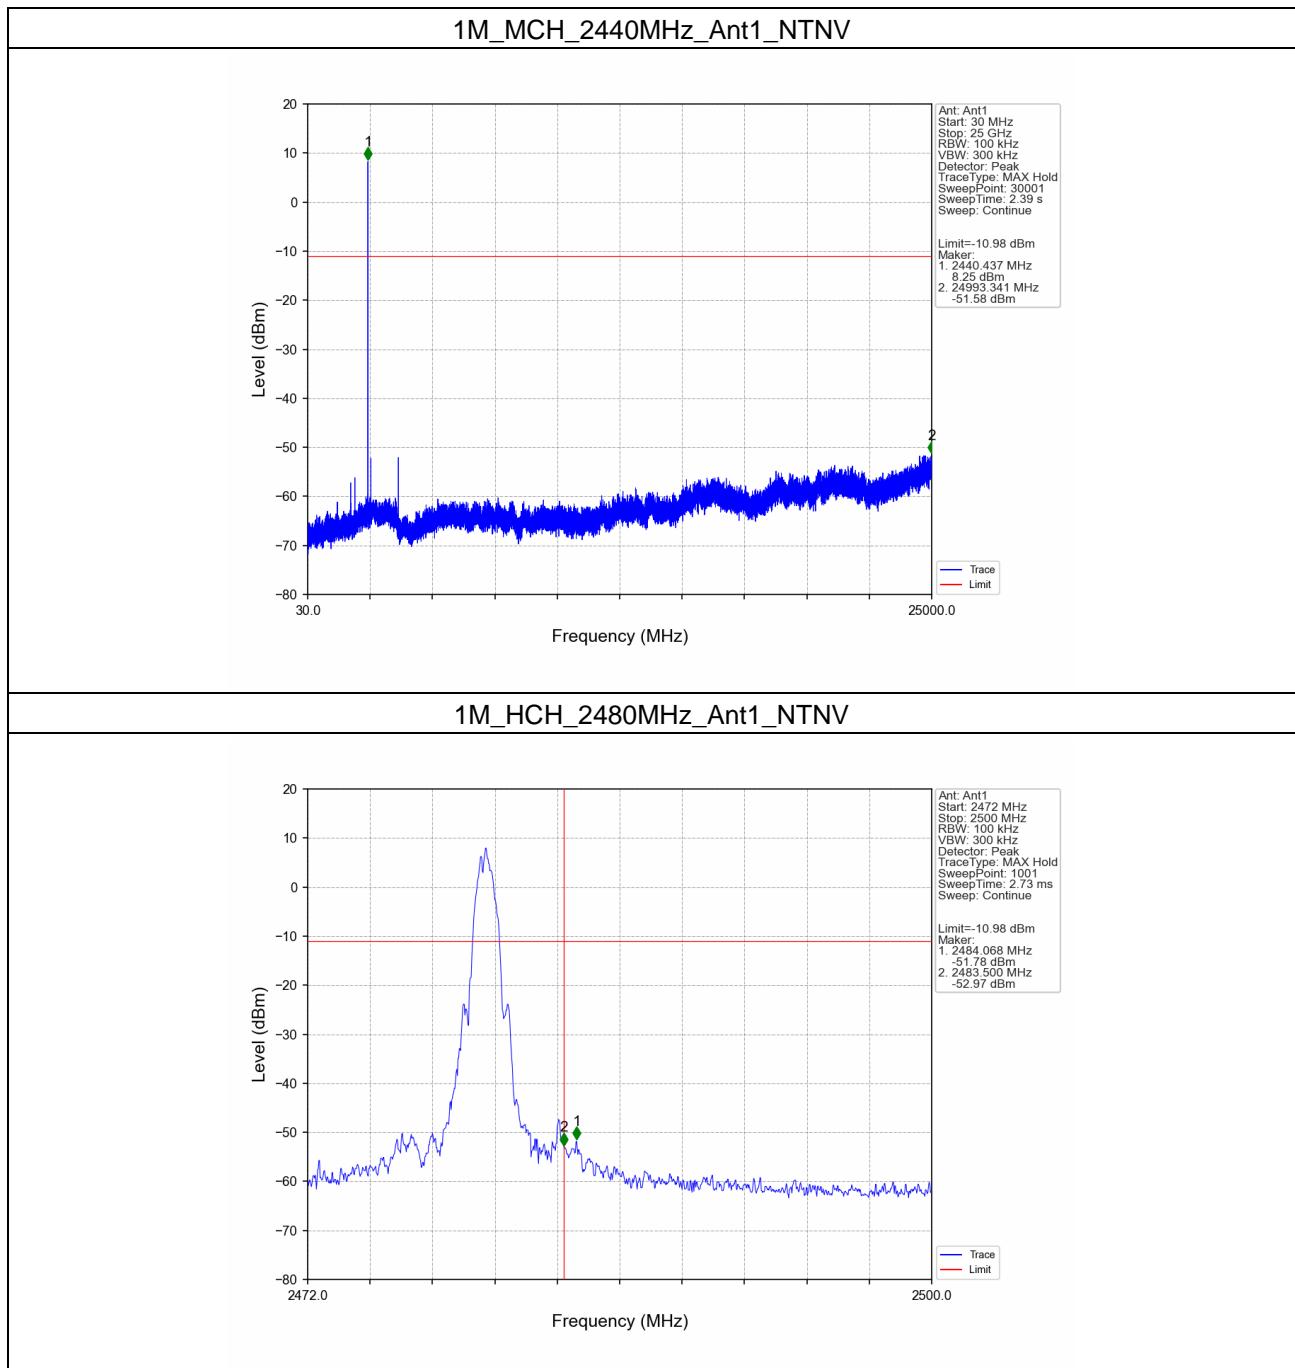

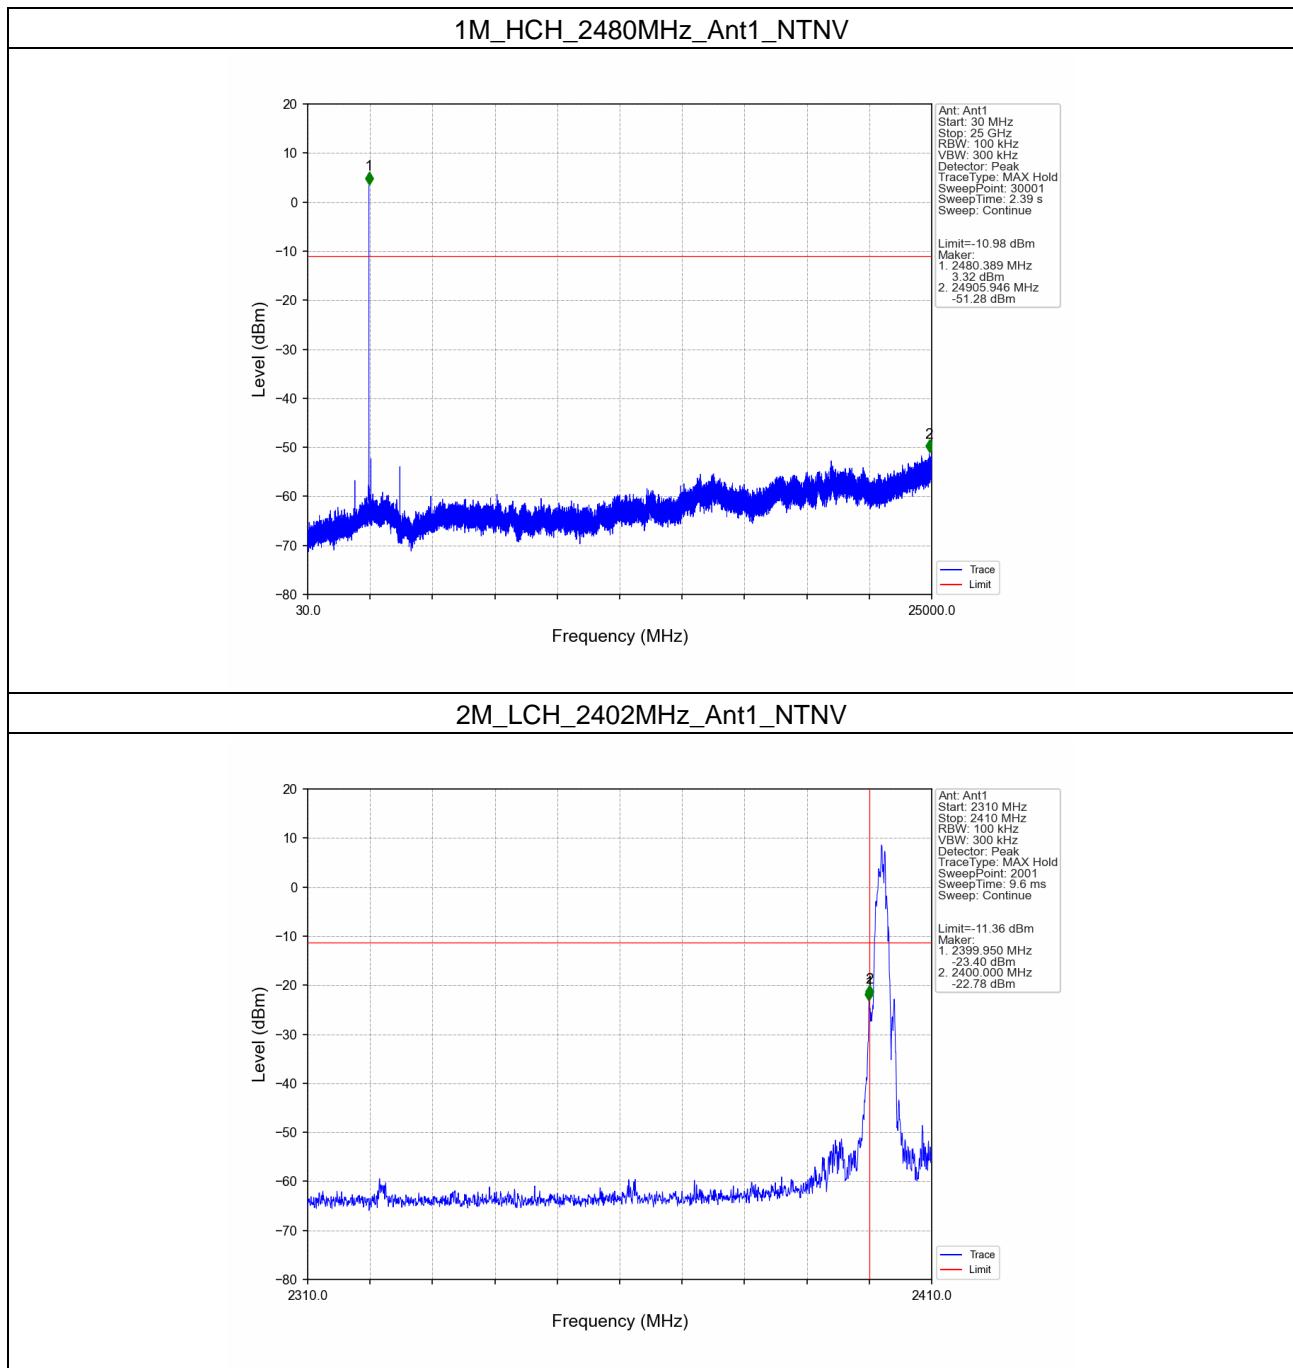

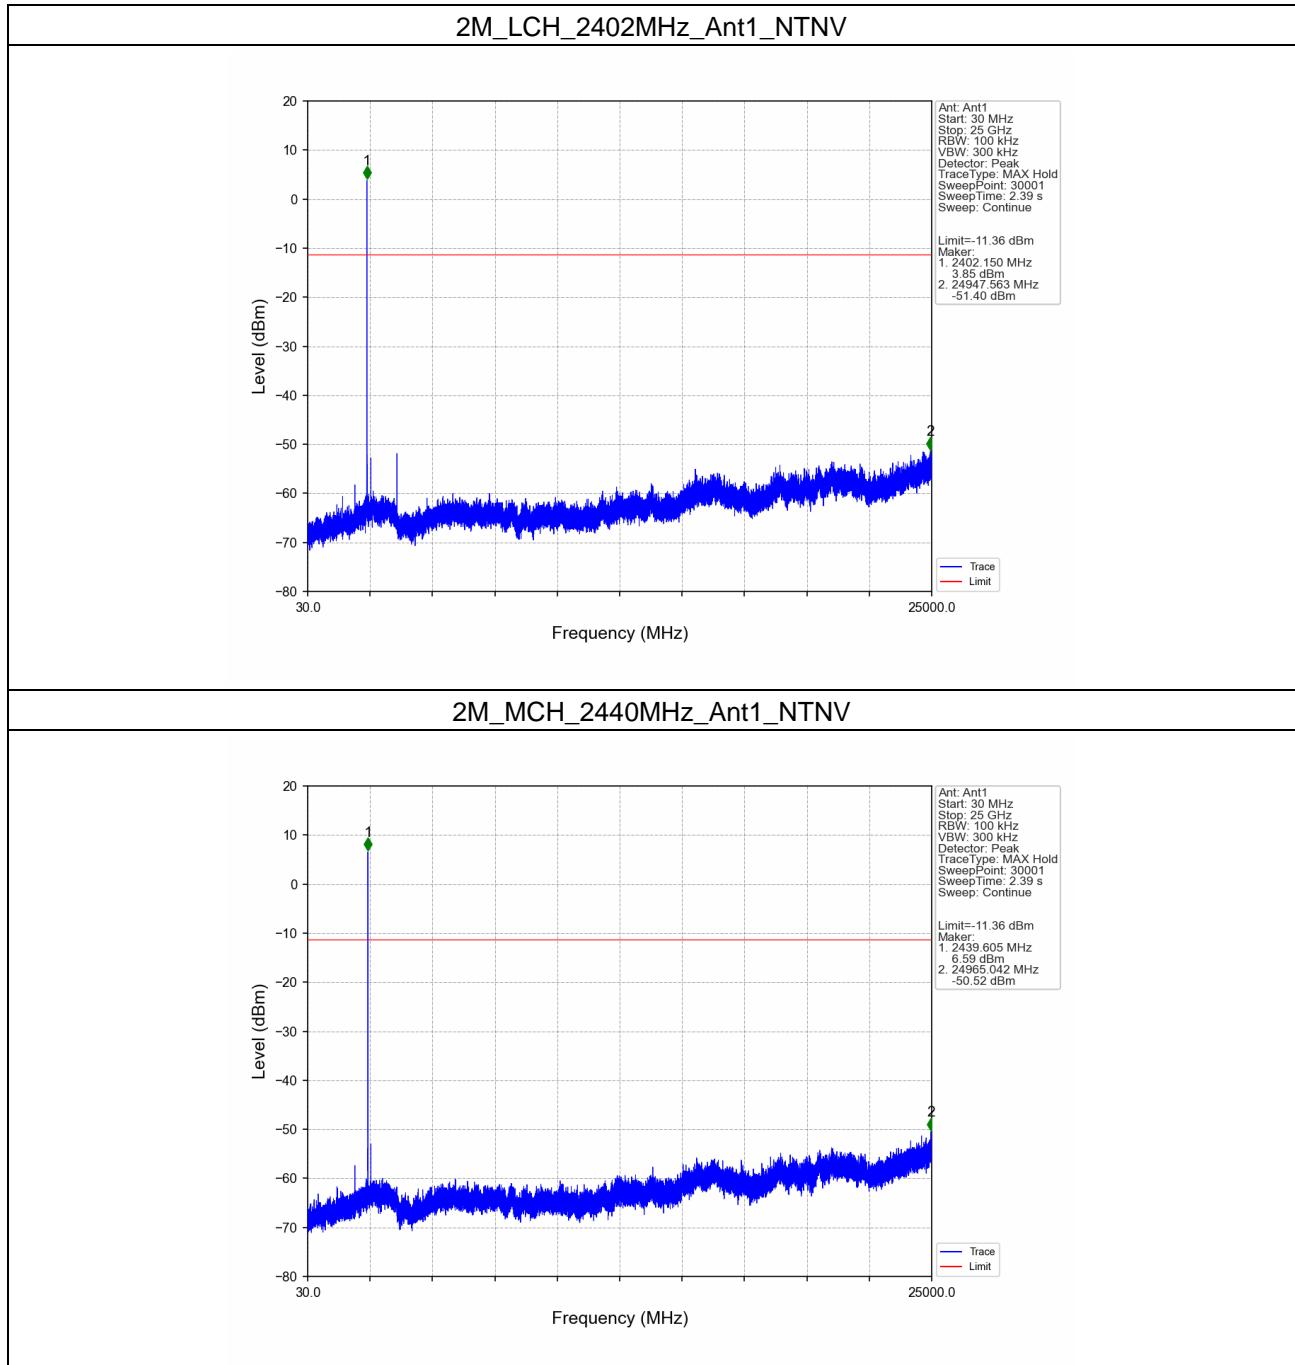

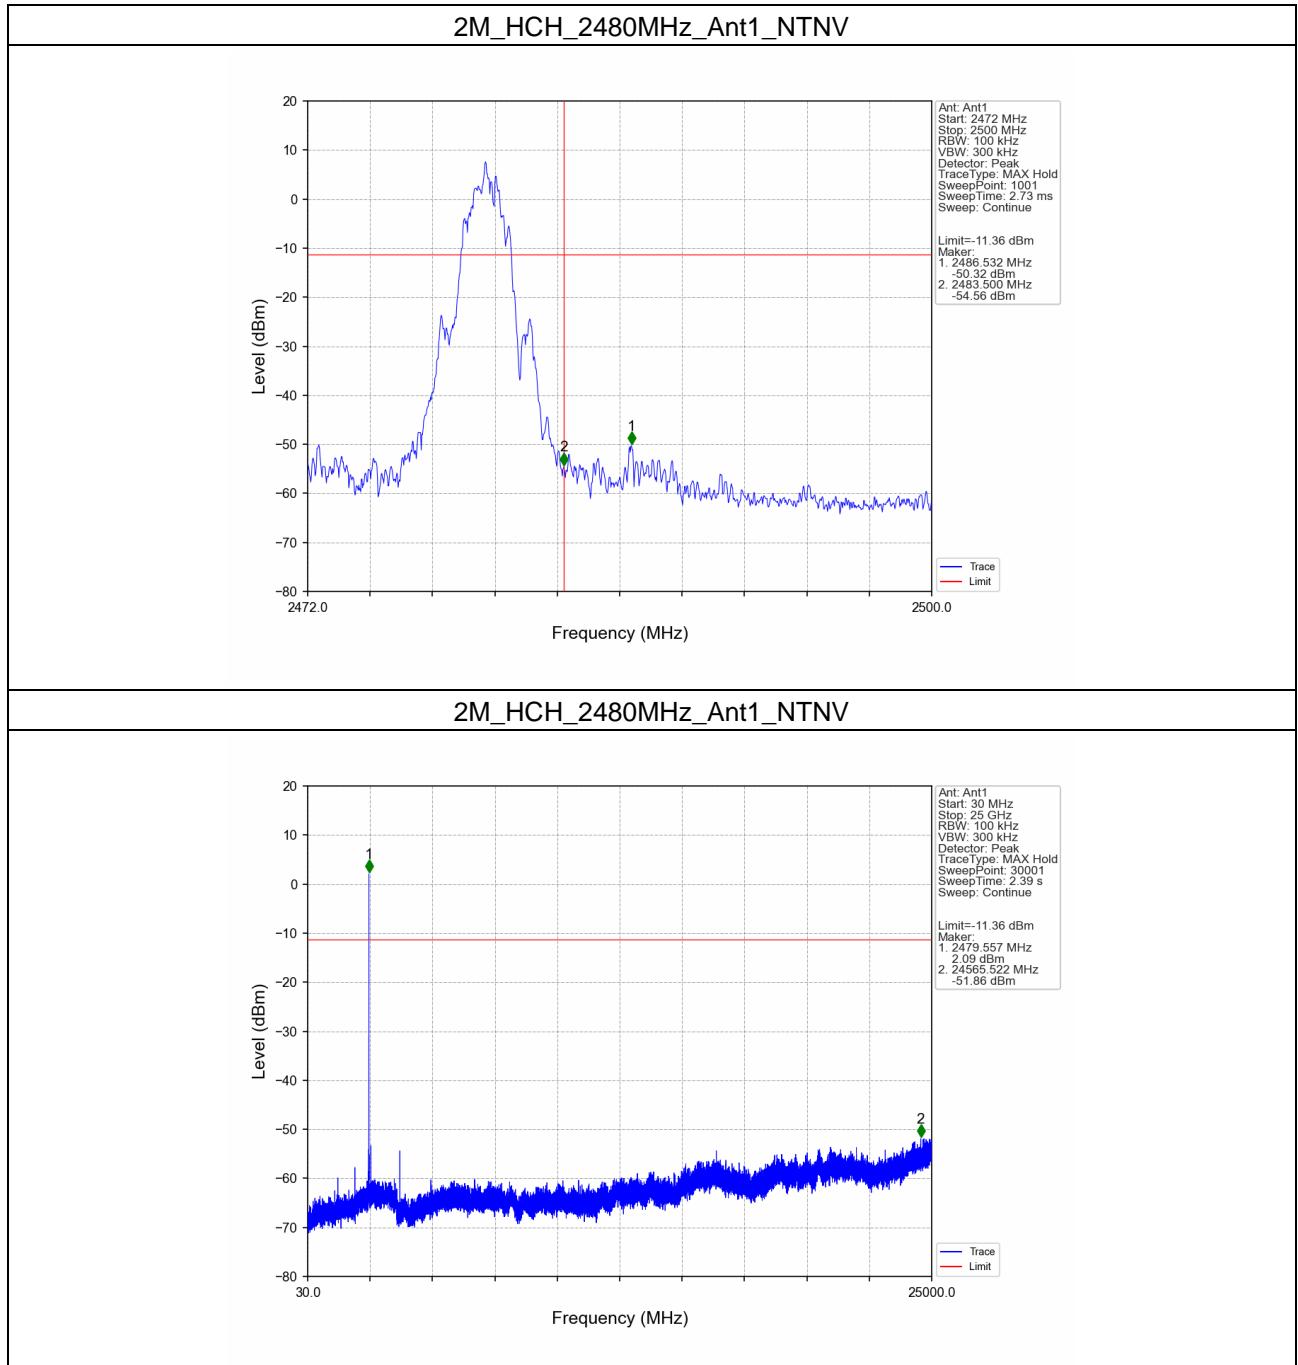

- End of the Report -