


# 911 help now plus

## INSTRUCTIONS

### ALARM OPERATION

- 1 **911 Call** - To place a 911 call, press and hold "+" button down for 5 seconds. The light above the "+" button will turn blue indicating the unit has been activated. Unit will verbally state "Calling 911" two times and then connect to emergency service provider.
- 2 **Battery Check** - To check batteries, press button on left side of unit. Unit will state "battery ok" or "please change battery" and light above "+" button will briefly turn on. Green light means batteries are good; red light means they need to be replaced.
- 2 **Cancel** - To cancel a call or to turn off flashlight, strobe, or alarm, press button on left side of unit and release. The blue light will turn off when the call is canceled.
- 3 **Flashlight/Alarm** - To operate flashlight or alarm, use the button located on the right side of the unit. To turn off flashlight or alarm, press "Cancel" button on left side of unit. Features will automatically shut off after 3 minutes.
  - Press button once to activate flashlight.
  - Press button twice to activate strobe light.
  - Hold button down for 3 seconds to activate recording "Somebody Help Me!". Strobe light will also turn on.

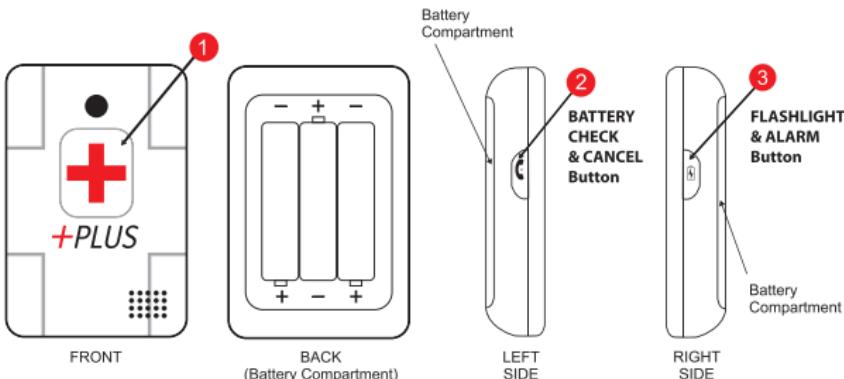

#### NOTE

- \* This device is designed to call 911 ONLY.
- \* It is recommended to check battery every 2 weeks. Front LED light will light red if batteries need to be replaced. Replace with AAA batteries.
- \* This unit does not provide location. Please let the operator know your exact location. Additionally, this unit does not allow for call backs and will appear as an unregistered device to the 911 operator.

**911 HELP NOW™**

## Specific Absorption Rate (SAR)

911 help now plus meets the government's requirements for exposure to radio waves.

Your device is a radio transmitter and receiver. It is designed and manufactured to not exceed limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission (FCC) of the U.S. Government and by the Canadian regulatory authorities. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed for the safety of all persons, regardless of age or health.

The exposure standard for 911 help now plus employs a unit of measure known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/Kg. Tests for SAR are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. This is because 911 Help Now Plus is designed to operate at multiple power levels so as to use only the power required to reach the network.

The device was test for typical body-worn operations or head face up operations . Please keep the product at least 25mm from the face.

In general, the closer you are to a wireless base station, the lower the power output.

Before 911 help now plus is available for sale to the public in the U.S. it must be tested and certified to the FCC that it does not exceed the limit establish for safe exposure. The tests are performed in positions and locations (e.g. at the ear and worn on the body) reported to the FCC. While there may be differences between the SAR levels of various devices and at various positions, they all meet the governmental requirements for safe exposure. Please note that improvements to this product model could cause differences in the SAR value for later products, in all cases, products are designed to be within the guidelines. Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications & Internet Association (CTIA)

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

MODE		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)
GSM 850	1g Face up SAR	0.16	1.6
	1g Body SAR	1.49	
PCS 1900	1g Face up SAR	0.05	1.6
	1g Body SAR	1.29	