


911 calling device

INSTRUCTIONS

PENDANT SETUP

- 1 Insert batteries (included) into battery compartment per diagram.
- 2 Press right side battery check button for 2 seconds. Front LED light will temporarily light green if batteries are ok. LED light will light red if batteries are low. If the LED light is not on, recheck the position of the batteries and repeat until green or red light is on.

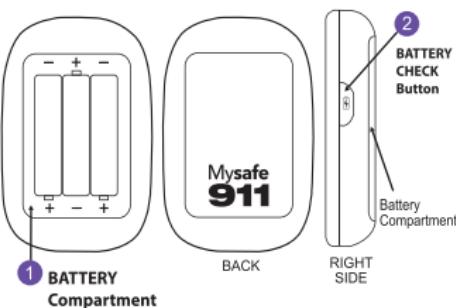


PENDANT OPERATION

- A To call 911, press and hold the call button for (front button with large + symbol) 5 seconds until you hear the device say CALLING 911 and the LED light will show blue. The device will connect to 911 operator.

If call fails to go through, you will hear DISCONNECTED, REDIAL and device will retry calling 911 until an operator can be reached.

- B To disconnect, press left side CANCEL button or wait for operator to hang up. Once disconnected blue LED light will turn off.

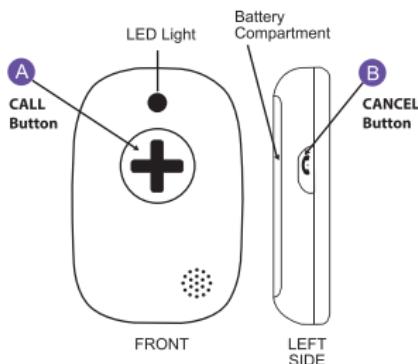

LED LIGHT INDICATORS

- Blue LED Light = Call in progress
- Green LED Light = Batteries good and device in standby mode for calling 911
- Red LED Light = Batteries low. Replace batteries.

Mysafe 911

NOTE

- * This device is designed to call 911 ONLY.
- * It is recommended to check battery every 2 weeks. Front LED light will light red if batteries need to be replaced. Replace with AAA batteries.
- * This unit does not provide location. Please let the operator know your exact location. Additionally, this unit does not allow for call backs and will appear as an unregistered device to the 911 operator.

Specific Absorption Rate (SAR) This device meets the government's requirements for exposure to radio waves.

Your device is a radio transmitter and receiver. It is designed and manufactured to not exceed limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission (FCC) of the U.S. Government and by the Canadian regulatory authorities. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed for the safety of all persons, regardless of age or health.

The exposure standard for this device employs a unit of measure known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/Kg. Tests for SAR are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. This is because this device is designed to operate at multiple power levels so as to use only the power required to reach the network.

The device was test for typical body-worn operations or head face up operations . Please keep the product at least 25mm from the face.

In general, the closer you are to a wireless base station, the lower the power output.

Before this device is available for sale to the public in the U.S. it must be tested and certified to the FCC that it does not exceed the limit establish for safe exposure. The tests are performed in positions and locations (e.g. at the ear and worn on the body) reported to the FCC. While there may be differences between the SAR levels of various devices and at various positions, they all meet the governmental requirements for safe exposure. Please note that improvements to this product model could cause differences in the SAR value for later products, in all cases, products are designed to be within the guidelines. Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications & Internet Association (CTIA)

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

MODE		Max. SAR Level(s) Reported(W/kg)
GSM 850	1g Body Fomt SAR	0.03
	1g Body SAR	1.01
PCS 1900	1g Body FornSAR	0.03
	1g Body SAR	0.68