



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No.: CTC20220957E02
FCC ID.....: 2AUKMMAXFLEXPRO
Applicant.....: Matco Tools
Address.....: 4403 Allen Rd. Stow, OH 44224 USA
Manufacturer.....: Matco Tools
Address.....: 4403 Allen Rd. Stow, OH 44224 USA
Product Name.....: Automotive Intelligent Diagnostic Tool
Trade Mark.....: 
Model/Type reference.....: MAXFLEXPRO
Listed Model(s): /
Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of receipt of test sample....: May. 12, 2022
Date of testing.....: May. 13, 2022 ~ May. 25 2022
Date of issue.....: May. 26 2022
Result.....: PASS

Compiled by:
(Printed name+signature) Terry Su 
Supervised by:
(Printed name+signature) Eric Zhang 
Approved by:
(Printed name+signature) Totti Zhao 

Testing Laboratory Name.....: CTC Laboratories, Inc.
Address.....: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park,
Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

	Page
1. TEST SUMMARY.....	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION	4
1.4. TEST FACILITY.....	5
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION.....	7
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. ACCESSORY EQUIPMENT INFORMATION.....	8
2.4. OPERATION STATE	9
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS.....	11
3.1. CONDUCTED EMISSION	11
3.2. RADIATED EMISSION.....	14
3.3. BAND EDGE EMISSIONS (RADIATED).....	36
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	49
3.5. 20DB BANDWIDTH.....	64
3.6. CHANNEL SEPARATION	68
3.7. NUMBER OF HOPPING CHANNEL	71
3.8. DWELL TIME	73
3.9. PEAK OUTPUT POWER.....	78
3.10. DUTY CYCLE.....	82
3.11. ANTENNA REQUIREMENT	86



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

RSS 247 Issue 2: Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSSs) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	May. 26 2022	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Alicia Liu
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Eva Feng
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Alicia Liu
Hopping Channel Separation	15.247(a)(1)	RSS 247 5.1 (b)	Pass	Alicia Liu
Dwell Time	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Alicia Liu
Peak Output Power	15.247(b)(1)	RSS 247 5.4 (b)	Pass	Alicia Liu
Number of Hopping Frequency	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Alicia Liu
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Radiated Spurious Emission	15.247(d)&15.209	RSS 247 5.5&RSS-Gen 8.9	Pass	Alicia Liu
20dB Bandwidth	15.247(a)	RSS 247 5.1 (b)	Pass	Alicia Liu

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.08 dB	(1)
Radiated Emissions 30~1000MHz	4.51 dB	(1)
Radiated Emissions 1~18GHz	5.84 dB	(1)
Radiated Emissions 18~40GHz	6.12 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~ 27°C
Relative Humidity:	40% ~ 60%
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Matco Tools
Address:	4403 Allen Rd. Stow, OH 44224 USA
Manufacturer:	Matco Tools
Address:	4403 Allen Rd. Stow, OH 44224 USA

2.2. General Description of EUT

Product Name:	Automotive Intelligent Diagnostic Tool
Trade Mark:	
Model/Type reference:	MAXFLEXPRO
Listed Model(s):	/
Power supply:	5Vdc/3A, 9Vdc/2.7A, 12Vdc/2A from AC/DC Adapter 3.8Vdc from 9360mAh Li-ion Battery
Adapter mode:	XDJ242U-QC3.0 Input: 100-240V~ 50/60Hz 0.5A Output: 5Vdc/3A, 9Vdc/2.7A, 12Vdc/2A
Hardware version:	BSK-Y17-V2
Software version:	V1.1.2
Bluetooth 5.0/EDR	
Modulation:	GFSK, π/4-DQPSK, 8-DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	FPC Antenna
Antenna gain:	3.13dBi Max



2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
/	/	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
/	/	/	/
Test Software Information			
Name	/	/	/
Engineering mode	/	/	/



2.4. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in grey were the channel selected for testing.

Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.5. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 23, 2022
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 15, 2023
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 23, 2022
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 23, 2022
5	Power Sensor	Agilent	U2021XA	MY5365004	Mar. 15, 2023
6	Power Sensor	Agilent	U2021XA	MY5365006	Mar. 15, 2023
7	High and low temperature box	ESPEC	MT3035	N/A	Mar. 15, 2023
8	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	102414	Dec. 23, 2022
9	300328 v2.2.2 test system	TONSCEND	v2.6	/	/

Radiated emission(3m chamber 3)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-759	Nov. 09, 2022
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 23, 2022
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 23, 2022
4	Broadband Premplifier	SCHWARZBECK	BBV9743B	259	Dec. 23, 2022
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 23, 2022
6	3m chamber 3	YIHENG	EE106	/	Sep. 09, 2023

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 23, 2022
2	LISN	R&S	ENV216	101113	Dec. 23, 2022
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 23, 2022

Note: 1. The Cal. Interval was one year.
 2. The Cal. Interval was three year of the chamber
 3. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS – Gen 8.8

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

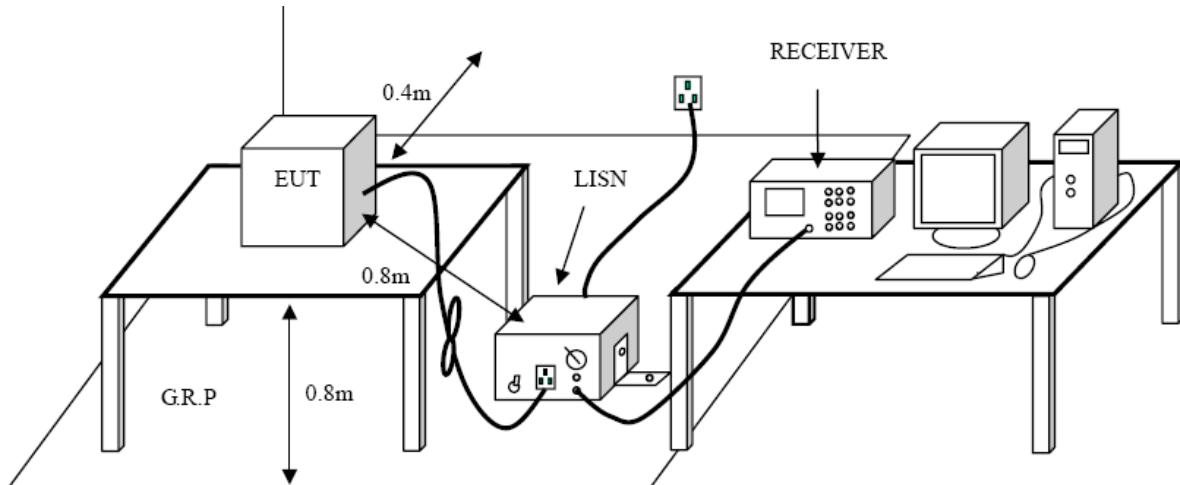


Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

Test Results

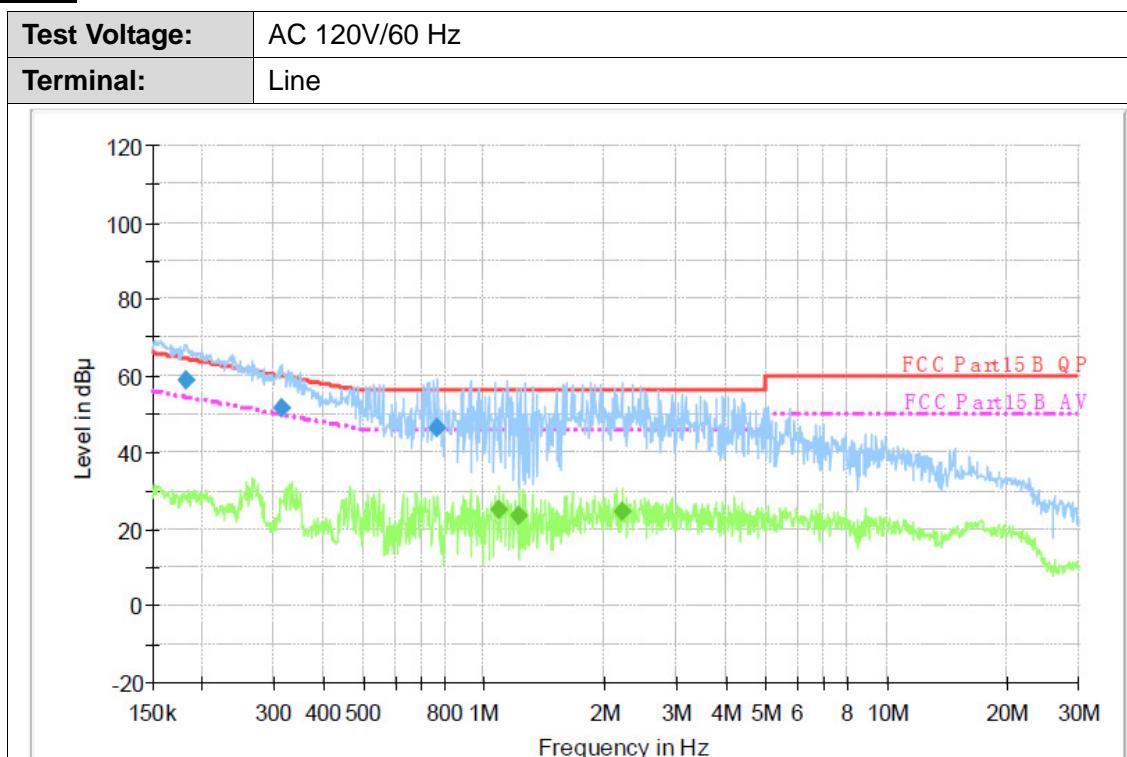


Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.181680	58.6	1000.00	9.000	On	L1	9.7	5.8	64.4	
0.313930	51.4	1000.00	9.000	On	L1	9.7	8.5	59.9	
0.767680	46.3	1000.00	9.000	On	L1	9.7	9.7	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
1.090800	25.0	1000.00	9.000	On	L1	9.7	21.0	46.0	
1.224690	23.6	1000.00	9.000	On	L1	9.7	22.4	46.0	
2.211130	24.7	1000.00	9.000	On	L1	9.7	21.3	46.0	

Emission Level= Read Level+ Correct Factor

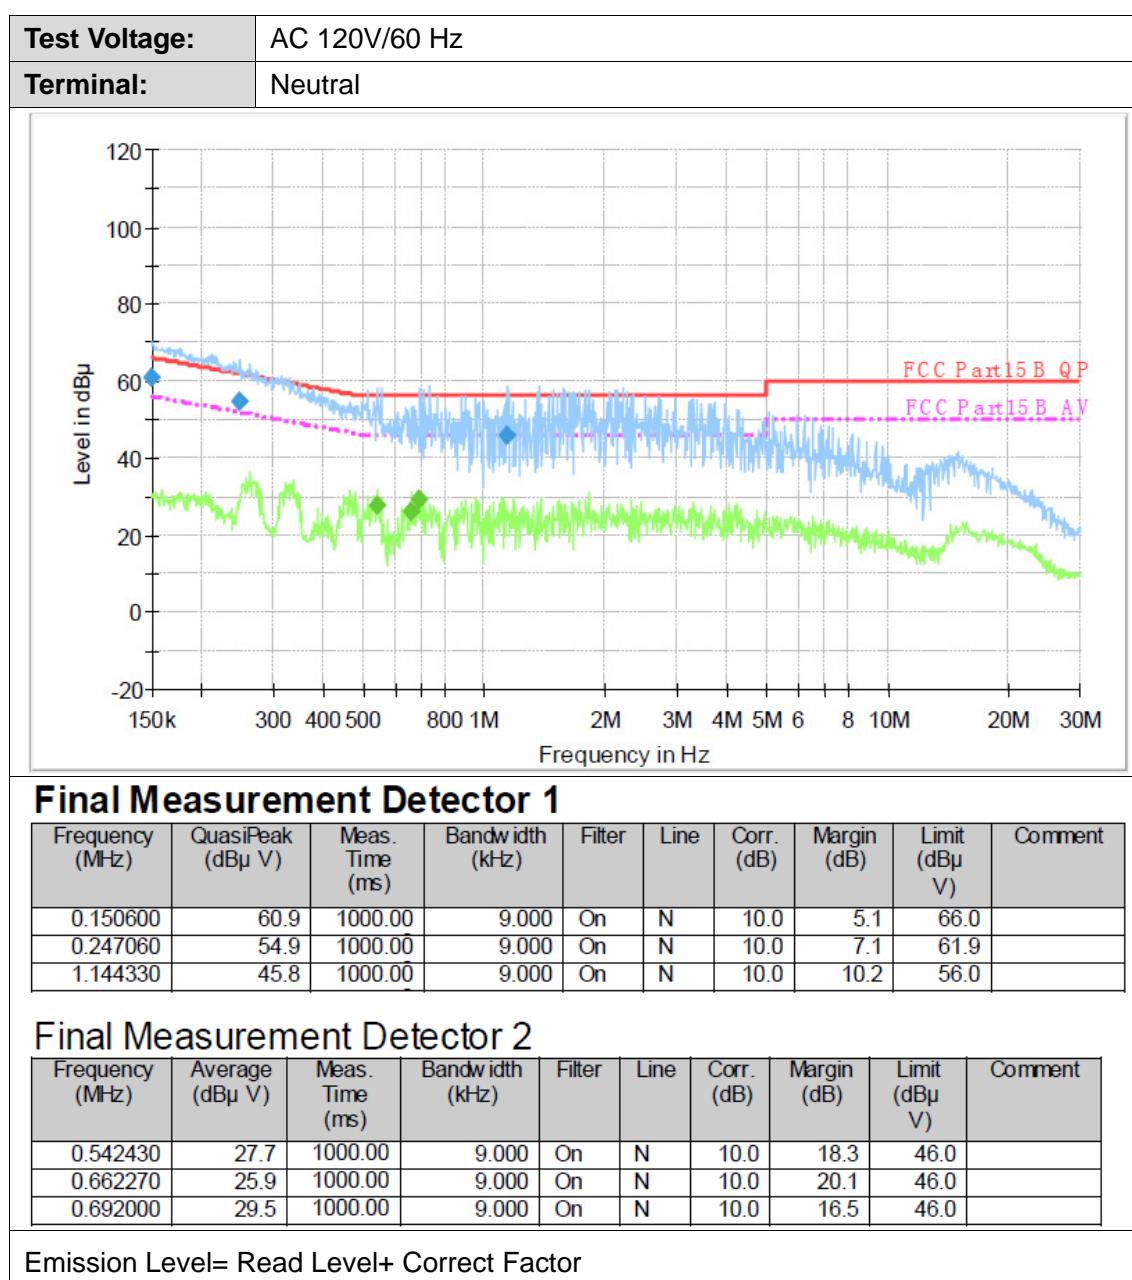

3.2. Radiated Emission

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9

Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

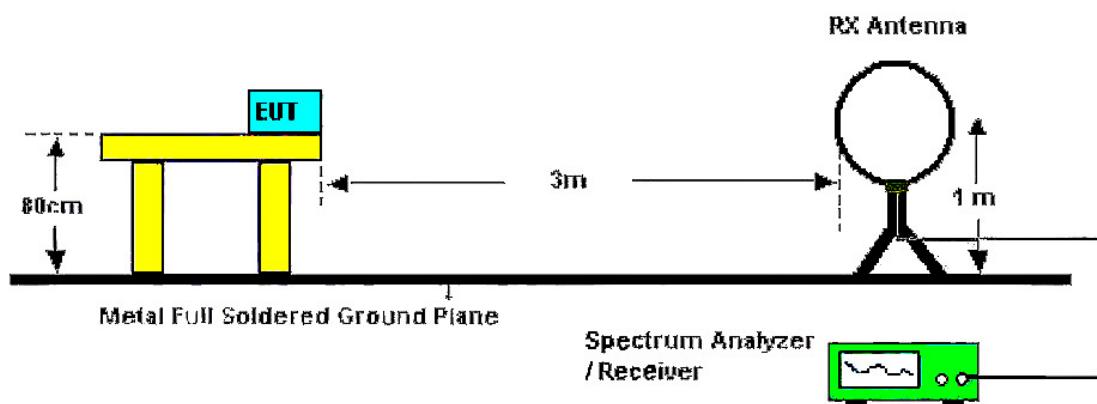

Below 30MHz Test Setup

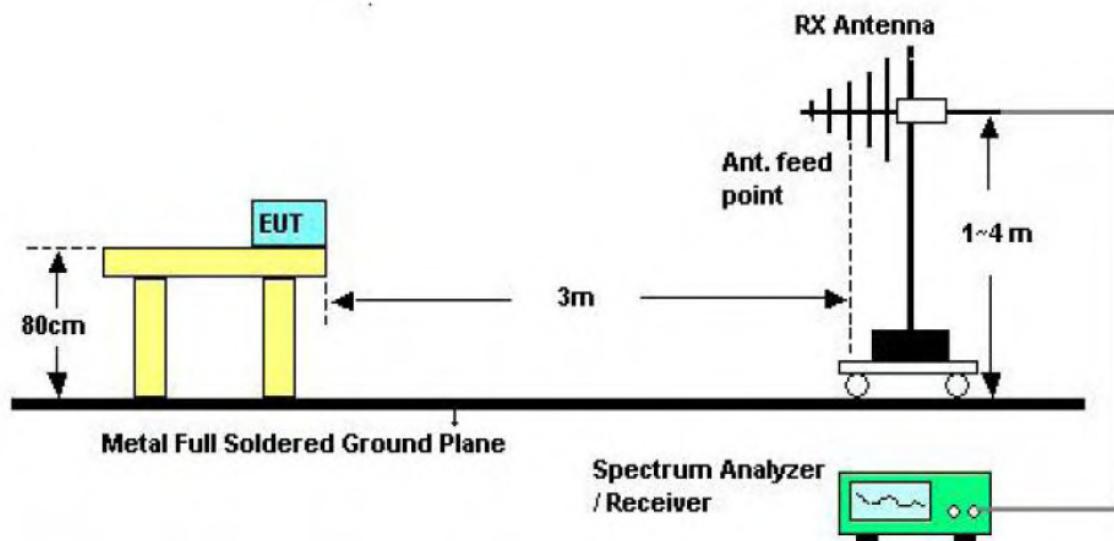

Below 1000MHz Test Setup

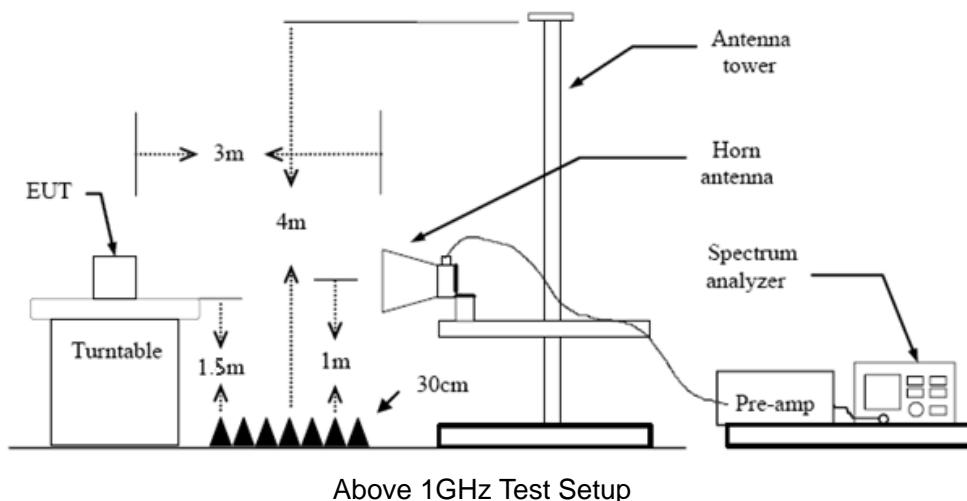

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW \geq 1/T Peak detector for Average value.

Note 1: For the 1/T& Duty Cycle please refer to clause 3.10 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result


9 KHz-30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




30MHz-1GHz

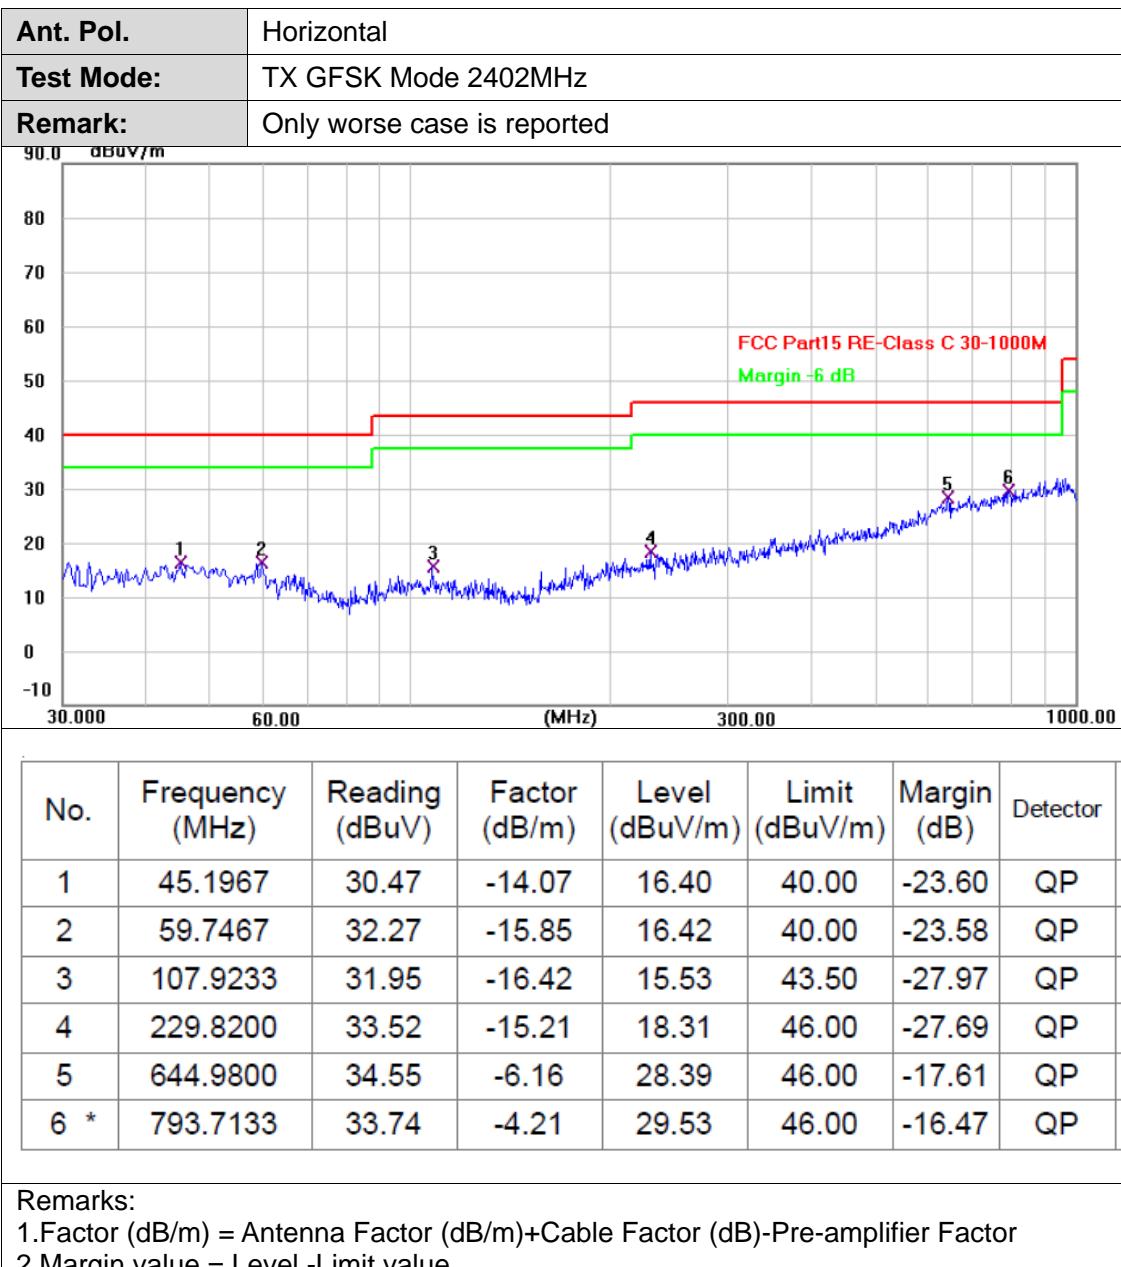


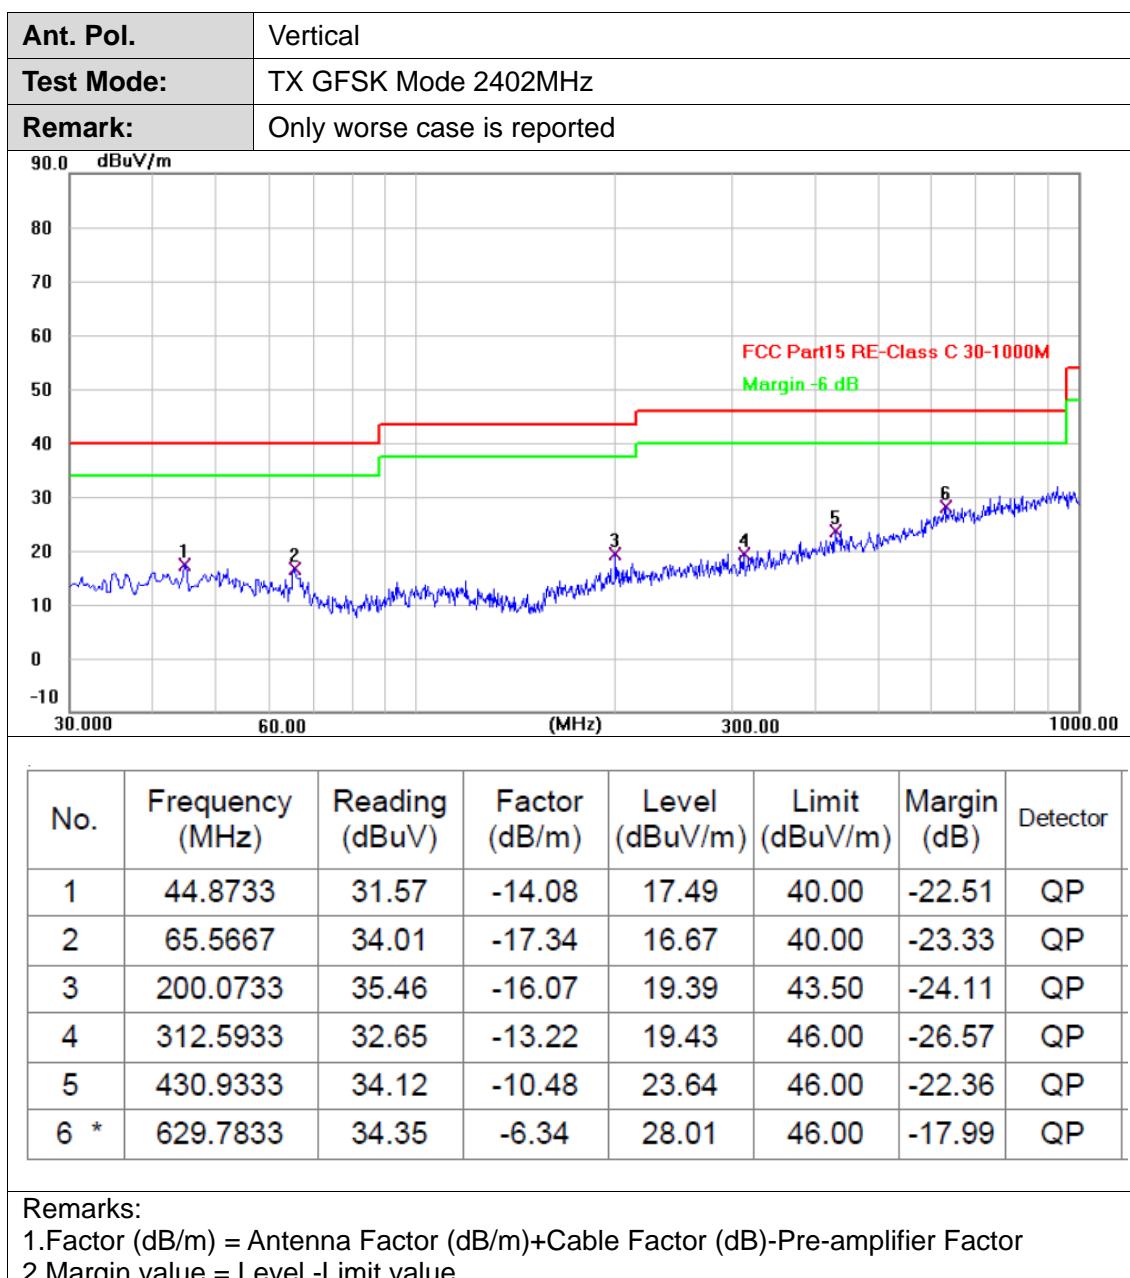




Above 1GHz

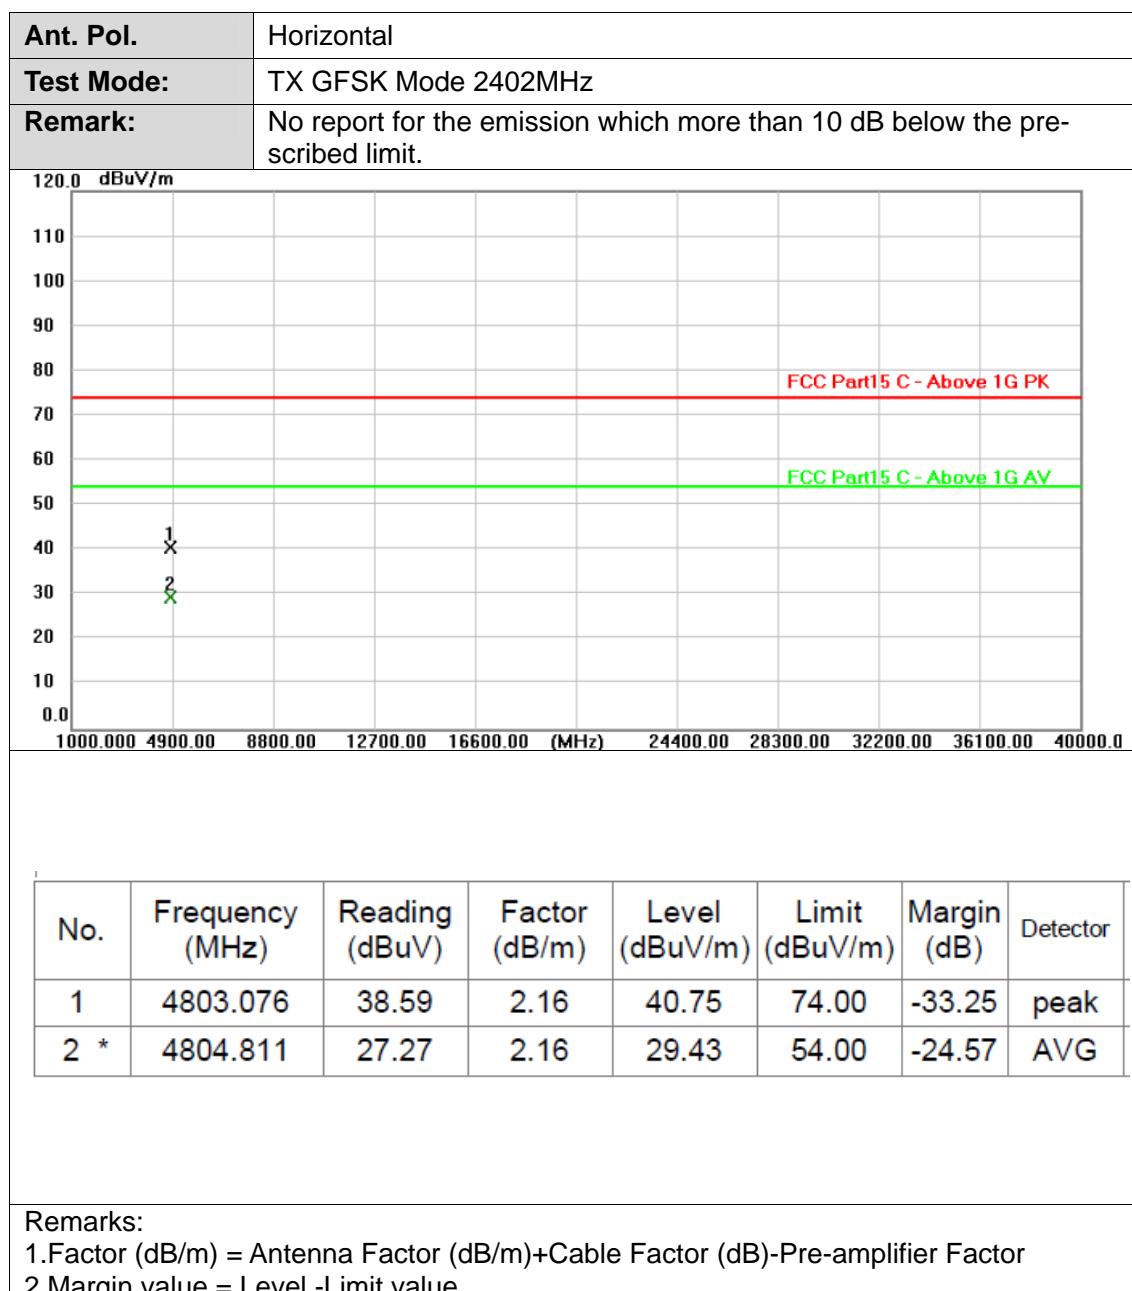

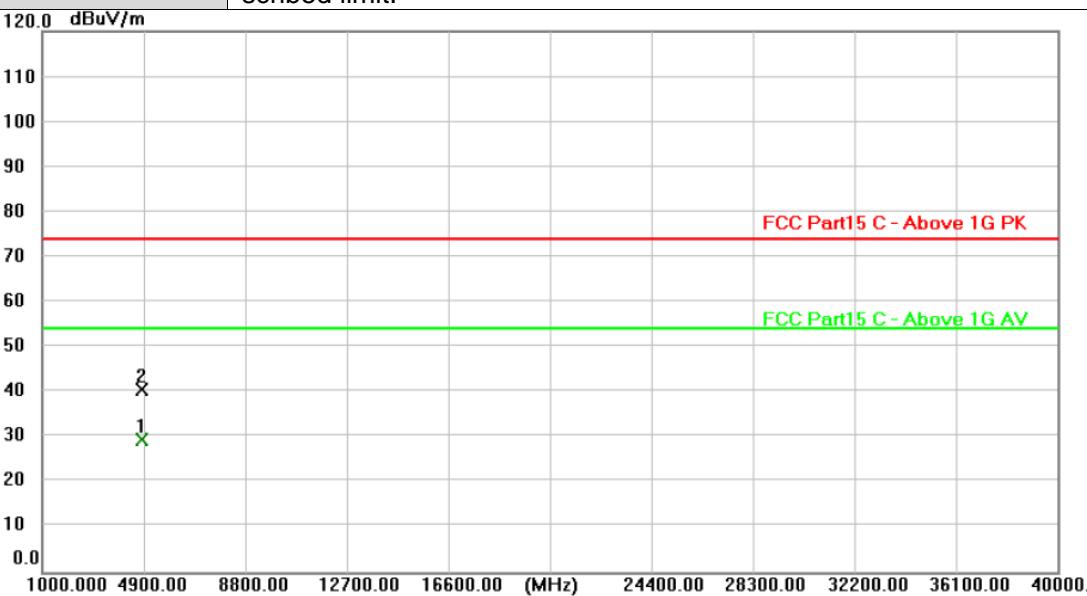Ant. Pol.	Vertical																															
Test Mode:	TX GFSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 <p>The plot shows a spectral emission mask for FCC Part 15 C. The Y-axis represents the level in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at 74 dBuV/m is labeled "FCC Part15 C - Above 1G PK". A green horizontal line at 54 dBuV/m is labeled "FCC Part15 C - Above 1G AV". Two data points are plotted: point 1 at 4804.121 MHz with a reading of 27.40 dBuV, and point 2 at 4804.920 MHz with a reading of 38.47 dBuV. The plot area has a grid with major lines every 10 dBuV and major ticks every 1000 MHz.</p>																																
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4804.121</td> <td>27.40</td> <td>2.16</td> <td>29.56</td> <td>54.00</td> <td>-24.44</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4804.920</td> <td>38.47</td> <td>2.16</td> <td>40.63</td> <td>74.00</td> <td>-33.37</td> <td>peak</td> </tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4804.121	27.40	2.16	29.56	54.00	-24.44	AVG	2	4804.920	38.47	2.16	40.63	74.00	-33.37	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4804.121	27.40	2.16	29.56	54.00	-24.44	AVG																									
2	4804.920	38.47	2.16	40.63	74.00	-33.37	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																															
Test Mode:	TX GFSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4881.203</td><td>27.05</td><td>2.31</td><td>29.36</td><td>54.00</td><td>-24.64</td><td>AVG</td></tr><tr><td>2</td><td>4881.347</td><td>38.93</td><td>2.31</td><td>41.24</td><td>74.00</td><td>-32.76</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.203	27.05	2.31	29.36	54.00	-24.64	AVG	2	4881.347	38.93	2.31	41.24	74.00	-32.76	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4881.203	27.05	2.31	29.36	54.00	-24.64	AVG																									
2	4881.347	38.93	2.31	41.24	74.00	-32.76	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

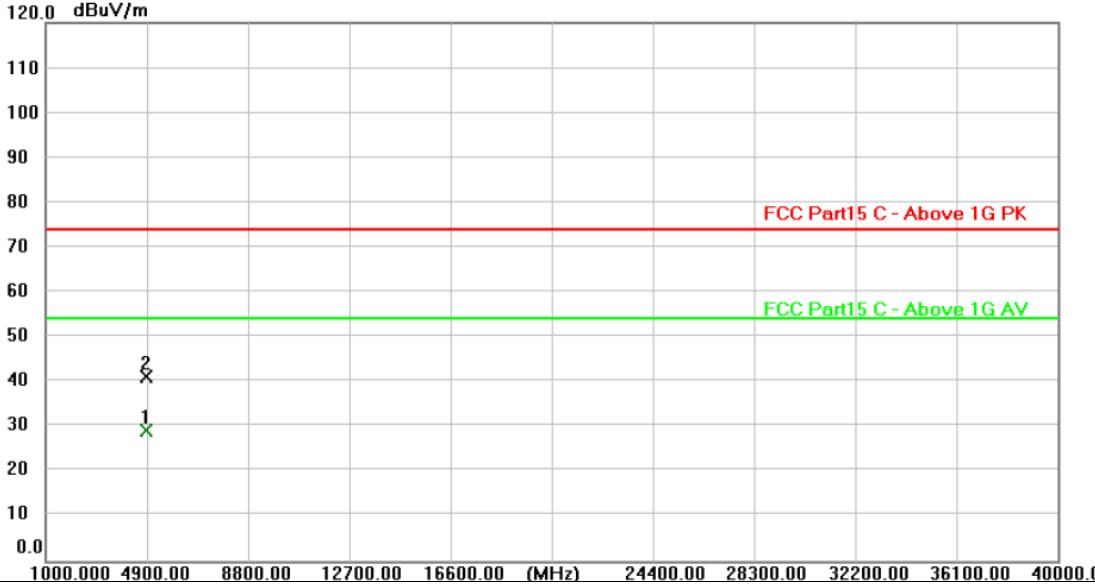
Ant. Pol.	Vertical																															
Test Mode:	TX GFSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 <p>The plot shows a spectral emission mask for FCC Part 15 C. The Y-axis represents the level in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at approximately 74 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at approximately 54 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at approximately 4881.601 MHz with a reading of 26.95 dBuV, and point 2 at approximately 4882.439 MHz with a reading of 38.92 dBuV. The plot area is a grid with major grid lines every 10 dBuV and major tick marks every 1000 MHz.</p>																																
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1 *</td><td>4881.601</td><td>26.95</td><td>2.31</td><td>29.26</td><td>54.00</td><td>-24.74</td><td>AVG</td></tr> <tr> <td>2</td><td>4882.439</td><td>38.92</td><td>2.31</td><td>41.23</td><td>74.00</td><td>-32.77</td><td>peak</td></tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.601	26.95	2.31	29.26	54.00	-24.74	AVG	2	4882.439	38.92	2.31	41.23	74.00	-32.77	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4881.601	26.95	2.31	29.26	54.00	-24.74	AVG																									
2	4882.439	38.92	2.31	41.23	74.00	-32.77	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																





Ant. Pol.	Horizontal																															
Test Mode:	TX GFSK Mode 2480MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4960.117</td><td>26.72</td><td>2.48</td><td>29.20</td><td>54.00</td><td>-24.80</td><td>AVG</td></tr><tr><td>2</td><td>4960.467</td><td>37.92</td><td>2.48</td><td>40.40</td><td>74.00</td><td>-33.60</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4960.117	26.72	2.48	29.20	54.00	-24.80	AVG	2	4960.467	37.92	2.48	40.40	74.00	-33.60	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4960.117	26.72	2.48	29.20	54.00	-24.80	AVG																									
2	4960.467	37.92	2.48	40.40	74.00	-33.60	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																





Ant. Pol.	Vertical																														
Test Mode:	TX GFSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4959.118</td><td>38.15</td><td>2.48</td><td>40.63</td><td>74.00</td><td>-33.37</td><td>peak</td></tr><tr><td>2 *</td><td>4960.007</td><td>26.75</td><td>2.48</td><td>29.23</td><td>54.00</td><td>-24.77</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.118	38.15	2.48	40.63	74.00	-33.37	peak	2 *	4960.007	26.75	2.48	29.23	54.00	-24.77	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.118	38.15	2.48	40.63	74.00	-33.37	peak																								
2 *	4960.007	26.75	2.48	29.23	54.00	-24.77	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

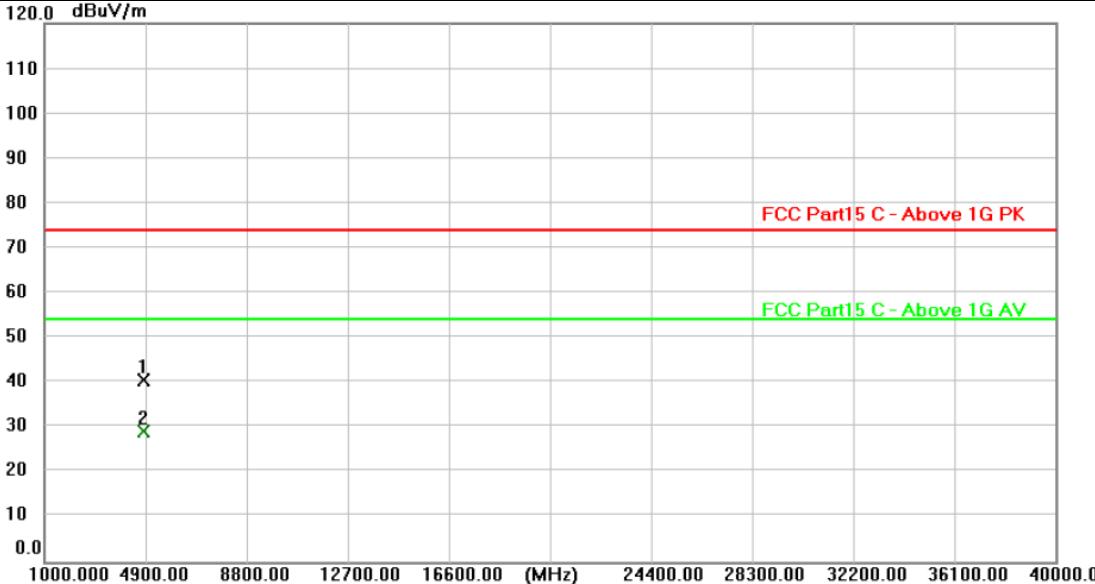
Ant. Pol.	Horizontal																															
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 <p>The plot shows a spectral emission mask for FCC Part 15 C. The Y-axis represents the level in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at 74.00 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at 54.00 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at approximately 4804.361 MHz with a reading of 38.38 dBuV, and point 2 at approximately 4804.603 MHz with a reading of 27.16 dBuV. The reading for point 1 is above the FCC Part 15 C mask limits, while the reading for point 2 is below the mask limits.</p>																																
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.361</td> <td>38.38</td> <td>2.16</td> <td>40.54</td> <td>74.00</td> <td>-33.46</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4804.603</td> <td>27.16</td> <td>2.16</td> <td>29.32</td> <td>54.00</td> <td>-24.68</td> <td>AVG</td> </tr> </tbody> </table> <p>Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor 2. Margin value = Level - Limit value </p>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4804.361	38.38	2.16	40.54	74.00	-33.46	peak	2 *	4804.603	27.16	2.16	29.32	54.00	-24.68	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4804.361	38.38	2.16	40.54	74.00	-33.46	peak																									
2 *	4804.603	27.16	2.16	29.32	54.00	-24.68	AVG																									

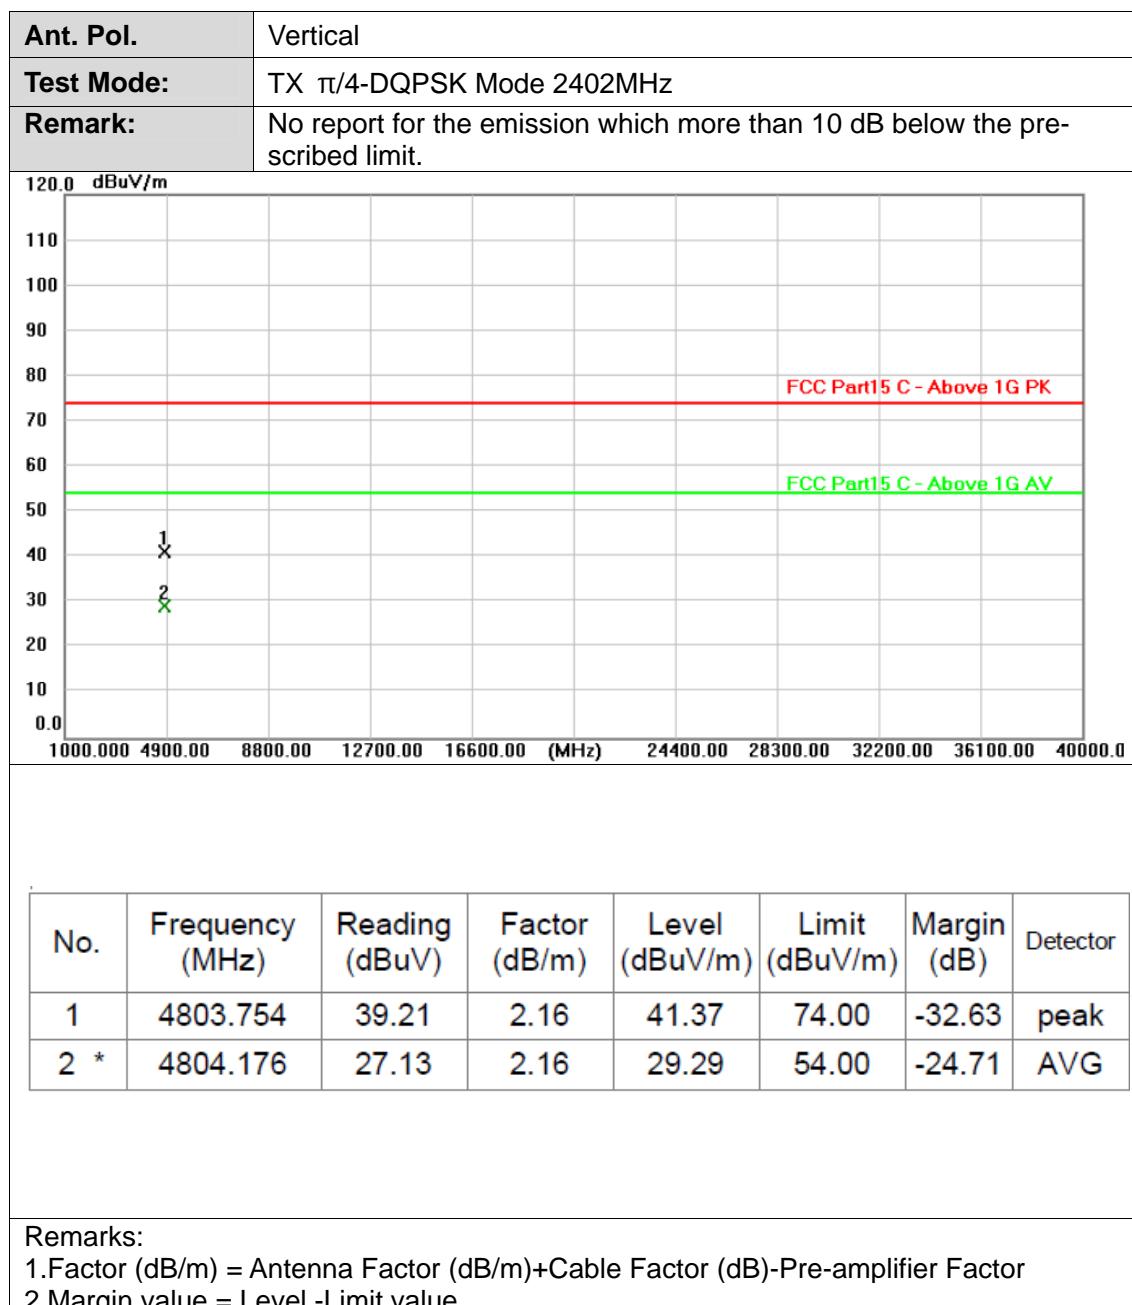


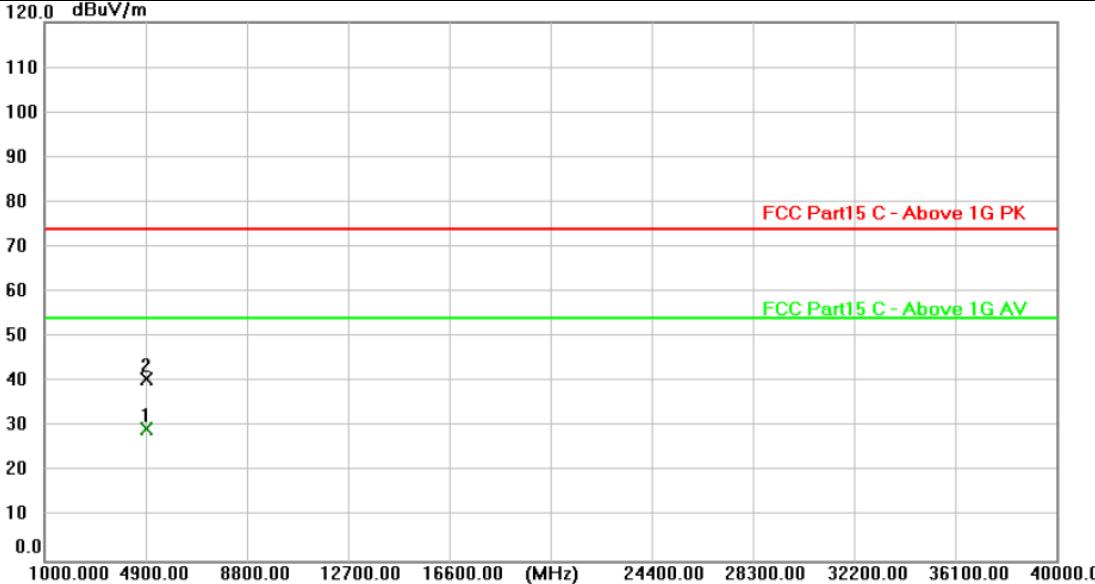
Ant. Pol.	Horizontal																														
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <p>The plot shows a spectral emission mask for FCC Part 15 C. The Y-axis represents the field strength in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at approximately 74 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at approximately 54 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at approximately 4881.671 MHz with a reading of 27.10 dBuV, and point 2 at approximately 4882.123 MHz with a reading of 38.49 dBuV. The plot area has a grid with major lines every 10 dBuV and major ticks every 1000 MHz.</p>																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4881.671</td> <td>27.10</td> <td>2.31</td> <td>29.41</td> <td>54.00</td> <td>-24.59</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4882.123</td> <td>38.49</td> <td>2.31</td> <td>40.80</td> <td>74.00</td> <td>-33.20</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.671	27.10	2.31	29.41	54.00	-24.59	AVG	2	4882.123	38.49	2.31	40.80	74.00	-33.20	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4881.671	27.10	2.31	29.41	54.00	-24.59	AVG																								
2	4882.123	38.49	2.31	40.80	74.00	-33.20	peak																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																															

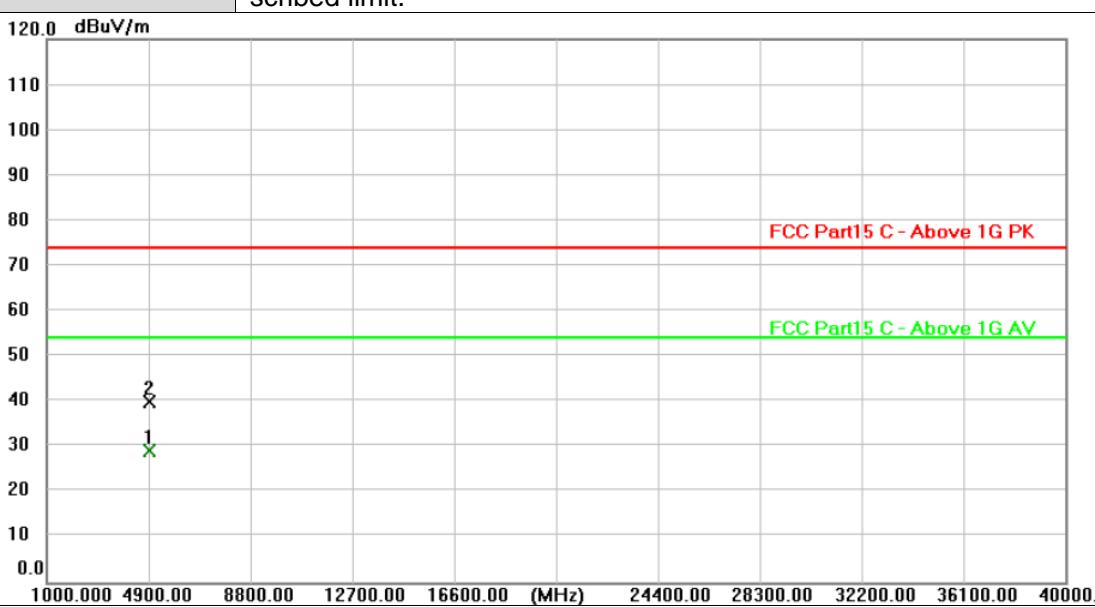
Ant. Pol.	Vertical																															
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
																																
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1 *</td><td>4881.023</td><td>26.92</td><td>2.31</td><td>29.23</td><td>54.00</td><td>-24.77</td><td>AVG</td></tr> <tr> <td>2</td><td>4881.963</td><td>37.72</td><td>2.31</td><td>40.03</td><td>74.00</td><td>-33.97</td><td>peak</td></tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.023	26.92	2.31	29.23	54.00	-24.77	AVG	2	4881.963	37.72	2.31	40.03	74.00	-33.97	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4881.023	26.92	2.31	29.23	54.00	-24.77	AVG																									
2	4881.963	37.72	2.31	40.03	74.00	-33.97	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

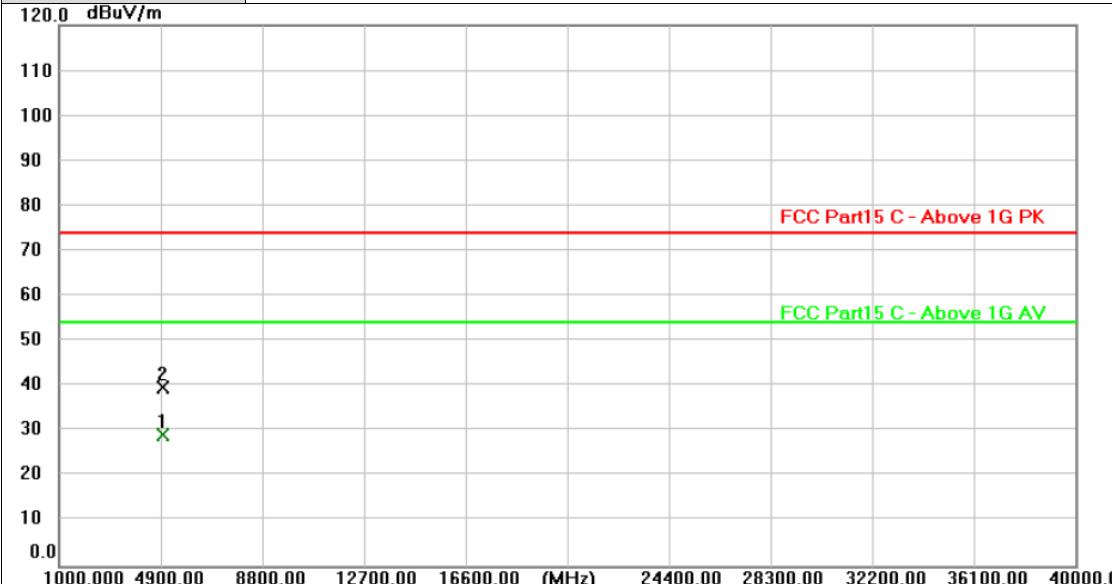
Ant. Pol.	Horizontal																														
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <p>The plot shows a spectral emission mask for FCC Part 15 C. The Y-axis represents the level in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at approximately 74 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at approximately 54 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at 4959.624 MHz with a reading of 26.90 dBuV, and point 2 at 4959.776 MHz with a reading of 37.42 dBuV. Both points are below the FCC mask lines.</p>																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4959.624</td> <td>26.90</td> <td>2.48</td> <td>29.38</td> <td>54.00</td> <td>-24.62</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4959.776</td> <td>37.42</td> <td>2.48</td> <td>39.90</td> <td>74.00</td> <td>-34.10</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4959.624	26.90	2.48	29.38	54.00	-24.62	AVG	2	4959.776	37.42	2.48	39.90	74.00	-34.10	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4959.624	26.90	2.48	29.38	54.00	-24.62	AVG																								
2	4959.776	37.42	2.48	39.90	74.00	-34.10	peak																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

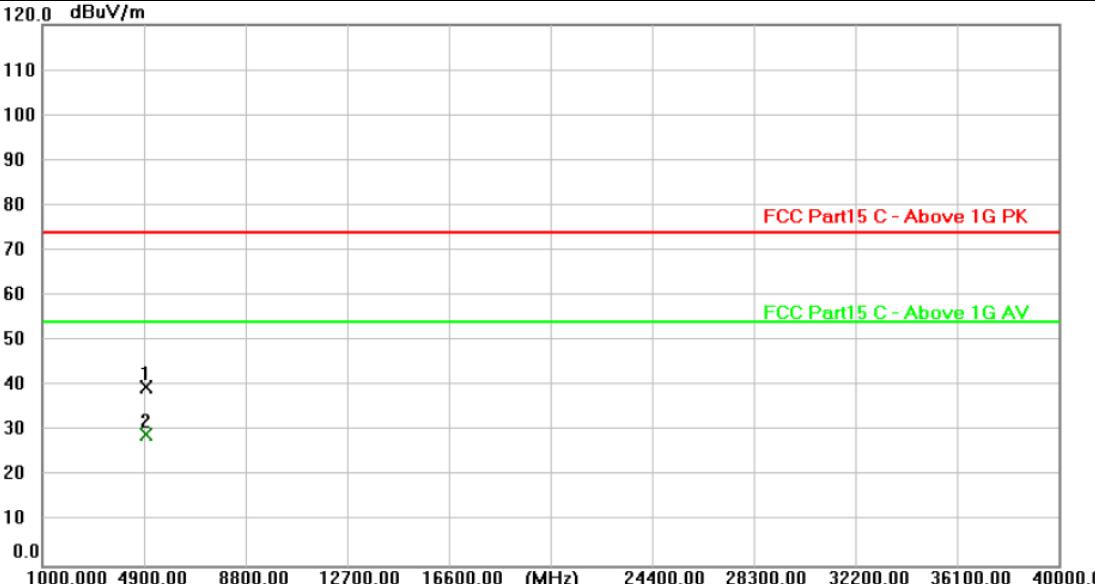
Ant. Pol.	Vertical																														
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <p>The plot shows a spectral emission mask for FCC Part 15 C. The Y-axis represents the level in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at 74.00 dBuV/m is labeled "FCC Part15 C - Above 1G PK". A green horizontal line at 54.00 dBuV/m is labeled "FCC Part15 C - Above 1G AV". Two data points are plotted: point 1 at approximately 4959.084 MHz with a reading of 37.29 dBuV, and point 2 at approximately 4960.366 MHz with a reading of 26.81 dBuV. The reading for point 1 is above the FCC Part 15 C mask, while the reading for point 2 is below it. </p>																															
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>4959.084</td><td>37.29</td><td>2.48</td><td>39.77</td><td>74.00</td><td>-34.23</td><td>peak</td></tr> <tr> <td>2 *</td><td>4960.366</td><td>26.81</td><td>2.48</td><td>29.29</td><td>54.00</td><td>-24.71</td><td>AVG</td></tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.084	37.29	2.48	39.77	74.00	-34.23	peak	2 *	4960.366	26.81	2.48	29.29	54.00	-24.71	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.084	37.29	2.48	39.77	74.00	-34.23	peak																								
2 *	4960.366	26.81	2.48	29.29	54.00	-24.71	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																															

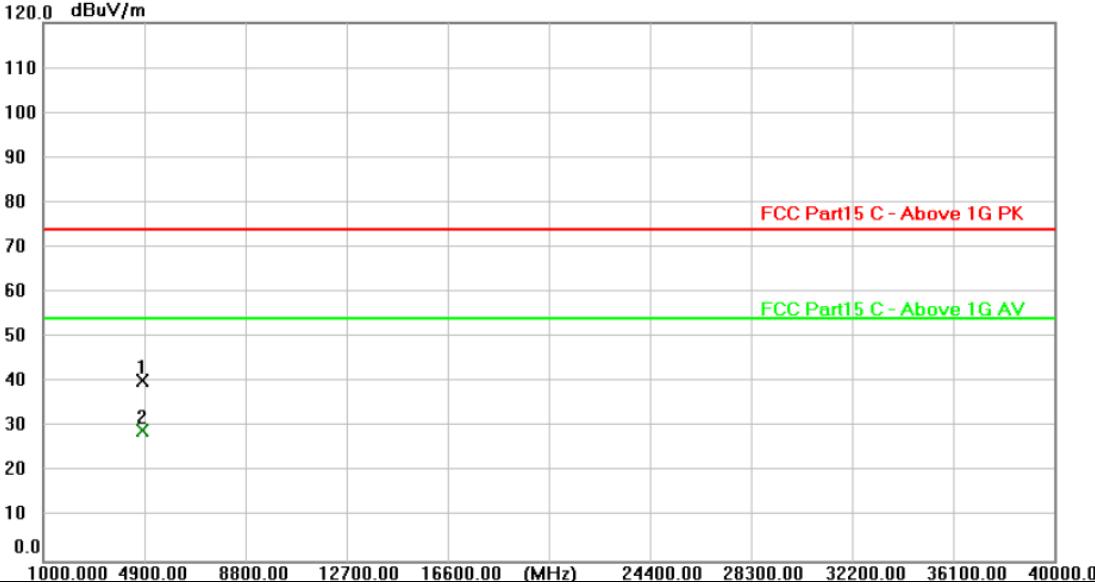
Ant. Pol.	Horizontal																															
Test Mode:	TX 8-DPSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 <p>The plot shows a spectral emission mask for the 2402MHz band. The Y-axis represents the signal level in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at 74.00 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at 54.00 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at 4803.229 MHz with a reading of 38.15 dBuV, and point 2 at 4804.522 MHz with a reading of 27.21 dBuV. The plot area has a grid with major lines every 10 dB and minor lines every 1 dB.</p>																																
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>4803.229</td><td>38.15</td><td>2.16</td><td>40.31</td><td>74.00</td><td>-33.69</td><td>peak</td></tr> <tr> <td>2 *</td><td>4804.522</td><td>27.21</td><td>2.16</td><td>29.37</td><td>54.00</td><td>-24.63</td><td>AVG</td></tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4803.229	38.15	2.16	40.31	74.00	-33.69	peak	2 *	4804.522	27.21	2.16	29.37	54.00	-24.63	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4803.229	38.15	2.16	40.31	74.00	-33.69	peak																									
2 *	4804.522	27.21	2.16	29.37	54.00	-24.63	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

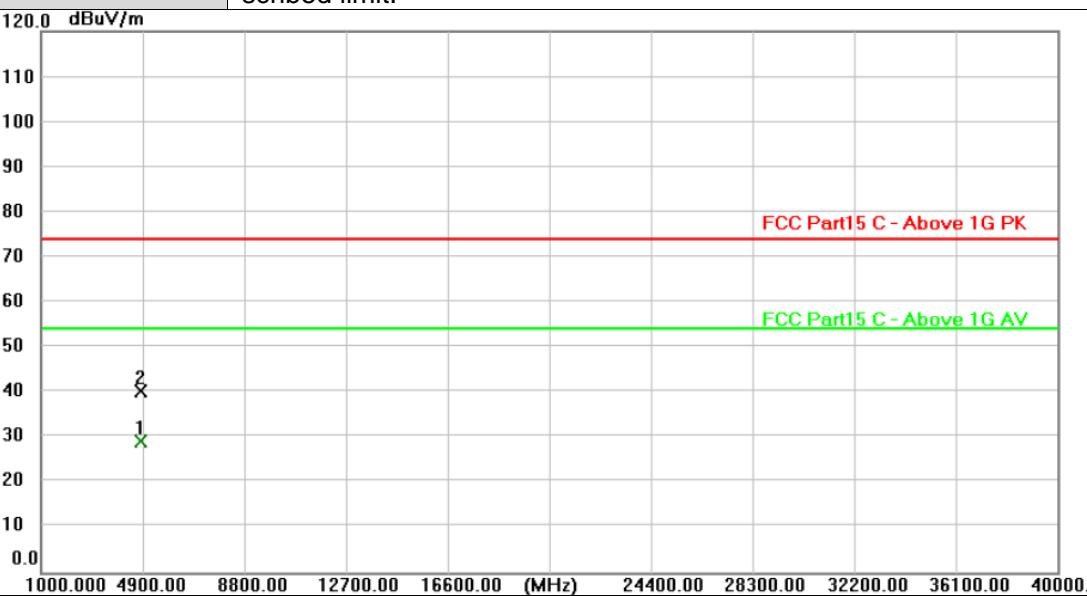Ant. Pol.	Vertical																															
Test Mode:	TX 8-DPSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 <p>The plot shows a spectral emission mask for the 2402MHz band. The Y-axis represents the level in dBuV/m from 0.0 to 120.0. The X-axis represents frequency in MHz from 1000.000 to 40000.0. A red horizontal line at approximately 74 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at approximately 54 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at 4803.381 MHz with a reading of 27.14 dBuV, and point 2 at 4804.707 MHz with a reading of 38.14 dBuV.</p>																																
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1 *</td><td>4803.381</td><td>27.14</td><td>2.16</td><td>29.30</td><td>54.00</td><td>-24.70</td><td>AVG</td></tr> <tr> <td>2</td><td>4804.707</td><td>38.14</td><td>2.16</td><td>40.30</td><td>74.00</td><td>-33.70</td><td>peak</td></tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.381	27.14	2.16	29.30	54.00	-24.70	AVG	2	4804.707	38.14	2.16	40.30	74.00	-33.70	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4803.381	27.14	2.16	29.30	54.00	-24.70	AVG																									
2	4804.707	38.14	2.16	40.30	74.00	-33.70	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

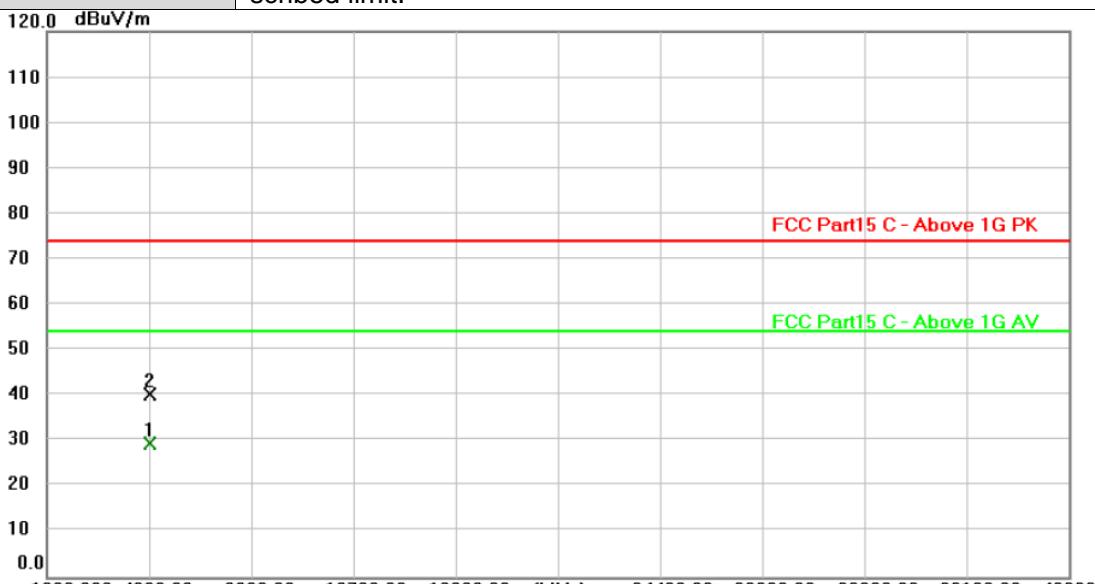Ant. Pol.	Horizontal																															
Test Mode:	TX 8-DPSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 <p>The plot shows a spectral emission mask for the 2.4 GHz band. The y-axis represents the level in dBuV/m from 0.0 to 120.0. The x-axis represents frequency in MHz from 1000.000 to 40000.0. A red horizontal line at approximately 74 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at approximately 54 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at approximately 4881.462 MHz with a reading of 27.18 dBuV, and point 2 at approximately 4882.523 MHz with a reading of 38.16 dBuV. The plot area is a grid from 0.0 to 120.0 dBuV/m by 1000.000 to 40000.0 MHz.</p>																																
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4881.462</td> <td>27.18</td> <td>2.31</td> <td>29.49</td> <td>54.00</td> <td>-24.51</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4882.523</td> <td>38.16</td> <td>2.32</td> <td>40.48</td> <td>74.00</td> <td>-33.52</td> <td>peak</td> </tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.462	27.18	2.31	29.49	54.00	-24.51	AVG	2	4882.523	38.16	2.32	40.48	74.00	-33.52	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4881.462	27.18	2.31	29.49	54.00	-24.51	AVG																									
2	4882.523	38.16	2.32	40.48	74.00	-33.52	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

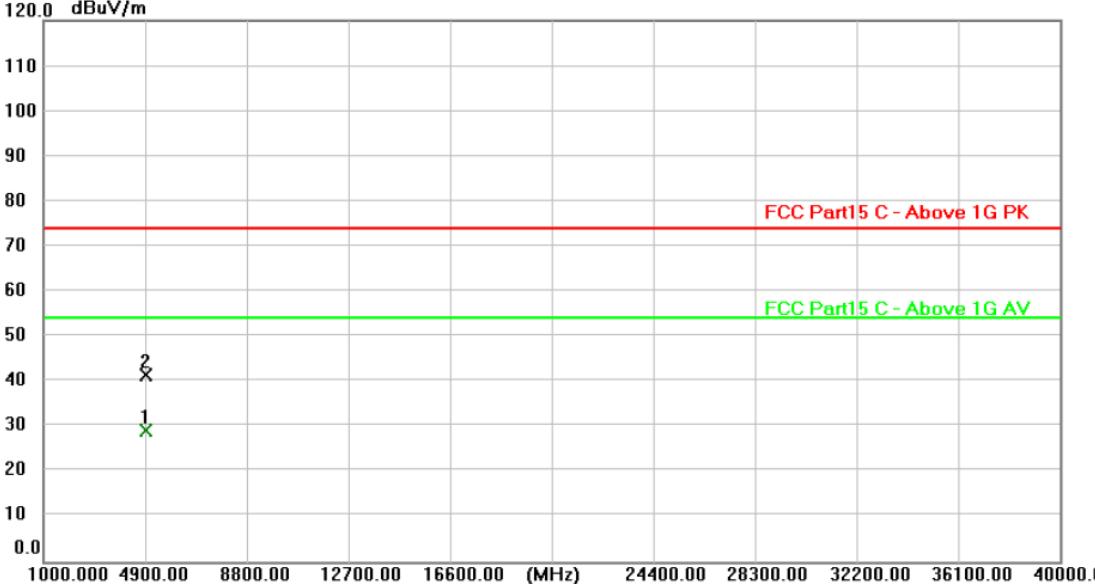Ant. Pol.	Vertical																														
Test Mode:	TX 8-DPSK Mode 2441MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <p>The plot shows a spectral emission mask for the 2441MHz emission. The Y-axis represents the level in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at 74 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at 54 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at 4881.155 MHz with a reading of 26.96 dBuV, and point 2 at 4881.935 MHz with a reading of 39.22 dBuV. The plot shows a sharp peak at point 2.</p>																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>4881.155</td> <td>26.96</td> <td>2.31</td> <td>29.27</td> <td>54.00</td> <td>-24.73</td> <td>AVG</td> </tr> <tr> <td>2</td> <td>4881.935</td> <td>39.22</td> <td>2.31</td> <td>41.53</td> <td>74.00</td> <td>-32.47</td> <td>peak</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.155	26.96	2.31	29.27	54.00	-24.73	AVG	2	4881.935	39.22	2.31	41.53	74.00	-32.47	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4881.155	26.96	2.31	29.27	54.00	-24.73	AVG																								
2	4881.935	39.22	2.31	41.53	74.00	-32.47	peak																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

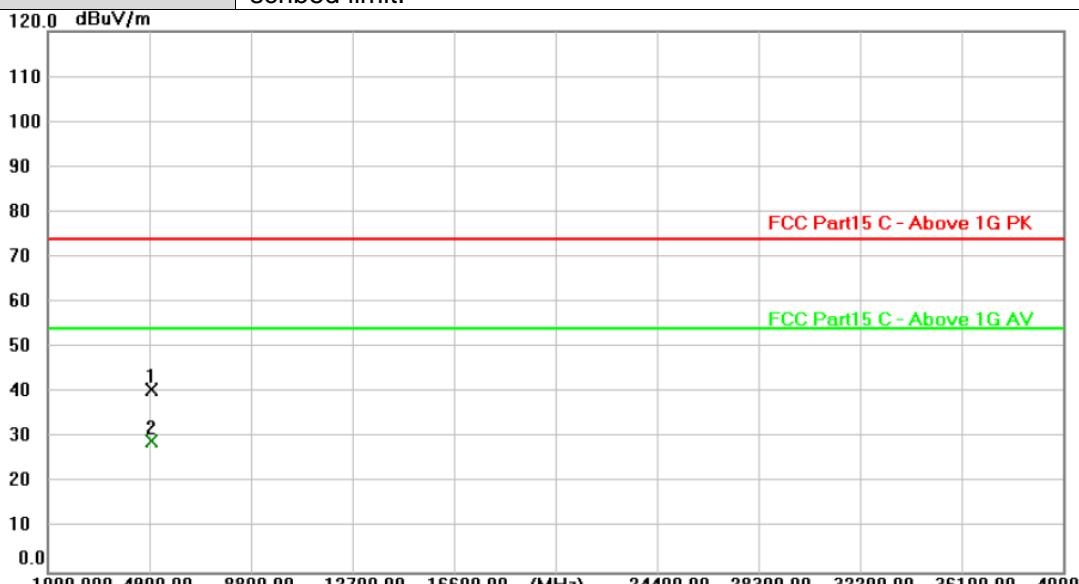Ant. Pol.	Horizontal																														
Test Mode:	TX 8-DPSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <p>The plot shows a spectral emission mask for FCC Part 15 C. The y-axis represents the level in dBuV/m from 0.0 to 120.0. The x-axis represents frequency in MHz from 1000.000 to 40000.0. A red horizontal line at 74.00 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at 54.00 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 at approximately 4959.231 MHz with a reading of 38.28 dBuV, and point 2 at approximately 4960.761 MHz with a reading of 26.76 dBuV. The margin for point 1 is -33.24 dB, and for point 2 is -24.76 dB.</p>																															
<table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4959.231</td> <td>38.28</td> <td>2.48</td> <td>40.76</td> <td>74.00</td> <td>-33.24</td> <td>peak</td> </tr> <tr> <td>2 *</td> <td>4960.761</td> <td>26.76</td> <td>2.48</td> <td>29.24</td> <td>54.00</td> <td>-24.76</td> <td>AVG</td> </tr> </tbody> </table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.231	38.28	2.48	40.76	74.00	-33.24	peak	2 *	4960.761	26.76	2.48	29.24	54.00	-24.76	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.231	38.28	2.48	40.76	74.00	-33.24	peak																								
2 *	4960.761	26.76	2.48	29.24	54.00	-24.76	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

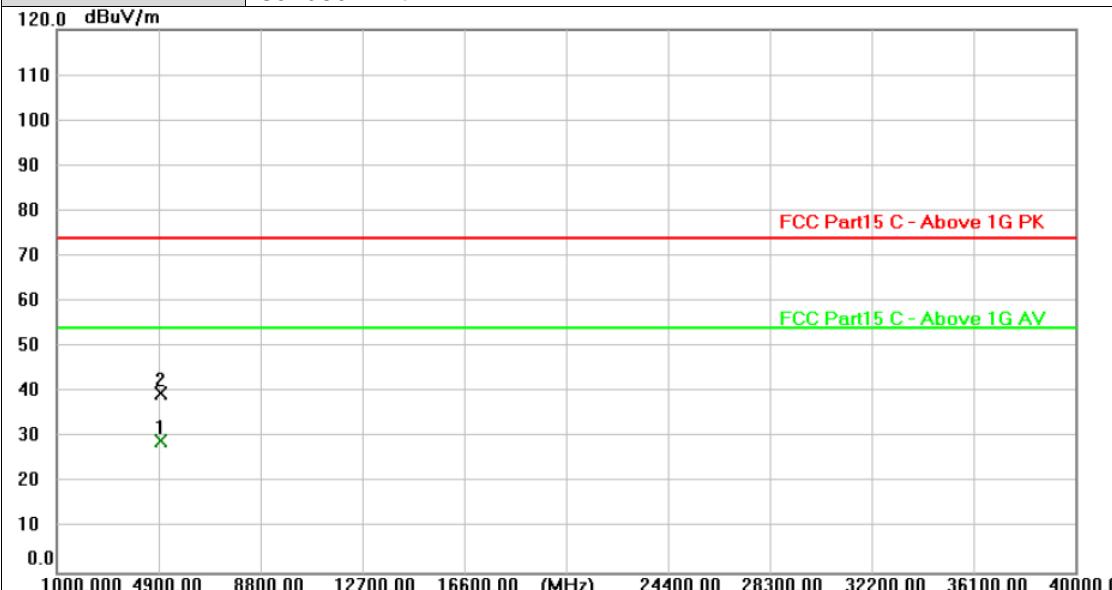Ant. Pol.	Vertical																															
Test Mode:	TX 8-DPSK Mode 2480MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 <p>The plot shows a spectral emission mask for the emission. The Y-axis represents the level in dBuV/m, ranging from 0.0 to 120.0. The X-axis represents frequency in MHz, ranging from 1000.000 to 40000.0. A red horizontal line at approximately 74 dBuV/m represents the 'FCC Part15 C - Above 1G PK' limit. A green horizontal line at approximately 54 dBuV/m represents the 'FCC Part15 C - Above 1G AV' limit. Two data points are plotted: point 1 at 4959.751 MHz with a reading of 26.89 dBuV, and point 2 at 4959.853 MHz with a reading of 37.42 dBuV. Both points are well above the FCC limits.</p>																																
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1 *</td><td>4959.751</td><td>26.89</td><td>2.48</td><td>29.37</td><td>54.00</td><td>-24.63</td><td>AVG</td></tr> <tr> <td>2</td><td>4959.853</td><td>37.42</td><td>2.48</td><td>39.90</td><td>74.00</td><td>-34.10</td><td>peak</td></tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4959.751	26.89	2.48	29.37	54.00	-24.63	AVG	2	4959.853	37.42	2.48	39.90	74.00	-34.10	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4959.751	26.89	2.48	29.37	54.00	-24.63	AVG																									
2	4959.853	37.42	2.48	39.90	74.00	-34.10	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

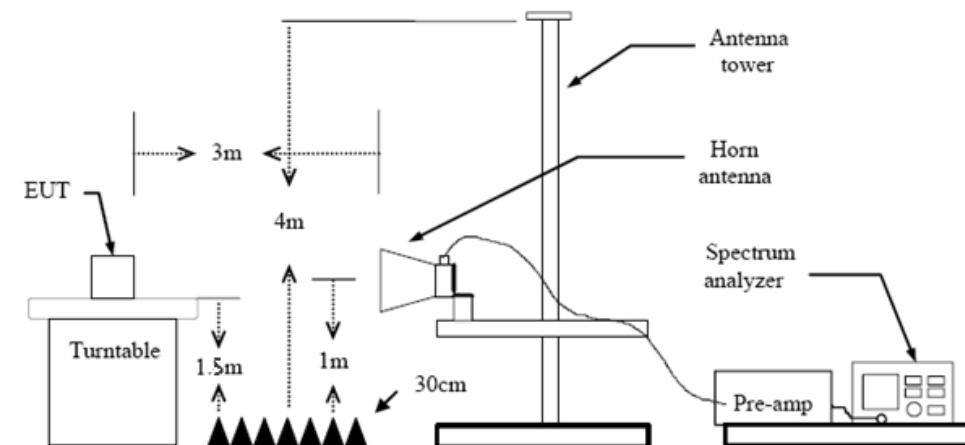

Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.


Test Mode


Please refer to the clause 2.4.


**Test Results**

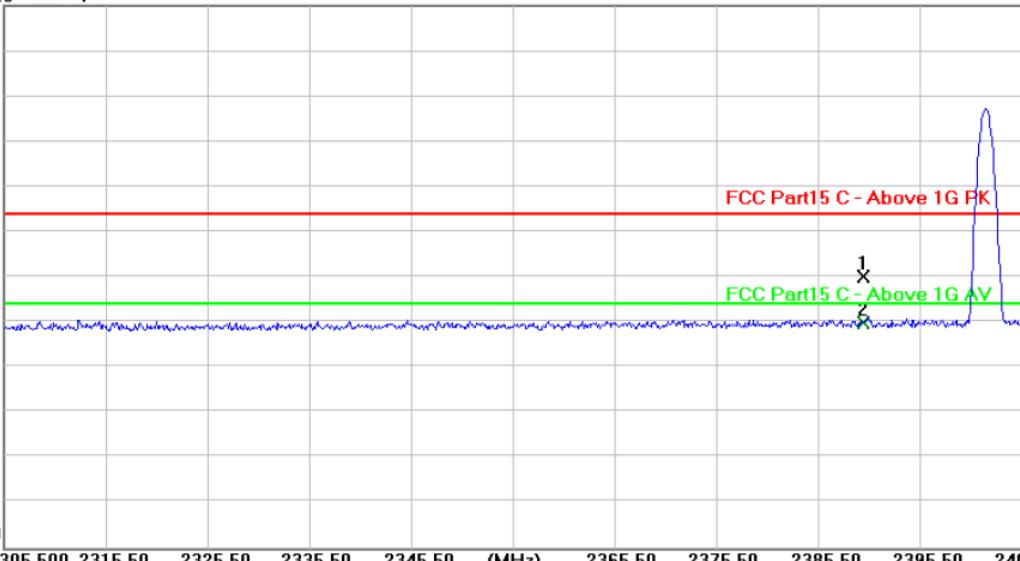
Ant. Pol.	Horizontal															
Test Mode:	GFSK Mode 2402MHz															
120.0 dBuV/m																
																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector									
1	2390.000	29.28	30.84	60.12	74.00	-13.88	peak									
2 *	2390.000	19.05	30.84	49.89	54.00	-4.11	AVG									
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																

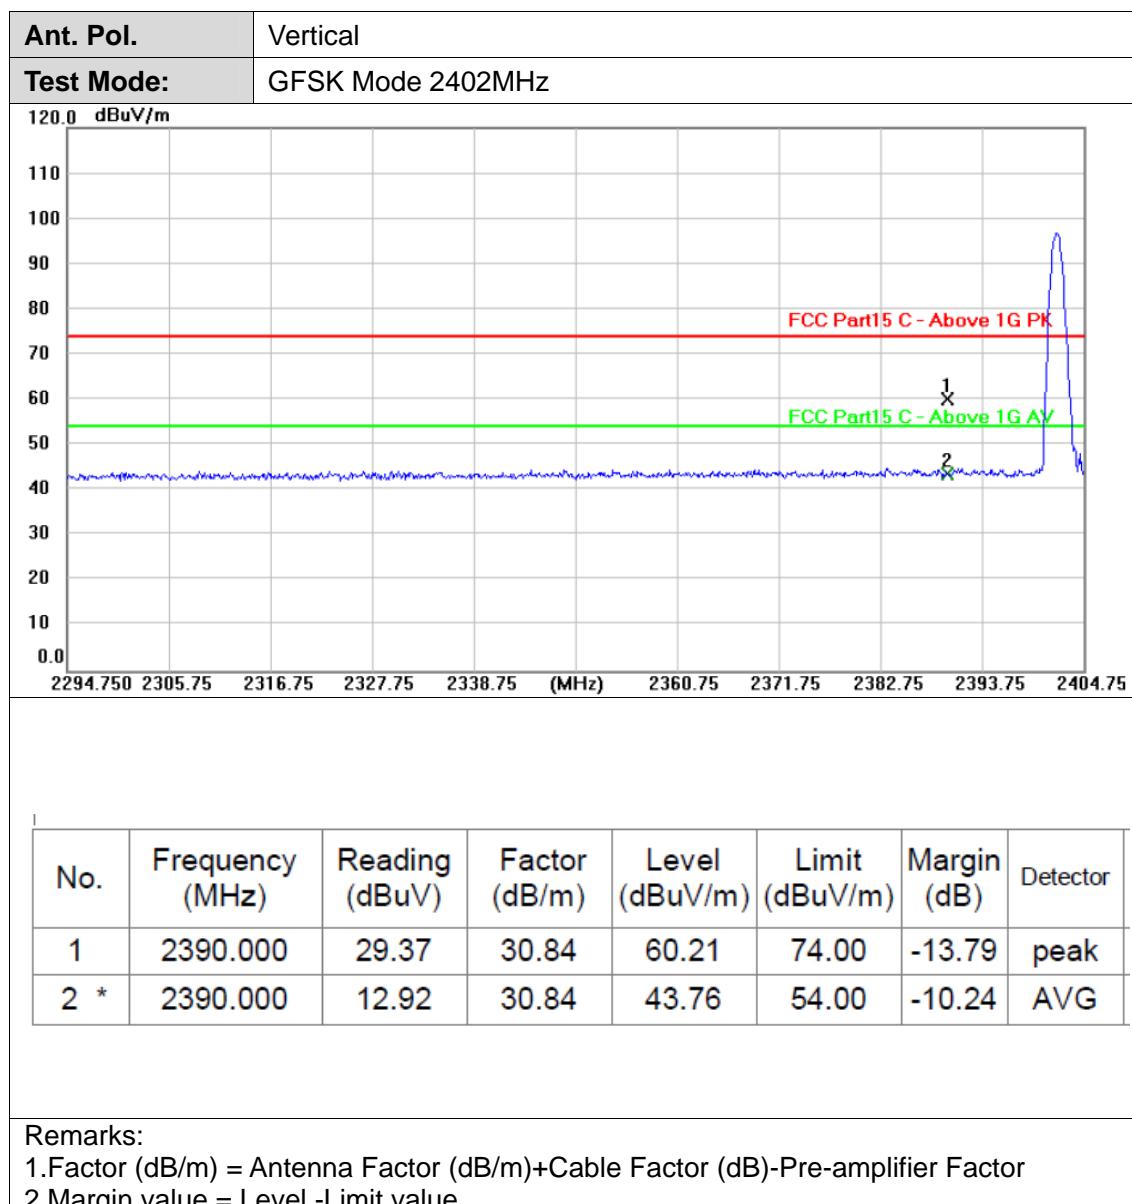


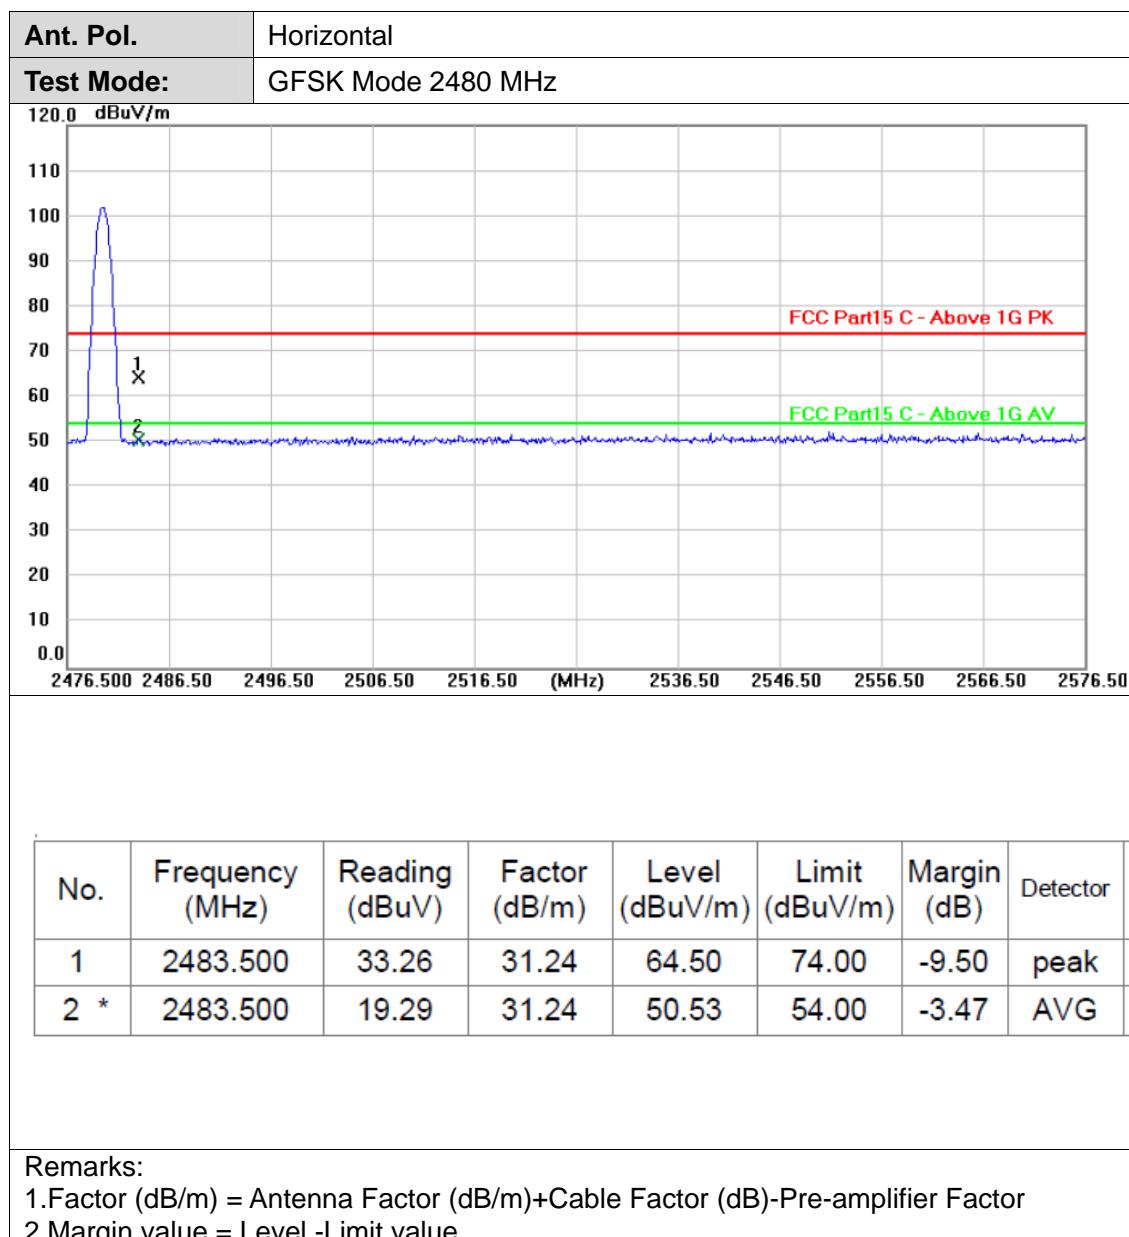


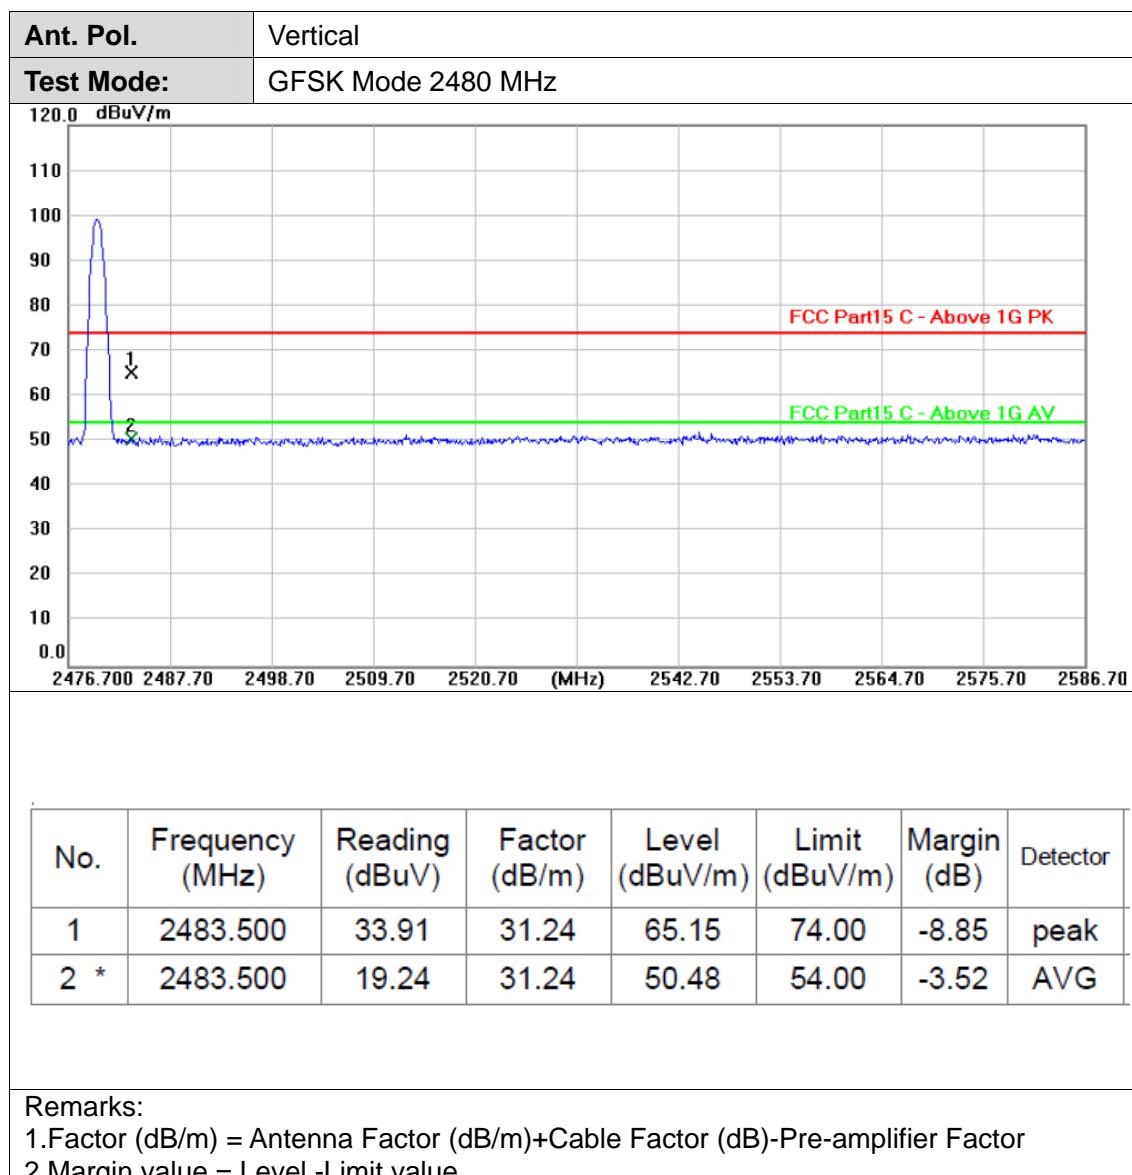


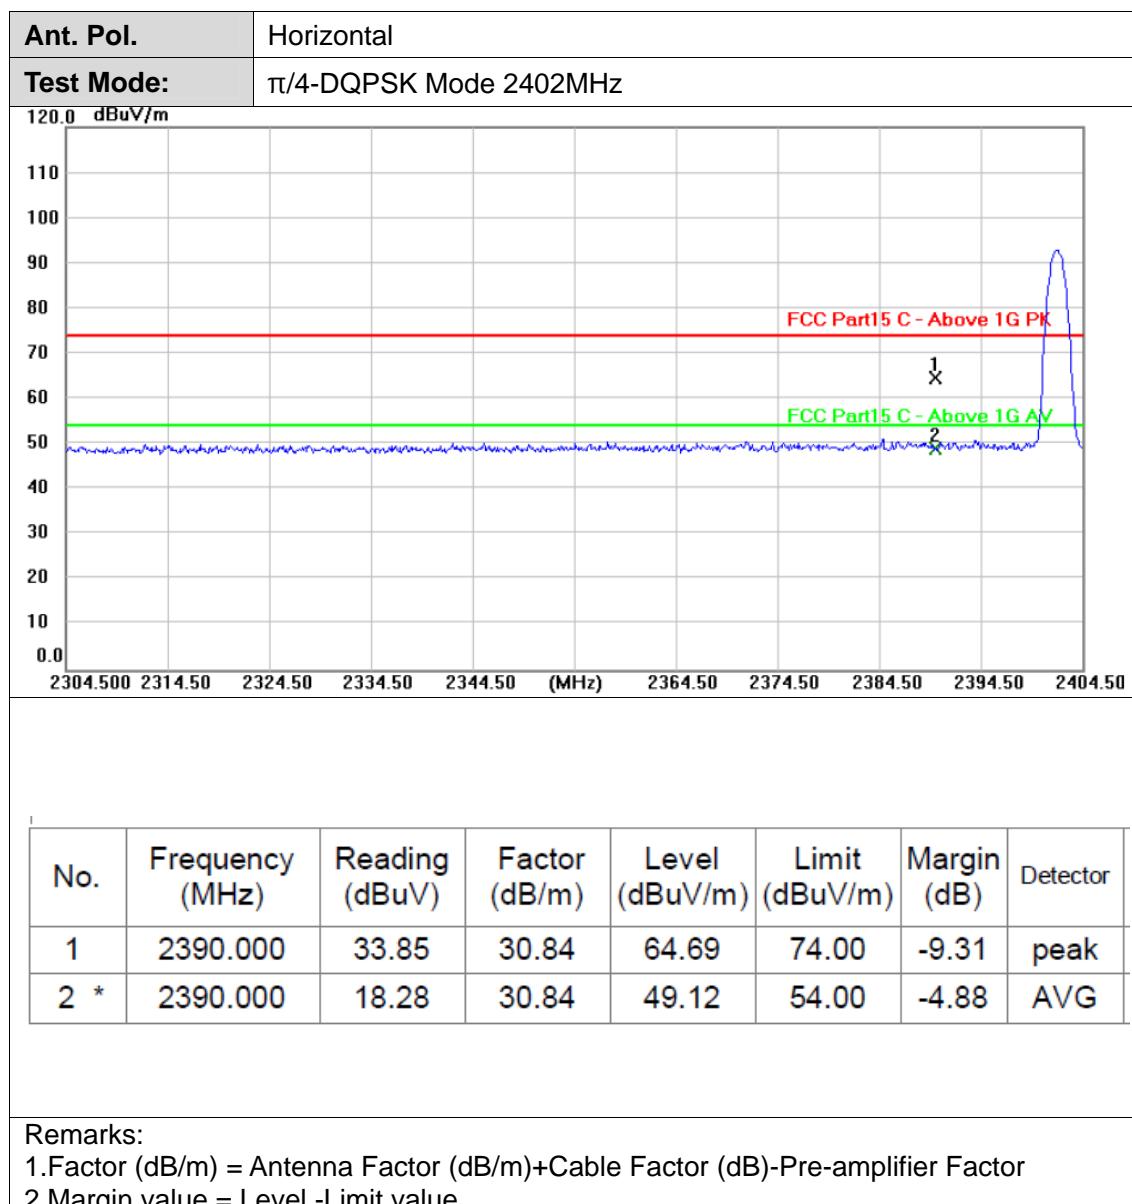


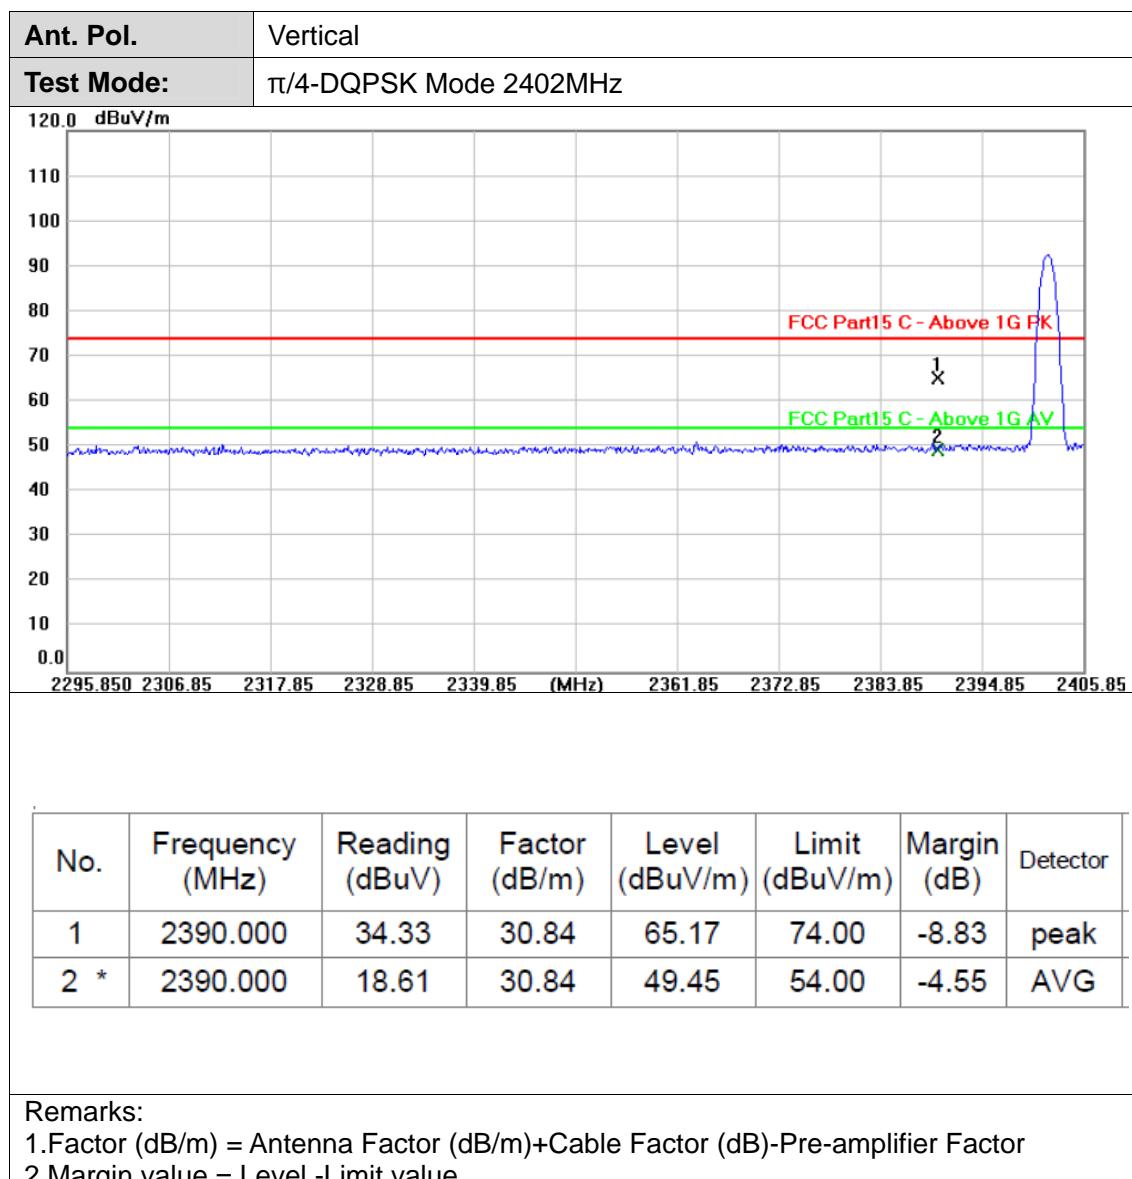


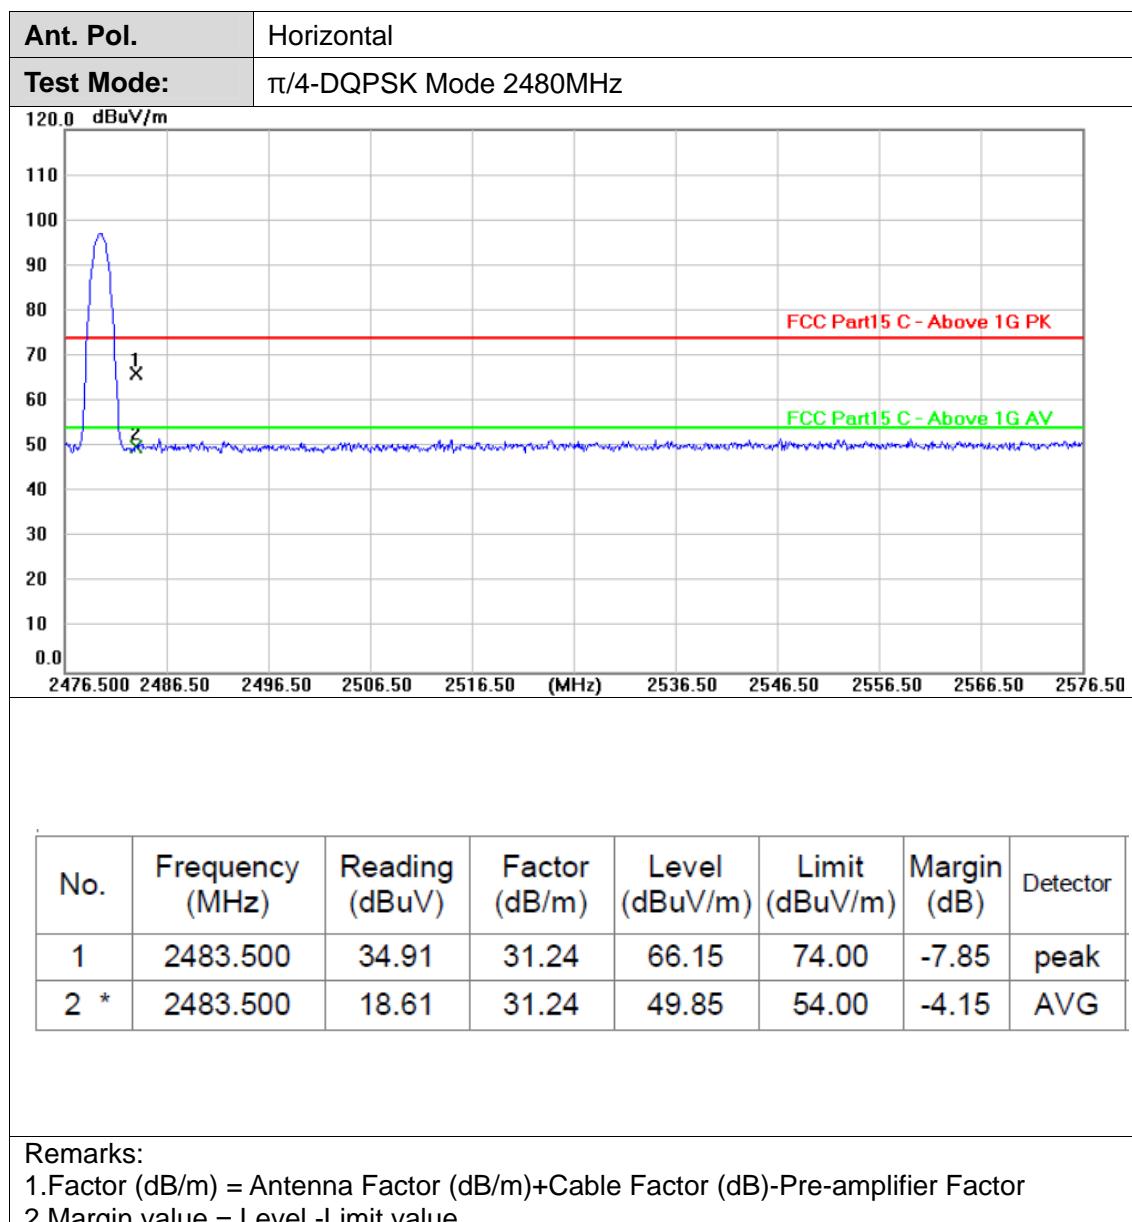


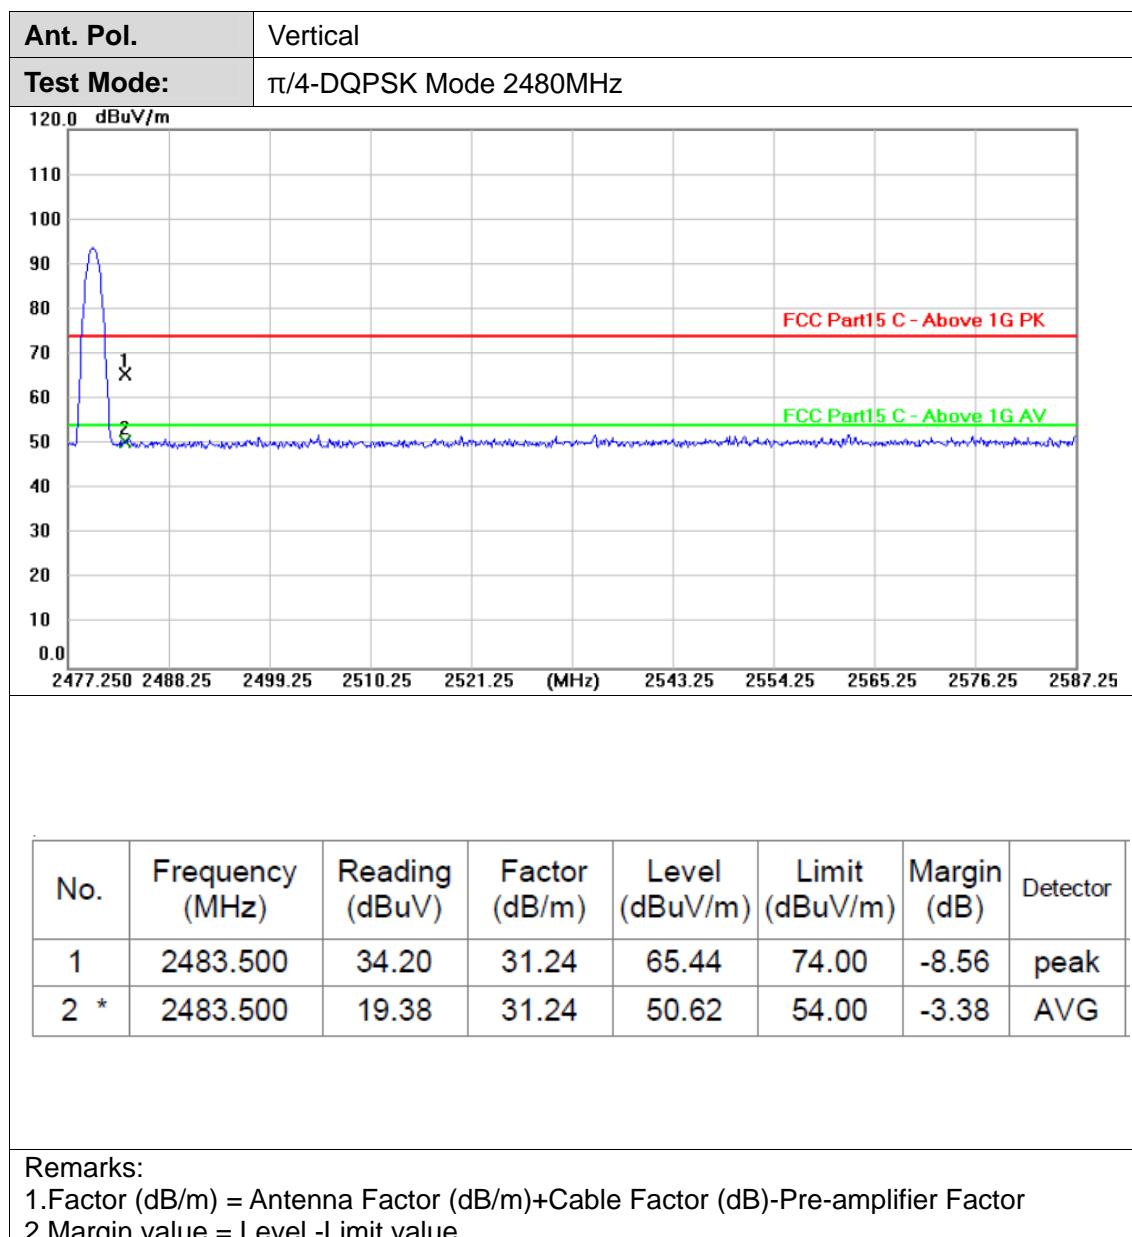

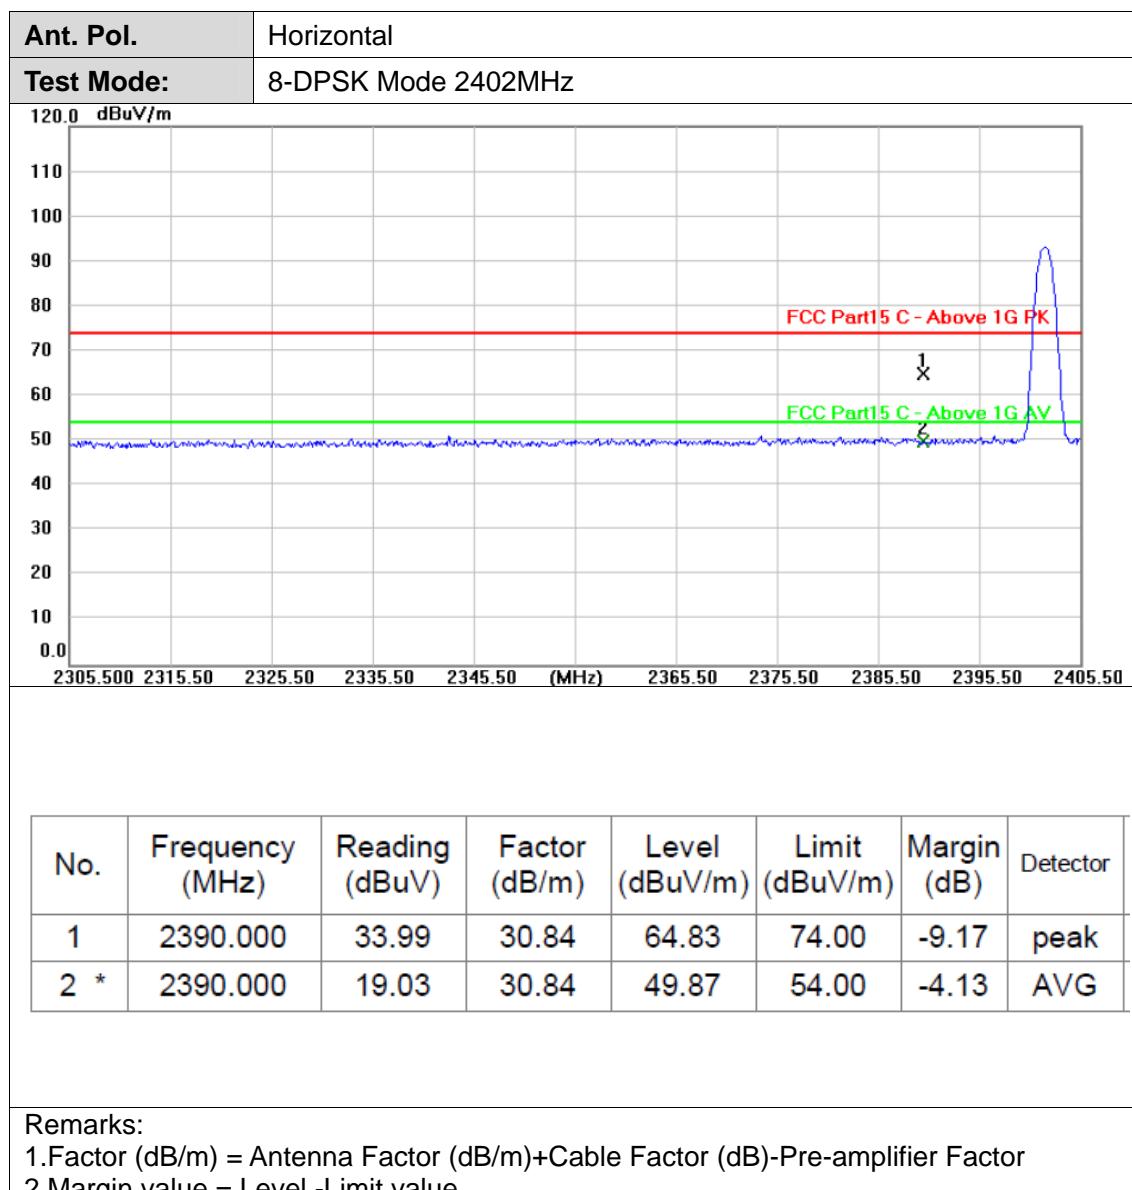

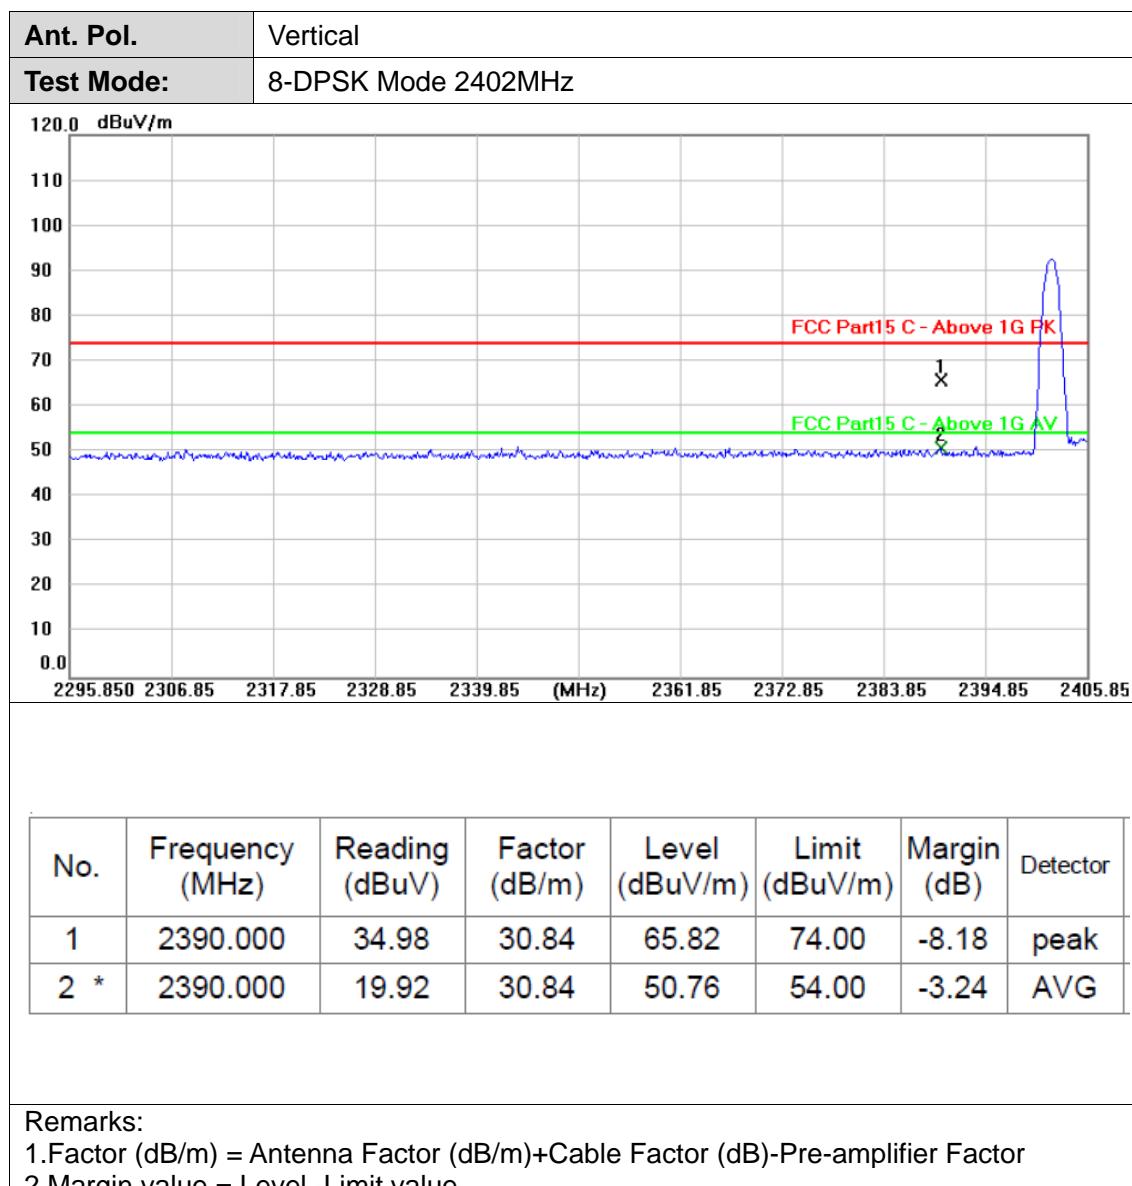

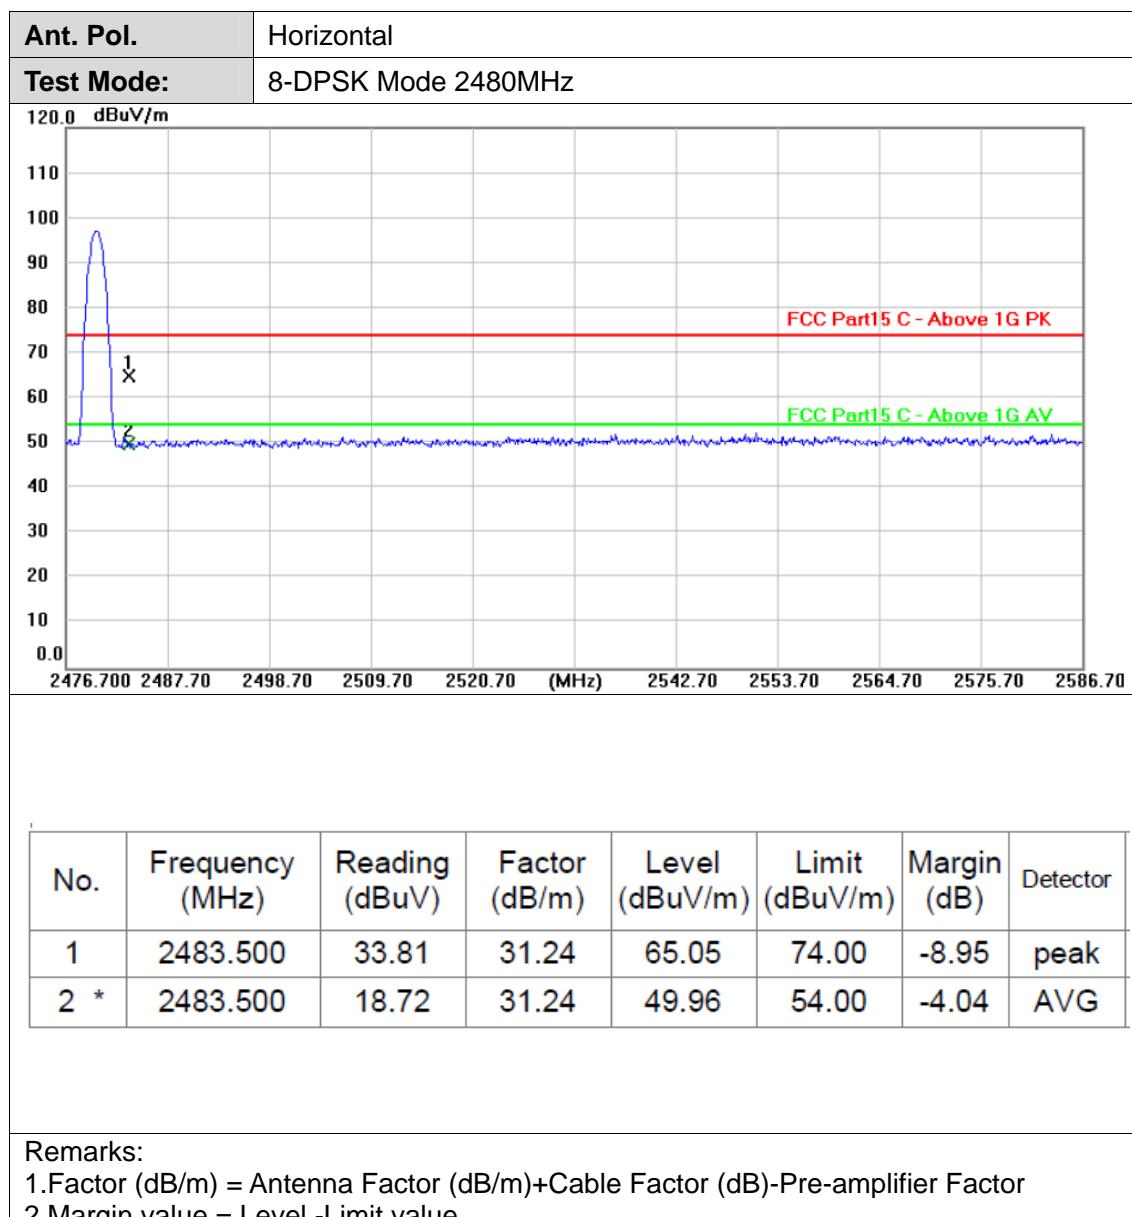

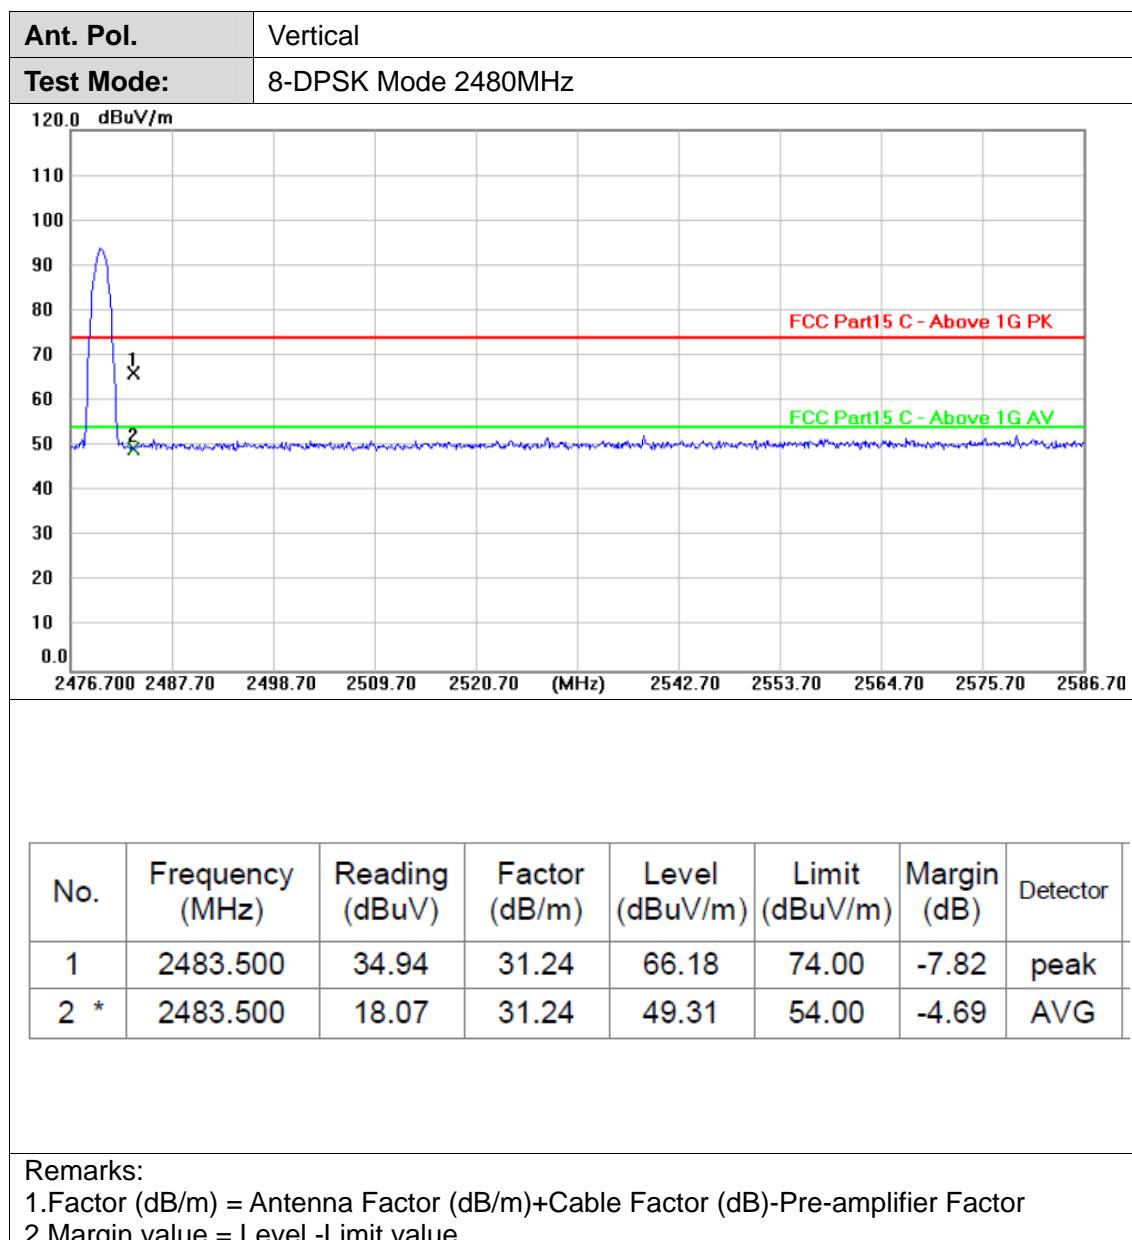


3.4. Band edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.


Test Results

(1) Band edge Conducted Test


Test Mode	Frequency[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
GFSK	2402	9.14	-56.40	\leq -10.86	PASS
	2480	9.02	-57.78	\leq -10.98	PASS
	Hop_2402	8.85	-59.23	\leq -11.15	PASS
	Hop_2480	9.23	-59.16	\leq -10.77	PASS
$\pi/4$ -DQPSK	2402	8.71	-48.04	\leq -11.29	PASS
	2480	7.53	-58.35	\leq -12.47	PASS
	Hop_2402	5.26	-58.33	\leq -14.74	PASS
	Hop_2480	8.67	-58.40	\leq -11.33	PASS
8-DPSK	2402	8.05	-46.37	\leq -11.95	PASS
	2480	7.72	-58.03	\leq -12.28	PASS
	Hop_2402	7.42	-57.50	\leq -12.58	PASS
	Hop_2480	5.29	-59.10	\leq -14.71	PASS




GFSK_Low_2402

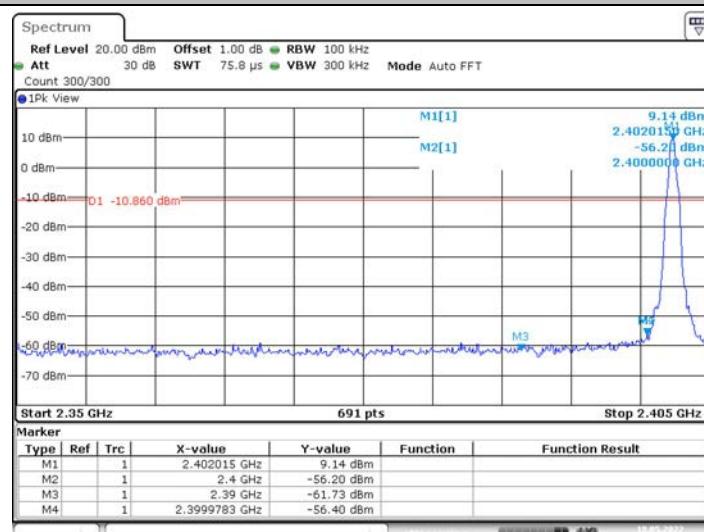

GFSK_High_2480

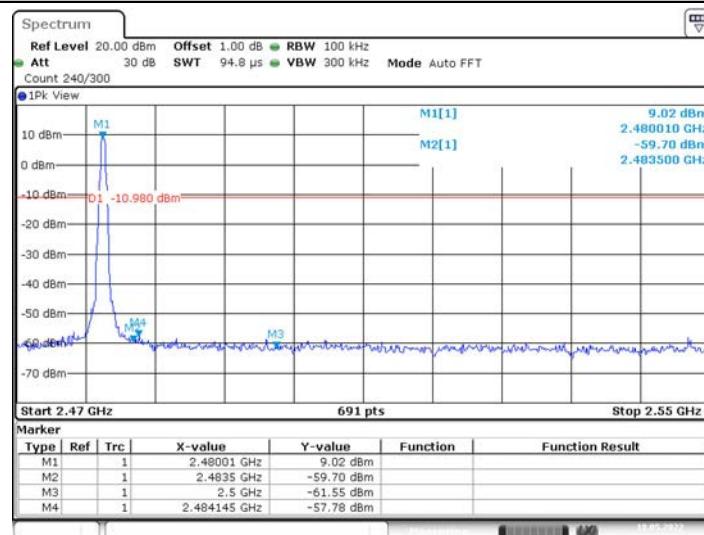

GFSK_Low_Hop_2402

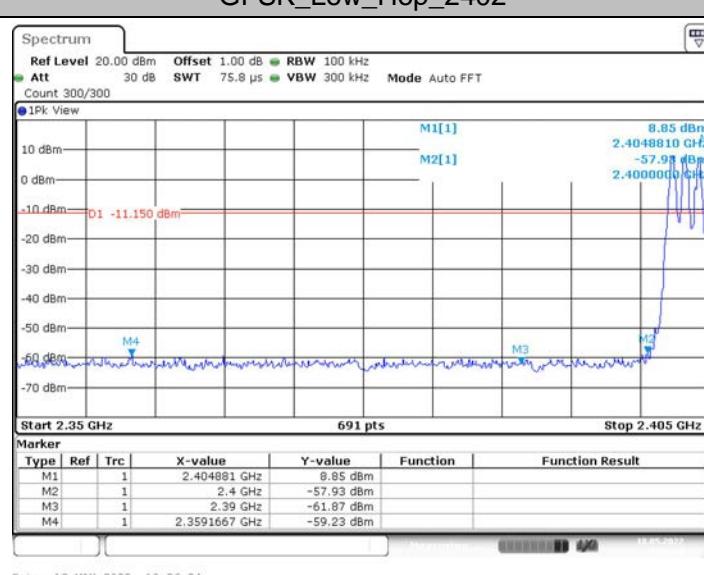


CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




GFSK_High_Hop_2480

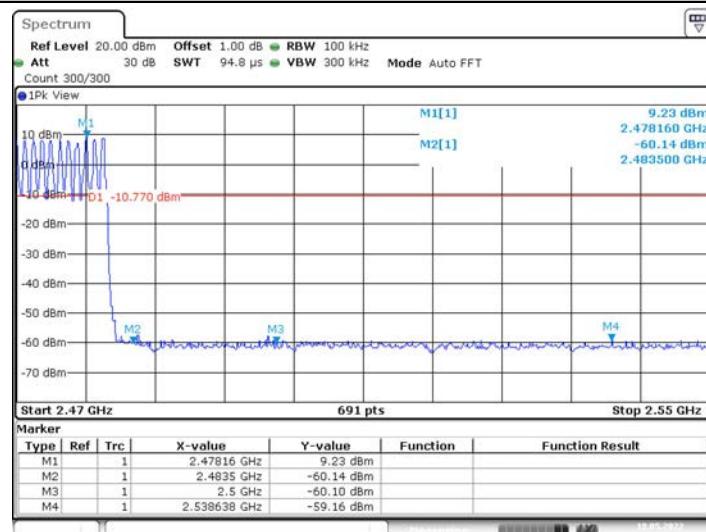

π/4-DQPSK_Low_2402

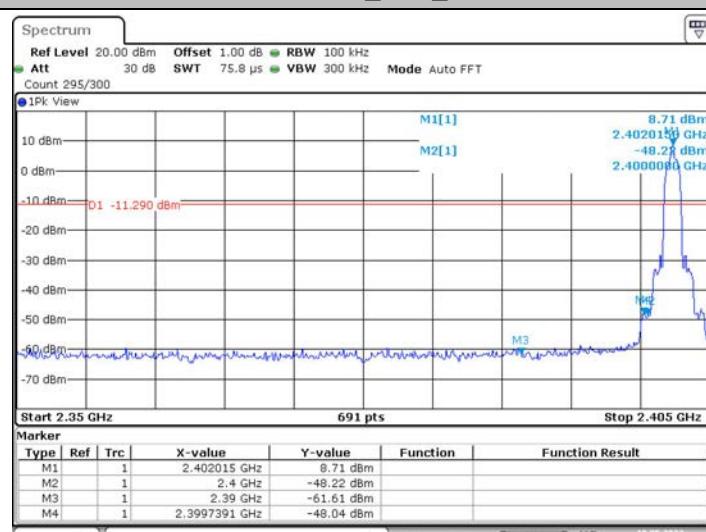

π/4-DQPSK_High_2480

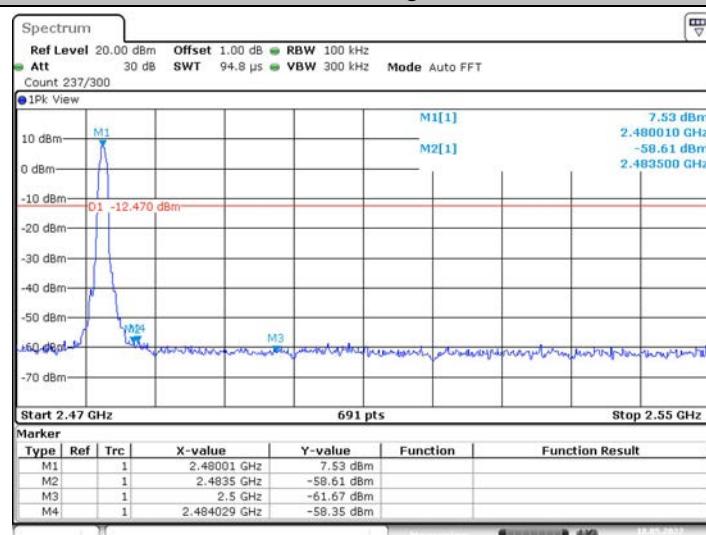

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.org.cn)




π/4-DQPSK_Low_Hop_2402

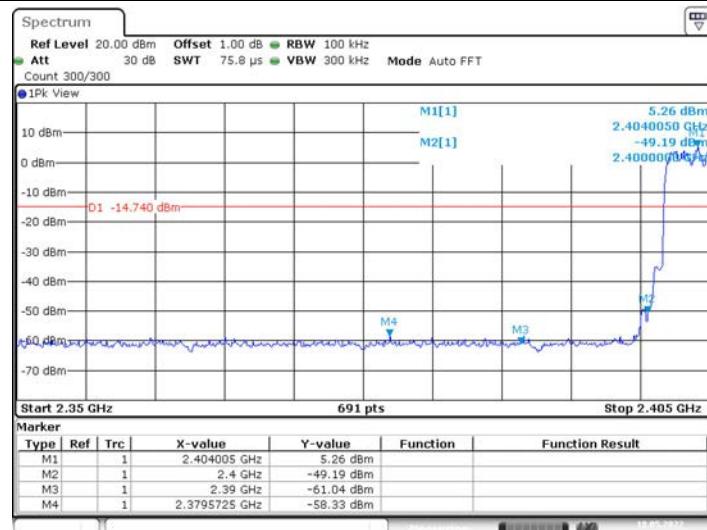

π/4-DQPSK_High_Hop_2480

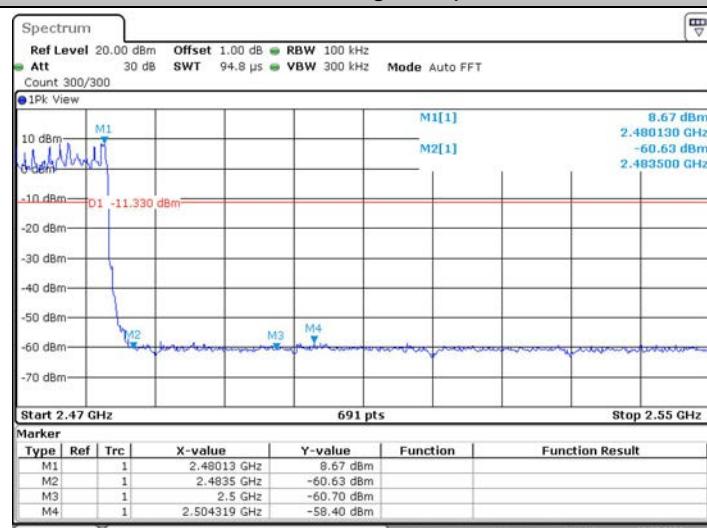

8-DPSK_Low_2402

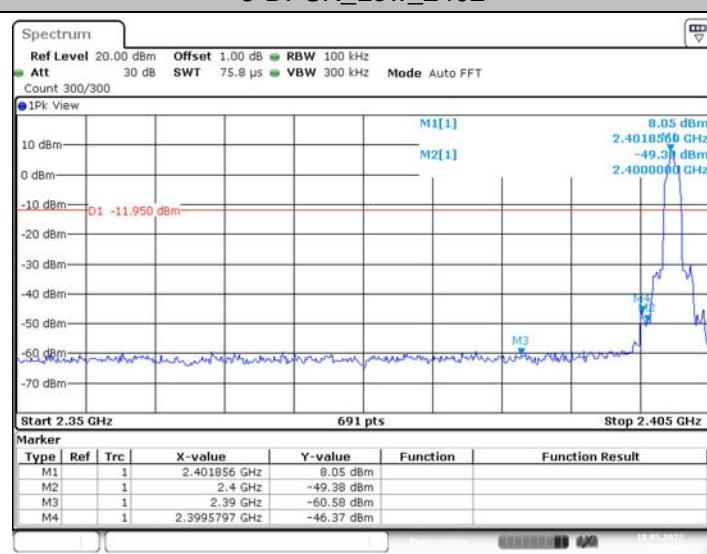

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059


Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cca.org.cn)







8-DPSK_High_2480

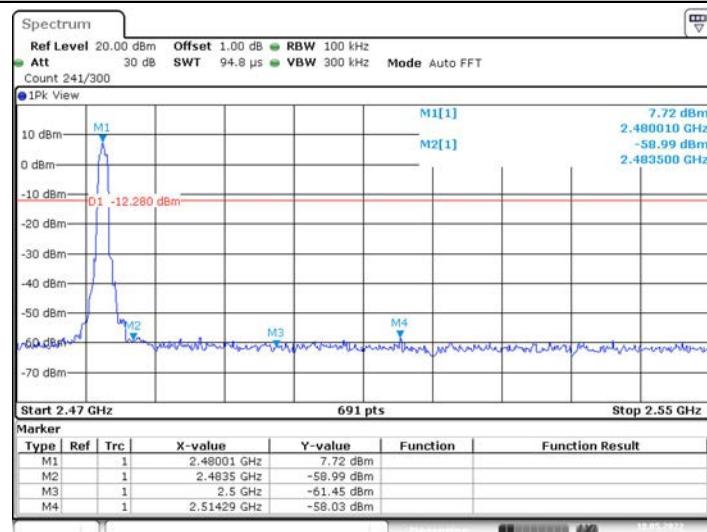

8-DPSK_Low_Hop_2402

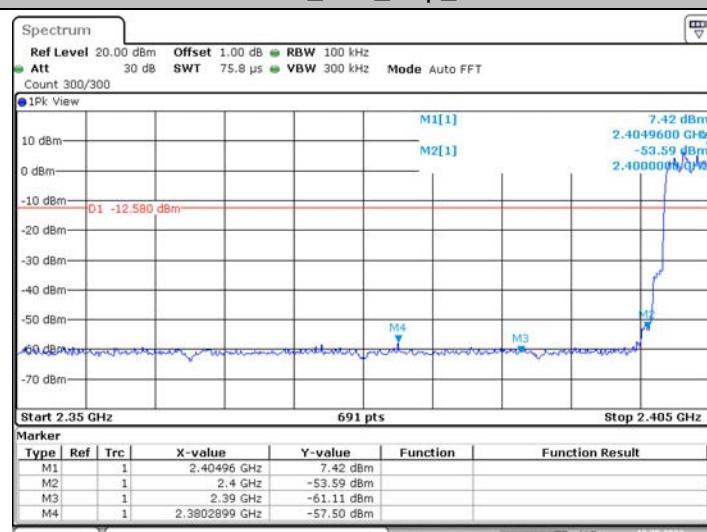

8-DPSK_High_Hop_2480

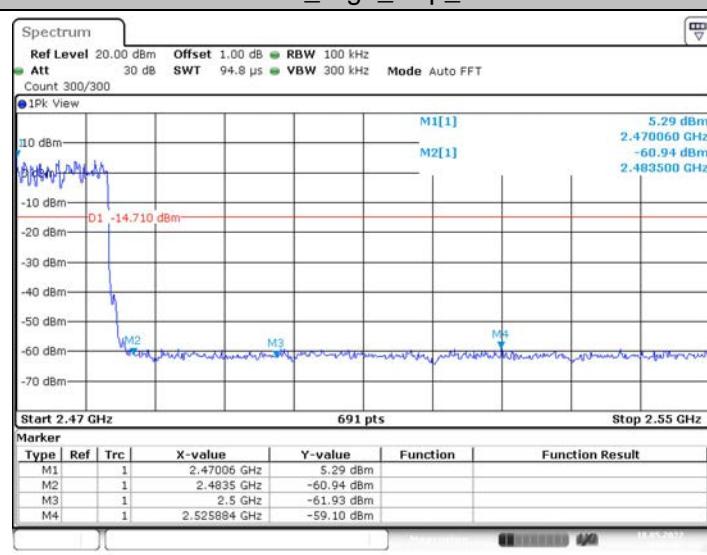


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

(2) Conducted Spurious Emissions Test

Test Mode	Frequency[MHz]	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
GFSK	2402	Reference	9.37	9.37	---	PASS
		30~1000	9.37	-71.01	≤-10.63	PASS
		1000~26500	9.37	-43.24	≤-10.63	PASS
	2441	Reference	8.82	8.82	---	PASS
		30~1000	8.82	-70.59	≤-11.18	PASS
		1000~26500	8.82	-43.21	≤-11.18	PASS
	2480	Reference	9.35	9.35	---	PASS
		30~1000	9.35	-70.62	≤-10.65	PASS
		1000~26500	9.35	-42.87	≤-10.65	PASS
$\pi/4$ -DQPSK	2402	Reference	8.97	8.97	---	PASS
		30~1000	8.97	-70.65	≤-11.03	PASS
		1000~26500	8.97	-43.53	≤-11.03	PASS
	2441	Reference	8.29	8.29	---	PASS
		30~1000	8.29	-70.25	≤-11.71	PASS
		1000~26500	8.29	-43.22	≤-11.71	PASS
	2480	Reference	9.15	9.15	---	PASS
		30~1000	9.15	-70.41	≤-10.85	PASS
		1000~26500	9.15	-42.69	≤-10.85	PASS
8-DPSK	2402	Reference	8.97	8.97	---	PASS
		30~1000	8.97	-70.97	≤-11.03	PASS
		1000~26500	8.97	-43.72	≤-11.03	PASS
	2441	Reference	8.04	8.04	---	PASS
		30~1000	8.04	-70.40	≤-11.96	PASS
		1000~26500	8.04	-43.42	≤-11.96	PASS
	2480	Reference	9.39	9.39	---	PASS
		30~1000	9.39	-70.65	≤-10.61	PASS
		1000~26500	9.39	-42.10	≤-10.61	PASS

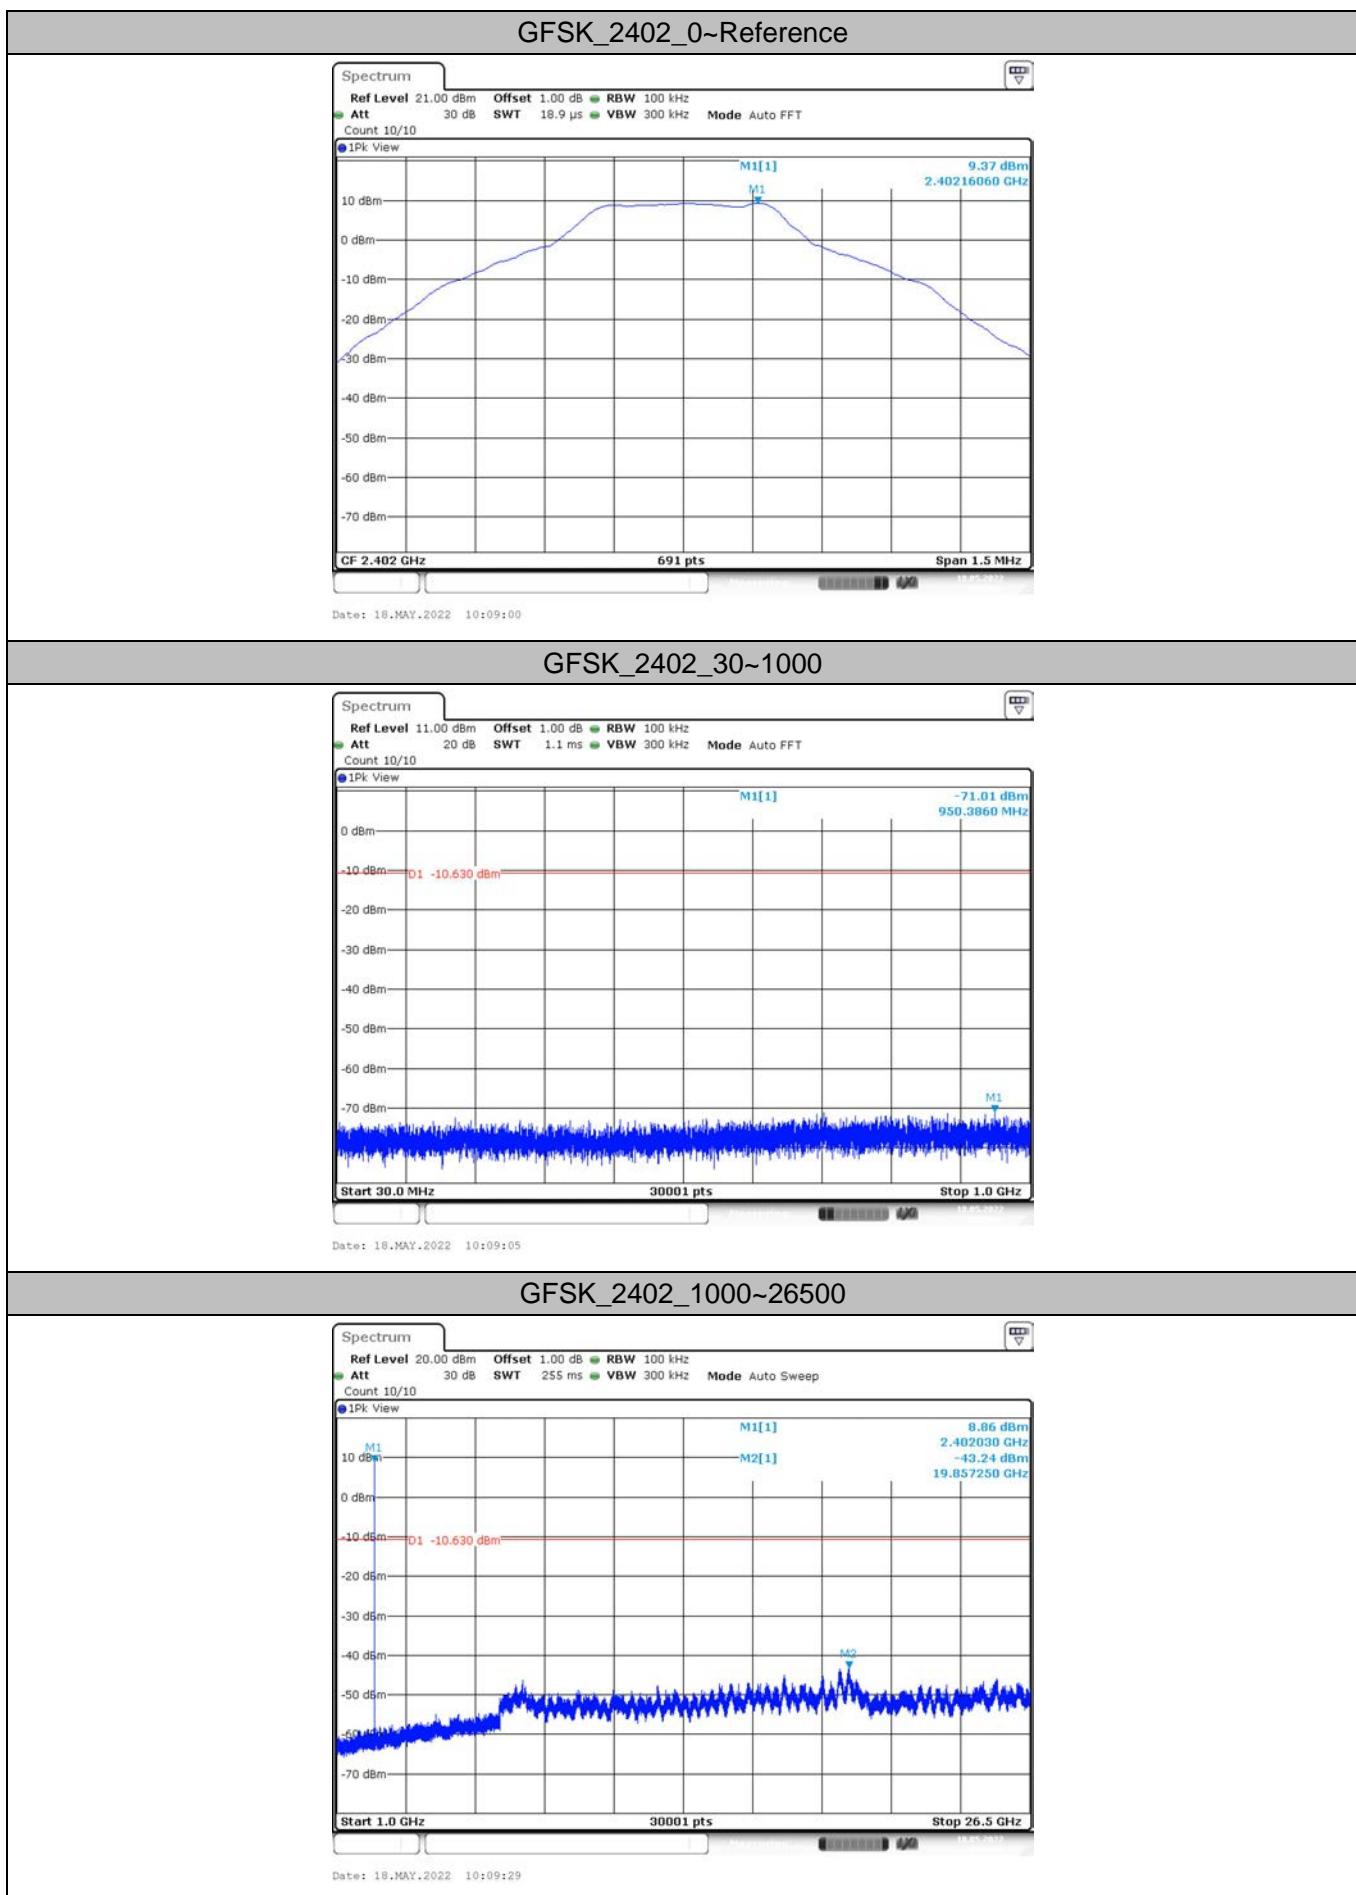



CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

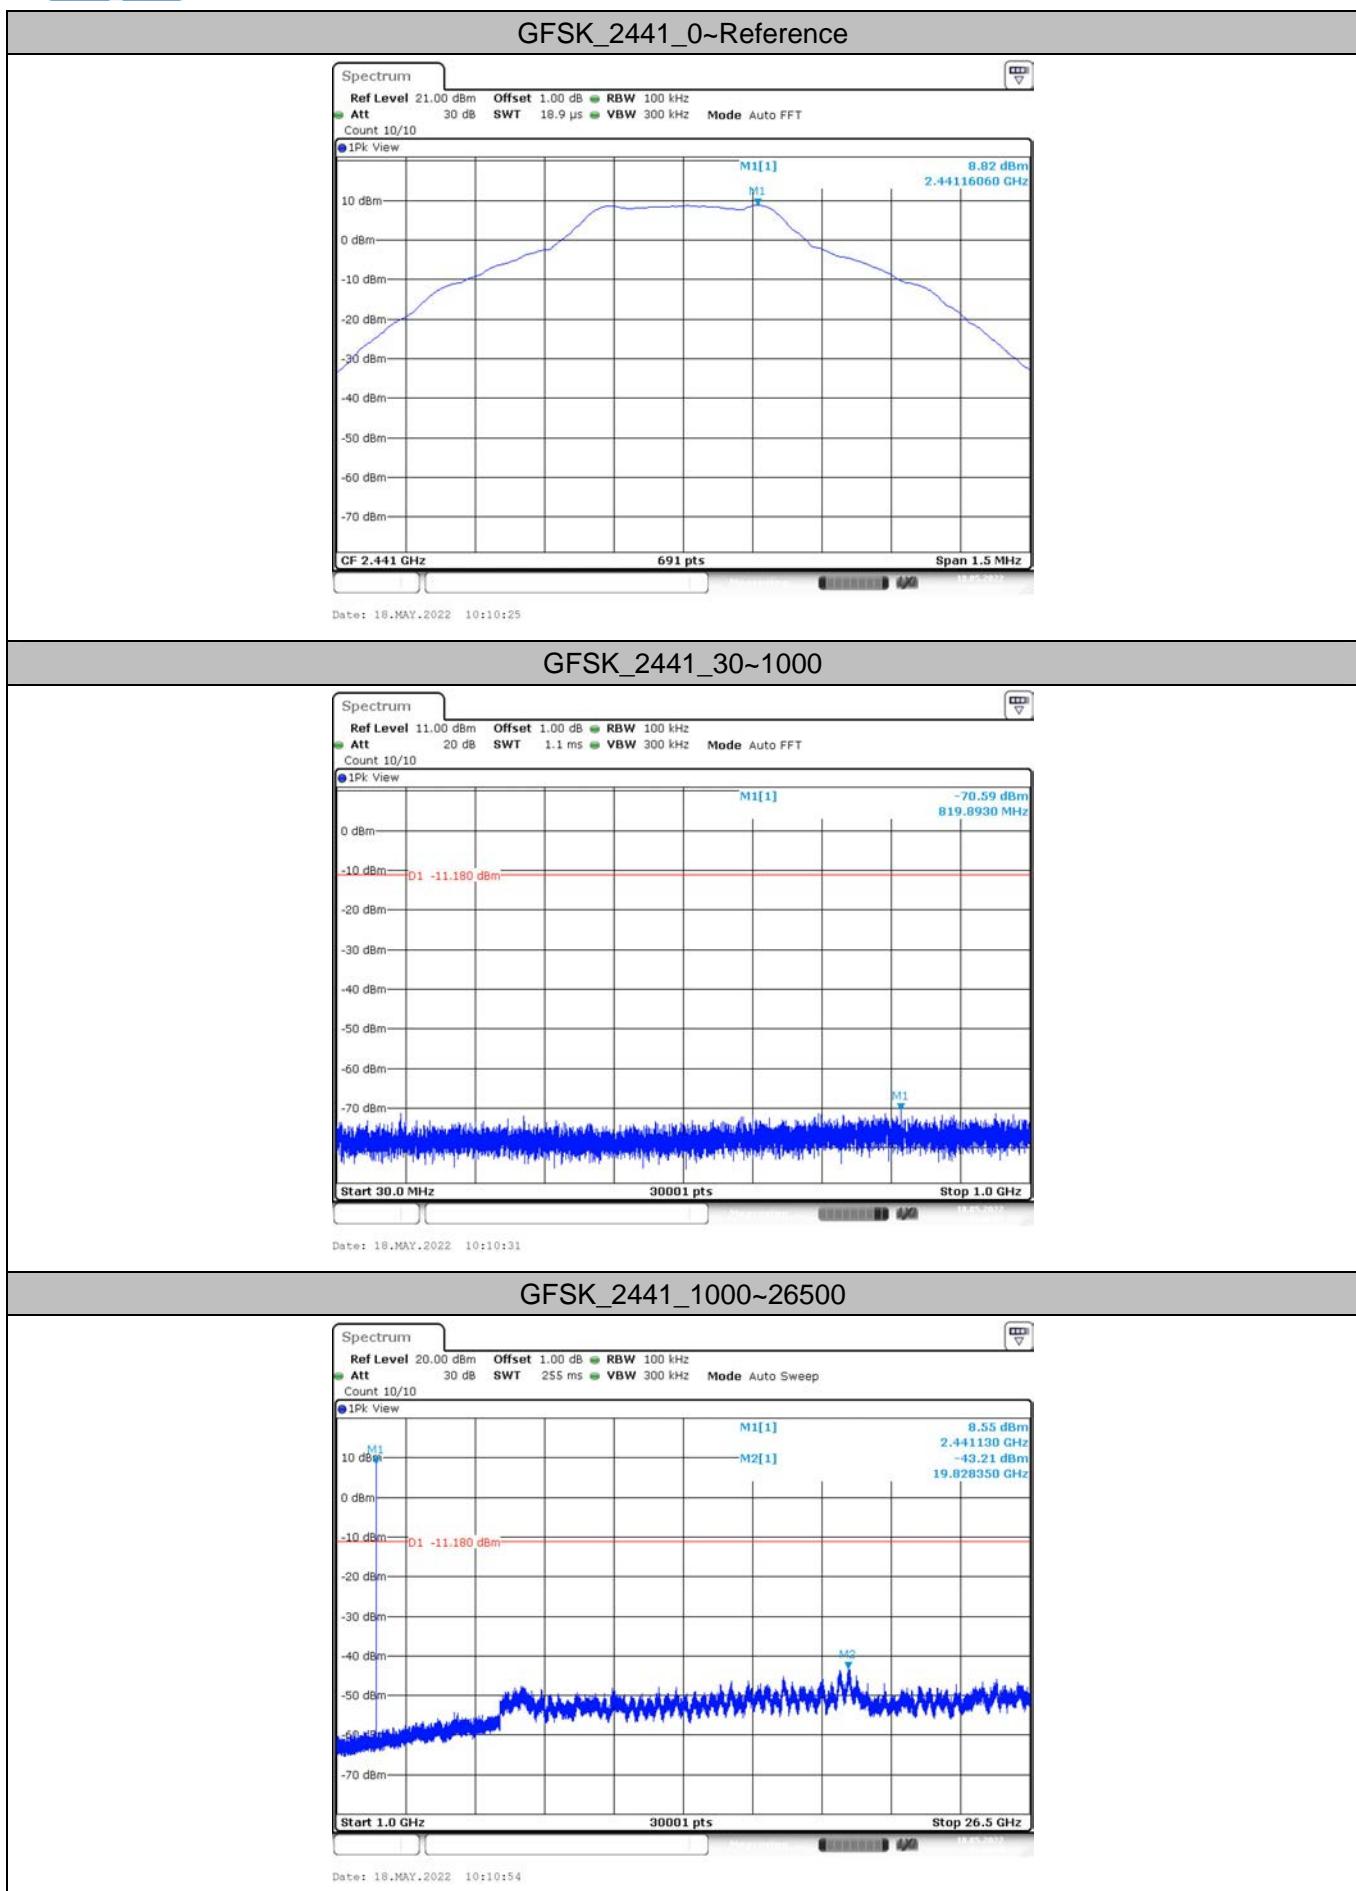

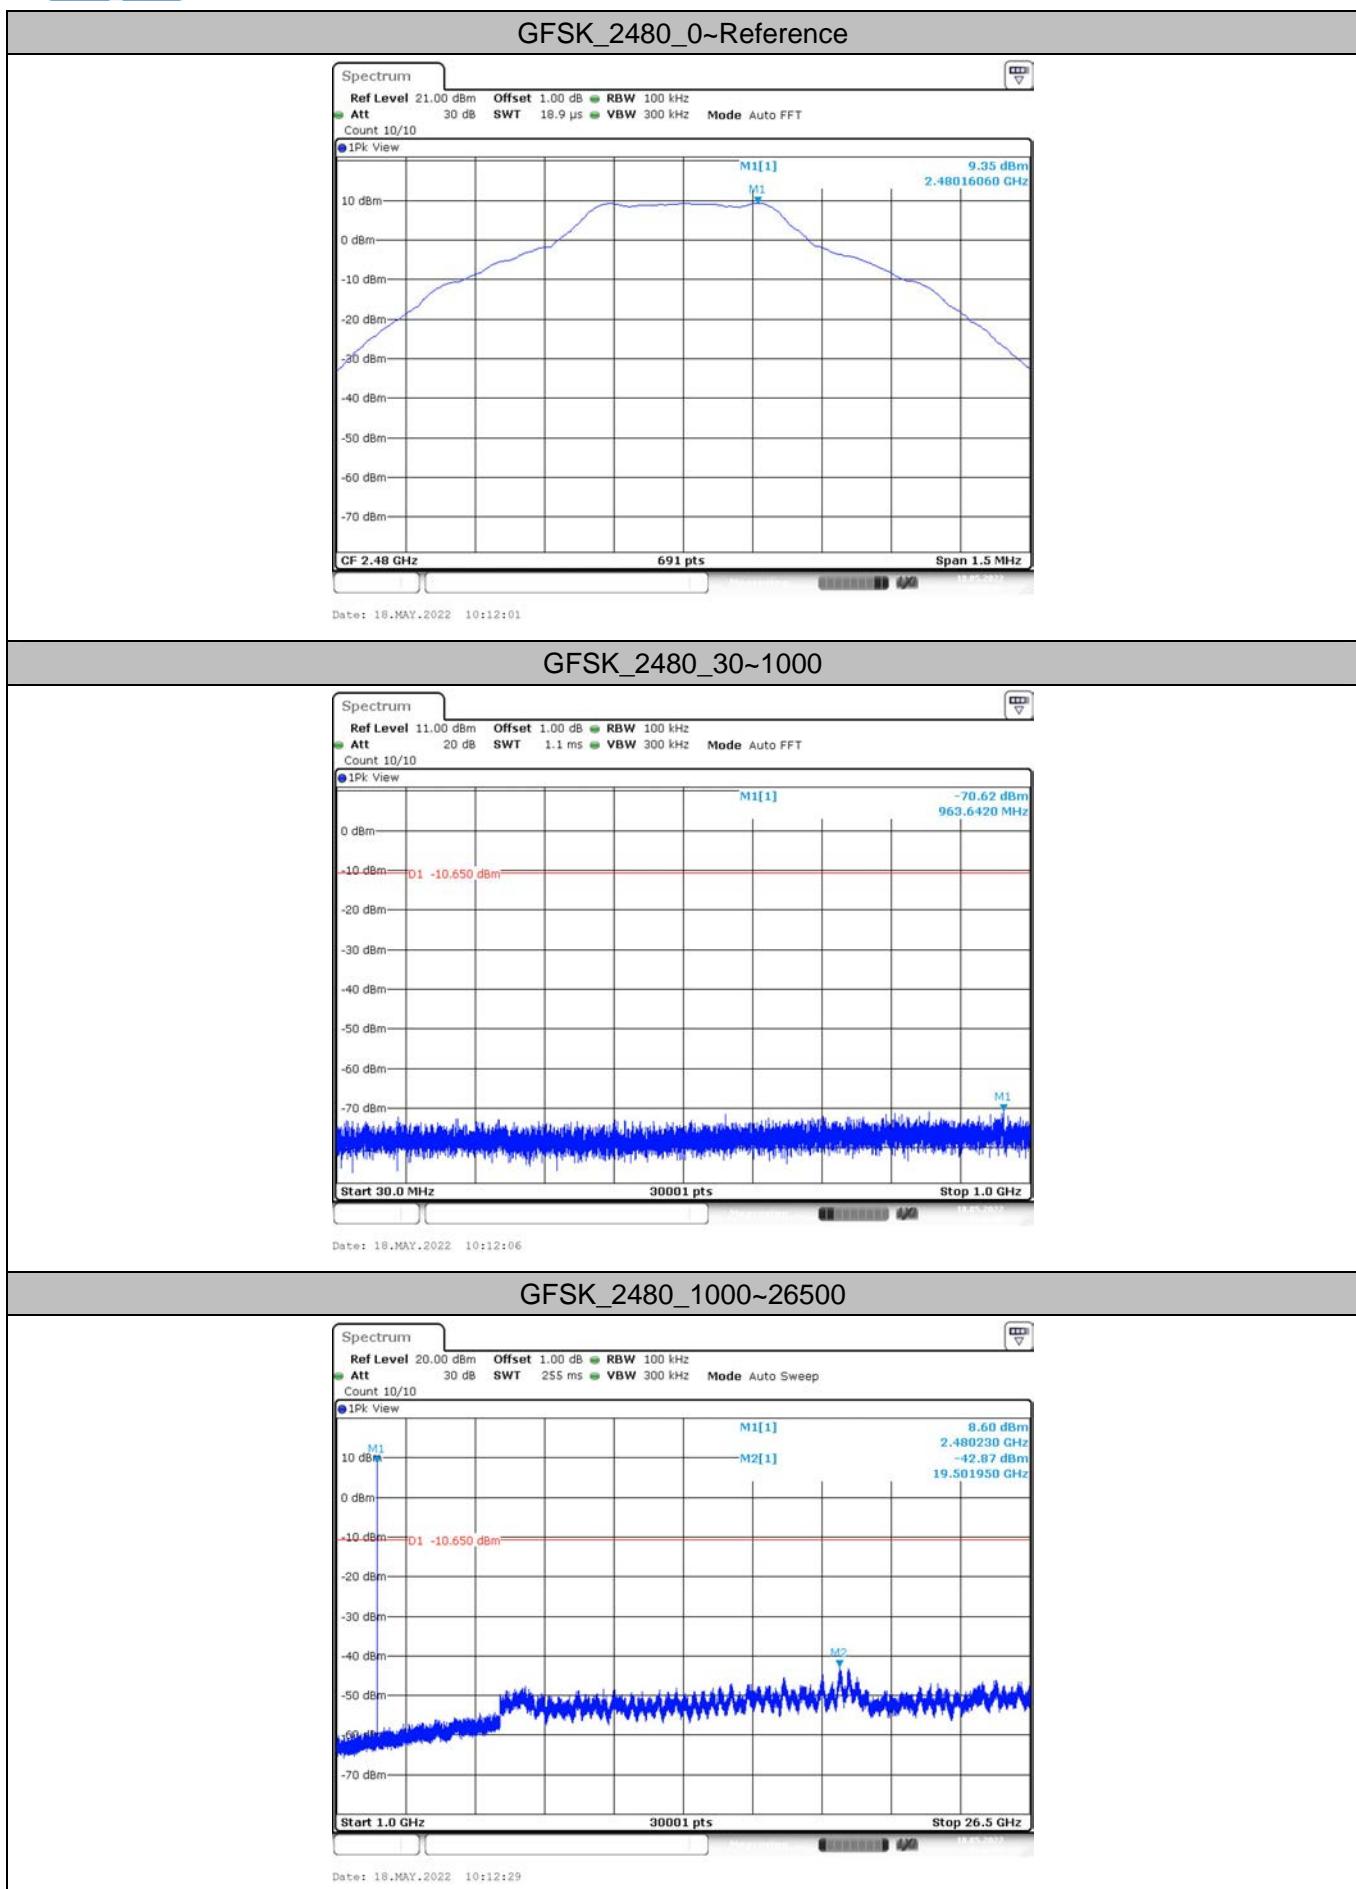


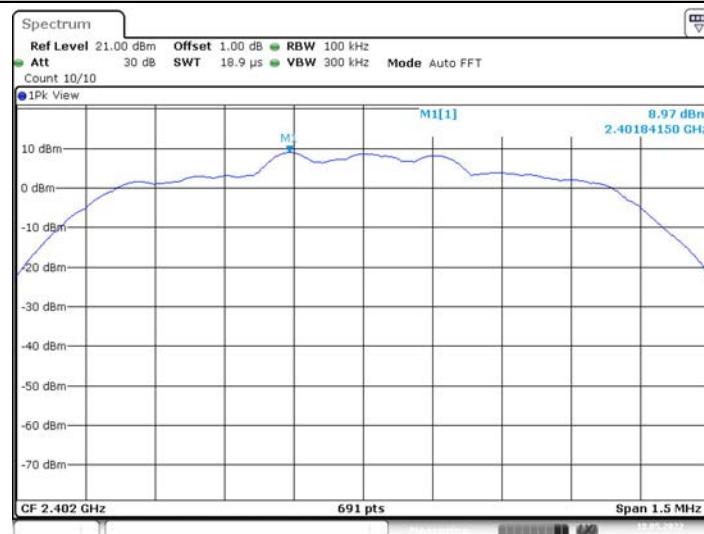π/4-DQPSK_2402_0~Reference


Date: 18.MAY.2022 10:16:18

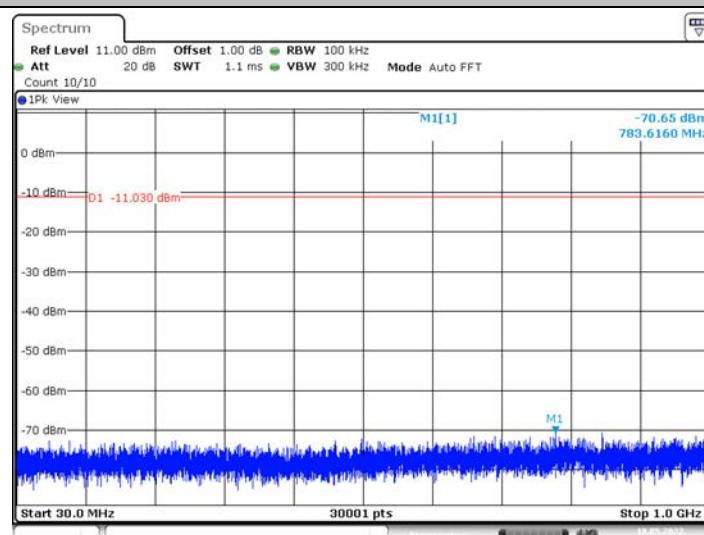π/4-DQPSK_2402_30~1000


Date: 18.MAY.2022 10:16:23

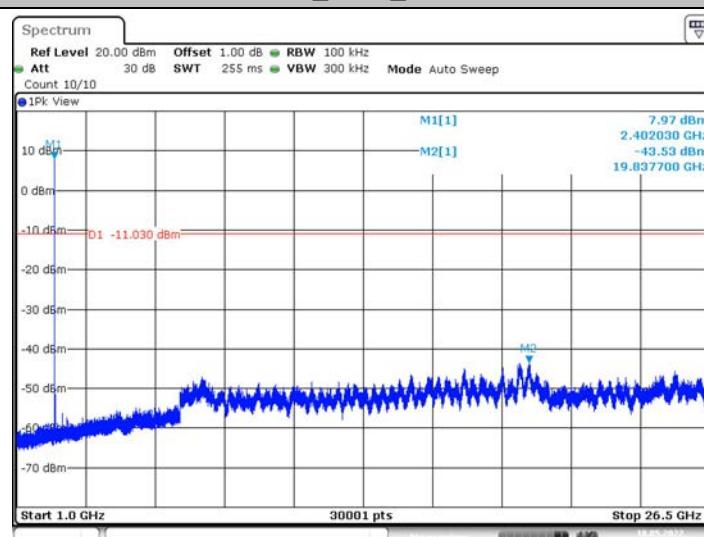π/4-DQPSK_2402_1000~26500


Date: 18.MAY.2022 10:16:47

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011




Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Ac-

creditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.org.cn)


中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China

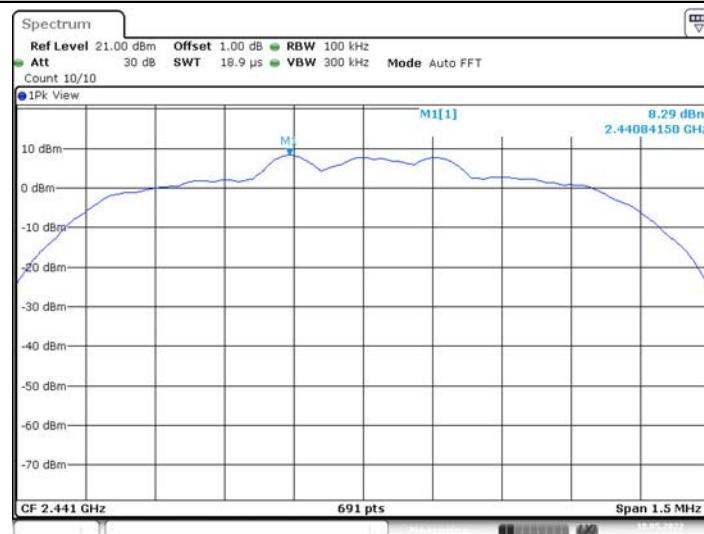
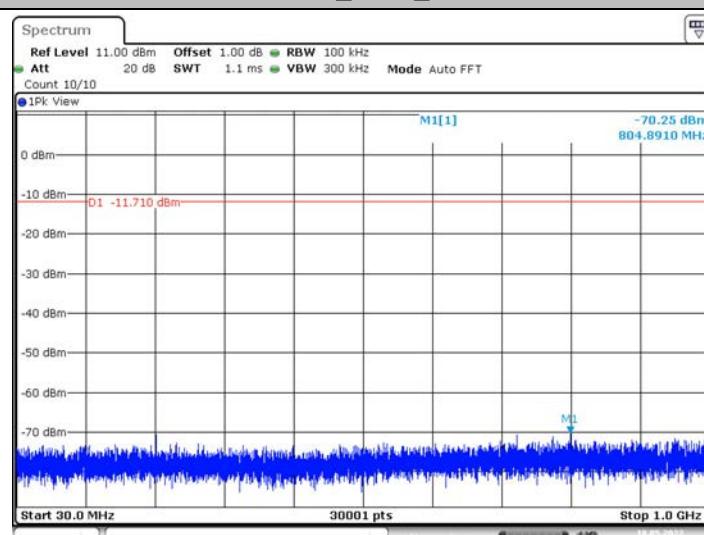
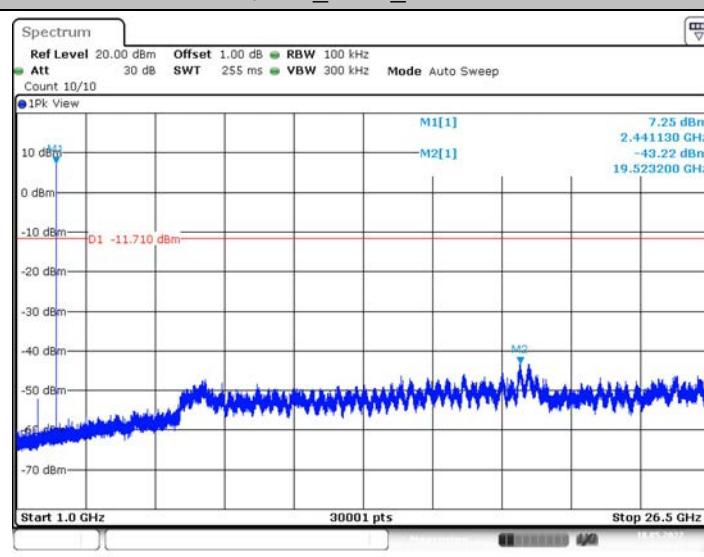
π/4-DQPSK_2441_0~Reference

π/4-DQPSK_2441_30~1000

π/4-DQPSK_2441_1000~26500


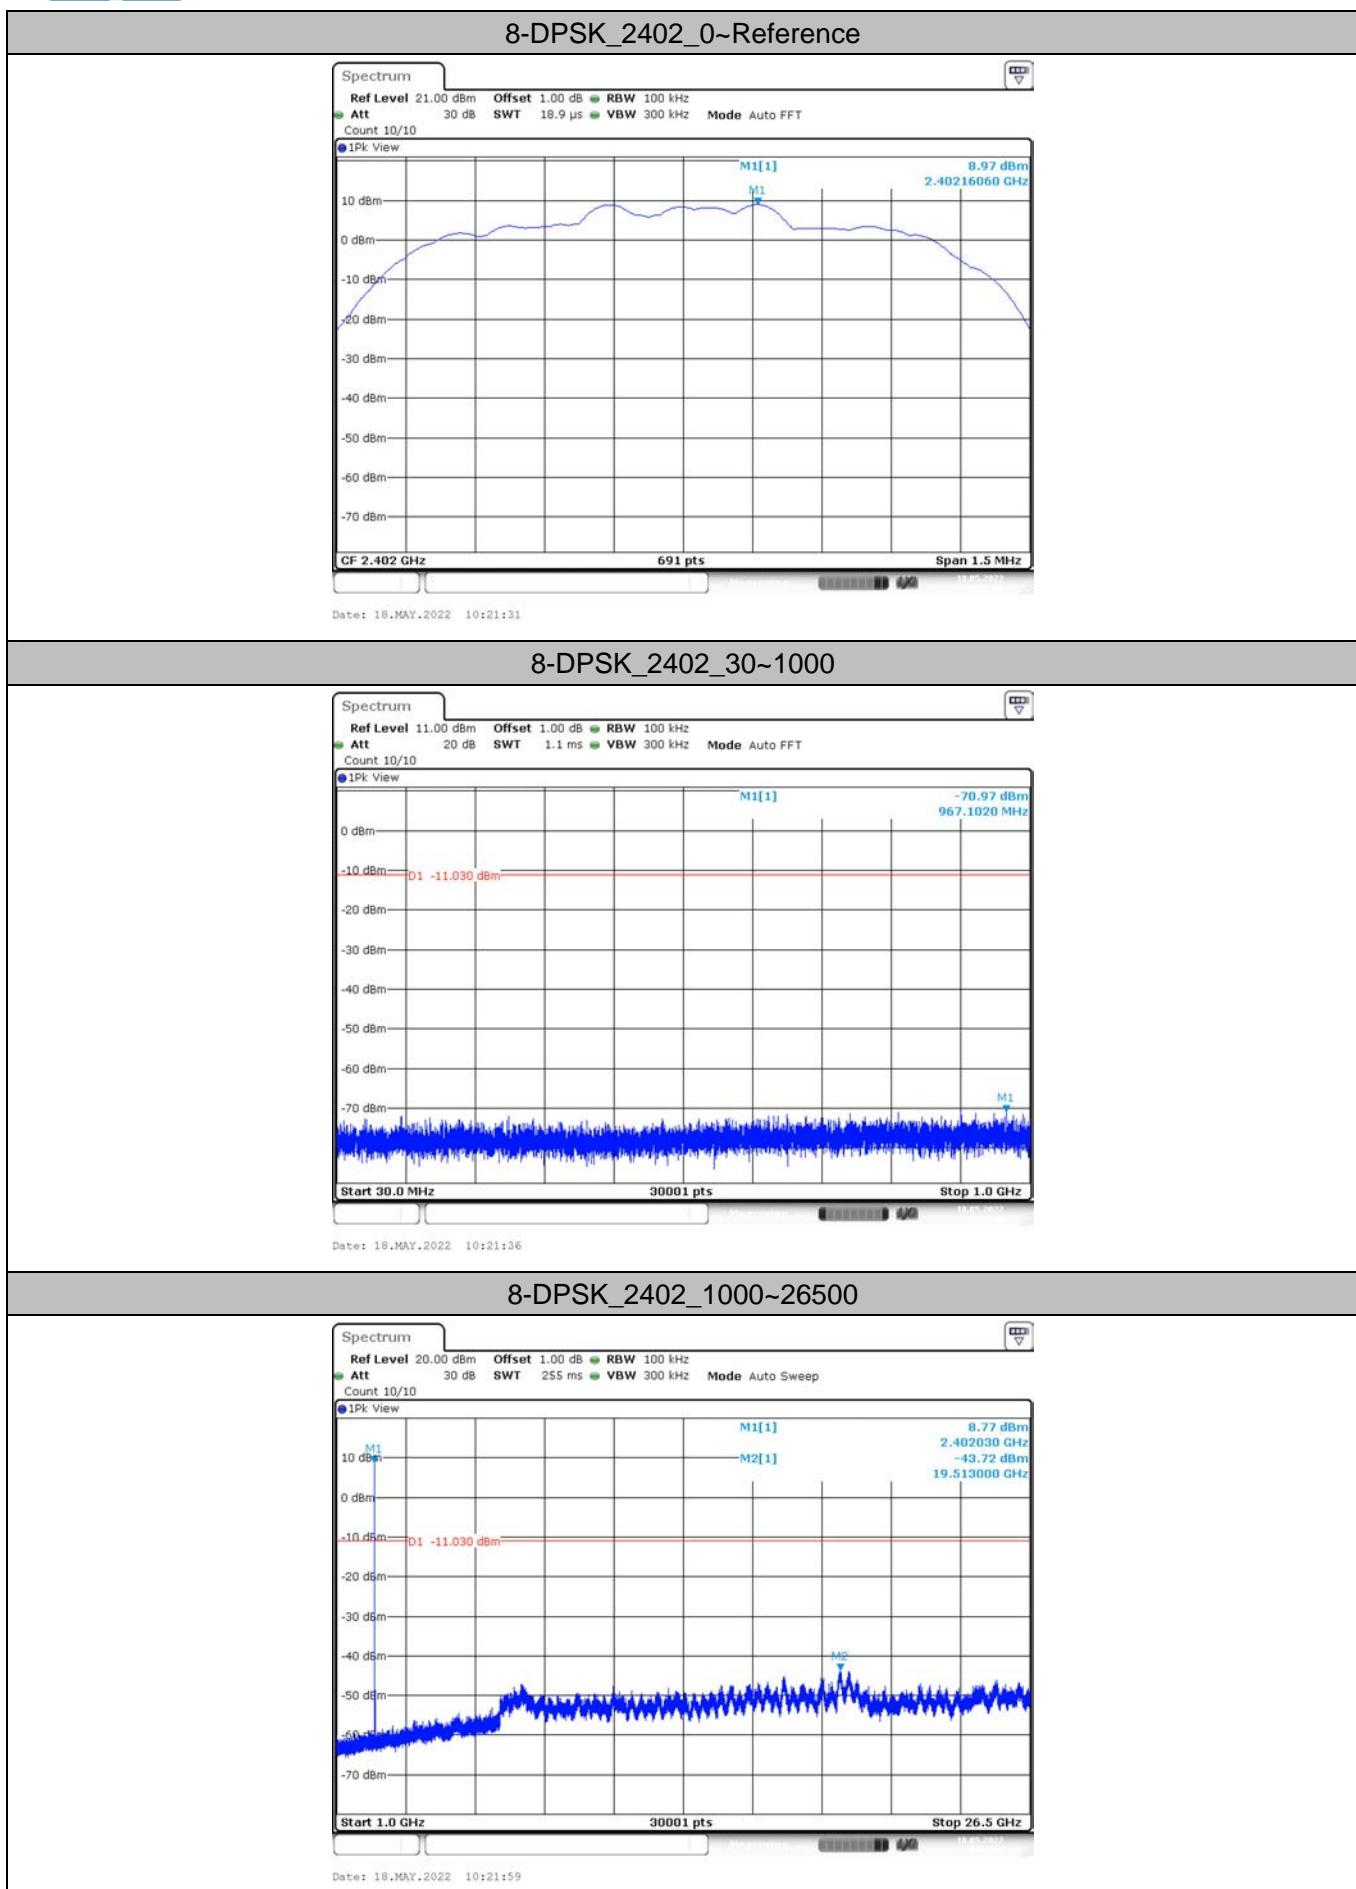
CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

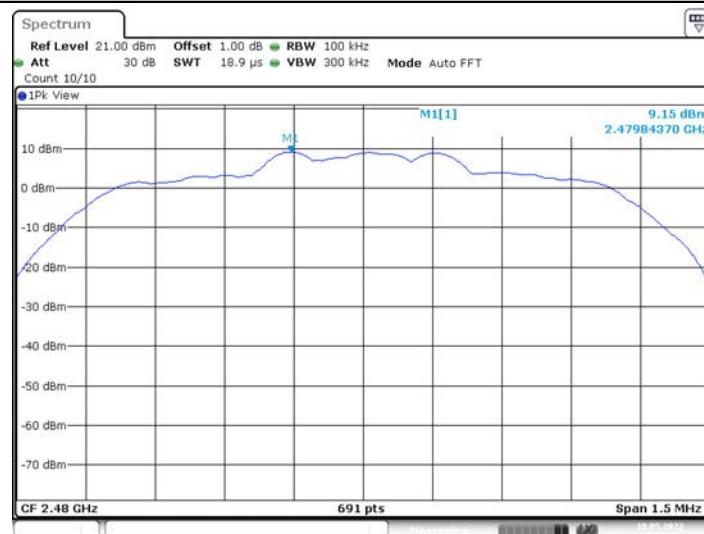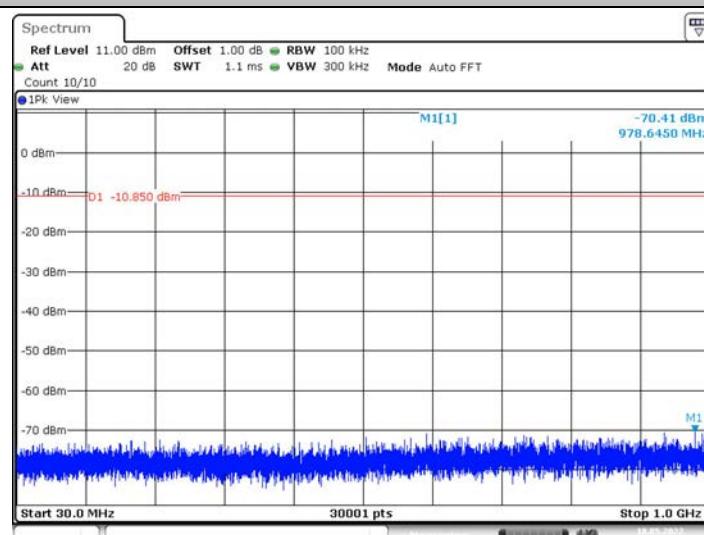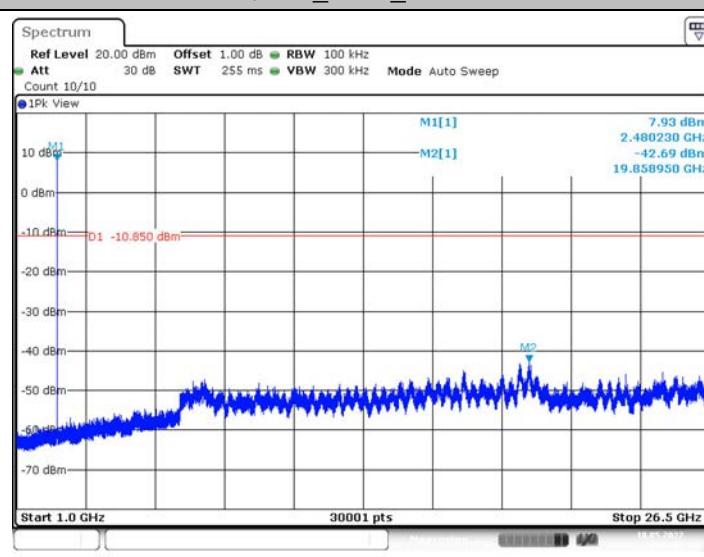
Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn


π/4-DQPSK_2480_0~Reference

π/4-DQPSK_2480_30~1000

π/4-DQPSK_2480_1000~26500

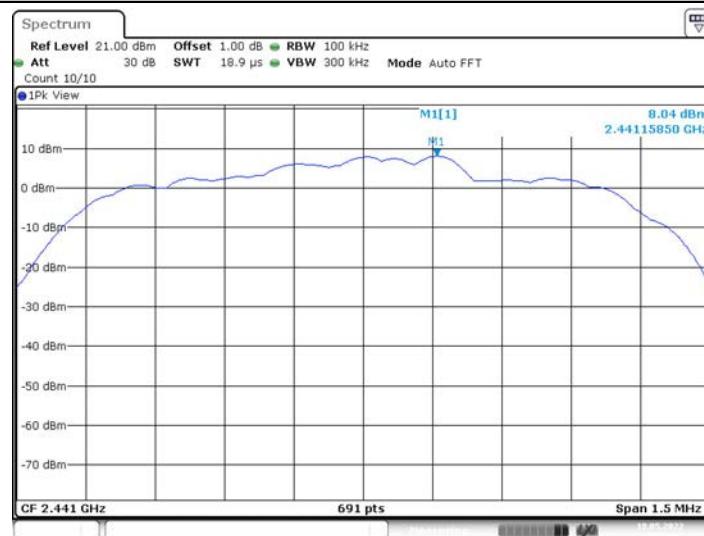


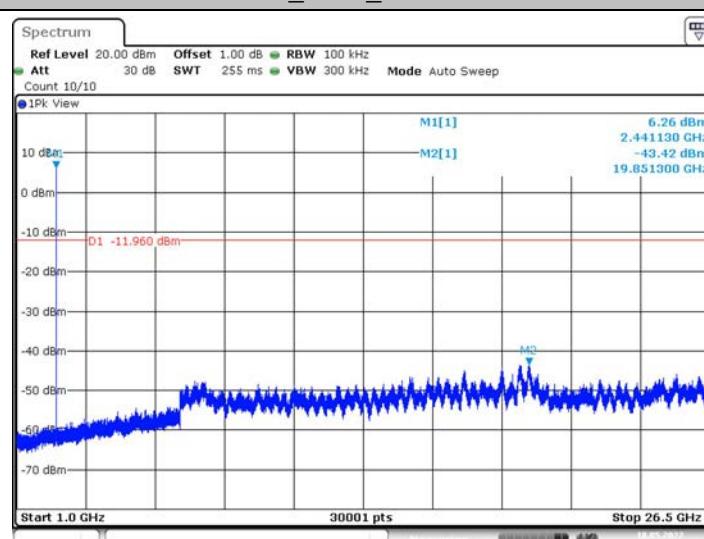
8-DPSK_2441_0~Reference

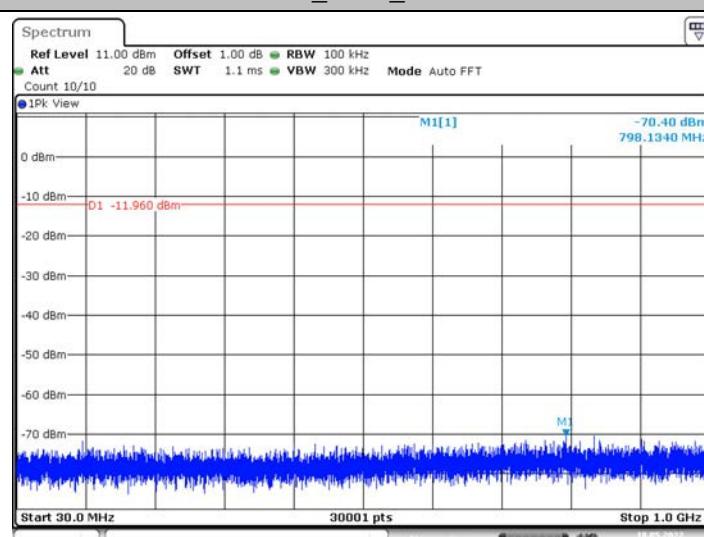


8-DPSK_2441_30~1000




8-DPSK_2441_1000~26500




8-DPSK_2480_0~Reference

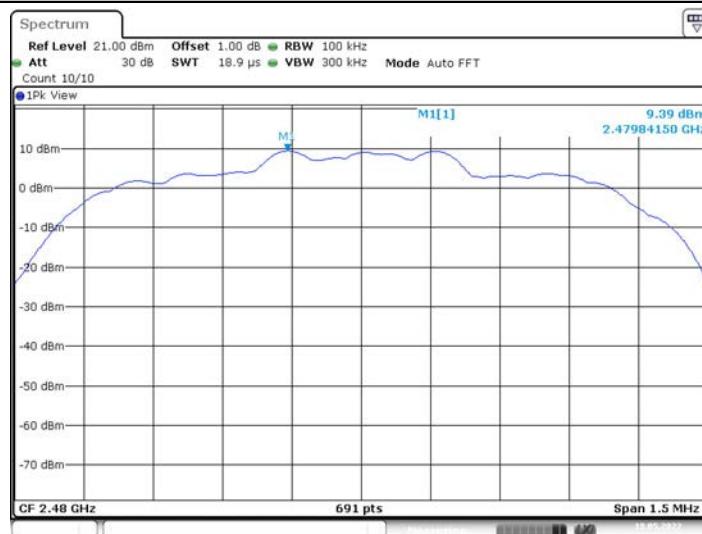

8-DPSK_2480_30~1000

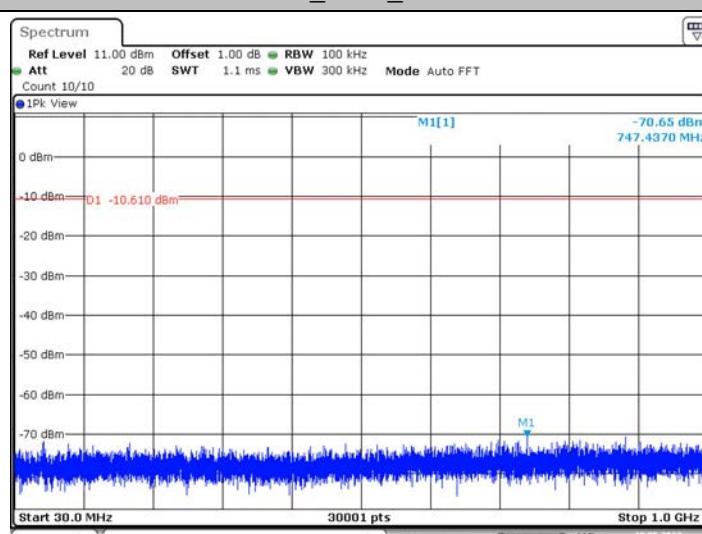

8-DPSK_2480_1000~26500

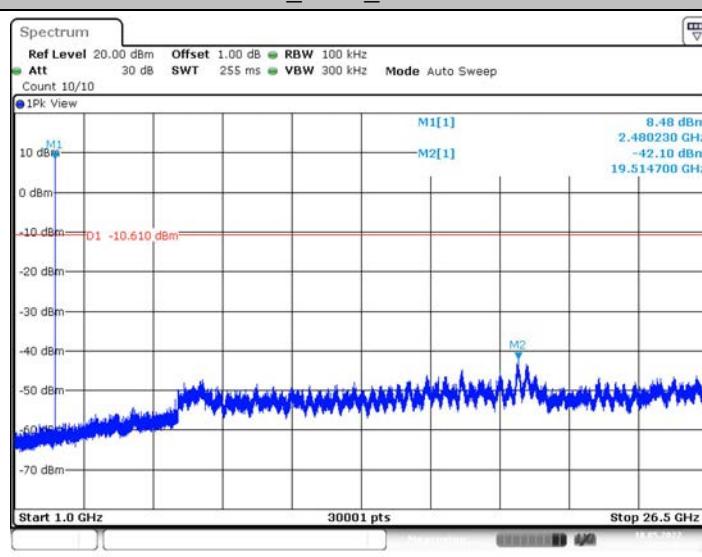

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

3.5. 20DB Bandwidth

Limit

N/A

Test Configuration



Test Procedure

5. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
6. OCB and 20dB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) \geq 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.




Test Mode

Please refer to the clause 2.4.

Test Results

Test Mode	Frequency[MHz]	20db EBW[MHz]	20dB Bandwidth *2/3 (kHz)	Verdict
GFSK	2402	0.807	538.00	PASS
	2441	0.807	538.00	PASS
	2480	0.804	536.00	PASS
$\pi/4$ -DQPSK	2402	1.242	828.00	PASS
	2441	1.212	808.00	PASS
	2480	1.212	808.00	PASS
8-DPSK	2402	1.251	834.00	PASS
	2441	1.248	832.00	PASS
	2480	1.248	832.00	PASS

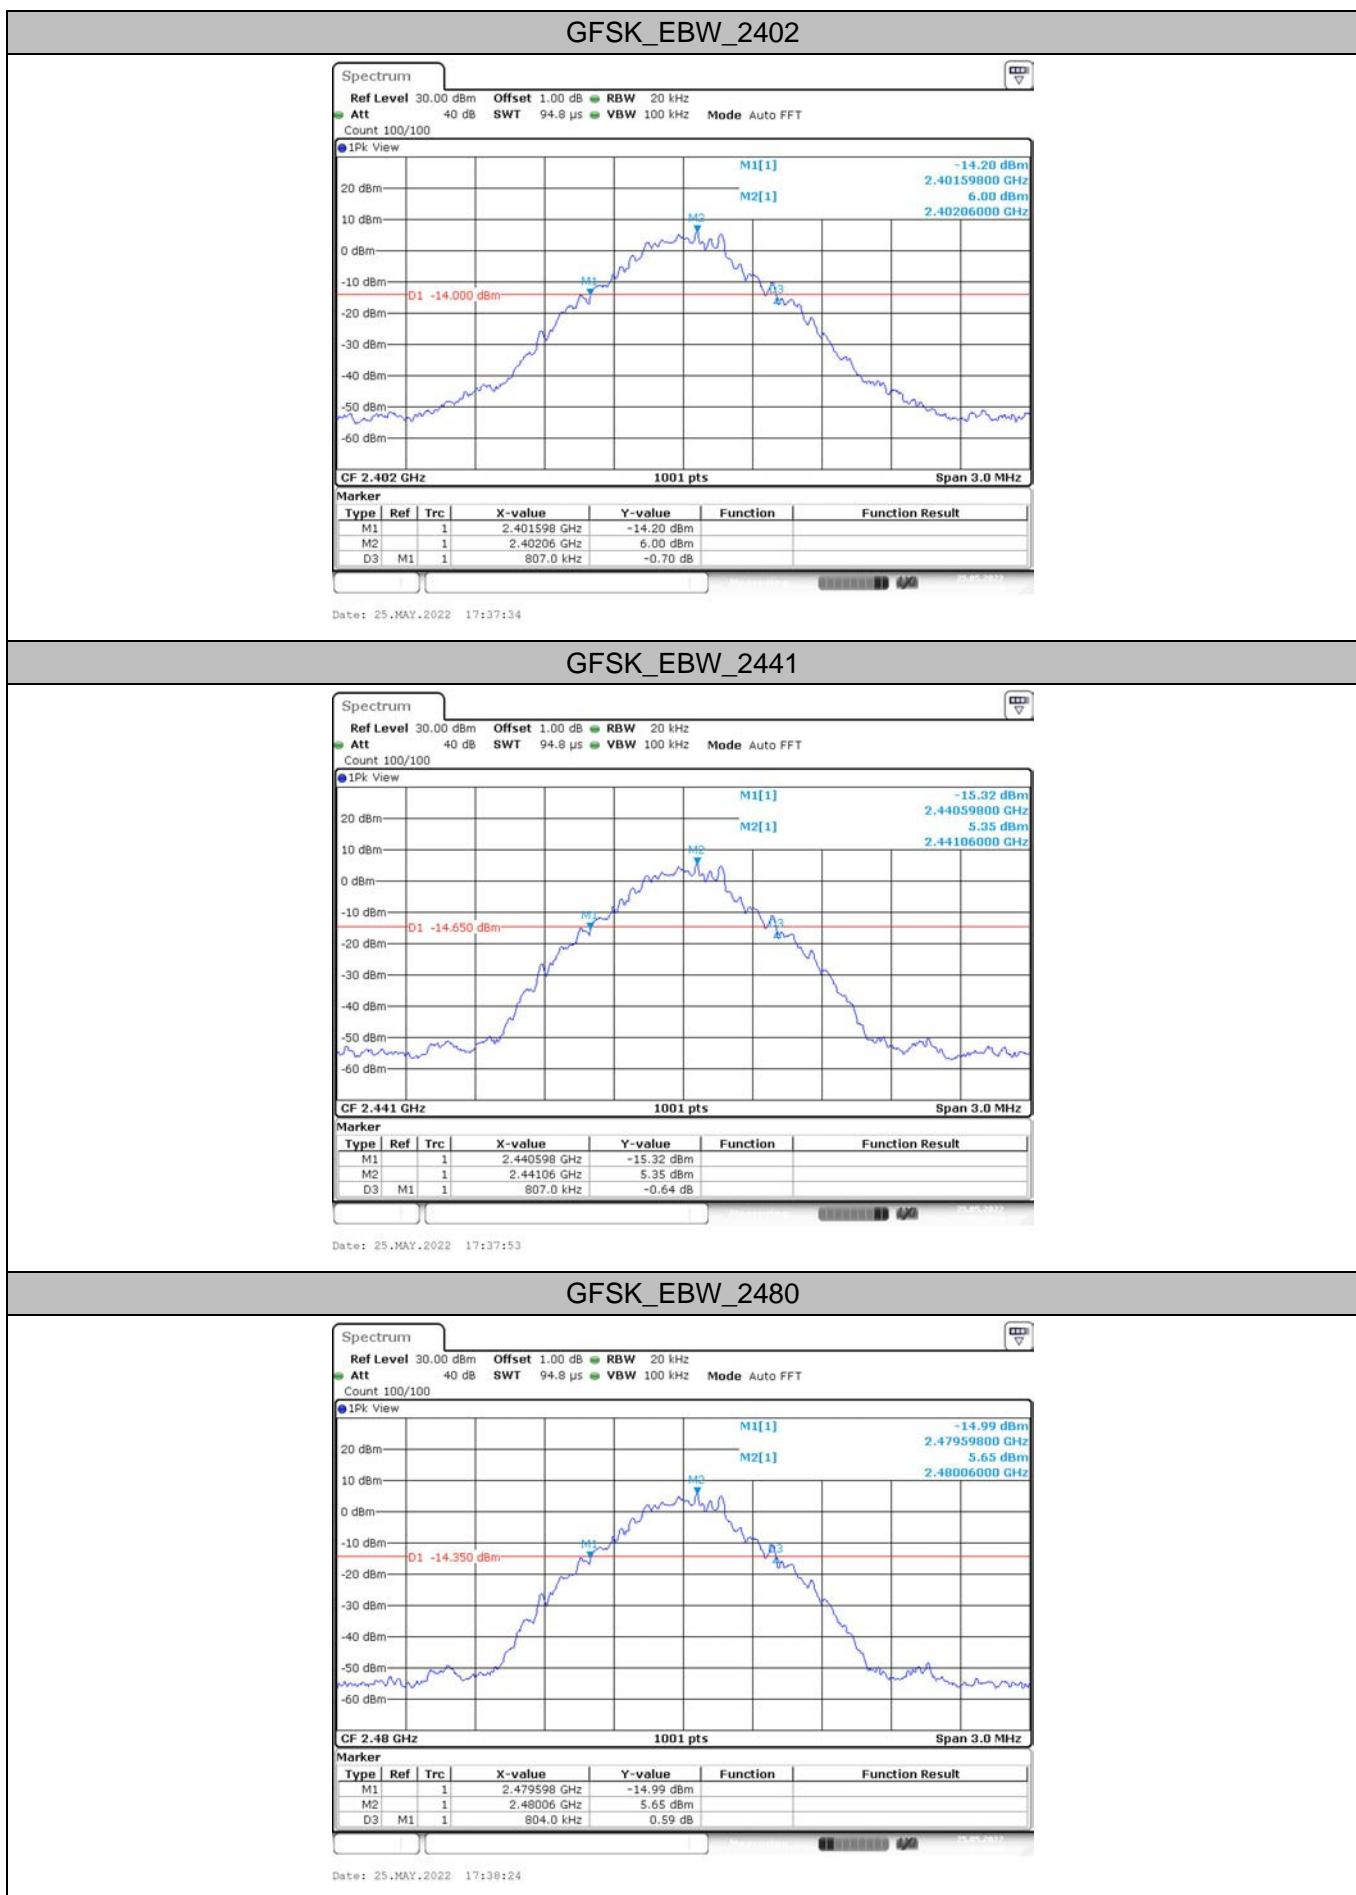

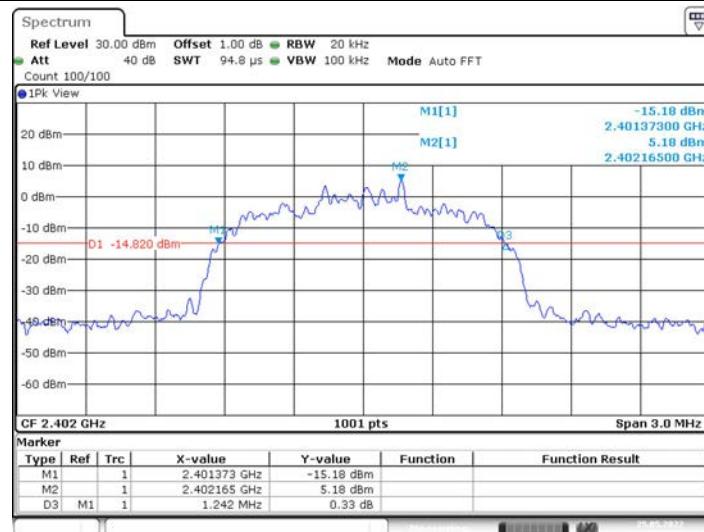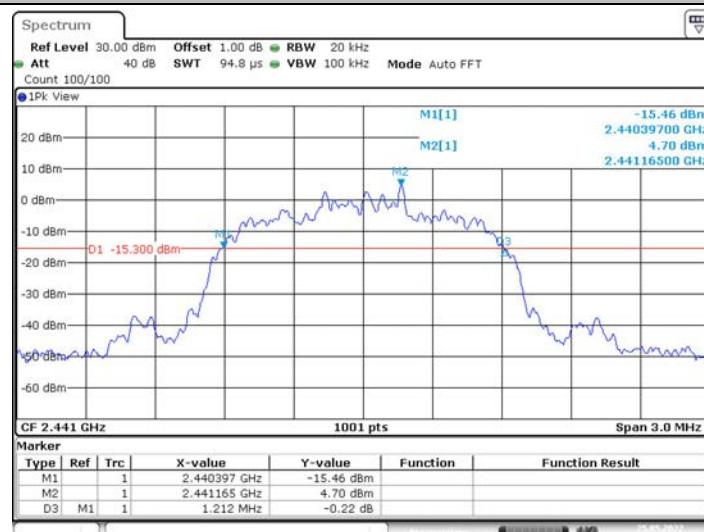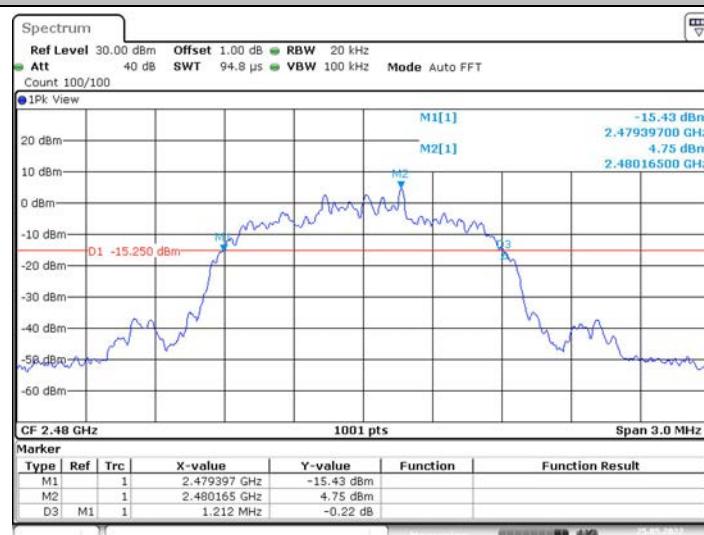
**π/4-DQPSK_EBW_2402****π/4-DQPSK_EBW_2441****π/4-DQPSK_EBW_2480**

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



8-DPSK_EBW_2402

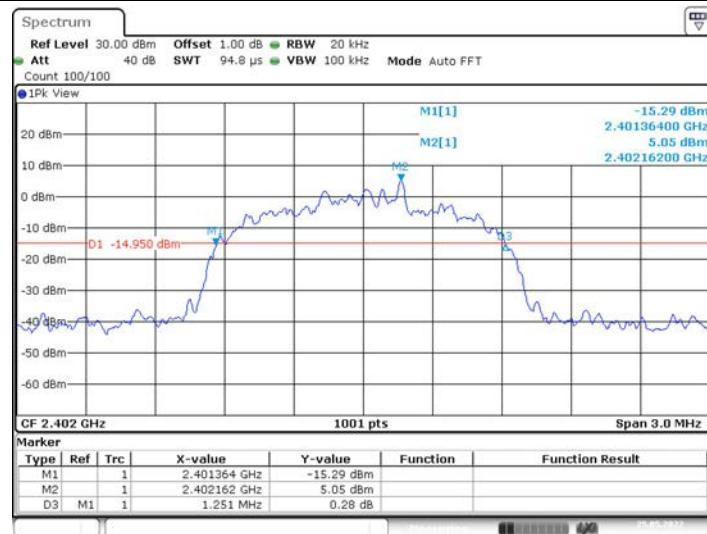

8-DPSK_EBW_2441



8-DPSK_EBW_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn


3.6. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

7. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
8. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) \geq 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


Test Mode

Please refer to the clause 2.4.


**Test Results**

Test Mode	Frequency[MHz]	Result[MHz]	Limit[kHz]	Verdict
GFSK	Hop_2441	1	>538.00	PASS
$\pi/4$ -DQPSK	Hop_2441	1	>808.00	PASS
8-DPSK	Hop_2441	1	>832.00	PASS

GFSK_Hop_2441

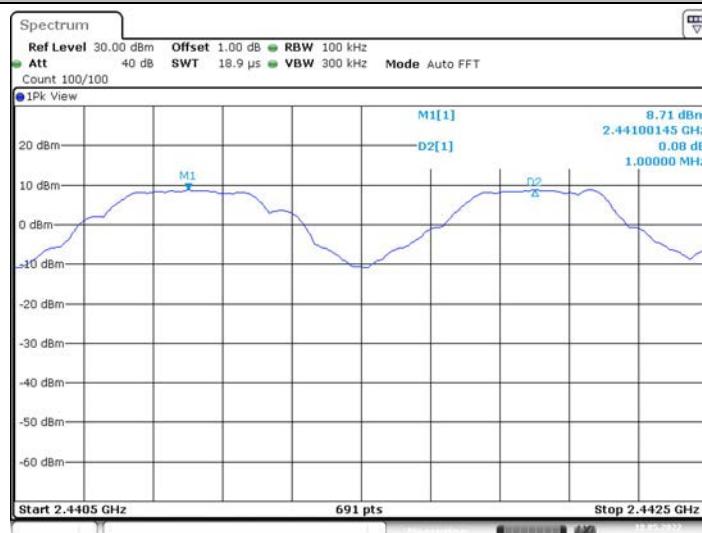


Date: 18.MAY.2022 10:28:49

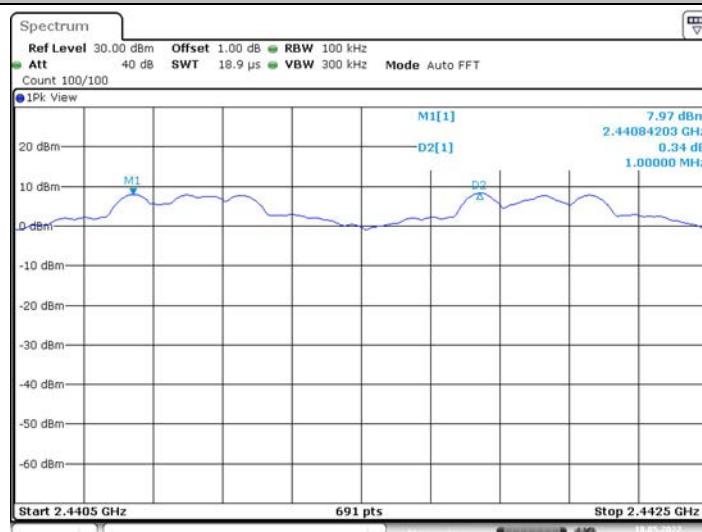 $\pi/4$ -DQPSK_Hop_2441


Date: 18.MAY.2022 10:48:15

8-DPSK_Hop_2441

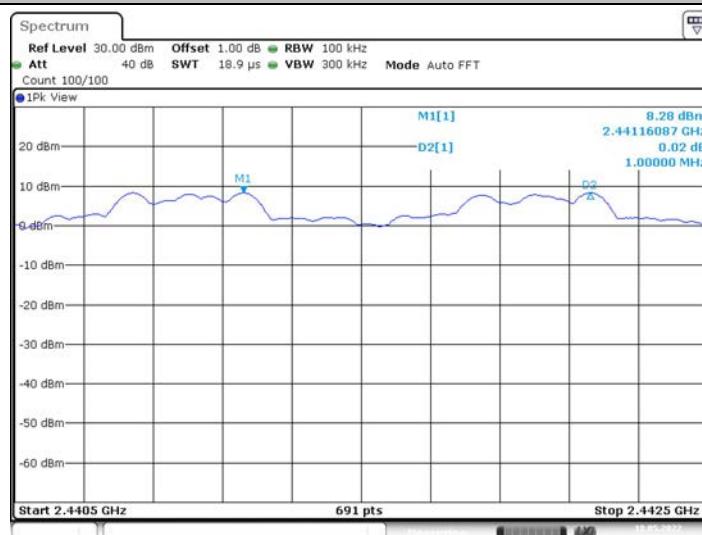

Date: 18.MAY.2022 10:58:05

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnca.gov.cn)

中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of China


3.7. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW \geq RBW, Sweep time= Auto.



Test Mode

Please refer to the clause 2.4.


Test Result

Modulation type	Channel number	Limit	Result
GFSK	79	\geq 15.00	Pass
$\pi/4$ -DQPSK	79		
8DPSK	79		

GFSK

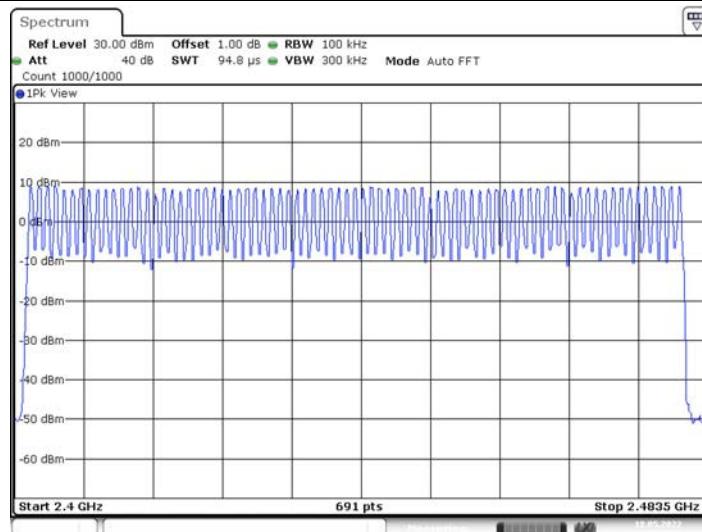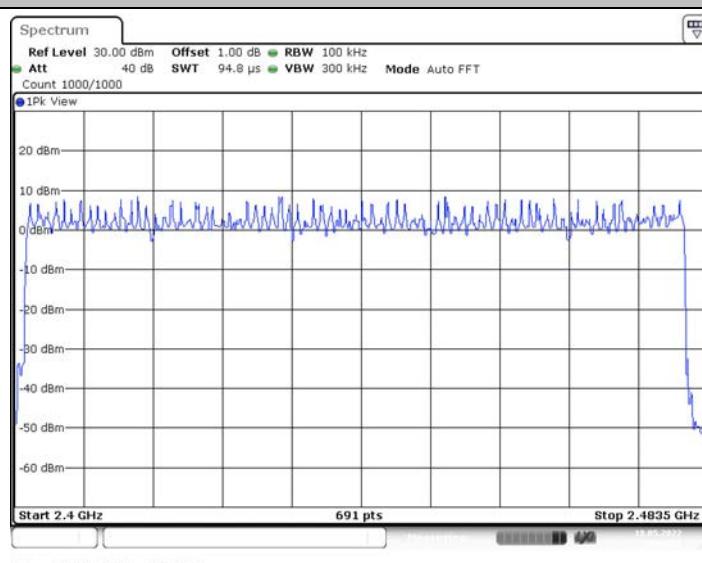 $\pi/4$ -DQPSK

8-DPSK

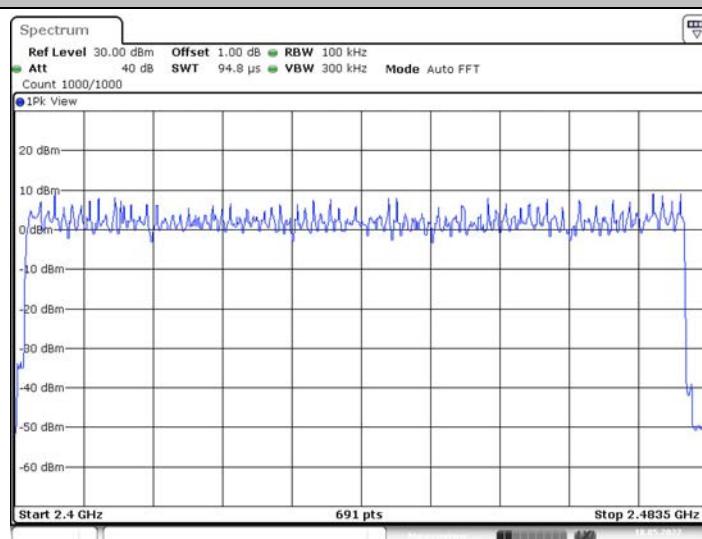

Date: 18.MAY.2022 10:59:12

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

3.8. Dwell Time

Limit

Section	Test Item	Limit
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Spectrum Setting: $RBW=1\text{MHz}$, $VBW \geq RBW$.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.4.

**Test Result**


Modulation type	Channel	Frequency [MHz]	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
GFSK	DH1	2441	0.38	121.60	31.60	≤ 0.40	Pass
	DH3	2441	1.62	259.20	31.60		
	DH5	2441	2.86	305.07	31.60		
$\pi/4$ -DQPSK	2DH1	2441	0.38	121.60	31.60	≤ 0.40	Pass
	2DH3	2441	1.23	196.80	31.60		
	2DH5	2441	2.87	306.13	31.60		
8-DPSK	3DH1	2441	0.38	121.60	31.60	≤ 0.40	Pass
	3DH3	2441	1.63	260.80	31.60		
	3DH5	2441	2.87	306.13	31.60		

Note: 1DH1/2DH1/3DH1 Total of Dwell= Pulse Time*(1600/2)*31.6/79


1DH3/2DH3/3DH3 Total of Dwell= Pulse Time*(1600/4)*31.6/79

1DH5/2DH5/3DH5 Total of Dwell= Pulse Time*(1600/6)*31.6/79


GFSK_2402

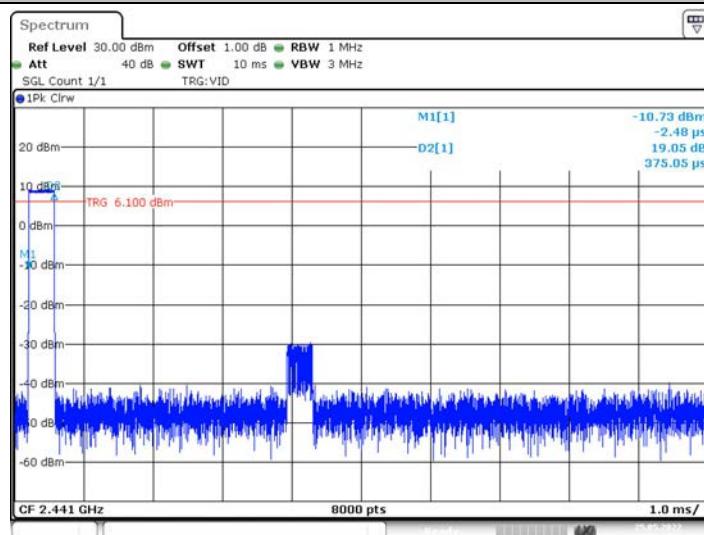

GFSK_2441

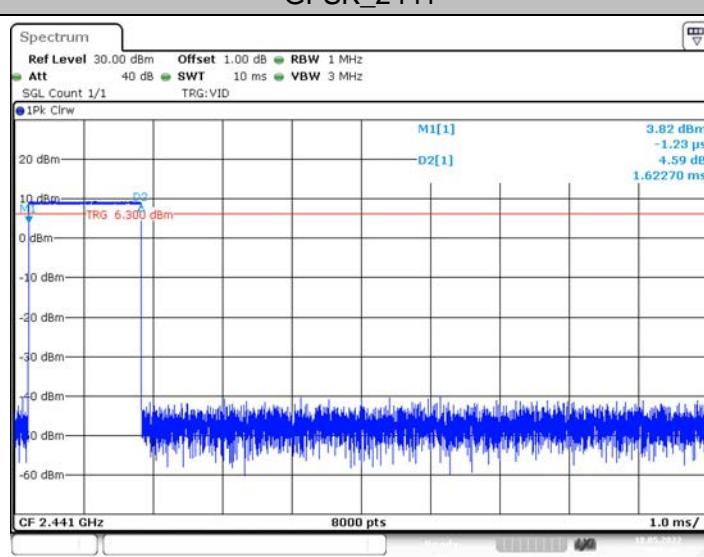

GFSK_2480

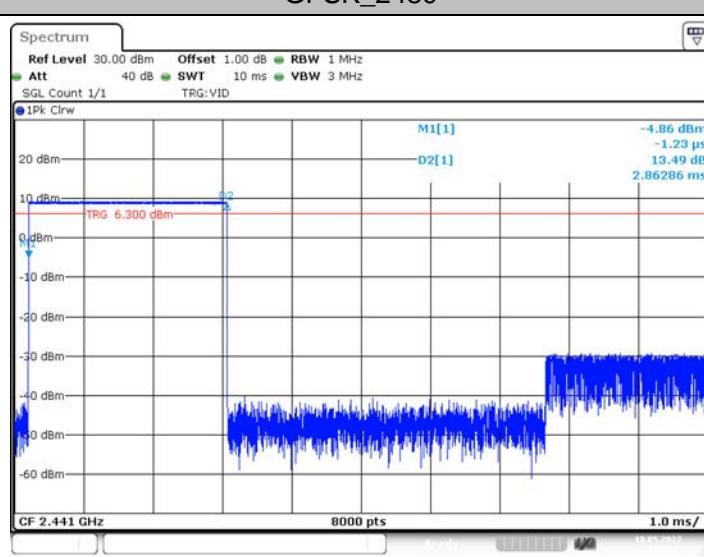


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059


Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn


中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of China

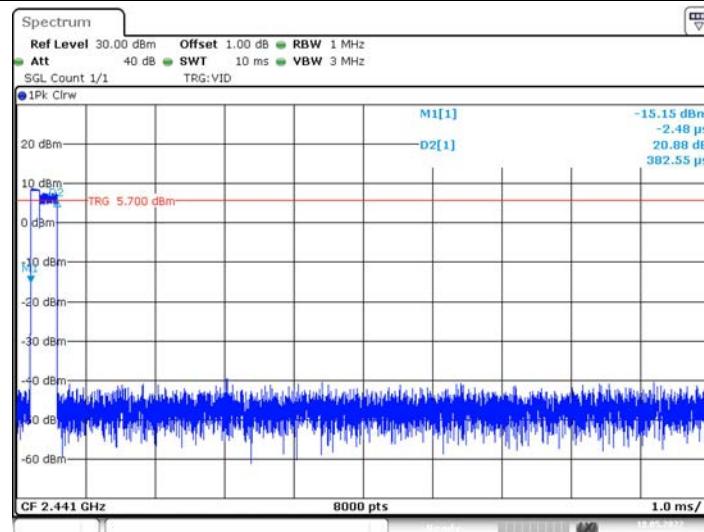π/4-DQPSK_2402


Date: 18.MAY.2022 10:51:20

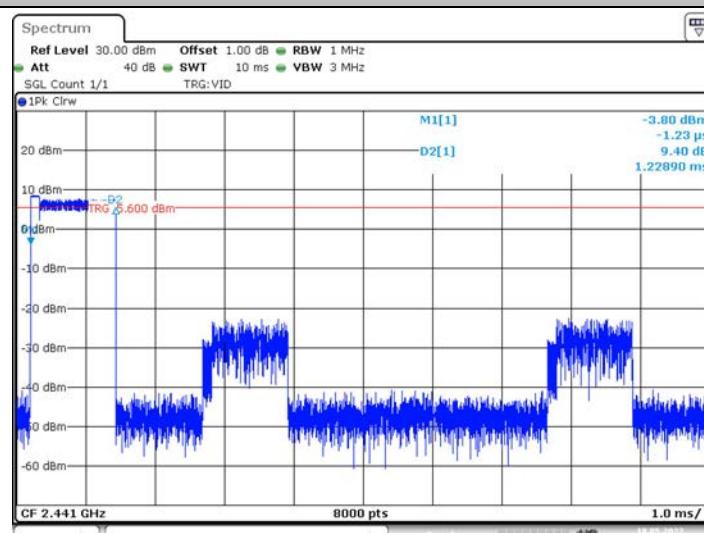π/4-DQPSK_2441


Date: 18.MAY.2022 10:52:13

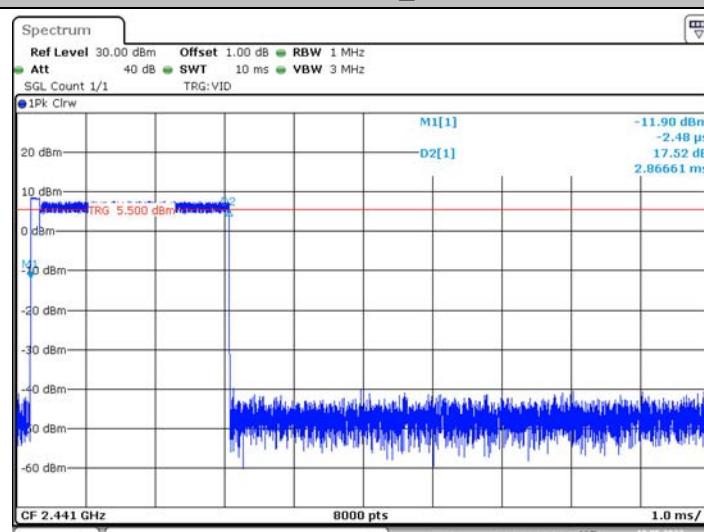π/4-DQPSK_2480


Date: 18.MAY.2022 10:49:40


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


8-DPSK_2402

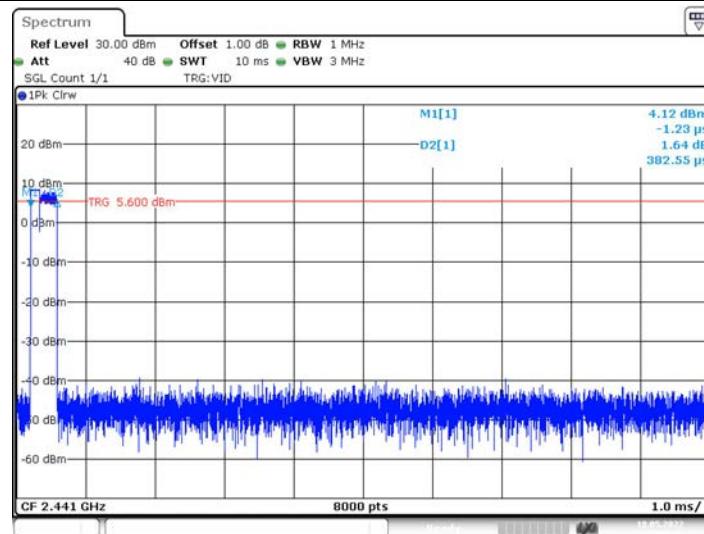

8-DPSK_2441

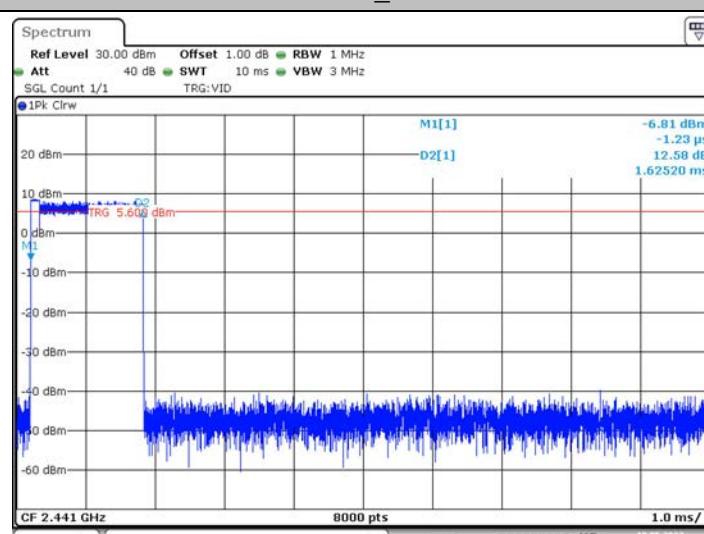

8-DPSK_2480

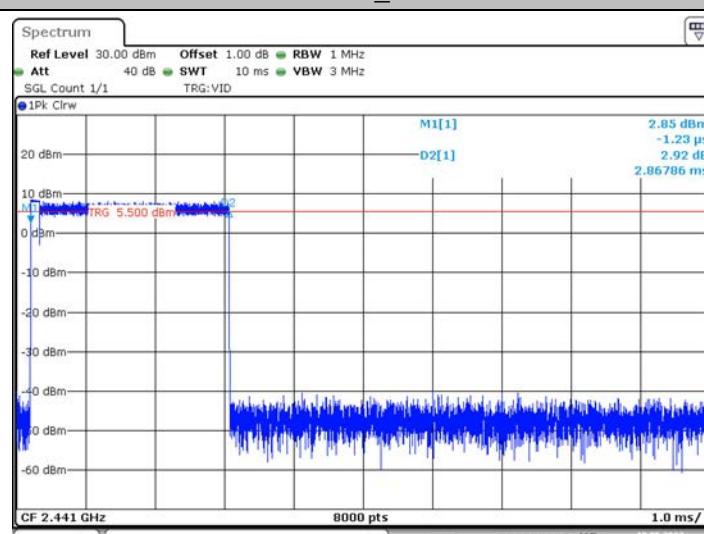

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn


3.9. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW > 20DB Bandwidth.
 - (2) Set the video bandwidth (VBW) \geq RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


Test Mode

Please refer to the clause 2.4.


Test Result

Test Mode	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
GFSK	2402	9.81	<=30	PASS
	2441	9.34	<=30	PASS
	2480	9.83	<=30	PASS
$\pi/4$ -DQPSK	2402	9.17	<=30	PASS
	2441	8.46	<=30	PASS
	2480	9.64	<=30	PASS
8-DPSK	2402	9.10	<=30	PASS
	2441	8.46	<=30	PASS
	2480	9.60	<=30	PASS


GFSK_2402

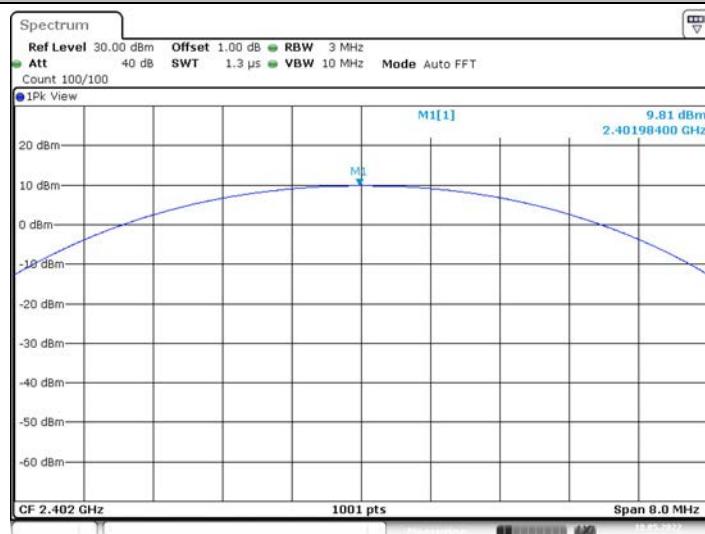

GFSK_2441


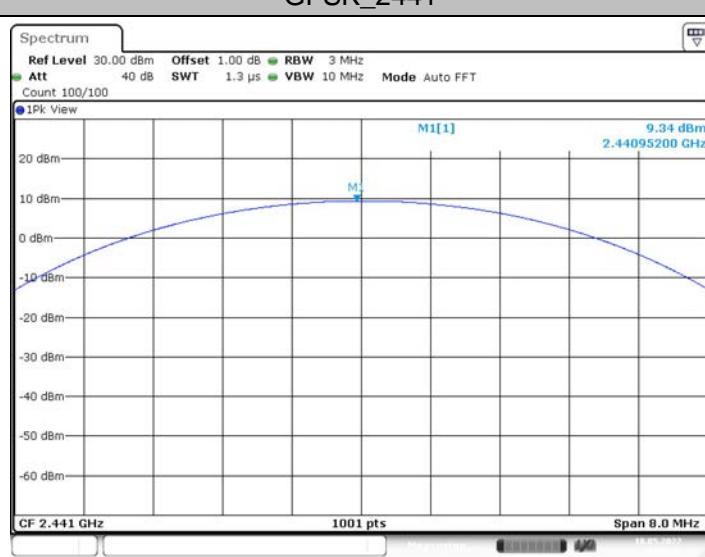


GFSK_2480

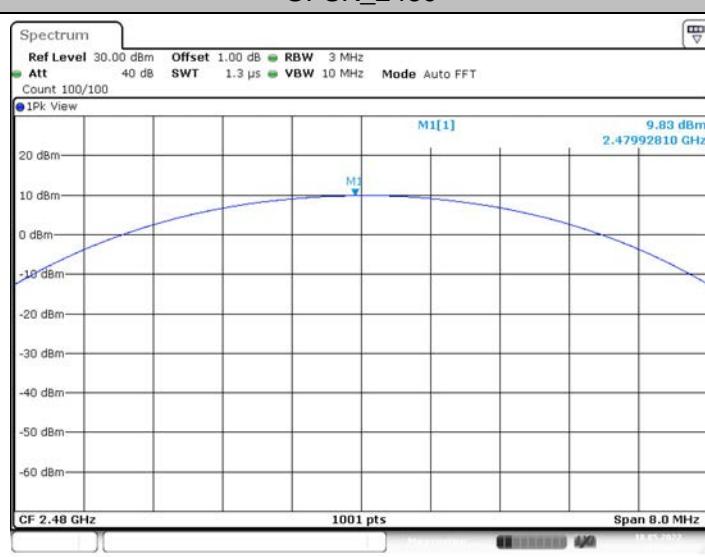

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

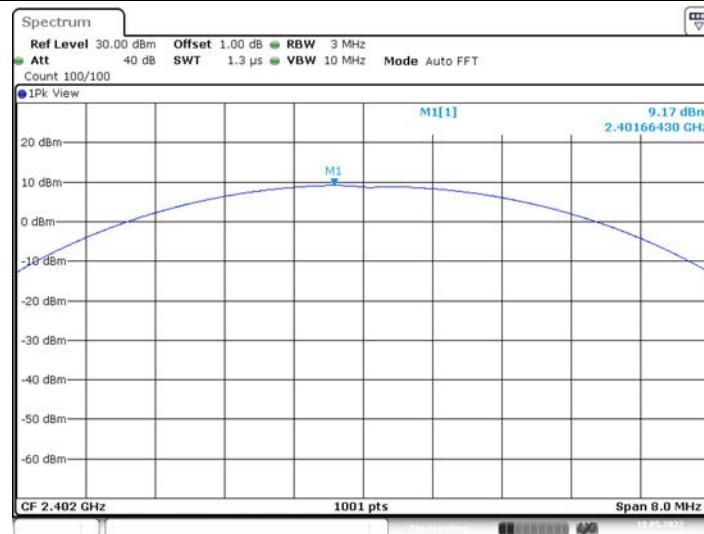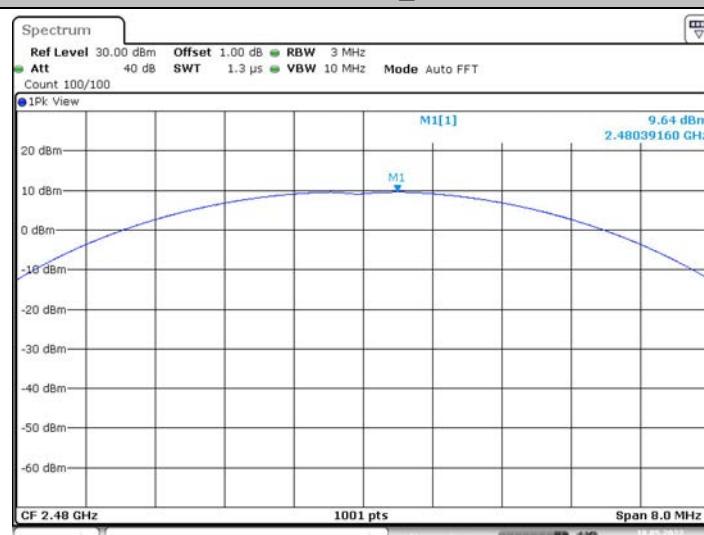
**π/4-DQPSK_2402****π/4-DQPSK_2441****π/4-DQPSK_2480**

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



8-DPSK_2402

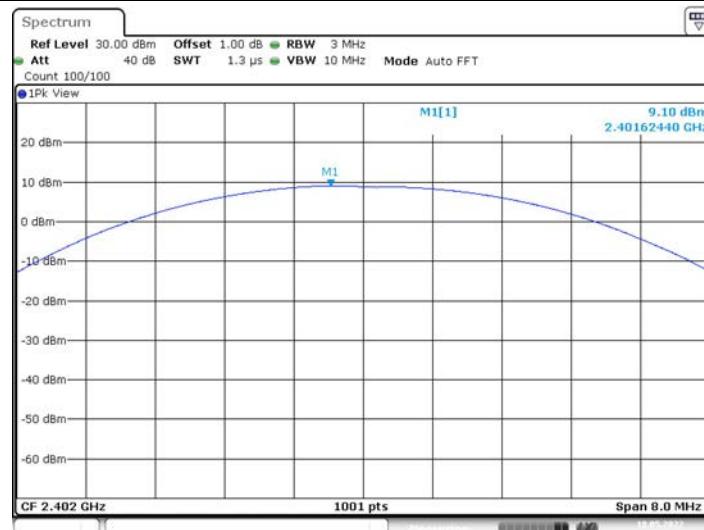

8-DPSK_2441

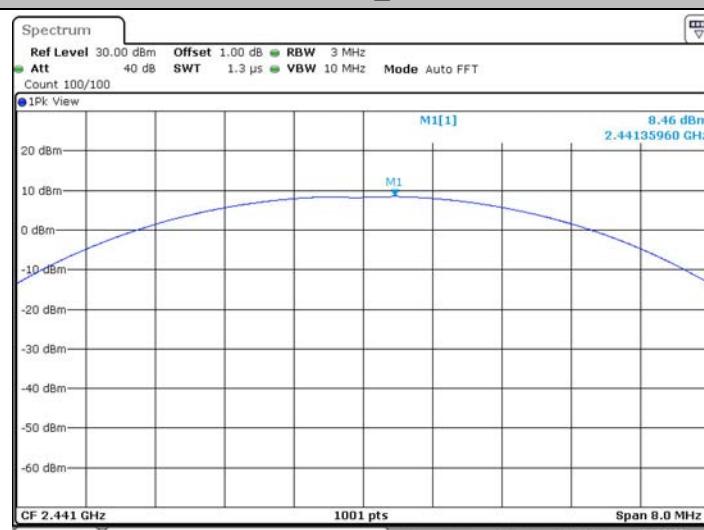

8-DPSK_2480



CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

3.10. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.

3. Spectrum Setting:

Set analyzer center frequency to test channel center frequency.

Set the span to 0Hz

Set the RBW to 10MHz

Set the VBW to 10MHz

Detector: Peak

Sweep time: Auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.


Test Mode

Please refer to the clause 2.4.

Test Result


Test Mode	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
GFSK	2402	2.87	3.73	76.94	0.35	1
	2441	2.86	3.72	76.88	0.35	1
	2480	2.86	3.73	76.68	0.35	1
$\pi/4$ -DQPSK	2402	2.87	3.73	76.94	0.35	1
	2441	2.87	3.73	76.94	0.35	1
	2480	2.87	3.73	76.94	0.35	1
8-DPSK	2402	2.87	3.73	76.94	0.35	1
	2441	2.87	3.73	76.94	0.35	1
	2480	2.87	3.73	76.94	0.35	1

GFSK_2402

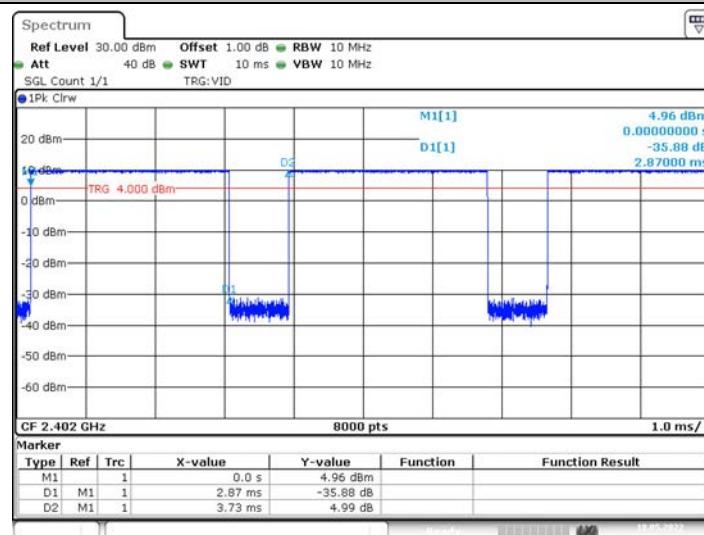


Date: 18.MAY.2022 10:08:15

GFSK_2441

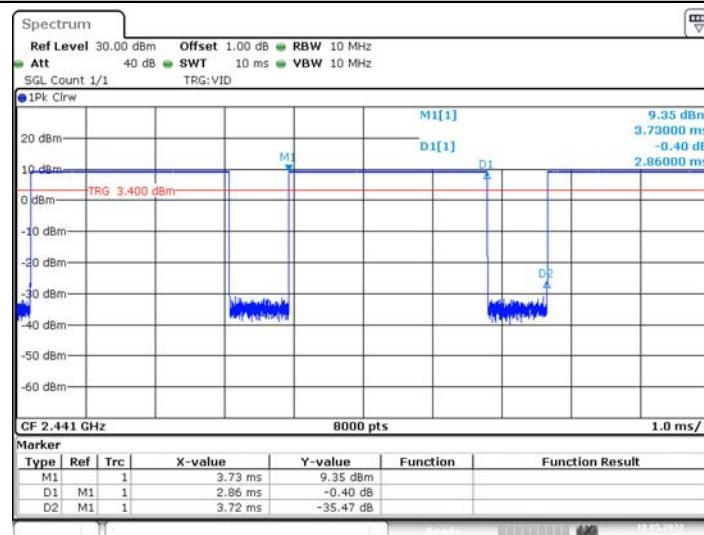

Date: 18.MAY.2022 10:09:53

GFSK_2480

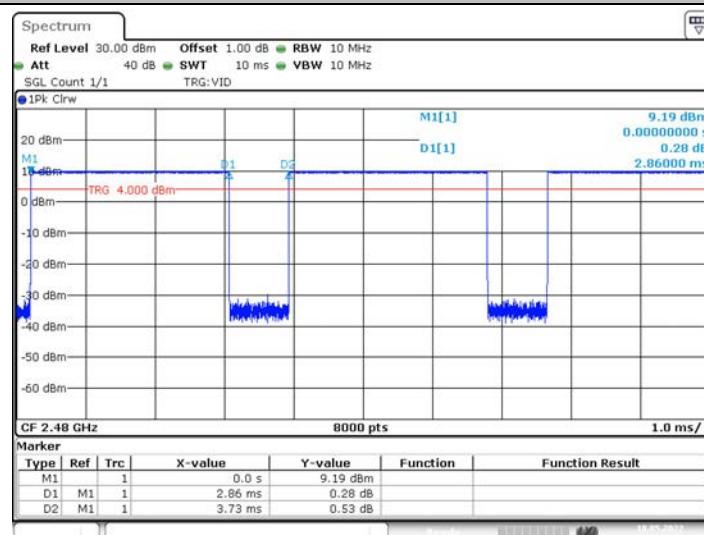

Date: 18.MAY.2022 10:11:17

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059




Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn


中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China

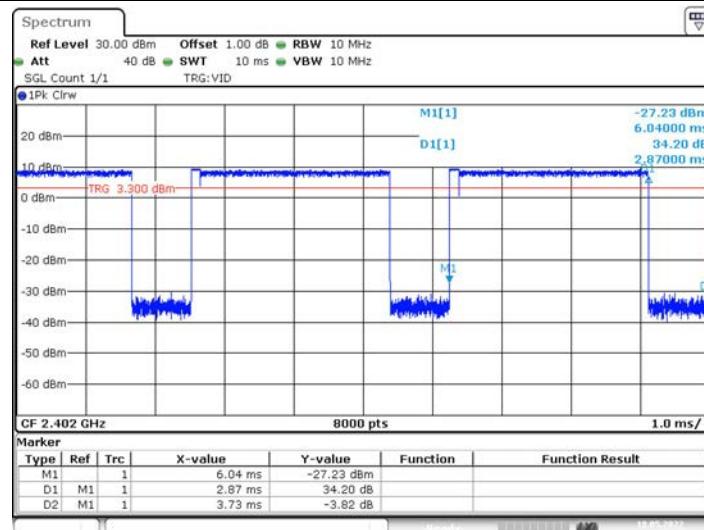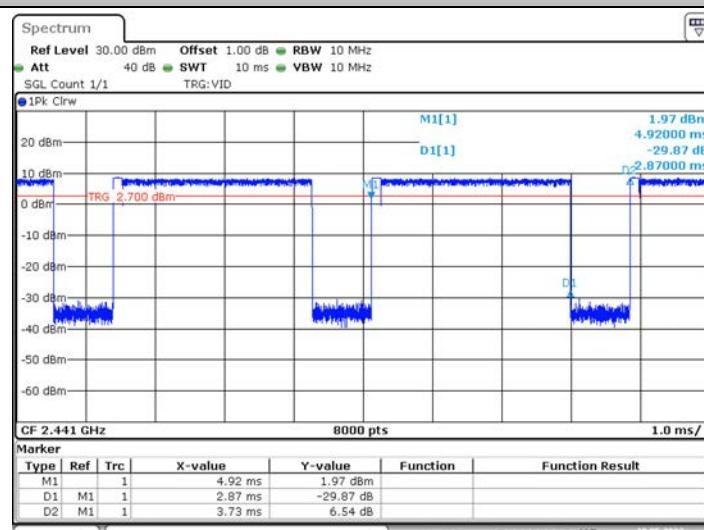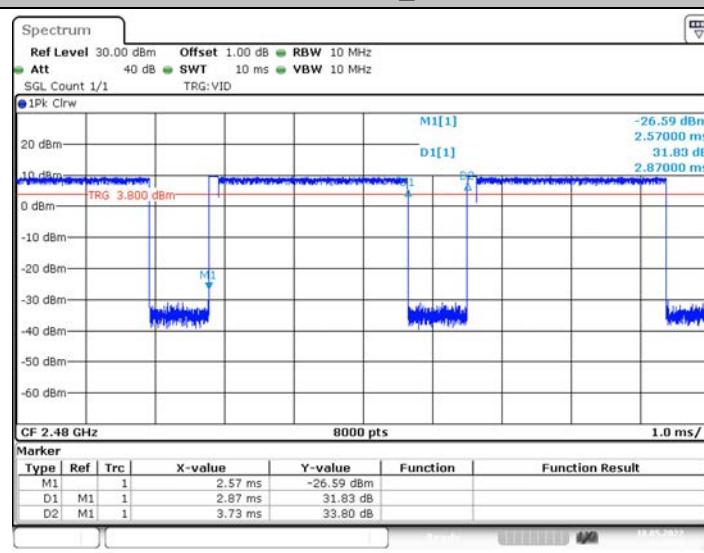**π/4-DQPSK_2402****π/4-DQPSK_2441****π/4-DQPSK_2480**

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China




8-DPSK_2402

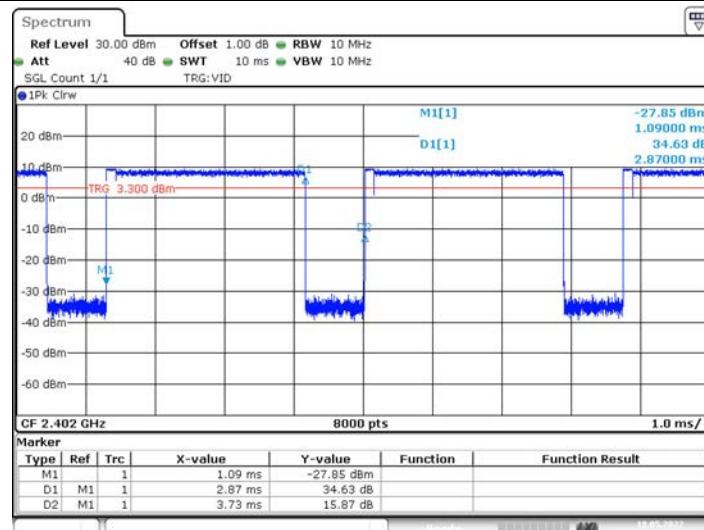


Date: 18.MAY.2022 10:20:47

8-DPSK_2441

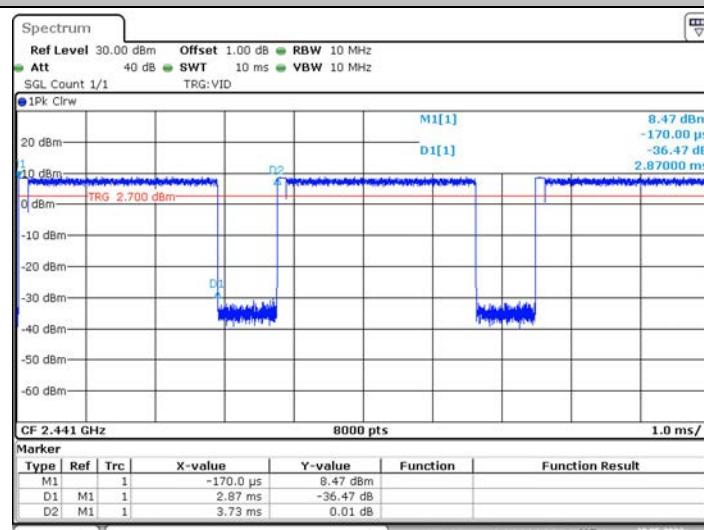

Date: 18.MAY.2022 10:22:28

8-DPSK_2480

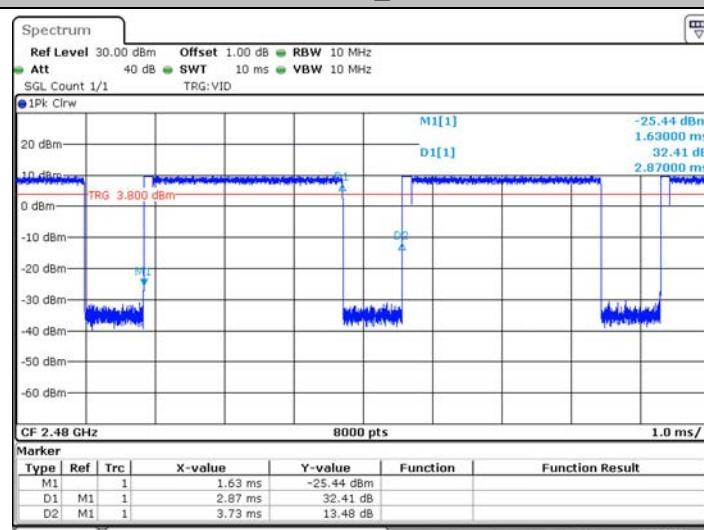

Date: 18.MAY.2022 10:24:27

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnca.gov.cn)



3.11. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END*****