



Emissions Test Report

EUT Name: Edge Sensor Logger V1

Model No.: GAA817A

CFR 47 Part 15.247: 2019 and RSS 247: 2017

Prepared for:

Otis Elevator
5 Farm Springs Road
Farmington, CT 06032 USA

Prepared by:

TUV Rheinland of North America, Inc.
5015 Brandin Ct.
Fremont, CA 94538
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: August 29, 2019

Job # 234110388

Report Number: 31963934.001

Revisions

Note: Latest revision report will replace all previous reports.

Statement of Compliance

Manufacturer: Otis Elevator
5 Farm Springs Road
Farmington, CT 06032 USA

Requester / Applicant: Otis Elevator

Name of Equipment: Edge Sensor Logger V1
Model No. GAA817A

Type of Equipment: Intentional Radiator

Application of Regulations: CFR 47 Part 15.247: 2019 and RSS 247: 2017

Test Dates: August 26th, 2019 to August 27th, 2019

Guidance Documents:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

Test Methods:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Test Engineer

Date August 29, 2019

A2LA Signatory

Date August 29, 2019



ISED

Testing Cert #3331.02

US1131

US0185

1	<i>Executive Summary</i>	7
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
2	<i>Laboratory Information</i>	9
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	ISED	9
2.1.4	VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.4	Calibration Traceability	11
3	<i>Product Information</i>	12
3.1	Product Description	12
3.2	Equipment Configuration	12
3.3	Operating Mode	12
3.4	Unique Antenna Connector	13
3.4.1	Results	13
3.5	Duty Cycle	13
4	<i>Emissions</i>	14
4.1	Output Power Requirements	14
4.1.1	Test Method	14
4.1.2	Results	15
4.2	DTS Bandwidth (6dB) and Occupied Bandwidth	17
4.2.1	Test Method	17
4.2.2	Results	17
4.3	Peak Power Spectral Density	21
4.3.1	Test Method	21
4.3.2	Results	22
4.4	Out of Band Emissions: Non-Restricted Bands	25
4.4.1	Test Method	25
4.4.2	Results	26

Table of Contents

4.5 Out of Band Emissions: Restricted Band Edge	30
4.5.1 Test Method	30
4.5.2 Test Results	31
4.6 Transmitter Spurious Emissions	33
4.6.1 Test Methodology	33
4.6.2 Test Setup:	34
4.6.3 Transmitter Spurious Emission Limit	35
4.6.4 Test Results	35
4.7 AC Conducted Emissions	45
4.7.1 Test Methodology	45
4.7.2 Test Results	45
5 Test Equipment List	46
5.1 Equipment List	46
6 EMC Test Plan	47
6.1 Introduction	47
6.2 Customer	47
6.3 Equipment Under Test (EUT)	47
6.4 Product Specifications	48
Table 12: Accessory Equipment	49
6.5 Test Specifications	50

Index of Tables

Table 1: Summary of Test Results	8
Table 2: RF Output Power at the Antenna Port – Test Results.....	15
Table 3: Occupied Bandwidth – Test Results	18
Table 4: Peak Power <i>Spectral</i> Density – Test Results	22
Table 5: Emissions at the Band-Edge – Test Results.....	31
Table 6: Customer Information.....	47
Table 7: Technical Contact Information	47
Table 8: EUT Designation.....	47
Table 9: EUT Specifications	48
Table 10: Antenna Information.....	49
Table 11: Interface Specifications.....	49
Table 12: Accessory Equipment	49
Table 13: Ancillary Equipment (used for test purposes only).....	49
Table 14: Description of Sample used for Testing.....	50
Table 15: Description of Test Configuration used for Radiated Measurement.	50
Table 16: Test Specifications	50

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247: 2019 and RSS 247: 2017 based on the results of testing performed on August 26th, 2019 to August 27th, 2019 on the GAA817A manufactured by Otis Elevator. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2402 MHz to 2480 MHz frequency band for Bluetooth, Low Energy is covered in this document.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.10	Worse Case (Measured)	Result
Maximum Output Power	CFR47 15.247 (b), RSS 247 Sect. 5.4 (d)	0.48dBm @ 2402/2426MHz Channel	Complied
DTS Bandwidth (6dB)	CFR47 15.247 (a)(2), RSS 247 Sect. 5.2 (a)	0.690MHz @ 2402/2426MHz Channel	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2 (b)	-16.25 dBm @ 2426MHz Channel	Complied
Out of Band Emissions: Non-Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	-34.58 dBc Lower Band Edge	Complied
Out of Band Emissions: Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	-20.69dB margin @ 2533.136 MHz, Average	Complied
Transmitter Spurious Emissions	CFR47 15.247 (d), RSS 247 Sect.5.5	-18.54dB Margin @ 80.02 MHz, Quasi Peak	Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	N/A	Non-Applicable

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 *Accreditations & Endorsements*

2.1.1 US Federal Communications Commission



TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA 94538, are recognized by the Commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No. US1131). The laboratory Scopes of Accreditation include Title 47 CFR Parts 15, 18 and 90. The accreditations are updated every three years.

2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2017. The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 ISED

The Pleasanton 5-meter Semi-Anechoic Chamber, has been accepted by ISED to perform testing to 3 and 5 meters based on the test procedures described in ANSI C63.4-2014. The Fremont 10-meter Semi-Anechoic Chamber, has been accepted by ISED to perform testing to 3 and 10 meters based on the test procedures described in ANSI C63.4-2014. Under US0185

2.1.4 VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA 94538, have been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

VCCI Registration No. for Fremont: A-0327

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

2.2 Test Facilities

Test facilities are located at 5015 Brandin Ct, Fremont, California, 94538, USA and 1279 Quarry Lane, Pleasanton, California 94566, USA (Fremont is the Pleasanton Annex).

2.2.1 Emission Test Facility

The Semi-Anechoic Chambers and AC Line Conducted measurement facilities used to collect radiated and conducted emissions data have been constructed in accordance with ANSI C63.7:1992. The Fremont 10 meter semi-anechoic chamber has been measured in accordance with and verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2014 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04), at test distances of 3 and 10 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02). The Pleasanton 5 meter semi-anechoic chamber has been verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2009 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04) at a test distance of 3 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02).

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

The Expanded Uncertainty defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurement and the fraction may be viewed as the coverage probability or level of confidence of the interval.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V / m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U_{lab}	U_{cispr}
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The Model GAA817A utilizes Bluetooth LE. The EUT will be in compliance with regulatory standards of regions it will be operating in.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with the test standard. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing.

3.4 Unique Antenna Connector


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The Edge Sensor Logger V1 has 1 PCB integrated antenna that has maximum gain of + 3.3dBi. It is integrated into the PCB of the device and is not easily accessible to the end user.

3.5 *Duty Cycle*

Duty cycle of the tested device is reported below.

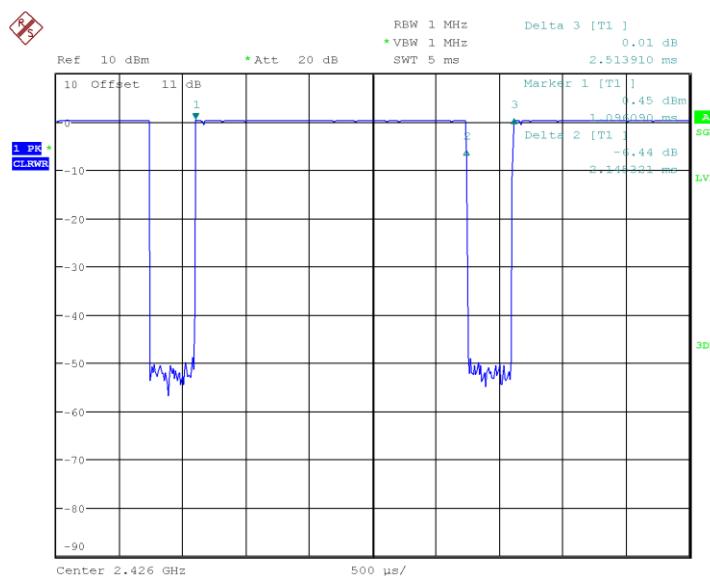

Date: 26.AUG.2019 11:26:36

$$\begin{aligned}
 \text{DC} &= [\text{On Time} / (\text{On+Off Time})] * 100 \\
 &= [2.145321 / 2.513910] * 100 \\
 \text{DC} &= 85.34\%
 \end{aligned}$$

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247: 2019 and RSS 247: 2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.


The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b) and RSS 247 5.4 (d).

The maximum transmitted power in the band 2400-2483.5 MHz: 1 W

4.1.1 Test Method

Conducted method was used to measure the channel power output. The worst findings were conducted on 3 channels in each operating range per CFR47 Part 15.247(b) and RSS 247 Sect. 5.4(d); 2400 MHz to 2483.5 MHz. The worst mode results indicated below.

Test Setup:

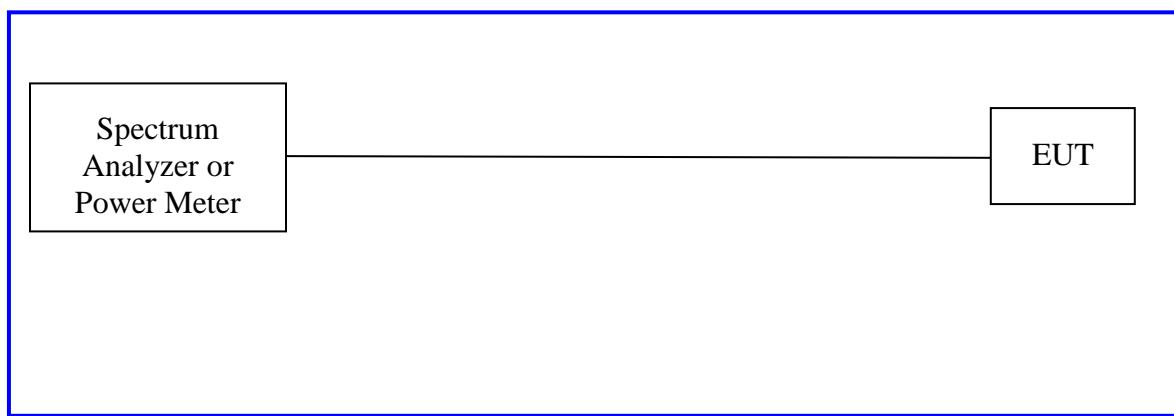


4.1.2 Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s). Worse case data for each mode reported below. Plots of highest power included for low, medium, and high channels.

Table 2: RF Output Power at the Antenna Port – Test Results


Data Rate	Operating Channel (MHz)	Power [dBm]	Limit [dBm]	Margin [dB]
1Mbps	2402	0.48	30	-29.52
	2426	0.48	30	-29.52
	2480	0.43	30	-29.57

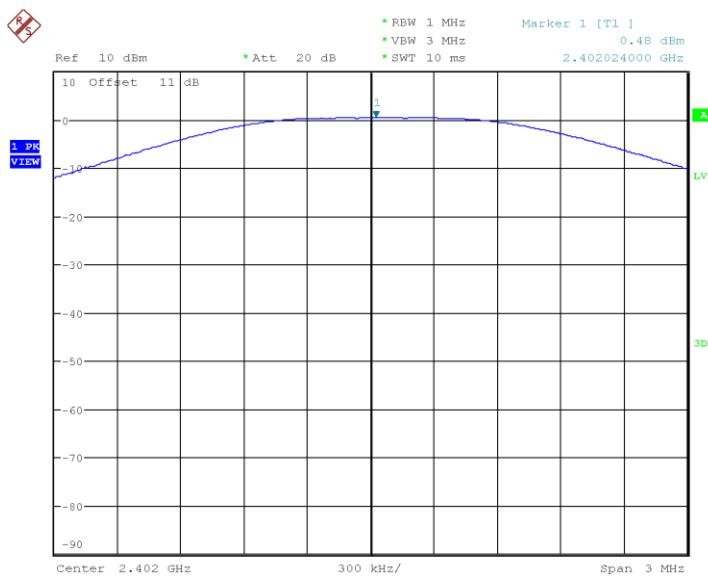

Plot 1. Maximum Conducted Power, 2402MHz

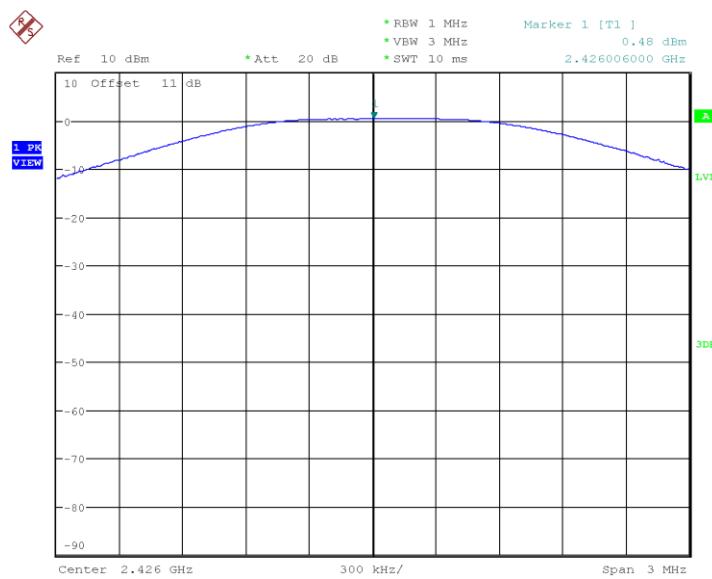

Date: 26.AUG.2019 11:44:37

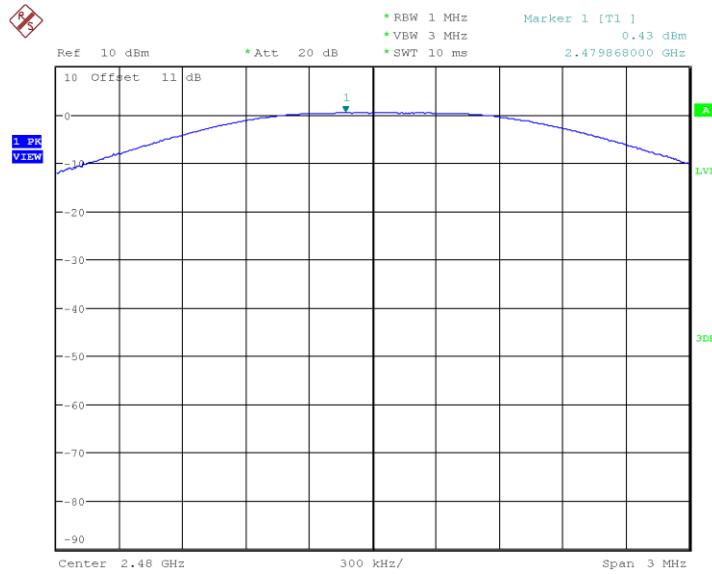Plot 2. Maximum Conducted Power, 2426MHz

Date: 26.AUG.2019 11:45:28

Plot 3. Maximum Conducted Power, 2480MHz

4.2 DTS Bandwidth (6dB) and Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.


The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8. The measurement was performed with modulation per CFR47 15.247 (a) (2) and RSS Gen Sect. 6.6. Measurements were performed on the low, middle and high channels of the operating frequency range; 2400 MHz to 2483.5 MHz.

Test Setup:

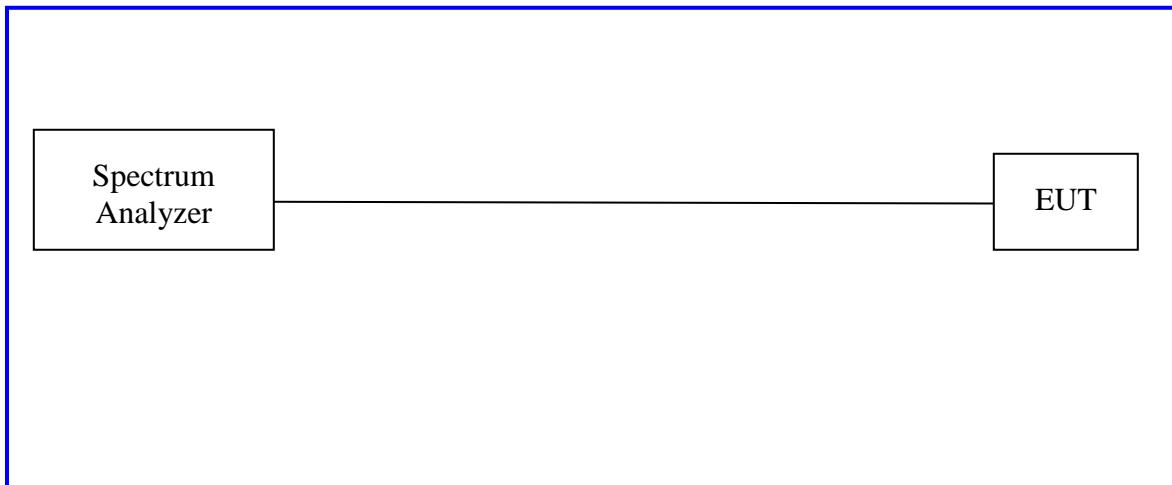


4.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).


Table 3: Occupied Bandwidth – Test Results

Bandwidth (MHz)			
Data Rate	Freq. (MHz)	99% Bandwidth (MHz)	6dB (DTS) Bandwidth (MHz)
1Mbps	2402	1.092	0.690
	2426	1.092	0.690
	2480	1.104	0.702
	Note: None		

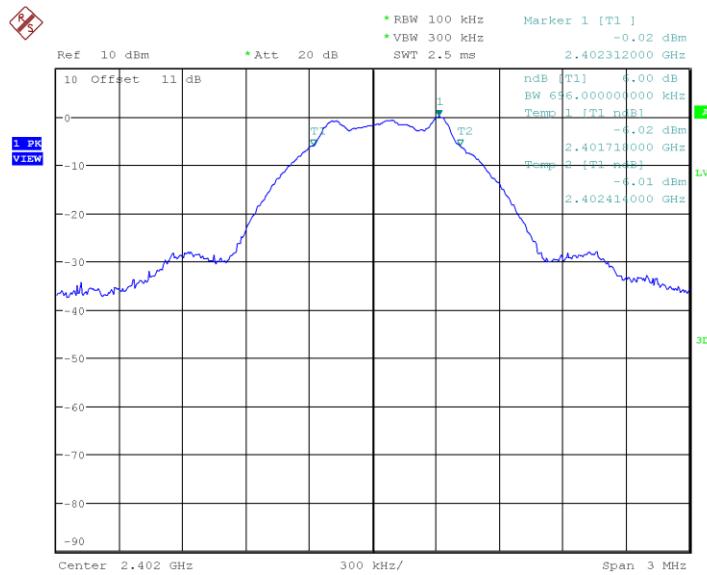


Date: 26.AUG.2019 11:32:07

Plot 4. 2402MHz, 6dB Bandwidth

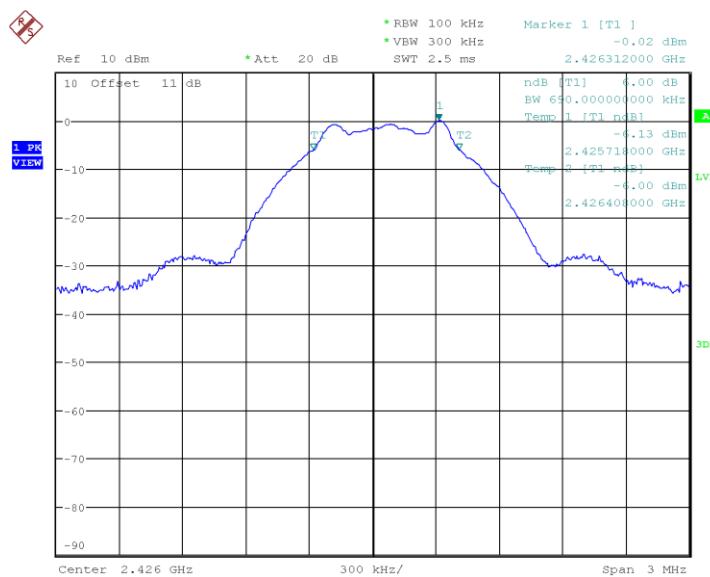


Date: 26.AUG.2019 11:33:40

Plot 5. 2426MHz, 6dB Bandwidth

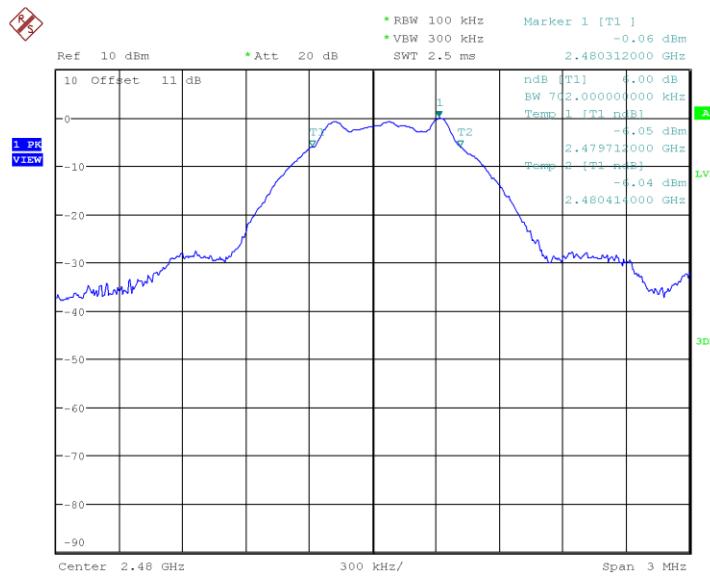


Date: 26.AUG.2019 11:34:55

Plot 6. 2480MHz, 6dB Bandwidth

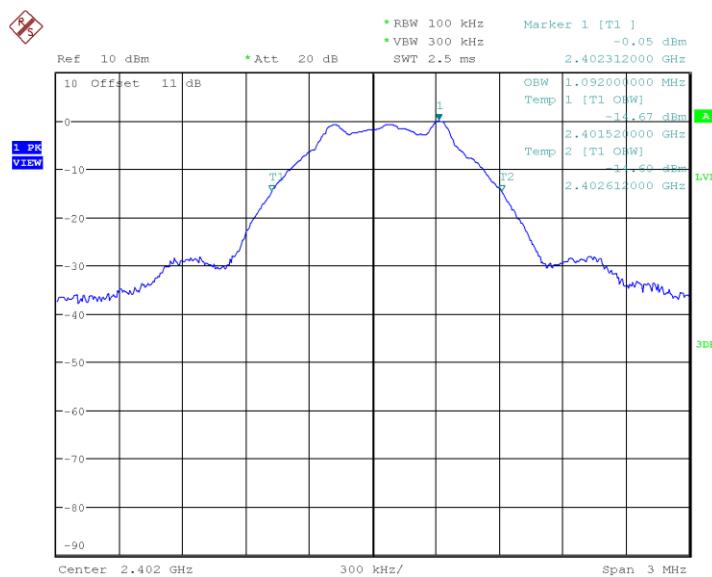


Date: 26.AUG.2019 11:40:28

Plot 7. 2402MHz, 99% Bandwidth

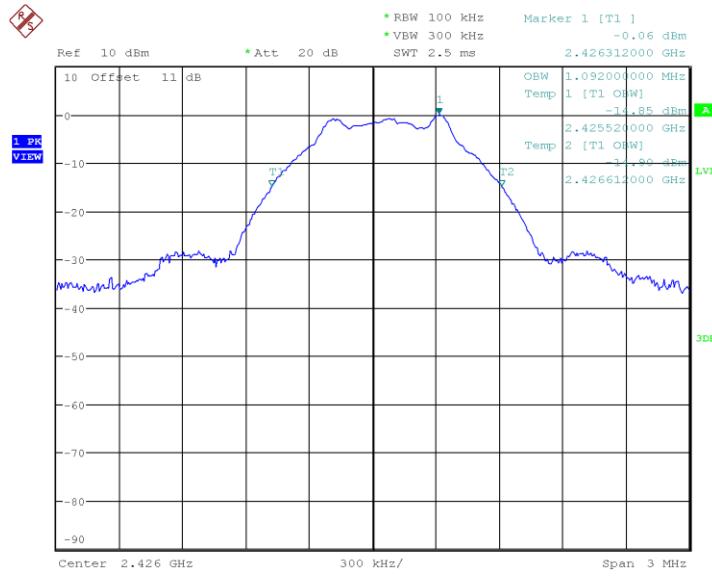

Date: 26.AUG.2019 11:39:03

Plot 8. 2426MHz, 99% Bandwidth

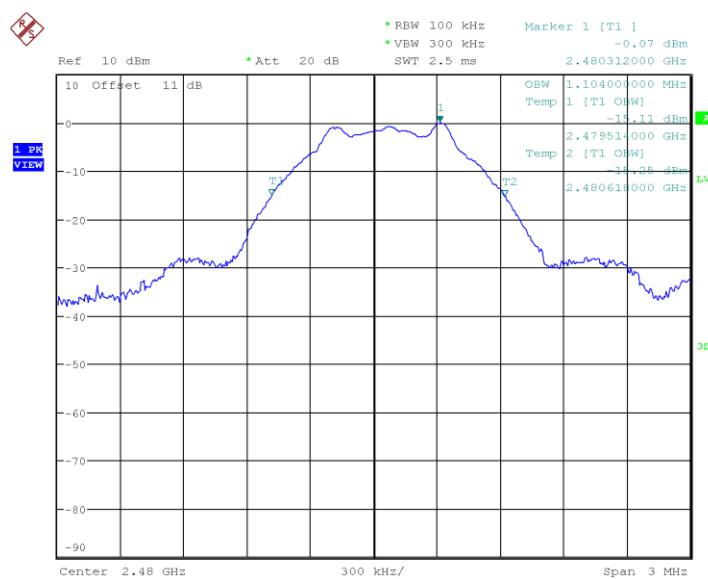

Date: 26.AUG.2019 11:36:56

Plot 9. 2480MHz, 99% Bandwidth


4.3 Peak Power Spectral Density

According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b), the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.2. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b). The worst findings were conducted on 3 channels in each operating frequency range of 2400 MHz to 2483.5 MHz.

Test Setup:

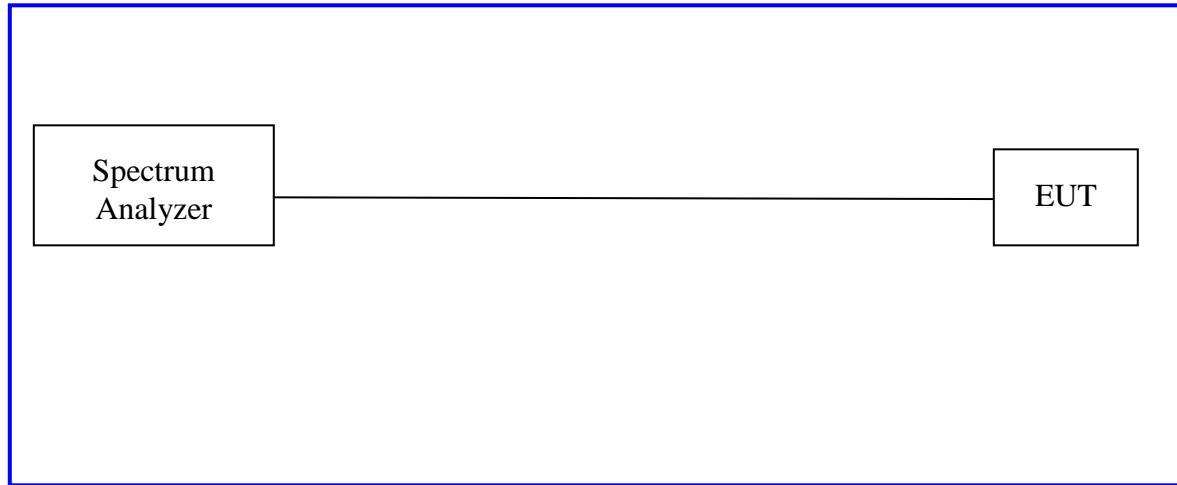


Method PKPSD of “KDB 558074 – DTS Measurement Guidance v04” was used.

4.3.2 Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Peak Power Spectral Density – Test Results

Peak Power Spectral Density				
Data Rate	Freq. (MHz)	Total PSD [dBm]	Limit [dBm]	Margin [dB]
1Mbps	2402	-16.49	8	-24.49
	2426	-16.25	8	-24.25
	2480	-16.44	8	-24.44
Note: None				

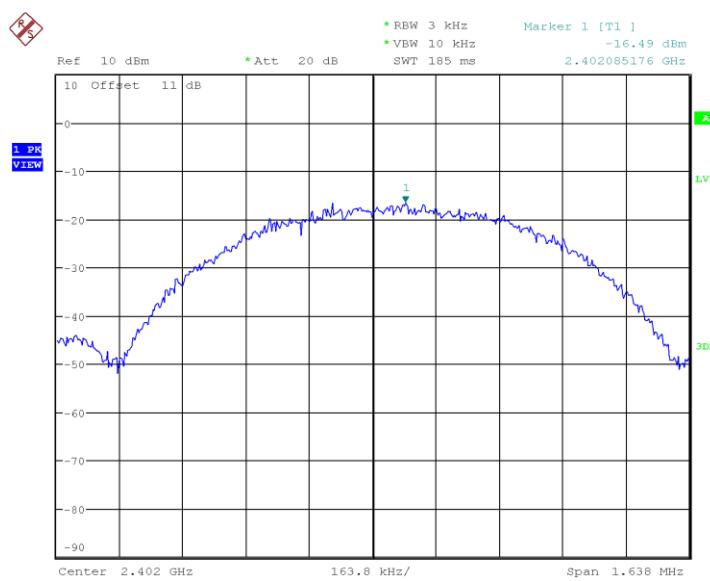


Date: 26.AUG.2019 12:02:14

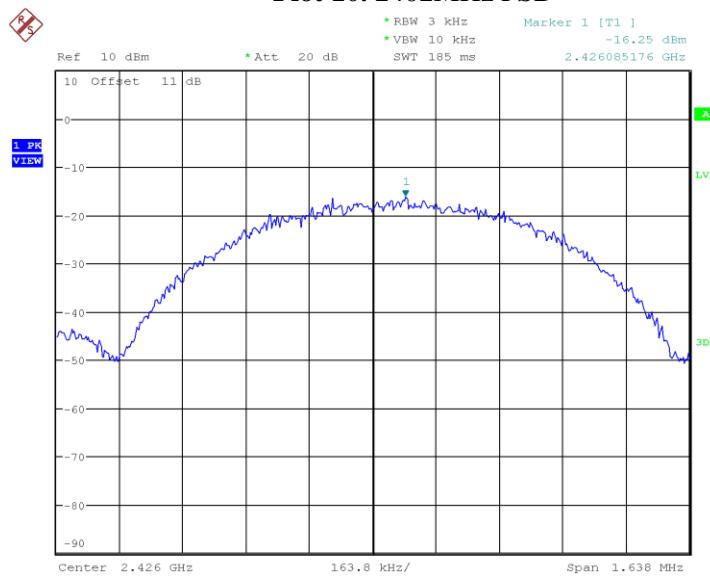Plot 10. 2402MHz PSD

Date: 26.AUG.2019 12:01:09

Plot 11. 2426MHz PSD

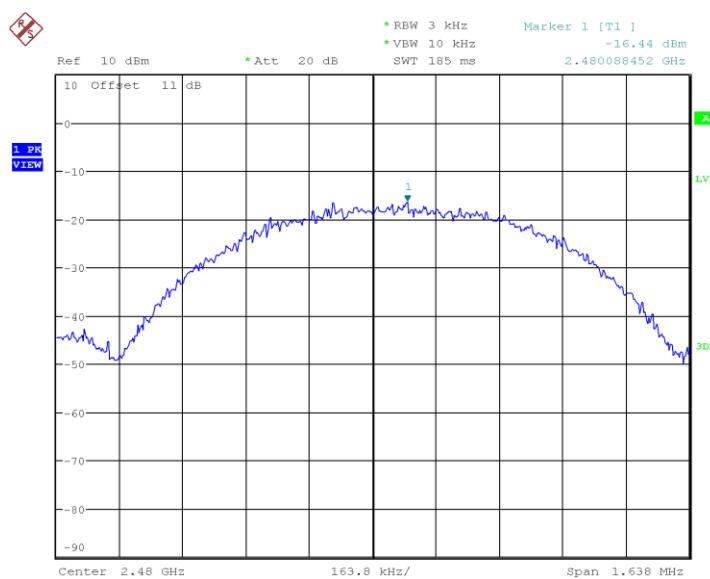

Date: 26.AUG.2019 11:59:32

Plot 12. 2480MHz PSD


4.4 Out of Band Emissions: Non-Restricted Bands

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.4.1 Test Method

Conducted measurements per ANSI C63.10-2013 Sections 6.10, 11.11, 14.3.3 were used to measure the undesirable emission requirement in non-restricted bands. The measurement was performed with modulation. The measurement was conducted from 30MHz to 26.5GHz on 3 channels in each mode on the EUT. Band edge tests were conducted on the low and high channel of each mode. The worst case measurement of each mode is recorded in this report.


Test Setup:

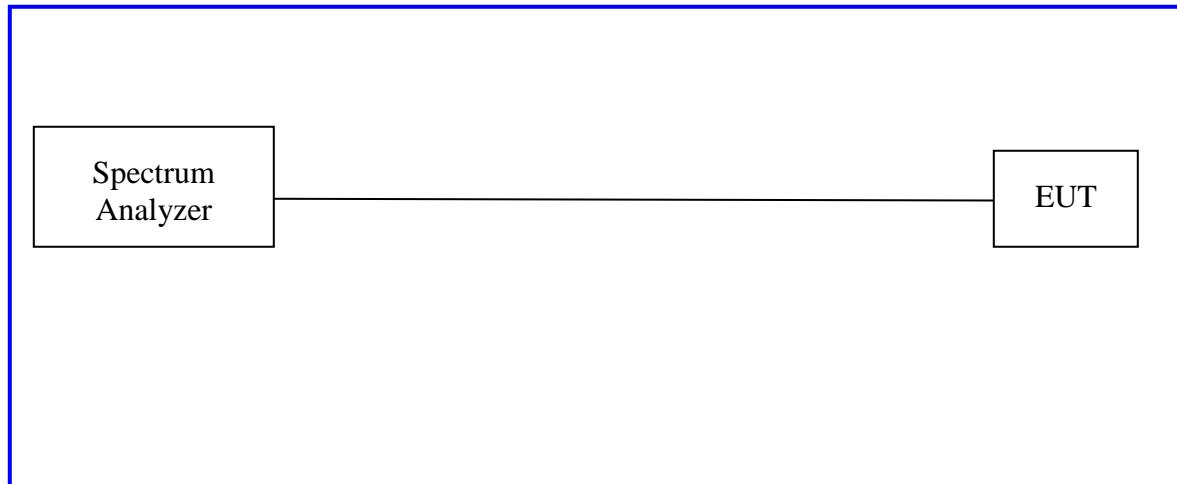

4.4.2 Results


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

4.4.2.1 Band Edge

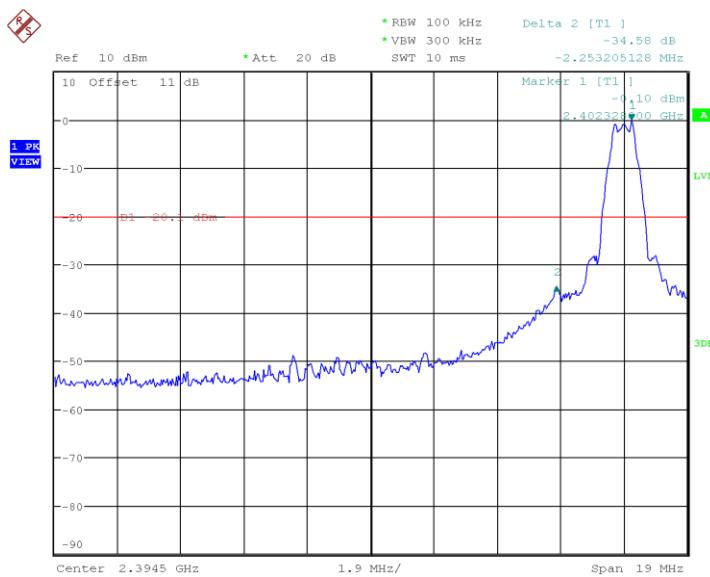


Date: 26.AUG.2019 12:09:34

Plot 13. 2402MHz Lower Band Edge

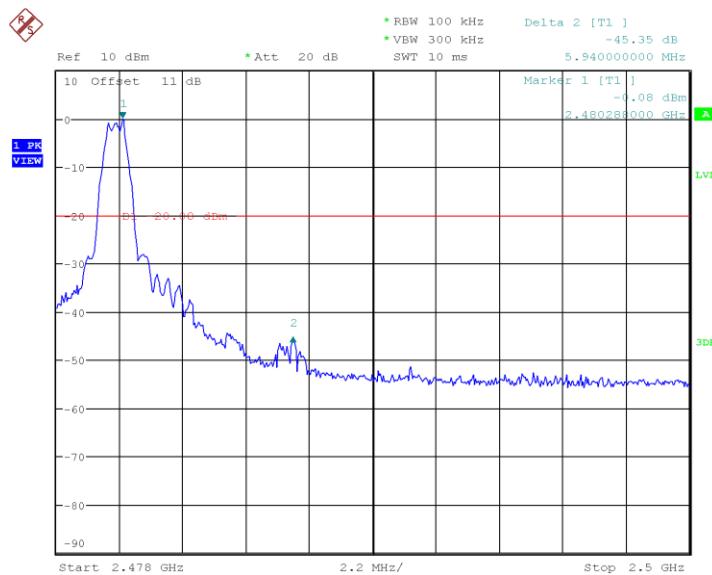


Date: 26.AUG.2019 12:14:29

Plot 14. 2480MHz Upper Band Edge**4.4.2.2 Conducted Spurious**

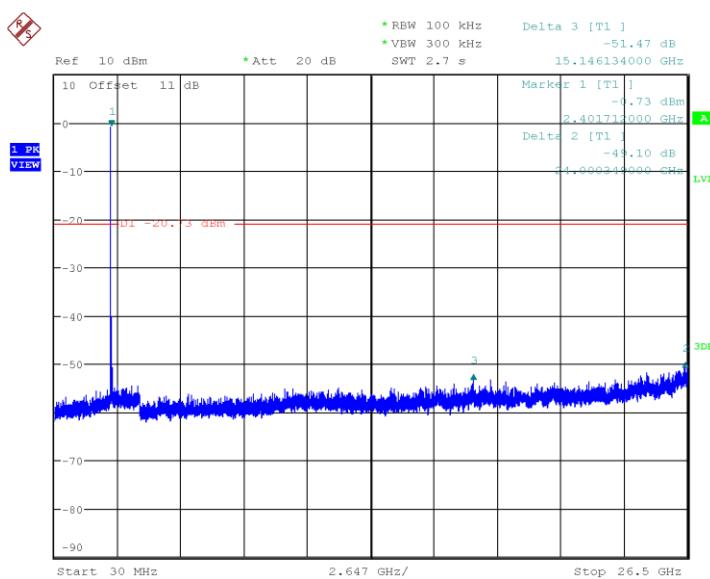


Date: 26.AUG.2019 12:19:15

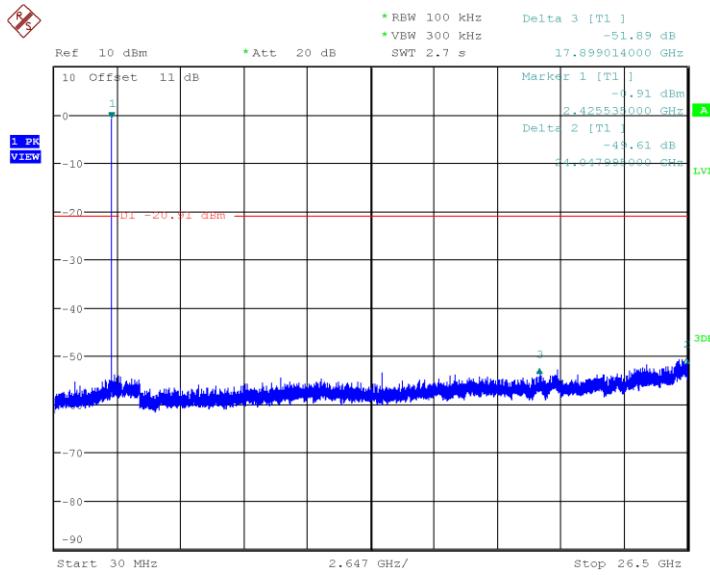Plot 15. 2402MHz 30MHz-26.5GHz Spurious

Date: 26.AUG.2019 12:22:04

Plot 16. 2426MHz 30MHz-26.5GHz Spurious

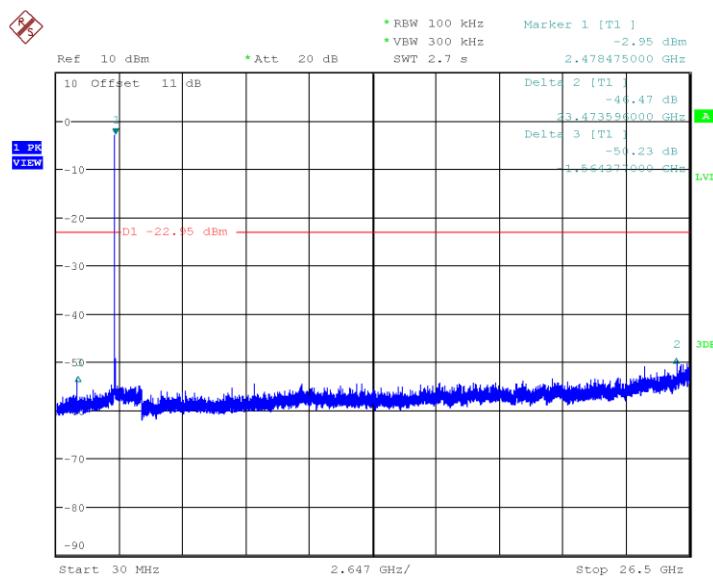

Date: 26.AUG.2019 12:25:04

Plot 17. 2480MHz 30MHz-26.5GHz Spurious


4.5 Out of Band Emissions: Restricted Band Edge

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.5.1 Test Method

Radiated measurements per ANSI C63.10-2013 Section 6.10.5 were used to measure the undesirable emission requirement in restricted bands. Peak points were found and RMS Average was taken for each point found. The measurement was performed with modulation. This test was conducted on the upper and lower most channels in each mode on the EUT. The worst case measurement of each channel is recorded in this report. All channels were tested at highest power settings.

Test Setup

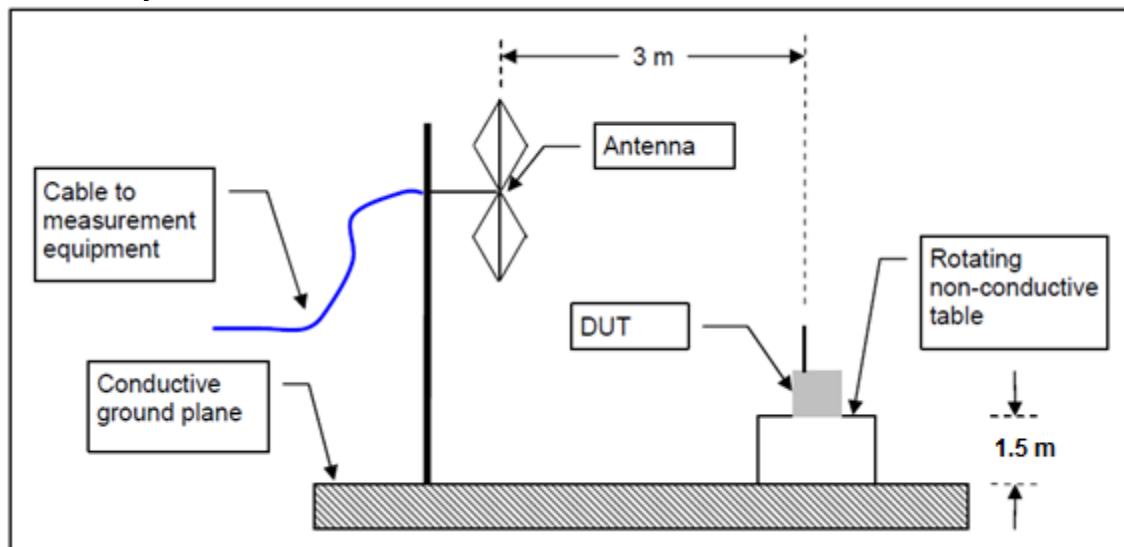


The DUT was stimulated by manufacturer provided test software that is not available to the end user.

4.5.2 Test Results


Table 5: Emissions at the Band-Edge – Test Results

Test Conditions: Radiated Measurement, Normal Temperature and Voltage							
Lower Restricted Band Edge							
Freq. (MHz)	Mode	Center Freq (MHz)	Detector (Average/Peak)	Measured (dBuV/m)	Limit (dBuV/m)	Margin	Results
2376.045	BLE 1Mbps	2402	Average	32.33	54	-21.67	Pass
2376.045	BLE 1Mbps	2402	Peak	45.47	74	-28.53	Pass
Upper Restricted Band Edge							
Freq. (MHz)	Mode	Center Freq (MHz)	Detector (Average/Peak)	Measured (dBuV/m)	Limit (dBuV/m)	Margin	Results
2533.136	BLE 1Mbps	2480	Average	33.31	54	-20.69	Pass
2707.837	BLE 1Mbps	2480	Peak	45.7	74	-28.3	Pass

Note: 1. The DCCF (Average Detector) is included in this table, the following plots are of peak values

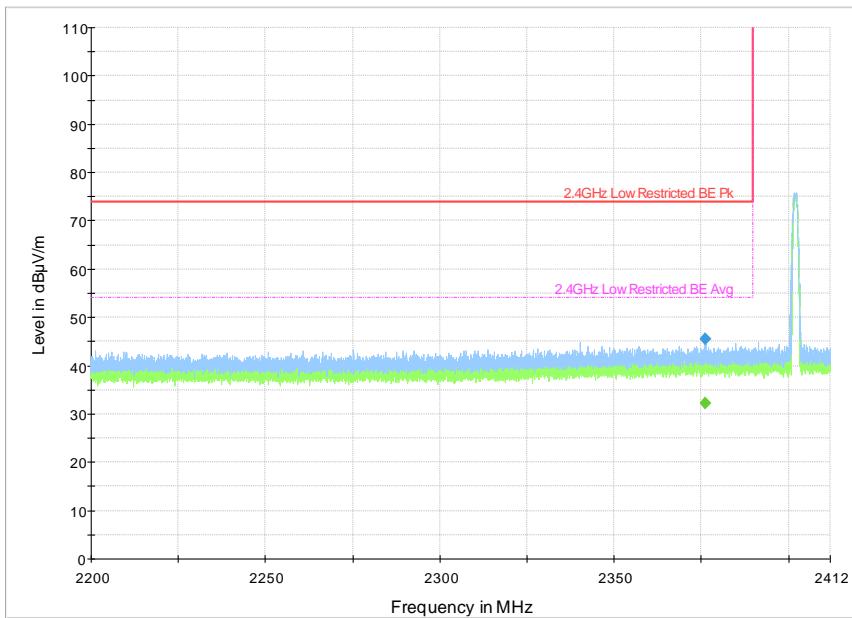

Plot 18. 2402MHz, Lower Band Edge, Restricted

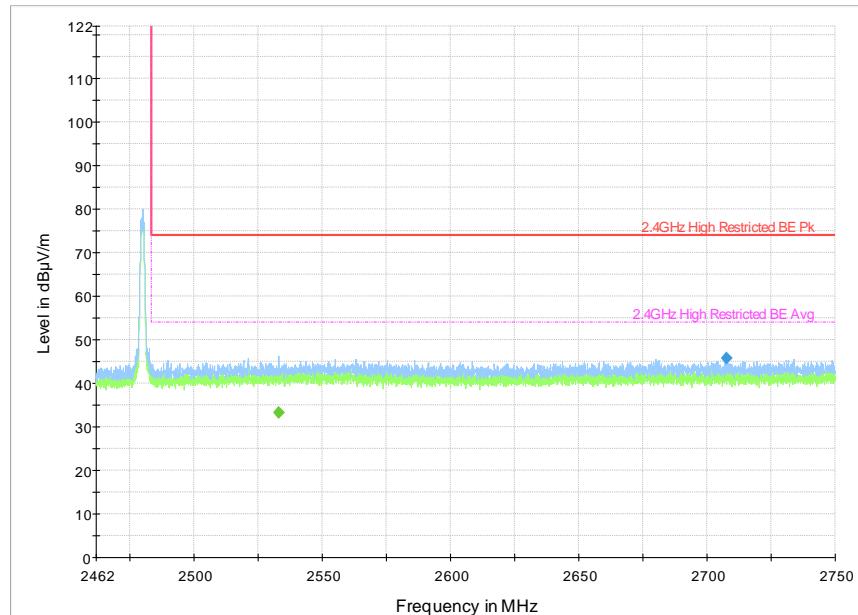

Plot 19. 2480MHz, Upper Band Edge, Restricted

4.6 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS 247 Sect.5.5, RSS-GEN Sect. 8.9 and 8.10.

4.6.1 Test Methodology

4.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pre-scans were performed to determine the worst data rate / chains.

4.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.


4.6.1.3 Deviations

None.


4.6.2 Test Setup:

All tests were conducted at full power on low, middle, and high channels. The DUT was stimulated by manufacturer provided test software that is not available to the end user.

30MHz-1GHz

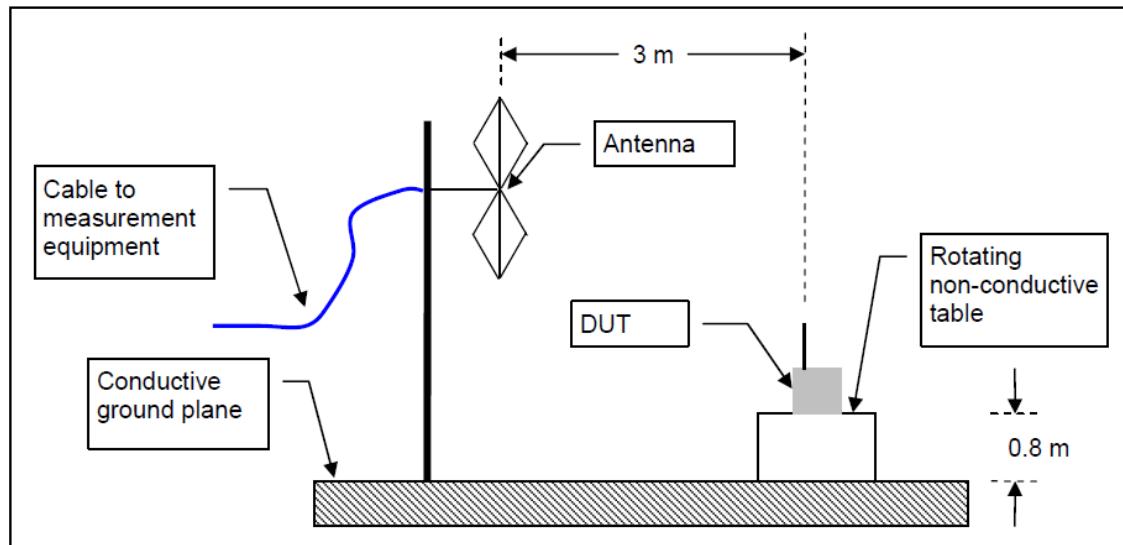

1-26GHz

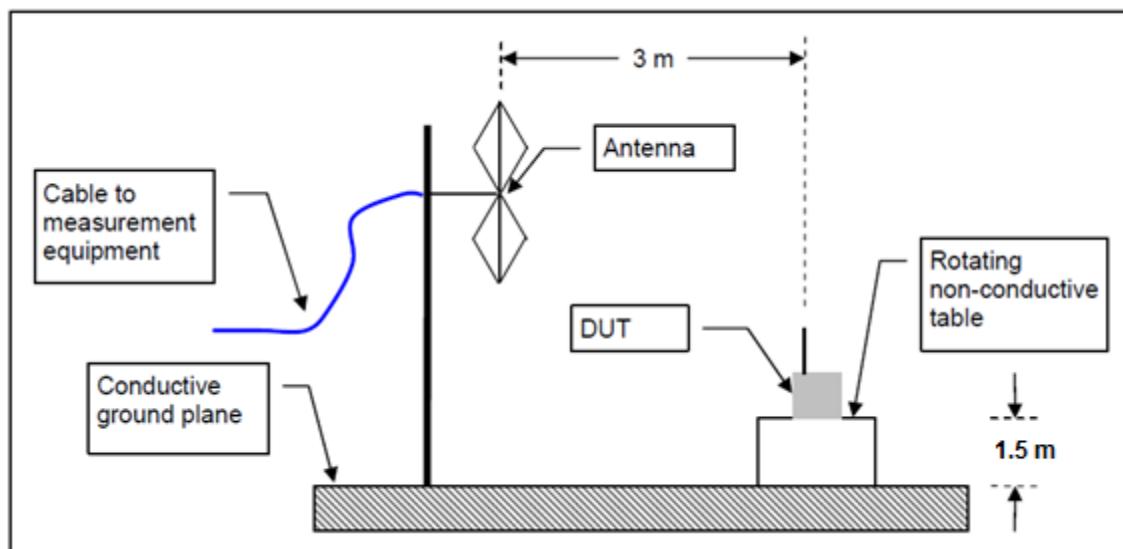

4.6.3 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2015 and RSS Gen Sect. 8.9 and 8.10: 2014.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3


4.6.4 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).


4.6.4.1 Plots

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.118080	14.86	40.00	25.14	259.0	V	-108.0	-11.8
80.006120	19.09	40.00	20.91	207.0	V	12.0	-19.6
97.118960	19.68	43.52	23.84	100.0	V	-134.0	-17.3
100.294120	20.47	43.52	23.05	100.0	V	-174.0	-16.0
232.871880	9.86	46.00	36.14	182.0	V	-68.0	-14.7
298.557680	11.92	46.00	34.08	128.0	V	-22.0	-12.8

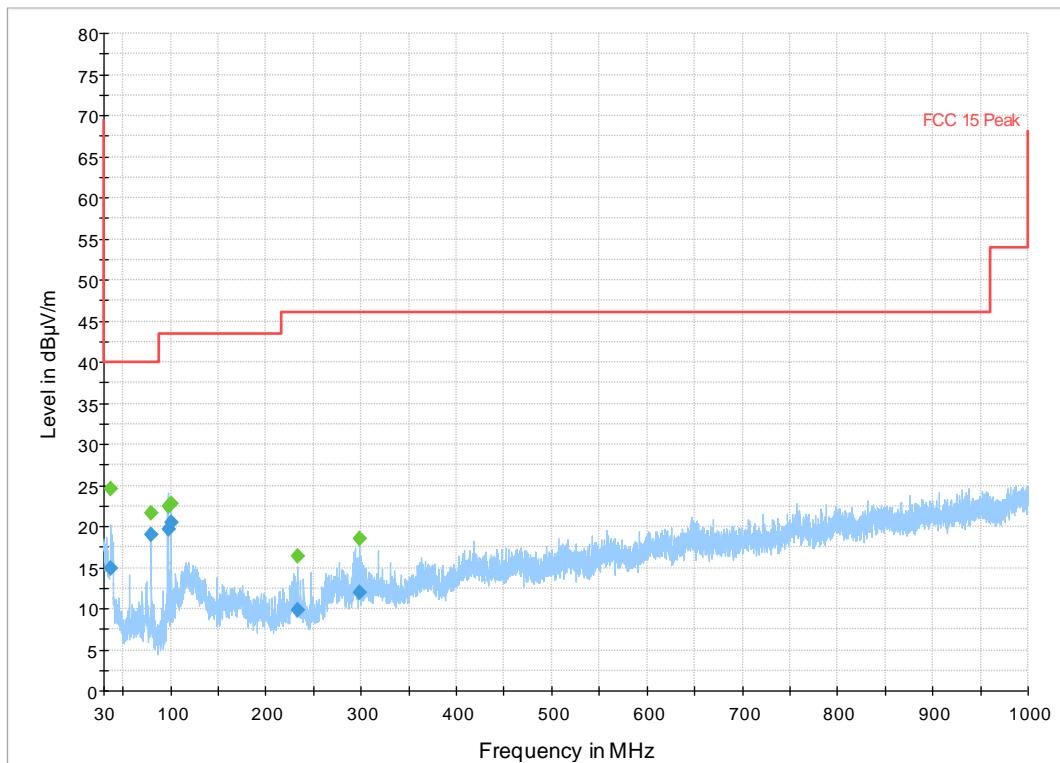


Plot 20. 30MHz-1000MHz, 2402MHz

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.974680	13.58	40.00	26.42	280.0	V	-175.0	-12.4
57.268240	20.97	40.00	19.03	300.0	V	100.0	-17.6
80.003480	13.93	40.00	26.07	182.0	V	175.0	-19.6
100.300360	18.08	43.52	25.44	285.0	H	-162.0	-16.0
197.202160	6.97	43.50	36.53	154.0	V	68.0	-14.7
296.727640	17.39	46.00	28.61	100.0	H	-94.0	-12.9

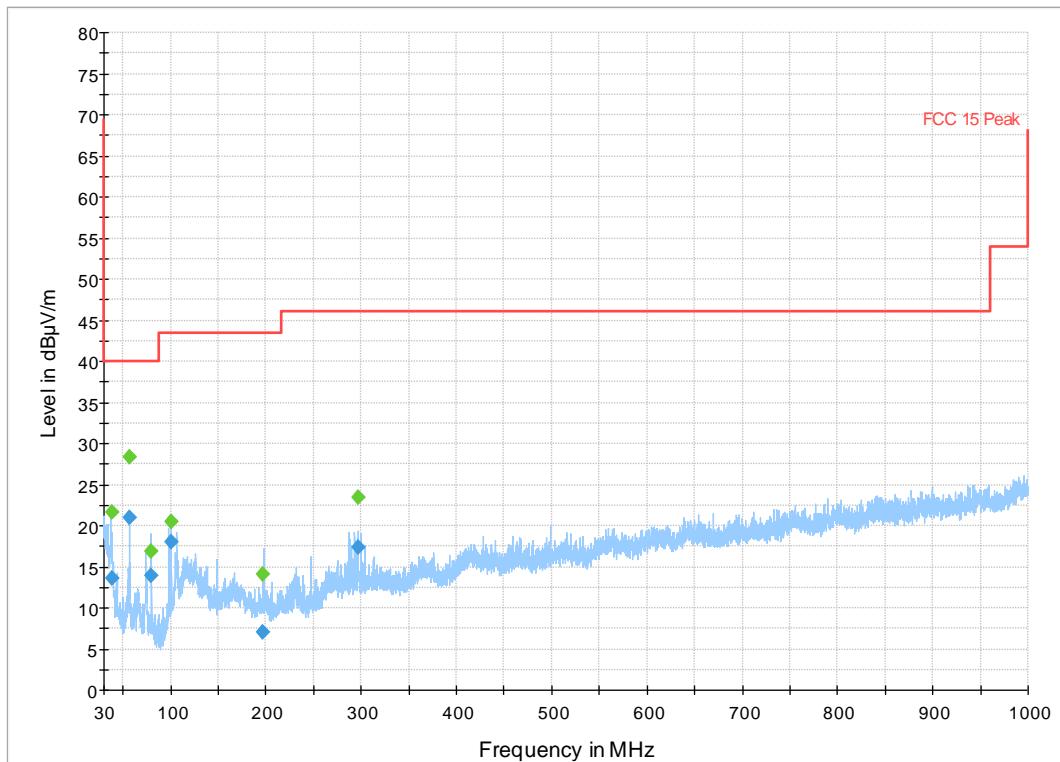


Plot 21. 30MHz-1000MHz, 2426MHz

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.067680	15.08	40.00	24.92	232.0	V	-84.0	-11.8
80.022440	21.46	40.00	18.54	183.0	V	-95.0	-19.6
96.972720	20.75	43.52	22.77	180.0	V	-175.0	-17.3
198.143920	6.73	43.50	36.77	101.0	H	167.0	-14.6
274.864320	11.82	46.00	34.18	101.0	H	-117.0	-11.9
321.217160	10.30	46.00	35.70	100.0	H	-124.0	-11.6

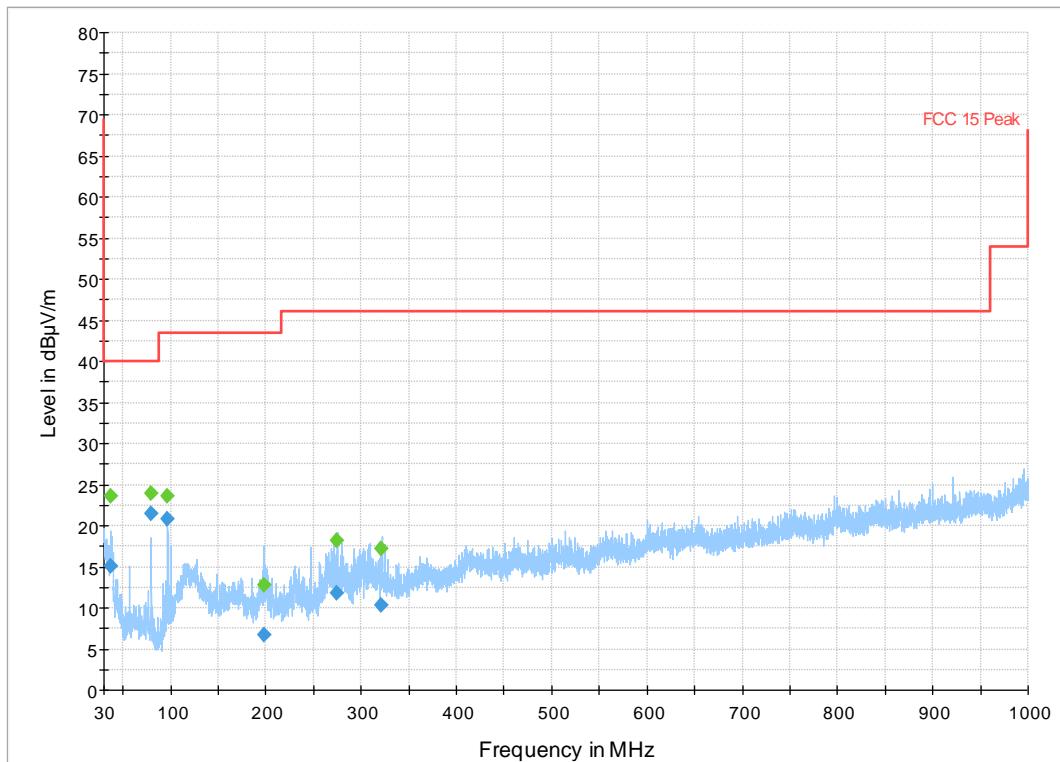


Plot 22. 30MHz-1000MHz, 2480MHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2232.508000	33.03	---	74.00	40.97	191.0	V	-117.0	-31.6
2232.508000	---	20.60	54.00	33.40	191.0	V	-117.0	-31.6
3185.993500	38.65	---	74.00	35.35	193.0	H	38.0	-27.2
3185.993500	---	25.59	54.00	28.41	193.0	H	38.0	-27.2
4153.287000	39.32	---	74.00	34.68	219.0	H	-104.0	-25.2
4153.287000	---	26.50	54.00	27.50	219.0	H	-104.0	-25.2
8384.127000	---	33.32	54.00	20.68	217.0	H	-83.0	-17.2
8384.127000	46.52	---	74.00	27.48	217.0	H	-83.0	-17.2
12038.200000	48.01	---	74.00	25.99	193.0	V	97.0	-13.8
12038.200000	---	34.74	54.00	19.26	193.0	V	97.0	-13.8
17912.094500	---	41.38	54.00	12.62	242.0	V	49.0	-7.1
17912.094500	54.40	---	74.00	19.60	242.0	V	49.0	-7.1

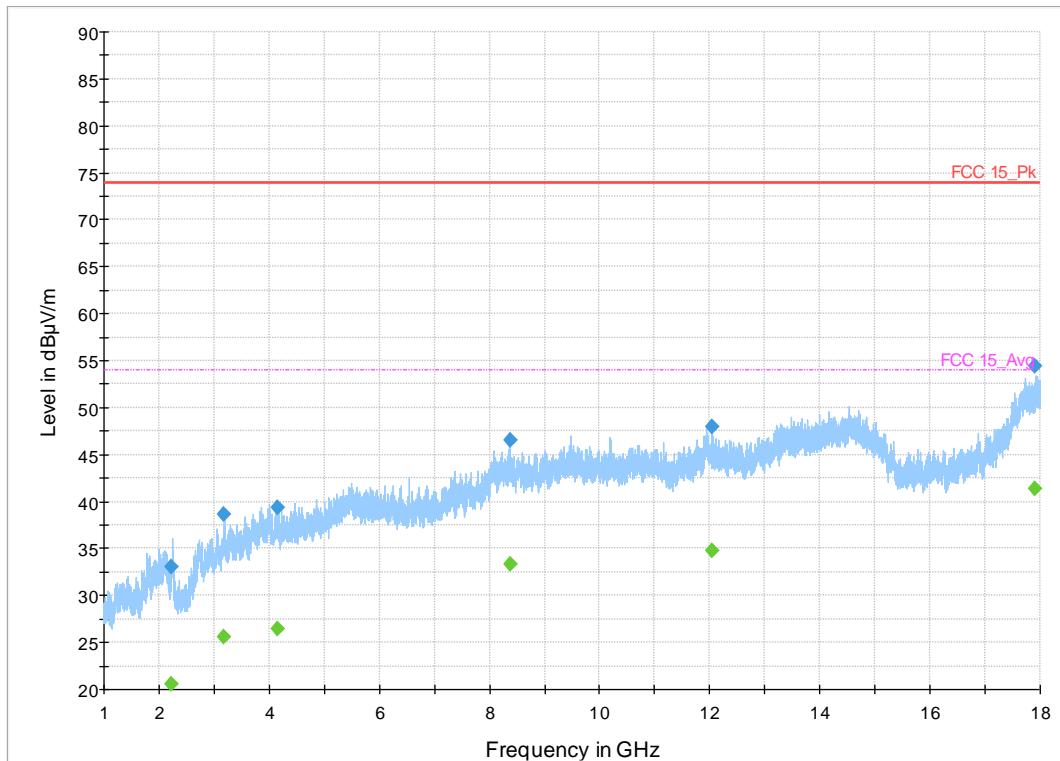


Plot 23. 1-18GHz, 2402MHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2724.106500	36.49	---	74.00	37.51	101.0	V	-137.0	-29.8
2724.106500	---	23.19	54.00	30.81	101.0	V	-137.0	-29.8
4744.503000	---	26.61	54.00	27.39	151.0	V	-97.0	-24.4
4744.503000	39.36	---	74.00	34.64	151.0	V	-97.0	-24.4
8366.308500	45.92	---	74.00	28.08	128.0	H	-107.0	-17.2
8366.308500	---	32.39	54.00	21.61	128.0	H	-107.0	-17.2
13280.942500	48.35	---	74.00	25.65	243.0	V	104.0	-12.8
13280.942500	---	35.48	54.00	18.52	243.0	V	104.0	-12.8
14950.002000	---	36.31	54.00	17.69	250.0	V	141.0	-13.4
14950.002000	49.99	---	74.00	24.01	250.0	V	141.0	-13.4
17964.920000	54.10	---	74.00	19.90	250.0	V	-48.0	-6.8
17964.920000	---	41.22	54.00	12.78	250.0	V	-48.0	-6.8

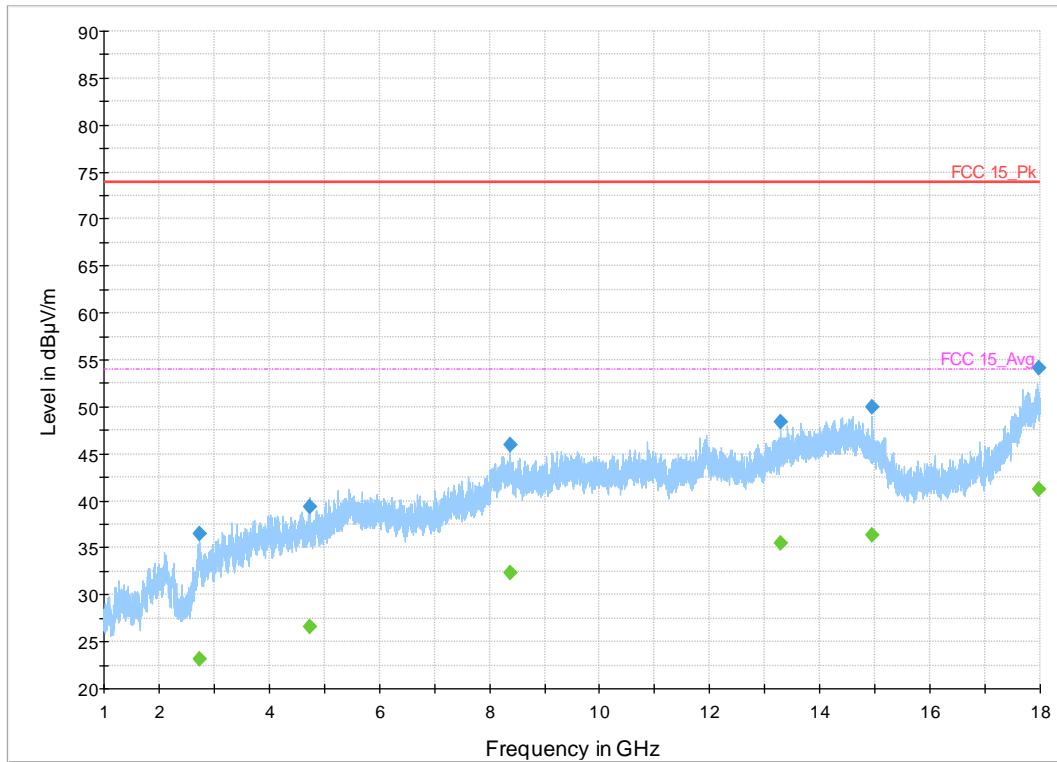


Plot 24. 1-18GHz, 2426MHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2166.262500	34.74	---	74.00	39.26	150.0	H	-156.0	-31.4
2166.262500	---	21.17	54.00	32.83	150.0	H	-156.0	-31.4
3073.900000	37.38	---	74.00	36.62	250.0	H	-173.0	-27.7
3073.900000	---	24.06	54.00	29.94	250.0	H	-173.0	-27.7
7443.639000	---	29.30	54.00	24.70	200.0	V	-144.0	-19.2
7443.639000	42.24	---	74.00	31.76	200.0	V	-144.0	-19.2
9922.180000	---	32.82	54.00	21.18	167.0	V	180.0	-15.7
9922.180000	45.98	---	74.00	28.02	167.0	V	180.0	-15.7
13293.758500	48.31	---	74.00	25.69	250.0	V	179.0	-12.8
13293.758500	---	35.51	54.00	18.49	250.0	V	179.0	-12.8
17794.226500	53.35	---	74.00	20.65	250.0	V	152.0	-7.6
17794.226500	---	40.64	54.00	13.36	250.0	V	152.0	-7.6

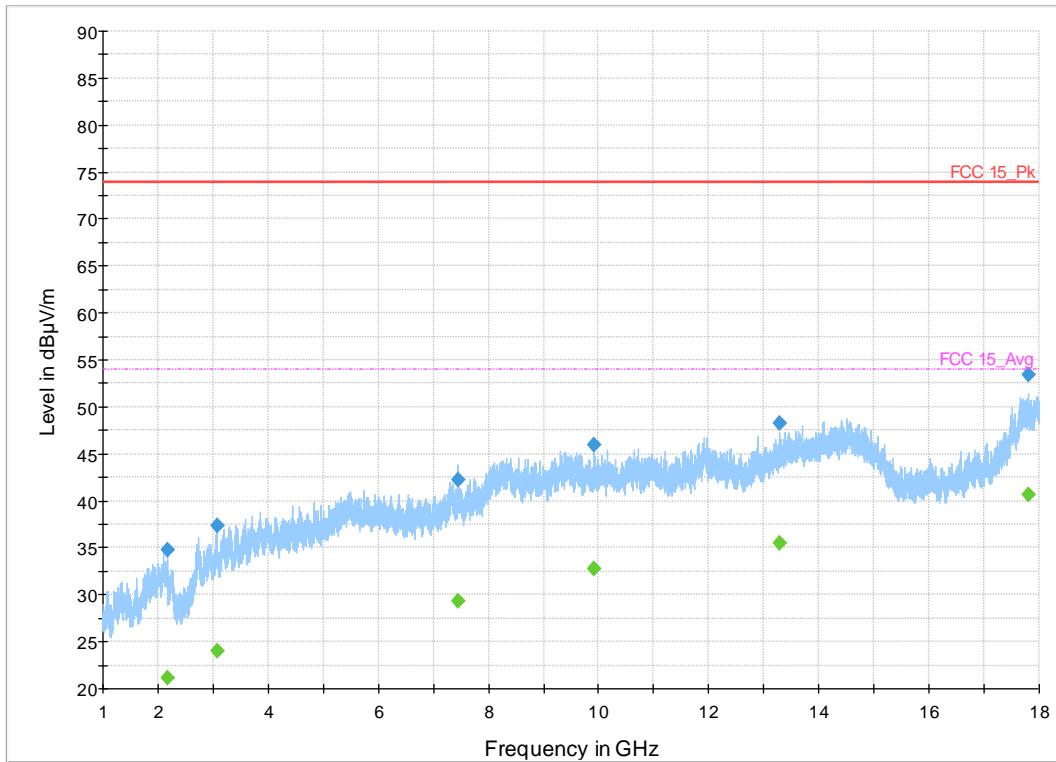


Plot 25. 1-18GHz, 2480MHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20069.778125	48.11	---	74.00	25.89	125.0	V	-23.0	11.8
20069.778125	---	34.92	54.00	19.08	125.0	V	-23.0	11.8
21991.193125	48.69	---	74.00	25.31	175.0	V	-142.0	12.2
21991.193125	---	35.99	54.00	18.01	175.0	V	-142.0	12.2
24002.730625	48.55	---	74.00	25.45	125.0	H	-20.0	11.7
24002.730625	---	35.56	54.00	18.44	125.0	H	-20.0	11.7
26255.571875	50.52	---	74.00	23.48	126.0	H	-125.0	13.6
26255.571875	---	37.48	54.00	16.52	126.0	H	-125.0	13.6

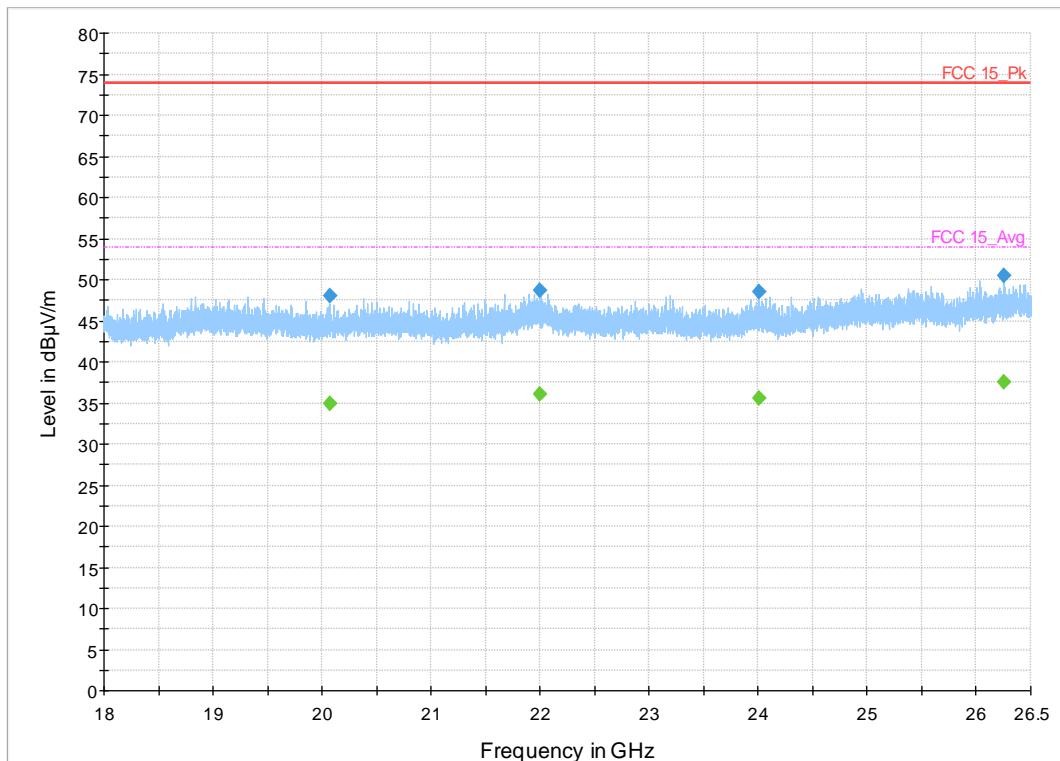


Plot 26. 18-26.5GHz, 2402MHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18774.041875	48.36	---	74.00	25.64	125.0	V	-14.0	11.3
18774.041875	---	35.16	54.00	18.84	125.0	V	-14.0	11.3
20781.213750	---	34.90	54.00	19.10	126.0	V	-173.0	12.1
20781.213750	47.57	---	74.00	26.43	126.0	V	-173.0	12.1
22073.051875	---	35.85	54.00	18.15	166.0	V	-120.0	12.2
22073.051875	48.66	---	74.00	25.34	166.0	V	-120.0	12.2
26301.412500	50.00	---	74.00	24.00	168.0	H	132.0	13.7
26301.412500	---	37.31	54.00	16.69	168.0	H	132.0	13.7

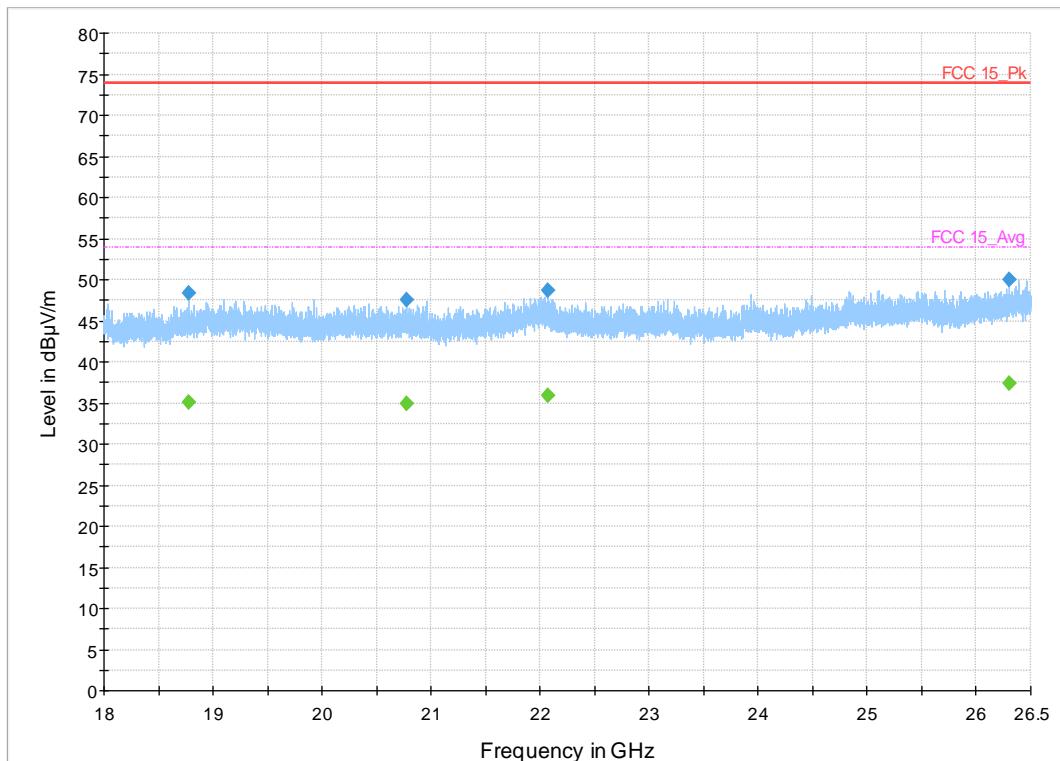

Plot 27. 18-26.5GHz, 2426MHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19635.245000	48.40	---	74.00	25.60	175.0	V	-101.0	11.8
19635.245000	---	34.84	54.00	19.16	175.0	V	-101.0	11.8
22368.461875	---	35.29	54.00	18.71	125.0	V	138.0	12.2
22368.461875	48.68	---	74.00	25.32	125.0	V	138.0	12.2
23057.718125	---	35.11	54.00	18.89	175.0	H	116.0	12.0
23057.718125	47.86	---	74.00	26.14	175.0	H	116.0	12.0
26241.200625	50.53	---	74.00	23.47	175.0	V	39.0	13.7
26241.200625	---	37.48	54.00	16.52	175.0	V	39.0	13.7

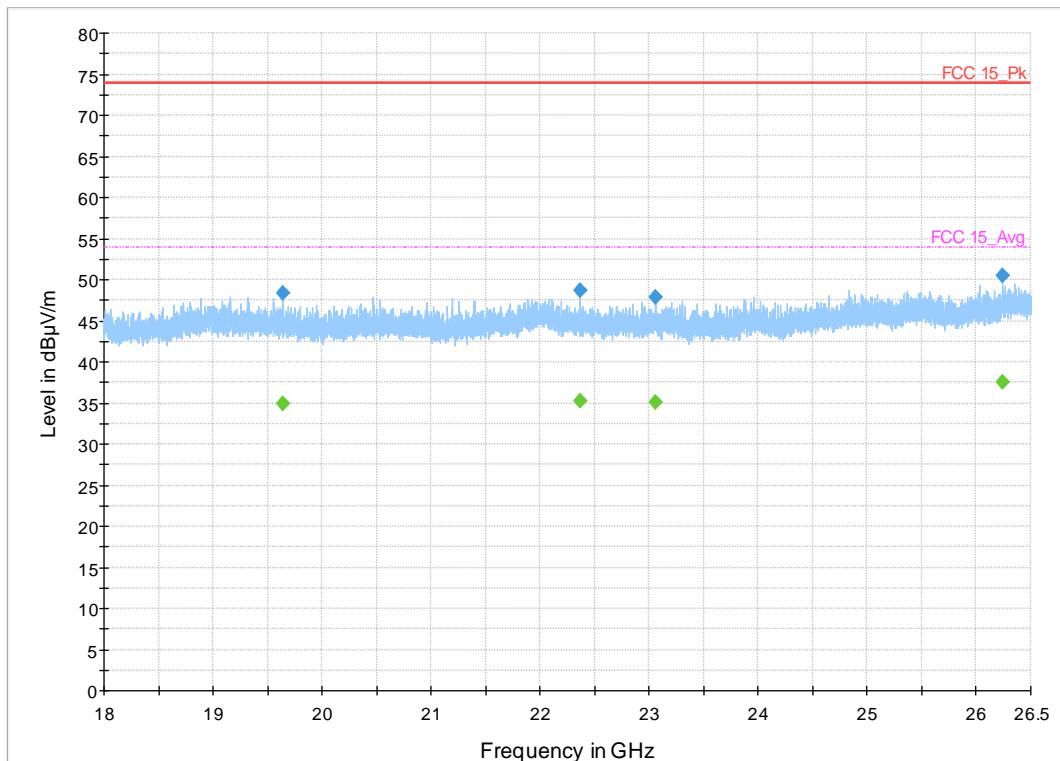

Plot 28. 18-26.5GHz, 2480MHz

4.7 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2014. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207 and RSS-GEN. Sect. 8.8.

4.7.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 μ H / 50 Ω LISNs.

Testing is performed in Lab1. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.7.1.1 Deviations

There were no deviations from this test methodology.

4.7.2 Test Results

As originally tested, the EUT was found to be Non-Applicable to the requirements of the test standard(s). The EUT is Powered by two 1.5V Battery's only.

5 Test Equipment List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Spectrum Analyzer	Rohde & Schwarz	FSU26.5	200050	11/20/2018	11/20/2019
EMI Receiver	Rohde & Schwarz	ESW44	101663-dv	07/18/2019	07/18/2020
Preamplifier, 9 kHz – 1 GHz	Sonoma	310N	213221	01/16/2019	01/16/2020
Bilog Antenna	Sunol Sciences	JB3	A060502	05/27/2018	05/27/2020
Amplifier	Miteq	TTA1800-30-HG	1842452	01/15/2019	01/15/2020
Horn Antenna	Sunol Sciences	DRH-118	A040806	03/05/2019	03/05/2020
Amplifier	HP	8449B	3008A01013	01/15/2019	01/15/2020
Amplifier	Sonoma	310N	185516	N/A (See Note)	
1.6 GHz Low Pass Filter	K&L Microwave	8L120-X1600-0/09135-0249	UA691-35	N/A (See Note)	
3.5 GHz High Pass Filter	Hewlett Packard	84300-80038	820004	N/A (See Note)	
2.4GHZ Band Pass Filter	Microtronics	BRM50702	009	1/15/2019	1/15/2020

Note: Equipment is characterized before use.

6 EMC Test Plan

6.1 *Introduction*

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 *Customer*

Table 6: Customer Information

Company Name	Otis Elevator
Address	5 Farm Springs Road
City, State, Zip	Farmington, CT 06032 USA
Country	USA

Table 7: Technical Contact Information

Name	Craig Bogli
E-mail	Craig.Boli@otis.com

6.3 *Equipment Under Test (EUT)*

The information provided in the following table should be listed as it should appear in the final report. For those products that have only a model name, list the model number as *non-applicable* and vice-versa.

Table 8: EUT Designation

Product Name	Edge Sensor Logger V1
Model Number	GAA817A

6.4 Product Specifications

Table 9: EUT Specifications

EUT Specifications	
Environment	Indoor/Outdoor
Operating Temperature Range:	-10-60°C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Product Marketing Name (PMN)	Edge Sensor Logger
Hardware Version Identification Number (HVIN)	4.4
Firmware Version Identification Number (FVIN)	4.8
Operating Modes	BT Low Energy, 1Mbps
Transmitter Frequency Band	2.4 GHz – 2.4835 GHz
Power Setting @ Operating Channel	See section 4.1.2.
Modulation	GFSK
TX/RX Chain (s)	SISO
Type of Equipment	<input type="checkbox"/> Table Top <input checked="" type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input type="checkbox"/> Other:
Note: EUT will be on / transmitted at all times with the highest power levels and antenna gains per channel.	

Table 10: Antenna Information

Number	Antenna Type	Description	Max Gain (dBi)
Antenna 0	Internal, PCB	Bluetooth Low Energy	3.3

Table 11: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
Serial	Serial to USB	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> Metric: < 3.0m	<input checked="" type="checkbox"/> M

Table 12: Accessory Equipment

Equipment	Manufacturer	Model	Serial	Comment
N/A				
1. Note:				

Table 13: Ancillary Equipment (used for test purposes only)

Equipment	Manufacturer	Model	Serial	Used for
Laptop	HP	Pavilion	N/A	Setup EUT operating channels via serial connection to EUT
Note: None.				

Table 14: Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 15.247
GAA817A	N/A	Integrated Antenna	Radiated Emissions
		Direct via U.FL Connection	Transmit Power, Occupied Bandwidth, Out of Band Emission, PSD

Table 15: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
GAA817A	PCB	Transmit	EUT Flat	EUT side	EUT Upright

Note: Manufacturer has declared that the EUT is designed to operate in a fixed, upright position.

6.5 Test Specifications

Table 16: Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2019	All
RSS 247 Issue 2, 2017	All

END OF REPORT