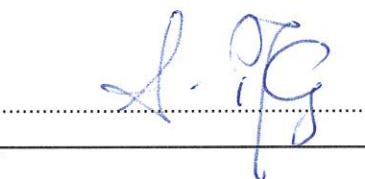


EMC TEST REPORT

FCC Title 47 CFR Part 15B, ISED ICES-003 Issue 7

Report Reference No	G0M-2201-1273-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	    A2LA - Registration number: 1983.01 (ISED) ISED wireless device testing laboratory: CN 3470A DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
Applicant	EMUGE-Werk Richard Gimpel GmbH & Co. KG
Address	Nürnberger Straße 96-100 91207 Lauf Germany
Test Specification Standard(s)	Title 47 CFR Part 15 Subpart B ISED ICES-Gen Issue 1 ; Amendment 1 (February 2021) ISED ICES-003 Issue 7 ANSI C63.4:2014+A1:2017
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Spannzangen-Aufnahme mit integrierter Übersetzung und Impulszähler (Collet holder with integrated transmission, pulse counter and passiv NFC)
Model(s)	Speedsynchro®-Mini
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	V2.10
Software Version(s)	V2.56
FCC-ID	2AUL9-F372
IC	-
Test Result	PASSED

Possible test case verdicts:	
required by standard but not tested	N/T
not required by standard	N/R
required by standard but not appl. to test object	N/A
test object does meet the requirement	P(PASS)
test object does not meet the requirement	F(FAIL)
Testing:	
Date of receipt of test item	2022-07-26
Report:	
Compiled by	Manuel Engel
Tested by (+ signature) (Responsible for Test)	Manuel Engel 
Approved by (+ signature) (Test Lab Engineer)	Andreas Pflug 
Date of Issue	2022-08-16
Total number of pages	24
General Remarks:	
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.</p>	
Additional Comments:	
-	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T _{NOM}	Nominal operating temperature
V _{NOM}	Nominal supply voltage

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2022-08-17	Initial Release	

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	9
1.4	Support Equipment.....	14
1.5	Operational Modes.....	14
1.6	EUT Configuration.....	14
1.7	Sample emission level calculation.....	15
2	Result Summary.....	16
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	17
3	Measurement Uncertainty	24

1 Equipment (Test Item) Under Test

Description	Spannzangen-Aufnahme mit integrierter Übersetzung und Impulszähler (Collet holder with integrated transmission, pulse counter and passiv NFC)				
Model	Speedsynchro®-Mini				
Additional Model(s)	None				
Brand Name(s)	None				
Hardware Version(s)	V2.10				
Software Version(s)	V2.56				
Number of tested samples	1				
Sample Identification	EUT #	Sample-ID	Serial Number		
	EUT 1	40862	1234567		
EUT Dimensions [cm]	19 x 11.3 x 6,4				
FCC-ID	2AUL9-F372				
IC	-				
Class	Class A				
Equipment type	Table top				
Highest internal frequency [MHz]	13.56				
Protective Earth	None				
Radio Module	None				
Supply Voltage	V _{NOM}	3.6 V DC via internal non rechargeable battery			
AC/DC-Adaptor	None				
Manufacturer	EMUGE-Werk Richard Gimpel GmbH & Co. KG Nürnberg Straße 96-100 91207 Lauf GERMANY				

1.1 Equipment Ports

Name	Type	Attributes	Comment
None			
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
BAT	DC power input port connected to external battery		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Battery	Saft	LS 14250	Li-SO ₂
AE	Smart phone	Samsung	GT-I9506	Lab equipment
SW	Android app	Emuge	V0.9	-
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
MON	Monitoring Equipment			
CBL	Connecting Cable			
Comment:				

1.5 Operational Modes

Mode #	Description
1	Device is activate, waiting to be turned and transfer data via NFC to a companion device.
Comment: worst-case	

1.6 EUT Configuration

Configuration #	Description
1	Device is powered via internal non rechargeable battery EUT is not grounded.
Comment: -	

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dB μ V. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dB μ V + 26 dB/m	= 47.5 dB μ V/m	:	47.5 dB μ V/m - 57.0 dB μ V/m	= -9.5 dB

2 Result Summary

Title 47 CFR Part 15B, ISED ICES-003 Issue 7				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 3.2.2	Radiated emissions	ANSI C63.4:2014 +A1:2017	PASS	-
FCC 15.107 ICES-003, 3.2.1	AC power line conducted emissions	ANSI C63.4:2014 +A1:2017	N/R	-
Comment:				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object



2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 3.2.2
Reference method	ANSI C63.4:2014+A1:2017 Section 8
Equipment class	Class A
Equipment type	Table top
Highest internal frequency [MHz]	13.56
Measurement range	30 MHz to 1000 MHz
Temperature [°C]	22 ± 1
Humidity [%]	47 ± 2
Operator	Manuel Engel
Date	2022-07-27

2.1.2 Setup

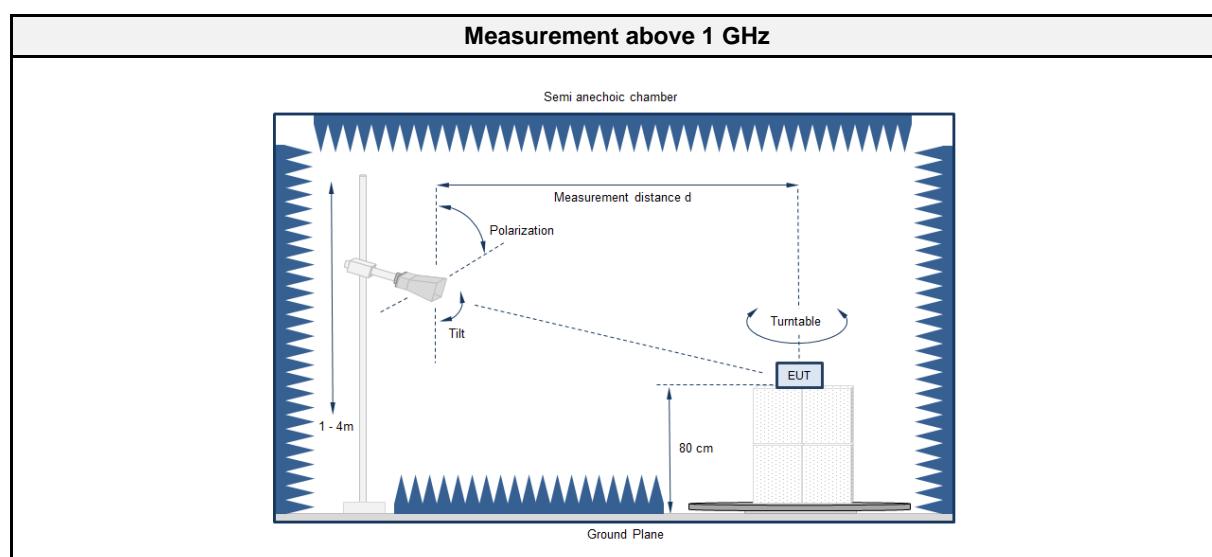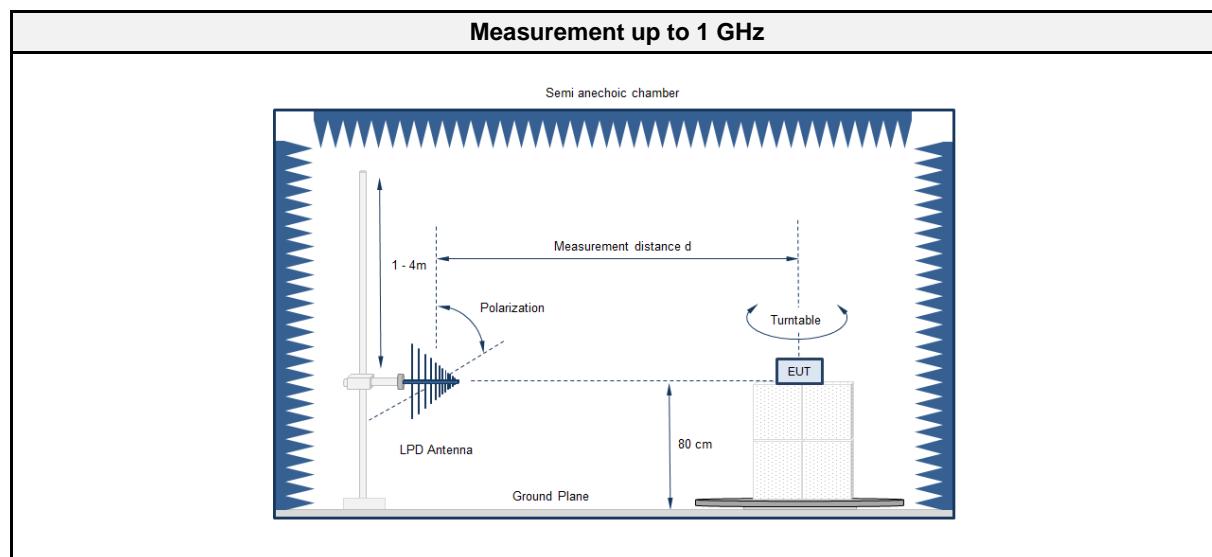

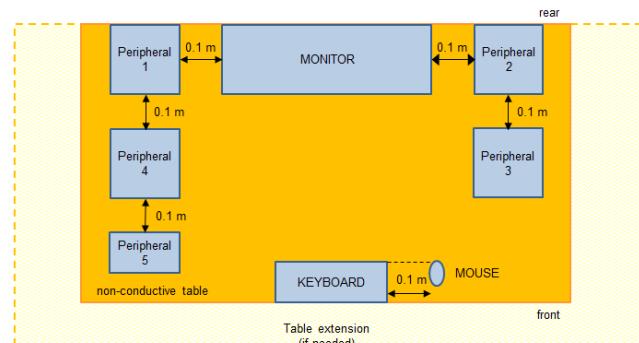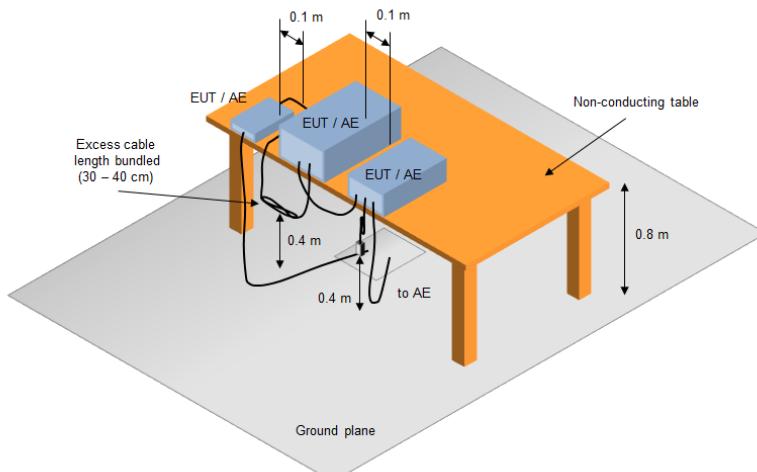Equipment placement - Table top

Test Setup

2.1.3 Equipment
Test Software

Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2020.1.8

Test Equipment

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber (NSA)	Frankonia	AC6	EF00910	2021-07	2024-07
EMI Test Receiver	R&S	ESU8	EF00379	2021-08	2022-08
TRILOG Broadband Antenna	Schwarzbeck	VULB 9162	EF00978	2019-10	2022-10
Climatic Sensor	Embedded Data Systems, LLC.	9A00100000254 77E	EF01124	2022-07	2023-07

2.1.4 Procedure

Exploratory measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a non-conductive table at a height of 0.8m. 2. The EUT and support equipment, if needed, were set up to simulate typical usage. 3. Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage. 4. The antenna was placed at a distance of 3 or 10 m. 5. The received signal was monitored at the measurement receiver. 6. This procedure has to be performed in both antenna polarizations, horizontal and vertical. 7. The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 2.1.2

Final measurement
<ol style="list-style-type: none"> 1. The EUT was placed on a 0.8 m non-conductive table at a 3 or 10 meter distance from the receive antenna. The antenna output was connected to the measurement receiver. 2. A broadband hybrid antenna was used for the frequency range 30 – 1000 MHz. Above 1 GHz the antenna was placed on an adjustable height antenna mast. In the range 1- 18 GHz a double ridged broadband horn antenna was used, from 18 – 26.5 GHz the AT4560 and above 26.5 GHz the antenna CBL26402075. 3. The EUT and cable arrangement were based on the exploratory measurement results. 4. Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded. 5. The test data of the worst-case conditions were recorded and shown on the next pages.

2.1.5 Limits

Class A @ 10 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak Average	69.5 49.5


2.1.6 Results

Test Results			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	-

2.1.8 Records


Radiated emissions according to FCC 15B

Project Number: G0M-2201-1273
 Applicant: EMUGE-Werk Richard Gimpel GmbH & Co. KG
 Model Description: Spannzangen-Aufnahme mit integrierter Übersetzung und Impulszähler
 Model: Speedsynchro®-Mini
 Test Sample ID: 40862
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Engel
 Test Date: 2022-07-27
 Operating Conditions: ambient temperature: 22 °Celsius
 power input: 3.6 V DC via internal battery
 Antenna: Schwarzbeck VULB 9162, Horizontal
 Measurement Distance: 10 m
 Operational Mode: Mode 1
 EUT Configuration: Configuration 1
 Note 1: Height 1 m, angle 0°

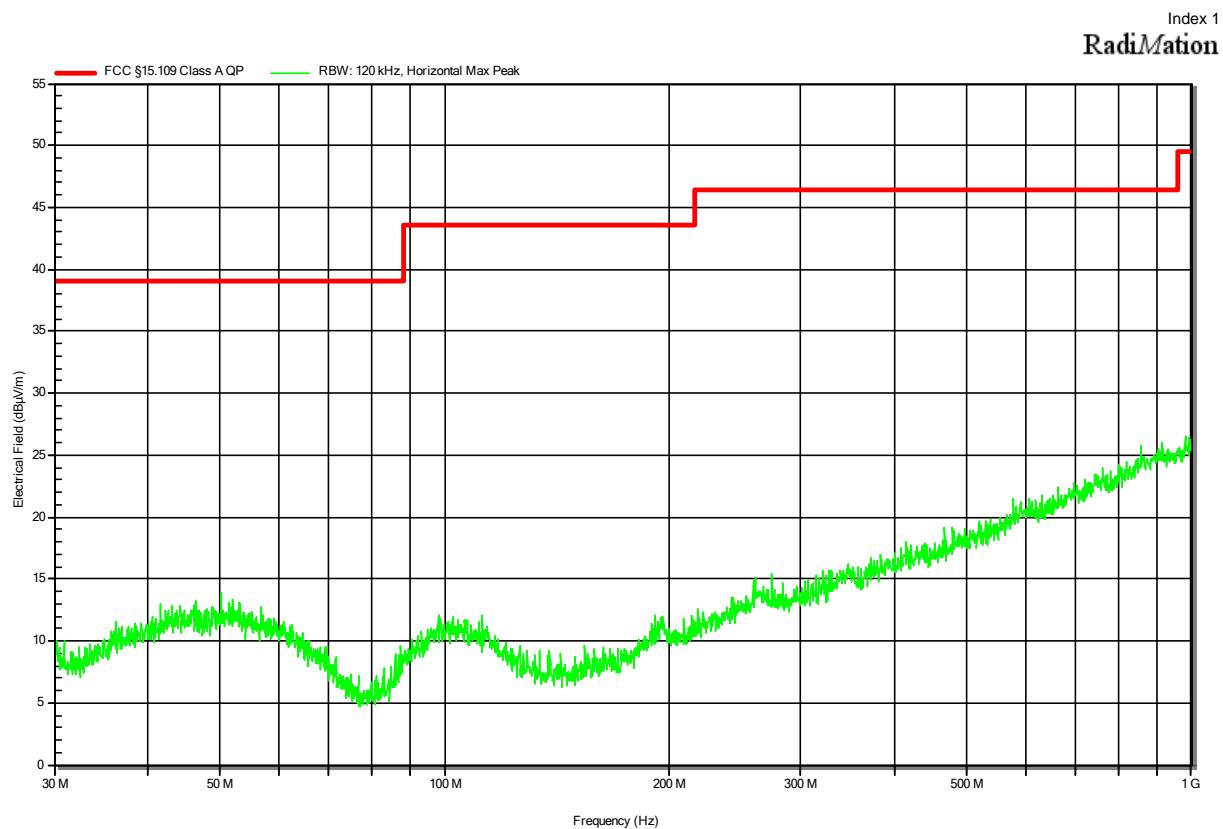

**Radiated emissions
according to FCC 15B**

Project Number: G0M-2201-1273
Applicant: EMUGE-Werk Richard Gimpel GmbH & Co. KG
Model Description: Spannzangen-Aufnahme mit integrierter Übersetzung und Impulszähler
Model: Speedsynchro®-Mini
Test Sample ID: 40862
Test Site: Eurofins Product Service GmbH
Operator: Mr. Engel
Test Date: 2022-07-27
Operating Conditions: ambient temperature: 22 °Celsius
power input: 3.6 V DC via internal battery
Antenna: Schwarzbeck VULB 9162, Vertical
Measurement Distance: 10 m
Operational Mode: Mode 1
EUT Configuration: Configuration 1
Note 1: Height 1 m, angle 0°

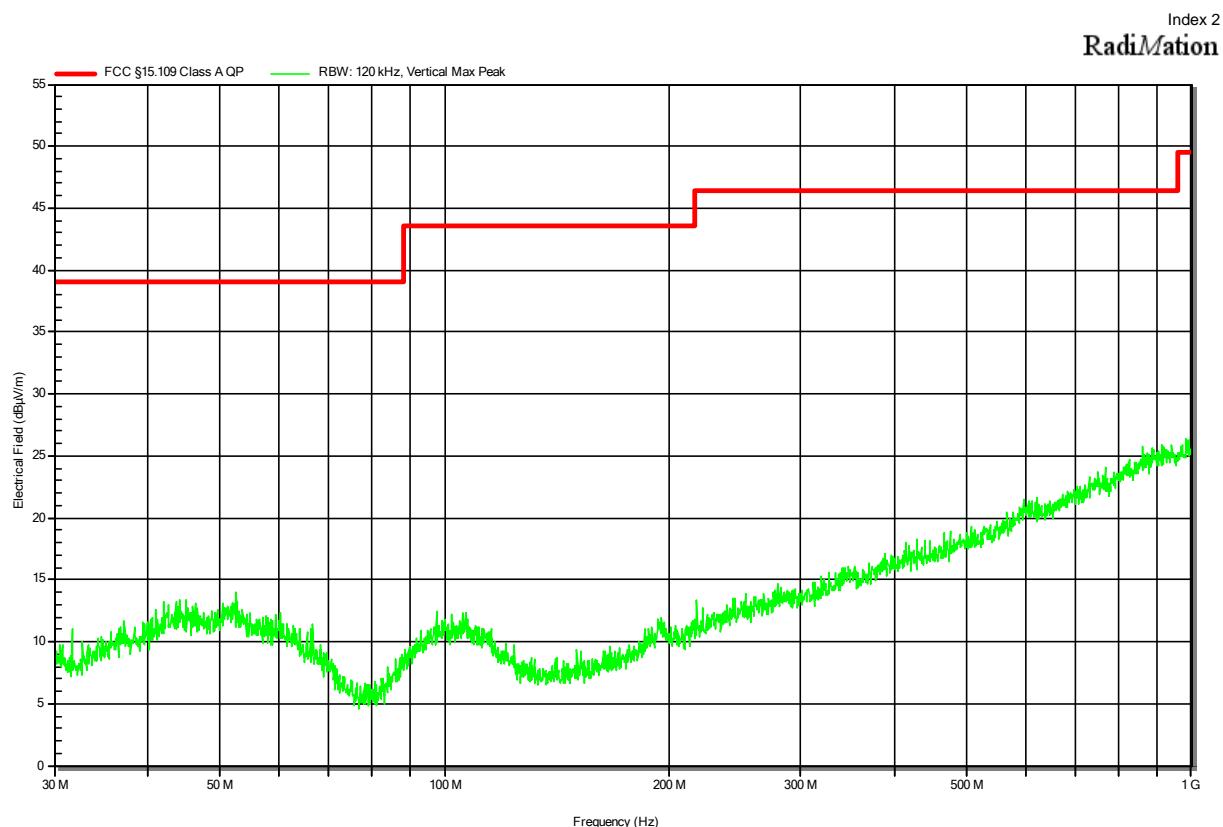

3 Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2.

Test Name	Measurement Uncertainty
Radiated Emission	30 MHz to 1 GHz @ 10 m, 6.25 dB 1 GHz to 6 GHz @ 3 m, 4.86 dB 6 GHz to 18 GHz @ 3 m, max. 5.39 dB