

RF Test Report

For

Applicant name: Shenzhen Eview GPS Technology

Address: Rm 201, building 1-A, Nankechuang Yuangu, Dalang, Longhua District, Shenzhen, China

EUT name: Personl Mobile Alarm System

Brand name: N/A

Model number: EV-07BX-V

Series model number: N/A

FCC ID: 2AUMJEV-07BX-V

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.

Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Report number: BTF250417R00102

Test standards: FCC CFR Title 47 Part 15 Subpart C (§15.247)

Test conclusion: Pass

Date of sample receipt: 2025-04-17

Test date: 2025-04-18 to 2025-05-12

Date of issue: 2025-05-12

Test by: Sean.He
Sean.He / Tester

Prepared by: Chris Liu

Chris Liu / Project engineer

Approved by



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd. All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue date	Revisions content
R_V0	2025-05-12	Original

Note:
Once the revision has been made, then previous versions reports are invalid.

Table of Contents

1 Introduction	4
1.1 Laboratory Location	4
1.2 Laboratory Facility	4
1.3 Announcement	4
2 Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Technical Information	6
3 Test Information	7
3.1 Test Standards	7
3.2 Summary of Test	7
3.3 Uncertainty of Test	8
3.4 Additions to, deviations from, or exclusions from the method	8
3.5 Test Auxiliary Equipment	8
3.6 Test Equipment List	8
4 Test Configuration	10
4.1 Environment Condition	10
4.2 Test mode	10
4.3 Test Channel of EUT	10
4.4 Test software	10
4.5 Test procedure	11
4.6 Test Setup Block	12
5 Technical requirements specification	14
5.1 Summary of Test Result	14
5.2 Antenna Requirement	15
5.3 AC Power Line Conducted Emission	16
5.3.1 Test Setup	16
5.4 Emissions in Restricted Frequency Bands	19
5.4.1 Test Setup	19
5.5 Emissions in Non-restricted Frequency Bands	21
5.6 Occupied Bandwidth	26
5.6.1 E.U.T. Operation:	26
5.6.2 Test Data:	26
5.6.3 Test Setup	26
5.7 Maximum Conducted Output Power	27
5.7.1 E.U.T. Operation:	27
5.7.2 Test Data:	27
5.7.3 Test Setup	27
5.8 Power Spectral Density	28
5.8.1 E.U.T. Operation:	28
5.8.2 Test Data:	28
5.8.3 Test Setup	28
5.9 Emissions in non-restricted frequency bands	29
5.9.1 E.U.T. Operation:	29
5.9.2 Test Data:	29
5.9.3 Test Setup	29
6 Test Setup Photos	30
7 EUT Constructional Details (EUT Photos)	30

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**

BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 518915.

- **CNAS - Registration No.: CNAS L17568**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.

- **A2LA - Registration No.: 6660.01**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building 1-A, Nankechuang Yuangu, Dalang, Longhua District, Shenzhen, China

2.2 Manufacturer Information

Company name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building 1-A, Nankechuang Yuangu, Dalang, Longhua District, Shenzhen, China

2.3 Factory Information

Company name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building 1-A, Nankechuang Yuangu, Dalang, Longhua District, Shenzhen, China

2.4 General Description of Equipment under Test (EUT)

EUT name	Personl Mobile Alarm System
Under test model name	EV-07BX-V
Series model name	N/A
Description of model name differentiation	N/A
Hardware Version	EV07B_LTE_V2.0
Software Version	N/A
Rating:	Input: DC5V 1A Battery: 3.7V 800mAh 2.96Wh

2.5 Technical Information

Operation frequency:	2412MHz ~ 2462MHz (for 802.11b/g/n-HT20)
Channel numbers:	11 (for 802.11b/g/n-HT20)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	DSSS-DBPSK, DQPSK, CCK
Modulation technology: (IEEE 802.11g/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
Data rate:	802.11b: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps 802.11g: 6Mbps, 9Mbps, 12Mbps etc., and up to 54Mbps 802.11n-HT20: 6.5Mbps, 13Mbps, 19.5Mbps etc., and up to 72.2Mbps
Max. E.I.R.P Power:	10.78 dBm (802.11b)
Antenna type:	FPC Antenna
Antenna gain:	-4.90 dBi (declare by Applicant)
Antenna transmit mode:	SISO (1TX, 1RX)

3 Test Information

3.1 Test Standards

Identity	Document Title
FCC CFR Title 47 Part 15 Subpart C (§15.247)	Intentional Radiators - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10-2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of The FCC Rules

3.2 Summary of Test

Clauses	Test Items	Result
§ 15.203 § 15.247 (b)(4)	Antenna Requirement	Pass
§ 15.207	AC Power Line Conducted Emission	Pass
§ 15.247(b)(3)	Duty Cycle	Pass
§ 15.247(b)(3)	Conducted Output Power	Pass
§ 15.247(a)(2)	6dB Emission Bandwidth 99% Occupied Bandwidth	Pass
§ 15.247(e)	Power Spectral Density	Pass
§ 15.247(d)	Band-edge Emission Conduction Spurious Emission	Pass
§ 15.205 § 15.247(d)	Emissions in Restricted Frequency Bands	Pass
§ 15.209 § 15.247(d)	Emissions in Non-restricted Frequency Bands	Pass
Remark: 1. Pass: met the requirements. 2. N/A: not applicable.		

3.3 Uncertainty of Test

Measurement	Value
Conducted Emission for LISN (9kHz ~ 150kHz)	±2.97 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.80 dB
Radiated Emission (1GHz ~ 18GHz)	±4.82 dB
Radiated Emission (18GHz ~ 40GHz)	±4.94dB
Conducted spurious emissions	±2.75dB
Occupied Channel Bandwidth	±5%
RF output power, conducted	±1.5 dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4 Additions to, deviations from, or exclusions from the method

None

3.5 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Adapter	Apple	A2244	N/A	N/A

3.6 Test Equipment List

Radiated Emission Test					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2024/10/25	2025/10/24
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2024/10/25	2025/10/24
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2024/10/28	2025/10/27
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2024/09/24	2025/09/23
Horn Antenna	Schwarzbeck	BBHA9120D	2597	2024/10/30	2025/10/29
Preamplifier (1GHz ~ 18GHz)	Schwarzbeck	BBV9718D	00008	2024/09/24	2025/09/23
Horn Antenna (15GHz ~ 40GHz)	SCHWARZBECK	BBHA9170	1157	2024/10/24	2025/10/23
Test Software	Frad	EZ_EMCA	Version: FA-03A2 RE+		

Conducted Emission Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2024/10/25	2025/10/24
V-LISN	Schwarzbeck	NSLK 8127	01073	2024/10/25	2025/10/24
Coaxial Switcher	Schwarzbeck	CX210	CX210	/	/
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	/	/
Test Software	Frad	EZ_EMCA	Version: EMC-CON 3A1.1+		

Conducted test method					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY50410020	2024/10/25	2025/10/24
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2024/10/25	2025/10/24
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024/10/25	2025/10/24
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2024/10/25	2025/10/24
Temperature Humidity Chamber	ZZCKONG	ZZ-K02A	20210928007	2024/10/25	2025/10/24
DC Power Supply	Tongmen	etm-6050c	20211026123	2024/10/25	2025/10/24
RF Control Unit	Techy	TR1029-1	/	2024/10/25	2025/10/24
RF Sensor Unit	Techy	TR1029-2	/	2024/10/25	2025/10/24
Test Software	TST Pass	/	Version: 2.0		

4 Test Configuration

4.1 Environment Condition

Selected Values During Tests		
Temperature	Relative Humidity	Ambient Pressure
Normal: +15°C to +35°C	20% to 75%	86 kPa to 106 kPa
Extreme: -30°C to +50°C		

4.2 Test mode

Transmitting mode:	Keep the EUT in continuously transmitting mode with modulation
Remark: Per-scan all kind of data rate, and report only reflects the test data of worst data rate mode.	

4.3 Test Channel of EUT

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n-HT20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462
802.11n-HT40					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
3	2422	6	2437	9	2452

4.4 Test software

Test software:	EspRFTTestTool_v2.6_Manual.exe	Version:	v2.6
Power Class:	0	--	--

4.5 Test procedure

AC Power Line Conducted Emission

The EUT is connected to the power mains through a LISN which provides $50\ \Omega/50\ \mu\text{H}$ of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Radiated test method

For below 1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

For above 1GHz:


1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

Conducted test method


1. The WiFi antenna port of EUT was connected to the test port of the test system through an RF cable.
2. The EUT is keeping in continuous transmission mode and tested in all modulation modes.
3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

4.6 Test Setup Block



1) Conducted emission measurement:

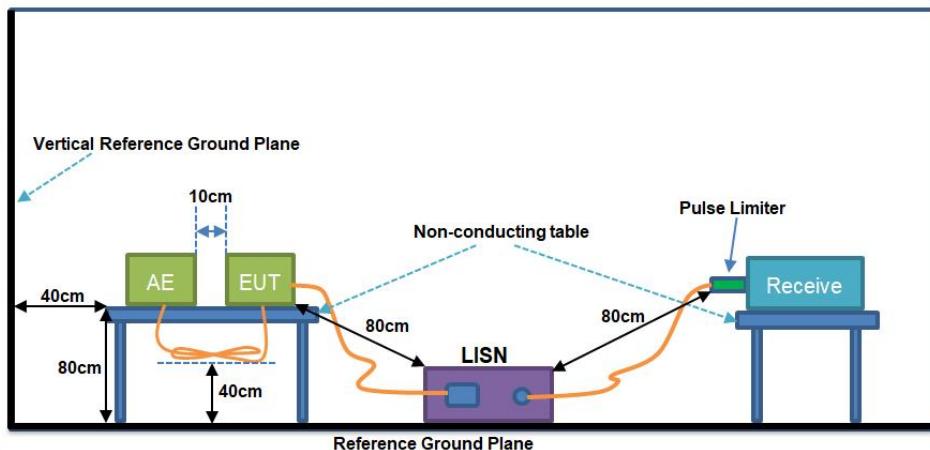

2) Conducted test method:

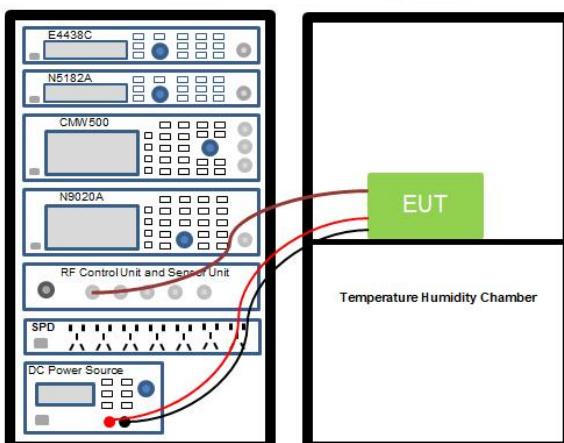

3) Radiated test method:

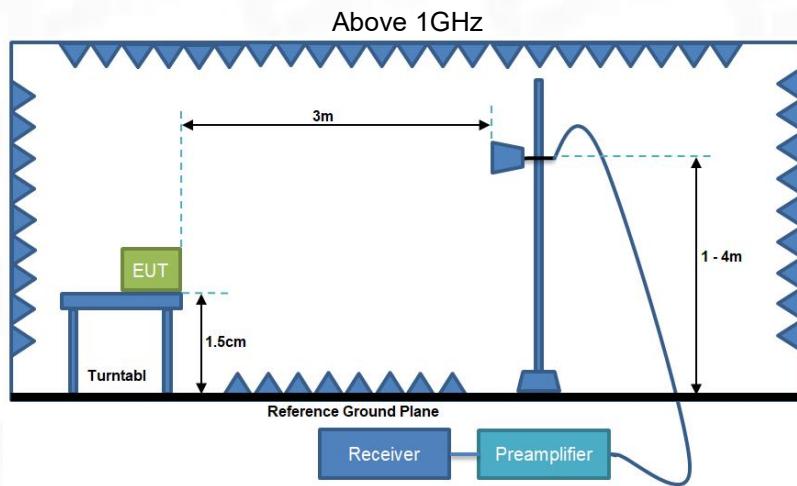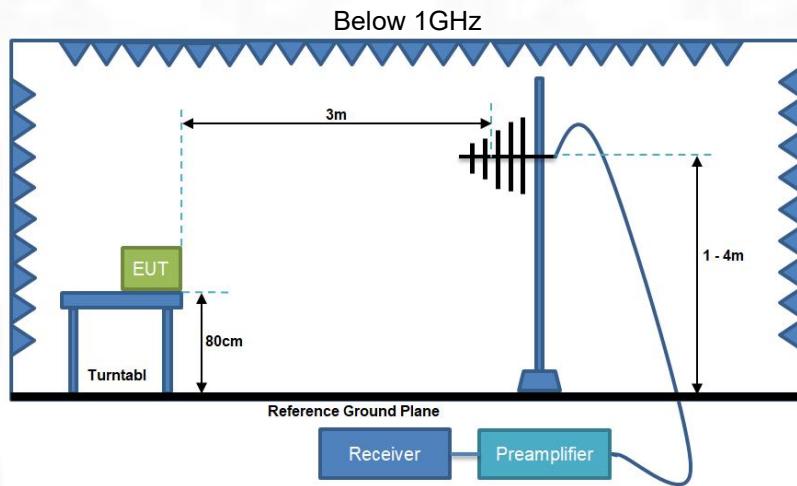

5 Technical requirements specification

5.1 Summary of Test Result

Test Items	Limit	Test data	Verdict
Antenna Requirement	Please refer to §15.203 and §15.247(b)(4)	See Section 5.2	Pass
AC Power Line Conducted Emission	Please refer to §15.207	See Section 5.3	Pass
Duty Cycle	ANSI C63.10-2020	See Appendix-2.4G WiFi	Pass
Conducted Output Power	For systems using digital modulation: 1 Watts (30 dBm).	See Appendix-2.4G WiFi	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.	See Appendix-2.4G WiFi	Pass
Power Spectral Density	For digitally modulated systems, the power spectral density shall not be greater than 8 dBm in any 3 kHz.	See Appendix-2.4G WiFi	Pass
Band-edge Emission Conduction Spurious Emission	Please refer to §15.247(d)	See Appendix-2.4G WiFi	Pass
Emissions in Restricted Frequency Bands	Please refer to §15.205	See Section 5.4	Pass
Emissions in Non-restricted Frequency Bands	Please refer to §15.209 and §15.247(d)	See Section 5.5	Pass

5.2 Antenna Requirement

§15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

§15.247(b) (4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

E.U.T Antenna:

The WiFi antenna is an Internal antenna which permanently attached, and the best case gain of the antenna is -4.9 dBi. See product internal photos for details.

5.3 AC Power Line Conducted Emission

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Method:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50

*Decreases with the logarithm of the frequency.


Temperature	22.5°C	Humidity	56%
Test voltage	AC 120V/60Hz	Test Engineer	Zero Zeng

5.3.1 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos


Remark: During the test, pre-scan 802.11b/g/n modulation mode, found 802.11b modulation was worse case mode. The report only reflects the test data of worst mode.

Test phase: L phase

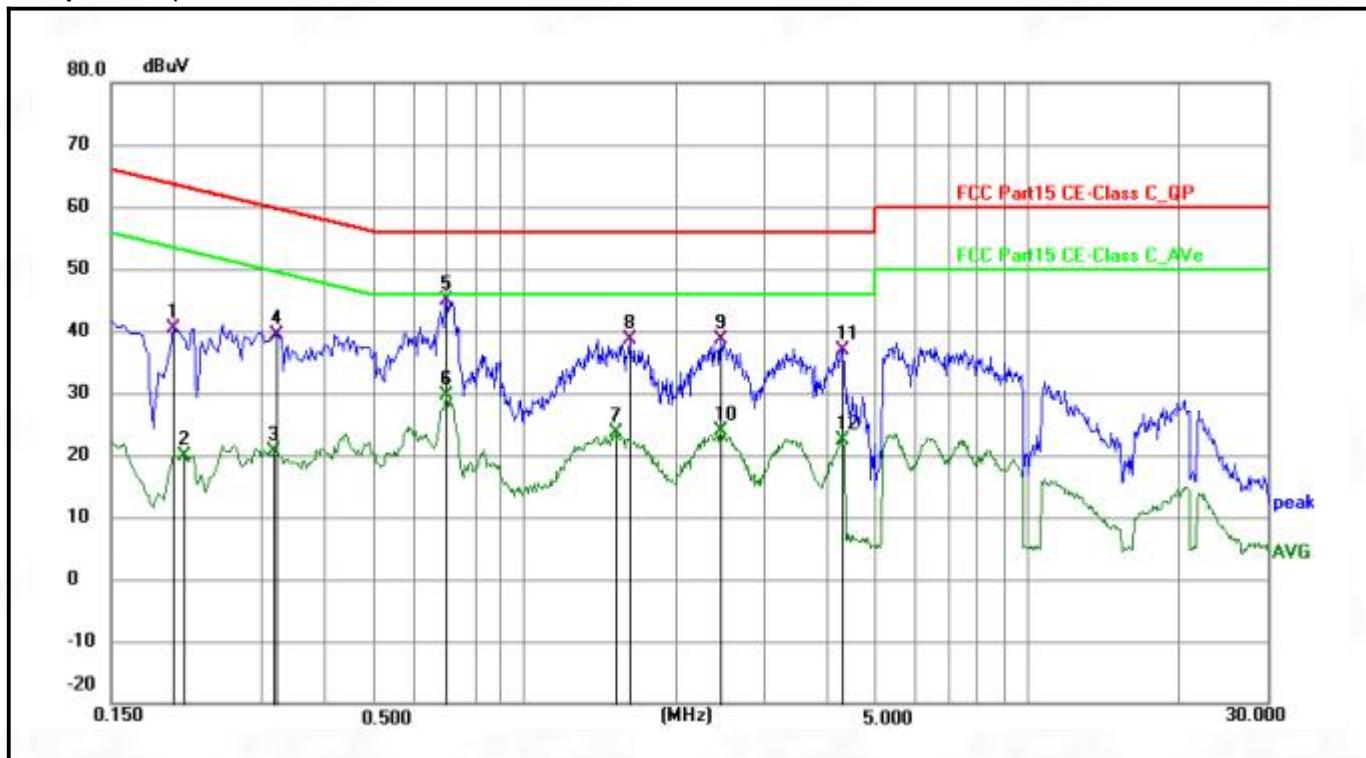

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1995	29.70	10.66	40.36	63.63	-23.27	QP	P	
2	0.2084	9.24	10.66	19.90	53.27	-33.37	AVG	P	
3	0.3165	9.94	10.67	20.61	49.80	-29.19	AVG	P	
4	0.3209	28.65	10.67	39.32	59.68	-20.36	QP	P	
5 *	0.6990	34.30	10.58	44.88	56.00	-11.12	QP	P	
6	0.6990	19.08	10.58	29.66	46.00	-16.34	AVG	P	
7	1.5135	12.82	10.76	23.58	46.00	-22.42	AVG	P	
8	1.6170	27.82	10.74	38.56	56.00	-17.44	QP	P	
9	2.4585	27.83	10.69	38.52	56.00	-17.48	QP	P	
10	2.4585	13.22	10.69	23.91	46.00	-22.09	AVG	P	
11	4.3034	26.06	10.85	36.91	56.00	-19.09	QP	P	
12	4.3034	11.50	10.85	22.35	46.00	-23.65	AVG	P	

Test phase: N phase

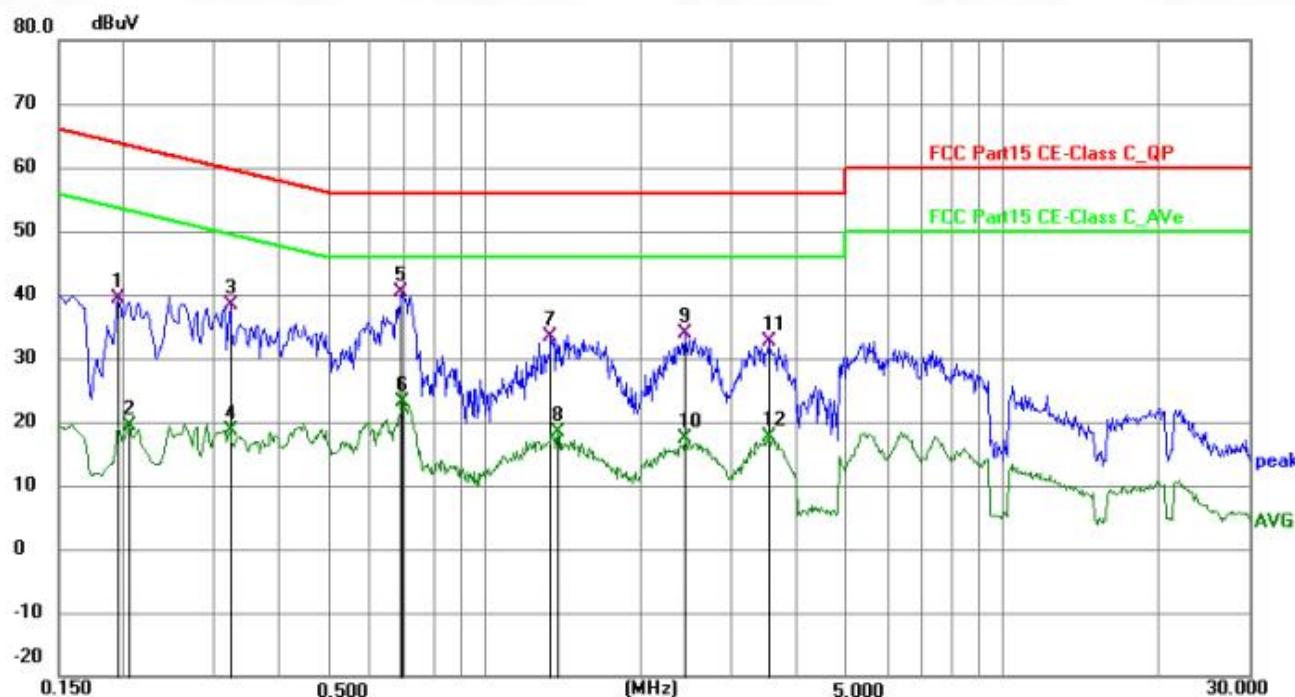

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1955	28.73	10.56	39.29	63.80	-24.51	QP	P	
2	0.2050	8.88	10.56	19.44	53.41	-33.97	AVG	P	
3	0.3217	27.62	10.65	38.27	59.66	-21.39	QP	P	
4	0.3217	8.02	10.65	18.67	49.66	-30.99	AVG	P	
5 *	0.6899	29.46	10.88	40.34	56.00	-15.66	QP	P	
6	0.6936	12.36	10.88	23.24	46.00	-22.76	AVG	P	
7	1.3379	22.52	10.89	33.41	56.00	-22.59	QP	P	
8	1.3810	7.55	10.90	18.45	46.00	-27.55	AVG	P	
9	2.4346	22.82	10.95	33.77	56.00	-22.23	QP	P	
10	2.4346	6.35	10.95	17.30	46.00	-28.70	AVG	P	
11	3.5278	21.79	10.85	32.64	56.00	-23.36	QP	P	
12	3.5278	6.67	10.85	17.52	46.00	-28.48	AVG	P	

Note1: Level= Read Level+ Cable Loss+ LISN Factor

Note2: Margin=Level-Limit=Reading+factor-Limit

5.4 Emissions in Restricted Frequency Bands

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).			
Test Method:	Radiated emissions tests			
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	
	0.009-0.490	2400/F(kHz)	300	
	0.490-1.705	24000/F(kHz)	30	
	1.705-30.0	30	30	
	30-88	100 **	3	
	88-216	150 **	3	
	216-960	200 **	3	
	Above 960	500	3	
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.				
Procedure:	ANSI C63.10-2020 section 6.10.5.2			

Temperature	22.5°C	Humidity	56%
Test voltage	DC 3.7V	Test Engineer	Zero Zeng

5.4.1 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

Remark: During the test, pre-scan 802.11b/g/n modulation mode, found 802.11b modulation was worse case mode. The report only reflects the test data of worst mode.

Test Mode: 802.11b							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2310.00	51.74	3.85	55.59	74.00	-18.41	Peak	Pass
2310.00	41.13	3.85	44.98	54.00	-9.02	AVG	Pass
2390.00	52.63	3.91	56.55	74.00	-17.45	Peak	Pass
2390.00	43.02	3.91	46.93	54.00	-7.07	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2310.00	51.61	3.85	55.46	74.00	-18.54	Peak	Pass
2310.00	41.56	3.85	45.41	54.00	-8.59	AVG	Pass

2390.00	52.36	3.91	56.27	74.00	-17.73	Peak	Pass
2390.00	41.79	3.91	45.70	54.00	-8.30	AVG	Pass

Test Channel: Highest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2483.50	51.49	3.99	55.47	74.00	-18.53	Peak	Pass
2483.50	41.52	3.99	45.50	54.00	-8.50	AVG	Pass
2500.00	52.53	4.00	56.53	74.00	-17.47	Peak	Pass
2500.00	41.90	4.00	45.90	54.00	-8.10	AVG	Pass

Test Channel: Highest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
2483.50	50.83	3.99	54.82	74.00	-19.18	Peak	Pass
2483.50	40.41	3.99	44.40	54.00	-9.60	AVG	Pass
2500.00	52.56	4.00	56.56	74.00	-17.44	Peak	Pass
2500.00	42.70	4.00	46.70	54.00	-7.30	AVG	Pass

Note1: Level= Read Level+ Cable Loss+ LISN Factor

Note2: Margin=Level-Limit=Reading+factor-Limit

5.5 Emissions in Non-restricted Frequency Bands

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).			
Test Method:	Radiated emissions tests			
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	
	0.009-0.490	2400/F(kHz)	300	
	0.490-1.705	24000/F(kHz)	30	
	1.705-30.0	30	30	
	30-88	100 **	3	
	88-216	150 **	3	
	216-960	200 **	3	
	Above 960	500	3	
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.				
Procedure:	ANSI C63.10-2020 section 6.6.4			


Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).			
Test Method:	Radiated emissions tests			
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	
	0.009-0.490	2400/F(kHz)	300	
	0.490-1.705	24000/F(kHz)	30	
	1.705-30.0	30	30	
	30-88	100 **	3	
	88-216	150 **	3	
	216-960	200 **	3	
	Above 960	500	3	
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.				
Procedure:	ANSI C63.10-2020 section 6.6.4			

Temperature	22.5°C	Humidity	56%
Test voltage	DC 3.7V	Test Engineer	Zero Zeng


For below 1GHz:

Remark: During the test, pre-scan 802.11b/g/n modulation mode, found 802.11b modulation was worse case mode. The report only reflects the test data of worst mode.

Test antenna polarization: Vertical (30 MHz to 1 GHz)

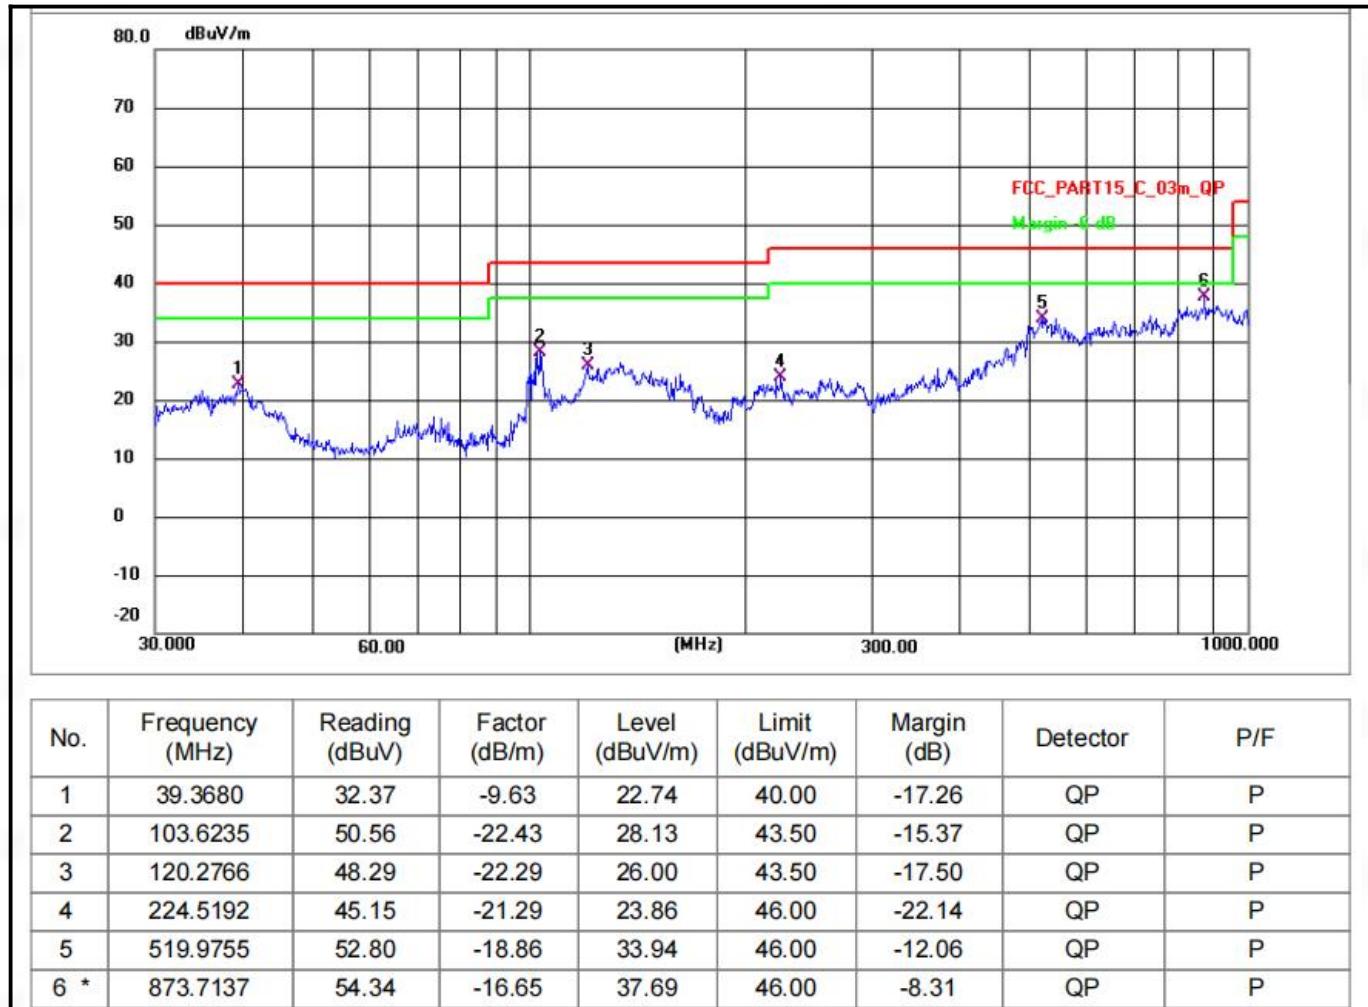

Test antenna polarization: Horizontal (30 MHz to 1 GHz)

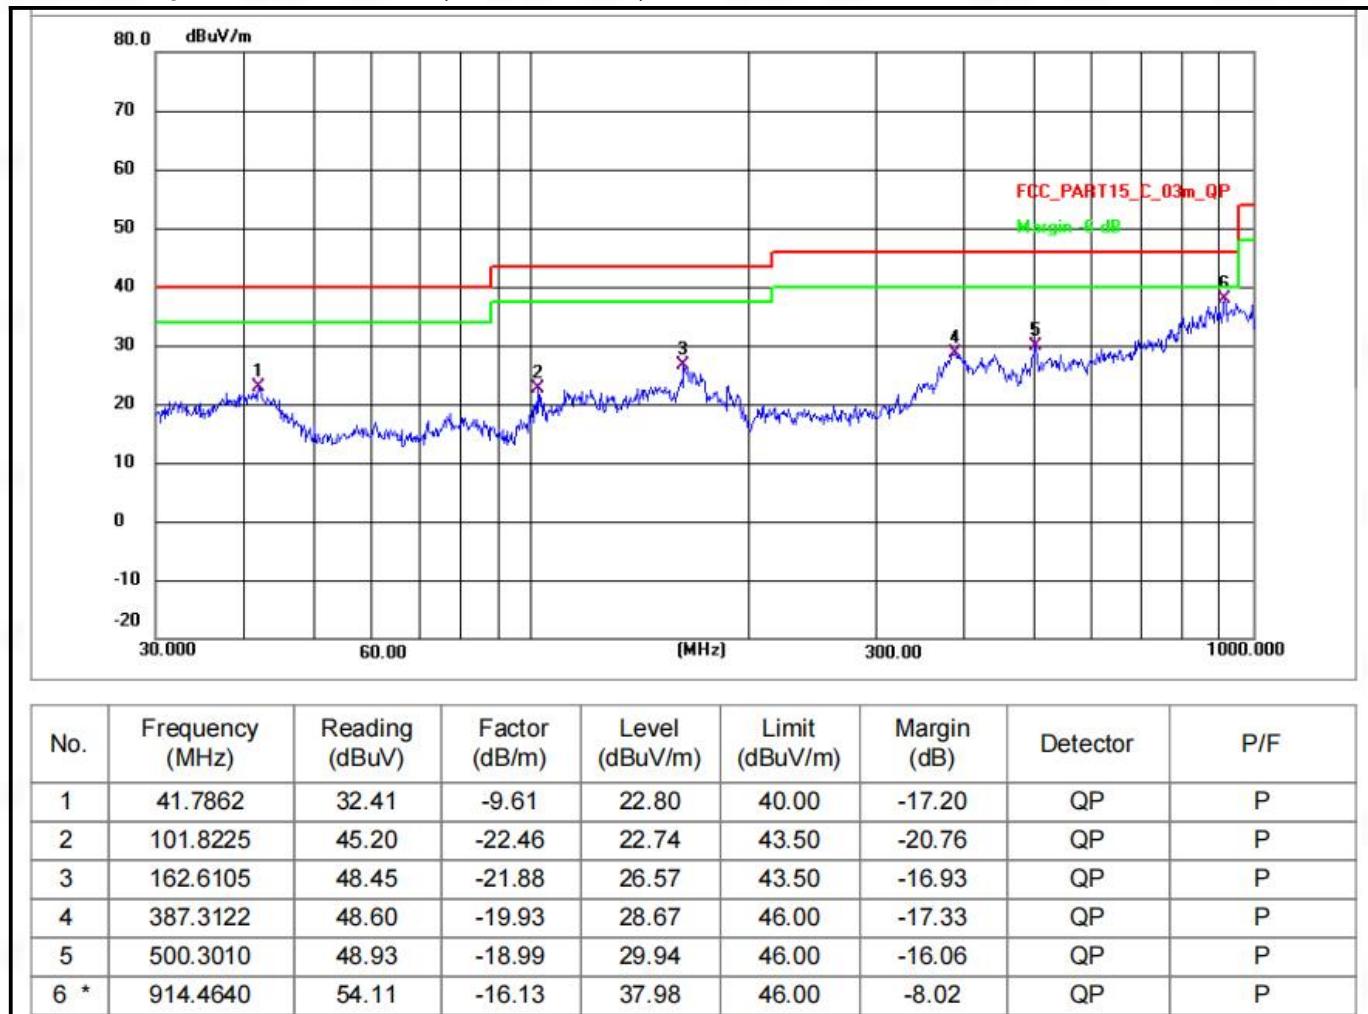

Note1:Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note2:Margin=Level-Limit=Reading+factor-Limit

For above 1GHz:

Remark: During the test, pre-scan 802.11b/g/n modulation mode, found 802.11b modulation was worse case mode.
The report only reflects the test data of worst mode.

Test Mode: 802.11b
Test Channel: Lowest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4824.00	78.64	-48.87	29.77	74.00	-44.23	Peak	Pass
4824.00	68.07	-48.87	19.20	54.00	-34.80	AVG	Pass
7236.00	75.34	-46.99	28.35	74.00	-45.65	Peak	Pass
7236.00	65.24	-46.99	18.26	54.00	-35.74	AVG	Pass

Test Channel: Lowest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4824.00	79.72	-48.87	30.85	74.00	-43.15	Peak	Pass
4824.00	69.30	-48.87	20.43	54.00	-33.57	AVG	Pass
7236.00	75.13	-46.99	28.15	74.00	-45.85	Peak	Pass
7236.00	64.62	-46.99	17.63	54.00	-36.37	AVG	Pass

Test Channel: Middle channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4874.00	79.11	-48.84	30.27	74.00	-43.73	Peak	Pass
4874.00	69.43	-48.84	20.59	54.00	-33.41	AVG	Pass
7311.00	75.46	-46.90	28.57	74.00	-45.43	Peak	Pass
7311.00	65.80	-46.90	18.90	54.00	-35.10	AVG	Pass

Test Channel: Middle channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4874.00	79.63	-48.84	30.79	74.00	-43.21	Peak	Pass
4874.00	69.02	-48.84	20.18	54.00	-33.82	AVG	Pass
7311.00	76.13	-46.90	29.23	74.00	-44.77	Peak	Pass
7311.00	65.72	-46.90	18.83	54.00	-35.17	AVG	Pass

Test Channel: Highest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4924.00	79.90	-48.81	31.09	74.00	-42.91	Peak	Pass

4924.00	69.49	-48.81	20.68	54.00	-33.32	AVG	Pass
7386.00	75.83	-46.81	29.02	74.00	-44.98	Peak	Pass
7386.00	65.15	-46.81	18.34	54.00	-35.66	AVG	Pass

Test Channel: Highest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4924.00	79.06	-48.81	30.26	74.00	-43.74	Peak	Pass
4924.00	68.61	-48.81	19.80	54.00	-34.20	AVG	Pass
7386.00	75.71	-46.81	28.90	74.00	-45.10	Peak	Pass
7386.00	66.09	-46.81	19.28	54.00	-34.72	AVG	Pass

Note1:Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note2:Margin=Level-Limit=Reading+factor-Limit

5.6 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	<ul style="list-style-type: none">a) Set RBW = 100 kHz.b) Set the VBW $\geq [3 \times \text{RBW}]$.c) Detector = peak.d) Trace mode = max hold.e) Sweep = auto couple.f) Allow the trace to stabilize.g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.7 °C
Humidity:	53.4 %
Atmospheric Pressure:	1010 hpa
Test Voltage	DC 3.7V

5.6.2 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

5.6.3 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

5.7 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power

5.7.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.7 °C
Humidity:	53.4 %
Atmospheric Pressure:	1010 hpa
Test Voltage	DC 3.7V

5.7.2 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

5.7.3 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

5.8 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.7 °C
Humidity:	53.4 %
Atmospheric Pressure:	1010 hpa
Test Voltage	DC 3.7V

5.8.2 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

5.8.3 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

5.9 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

5.9.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.7 °C
Humidity:	53.4 %
Atmospheric Pressure:	1010 hpa
Test Voltage	DC 3.7V

5.9.2 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

5.9.3 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

7 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III External Photos



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--