

433-EXT Window/Door Exit Alarm Mounting Instructions

Step #1

Remove back cover and insert batteries (Included)


Step #2

Refer to instructions for your CMU or 433-EC for programming

Step #3

- The window/door must be closed when mounting to insure that both parts of the alarm are lined up next to each other.
- Using the double stick tape provided, mount large part with antenna to the window/door frame and the small part to the window/door.
- When the window/door opened, the two parts are seperated from each other and trigger the alarm that you have it programmed to, notifying the caregiver.

*Large part of sensor with antenna must be on the left hand side when mounted in order to work correctly.

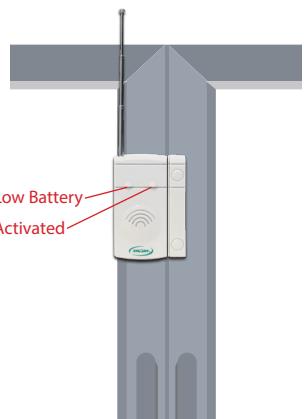

SMART CAREGIVER CORPORATION Tel: 800-650-3637 | www.smartcaregiver.com

FCC Caution:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.