



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V03  
Report Template Revision Date: Mar.1st, 2017

# FCC Test Report

**Report No. :** CQASZ20190900939E-01

**Applicant:** TV Ears Inc.

**Address of Applicant:** 2701 Via Orange Way Ste 1Spring Valley, CA 91978

**Equipment Under Test (EUT):**

**Product:** TV-Ears Long Range Headset System

**All Model No.:** Long Range Headset System, Long Range Digital Transmitter, Long Range Analog Transmitter, Long Analong Transmitter Sound Bar

**Test Model No.:** Long Range Headset System

**Brand Name:** TV Ears

**FCC ID:** 2AUOK-TVEA01

**Standards:** 47 CFR Part 15, Subpart C

**Date of Receipt:** 2019-09-16

**Date of Test:** 2019-09-16 to 2019-09-20

**Date of Issue:** 2019-09-20

**Test Result :** PASS\*

**Tested By:**

*Tom chen.*

( Tom chen )

**Reviewed By:**

*Sheek . Luo*

( Sheek Luo )

**Approved By:**

*Jack Ai*

( Jack Ai )



\* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.



Shenzhen Huaxia Testing Technology Co., Ltd

Report No.: CQASZ20190900939E-01

## 1 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190900939E-01	Rev.01	Initial report	2019-09-20

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
<b>Field Strength of the Fundamental Signal</b>	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2013)	PASS
<b>Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2013)	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2013)	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2013)	PASS

### 3 Contents

	Page
<b>1 VERSION.....</b>	<b>2</b>
<b>2 TEST SUMMARY.....</b>	<b>3</b>
<b>3 CONTENTS.....</b>	<b>4</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST ENVIRONMENT AND MODE.....	7
4.4 DESCRIPTION OF SUPPORT UNITS.....	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	8
4.6 TEST LOCATION.....	9
4.7 TEST FACILITY.....	9
4.8 DEVIATION FROM STANDARDS.....	9
4.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
4.11 EQUIPMENT LIST.....	10
<b>5 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>11</b>
5.1 ANTENNA REQUIREMENT.....	11
5.2 CONDUCTED EMISSIONS.....	12
5.3 RADIATED EMISSION.....	16
5.4 20DB BANDWIDTH.....	24
<b>6 PHOTOGRAPHS.....</b>	<b>27</b>
6.1 RADIATED EMISSION TEST SETUP.....	27
6.2 CONDUCTED EMISSION.....	28
6.3 EUT CONSTRUCTIONAL DETAILS.....	29
<b>END OF THE REPORT.....</b>	<b>34</b>

## 4 General Information

### 4.1 Client Information

Applicant:	TV Ears Inc.
Address of Applicant:	2701 Via Orange Way Ste 1Spring Valley, CA 91978
Manufacturer:	DONGGUAN WISIC ELECTRONIC CO.,LTD.
Address of Manufacturer:	Rm301, 2nd Building, No.5 Songyin Road, Tangxia Town, Dongguan City, Guangdong Province, China

### 4.2 General Description of EUT

Product name:	TV·Ears Long Range Headset System
All Model No.:	Long Range Headset System, Long Range Digital Transmitter, Long Range Analog Transmitter, Long Analong Transmitter Sound Bar
Test Model No.:	Long Range Headset System
Trade Mark :	TV Ears
Hardware Version:	V2.0
Software Version:	V2.0
Frequency Range:	5725MHz ~ 5850MHz
Modulation Type:	GFSK
Number of Channels:	18(declared by the client)
Sample Type:	Mobile production
Test Software of EUT:	RF test (manufacturer declare )
Antenna Type:	PCB antenna
Antenna Gain:	0dBi
Power Supply:	DC5V
Adapter:	Model: M050100E111U1 Input: AC 100~240V 50/60Hz 0.35A Output: DC 5V 1000mA

Note:

All model: Long Range Headset System, Long Range Digital Transmitter, Long Range Analog Transmitter, Long Analong Transmitter Sound Bar

Only the model Long Range Headset System was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5727MHz	7	5770MHz	13	5810MHz	/	/
2	5732MHz	8	5775MHz	14	5815MHz	/	/
3	5740MHz	9	5780MHz	15	5820MHz	/	/
4	5750MHz	10	5790MHz	16	5835MHz	/	/
5	5755MHz	11	5795MHz	17	5843MHz	/	/
6	5760MHz	12	5800MHz	18	5848MHz	/	/

## Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH1)	5727MHz
The Middle channel(CH09)	5780MHz
The Highest channel(CH18)	5848MHz

### 4.3 Test Environment and Mode

<b>Operating Environment:</b>	
<b>Radiated Emissions:</b>	
Temperature:	24.0 °C
Humidity:	51 % RH
Atmospheric Pressure:	992mbar
<b>Conducted Emissions:</b>	
Temperature:	24.5 °C
Humidity:	56 % RH
Atmospheric Pressure:	992mbar
<b>Radio conducted item test (RF Conducted test room):</b>	
Temperature:	25 °C
Humidity:	57 % RH
Atmospheric Pressure:	992mbar
Test Mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

### 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

#### 1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
PC	Lenovo	ThinkPad E450c	FCC	CQA

#### 4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	5.12dB	(1)
Radiated Emission	Above 1GHz	4.60dB	(1)
Conducted Disturbance	0.15~30MHz	3.34dB	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

## 4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 4.8 Deviation from Standards

None.

## 4.9 Abnormalities from Standard Conditions

None.

## 4.10 Other Information Requested by the Customer

None.

#### 4.11 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2019/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-065	2018/10/28	2020/10/27
Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2018/9/26	2020/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2018/9/26	2019/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/26	2019/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2018/9/26	2019/9/25
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
Coaxial cable	CQA	N/A	CQA-C009	2018/9/26	2019/9/25

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement


<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>EUT Antenna:</b>	
The antenna is integrated antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.	

## 5.2 Conducted Emissions

<b>Test Requirement:</b>	<b>47 CFR Part 15C Section 15.207</b>		
<b>Test Method:</b>	<b>ANSI C63.10: 2013</b>		
<b>Test Frequency Range:</b>	<b>150kHz to 30MHz</b>		
<b>Limit:</b>	<b>Frequency range (MHz)</b>		<b>Limit (dBuV)</b>
			<b>Quasi-peak</b>
	<b>0.15-0.5</b>	<b>66 to 56*</b>	<b>56 to 46*</b>
	<b>0.5-5</b>	<b>56</b>	<b>46</b>
	<b>5-30</b>	<b>60</b>	<b>50</b>


\* Decreases with the logarithm of the frequency.

| **Test Procedure:** | - 1) The mains terminal disturbance voltage test was conducted in a shielded room. - 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. - 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. - 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. |  |  |
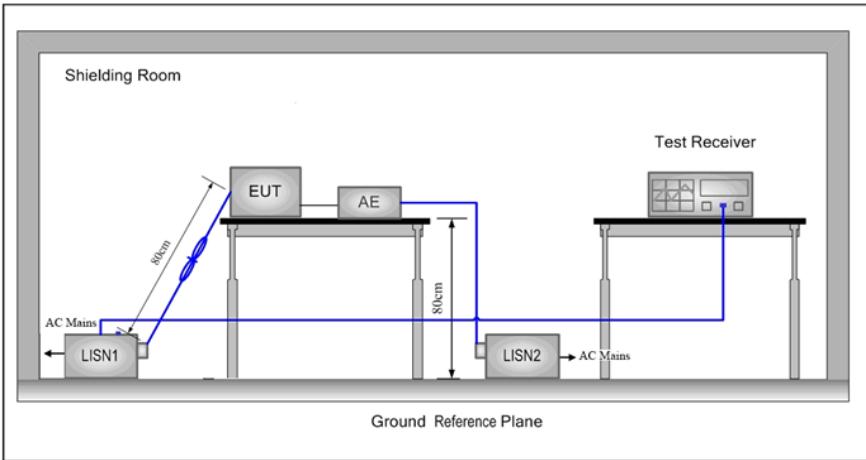
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup within a 'Shielding Room'. On the left, the 'EUT' (Equipment Under Test) and 'AE' (Antenna Equipment) are placed on a table. A LISN1 (Line Impedance Stabilization Network) is connected to the AC Mains and the EUT. A LISN2 is connected to the AC Mains and the AE. A blue line labeled '80cm' indicates the distance between the LISN1 and LISN2. A blue line labeled '80cm' also indicates the height of the EUT and AE from the 'Ground Reference Plane'. On the right, a 'Test Receiver' is connected to the AE. A blue line connects the LISN2 to the Test Receiver.</p>
<b>Exploratory Test Mode:</b>	Transmitting mode
<b>Final Test Mode:</b>	Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
<b>Test Voltage:</b>	AC 120V/60Hz
<b>Test Results:</b>	Pass

**Measurement Data**

Live line:

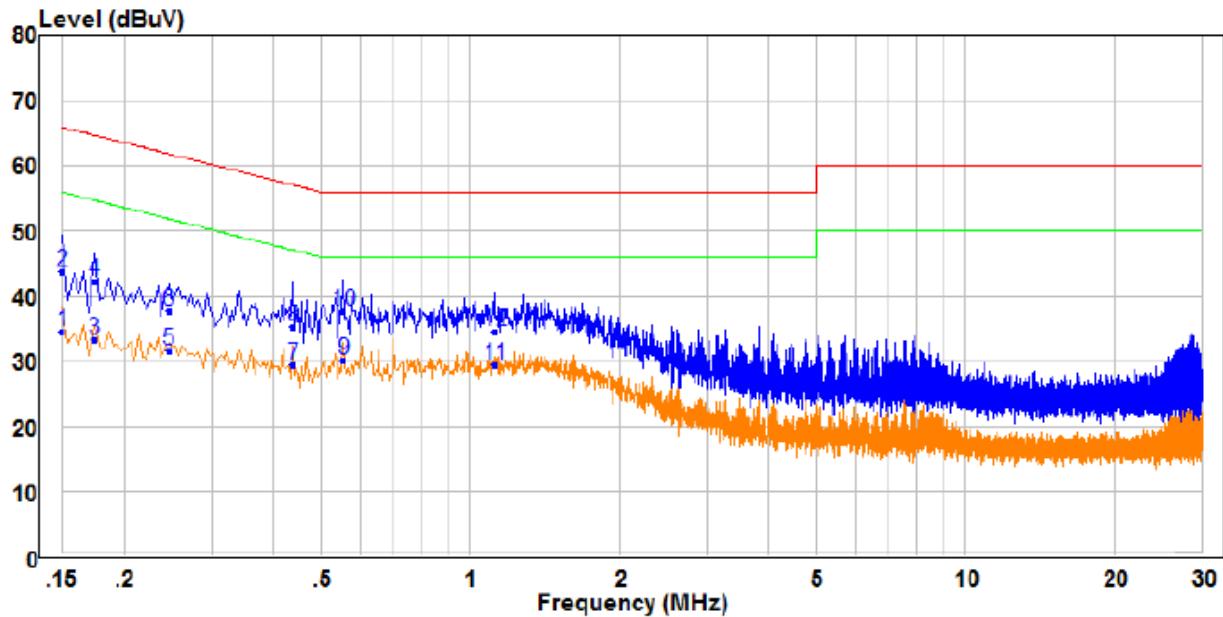


Freq	Read	Limit		Over	Remark	
	Freq	Level	Factor	Line		
	MHz	dBuV	dB	dBuV	dB	
1	0.150	24.93	9.49	34.42	56.00	-21.58 Average
2	0.150	34.39	9.49	43.88	66.00	-22.12 QP
3	0.174	23.87	9.49	33.36	54.77	-21.41 Average
4	0.174	32.72	9.49	42.21	64.77	-22.56 QP
5	0.246	22.17	9.49	31.66	51.89	-20.23 Average
6	0.246	28.24	9.49	37.73	61.89	-24.16 QP
7	0.438	19.94	9.51	29.45	47.10	-17.65 Average
8	0.438	25.78	9.51	35.29	57.10	-21.81 QP
9	PP	0.554	20.54	9.62	30.16	46.00 -15.84 Average
10	QP	0.554	27.98	9.62	37.60	56.00 -18.40 QP
11	1.122	20.00	9.53	29.53	46.00	-16.47 Average
12	1.122	25.01	9.53	34.54	56.00	-21.46 QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

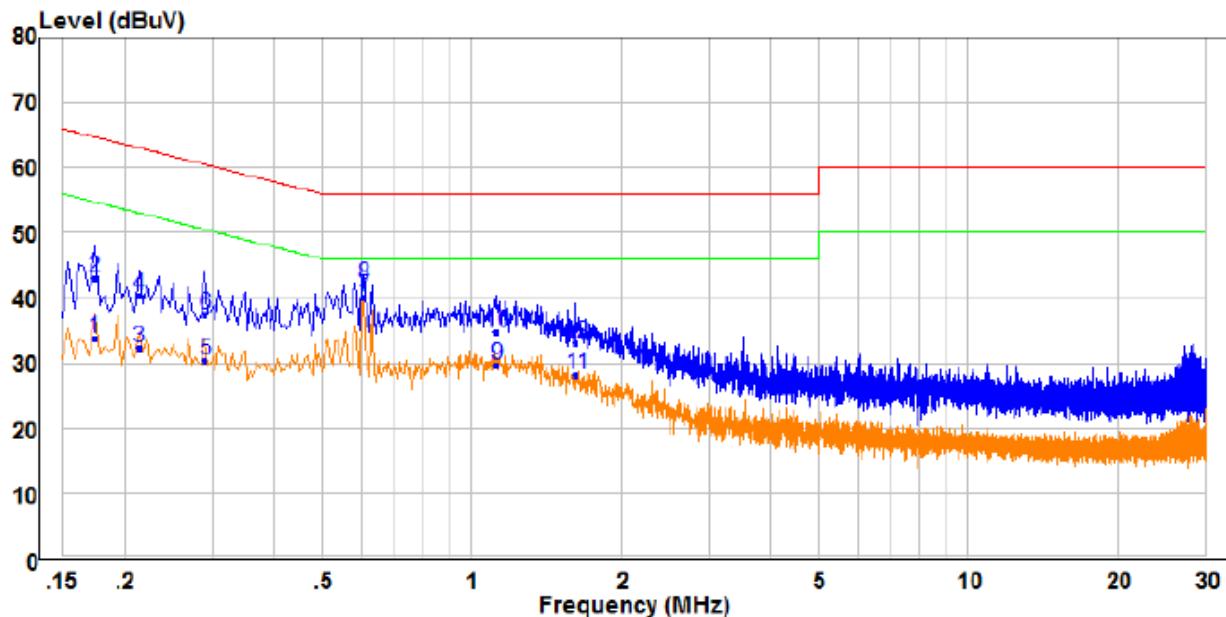




Freq	Read		Limit		Over		Remark
	Freq	Level	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.174	24.26	9.48	33.74	54.77	-21.03	Average
2	0.174	33.69	9.48	43.17	64.77	-21.60	QP
3	0.214	22.97	9.48	32.45	53.05	-20.60	Average
4	0.214	30.80	9.48	40.28	63.05	-22.77	QP
5	0.290	20.95	9.48	30.43	50.52	-20.09	Average
6	0.290	27.88	9.48	37.36	60.52	-23.16	QP
7	PP	30.44	9.72	40.16	46.00	-5.84	Average
8	QP	32.39	9.72	42.11	56.00	-13.89	QP
9	1.126	20.05	9.72	29.77	46.00	-16.23	Average
10	1.126	25.06	9.72	34.78	56.00	-21.22	QP
11	1.622	18.62	9.72	28.34	46.00	-17.66	Average
12	1.622	23.42	9.72	33.14	56.00	-22.86	QP

**Remark:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

### 5.3 Radiated Emission


Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m )	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	5725MHz-5875MHz	94.0		Average Value	
		114.0		Peak Value	

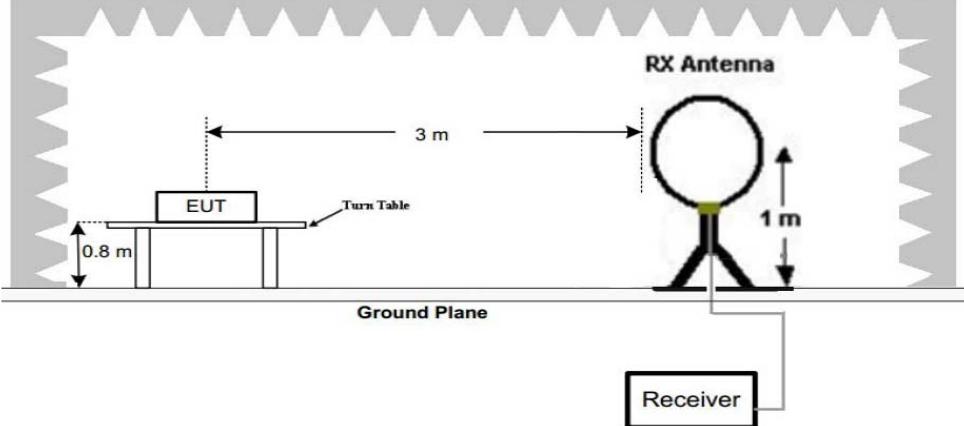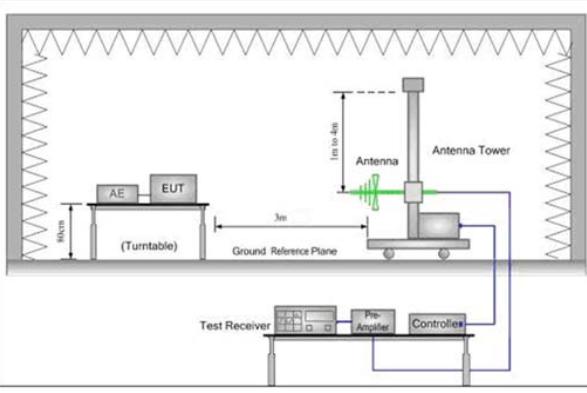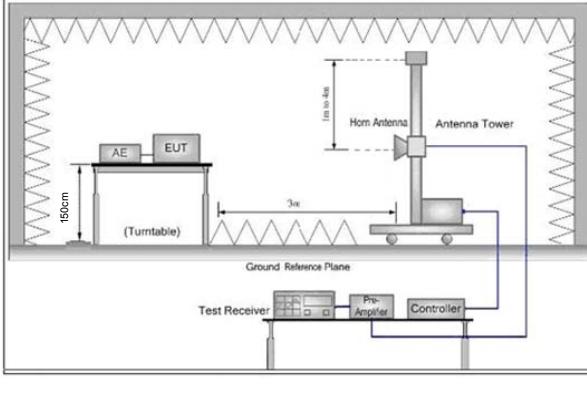Test Setup:		
		
<b>Figure 2. 30MHz to 1GHz</b>		<b>Figure 3. Above 1 GHz</b>
Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:  Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 meters above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of</p>	

	<p>below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <ul style="list-style-type: none"><li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>g. Test the EUT in the lowest channel, the middle channel, the Highest channel</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li></ul>
Instruments Used:	Refer to section 4.11 for details
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Voltage:	DC5V
Test Results:	Pass


## Measurement Data

30MHz~1GHz		
Test mode:	Transmitting (lowest channel)	Vertical

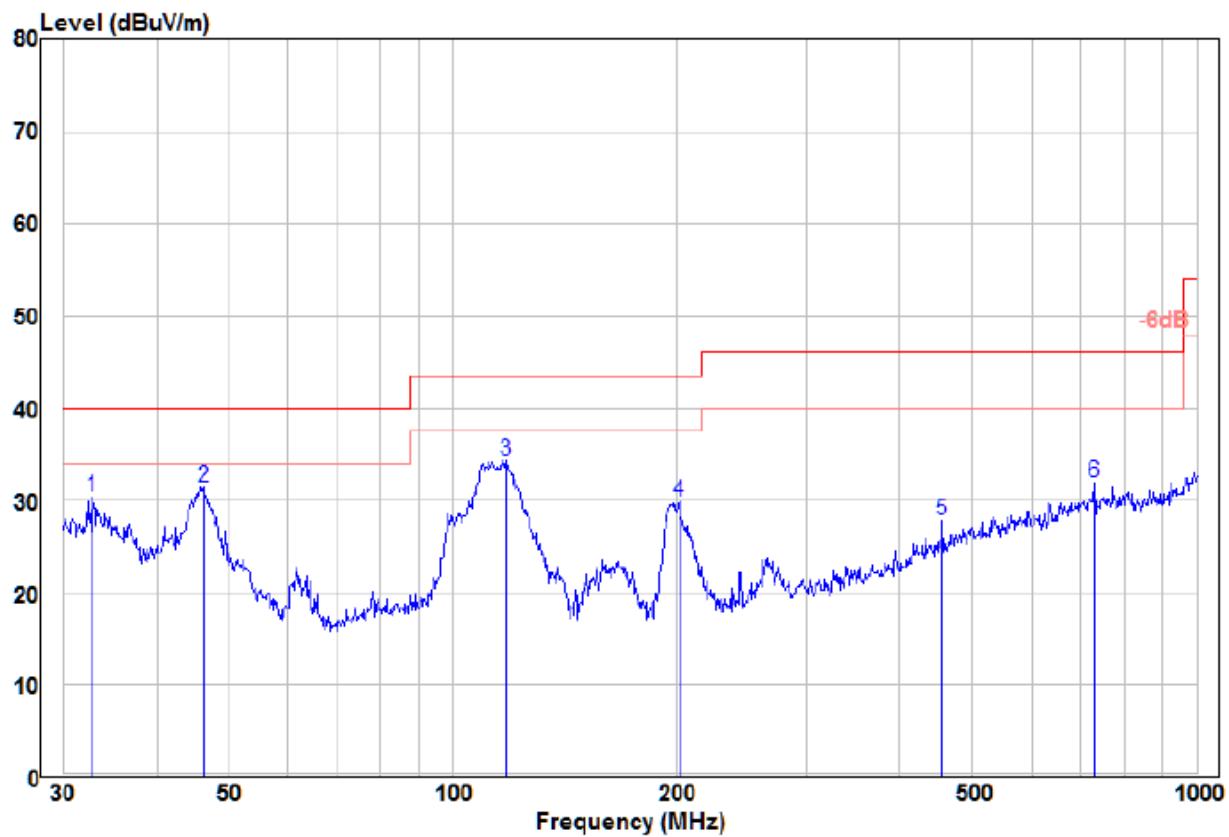

Freq	Read		Limit	Over	Remark	Pol/Phase
	Freq	Level				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	32.86	13.03	17.38	30.41	40.00	-9.59 Peak VERTICAL
2 pp	46.34	20.27	11.18	31.45	40.00	-8.55 Peak VERTICAL
3	118.19	23.65	10.60	34.25	43.50	-9.25 Peak VERTICAL
4	201.39	21.41	8.53	29.94	43.50	-13.56 Peak VERTICAL
5	455.91	11.85	15.91	27.76	46.00	-18.24 Peak VERTICAL
6	729.36	11.60	20.29	31.89	46.00	-14.11 Peak VERTICAL

Test mode:	Transmitting (lowest channel)	Horizontal
------------	-------------------------------	------------

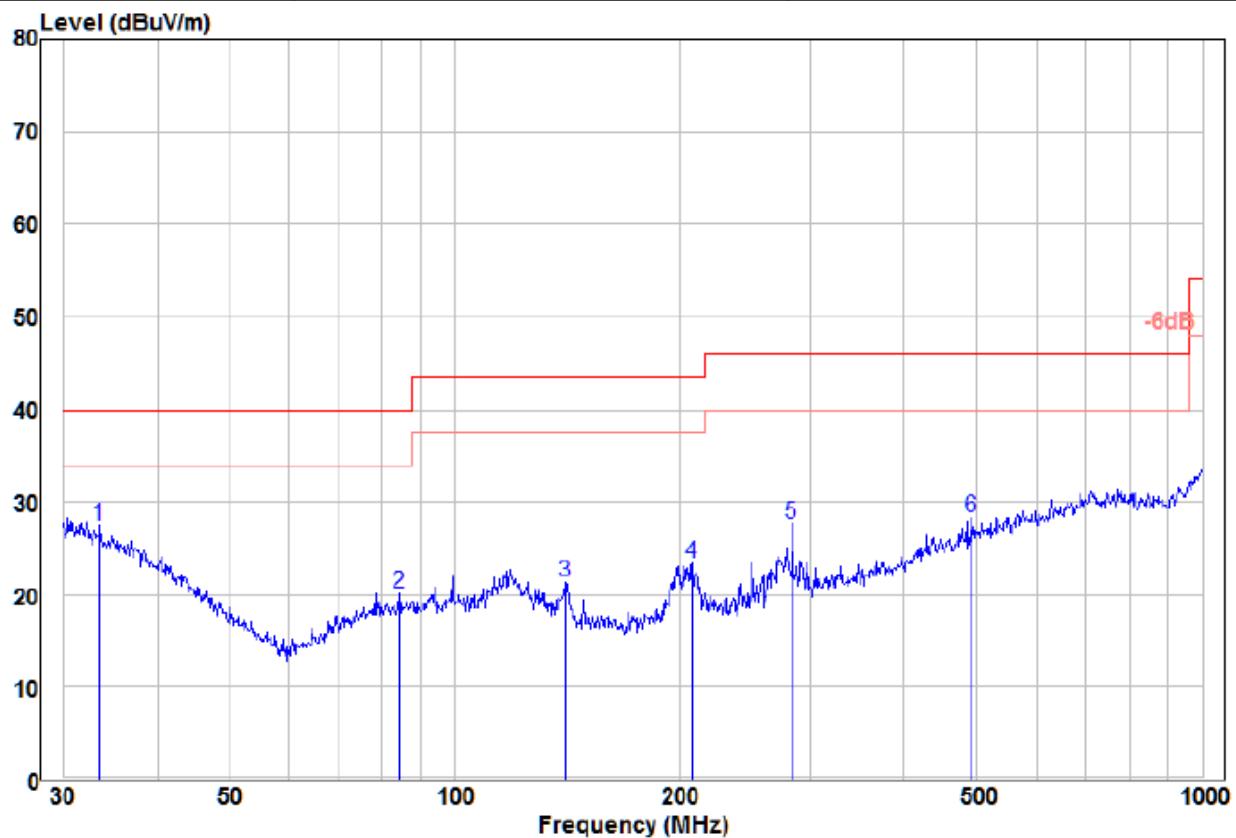

Freq	Read		Limit		Over	Remark	Pol/Phase
	Freq	Level	Factor	Level	Line		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	pp	33.56	10.33	17.13	27.46	40.00	-12.54 Peak HORIZONTAL
2		84.41	10.31	9.89	20.20	40.00	-19.80 Peak HORIZONTAL
3		140.84	13.28	8.08	21.36	43.50	-22.14 Peak HORIZONTAL
4		207.85	14.60	8.74	23.34	43.50	-20.16 Peak HORIZONTAL
5		282.99	16.52	11.17	27.69	46.00	-18.31 Peak HORIZONTAL
6		492.47	11.23	17.04	28.27	46.00	-17.73 Peak HORIZONTAL

<b>Above 1GHz</b>							
Test mode:		Transmitting		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
5725	50.43	2.74	53.17	74	-20.83	peak	H
5725	32.29	2.74	35.03	54	-18.97	AVG	H
<b>5727</b>	<b>95.53</b>	<b>2.75</b>	<b>98.28</b>	<b>114</b>	<b>-15.73</b>	<b>peak</b>	<b>H</b>
5727	86.68	2.75	89.43	94	-4.58	AVG	H
11454	49.99	6.97	56.96	74	-17.04	peak	H
11454	34.06	6.97	41.03	54	-12.97	AVG	H
17181	46.37	12.9	59.27	74	-14.73	peak	H
17181	32.75	12.9	45.65	54	-8.35	AVG	H
5725	42.94	2.74	45.68	74	-28.32	peak	V
5725	32.11	2.74	34.85	54	-19.15	AVG	V
5727	87.61	2.75	90.36	114	-23.67	peak	V
5727	81.45	2.75	84.2	94	-9.84	AVG	V
11454	49.21	6.97	56.18	74	-17.82	peak	V
11454	34.37	6.97	41.34	54	-12.66	AVG	V
17181	45.87	12.9	58.77	74	-15.23	peak	V
17181	32.27	12.9	45.17	54	-8.83	AVG	V



Shenzhen Huaxia Testing Technology Co., Ltd

Report No.: CQASZ20190900939E-01


Test mode:		Transmitting		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
5780	95.05	3.11	98.16	114	-15.84	peak	H
5780	85.83	3.11	88.94	94	-5.06	AVG	H
11560	49.53	6.99	56.52	74	-17.48	peak	H
11560	34.92	6.99	41.91	54	-12.09	AVG	H
17340	43.01	15.28	58.29	74	-15.71	peak	H
17340	30.9	15.28	46.18	54	-7.82	AVG	H
5780	86.67	3.11	89.78	114	-24.22	peak	V
5780	79.91	3.11	83.02	94	-10.98	AVG	V
11560	43.74	6.99	50.73	74	-23.27	peak	V
11560	32.7	6.99	39.69	54	-14.31	AVG	V
17340	42.36	15.28	57.64	74	-16.36	peak	V
17340	30.62	15.28	45.9	54	-8.1	AVG	V

Test mode:		Transmitting		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
5848	94.61	3.49	98.1	114	-15.9	peak	H
5848	85.77	3.49	89.26	94	-4.74	AVG	H
5875	42.02	3.67	45.69	74	-28.31	peak	H
5875	31.44	3.67	35.11	54	-18.89	AVG	H
11696	42.1	6.56	48.66	74	-25.34	peak	H
11696	34.52	6.56	41.08	54	-12.92	AVG	H
17544	40.06	16.02	56.08	74	-17.92	peak	H
17544	28.7	16.02	44.72	54	-9.28	AVG	H
5848	85.97	<b>3.49</b>	89.46	114	-24.54	peak	V
5848	80.4	3.49	83.89	94	-10.11	AVG	V
5875	42.42	3.67	46.09	74	-27.91	peak	V
5875	31.26	3.67	34.93	54	-19.07	AVG	V
11696	43.67	6.56	50.23	74	-23.77	peak	V
11696	33.74	6.56	40.3	54	-13.7	AVG	V
17544	40.21	16.02	56.23	74	-17.77	peak	V
17544	29.69	16.02	45.71	54	-8.29	AVG	V

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 40GHz, The disturbance above 20GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

## 5.4 20dB Bandwidth

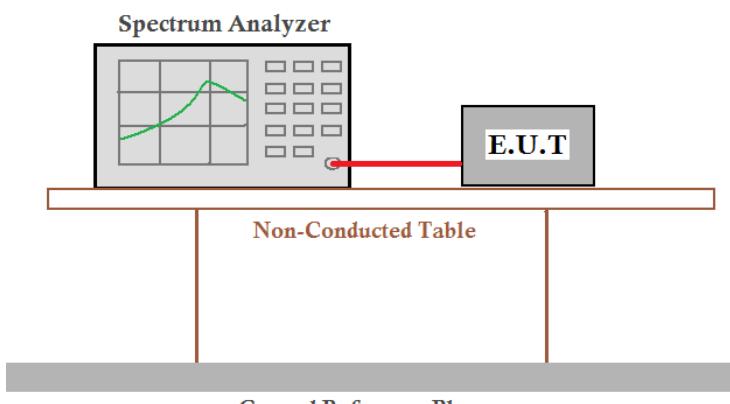
Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013
Test Setup:	
Instruments Used:	Refer to section 4.11 for details
Test Mode:	Transmitting with GFSK modulation.
Limit:	N/A
Test Results:	Pass

### Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	4.55	Pass
Middle	4.74	Pass
Highest	4.87	Pass


**Test plot as follows:**

Test channel: Lowest

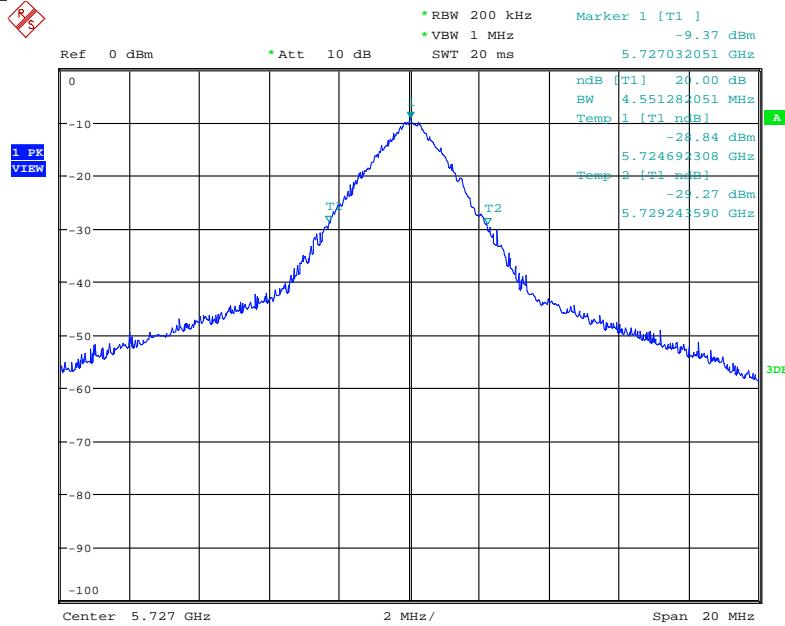


Date: 20.SEP.2019 17:40:17

Test channel: Middle

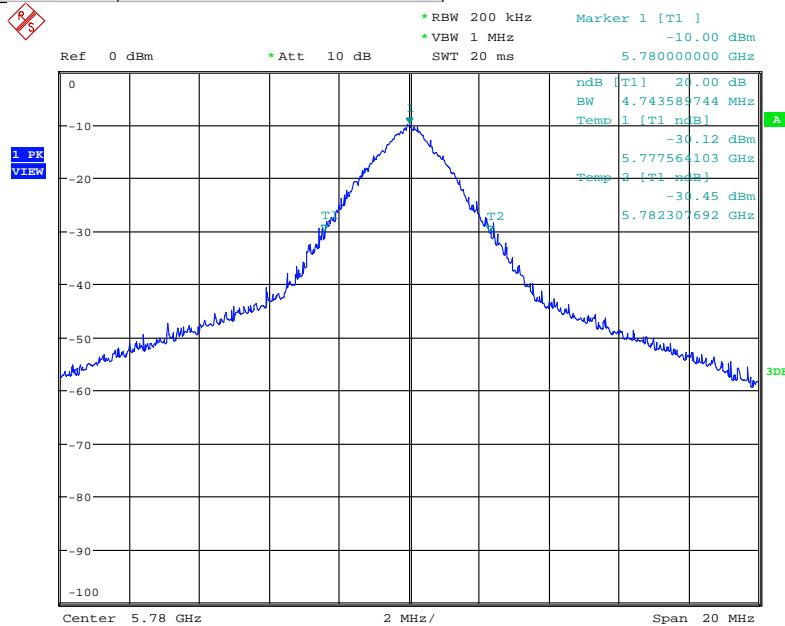

Date: 20.SEP.2019 17:26:06

Test channel: Highest

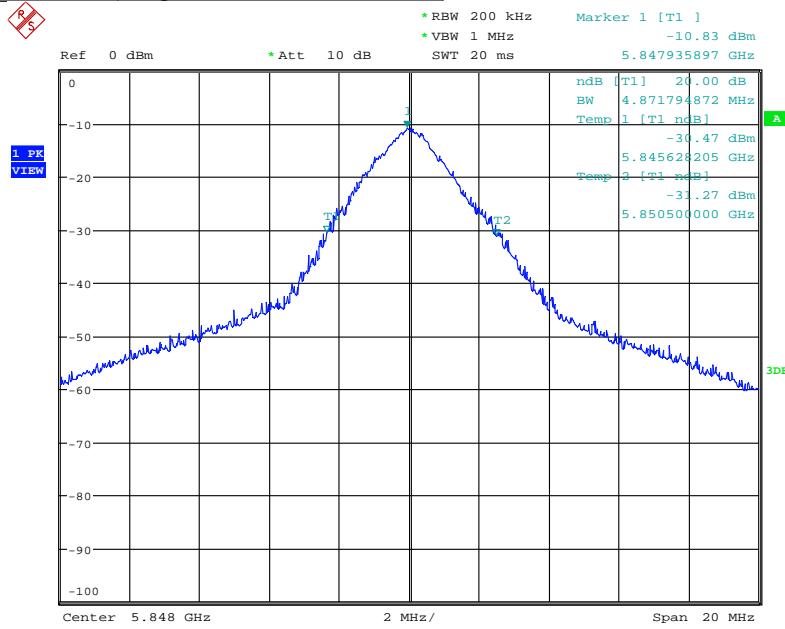

Date: 20.SEP.2019 17:34:25

## 6 Photographs

### 6.1 Radiated Emission Test Setup

Test Model No.: Long Range Headset System

9KHz~30MHz:




30MHz~1GHz:



Above 1GHz:



## 6.2 Conducted Emission

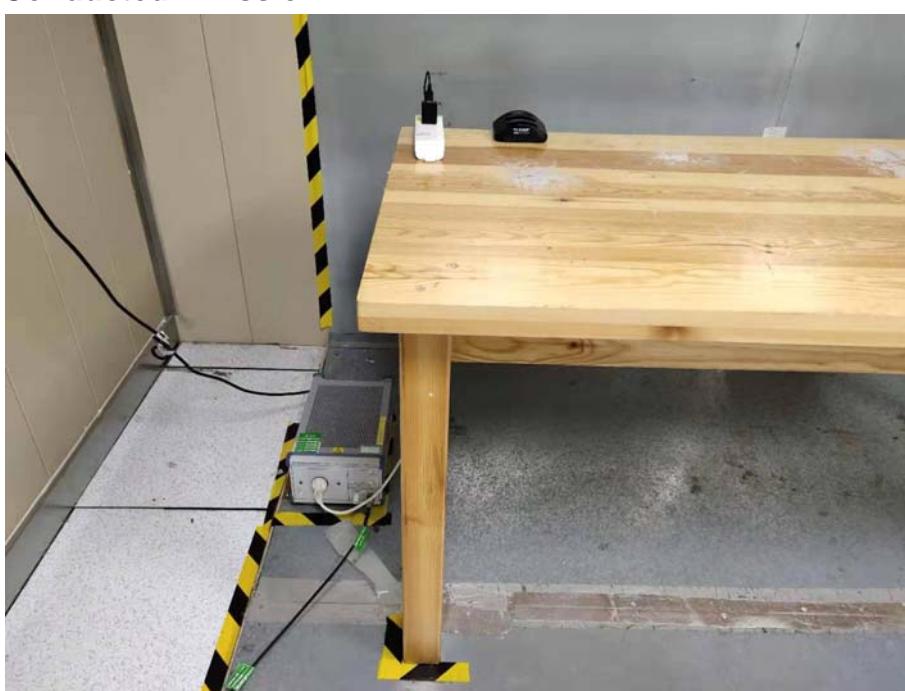

### 6.3 EUT Constructional Details






Test Model No.: Long Range Headset System








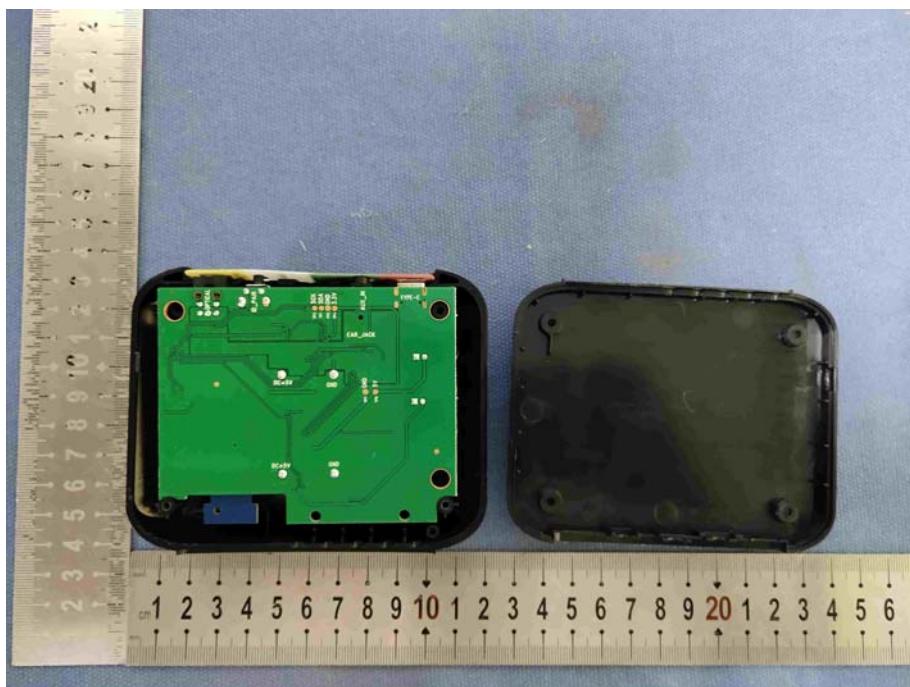

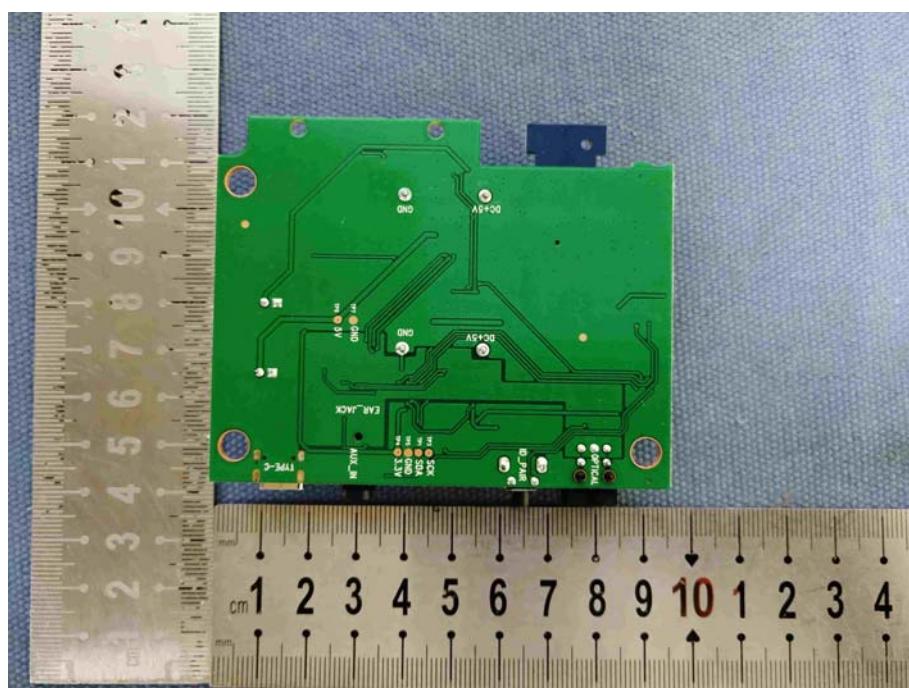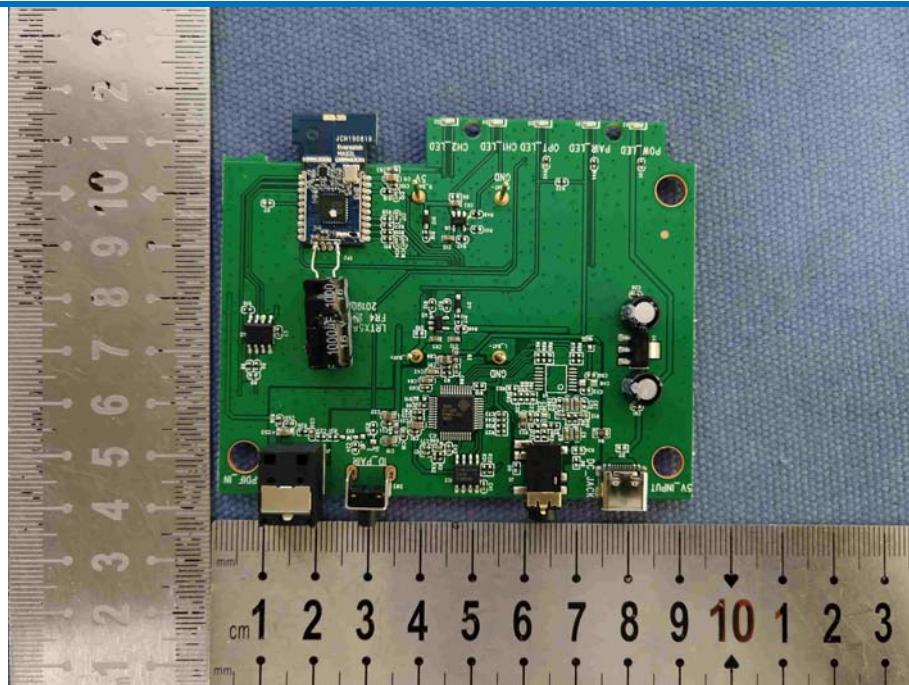

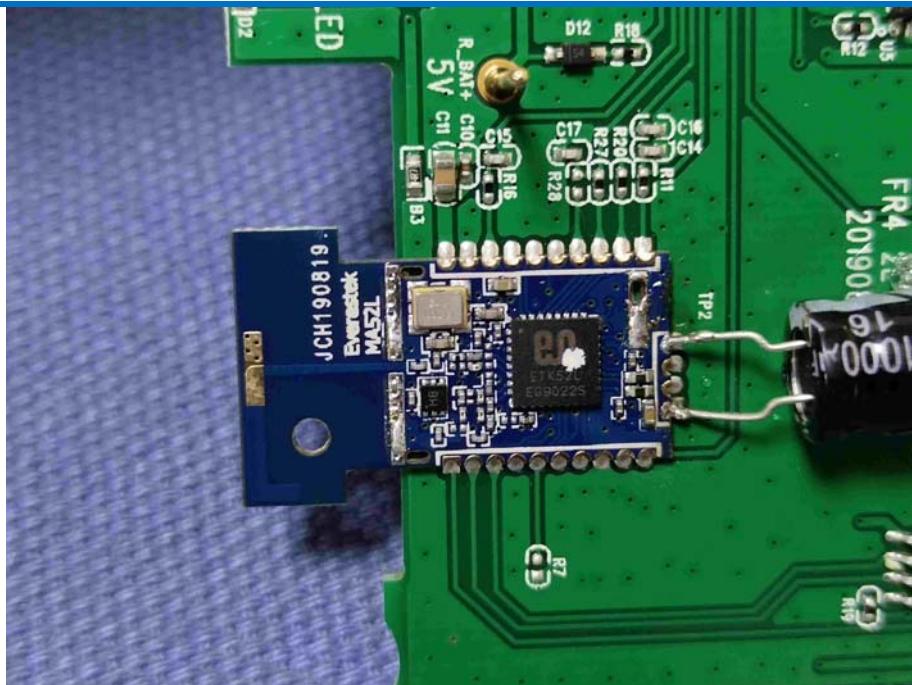

**END OF THE REPORT**