

# FCC TEST REPORT

Product Name: Tablet

Trade Mark:



Model No.: C10

Report Number: 200405001RFC-5

Test Standards: FCC 47 CFR Part 15 Subpart C

FCC ID: 2AUOUC10

Test Result: PASS

Date of Issue: July 20, 2020

Prepared for:

**Rhino Mobility LLC**  
**8 The Green, Suite A, Dover, Delaware, 19901, USA**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**16/F, Block A, Building 6, Baoneng Science and Technology Park,**  
**Qingxiang Road No.1, Longhua New District, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by:

Henry Lu

Team Leader

Reviewed by:

Kevin Liang

Assistant Manager

Approved by:



Billy Lied

Technical Director

Date:

July 20, 2020

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

## Version

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| V1.0        | July 20, 2020 | Original    |



## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

## CONTENTS

|                                                                                         |           |
|-----------------------------------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION</b>                                                           | <b>4</b>  |
| 1.1 CLIENT INFORMATION                                                                  | 4         |
| 1.2 EUT INFORMATION                                                                     | 4         |
| 1.2.1 GENERAL DESCRIPTION OF EUT                                                        | 4         |
| 1.2.2 DESCRIPTION OF ACCESSORIES                                                        | 4         |
| 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD                                   | 5         |
| 1.4 OTHER INFORMATION                                                                   | 5         |
| 1.5 DESCRIPTION OF SUPPORT UNITS                                                        | 5         |
| 1.6 TEST LOCATION                                                                       | 5         |
| 1.7 TEST FACILITY                                                                       | 6         |
| 1.8 DEVIATION FROM STANDARDS                                                            | 6         |
| 1.9 ABNORMALITIES FROM STANDARD CONDITIONS                                              | 6         |
| 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER                                        | 6         |
| 1.11 MEASUREMENT UNCERTAINTY                                                            | 6         |
| <b>2. TEST SUMMARY</b>                                                                  | <b>7</b>  |
| <b>3. EQUIPMENT LIST</b>                                                                | <b>8</b>  |
| <b>4. TEST CONFIGURATION</b>                                                            | <b>9</b>  |
| 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING                                                | 9         |
| 4.1.1 NORMAL OR EXTREME TEST CONDITIONS                                                 | 9         |
| 4.1.2 RECORD OF NORMAL ENVIRONMENT                                                      | 9         |
| 4.2 TEST CHANNELS                                                                       | 9         |
| 4.3 EUT TEST STATUS                                                                     | 9         |
| 4.4 PRE-SCAN                                                                            | 10        |
| 4.4.1 USED FOR TESTING OF WORST-CASE DATA RATES                                         | 10        |
| 4.5 TEST SETUP                                                                          | 11        |
| 4.5.1 FOR RADIATED EMISSIONS TEST SETUP                                                 | 11        |
| 4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP                                                | 12        |
| 4.5.3 FOR CONDUCTED RF TEST SETUP                                                       | 12        |
| 4.6 SYSTEM TEST CONFIGURATION                                                           | 14        |
| <b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>                                    | <b>15</b> |
| 5.1 REFERENCE DOCUMENTS FOR TESTING                                                     | 15        |
| 5.2 ANTENNA REQUIREMENT                                                                 | 15        |
| 5.3 20DB BANDWIDTH                                                                      | 15        |
| 5.4 THE FIELD STRENGTH OF ANY EMISSIONS APPEARING OUTSIDE OF THE 13.110-14.010 MHZ BAND | 17        |
| 5.5 FUNDAMENTAL FIELD STRENGTH AND EMISSION MASK 13.110 MHZ TO 14.010 MHZ               | 21        |
| 5.6 FREQUENCY TOLERANCE                                                                 | 23        |
| 5.7 CONDUCTED EMISSION                                                                  | 24        |
| <b>APPENDIX 1 PHOTOS OF TEST SETUP</b>                                                  | <b>27</b> |
| <b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b>                                  | <b>27</b> |

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

|                                 |                                                   |
|---------------------------------|---------------------------------------------------|
| <b>Applicant:</b>               | Rhino Mobility LLC                                |
| <b>Address of Applicant:</b>    | 8 The Green, Suite A, Dover, Delaware, 19901, USA |
| <b>Manufacturer:</b>            | Rhino Mobility LLC                                |
| <b>Address of Manufacturer:</b> | 8 The Green, Suite A, Dover, Delaware, 19901, USA |

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

|                               |                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------|
| <b>Product Name:</b>          | Tablet                                                                            |
| <b>Model No.:</b>             | C10                                                                               |
| <b>Trade Mark:</b>            |  |
| <b>DUT Stage:</b>             | Identical Prototype                                                               |
| <b>EUT Supports Function:</b> | 13.56 MHz                                                                         |
| <b>Sample Received Date:</b>  | April 5, 2020                                                                     |
| <b>Sample Tested Date:</b>    | April 5, 2020 to June 30, 2020                                                    |

#### 1.2.2 Description of Accessories

| Adapter              |                                                                                    |
|----------------------|------------------------------------------------------------------------------------|
| <b>Model No.:</b>    | TPA-10120150UU                                                                     |
| <b>Input:</b>        | 100-240 V~50/60 Hz 0.6A Max                                                        |
| <b>Output:</b>       | 3.6-6.0V $\equiv$ 3.0A 18.0W/6.0-9.0V $\equiv$ 2.0A 18.0W /9.0-12.0V $\equiv$ 1.5A |
| <b>DC Cable:</b>     | 1.0 Meter, Unshielded without ferrite                                              |
| <b>Manufacturer:</b> | SHENZHEN TIANYIN ELECTRONICS CO., LTD                                              |

| Battery                        |                                          |
|--------------------------------|------------------------------------------|
| <b>Model No.:</b>              | BPC10                                    |
| <b>Battery Type:</b>           | Lithium-ion Polymer Rechargeable Battery |
| <b>Rated Voltage:</b>          | 3.8 Vdc                                  |
| <b>Limited Charge Voltage:</b> | 4.35 Vdc                                 |
| <b>Rated Capacity:</b>         | 7500 mAh                                 |
| <b>Manufacturer:</b>           | SHENZHENKEHUAXINELECTRONICSCO.,LTD.      |

| Cable               |                            |
|---------------------|----------------------------|
| <b>Description:</b> | USB Type-C Plug Cable      |
| <b>Cable Type:</b>  | Unshielded without ferrite |
| <b>Length:</b>      | 1.0 Meter                  |

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

|                                     |                                                   |
|-------------------------------------|---------------------------------------------------|
| <b>Frequency Range:</b>             | 13.110 MHz to 14.010 MHz                          |
| <b>Nominal Operating Frequency:</b> | 13.56 MHz                                         |
| <b>Work in Modes:</b>               | <input type="checkbox"/> Card Emulation           |
|                                     | <input checked="" type="checkbox"/> Reader/Writer |
|                                     | <input checked="" type="checkbox"/> Peer-to-Peer  |
| <b>NFC Type:</b>                    | <input type="checkbox"/> NFC A Type               |
|                                     | <input checked="" type="checkbox"/> NFC B Type    |
|                                     | <input checked="" type="checkbox"/> NFC F Type    |
| <b>Max. Data Rates:</b>             | 424 Kbps                                          |
| <b>Type of Modulation:</b>          | ASK                                               |
| <b>Number of Channels:</b>          | 1                                                 |
| <b>Antenna Type:</b>                | FPCB Antenna                                      |
| <b>Maximum Field Strength:</b>      | 57.53 dBμV/m at 3 meter                           |
| <b>Normal Test Voltage:</b>         | 3.8 Vdc                                           |
| <b>Extreme Test Voltage:</b>        | 3.5 to 4.2 Vdc                                    |
| <b>Extreme Test Temperature:</b>    | -20 °C to +55 °C                                  |

### 1.4 OTHER INFORMATION

None

### 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

#### 1) Support Equipment

| Description | Manufacturer | Model No. | Serial Number | Supplied by |
|-------------|--------------|-----------|---------------|-------------|
| Notebook    | Lenovo       | E450      | SL10G10780    | UnionTrust  |

#### 2) Support Cable

| Cable No. | Description   | Connector | Length     | Supplied by |
|-----------|---------------|-----------|------------|-------------|
| 1         | Antenna Cable | SMA       | 0.30 Meter | UnionTrust  |

### 1.6 TEST LOCATION

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

## 1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

**A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**ISED Wireless Device Testing Laboratories**

CAB identifier: CN0032

**FCC Accredited Lab.**

Designation Number: CN1194

Test Firm Registration Number: 259480

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

## 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Conducted emission 9KHz-150KHz  | $\pm 3.2$ dB            |
| 2   | Conducted emission 150KHz-30MHz | $\pm 2.7$ dB            |
| 3   | Radiated emission 9KHz-30MHz    | $\pm 4.7$ dB            |
| 4   | Radiated emission 30MHz-1GHz    | $\pm 4.6$ dB            |
| 5   | Radiated emission 1GHz-18GHz    | $\pm 4.4$ dB            |
| 6   | Radiated emission 18GHz-26GHz   | $\pm 4.6$ dB            |
| 7   | Radiated emission 26GHz-40GHz   | $\pm 4.6$ dB            |

## 2. TEST SUMMARY

| FCC 47 CFR Part 15 Subpart C Test Cases                                             |                                                                |                  |        |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------|------------------|--------|
| Test Item                                                                           | Test Requirement                                               | Test Method      | Result |
| Antenna Requirement                                                                 | FCC 47 CFR Part 15 Subpart C Section 15.203                    | N/A              | PASS   |
| Conducted Emission                                                                  | FCC 47 CFR Part 15 Subpart C Section 15.207                    | ANSI C63.10-2013 | PASS   |
| The field strength of any emissions appearing outside of the 13.110-14.010 MHz band | FCC 47 CFR Part 15 Subpart C Section 15.225(d) /15.209         | ANSI C63.10-2013 | PASS   |
| Fundamental Field Strength and Emission Mask 13.110 MHz to 14.010 MHz               | FCC 47 CFR Part 15 Subpart C Section 15.227(a) (b) (c) /15.205 | ANSI C63.10-2013 | PASS   |
| 20DB Bandwidth                                                                      | FCC 47 CFR Part 15 Subpart C Section 15.215(c)                 | ANSI C63.10-2013 | Pass   |
| Frequency Tolerance                                                                 | FCC 47 CFR Part 15 Subpart C Section 15.225(e)                 | ANSI C63.10-2013 | Pass   |

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)
<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

### 3. EQUIPMENT LIST

| Radiated Emission Test Equipment List |                                   |              |            |                            |                         |                             |
|---------------------------------------|-----------------------------------|--------------|------------|----------------------------|-------------------------|-----------------------------|
| Used                                  | Equipment                         | Manufacturer | Model No.  | Serial Number              | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/>   | 3M Chamber & Accessory Equipment  | ETS-LINDGREN | 3M         | N/A                        | Dec. 03, 2018           | Dec. 03, 2021               |
| <input checked="" type="checkbox"/>   | Receiver                          | R&S          | ESIB26     | 100114                     | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/>   | Loop Antenna                      | ETS-LINDGREN | 6502       | 00202525                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input checked="" type="checkbox"/>   | Broadband Antenna                 | ETS-LINDGREN | 3142E      | 00201566                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input checked="" type="checkbox"/>   | 6dB Attenuator                    | Talent       | RA6A5-N-18 | 18103001                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input checked="" type="checkbox"/>   | Preamplifier                      | HP           | 8447F      | 2805A02960                 | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>              | Broadband Antenna (Pre-amplifier) | ETS-LINDGREN | 3142E-PA   | 00201891                   | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>              | 6dB Attenuator                    | Talent       | RA6A5-N-18 | 18103002                   | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>              | Horn Antenna                      | ETS-LINDGREN | 3117       | 00164202                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input type="checkbox"/>              | Horn Antenna (Pre-amplifier)      | ETS-LINDGREN | 3117-PA    | 00201874                   | May 30, 2020            | May 29, 2021                |
| <input checked="" type="checkbox"/>   | Multi device Controller           | ETS-LINDGREN | 7006-001   | 00160105                   | N/A                     | N/A                         |
| <input checked="" type="checkbox"/>   | Test Software                     | Audix        | e3         | Software Version: 9.160323 |                         |                             |

| Conducted Emission Test Equipment List |               |              |           |                            |                         |                             |
|----------------------------------------|---------------|--------------|-----------|----------------------------|-------------------------|-----------------------------|
| Used                                   | Equipment     | Manufacturer | Model No. | Serial Number              | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/>    | Receiver      | R&S          | ESR7      | 1316.3003K07-101181-K3     | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/>    | Pulse Limiter | R&S          | ESH3-Z2   | 0357.8810.54               | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/>    | LISN          | R&S          | ESH2-Z5   | 860014/024                 | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>               | LISN          | ETS-Lindgren | 3816/2SH  | 00201088                   | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/>    | Test Software | Audix        | e3        | Software Version: 9.160323 |                         |                             |

| Conducted RF test Equipment List    |                         |              |              |                        |                         |                             |
|-------------------------------------|-------------------------|--------------|--------------|------------------------|-------------------------|-----------------------------|
| Used                                | Equipment               | Manufacturer | Model No.    | Serial Number          | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/> | EXA Spectrum Analyzer   | KEYSIGHT     | N9010A       | MY51440197             | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/> | Receiver                | R&S          | ESR7         | 1316.3003K07-101181-K3 | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/> | DC Source               | KIKUSUI      | PWR400L      | LK003024               | Sep. 09, 2019           | Sep. 08, 2020               |
| <input type="checkbox"/>            | Temp & Humidity chamber | Espec        | GL(U)04KA(W) | 16921H201P3            | Jul. 19, 2019           | Jul. 19, 2020               |
| <input checked="" type="checkbox"/> | Temp & Humidity chamber | Votisch      | VT4002       | 58566133290020         | May 11, 2020            | May 11, 2021                |

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

| Test Environment                                                                                                                                                                                                                                                                                                                                                                                                                | Selected Values During Tests |             |                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------|-----------------------|
| Test Condition                                                                                                                                                                                                                                                                                                                                                                                                                  | Ambient                      |             |                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                 | Temperature (°C)             | Voltage (V) | Relative Humidity (%) |
| TN/VN                                                                                                                                                                                                                                                                                                                                                                                                                           | +15 to +35                   | 3.8         | 20 to 75              |
| TL/VL                                                                                                                                                                                                                                                                                                                                                                                                                           | -20                          | 3.5         | 20 to 75              |
| TH/VL                                                                                                                                                                                                                                                                                                                                                                                                                           | +55                          | 3.5         | 20 to 75              |
| TL/VH                                                                                                                                                                                                                                                                                                                                                                                                                           | -20                          | 4.2         | 20 to 75              |
| TH/VH                                                                                                                                                                                                                                                                                                                                                                                                                           | +55                          | 4.2         | 20 to 75              |
| <b>Remark:</b><br>1) The EUT just work in such extreme temperature of -20 °C to +55 °C and the extreme voltage of 3.5 V to 4.2 V, so here the EUT is tested in the temperature of -20 °C to +55 °C and the voltage of 3.5 V to 4.2 V.<br>2) VN: Normal Voltage; TN: Normal Temperature;<br>TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;<br>VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage. |                              |             |                       |

#### 4.1.2 Record of Normal Environment

| Test Item                                                                           | Temperature (°C) | Relative Humidity (%) | Pressure (kPa) | Tested by  |
|-------------------------------------------------------------------------------------|------------------|-----------------------|----------------|------------|
| Conducted Emission                                                                  | 25.2             | 40                    | 99.36          | Bert Xiong |
| The field strength of any emissions appearing outside of the 13.110-14.010 MHz band | 25.2             | 52                    | 100.02         | Asia Yan   |
| Fundamental Field Strength and Emission Mask 13.110 MHz to 14.010 MHz               | 25.2             | 52                    | 100.02         | Asia Yan   |
| 20DB Bandwidth                                                                      | 25.2             | 52                    | 100.02         | Asia Yan   |

### 4.2 TEST CHANNELS

| Frequency | Test RF Channel |
|-----------|-----------------|
| 13.56 MHz | Channel 1       |
|           | 13.56 MHz       |

### 4.3 EUT TEST STATUS

| Frequency | Tx Function | Description                                                   |
|-----------|-------------|---------------------------------------------------------------|
| 13.56 MHz | 1Tx         | 1. Keep the EUT in continuously transmitting during the test. |

## 4.4 PRE-SCAN

### 4.4.1 Used for testing of worst-case data rates

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, work in modes and data rates. Selected for the final test as listed below.

| Frequency                                                                                                                                                                 | Work in Modes                                                                                                                         | Type                                                              | Data Rate (Kbps)                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| 13.56 MHz                                                                                                                                                                 | <input type="checkbox"/> Card Emulation<br><input checked="" type="checkbox"/> Reader/Writer<br><input type="checkbox"/> Peer-to-Peer | <input checked="" type="checkbox"/> B<br><input type="checkbox"/> | <input type="checkbox"/> 106<br><input type="checkbox"/> 212<br><input checked="" type="checkbox"/> 424 |
| <b>Remark:</b><br>The mark " <input checked="" type="checkbox"/> " means is chosen for testing;<br>The mark " <input type="checkbox"/> " means is not chosen for testing. |                                                                                                                                       |                                                                   |                                                                                                         |

## 4.5 TEST SETUP

### 4.5.1 For Radiated Emissions test setup

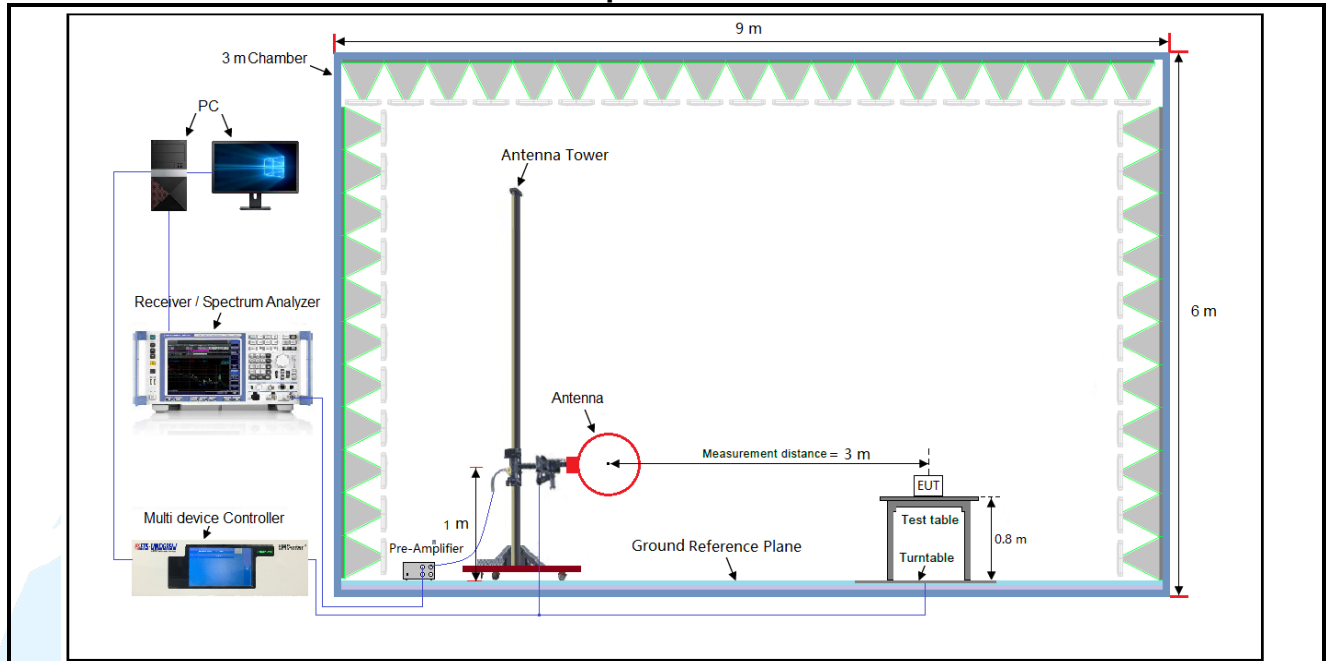


Figure 1. Below 30MHz


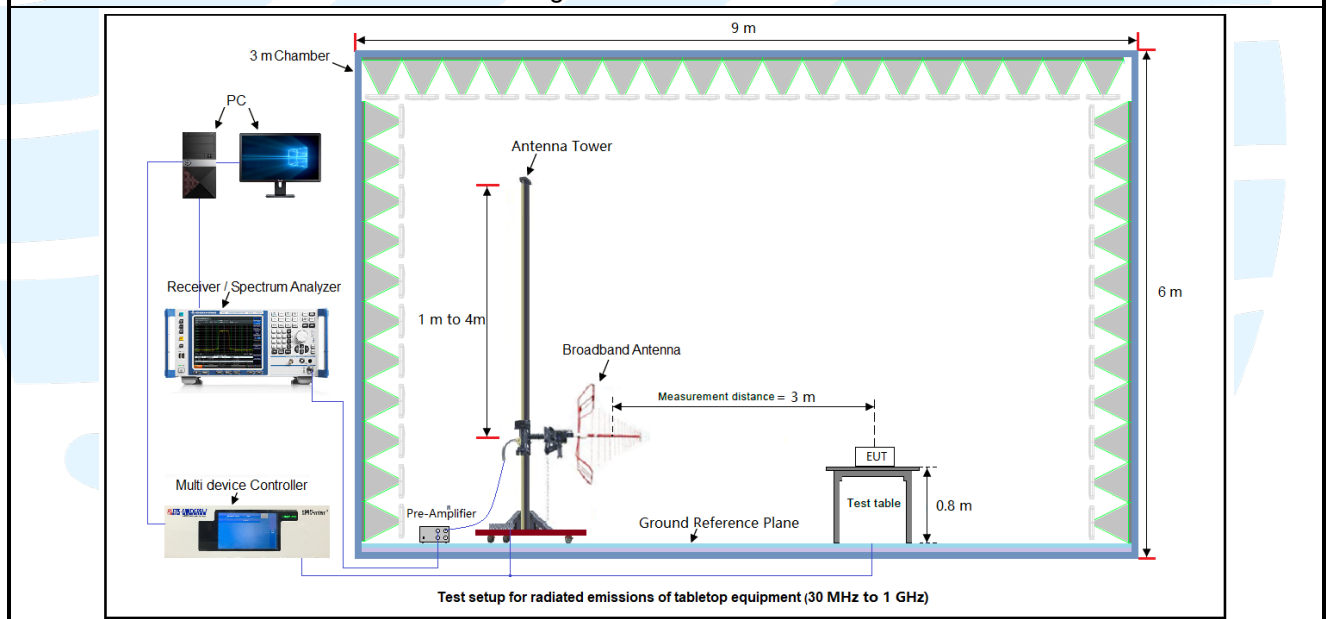


Figure 2. 30MHz to 1GHz

The diagram illustrates the experimental setup within a Shielding Room. On the left, a measurement station includes a PC, a Receiver, and a Pulse Limiter, all connected to a Ground Reference Plane. This station is linked via cables to LISN 1, which is connected to the AC Mains. The AC Mains supply power to the Test table. On the Test table, two EUT/AE units are positioned 10 cm apart, with a PSU connected to the second unit. The Test table is elevated 40 cm from the floor, which is covered with Insulation  $\leq 0.15$  m. LISN 2 is also connected to the AC Mains and is positioned 80 cm from the Test table. The entire setup is enclosed within the Shielding Room.

The diagram illustrates a Shielding Chamber setup. A Spectrum analyzer is connected via a blue cable to a black EUT (Equipment Under Test) placed on a Non-Conducted Table. The entire setup is enclosed within a Shielding Chamber, which is situated in a Normal Environment.

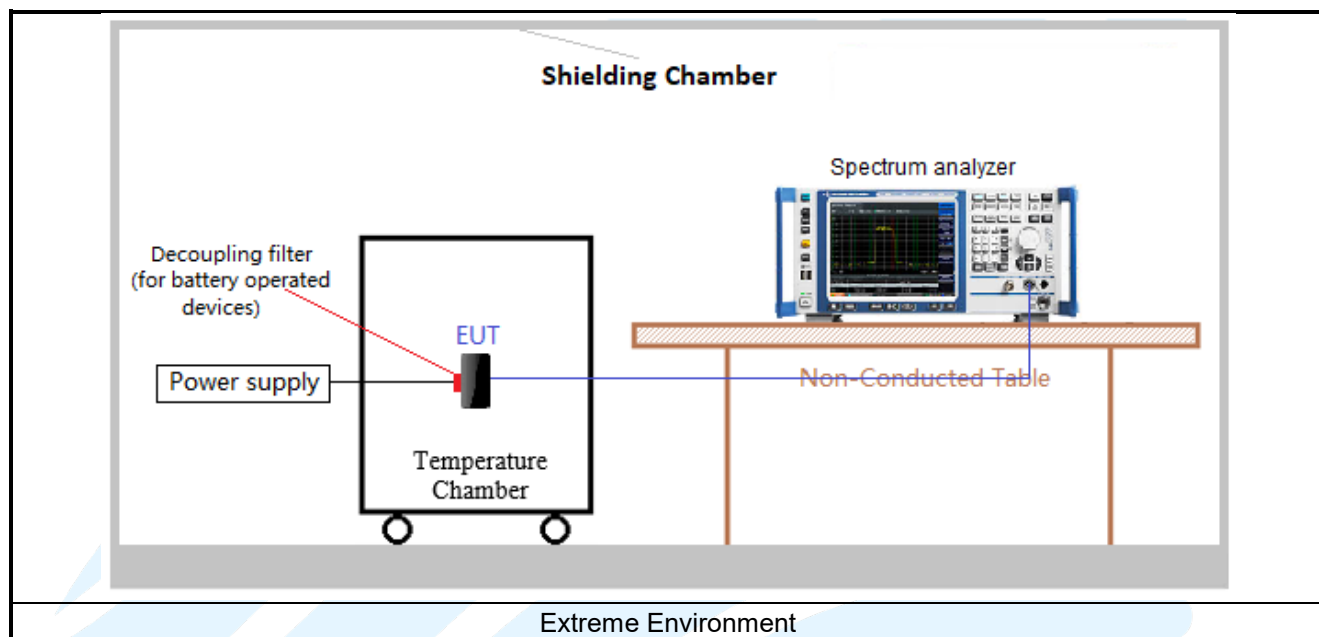

## 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

| No. | Identity           | Document Title                                                     |
|-----|--------------------|--------------------------------------------------------------------|
| 1   | FCC 47 CFR Part 15 | Radio Frequency Devices                                            |
| 2   | ANSI C63.10-2013   | American National Standard for Testing Unlicensed Wireless Devices |

### 5.2 ANTENNA REQUIREMENT

| Standard Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>15.203 requirement:</b><br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |
| <b>EUT Antenna:</b><br>This product has a permanent antenna, fulfill the requirement of this section.                                                                                                                                                                                                                                                                                                                                                                            |


### 5.3 20dB BANDWIDTH

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Requirement:</b> | FCC 47 CFR Part 15 Subpart C Section 15.215 (c)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Test Method:</b>      | ANSI C63.10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Limit:</b>            | Operation within the band 13.110 MHz to 14.010 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Requirement :</b>     | Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be. Demonstrated by measuring the radiated emissions.                                                                                                                                                                                                                          |
| <b>Test Procedure:</b>   | Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.<br>Use the following spectrum analyzer settings: <ol style="list-style-type: none"> <li>The spectrum analyzer center frequency is set to the nominal EUT channel center frequency</li> <li>Span = approximately 2 to 5 times the OBW</li> <li>RBW = 1% to 5% of the OBW</li> <li>VBW <math>\geq 3 \times</math> RBW</li> <li>Sweep = auto;</li> <li>Detector function = peak</li> <li>Trace = max hold</li> <li>All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.</li> </ol> <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p> |
| <b>Test Setup:</b>       | Refer to section 4.5.3 for details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Instruments Used:</b> | Refer to section 3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Test Mode:</b>        | Transmitter mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Test Results:</b>     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

### Test Data:

| Frequency (MHz) | 20 dB Bandwidth (KHz) | Limit                                              | Pass / Fail |
|-----------------|-----------------------|----------------------------------------------------|-------------|
| 13.56 MHz       | 21.13                 | Operation within the band 13.110 MHz to 14.010 MHz | Pass        |

### The test plot as follows:

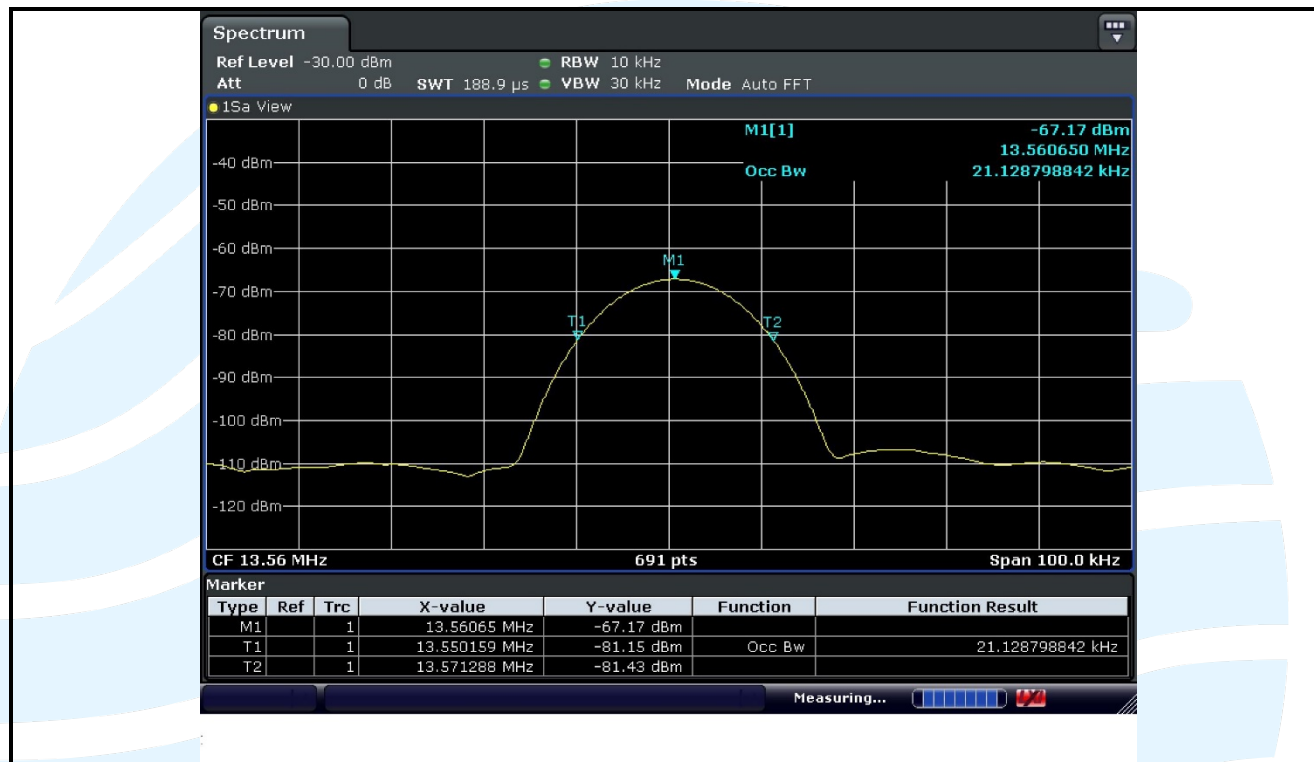

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

## 5.4 THE FIELD STRENGTH OF ANY EMISSIONS APPEARING OUTSIDE OF THE 13.110-14.010 MHZ BAND

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.225(d) /15.209

**Test Method:** ANSI C63.10-2013 Section 6.6.4.3

**Receiver Setup:**

| Frequency           | RBW         |
|---------------------|-------------|
| 0.009 MHz-0.150 MHz | 200/300 kHz |
| 0.150 MHz -30 MHz   | 9/10 kHz    |
| 30 MHz-1 GHz        | 100/120 kHz |
| Above 1 GHz         | 1 MHz       |

**Limits:**

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

**Spurious Emissions**

| Frequency           | Field strength (microvolt/meter) | Limit (dBμV/m ) | Remark     | Measurement distance (m) |
|---------------------|----------------------------------|-----------------|------------|--------------------------|
| 0.009 MHz-0.490 MHz | 2400/F(kHz)                      | --              | --         | 300                      |
| 0.490 MHz-1.705 MHz | 24000/F(kHz)                     | --              | --         | 30                       |
| 1.705 MHz-30 MHz    | 30                               | --              | --         | 30                       |
| 30 MHz-88 MHz       | 100                              | 40.0            | Quasi-peak | 3                        |
| 88 MHz-216 MHz      | 150                              | 43.5            | Quasi-peak | 3                        |
| 216 MHz-960 MHz     | 200                              | 46.0            | Quasi-peak | 3                        |
| 960MHz-1GHz         | 500                              | 54.0            | Quasi-peak | 3                        |
| Above 1 GHz         | 500                              | 54.0            | Average    | 3                        |

**Remark:**

- The lower limit shall apply at the transition frequencies.
- Emission level (dBμV/m) = 20 log Emission level (μV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.
- For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

**Example:**

Field strength limit for 13.56MHz = 15848 μV/m at 30m  
= 84 dBμV/m at 30m  
= 84 dBμV/m + 40log(30/3) dB at 3m  
= 124 dBμV/m at 3m

**Test Setup:** Refer to section 4.5.1 for details.

**Test Procedures:**

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

Mode.


- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 7) The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.(for portable and mobile devices)

**Equipment Used:** Refer to section 3 for details.


**Test Result:** Pass

#### Radiated Emission Test Data (9 KHz ~ 30MHz):

##### Horizontal

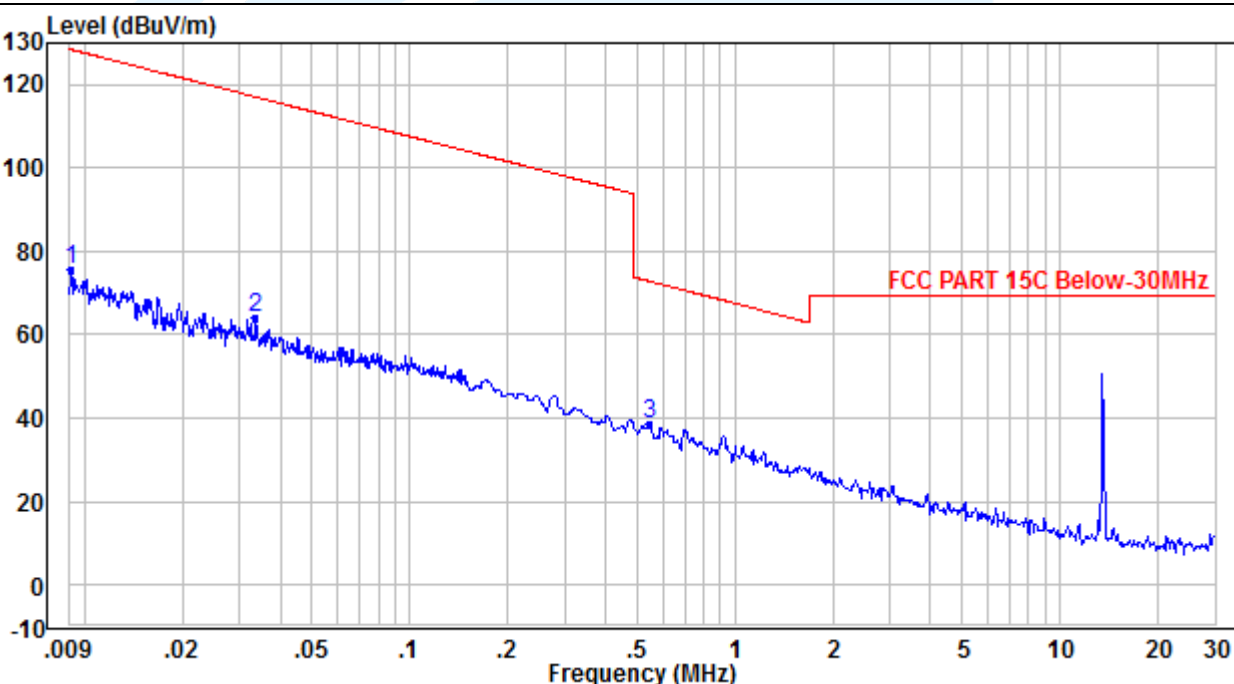

| No. | Frequency (MHz) | Reading (dBμV) | Correction factor (dB/m ) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------------------|-----------------|----------------|-------------|----------|
| 1   | 0.009           | 83.08          | -7.38                     | 75.70           | 128.41         | -52.71      | Peak     |
| 2   | 0.034           | 77.27          | -13.23                    | 64.04           | 117.07         | -53.03      | Peak     |
| 3   | 0.544           | 56.46          | -18.10                    | 38.36           | 72.88          | -34.52      | Peak     |

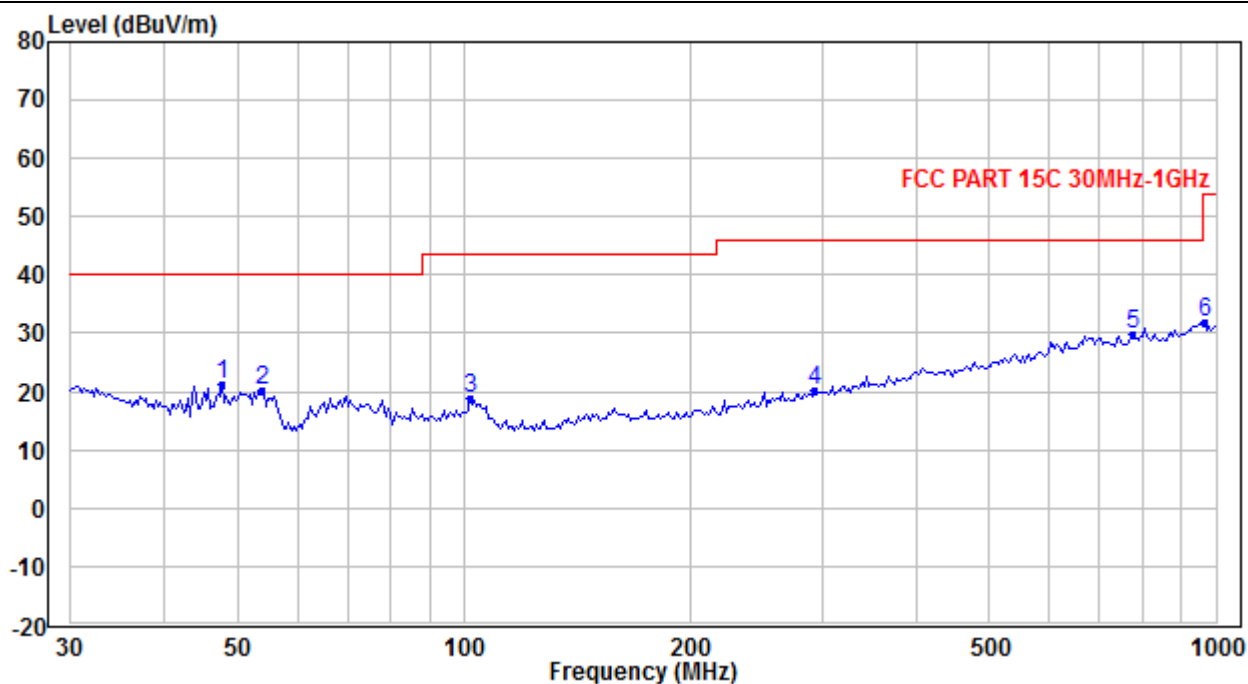**Radiated Emission Test Data (30 MHz ~ 1GHz):**
**Horizontal**


| No. | Frequency (MHz) | Reading (dBuV) | Correction factor (dB/m ) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------------------|-----------------|----------------|-------------|----------|
| 1   | 47.703          | 34.86          | -13.52                    | 21.34           | 40.00          | -18.66      | Peak     |
| 2   | 53.756          | 35.03          | -14.67                    | 20.36           | 40.00          | -19.64      | Peak     |
| 3   | 101.893         | 31.09          | -12.21                    | 18.88           | 43.50          | -24.62      | Peak     |
| 4   | 292.364         | 26.43          | -6.31                     | 20.12           | 46.00          | -25.88      | Peak     |
| 5   | 776.485         | 26.68          | 2.99                      | 29.67           | 46.00          | -16.33      | Peak     |
| 6   | 965.474         | 25.71          | 6.13                      | 31.84           | 54.00          | -22.16      | Peak     |

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

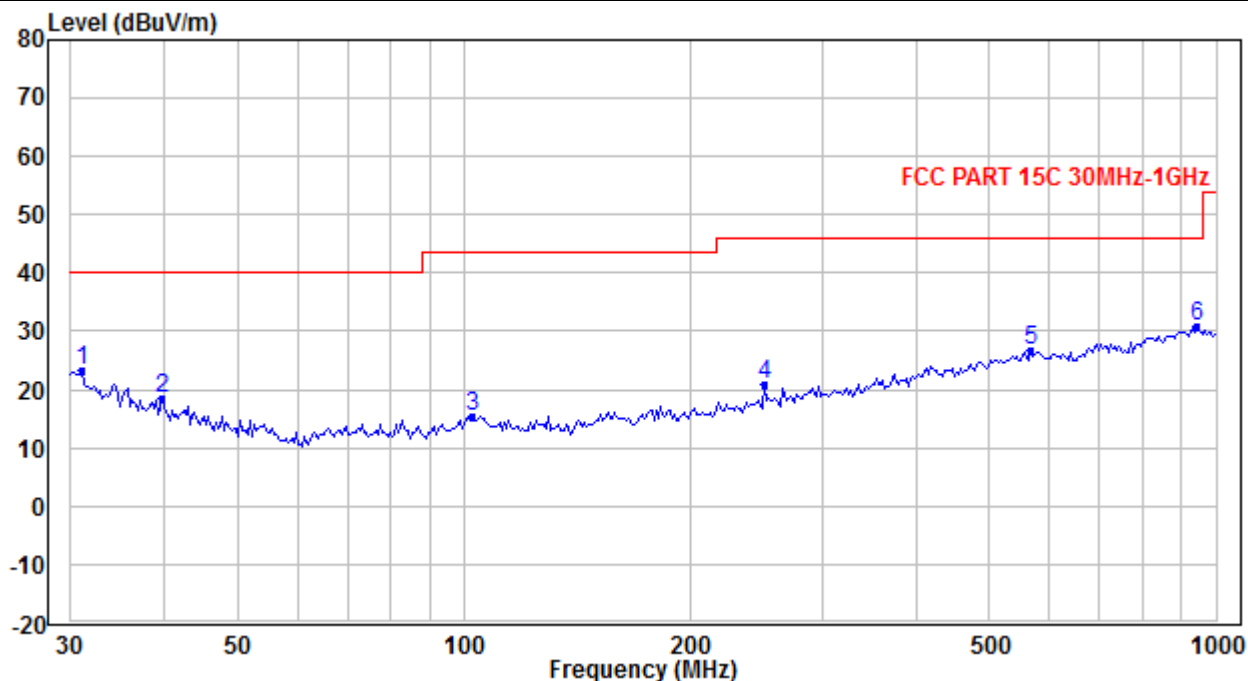**Radiated Emission Test Data (30 MHz ~ 1GHz):**
**Vertical**


| No. | Frequency (MHz) | Reading (dBμV) | Correction factor (dB/m ) | Result (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------------------|-----------------|----------------|-------------|----------|
| 1   | 31.073          | 29.33          | -5.88                     | 23.45           | 40.00          | -16.55      | Peak     |
| 2   | 39.737          | 29.78          | -11.43                    | 18.35           | 40.00          | -21.65      | Peak     |
| 3   | 102.612         | 27.63          | -12.22                    | 15.41           | 43.50          | -28.09      | Peak     |
| 4   | 250.486         | 28.34          | -7.37                     | 20.97           | 46.00          | -25.03      | Peak     |
| 5   | 565.978         | 26.50          | 0.07                      | 26.57           | 46.00          | -19.43      | Peak     |
| 6   | 945.334         | 26.08          | 4.86                      | 30.94           | 46.00          | -15.06      | Peak     |

**Remark:**

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

## 5.5 FUNDAMENTAL FIELD STRENGTH AND EMISSION MASK 13.110 MHZ TO 14.010 MHZ

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.227(a) (b) (c) /15.205

**Test Method:** ANSI C63.10

**Limits:**

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

**Example:**

|                                   |   |                            |        |
|-----------------------------------|---|----------------------------|--------|
| Field strength limit for 13.56MHz | = | 15848 μV/m                 | at 30m |
|                                   | = | 84 dBμV/m                  | at 30m |
|                                   | = | 84 dBμV/m + 40log(30/3) dB | at 3m  |
|                                   | = | 124 dBμV/m                 | at 3m  |

**Test Setup:** Refer to section 4.5.1 for details.

**Test Procedures:**

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.110 MHz to 14.010 MHz, than mark the higher-level emission for comparing with the FCC rules.

**Equipment Used:** Refer to section 3 for details.


**Test Result:** Pass

**Maximum Field Strength:**

| Fundamental frequency | Detector | Result at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB) |
|-----------------------|----------|-----------------------|----------------------|-------------|
| 13.56 MHz             | Peak     | 57.53                 | 124                  | 66.47       |

**Emission Mask:**

The worst case test plots as below.

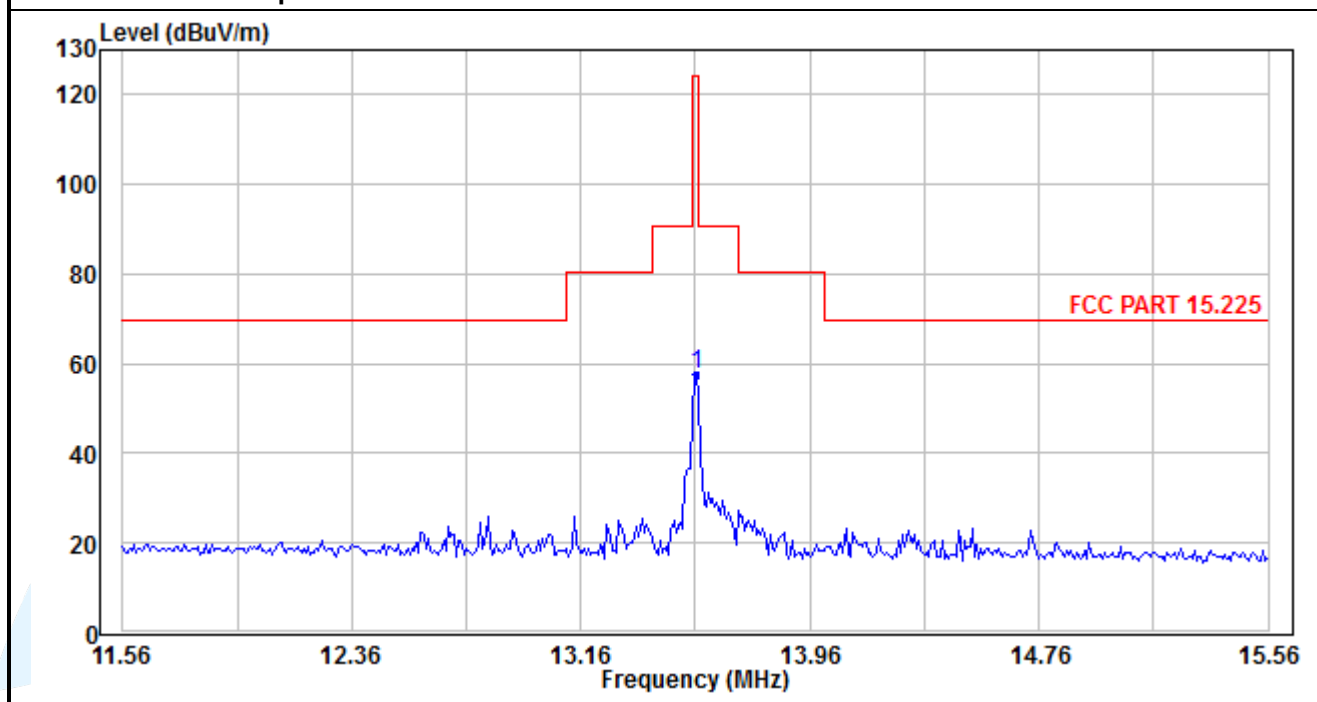
**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

## 5.6 FREQUENCY TOLERANCE

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.225(e)

**Test Method:** ANSI C63.10-2013

**Limits:**

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**Test Setup:** Refer to section 4.5.3 for details.

**Test Procedures:**

- 1) The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2) Turn the EUT on and couple its output to a spectrum analyzer.
- 3) Turn the EUT off and set the chamber to the highest temperature specified.
- 4) Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5) Repeat step c) and d) with the temperature chamber set to the lowest temperature.
- 6) The test chamber was allowed to stabilize at  $+20$  degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

| Frequency Tolerance VS Temperature and Voltage |         |                          |           |           |           |                     |          |          |          |
|------------------------------------------------|---------|--------------------------|-----------|-----------|-----------|---------------------|----------|----------|----------|
| Temp.(°C)                                      | Voltage | Test time (minutes)      |           |           |           |                     |          |          |          |
|                                                |         | 0                        | 2         | 5         | 10        | 0                   | 2        | 5        | 10       |
|                                                |         | Measured Frequency (MHz) |           |           |           | Frequency Drift (%) |          |          |          |
| 50                                             | VN      | 13.560145                | 13.559984 | 13.559978 | 13.559985 | 0.00107             | -0.00012 | -0.00016 | -0.00011 |
| 40                                             | VN      | 13.560037                | 13.559965 | 13.559986 | 13.559967 | 0.00027             | -0.00026 | -0.00010 | -0.00024 |
| 30                                             | VN      | 13.560026                | 13.559937 | 13.560116 | 13.559934 | 0.00019             | -0.00046 | 0.00086  | -0.00049 |
| 20                                             | VN      | 13.559993                | 13.559915 | 13.560026 | 13.559969 | -0.00005            | -0.00063 | 0.00019  | -0.00023 |
|                                                | VL      | 13.560032                | 13.559983 | 13.560014 | 13.559973 | 0.00024             | -0.00013 | 0.00010  | -0.00020 |
|                                                | VH      | 13.56022                 | 13.559967 | 13.559985 | 13.560003 | 0.00162             | -0.00024 | -0.00011 | 0.00002  |
| 10                                             | VN      | 13.559996                | 13.559931 | 13.559967 | 13.559984 | -0.00003            | -0.00051 | -0.00024 | -0.00012 |
| 0                                              | VN      | 13.560145                | 13.55986  | 13.559934 | 13.559965 | 0.00107             | -0.00103 | -0.00049 | -0.00026 |
| -10                                            | VN      | 13.560037                | 13.559972 | 13.559996 | 13.559937 | 0.00027             | -0.00021 | -0.00003 | -0.00046 |
| -20                                            | VN      | 13.560026                | 13.559962 | 13.559940 | 13.559915 | 0.00019             | -0.00028 | -0.00044 | -0.00063 |
| Limit: $\pm 0.01\%$                            |         |                          |           |           |           |                     |          |          |          |

## 5.7 CONDUCTED EMISSION

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.207

**Test Method:** ANSI C63.10-2013 Section 6.2

**Limits:**

| Frequency range<br>(MHz) | Limits (dB(μV)) |          |
|--------------------------|-----------------|----------|
|                          | Quasi-peak      | Average  |
| 0,15 to 0,50             | 66 to 56        | 56 to 46 |
| 0,50 to 5                | 56              | 46       |
| 5 to 30                  | 60              | 50       |

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

**Test Setup:** Refer to section 4.5.2 for details.

**Test Procedures:**

Test frequency range :150KHz-30MHz

- 7) The mains terminal disturbance voltage test was conducted in a shielded room.
- 8) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 9) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 10) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 11) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

**Equipment Used:** Refer to section 3 for details.


**Test Result:** Pass

The measurement data as follows:

Quasi Peak and Average:

Mode: NFC Link

Live Line

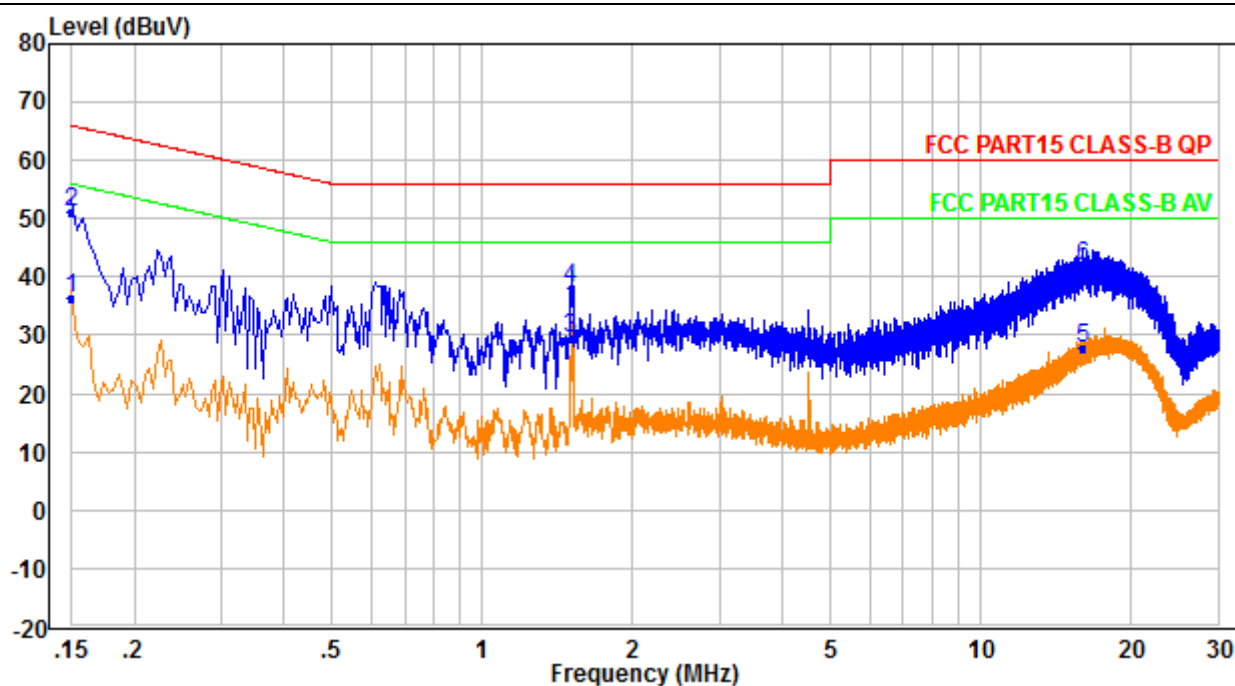

| No. | Frequency (MHz) | Reading (dBuV) | Correction factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|------------------------|---------------|--------------|-------------|----------|
| 1   | 0.150           | 27.20          | 9.12                   | 36.32         | 56.00        | -19.68      | Average  |
| 2   | 0.150           | 41.90          | 9.12                   | 51.02         | 66.00        | -14.98      | QP       |
| 3   | 1.506           | 19.90          | 9.60                   | 29.50         | 46.00        | -16.50      | Average  |
| 4   | 1.506           | 28.60          | 9.60                   | 38.20         | 56.00        | -17.80      | QP       |
| 5   | 16.017          | 17.80          | 10.08                  | 27.88         | 50.00        | -22.12      | Average  |
| 6   | 16.017          | 31.90          | 10.08                  | 41.98         | 60.00        | -18.02      | QP       |

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

# Neutral Line

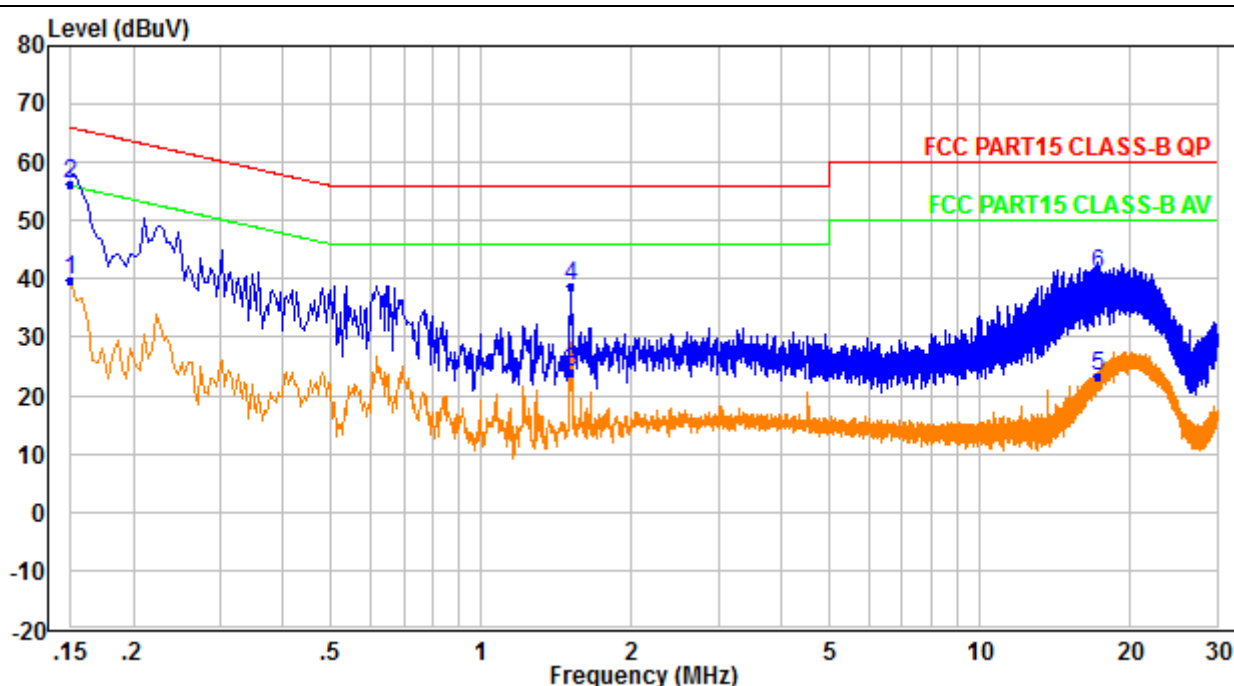

| No. | Frequency (MHz) | Reading (dBuV) | Correction factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|------------------------|---------------|--------------|-------------|----------|
| 1   | 0.150           | 30.70          | 9.12                   | 39.82         | 56.00        | -16.18      | Average  |
| 2   | 0.150           | 47.20          | 9.12                   | 56.32         | 66.00        | -9.68       | QP       |
| 3   | 1.510           | 14.30          | 9.60                   | 23.90         | 46.00        | -22.10      | Average  |
| 4   | 1.510           | 29.10          | 9.60                   | 38.70         | 56.00        | -17.30      | QP       |
| 5   | 17.337          | 13.20          | 10.13                  | 23.33         | 50.00        | -26.67      | Average  |
| 6   | 17.337          | 30.80          | 10.13                  | 40.93         | 60.00        | -19.07      | QP       |

## Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V/50Hz and 120V/60Hz, only the worst case emissions reported.

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.225-V1.0

## APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

## APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

---

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.

---