

# FCC TEST REPORT

**Product Name:** Handheld Smart Terminal



or RHINO

**Model No.:** T5se

**Add. Model No.:** N/A

**Report Number:** 220412017RFC-2

**Test Standards:** FCC 47 CFR Part 15 Subpart C

**FCC ID:** 2AUOUT5SE

**Test Result:** PASS

**Date of Issue:** August 10, 2022

Prepared for:

**Rhino Mobility LLC**  
8 The Green, Suite A, Dover, Delaware, 19901, USA

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and**  
**technology park, Longhua district, Shenzhen, China**

**TEL: +86-755-2823 0888**

**FAX: +86-755-2823 0886**

Prepared by:

A handwritten signature of Kieron Luo.

Kieron Luo  
Project Engineer

Reviewed by:

A handwritten signature of Henry Lu.

Henry Lu  
Team Leader

Approved by:

A handwritten signature of Kevin Liang.

Kevin Liang  
Assistant Manager

Date: August 10, 2022

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

**Version**

Version No.	Date	Description
V1.0	August 10, 2022	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 CLIENT INFORMATION .....	4
1.2 EUT INFORMATION .....	4
1.2.1 GENERAL DESCRIPTION OF EUT .....	4
1.2.2 DESCRIPTION OF ACCESSORIES .....	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	5
1.4 OTHER INFORMATION .....	6
1.5 DESCRIPTION OF SUPPORT UNITS .....	6
1.6 TEST LOCATION .....	6
1.7 TEST FACILITY .....	7
1.8 DEVIATION FROM STANDARDS .....	7
1.9 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
1.11 MEASUREMENT UNCERTAINTY .....	7
<b>2. TEST SUMMARY .....</b>	<b>8</b>
<b>3. EQUIPMENT LIST .....</b>	<b>9</b>
<b>4. TEST CONFIGURATION .....</b>	<b>10</b>
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING .....	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....	10
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE .....	10
4.2 TEST CHANNELS .....	10
4.3 EUT TEST STATUS .....	10
4.4 PRE-SCAN .....	11
4.4.1 PRE-SCAN UNDER ALL PACKETS AT MIDDLE CHANNEL .....	11
4.4.2 WORST-CASE DATA PACKETS .....	11
4.4.3 TESTED CHANNEL DETAIL .....	11
4.5 TEST SETUP .....	12
4.5.1 FOR RADIATED EMISSIONS TEST SETUP .....	12
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP .....	13
4.5.3 FOR CONDUCTED RF TEST SETUP .....	14
4.6 SYSTEM TEST CONFIGURATION .....	14
4.7 DUTY CYCLE .....	15
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION .....</b>	<b>16</b>
5.1 REFERENCE DOCUMENTS FOR TESTING .....	16
5.2 ANTENNA REQUIREMENT .....	16
5.3 CONDUCTED PEAK OUTPUT POWER .....	17
5.4 20 dB BANDWIDTH .....	20
5.5 CARRIER FREQUENCIES SEPARATION .....	23
5.6 NUMBER OF HOPPING CHANNEL .....	25
5.7 DWELL TIME .....	29
5.8 CONDUCTED OUT OF BAND EMISSION .....	33
5.9 RADIATED SPURIOUS EMISSIONS .....	38
5.10 BAND EDGE MEASUREMENTS (RADIATED) .....	42
5.11 CONDUCTED EMISSION .....	45
<b>APPENDIX 1 PHOTOS OF TEST SETUP .....</b>	<b>48</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS .....</b>	<b>48</b>

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

<b>Applicant:</b>	Rhino Mobility LLC
<b>Address of Applicant:</b>	8 The Green, Suite A, Dover, Delaware,19901, USA
<b>Manufacturer:</b>	Rhino Mobility LLC
<b>Address of Manufacturer:</b>	8 The Green, Suite A, Dover, Delaware,19901, USA

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

<b>Product Name:</b>	Handheld Smart Terminal							
<b>Model No.:</b>	T5se							
<b>Add. Model No.:</b>	N/A							
<b>Trade Mark:</b>	 or RHINO							
<b>DUT Stage:</b>	Identical Prototype							
<b>EUT Supports Function:</b> (Provided by the customer)	<b>UTRA Bands:</b>	Band II/ Band IV/ Band V						
	<b>E-UTRA Bands:</b>	FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 12/ Band 13/ Band 14/ Band 17/ Band 25/ Band 26/ Band 30/ Band 66/ Band 71						
		TDD Band 41						
	<b>2.4 GHz ISM Band:</b>	IEEE 802.11b/g/n						
		Bluetooth V4.2						
	<b>5 GHz U-NII Bands:</b>	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac					
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac					
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac					
	<b>RNSS Bands:</b>	1559 MHz to 1610 MHz	GPS/ Galileo/ GLONASS					
	<b>NFC:</b>	13.553 MHz to 13.567 MHz						
<b>Software Version:</b>	T5se(001)_20220624 (Provided by the customer)							
<b>Hardware Version:</b>	AL_Z06_MB_V12 (Provided by the customer)							
<b>Sample Received Date:</b>	April 13, 2022							
<b>Sample Tested Date:</b>	April 28, 2022 to June 27, 2022							
Note: The T5se have two LCD modules from different vendors. This report has evaluated and pre-testing of two batches of LCD modules, with only the worst data recorded in the report.								
<b>Remark:</b> The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.								

### 1.2.2 Description of Accessories

Adapter	
<b>Model No.:</b>	XY-PP018U1
<b>Input:</b>	100-240 V~50/60 Hz 0.5A
<b>Output:</b>	3.6-6.0 V == 3.0A, 6.0-9.0 V == 2.0A, 9.0-12.0 V == 1.5A
<b>AC Cable:</b>	N/A
<b>DC Cable:</b>	N/A

Internal Battery	
<b>Model No.:</b>	BPT5se
<b>Battery Type:</b>	Lithium-ion Rechargeable Battery
<b>Rated Voltage:</b>	3.85 Vdc
<b>Limited Charge Voltage:</b>	4.4 Vdc
<b>Rated Capacity:</b>	3000 mAh

External Battery Pack	
<b>Model No.:</b>	T5SE-EBAT-3K-BLK
<b>Battery Type:</b>	Lithium-ion Rechargeable Battery
<b>Rated Voltage:</b>	3.85 Vdc
<b>Limited Charge Voltage:</b>	4.4 Vdc
<b>Rated Capacity:</b>	3030 mAh

Cable	
<b>Description:</b>	USB Type-C Plug Cable
<b>Cable Type:</b>	Shielded without ferrite
<b>Length:</b>	1 Meter

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Frequency Band:</b>	2400 MHz to 2483.5 MHz
<b>Frequency Range:</b>	2402 MHz to 2480 MHz
<b>Bluetooth Version:</b>	Bluetooth BR + EDR
<b>Modulation Technique:</b>	Frequency Hopping Spread Spectrum (FHSS)
<b>Type of Modulation:</b>	GFSK, $\pi/4$ DQPSK, 8DPSK
<b>Number of Channels:</b>	79
<b>Channel Separation:</b>	1 MHz
<b>Hopping Channel Type:</b>	Adaptive Frequency Hopping Systems
<b>Antenna Type:</b> (Provided by the customer)	LDS Antenna
<b>Antenna Gain:</b> (Provided by the customer)	2.12 dBi
<b>Maximum Peak Power:</b>	12.63 dBm
<b>Normal Test Voltage:</b>	3.85 Vdc

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
$f = 2402 + k \text{ MHz}, k = 0, \dots, 78$	
Note:	
$f$	is the operating frequency (MHz);
$k$	is the operating channel.

Modulation Configure				
Modulation	Packet	Packet Type	Packet Size	
GFSK	1-DH1	4	27	
	1-DH3	11	183	
	1-DH5	15	339	
$\pi/4$ DQPSK	2-DH1	20	54	
	2-DH3	26	367	
	2-DH5	30	679	
8DPSK	3-DH1	24	83	
	3-DH3	27	552	
	3-DH5	31	1021	

## 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

### 1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
--	--	--	--	--

### 2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust

## 1.6 TEST LOCATION

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109  
Telephone: +86 (0) 755 2823 0888  
Fax: +86 (0) 755 2823 0886

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China  
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>  
UTTR-RF-FCCPART15.247-V1.1

## 1.7 TEST FACILITY

---

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### **A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### **ISED Wireless Device Testing Laboratories**

CAB identifier: CN0032

### **FCC Accredited Lab.**

Designation Number: CN1194

Test Firm Registration Number: 259480

---

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

## 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	±4.7 dB
4	Radiated emission 30MHz-1GHz	±4.6 dB
5	Radiated emission 1GHz-18GHz	±4.4 dB
6	Radiated emission 18GHz-40GHz	±4.6 dB

## **Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
<b>Antenna Requirement</b>	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	N/A	PASS
<b>AC Power Line Conducted Emission</b>	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Section 6.2	PASS
<b>Conducted Peak Output Power</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013 Section 7.8.5	PASS
<b>20 dB Bandwidth</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013 Section 6.9.2	PASS
<b>Carrier Frequencies Separation</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013 Section 7.8.2	PASS
<b>Number of Hopping Channel</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013 Section 7.8.3	PASS
<b>Dwell Time</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013 Section 7.8.4	PASS
<b>Conducted Out of Band Emission</b>	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8	PASS
<b>Radiated Emissions</b>	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6	PASS
<b>Band Edge Measurement</b>	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Section 6.10.5	PASS

**Disclaimer and Explanations:**  
The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021	21-Jan-2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	15-Apr-2022	14-Apr-2023
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	11-Nov-2021	10-Nov-2023
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	30-Apr-2021	29-Apr-2023
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118385		17-Apr-2022	16-Apr-2024
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	17-Apr-2022	16-Apr-2024
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	14-Nov-2020	13-Nov-2022
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118384	00202652	17-Nov-2020	16-Nov-2022
<input checked="" type="checkbox"/>	Band Reject Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G248	6-Nov-2021	5-Nov-2022
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	101181	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	5-Nov-2021	4-Nov-2022
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9 20151119i		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	22-Apr-2021	22-Apr-2022
<input checked="" type="checkbox"/>	USB Wideband Power Sensor				15-Apr-2022	14-Apr-2023
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	5-Nov-2021	4-Nov-2022
<input type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	5-Nov-2021	4-Nov-2022

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	3.85	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	24.5	49	101.1	220412020-A06/17	David Zhang
Conducted Peak Output Power	22.6	53	100.1	220412020-A03/17	Hank Wu
20 dB Bandwidth					
Carrier Frequencies Separation					
Number of Hopping Channel					
Dwell Time					
Conducted Out of Band Emission					
Radiated Emissions	21.5	52	100.3	220412020-A06/17	Fire Huo
Band Edge Measurement					

## 4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
GFSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
$\pi/4$ DQPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
8DPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz

## 4.3 EUT TEST STATUS

Type of Modulation	Tx Function	Description
GFSK/ $\pi/4$ DQPSK/8DPSK	1Tx	<ol style="list-style-type: none"> <li>Keep the EUT in continuously transmitting with Modulation test single</li> <li>Keep the EUT in continuously transmitting with Modulation test Hopping Frequency.</li> </ol>

#### Power Setting (Provided by the customer)

Power Setting: not applicable, test used software default power level.

**Test Software (Provided by the customer)**

Engineer mode: \*###3646633##\*#

## 4.4 PRE-SCAN

### 4.4.1 Pre-scan under all packets at middle channel

**Conducted Average Power (dBm) for packets**

Type of Modulation	GFSK			π/4DQPSK			8DPSK		
packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Power (dBm)	5.22	8.42	9.09	3.88	6.70	7.34	3.91	6.71	7.31

### 4.4.2 Worst-case data packets

Type of Modulation	Worst-case data rates
GFSK	1-DH5
π/4DQPSK	2-DH5
8DPSK	3-DH5

### 4.4.3 Tested channel detail


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Type of Modulation	GFSK			π/4DQPSK			8DPSK		
Data Packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Available Channel	0 to 78								
Test Item	Test channel and choose of data packets								
AC Power Line Conducted Emission	Frequency Hopping Channel 0 to 78								
Conducted Peak Output Power	Link								
20 dB Bandwidth	Channel 0 & 39 & 78								
Carrier Frequencies Separation	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Number of Hopping Channel	Channel 0 & 39 & 78								
Dwell Time	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Conducted Out of Band Emission	Channel 0 & 39 & 78								
Radiated Emissions	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Band Edge Measurements (Radiated)	Channel 0 & 78								
Remark:									
1. The mark “ <input checked="" type="checkbox"/> ” means is chosen for testing;									
2. The mark “ <input type="checkbox"/> ” means is not chosen for testing.									


## 4.5 TEST SETUP

### 4.5.1 For Radiated Emissions test setup


**Figure 1. Below 30MHz**

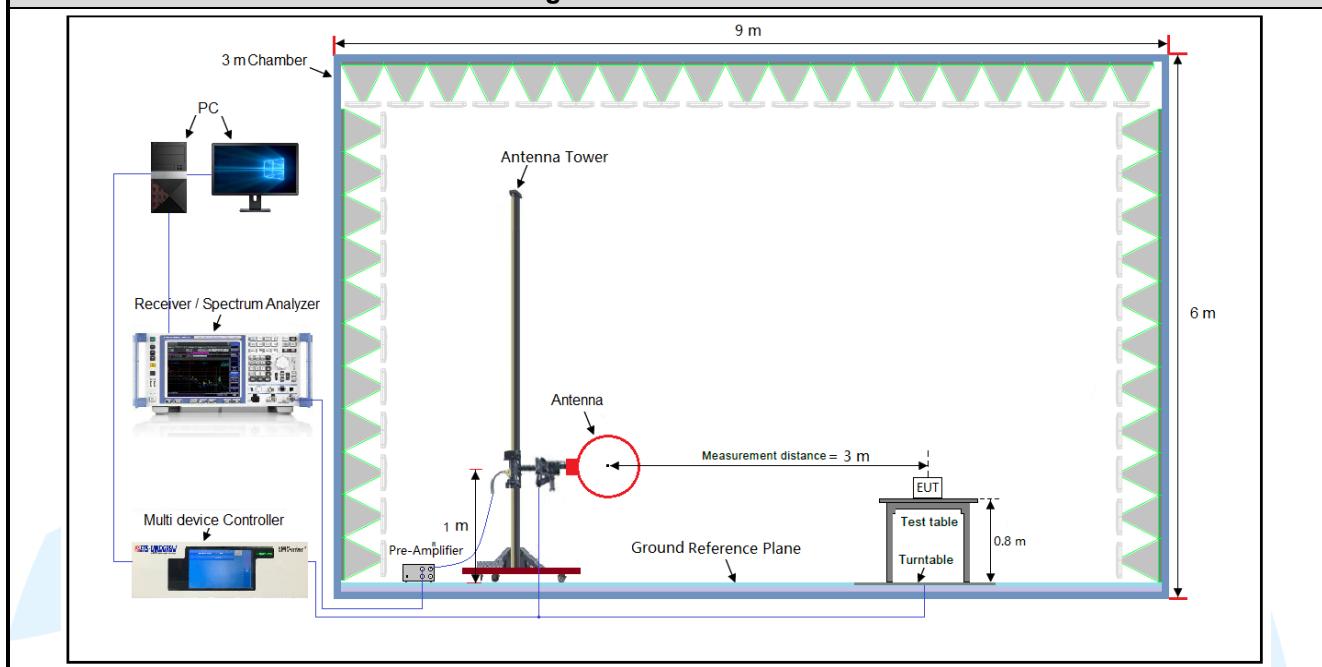


**Figure 2. 30MHz to 1GHz**

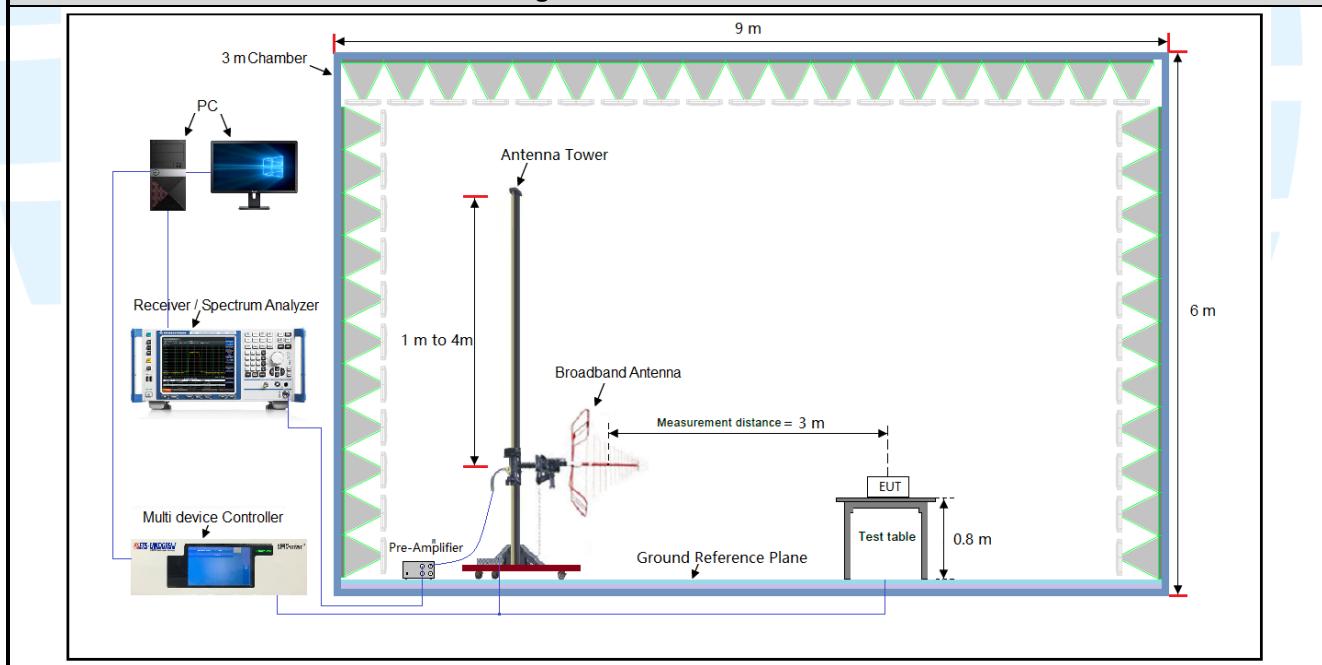


**Figure 3. Above 1GHz**

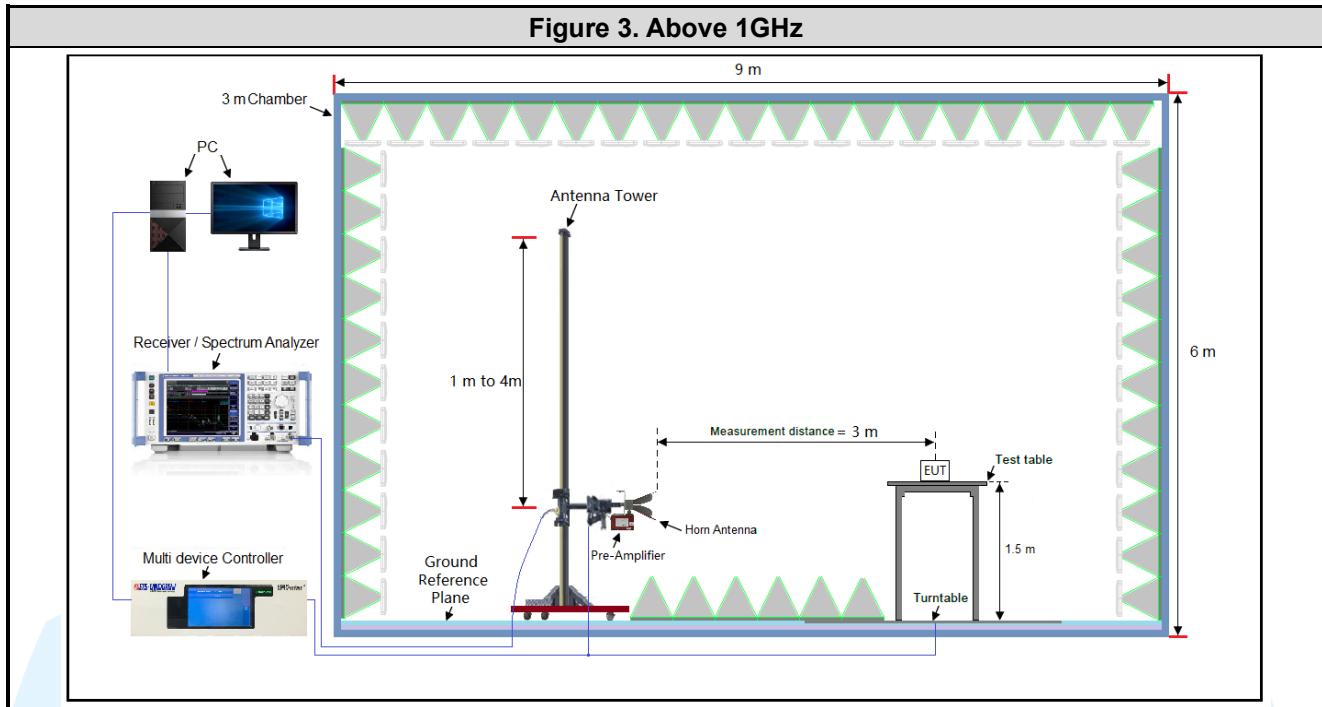

#### 4.5.2 For Conducted Emissions test setup

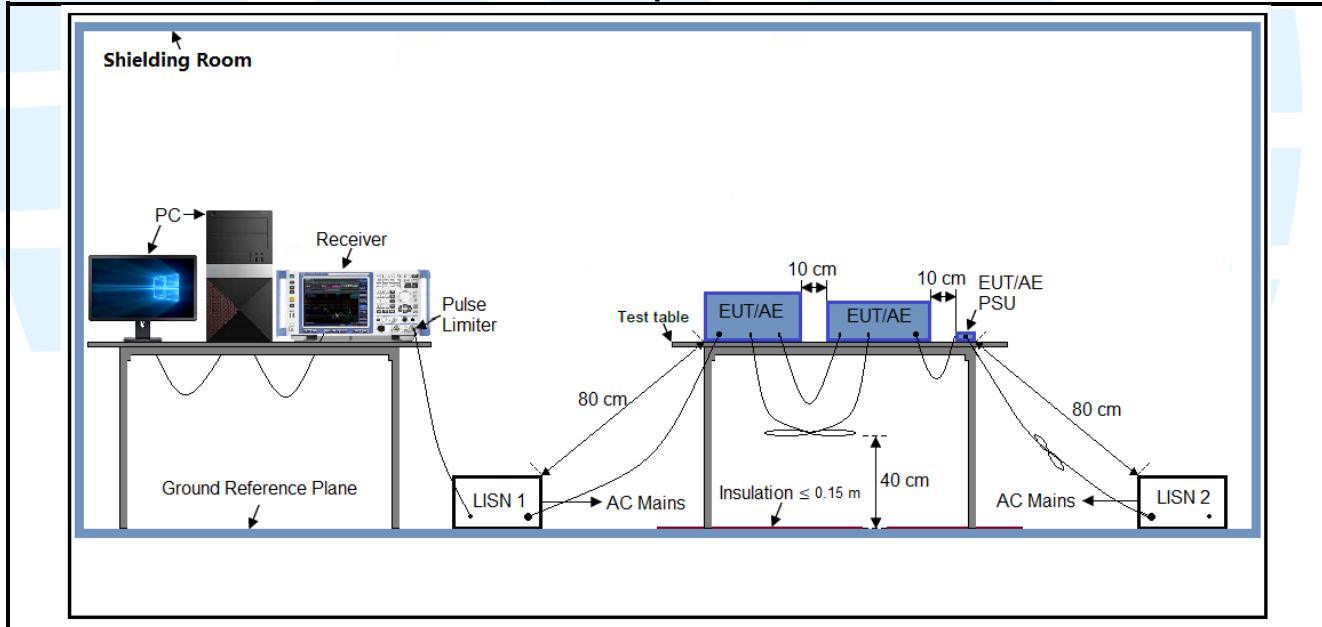

#### 4.5.3 For Conducted RF test setup

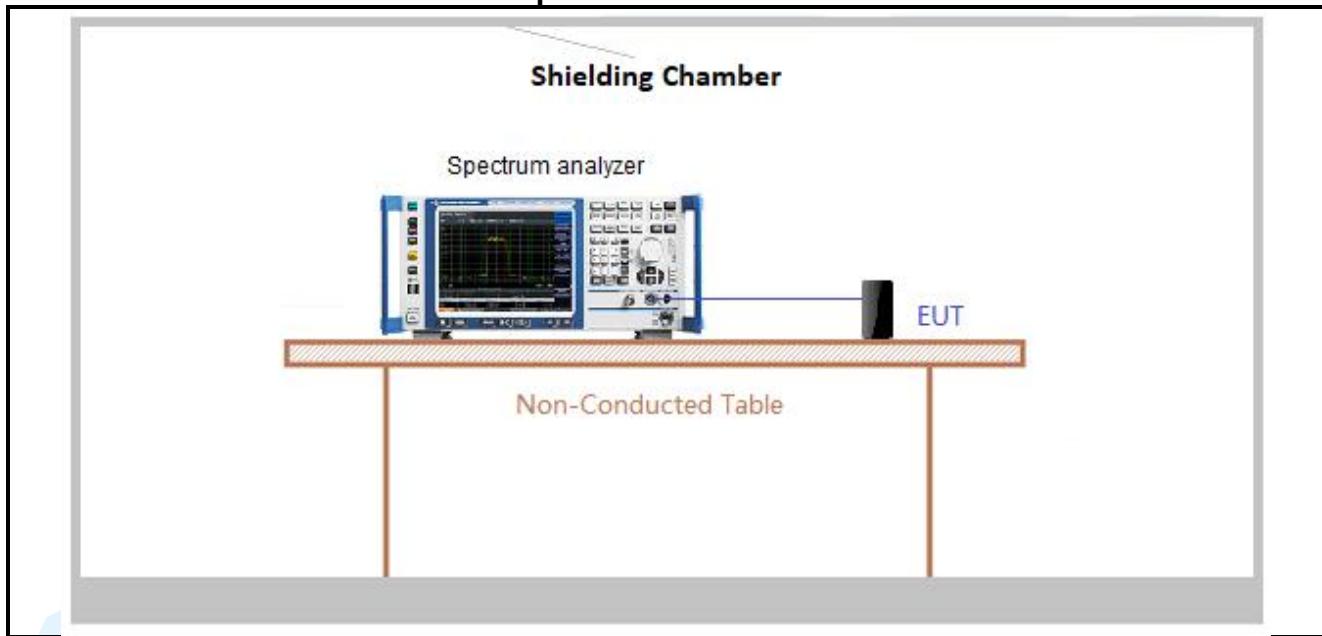

#### 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.85V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


### Test Results

Modulation	Packets	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
GFSK	1-DH5	2.865	3.750	0.76	76.40	1.17	0.35

#### Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;

The test plots as follows

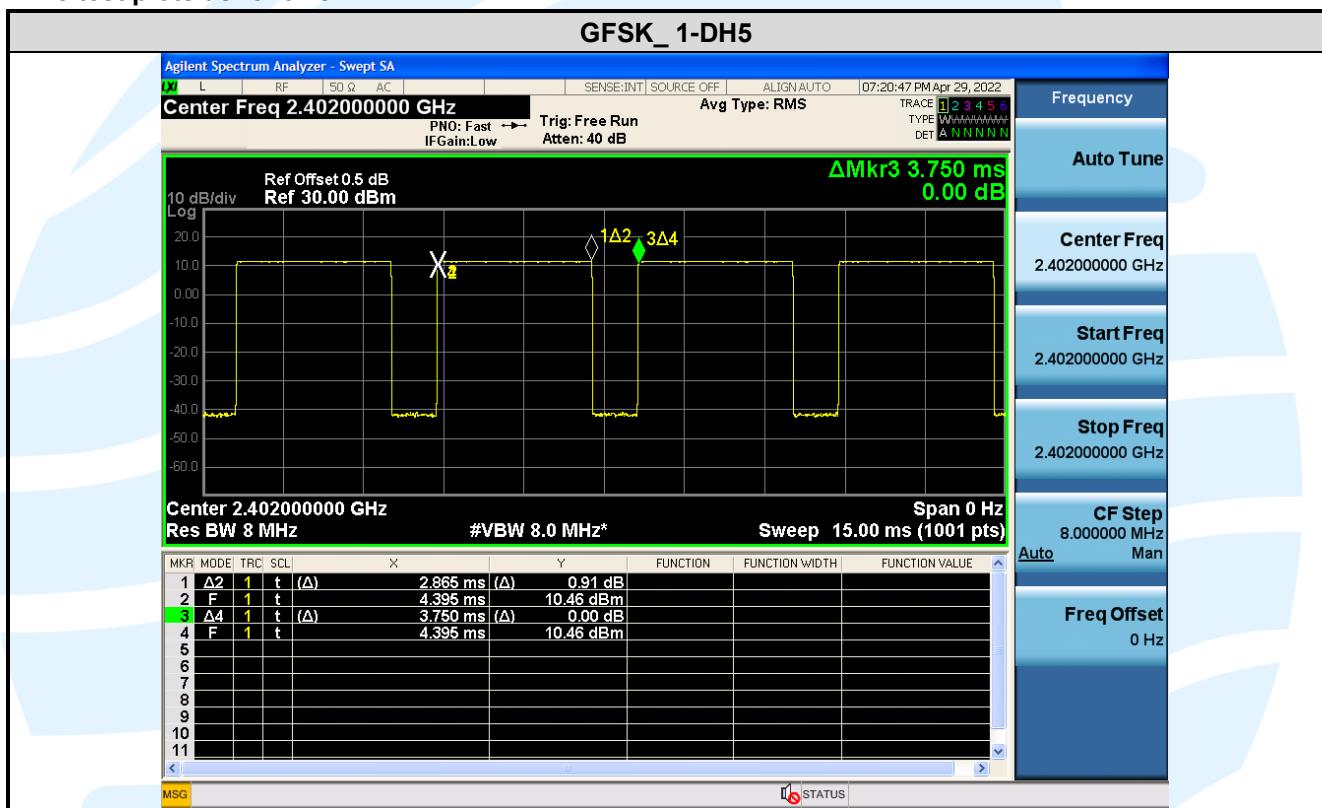

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
<b>15.247(b) (4) requirement:</b> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<b>EUT Antenna:</b> Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 2.12 dBi.

### 5.3 CONDUCTED PEAK OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.5

**Limit:** For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- a) Use the following spectrum analyzer settings:
  - 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW  $\geq$  RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

**Test Setup:** Refer to section 4.5.3 for details.


**Instruments Used:** Refer to section 3 for details


**Test Results:** Pass

Modulation	Channel	Frequency (MHz)	Maximum Conducted Peak Power	Maximum Conducted Avg Power	Limit (dBm)	Result
GFSK DH5	0	2402	12.63	10.53	20.97	Pass
	39	2441	11.53	9.09	20.97	Pass
	78	2480	10.82	8.58	20.97	Pass
$\pi/4$ DQPSK 2DH5	0	2402	12.44	8.69	20.97	Pass
	39	2441	11.36	7.34	20.97	Pass
	78	2480	10.71	6.80	20.97	Pass
8DPSK 3DH5	0	2402	12.29	8.71	20.97	Pass
	39	2441	11.23	7.31	20.97	Pass
	78	2480	10.57	6.85	20.97	Pass

Note: The antenna gain of 2.12 dBi less than 6dBi maximum permission antenna gain value based on 125 mW peak output power limit.

The test plots as follows:

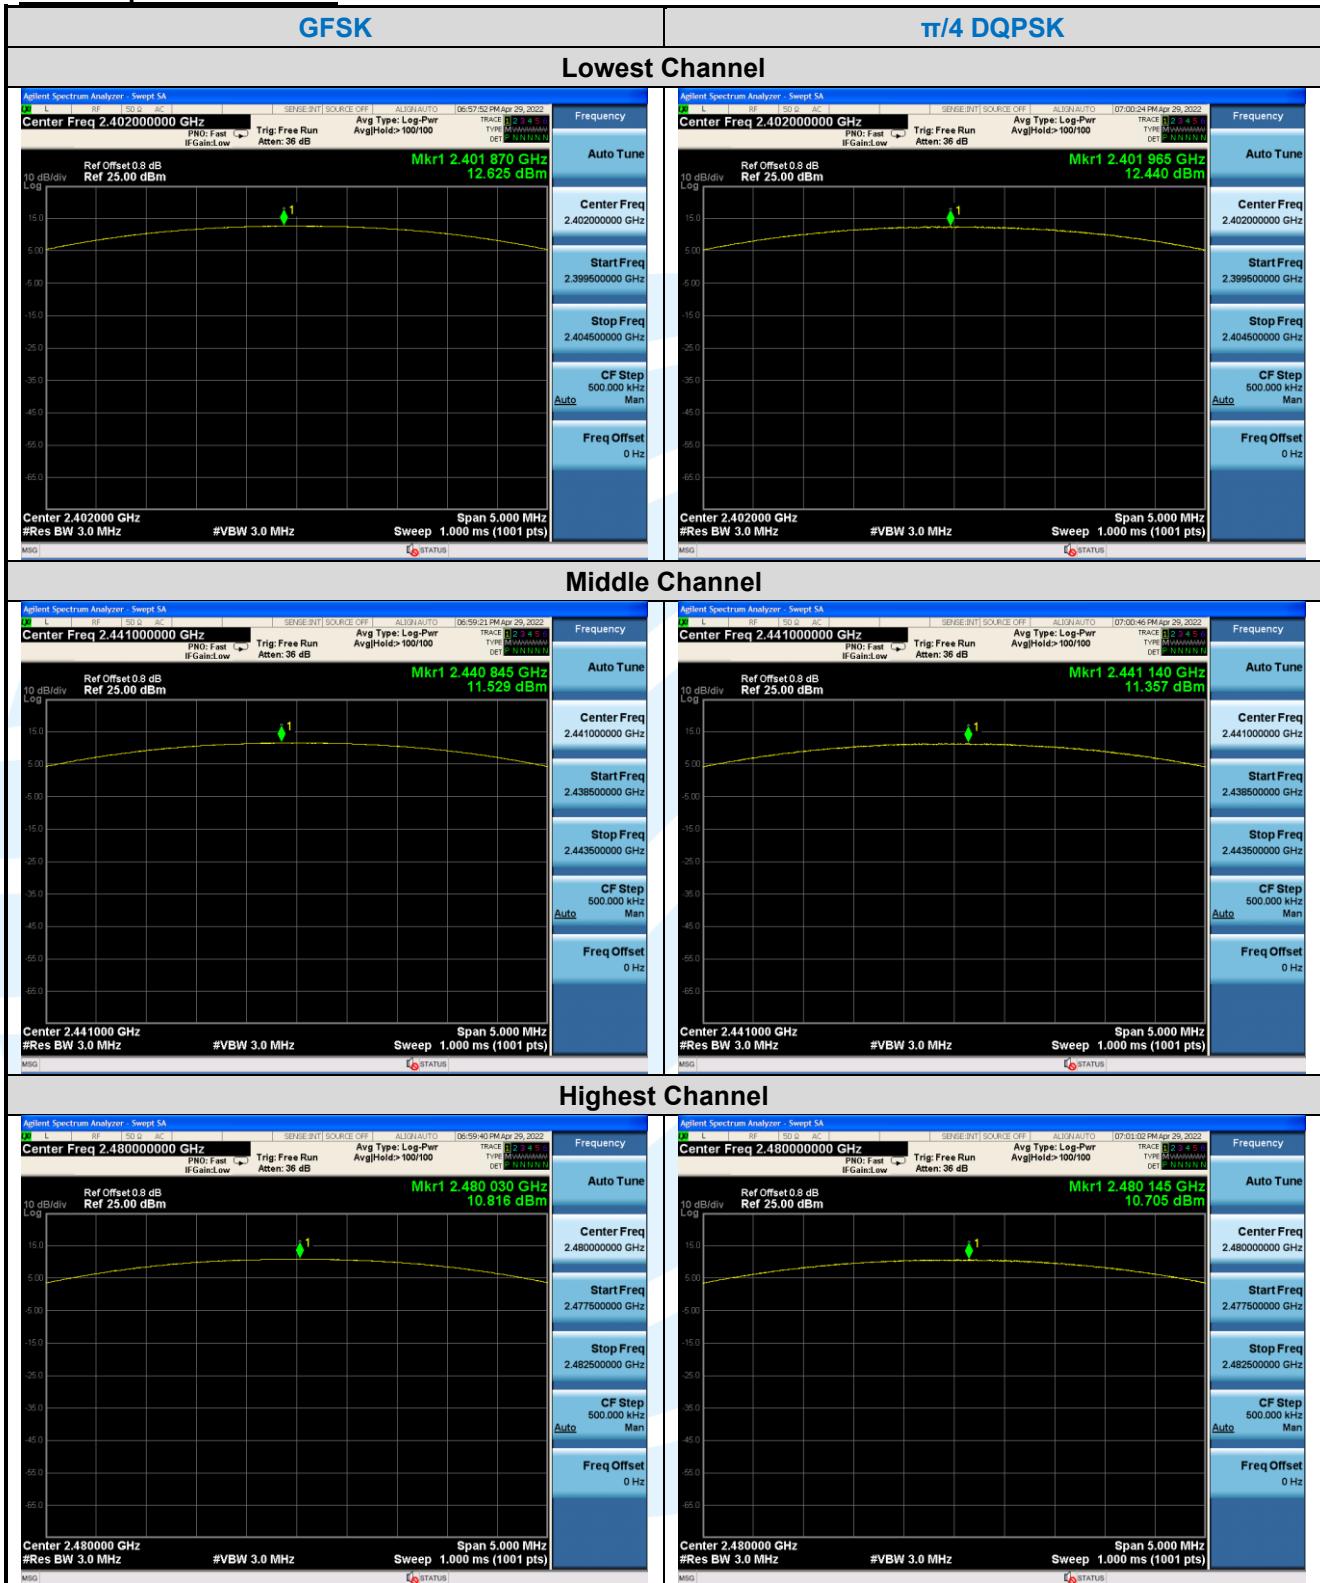

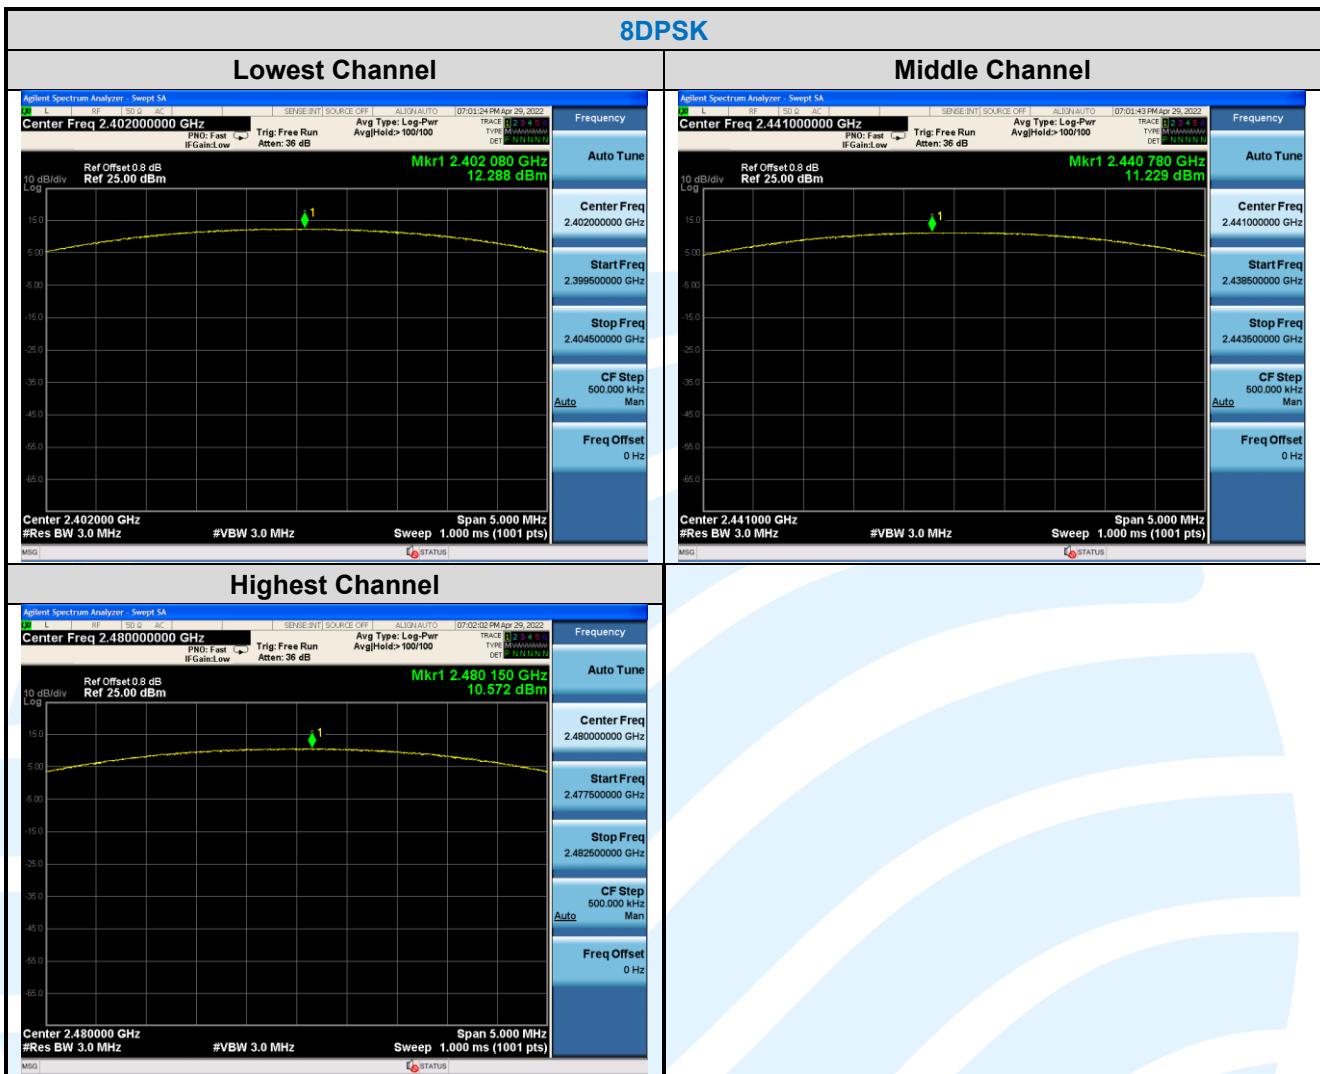

## 5.420 DB BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

**Test Method:** ANSI C63.10-2013 Section 6.9.2

**Limit:** None; for reporting purposes only.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel.
- b) RBW = 1% to 5% of the OBW.
- c) VBW  $\geq$  3 x RBW
- d) Sweep = auto;
- e) Detector function = peak
- f) Trace = max hold
- g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

Type of Modulation	20 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
GFSK	1.040	1.041	1.050	0.90612	0.90868	0.92411
$\pi/4$ DQPSK	1.289	1.311	1.318	1.1691	1.1706	1.1807
8DPSK	1.295	1.297	1.302	1.1799	1.1834	1.1964

The test plots as follows:

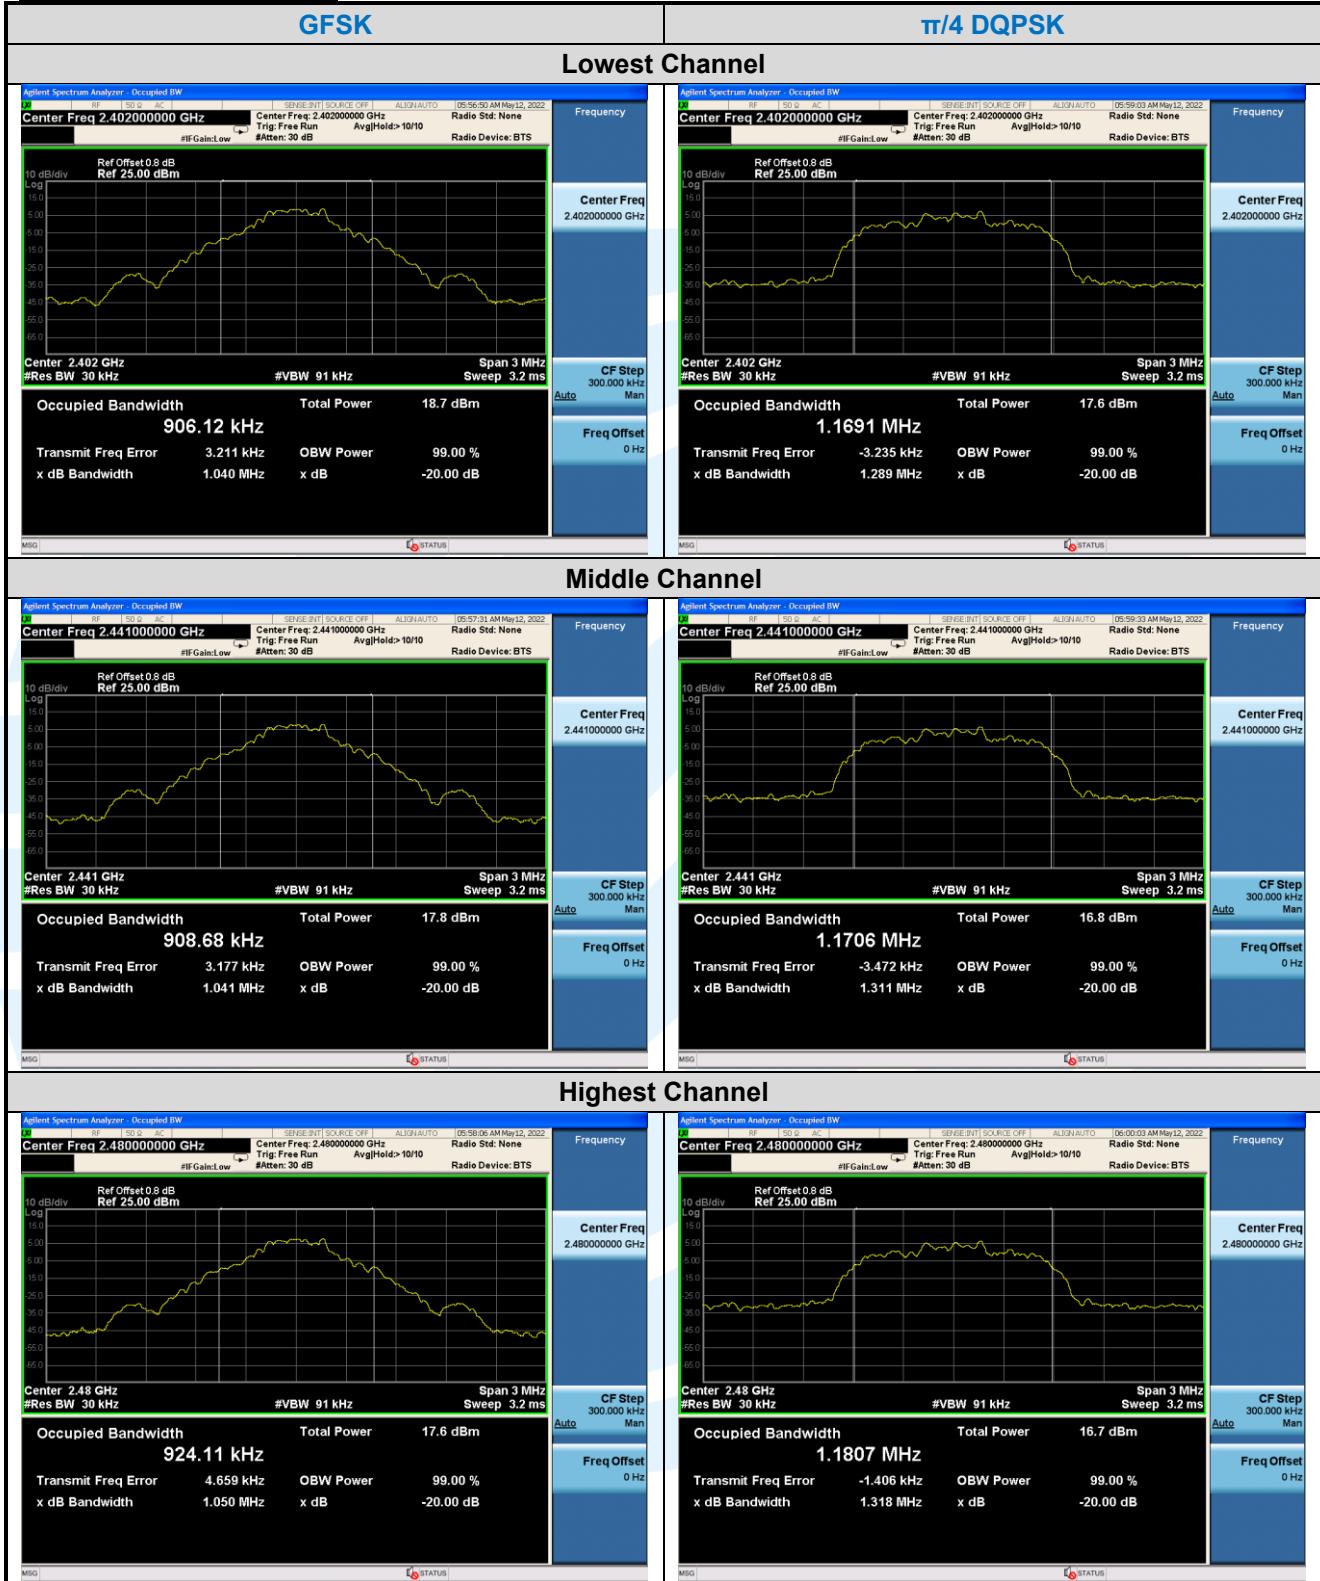



## 5.5 CARRIER FREQUENCIES SEPARATION

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.2

**Limit:** Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.
- h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

Type of Modulation	Adjacent Channel Separation (MHz)		Minimum Limit (MHz)
	Channel 39	Channel 39	
GFSK	1.000		0.6933
$\pi/4$ DQPSK	1.000		0.8593
8DPSK	1.000		0.8633

Note: The minimum limit is two-third 20 dB bandwidth.

The test plots as follows:



## 5.6 NUMBER OF HOPPING CHANNEL

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(b)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.3

**Limit:** Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.


**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass


Type of Modulation	Number of Hopping Channel
GFSK	79
$\pi/4$ DQPSK	79
8DPSK	79


The test plots as follows:


### GFSK\_Low End Spectrum Channel Hopping Plot

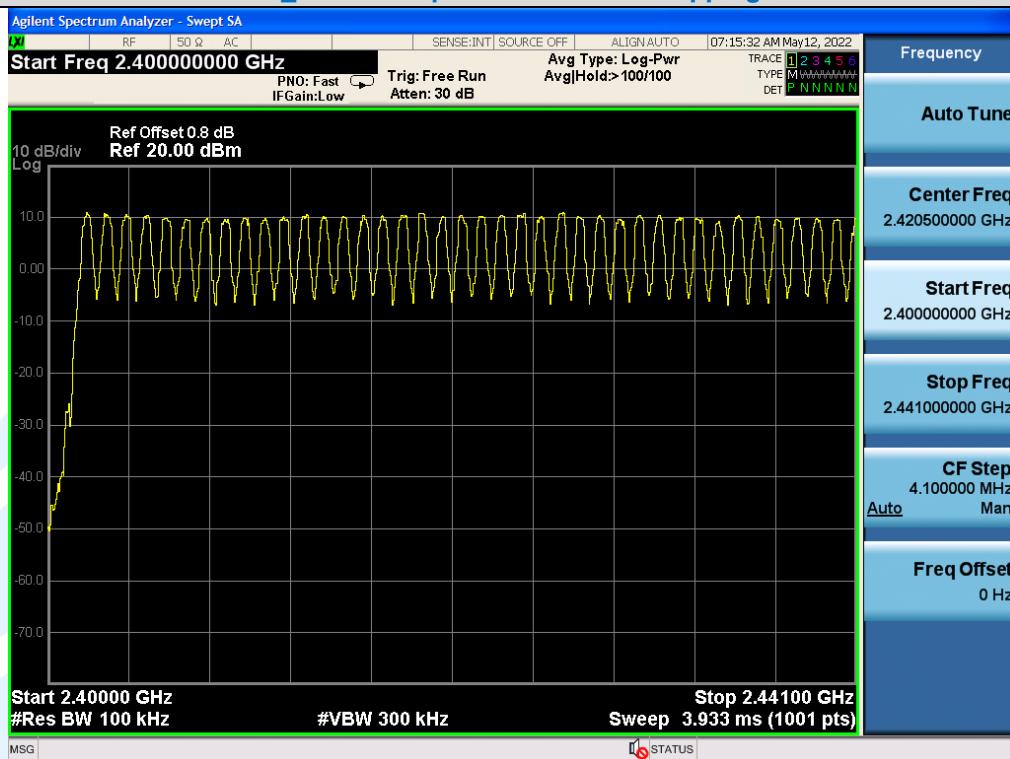

### GFSK\_High End Spectrum Channel Hopping Plot

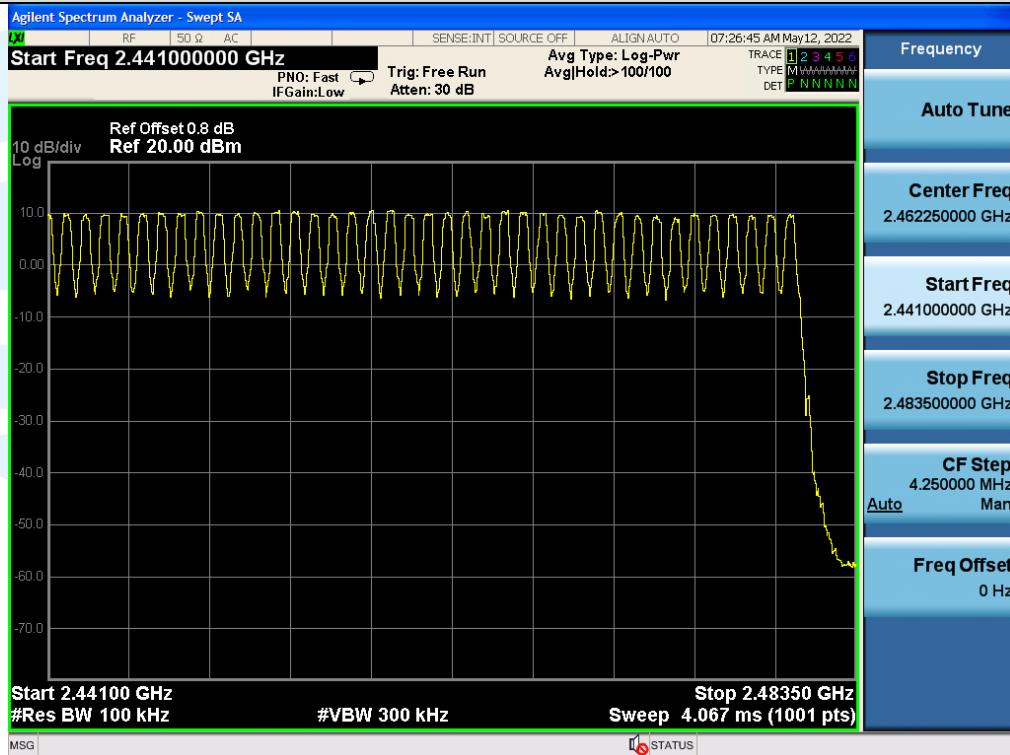

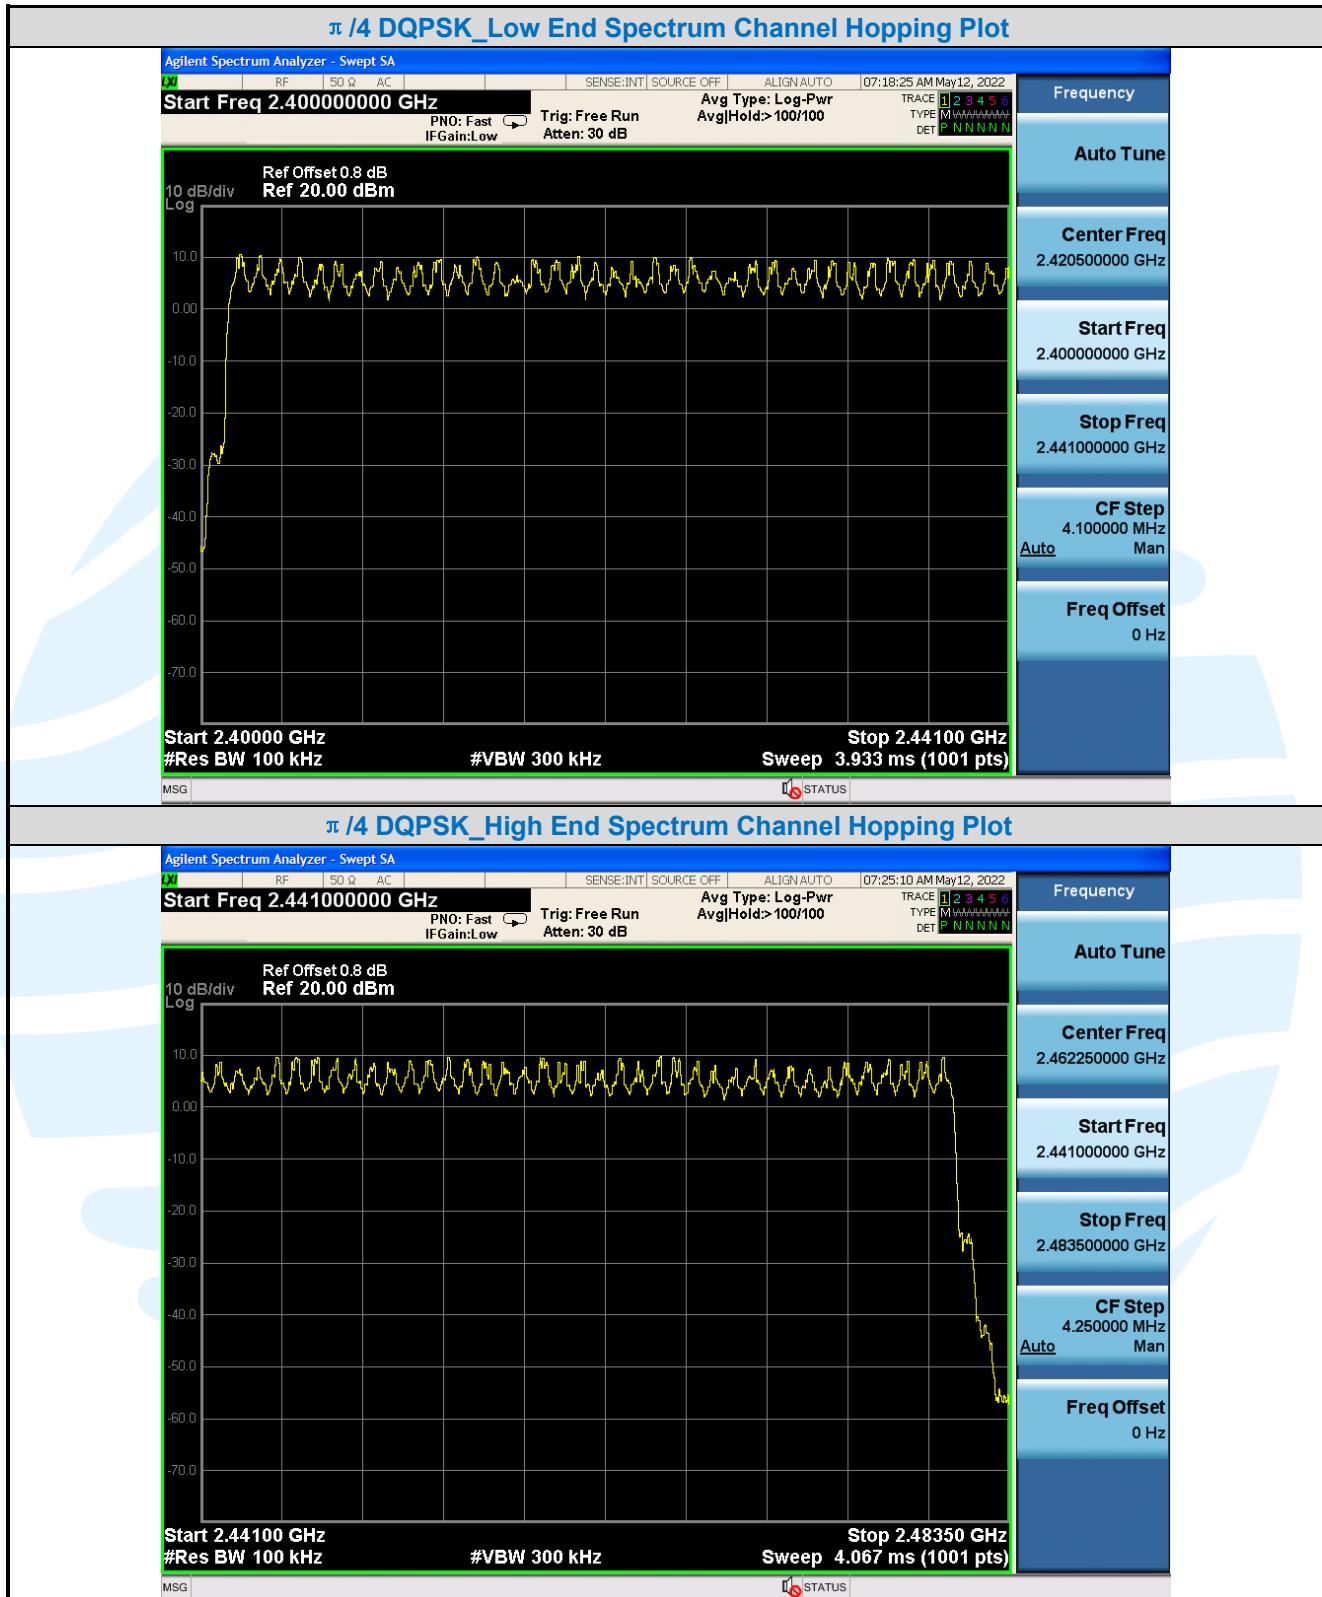

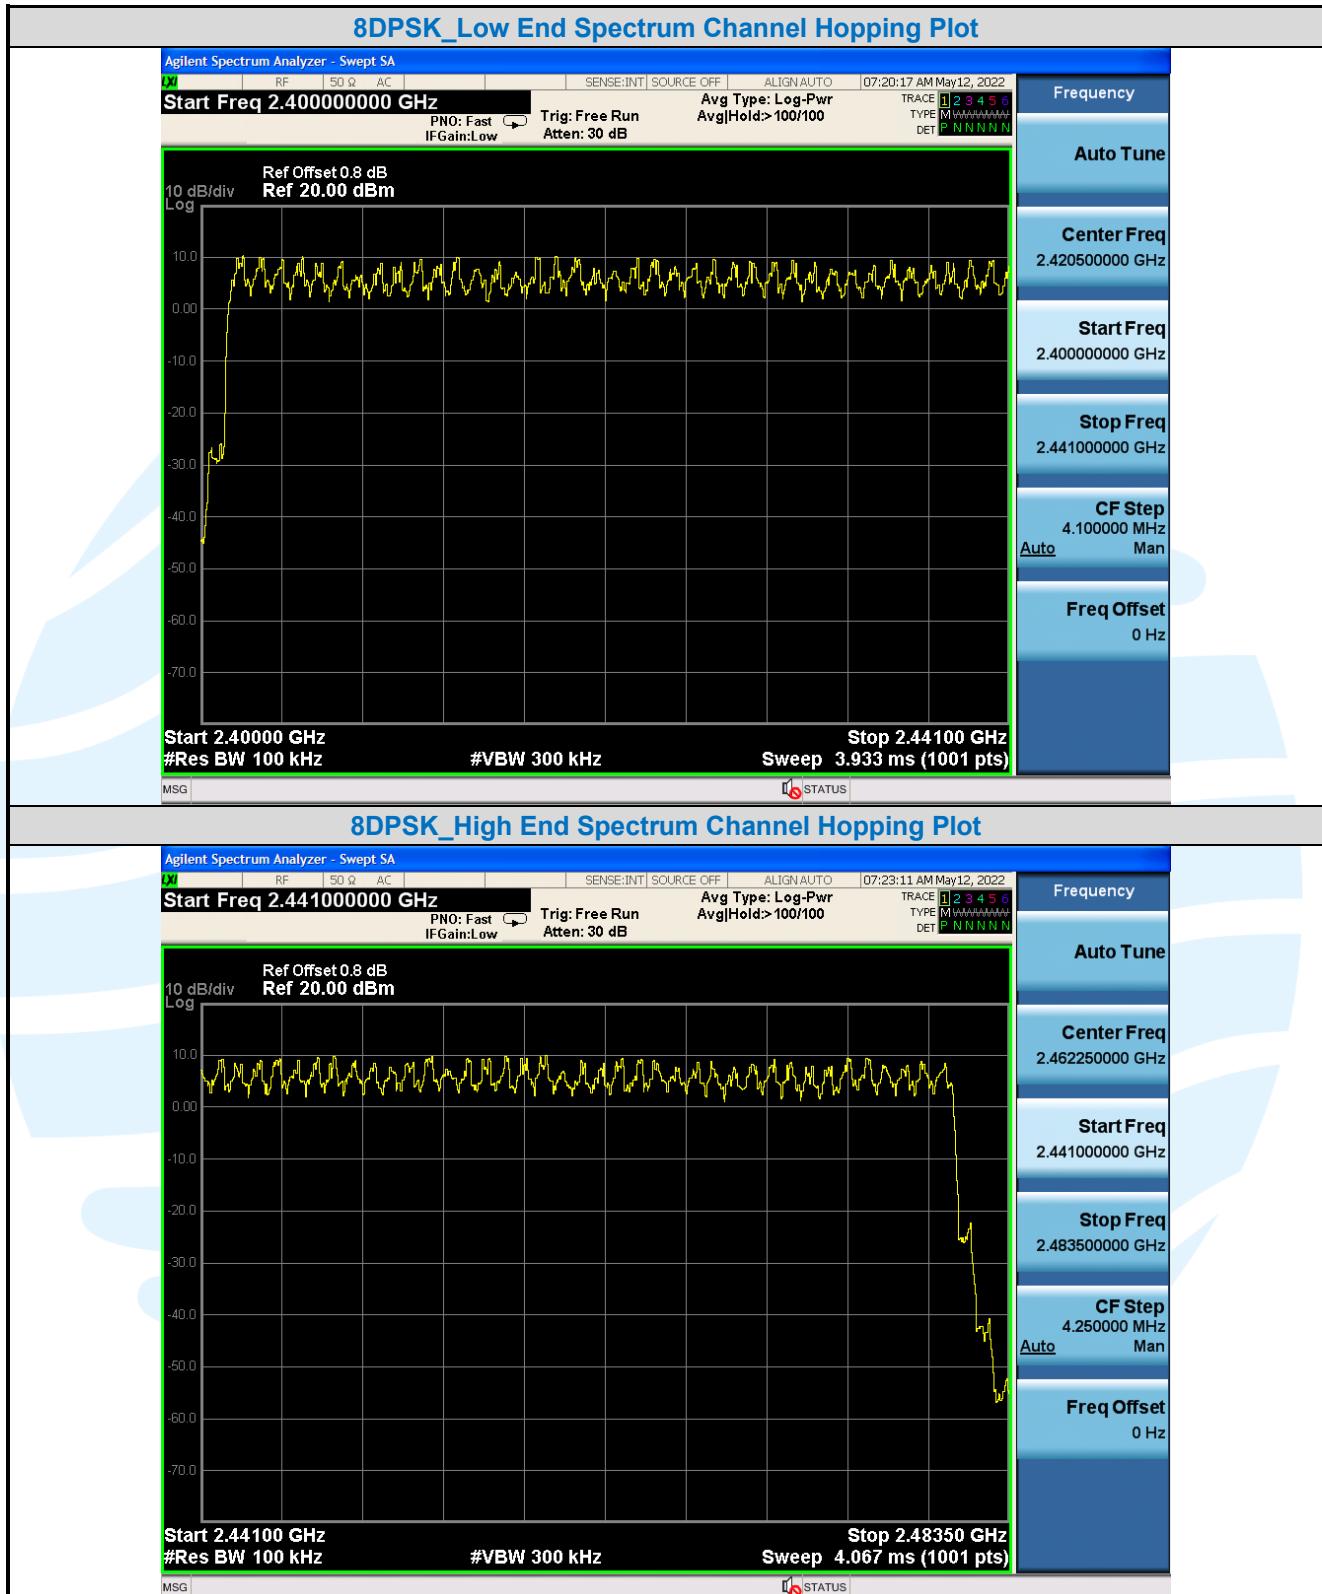

## 5.7 DWELL TIME

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.4

**Limit:** Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span = zero span, centered on a hopping channel
- b) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- c) Sweep = As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function = peak
- e) Trace = max hold
- f) Use the marker-delta function to determine the dwell time

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

Modulation	Test Frequency (MHz)	Packet	Pulse Width (ms)	Number of Pulses in 3.16 seconds	Dwell Time	Limit (ms)
GFSK	2441	1-DH1	0.368	30	110.40	< 400
		1-DH3	1.628	16	260.48	< 400
		1-DH5	2.880	13	374.40	< 400
$\pi/4$ DQPSK	2441	2-DH1	0.376	30	112.80	< 400
		2-DH3	1.632	18	293.76	< 400
		2-DH5	2.880	13	374.40	< 400
8DPSK	2441	3-DH1	0.380	32	121.60	< 400
		3-DH3	1.624	15	243.60	< 400
		3-DH5	2.888	10	288.80	< 400

The test plots as follows:

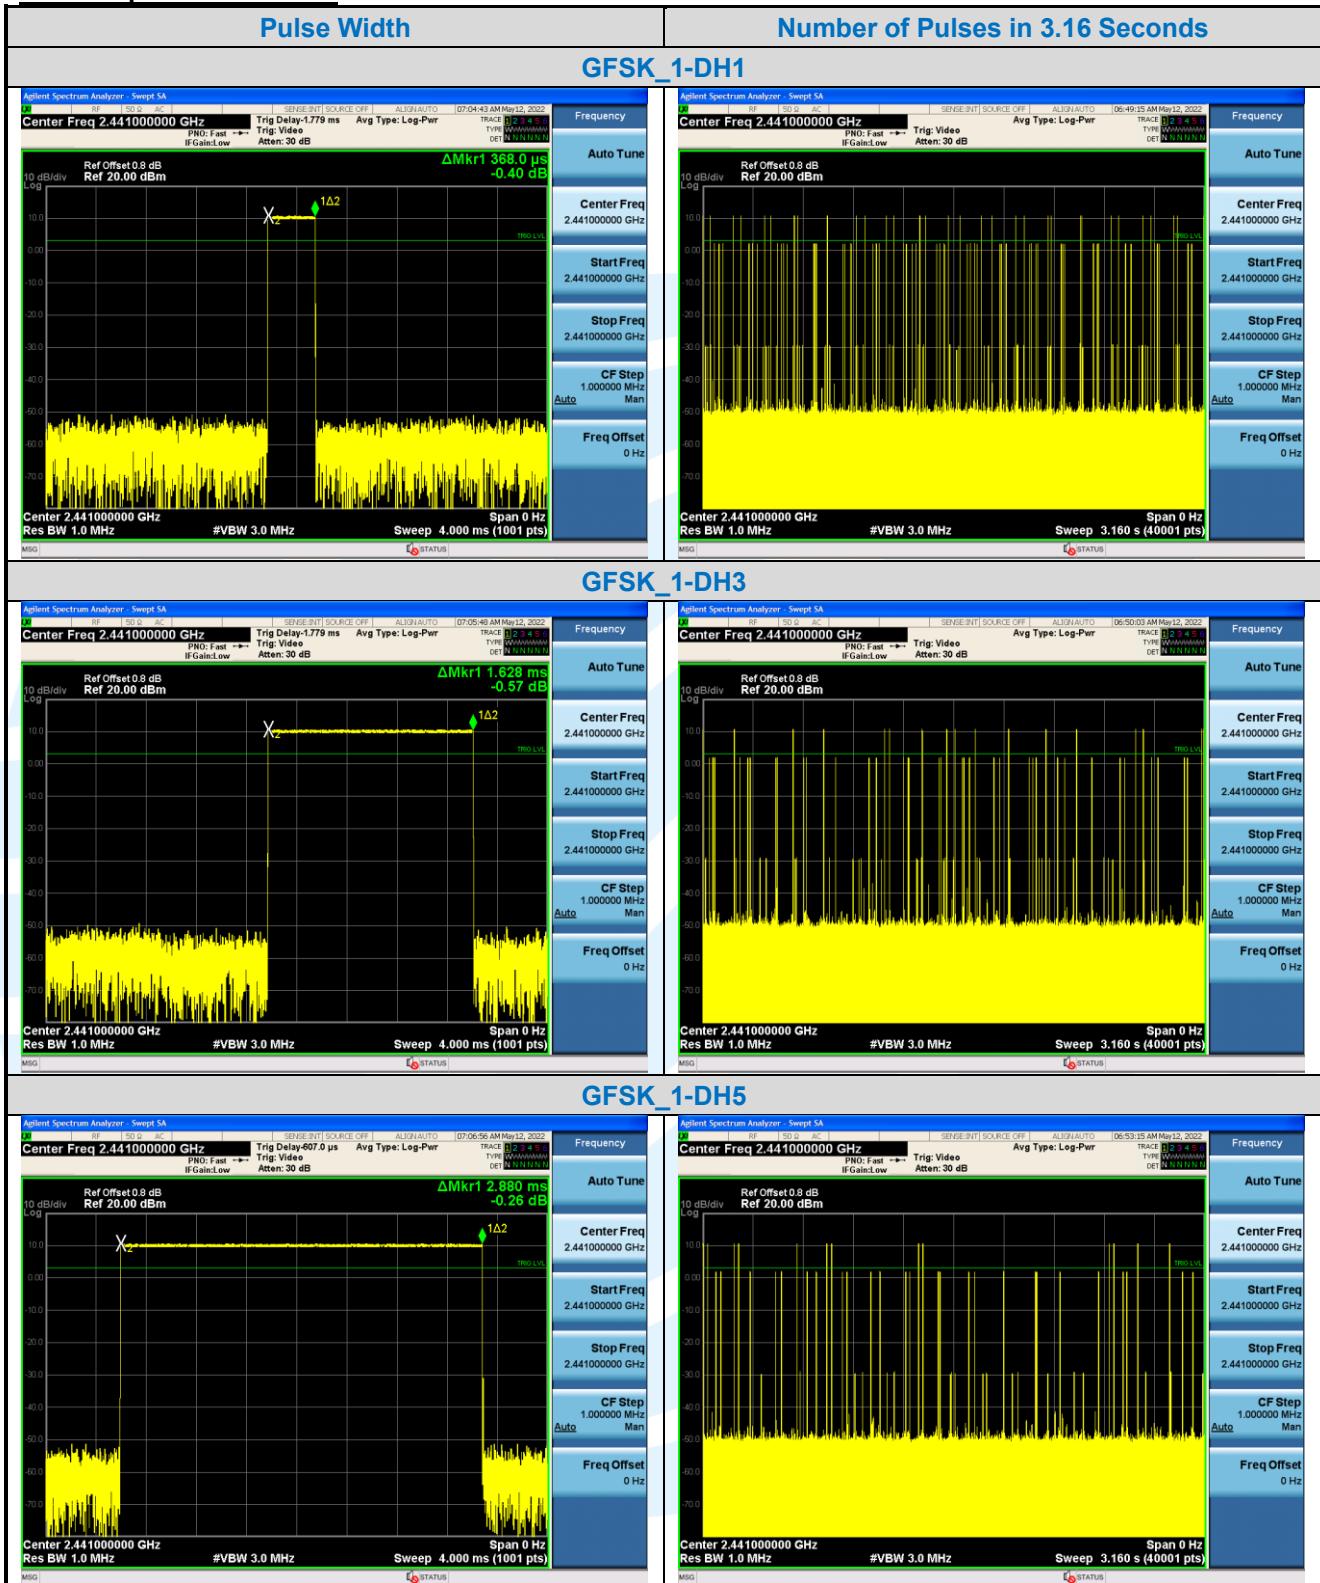

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

