



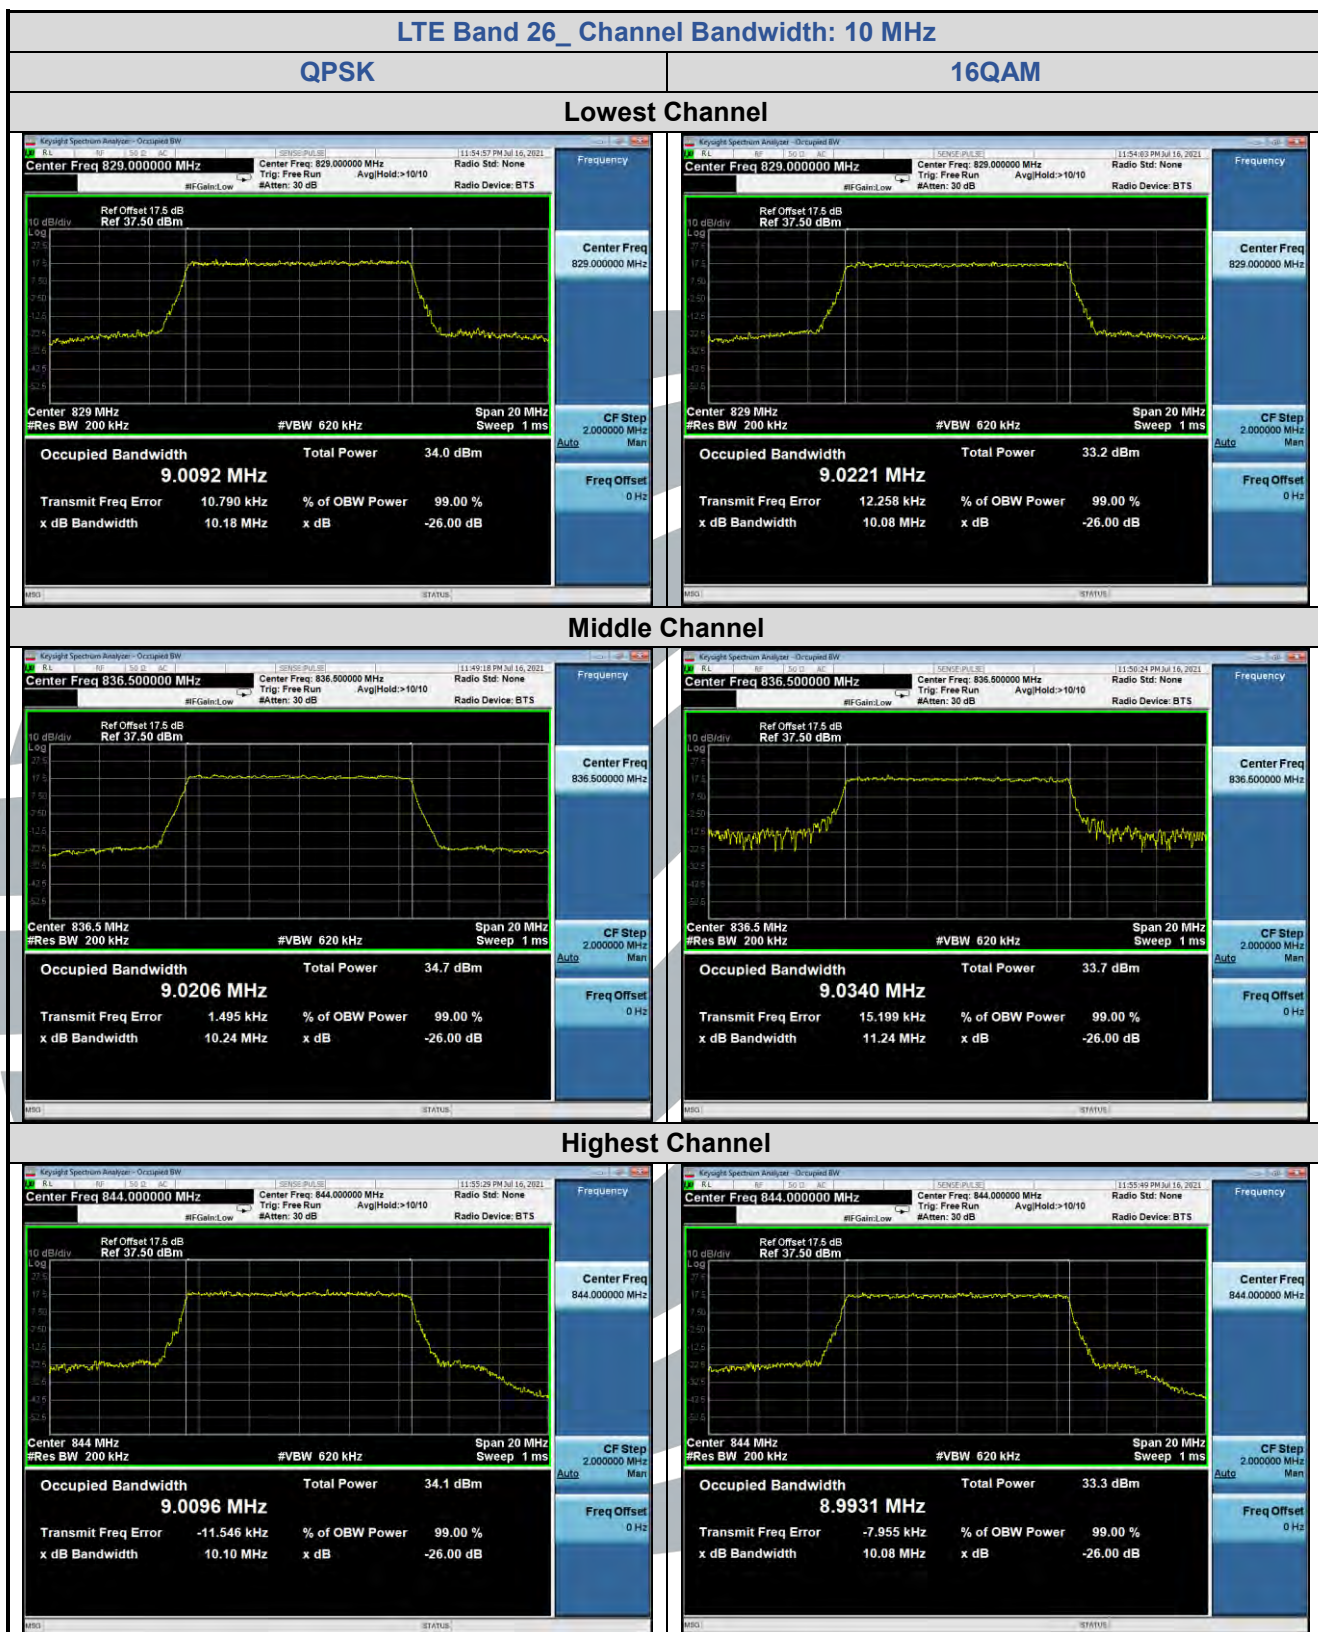

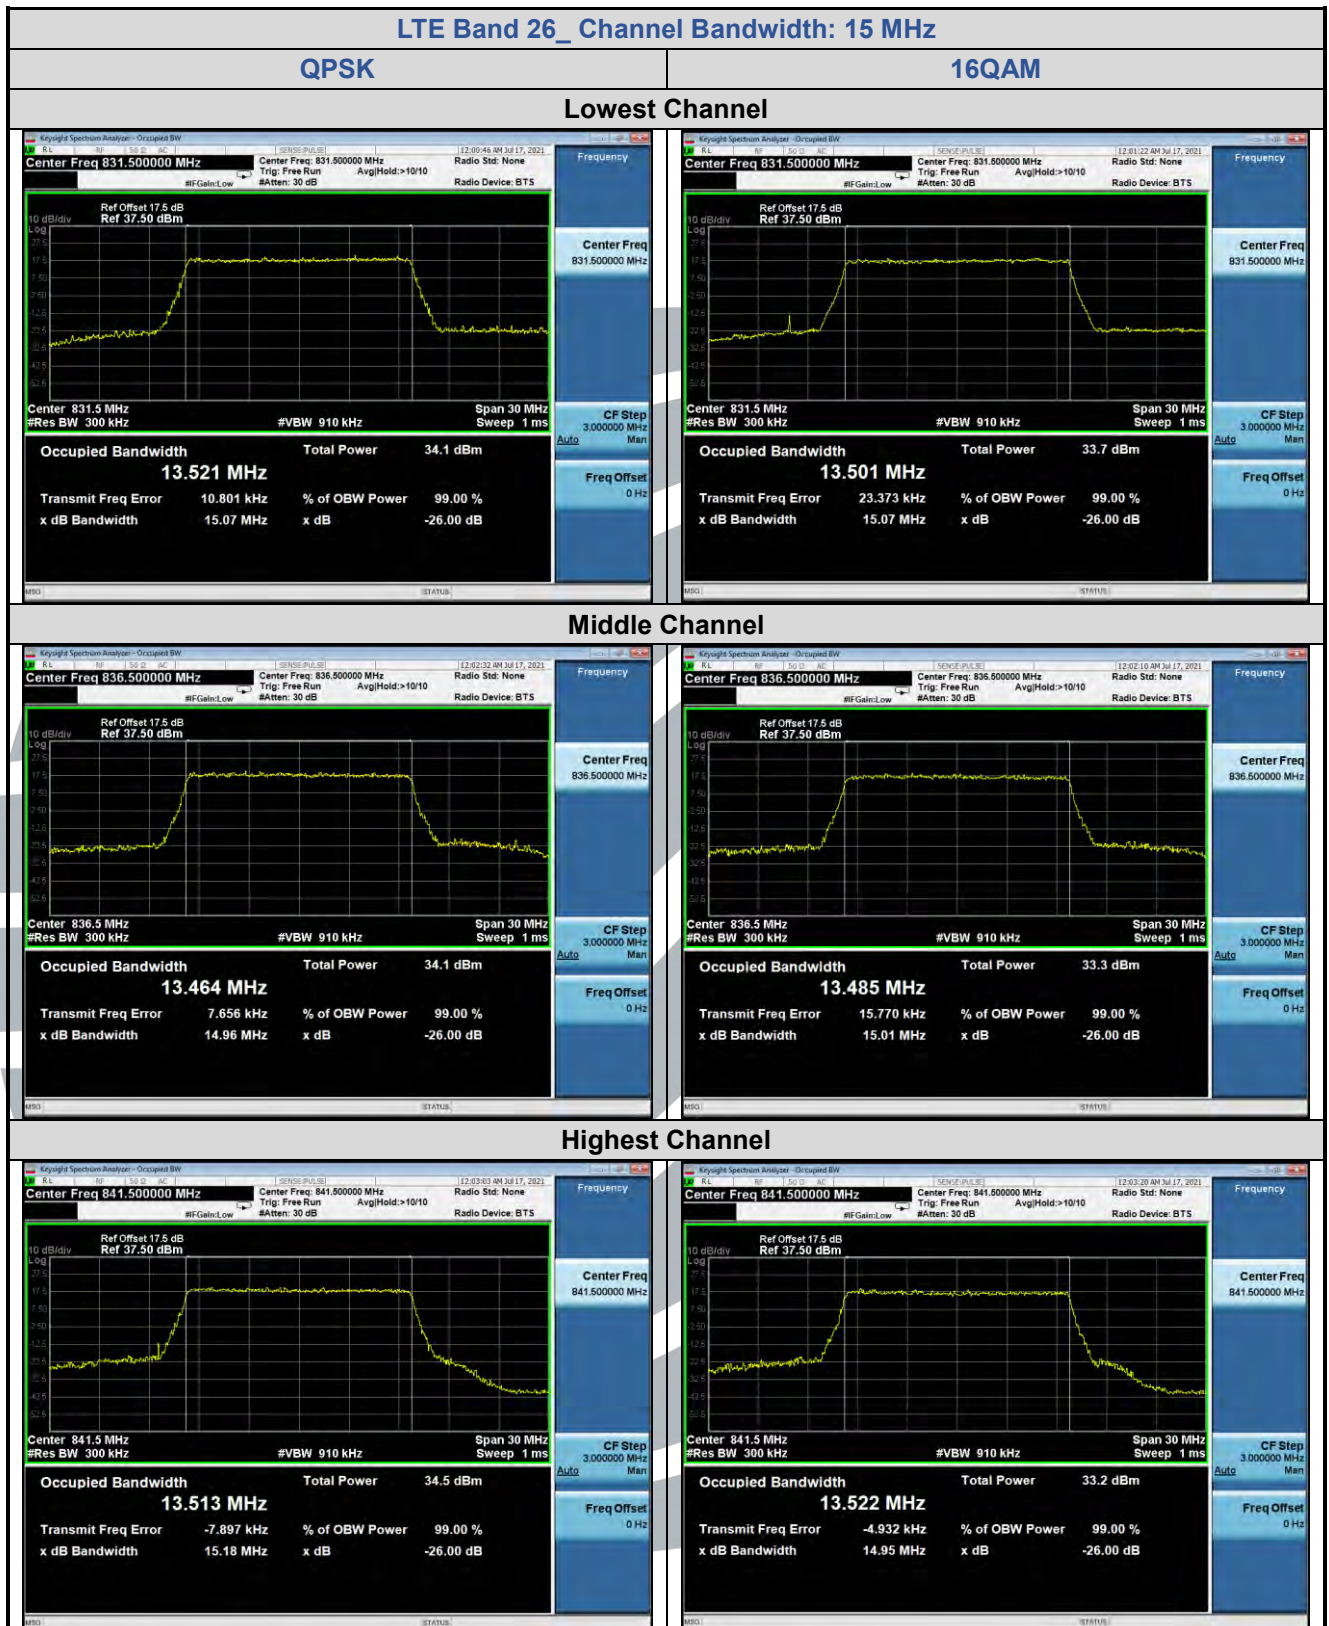

5.5.9 LTE Band 26 (Part 90S)

LTE Band 26								
Channel	RB Configuration		26 dB BW (MHz)			99% BW (MHz)		
	Size	Offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Channel Bandwidth: 1.4 MHz								
Lowest	6	0	1.285	1.280	/	1.0973	1.0965	/
Middle	6	0	1.304	1.289	/	1.1038	1.0966	/
Highest	6	0	1.278	1.322	/	1.0935	1.1006	/
Channel Bandwidth: 3 MHz								
Lowest	15	0	2.924	2.931	/	2.7028	2.6954	/
Middle	15	0	2.938	2.918	/	2.7056	2.6880	/
Highest	15	0	2.921	2.934	/	2.6946	2.6906	/
Channel Bandwidth: 5 MHz								
Lowest	25	0	5.113	5.218	/	4.5243	4.5506	/
Middle	25	0	5.165	5.185	/	4.5146	4.5435	/
Highest	25	0	5.189	5.142	/	4.5301	4.5164	/
Channel Bandwidth: 10 MHz								
Middle	50	0	9.998	10.06	/	8.9608	8.9843	/

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

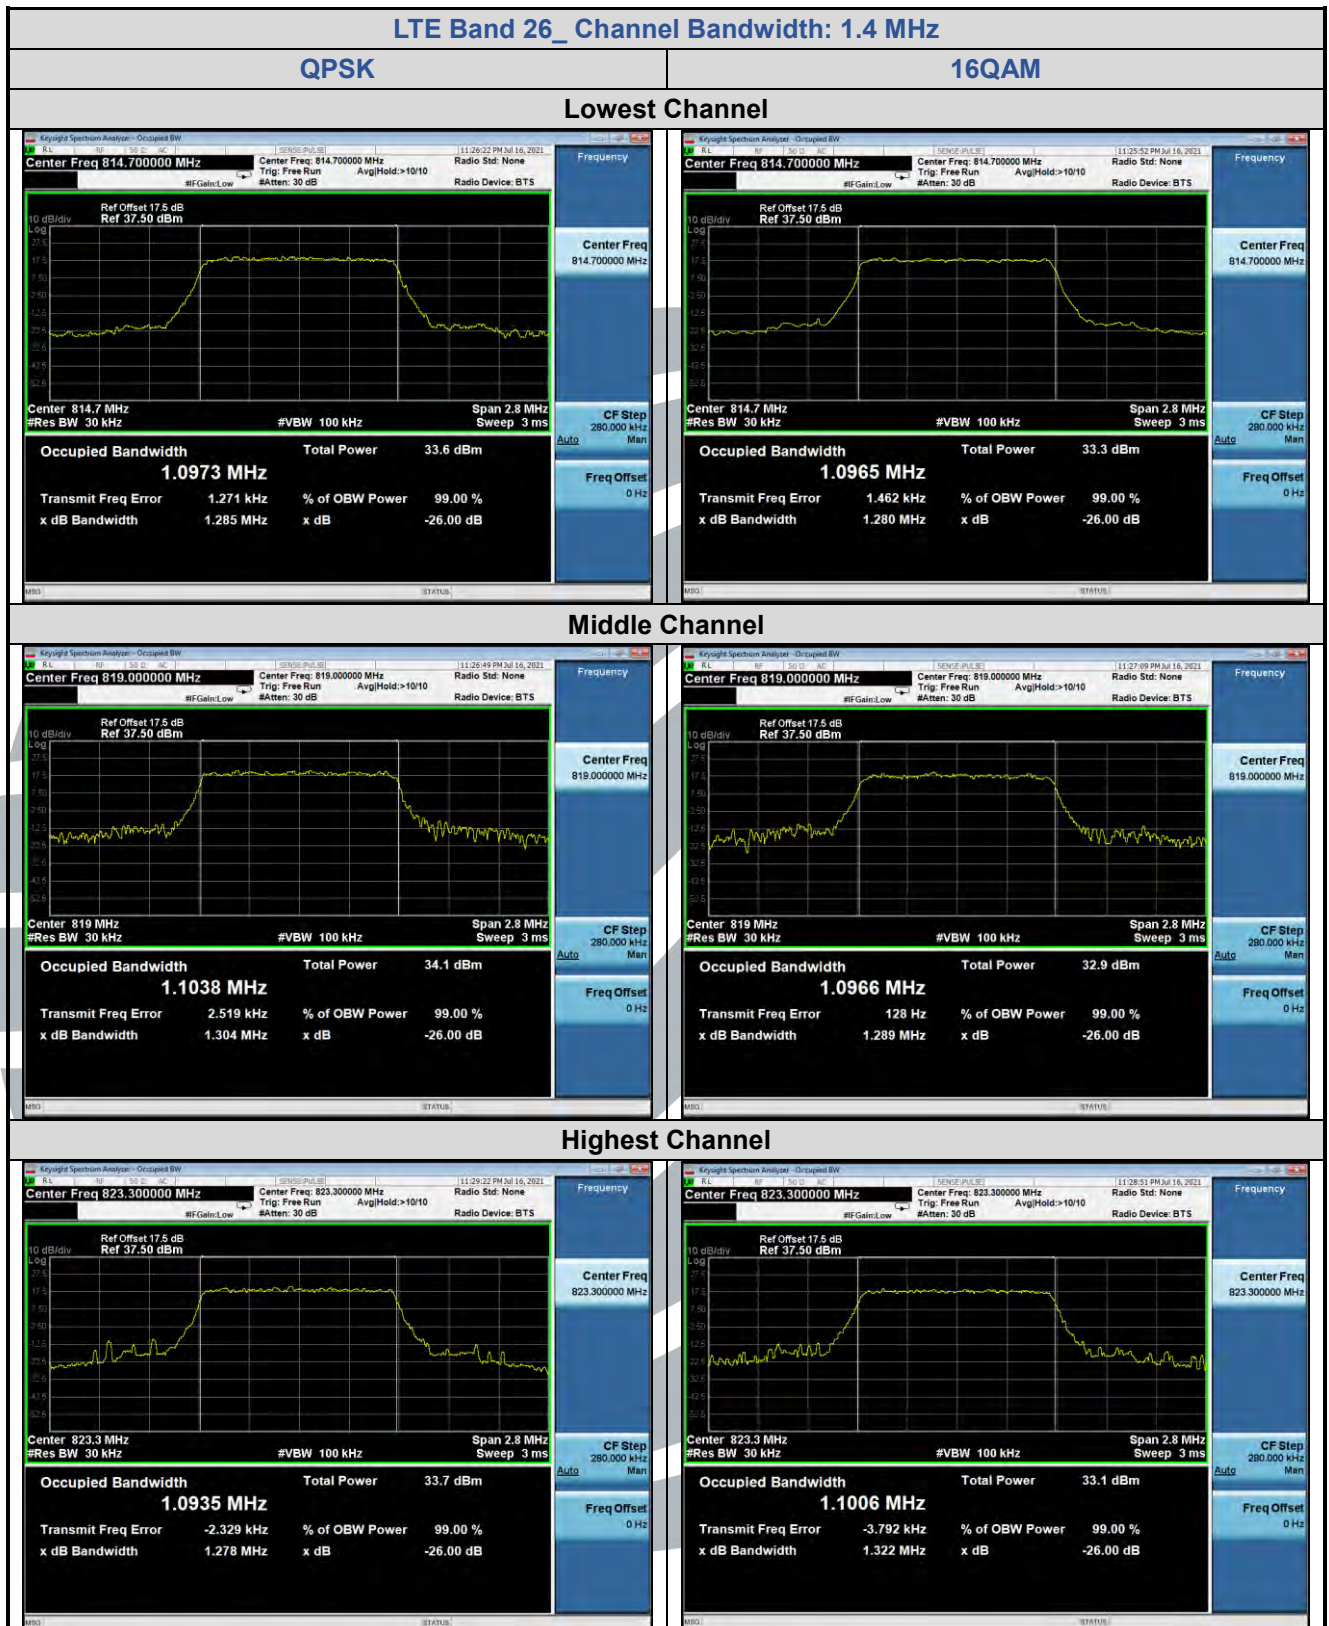

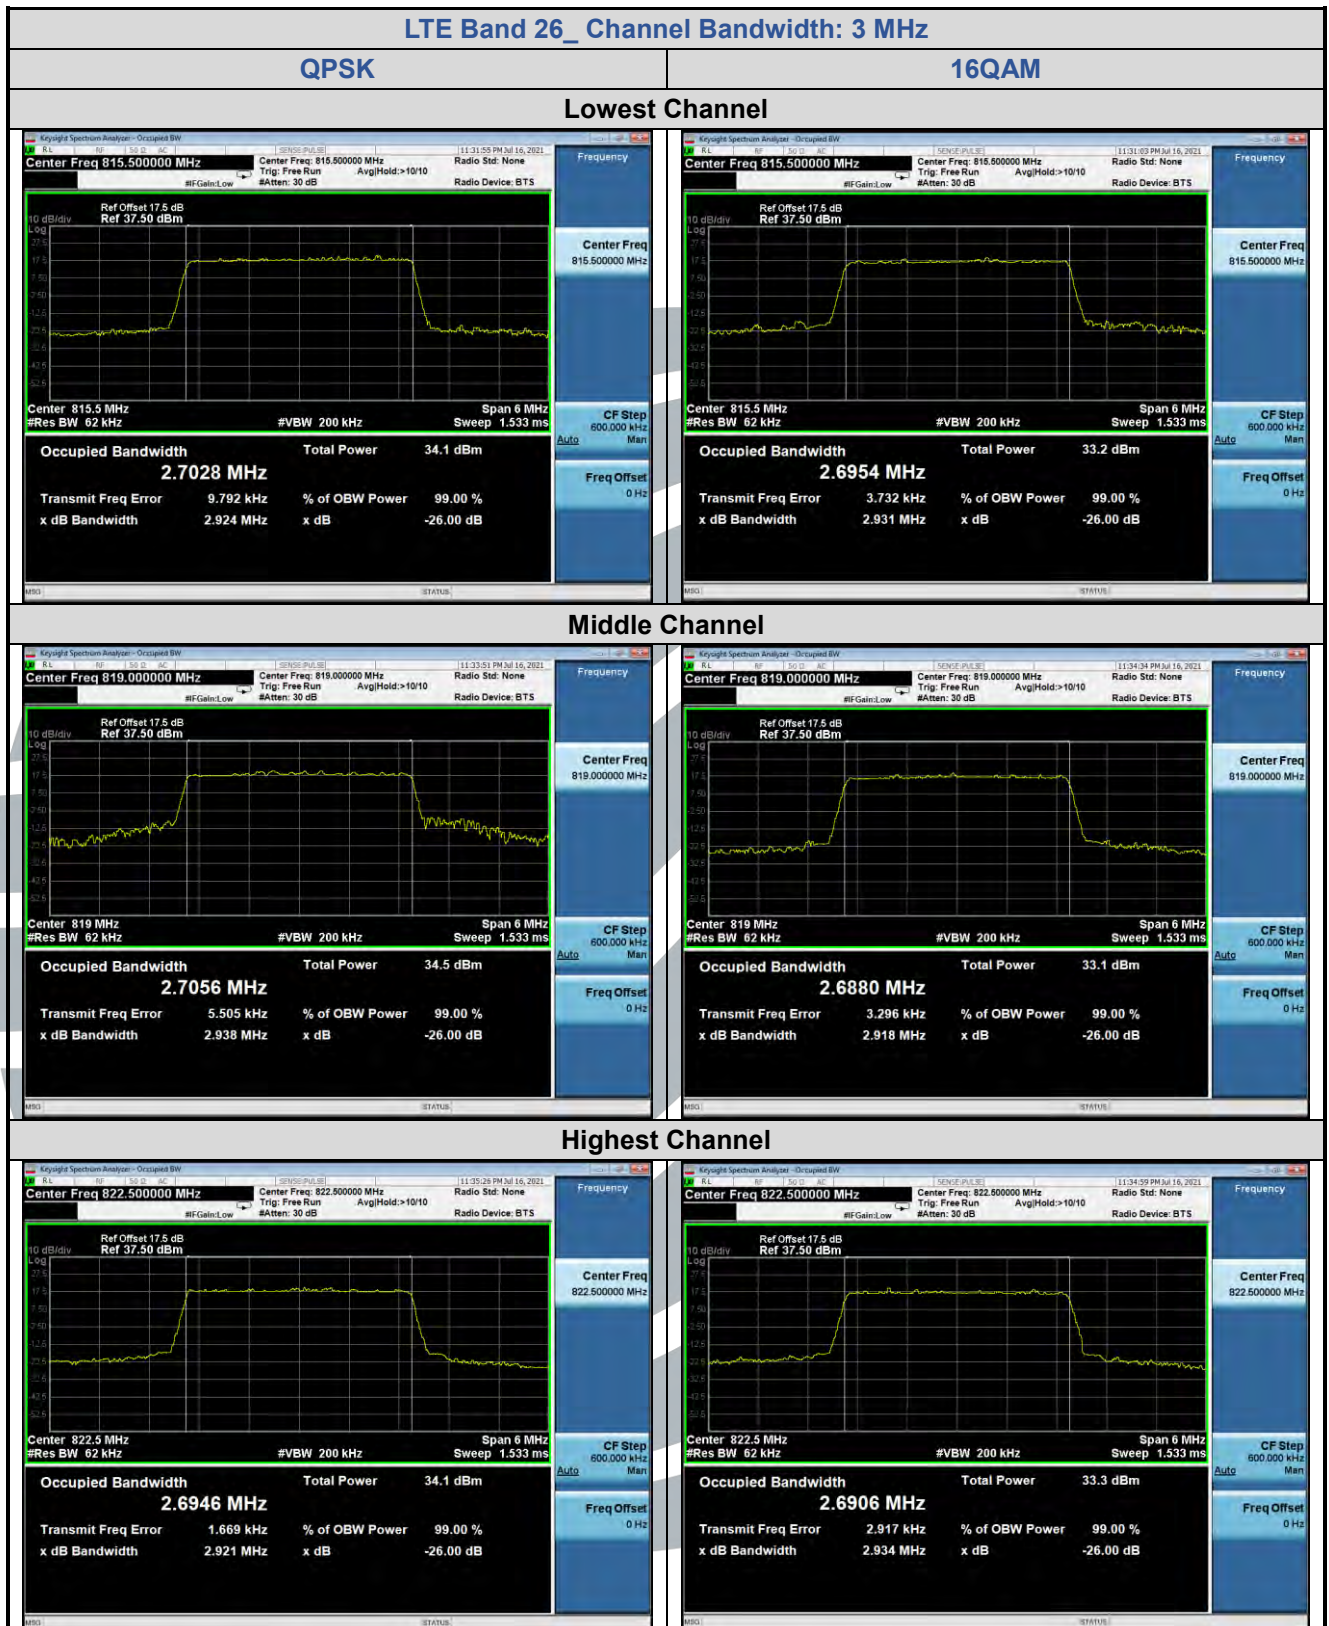

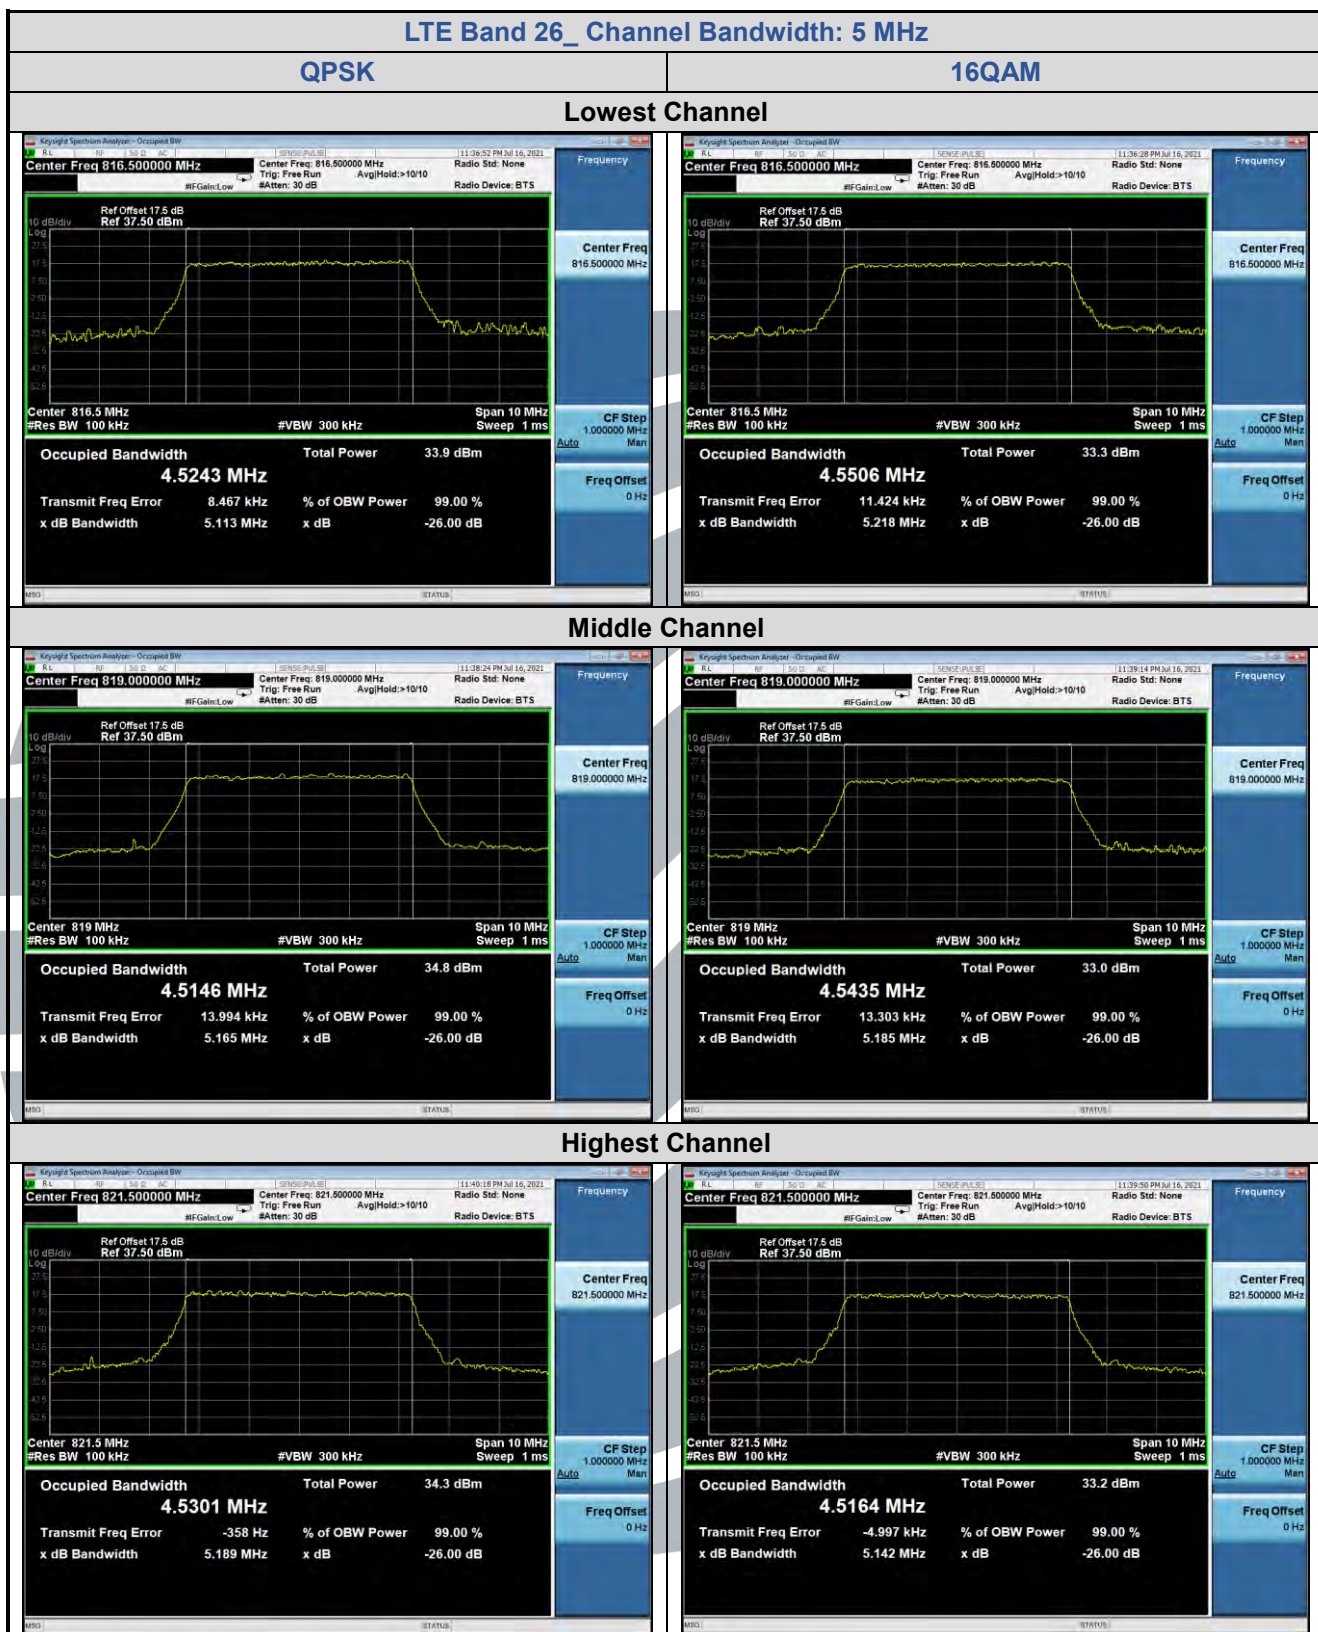

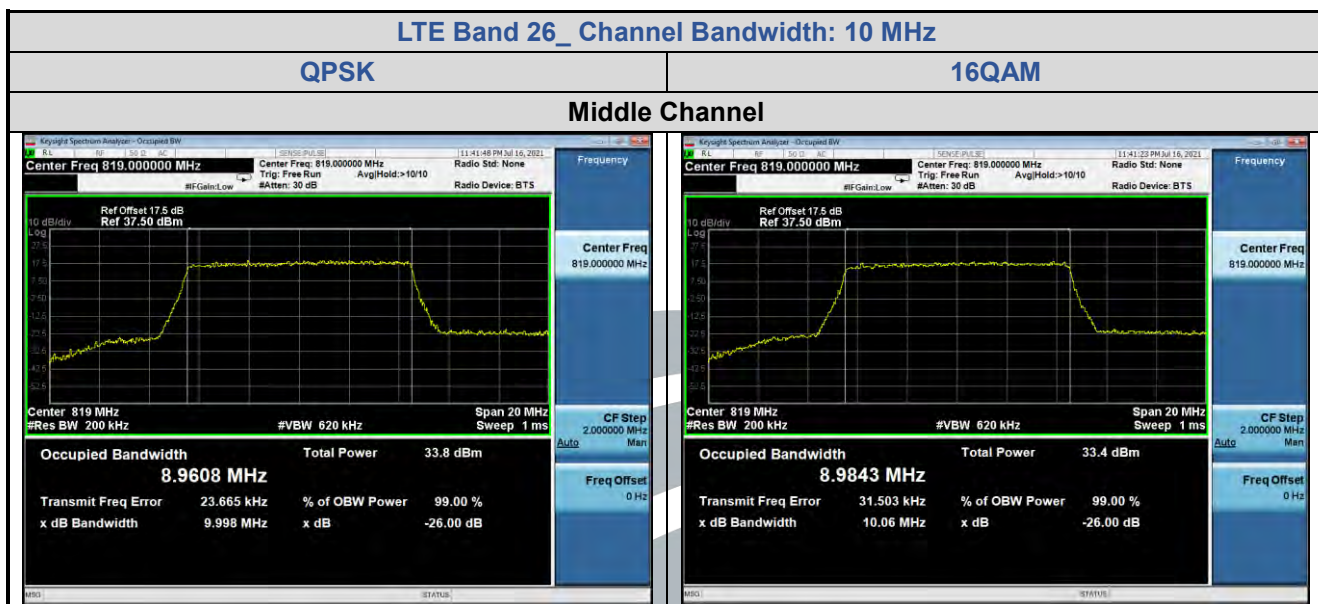

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.5.10 LTE Band 30

LTE Band 30								
Channel	RB Configuration		26 dB BW (MHz)			99% BW (MHz)		
	Size	Offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Channel Bandwidth: 5 MHz								
Lowest	25	0	4.833	4.838	/	4.4848	4.4900	/
Middle	25	0	4.765	4.915	/	4.4823	4.4882	/
Highest	25	0	4.845	4.759	/	4.4597	4.4453	/
Channel Bandwidth: 10 MHz								
Middle	50	0	9.531	9.508	/	8.9564	8.9480	/

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

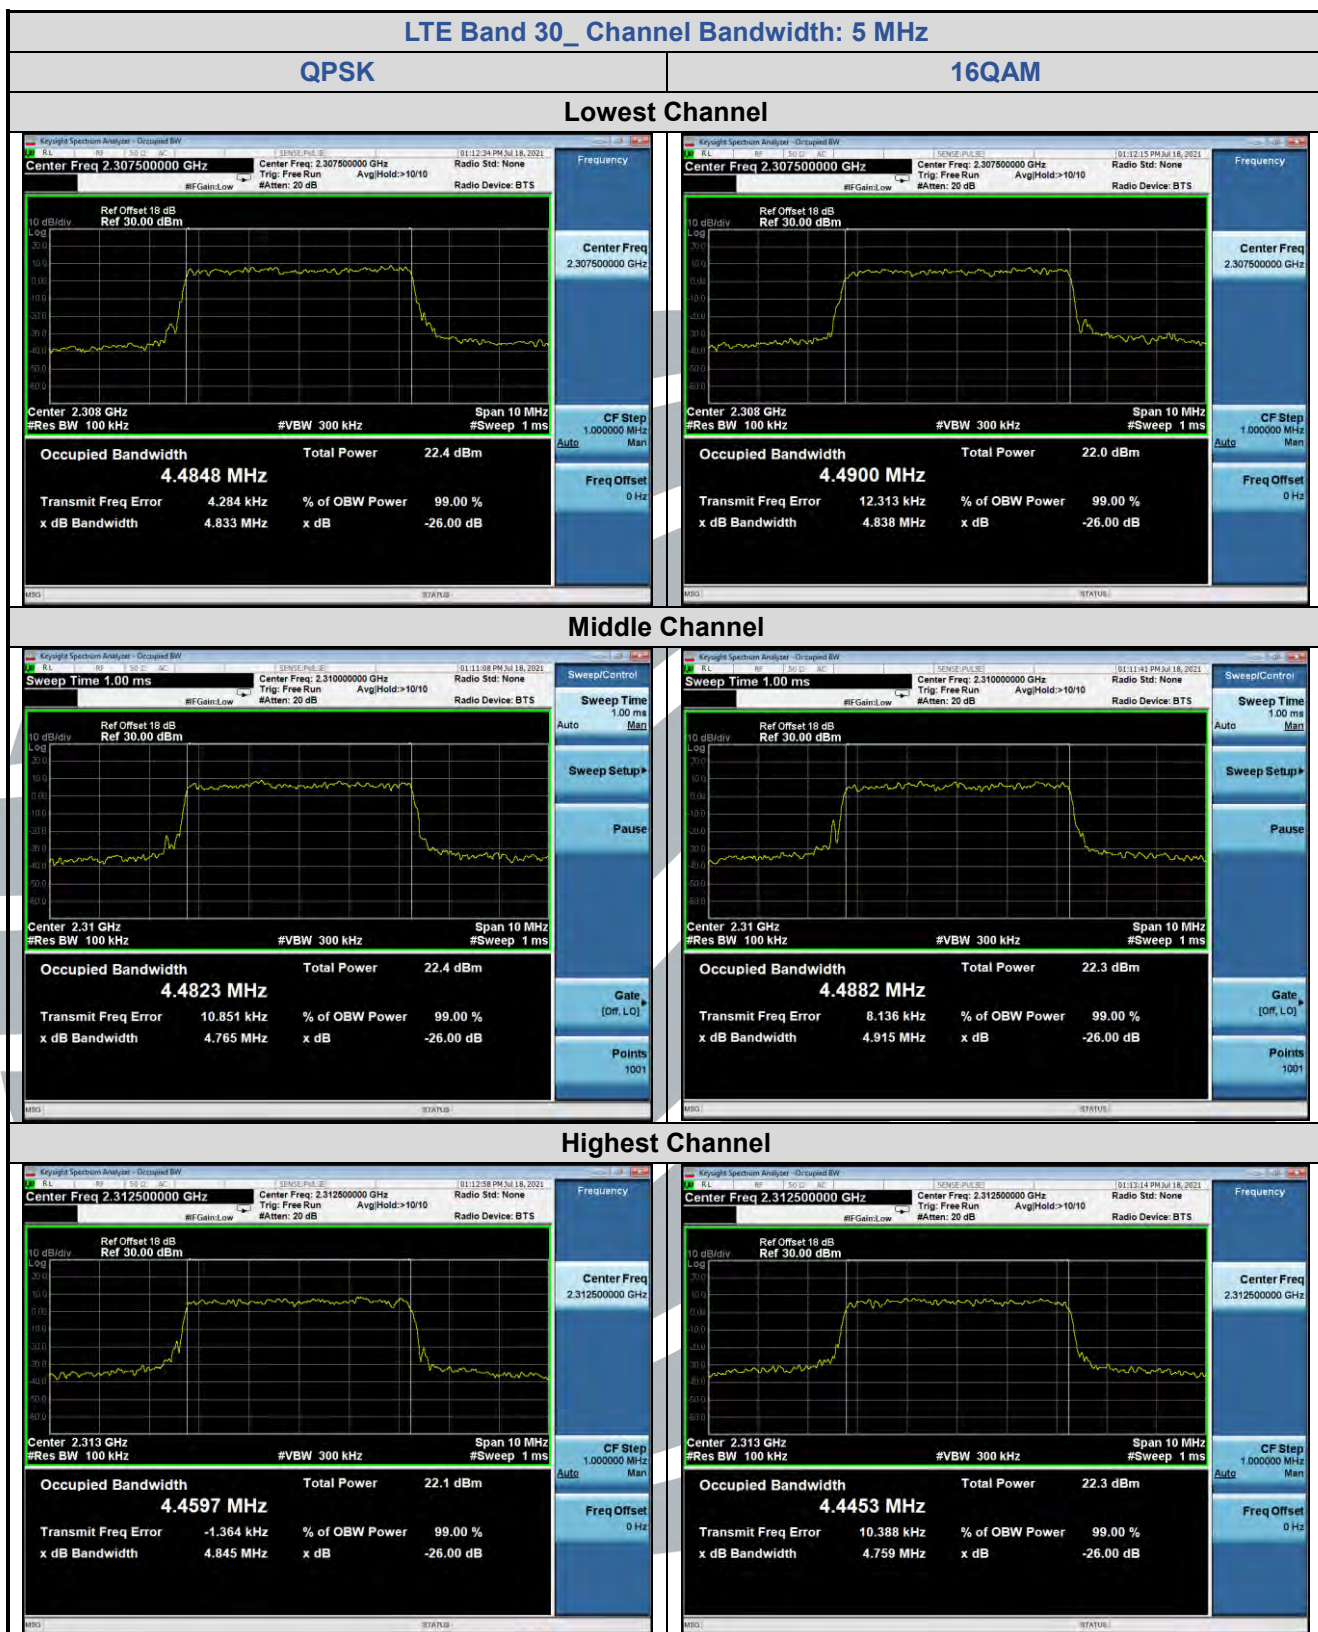

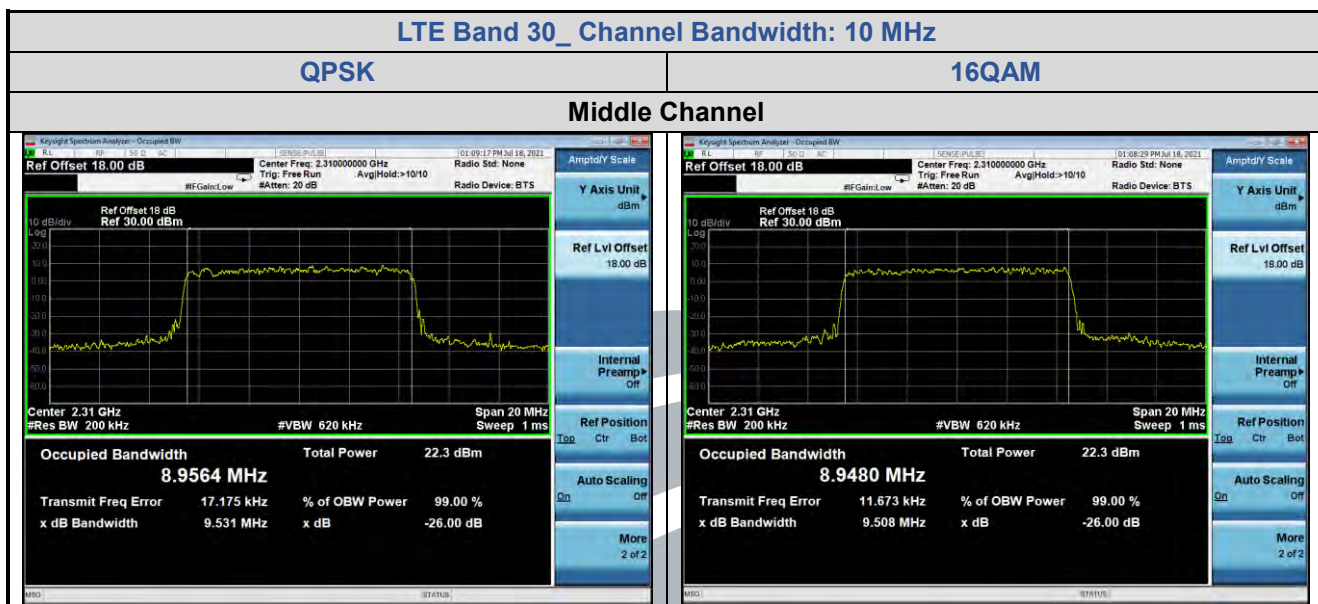

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.5.11 LTE Band 41

LTE Band 41								
Channel	RB Configuration		26 dB BW (MHz)			99% BW (MHz)		
	Size	Offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Channel Bandwidth: 5 MHz								
Lowest	25	0	5.341	5.090	/	4.5175	4.5193	/
Middle	25	0	5.116	5.377	/	4.5237	4.5317	/
Highest	25	0	5.068	5.170	/	4.5278	4.5191	/
Channel Bandwidth: 10 MHz								
Lowest	50	0	10.17	10.09	/	8.9855	8.9772	/
Middle	50	0	10.71	11.01	/	9.0367	9.0092	/
Highest	50	0	10.20	10.49	/	8.9952	8.9855	/
Channel Bandwidth: 15 MHz								
Lowest	75	0	15.21	16.06	/	13.466	13.567	/
Middle	75	0	15.41	15.23	/	13.523	13.523	/
Highest	75	0	14.96	15.12	/	13.474	13.526	/
Channel Bandwidth: 20 MHz								
Lowest	100	0	20.20	21.23	/	17.972	18.015	/
Middle	100	0	19.93	19.83	/	17.937	17.965	/
Highest	100	0	19.86	19.63	/	17.976	17.981	/

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1



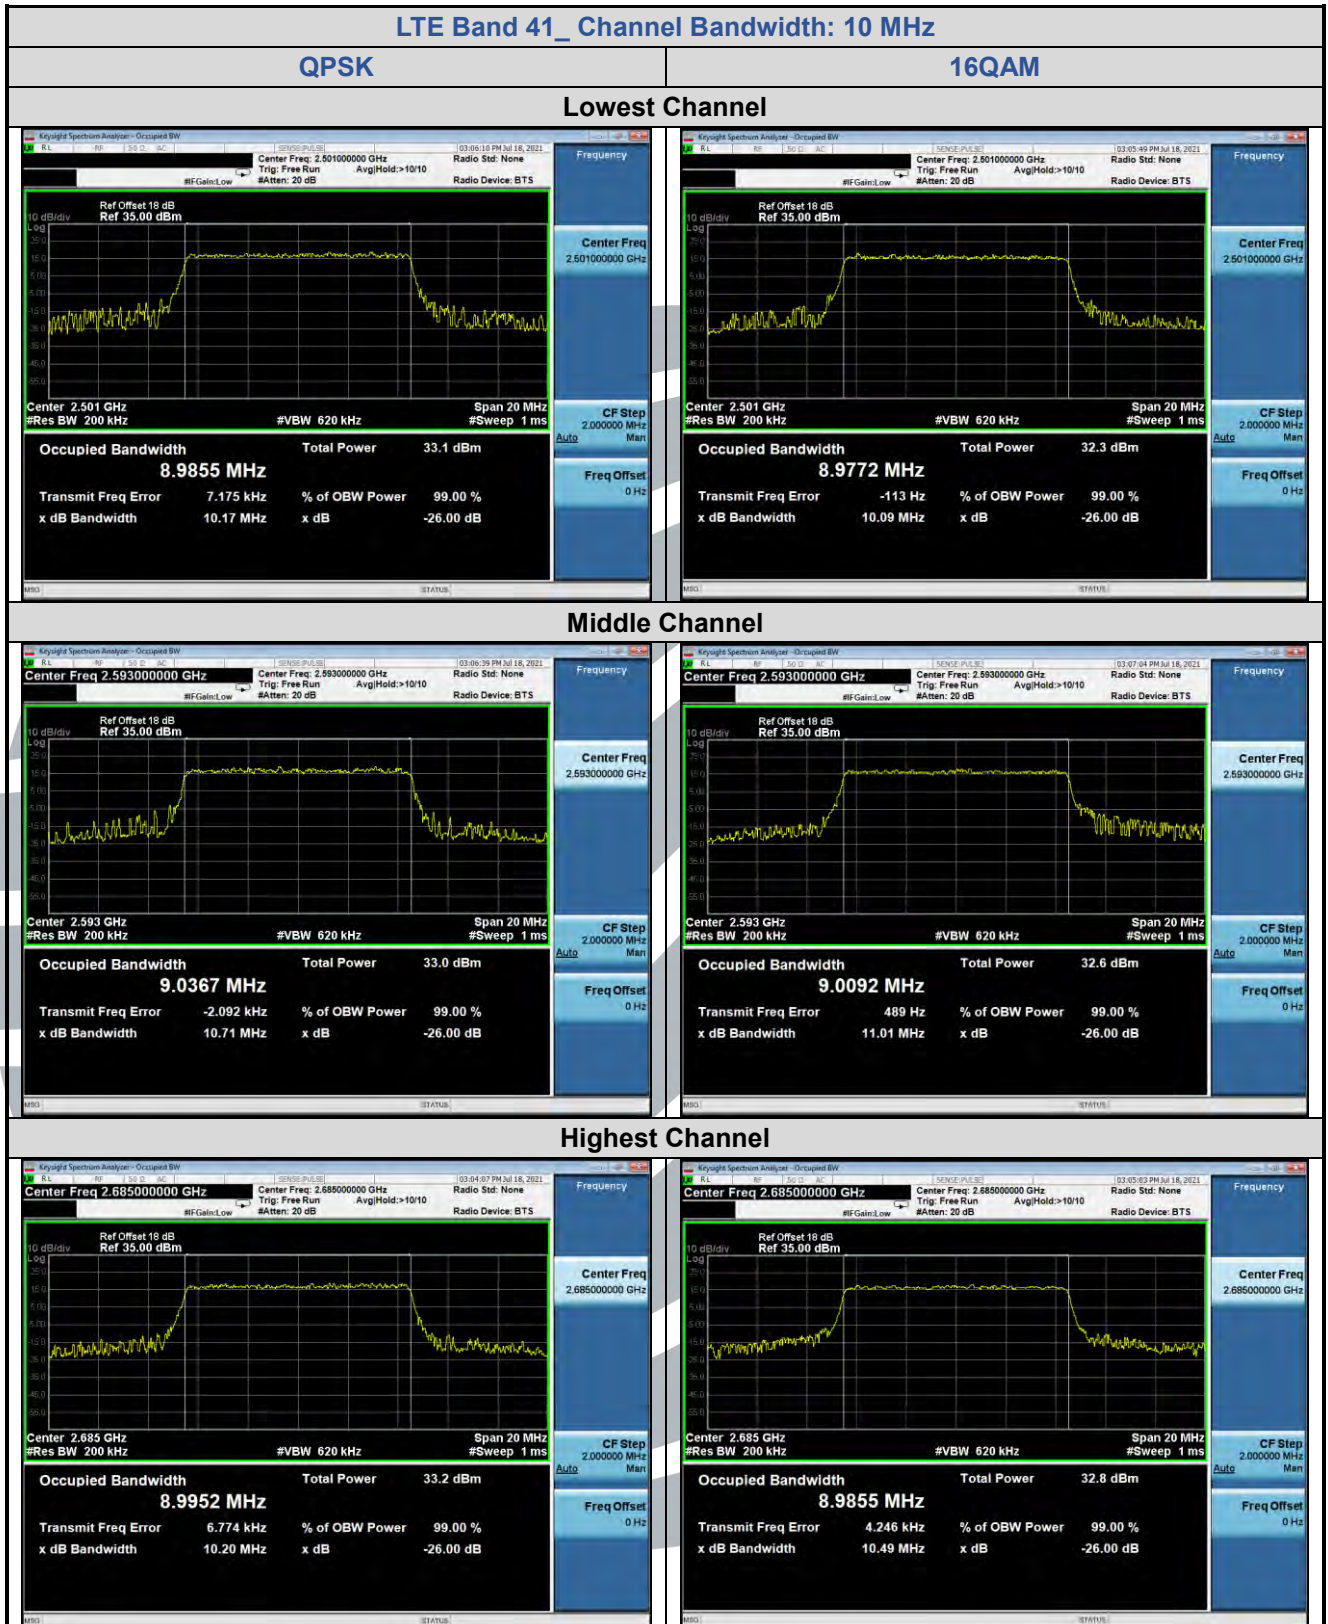


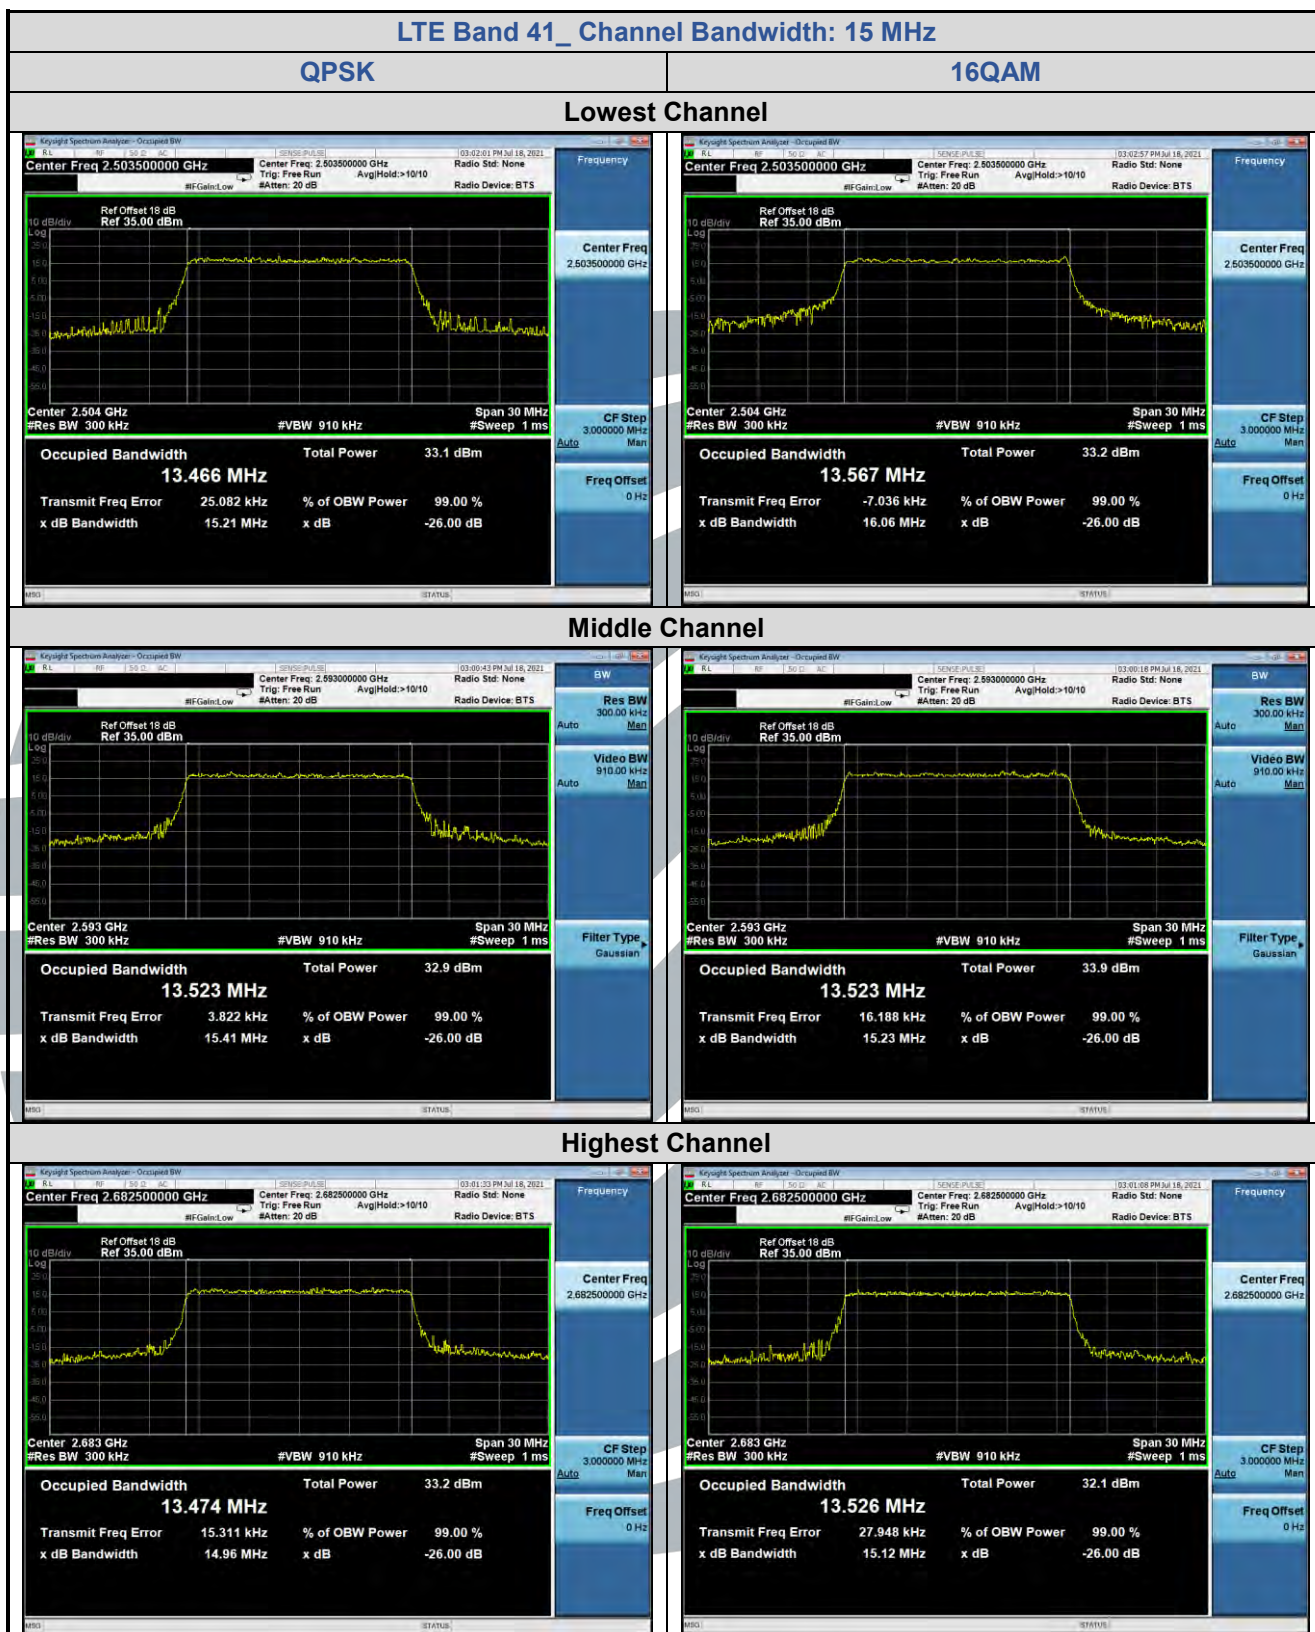


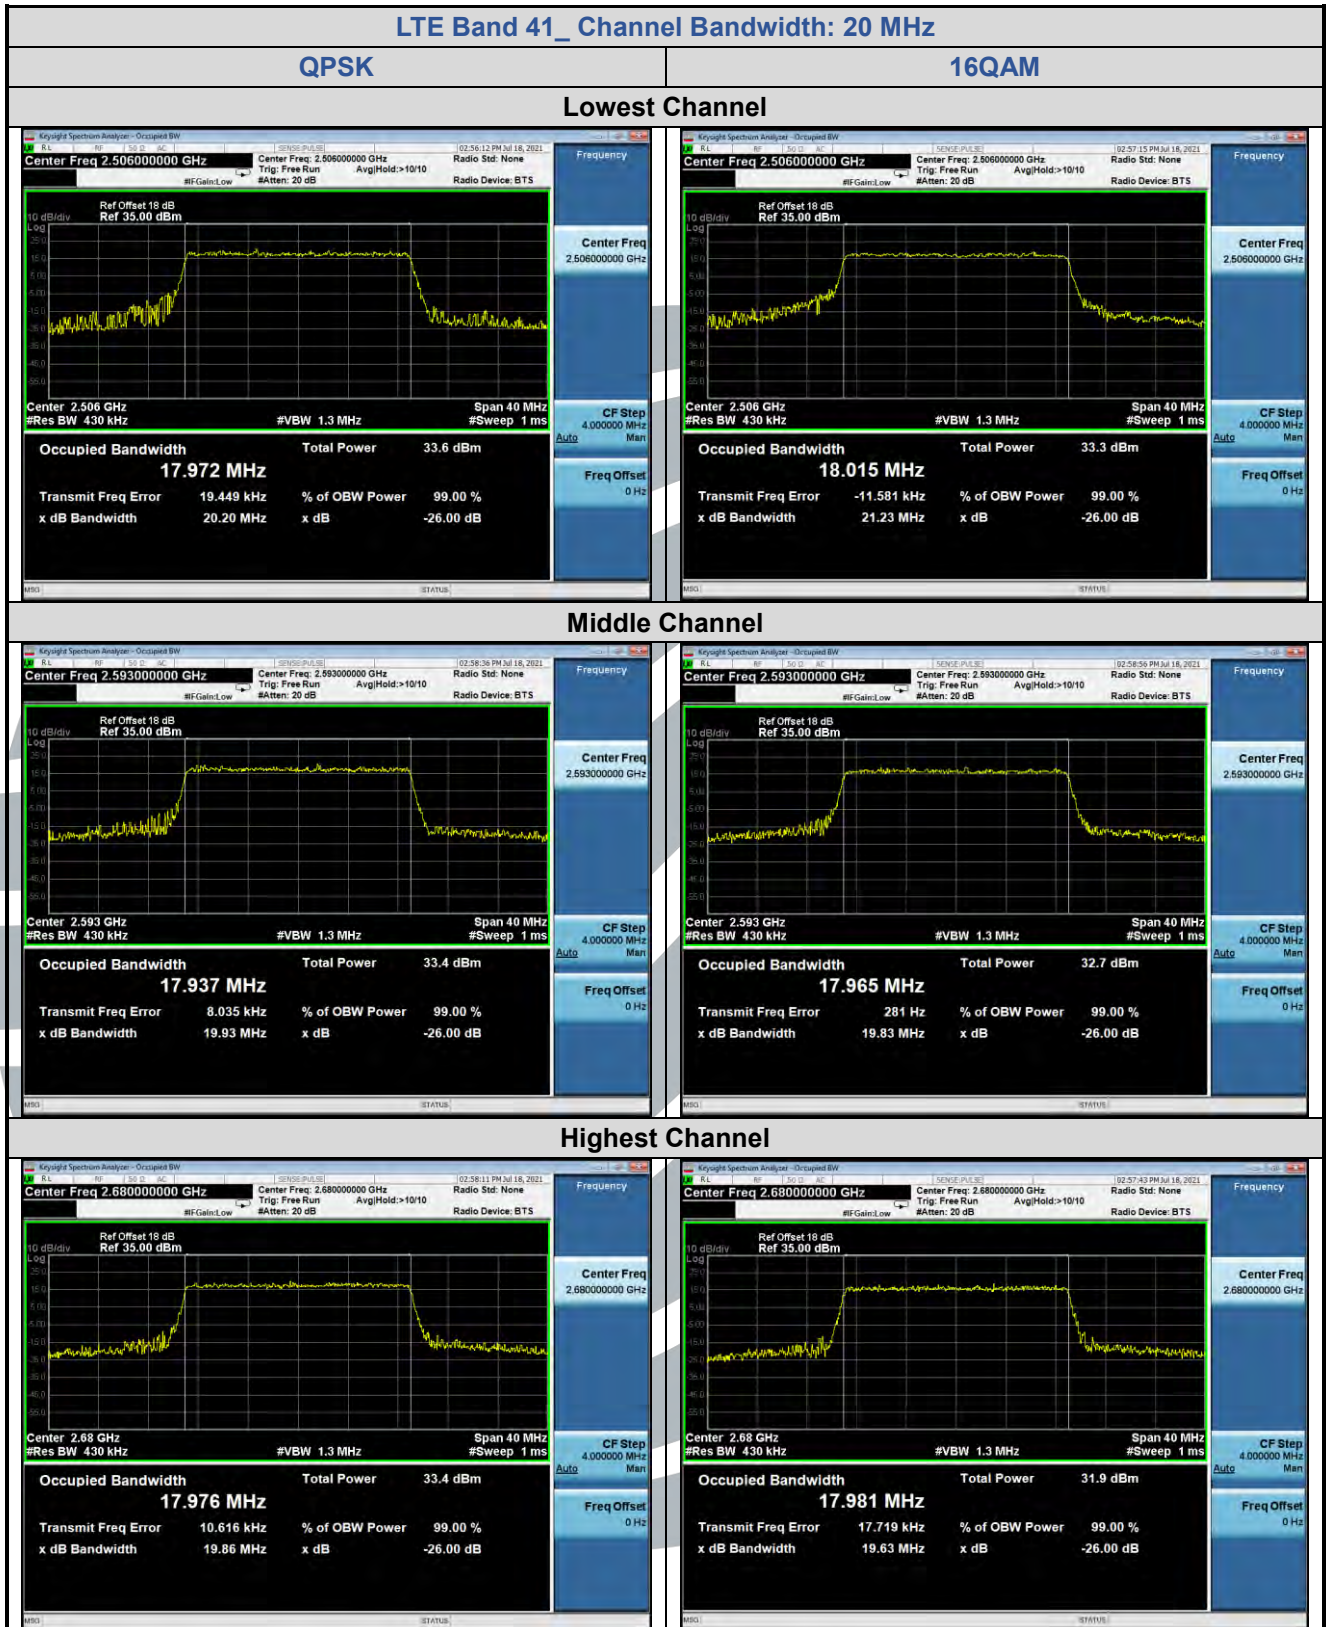

5.5.12 LTE Band 66


LTE Band 66								
Channel	RB Configuration		26 dB BW (MHz)			99% BW (MHz)		
	Size	Offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Channel Bandwidth: 1.4 MHz								
Lowest	6	0	1.302	1.274	/	1.1004	1.0924	/
Middle	6	0	1.285	1.300	/	1.0911	1.1001	/
Highest	6	0	1.282	1.294	/	1.1057	1.0983	/
Channel Bandwidth: 3 MHz								
Lowest	15	0	2.934	2.933	/	2.7036	2.6958	/
Middle	15	0	2.916	2.912	/	2.6935	2.6904	/
Highest	15	0	2.937	2.908	/	2.7007	2.6878	/
Channel Bandwidth: 5 MHz								
Lowest	25	0	5.087	5.229	/	4.5191	4.5440	/
Middle	25	0	5.122	5.154	/	4.5275	4.5134	/
Highest	25	0	5.205	5.180	/	4.5318	4.5370	/
Channel Bandwidth: 10 MHz								
Lowest	50	0	10.19	10.17	/	9.0240	8.9988	/
Middle	50	0	10.14	10.09	/	8.9920	9.0131	/
Highest	50	0	10.45	10.02	/	9.0081	9.0079	/
Channel Bandwidth: 15 MHz								
Lowest	75	0	16.07	15.00	/	13.554	13.475	/
Middle	75	0	15.08	15.09	/	13.507	13.519	/
Highest	75	0	16.12	15.26	/	13.511	13.510	/
Channel Bandwidth: 20 MHz								
Lowest	100	0	19.75	19.80	/	18.041	17.989	/
Middle	100	0	19.63	19.88	/	18.005	18.072	/
Highest	100	0	20.24	19.83	/	18.013	17.982	/

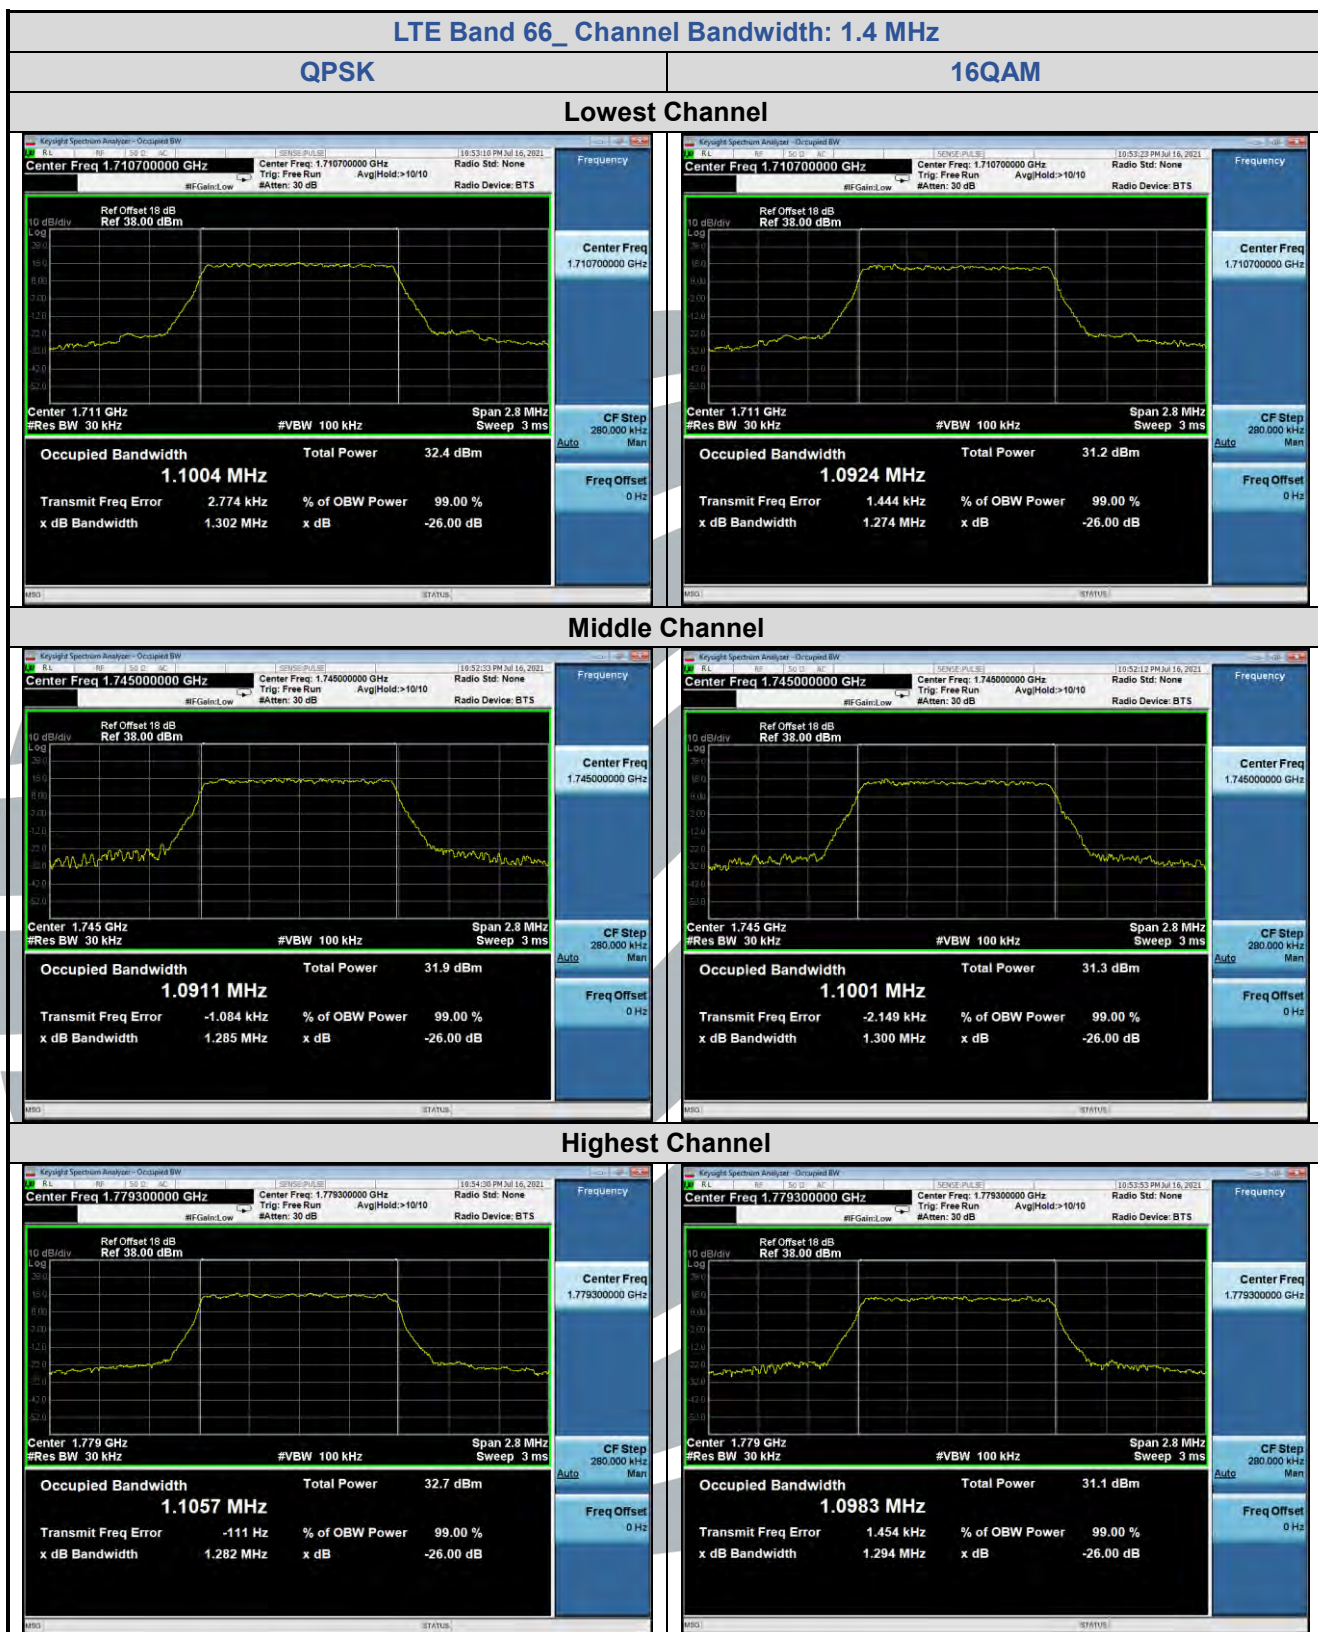


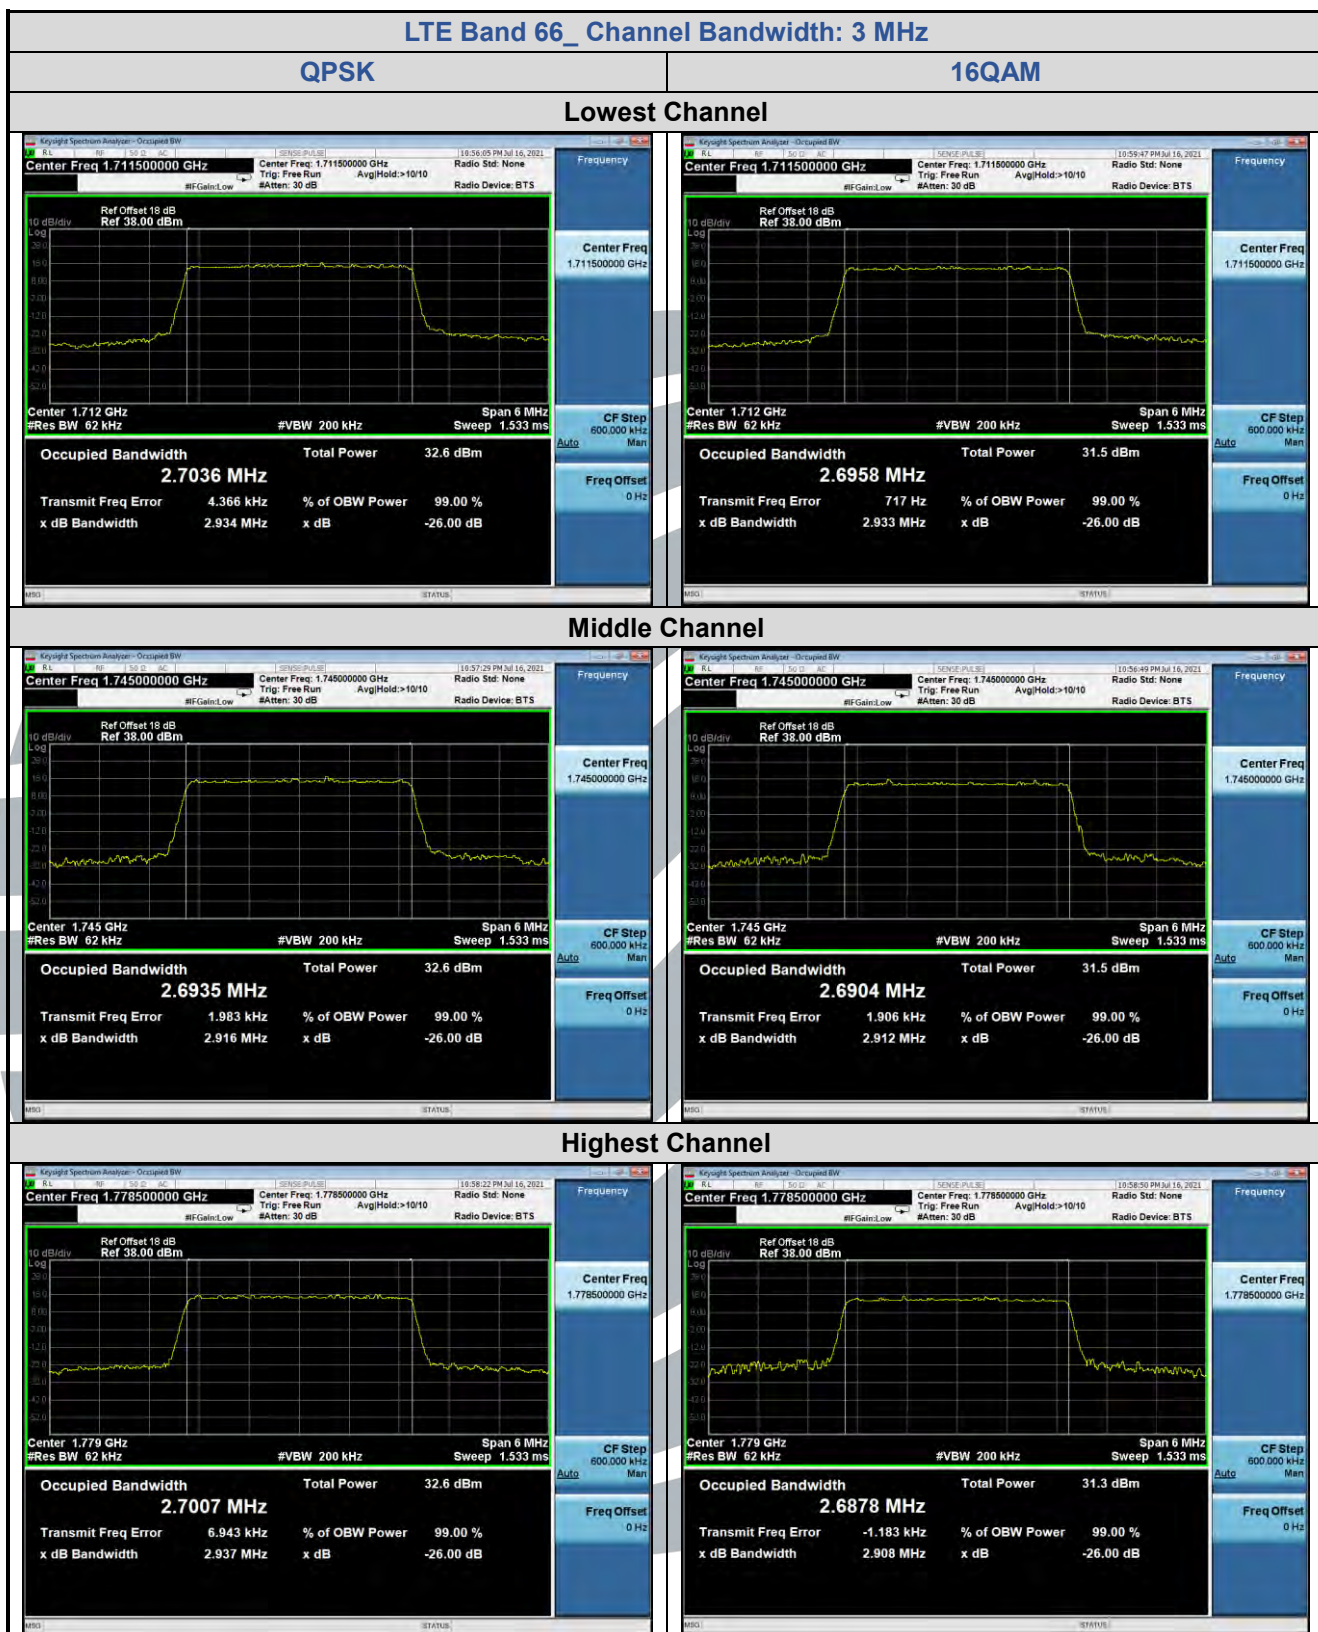





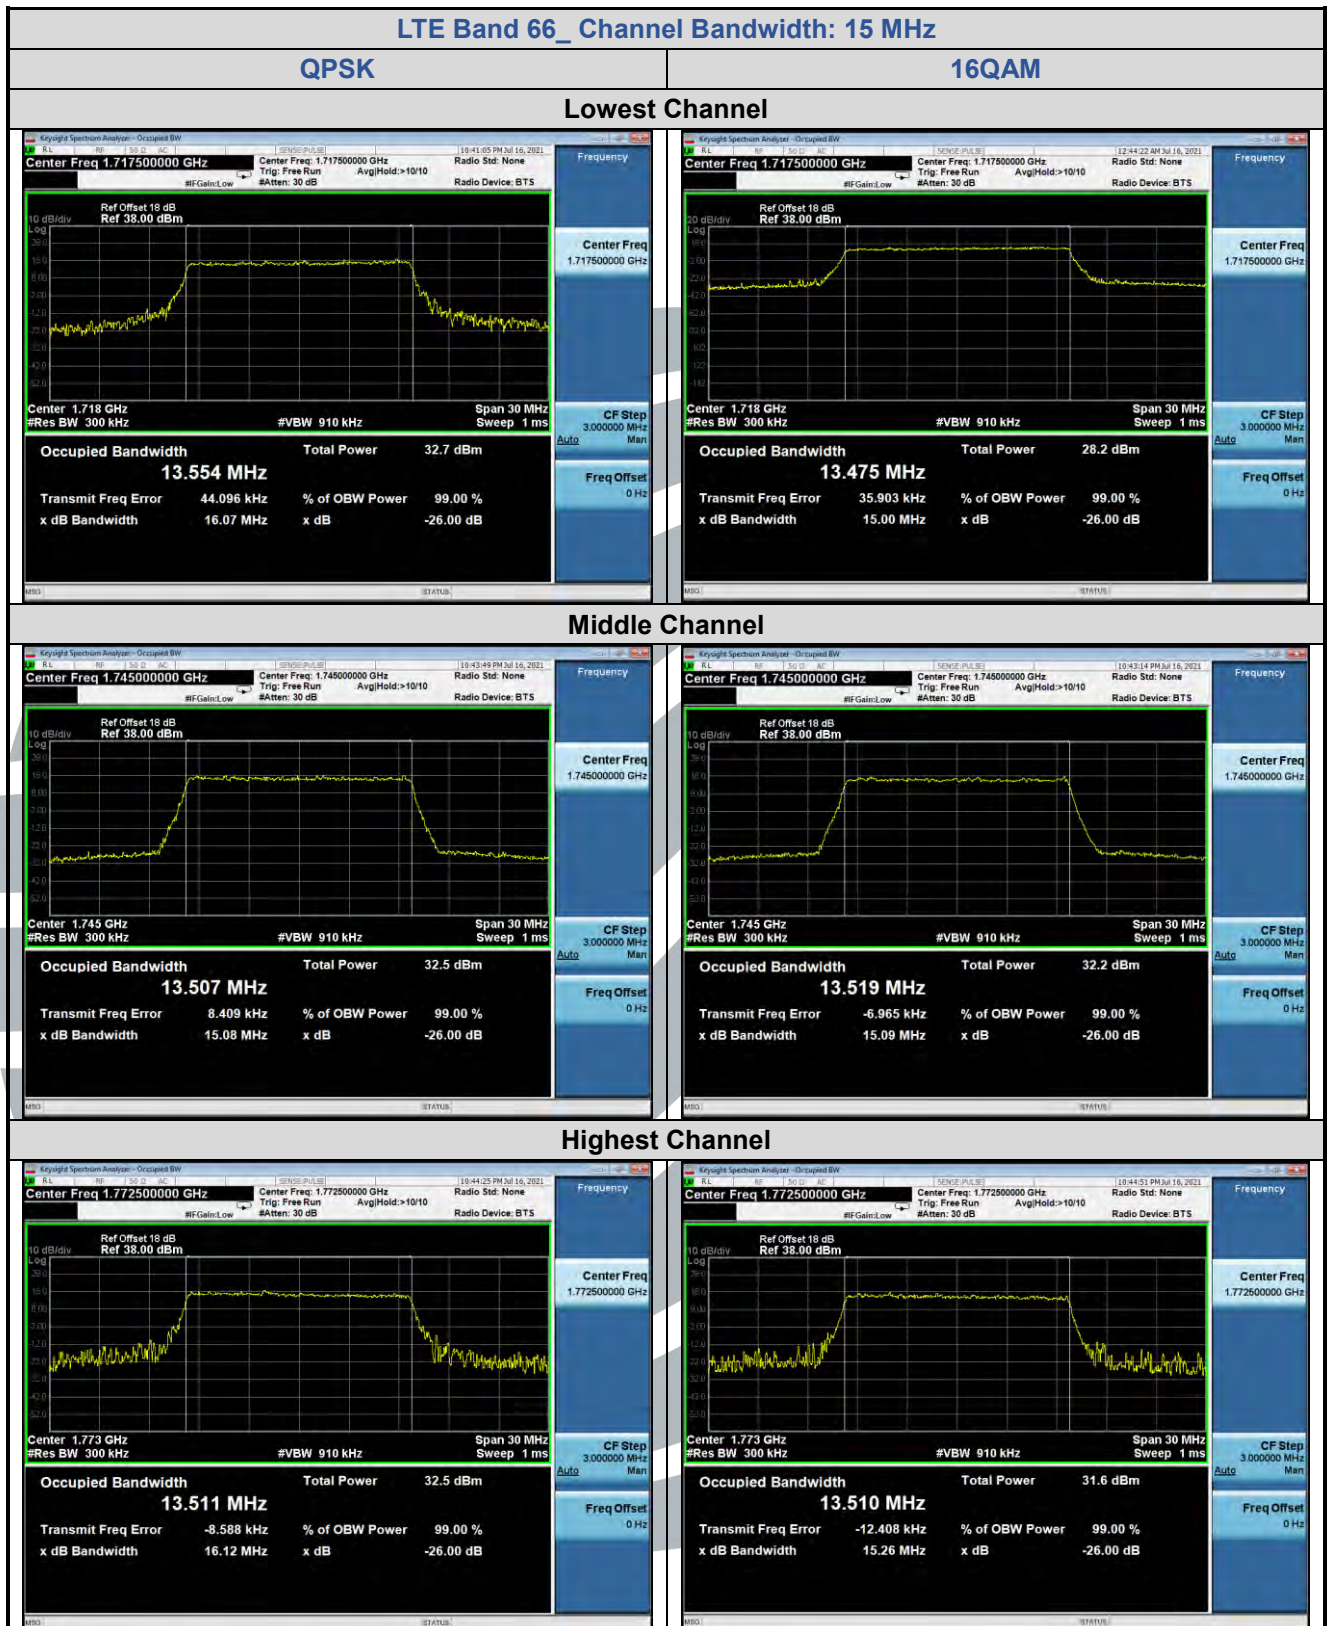

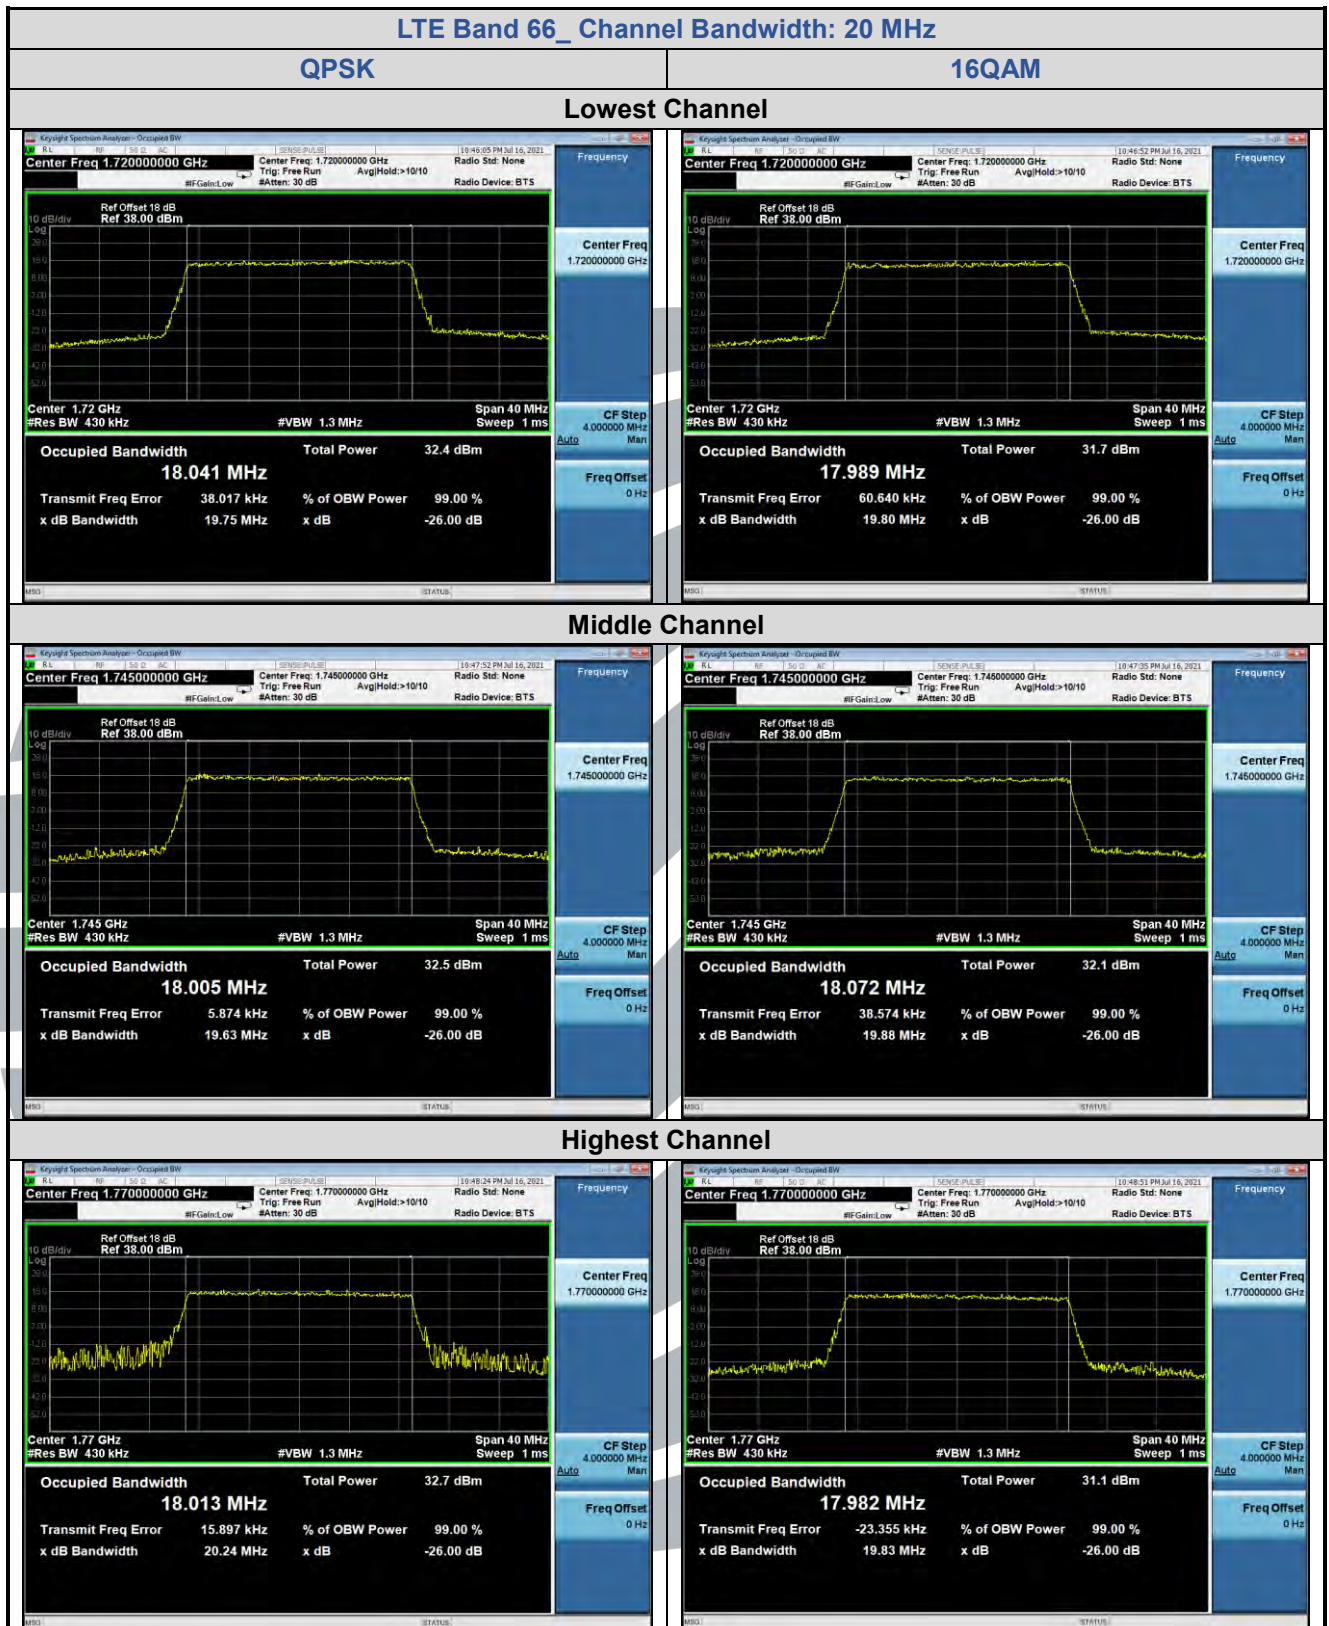

5.5.13 LTE Band 71

LTE Band 71								
Channel	RB Configuration		26 dB BW (MHz)			99% BW (MHz)		
	Size	Offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
Channel Bandwidth: 5 MHz								
Lowest	25	0	5.174	5.208	/	4.5166	4.5345	/
Middle	25	0	5.156	5.209	/	4.5238	4.5366	/
Highest	25	0	5.210	5.157	/	4.5467	4.5249	/
Channel Bandwidth: 10 MHz								
Lowest	50	0	10.10	10.12	/	9.0265	9.0133	/
Middle	50	0	10.03	10.12	/	9.0427	9.0233	/
Highest	50	0	9.940	9.977	/	8.9968	9.0047	/
Channel Bandwidth: 15 MHz								
Lowest	75	0	15.02	14.83	/	13.510	13.510	/
Middle	75	0	15.02	15.08	/	13.528	13.529	/
Highest	75	0	14.90	15.02	/	13.475	13.474	/
Channel Bandwidth: 20 MHz								
Lowest	100	0	19.63	19.86	/	17.947	17.964	/
Middle	100	0	19.85	19.77	/	18.046	18.030	/
Highest	100	0	19.59	19.79	/	17.966	18.006	/

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

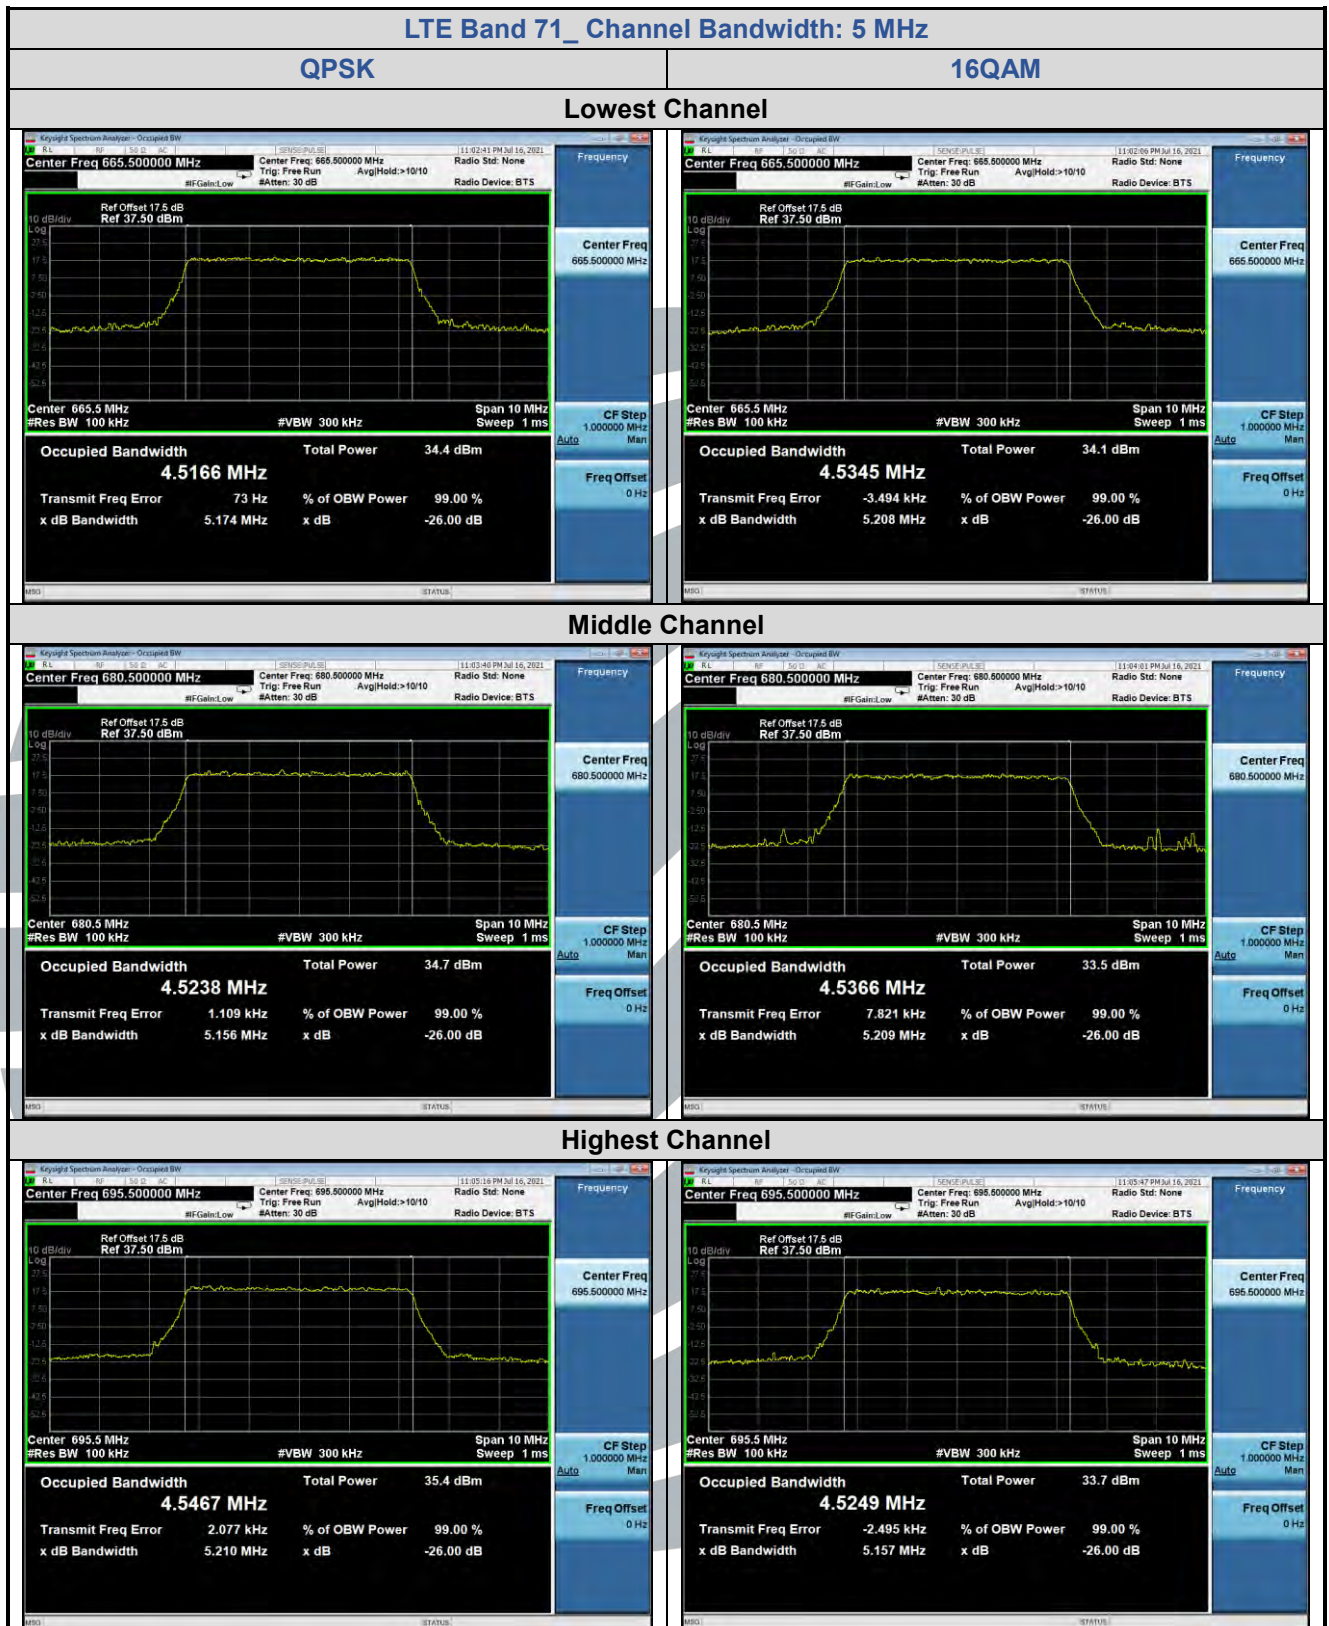



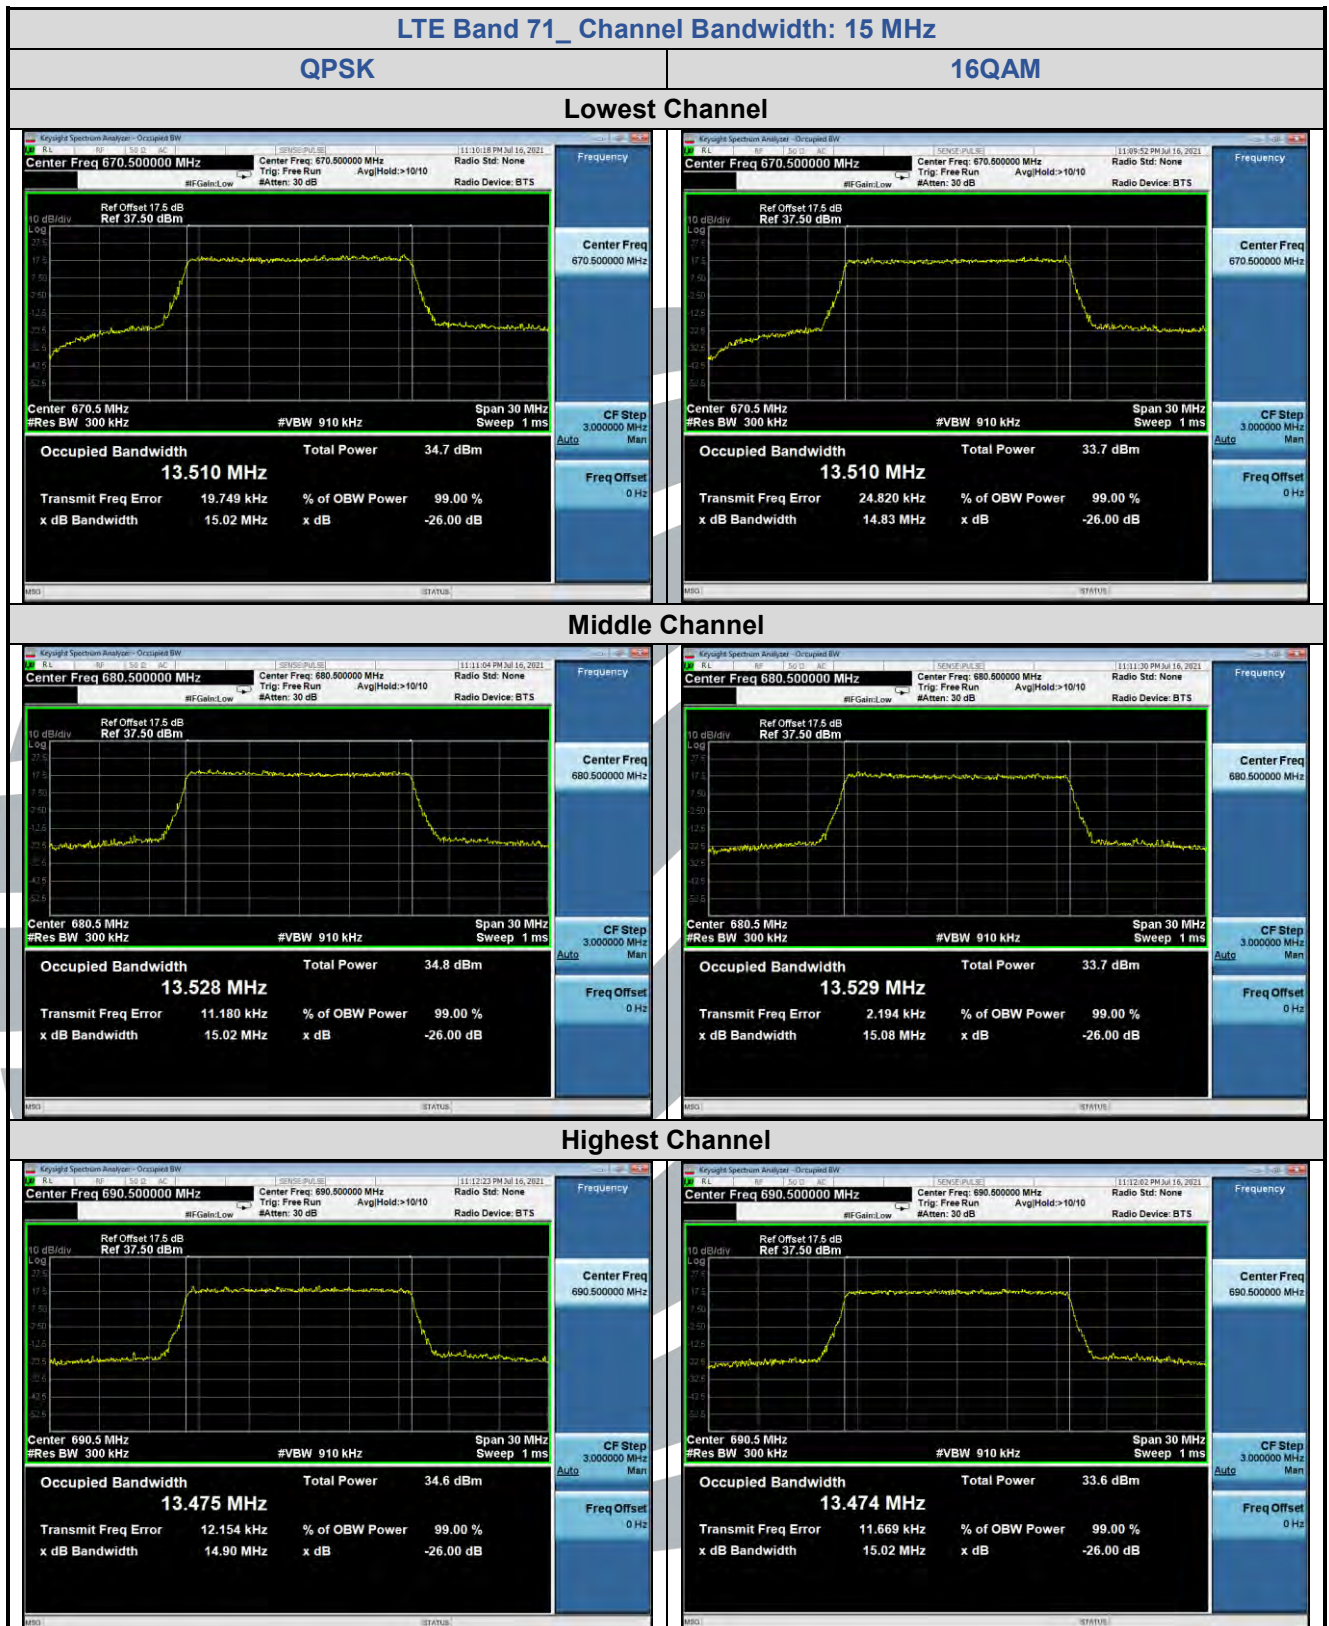

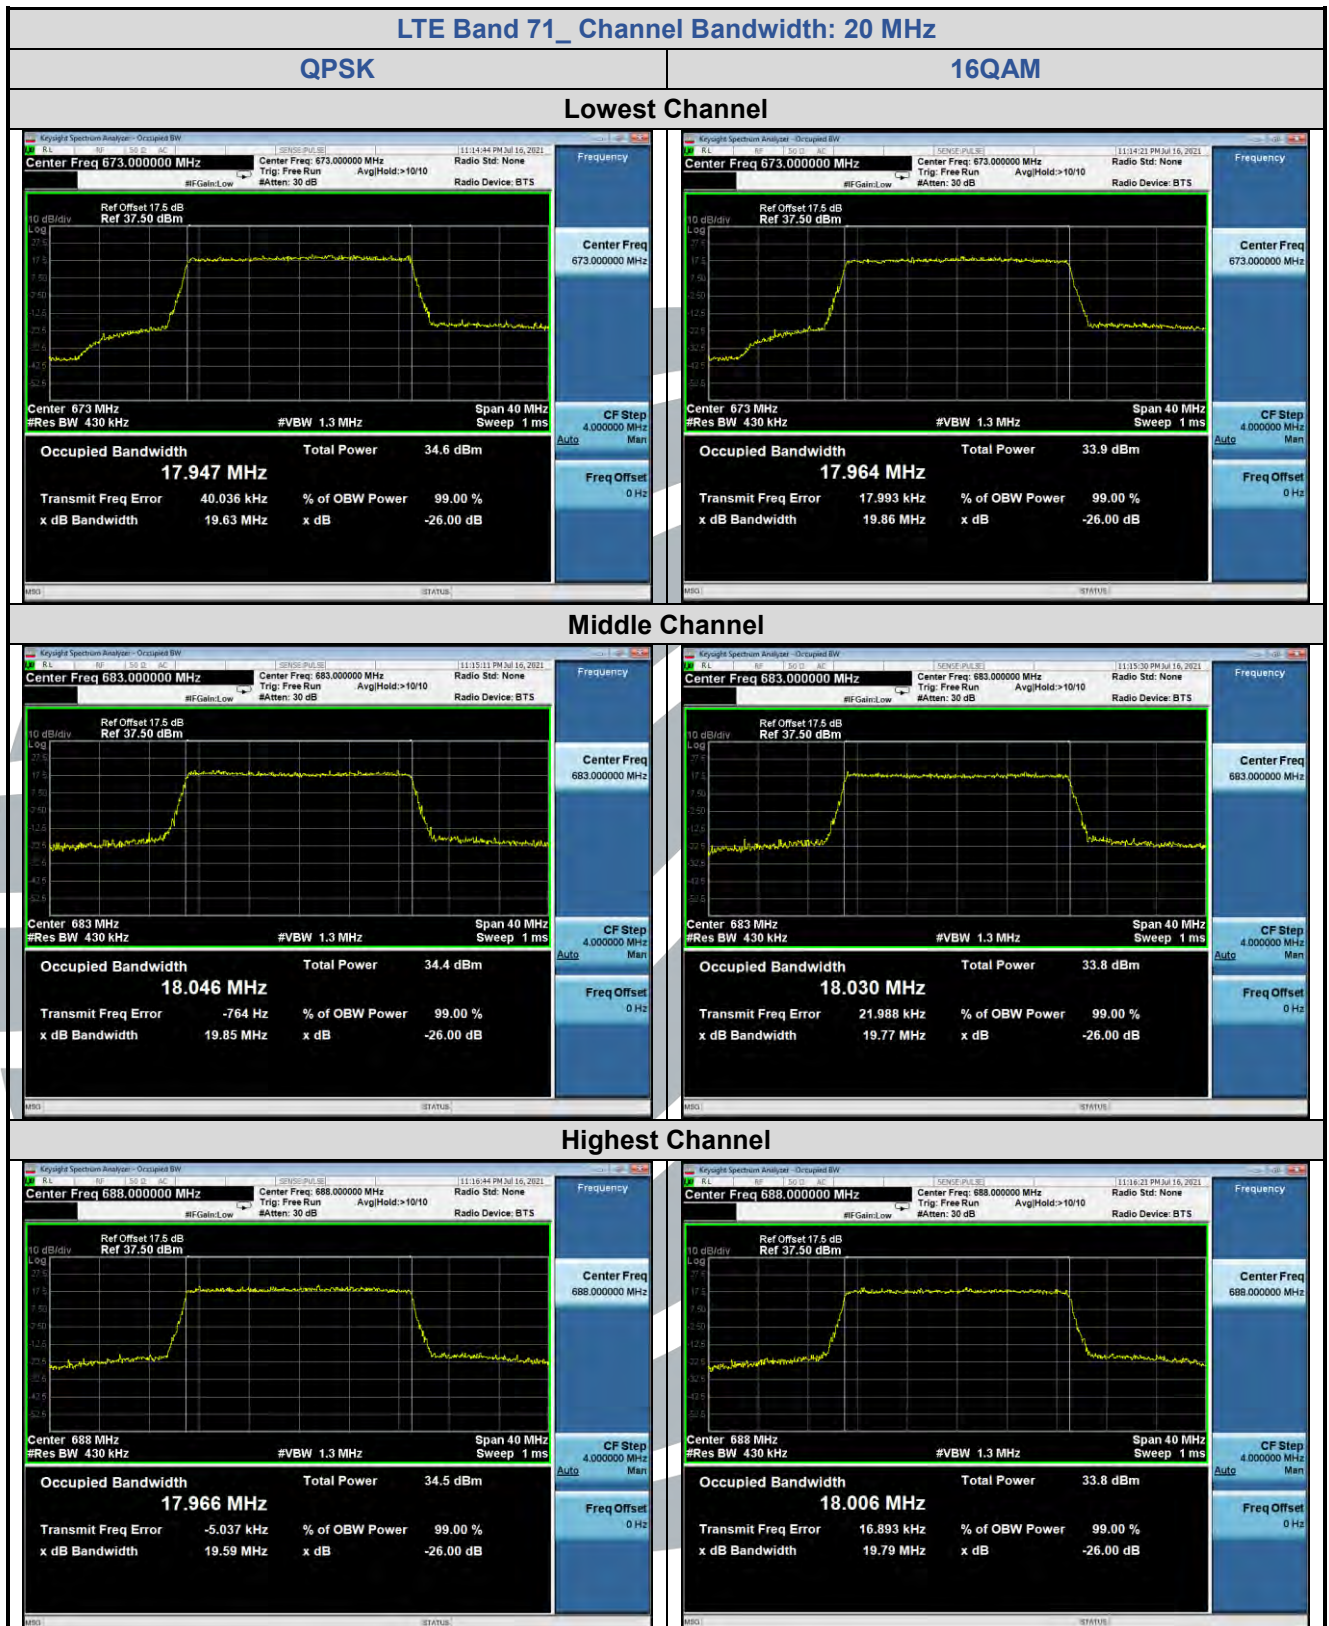

5.6 BAND EDGE AT ANTENNA TERMINALS

Test Requirement: LTE Band 2 & LTE Band 25: FCC 47 CFR Part 24.238(a)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.53(h)(1)
LTE Band 5 & LTE Band 26: FCC 47 CFR Part 22.917(a)
LTE Band 7 & Band 38 & Band 41: FCC 47 CFR Part 27.53(m)(4)
LTE Band 12 & Band 17 & Band 71: FCC 47 CFR Part 27.53(g)
LTE Band 30: FCC 47 CFR Part 27.53(a)(4)
LTE Band 26: FCC 47 CFR Part 90.691

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a) :

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(m)(4):

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC 47 CFR Part 27.53(g):

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC 47 CFR Part 27.53(a)(4): For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log(P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log(P)$ dB above 2365 MHz.

FCC 47 CFR Part 27.53(a)(5): Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC 47 CFR Part 90.691:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

(a)(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(a)(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.2.2 for details.


Instruments Used: Refer to section 3 for details


Test Mode: Link mode


Test Results: Pass


5.6.1 LTE Band 2

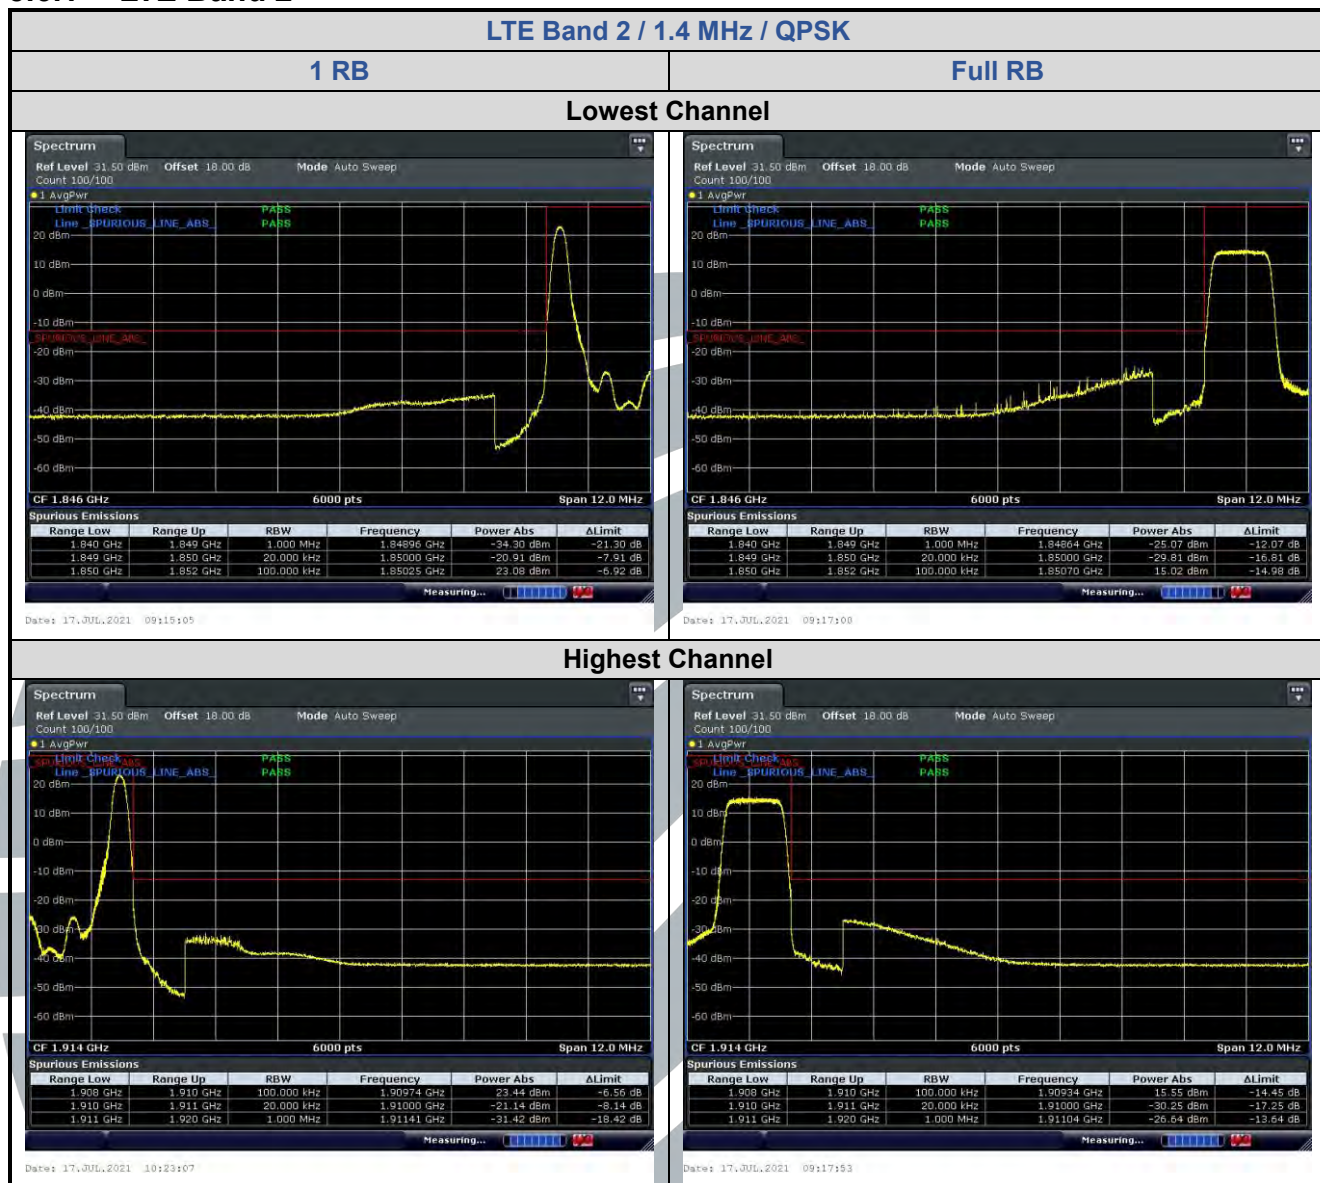


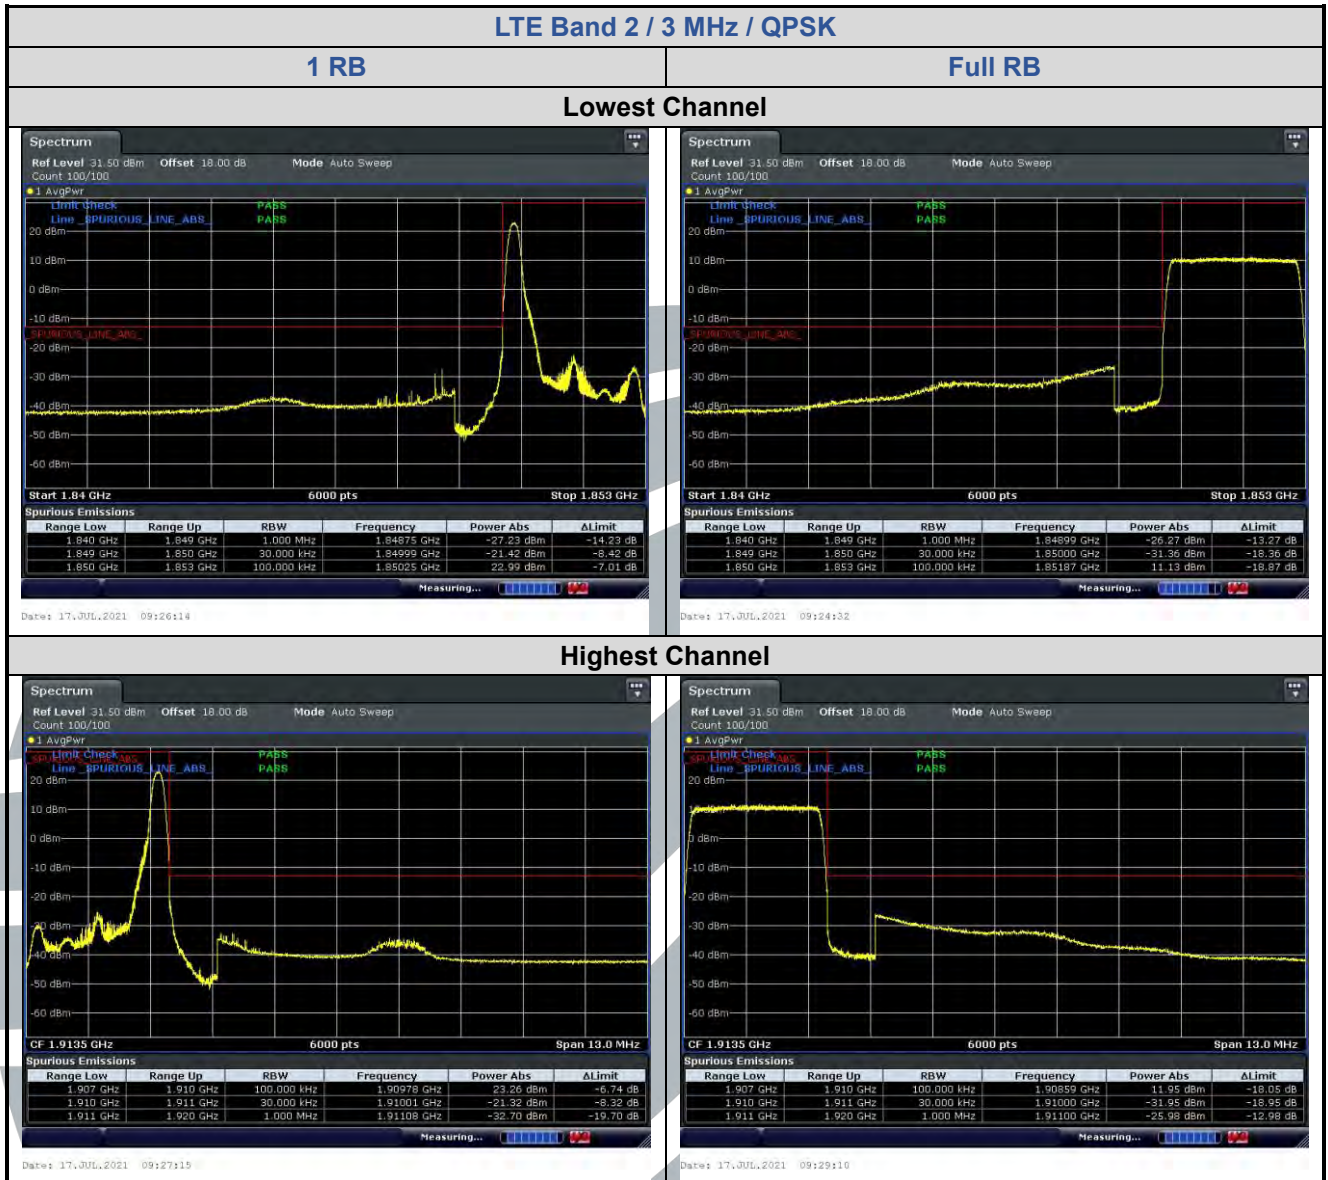


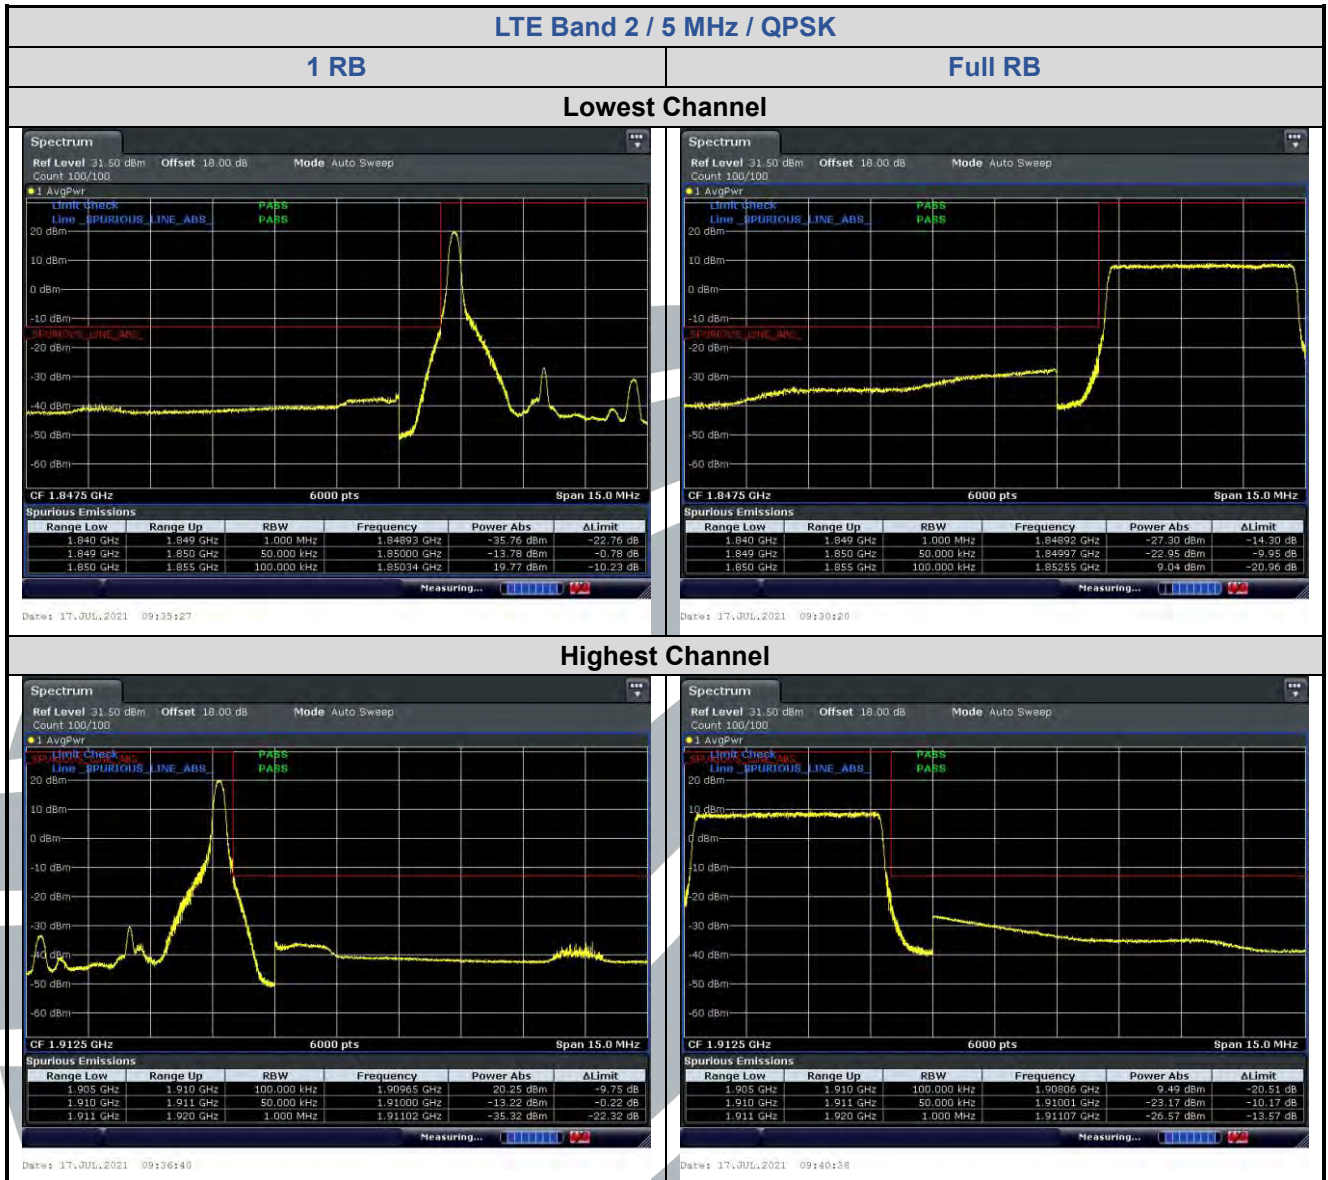


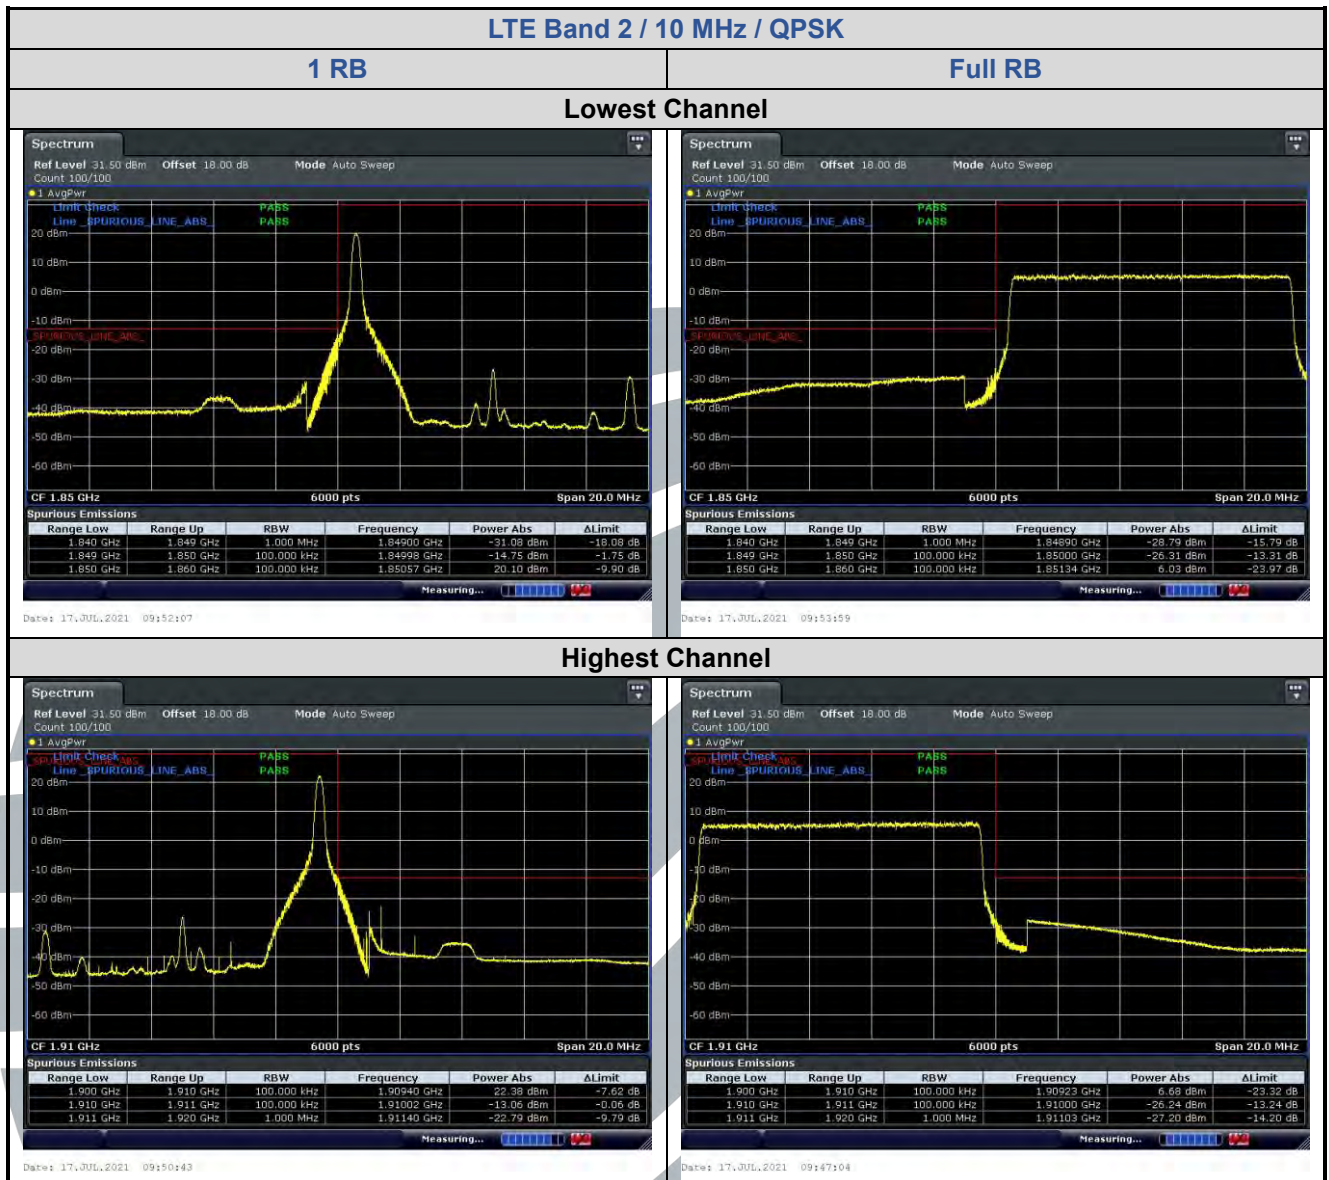


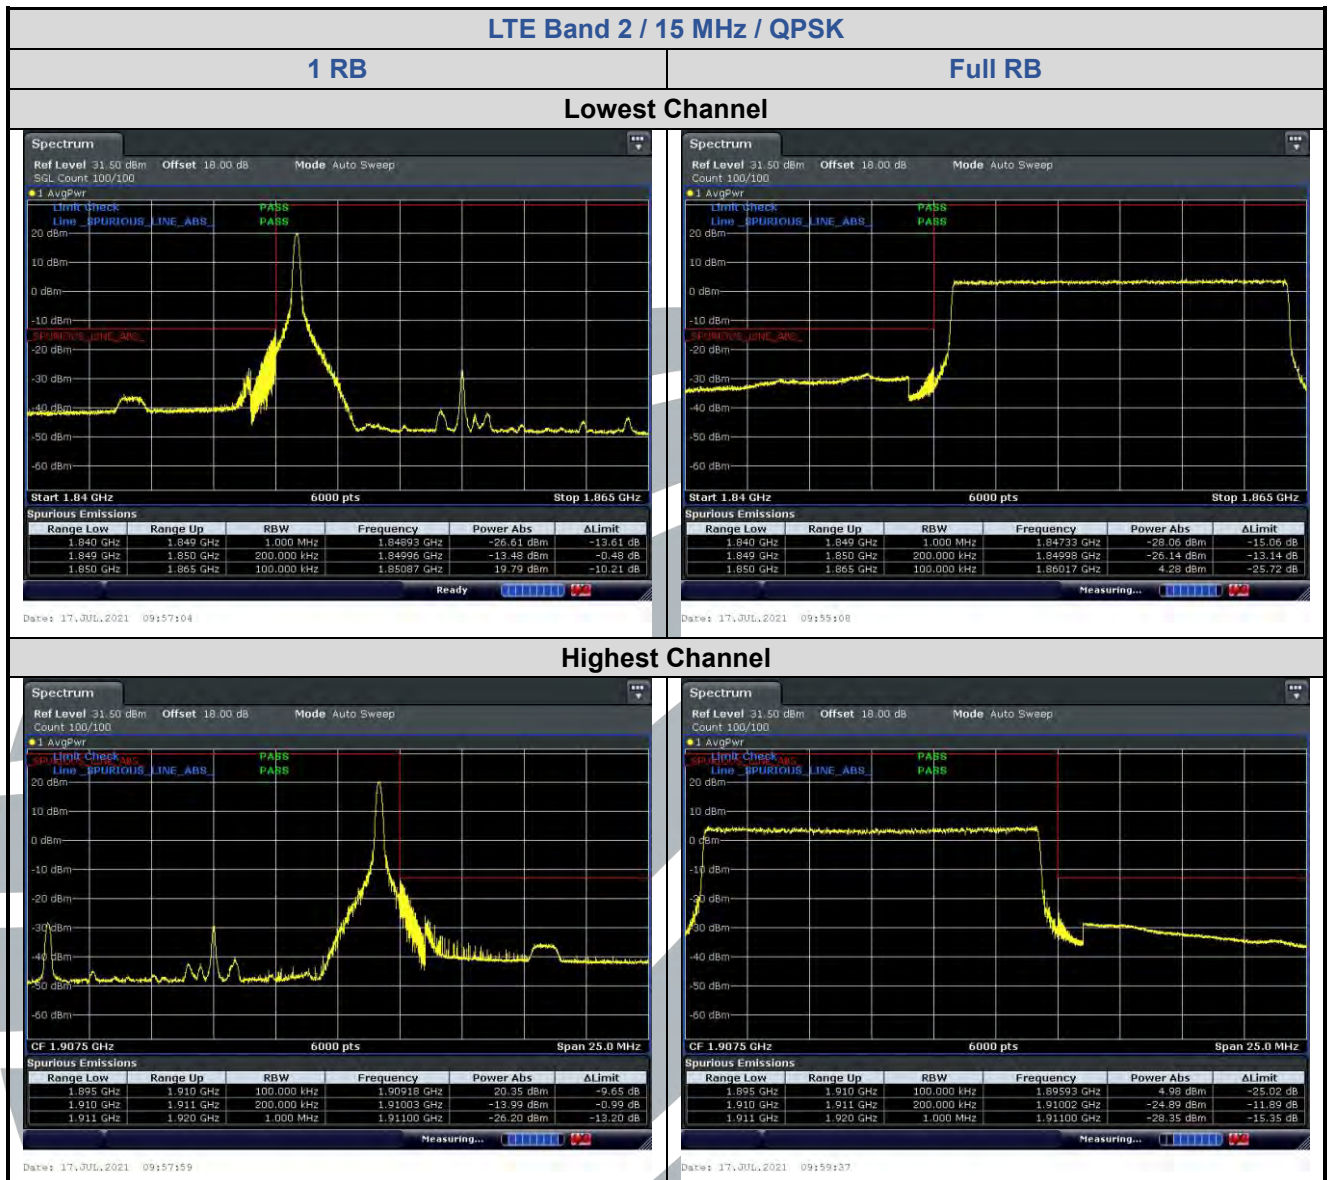


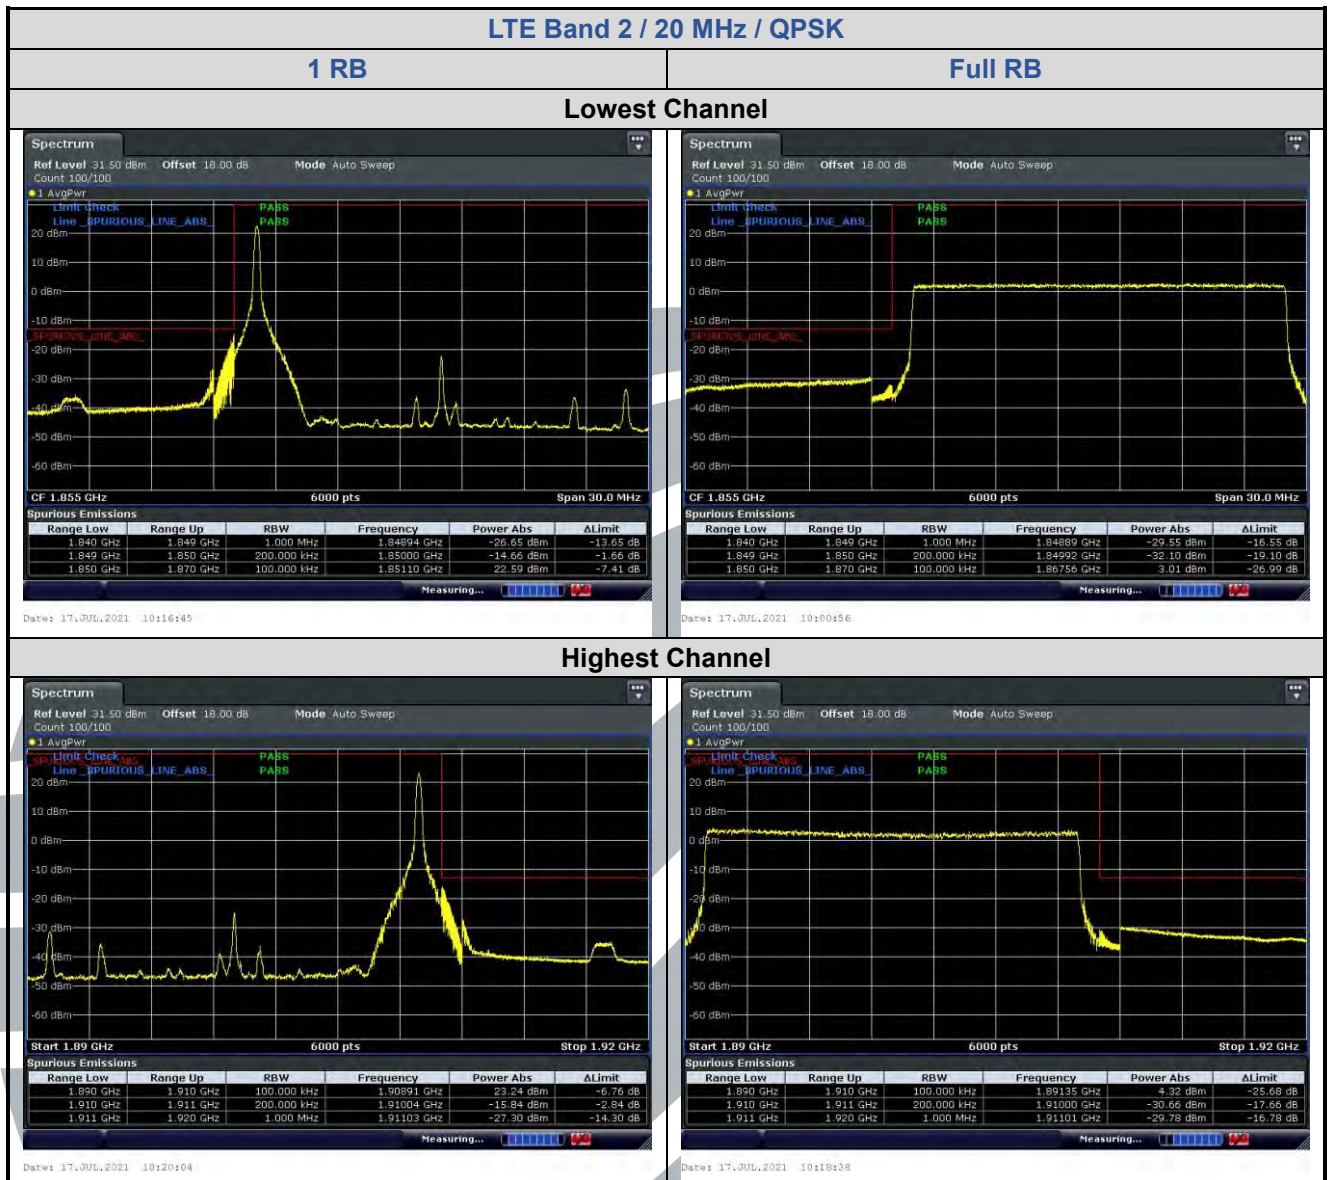


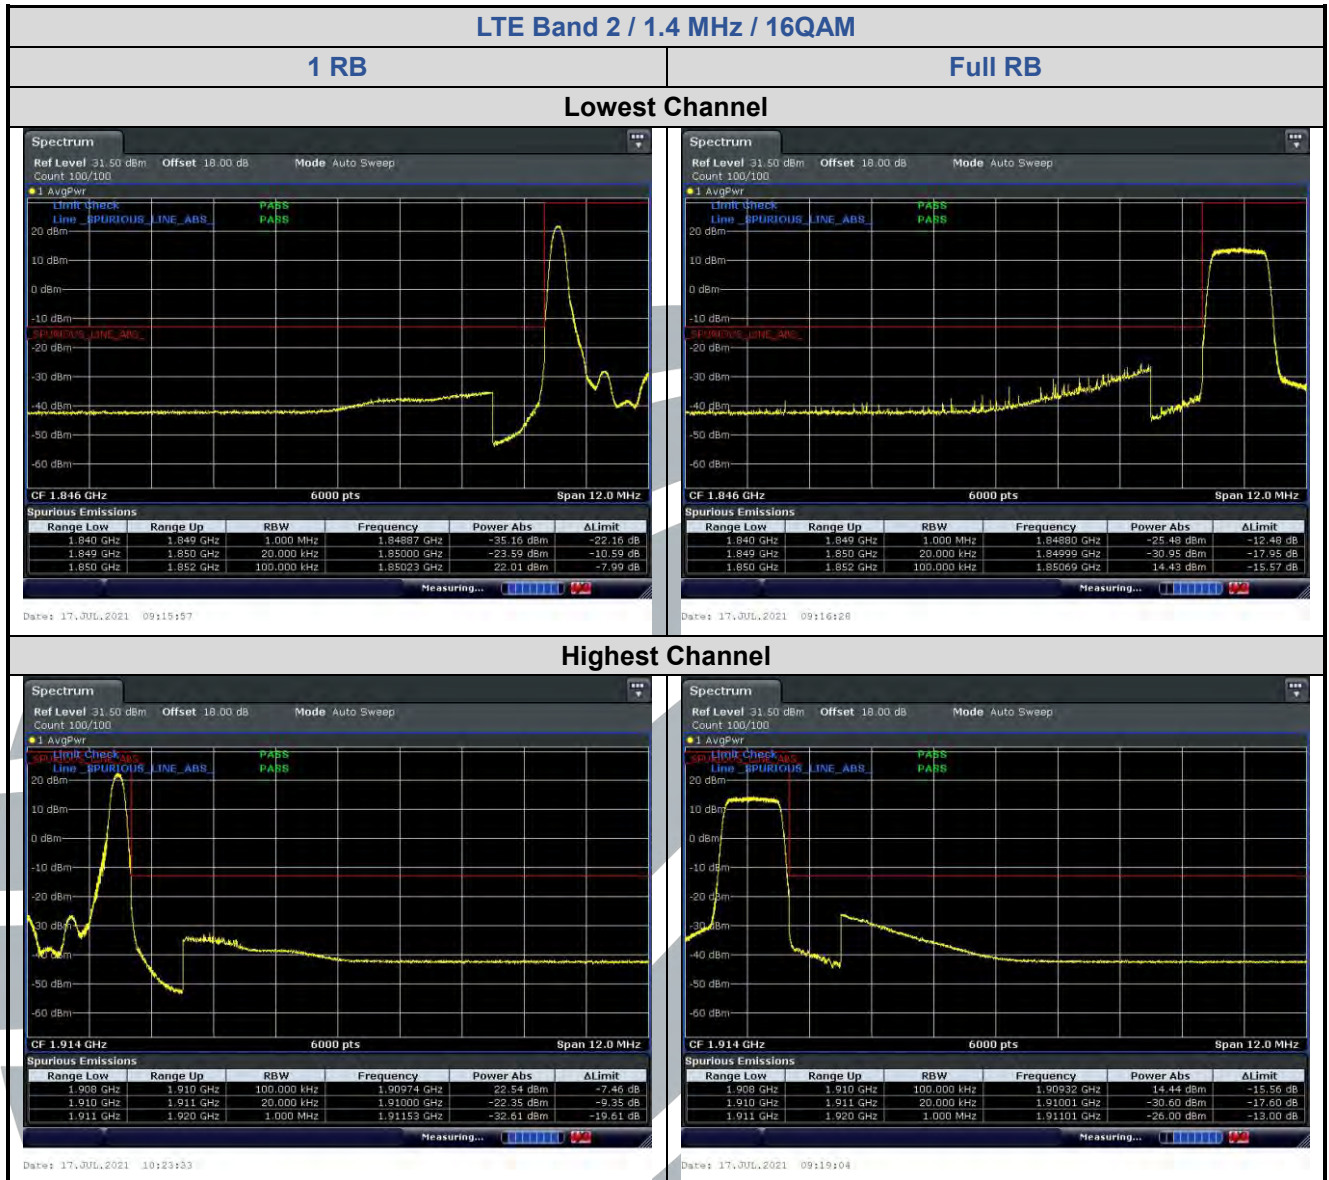


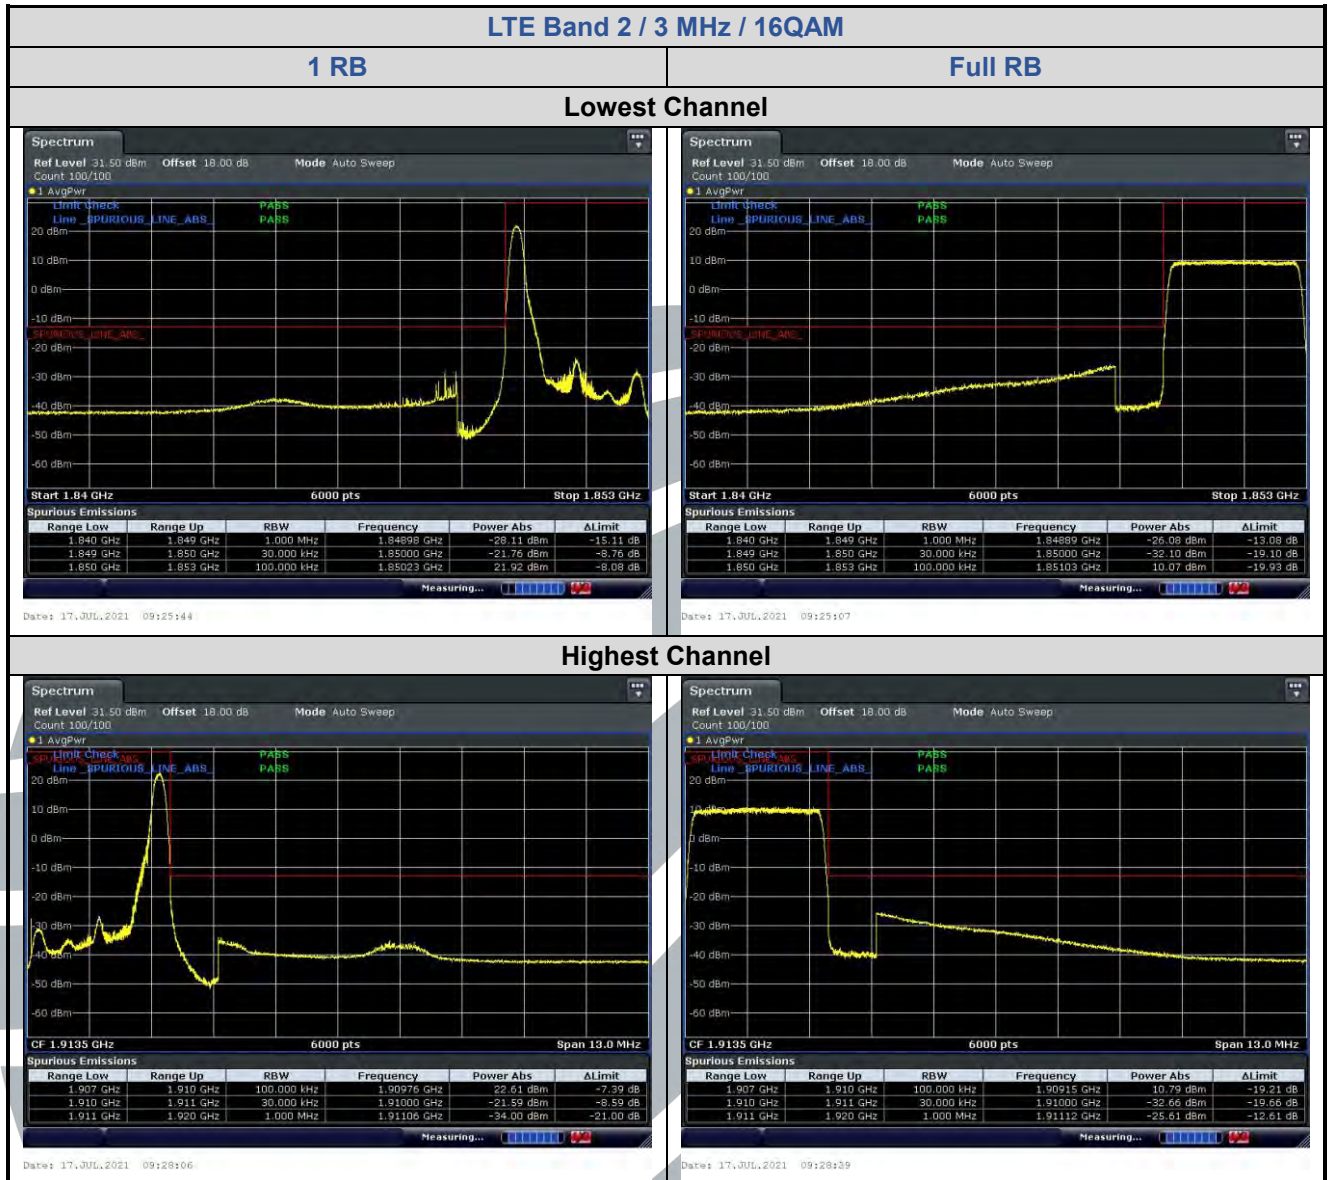

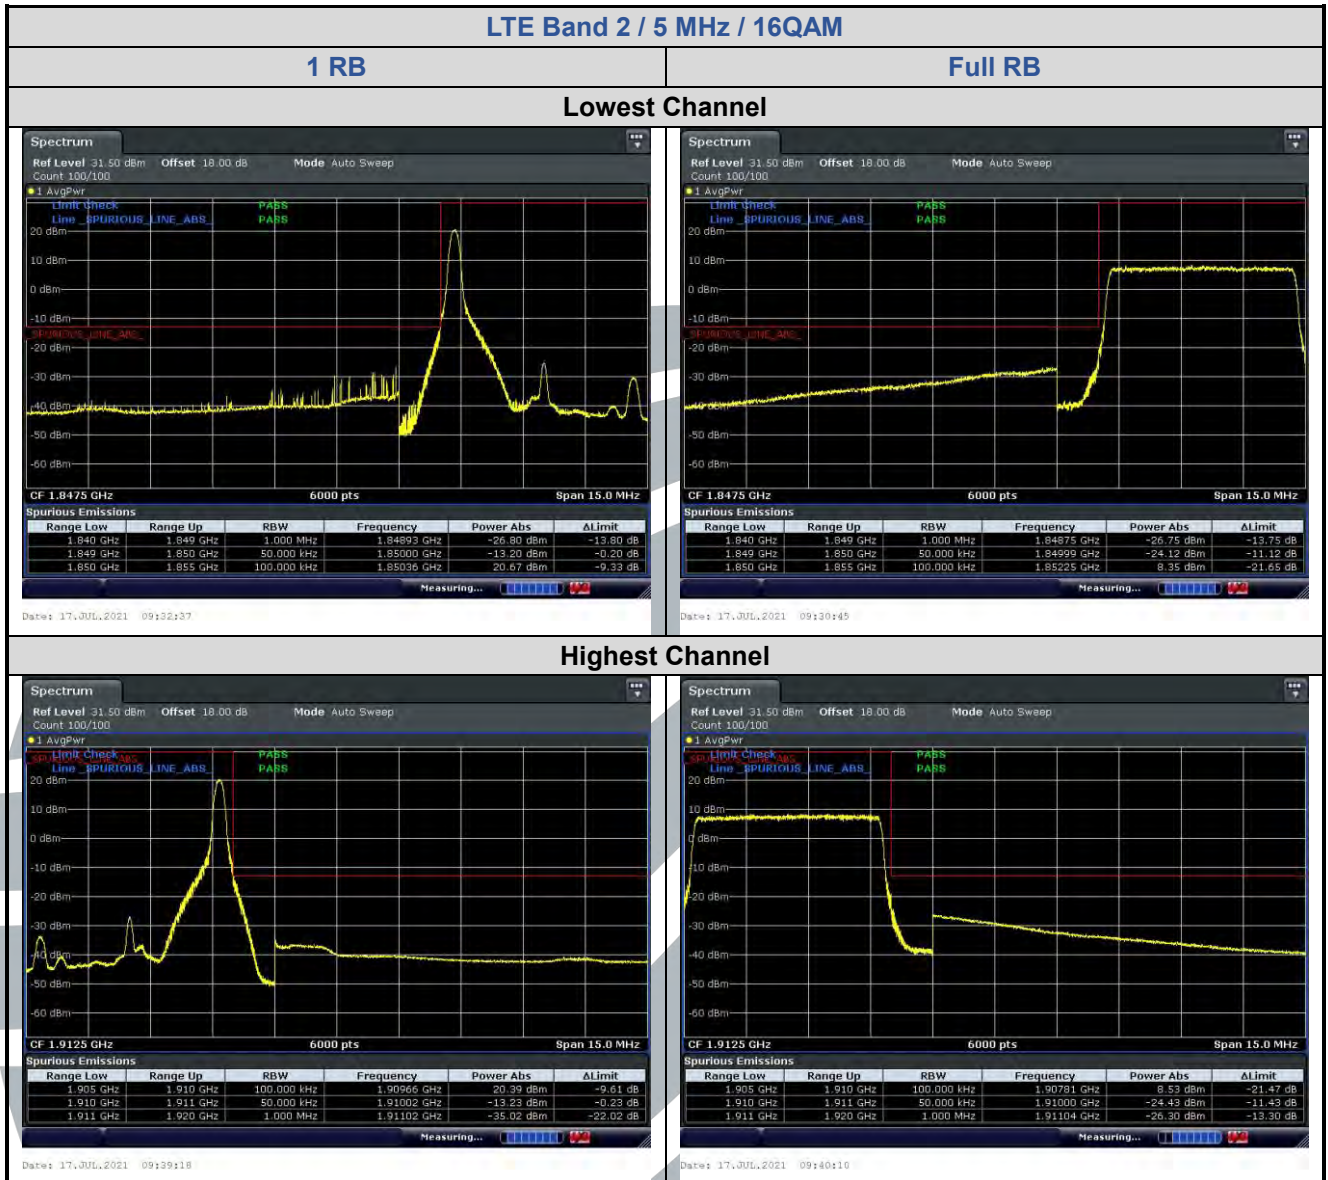

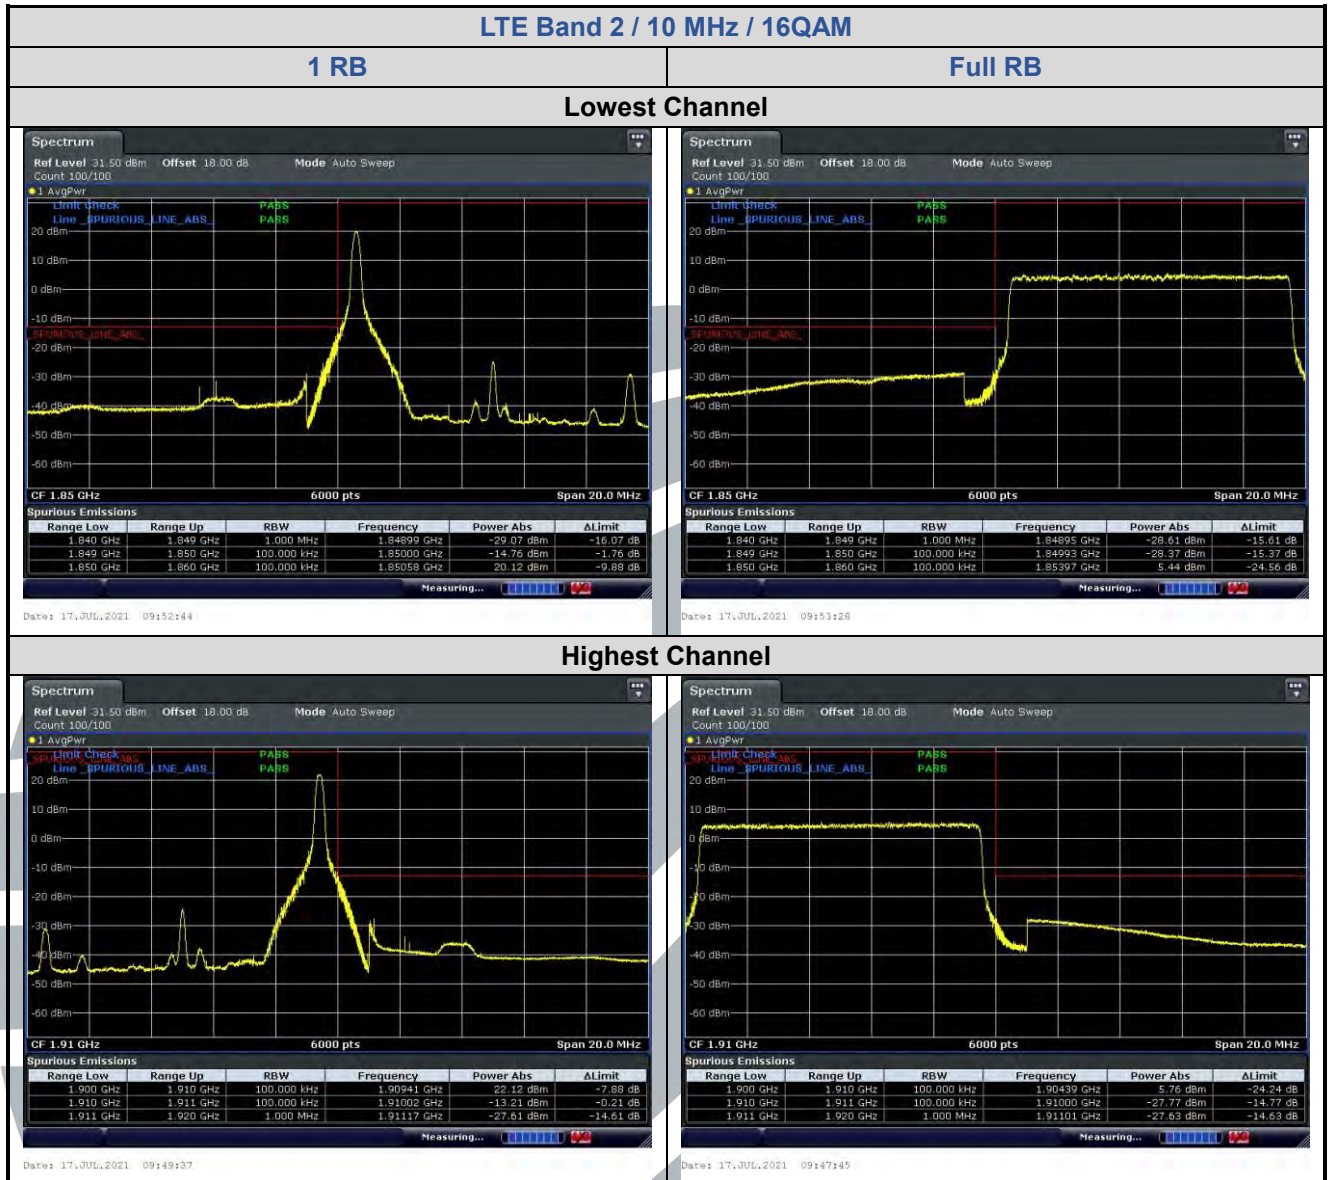

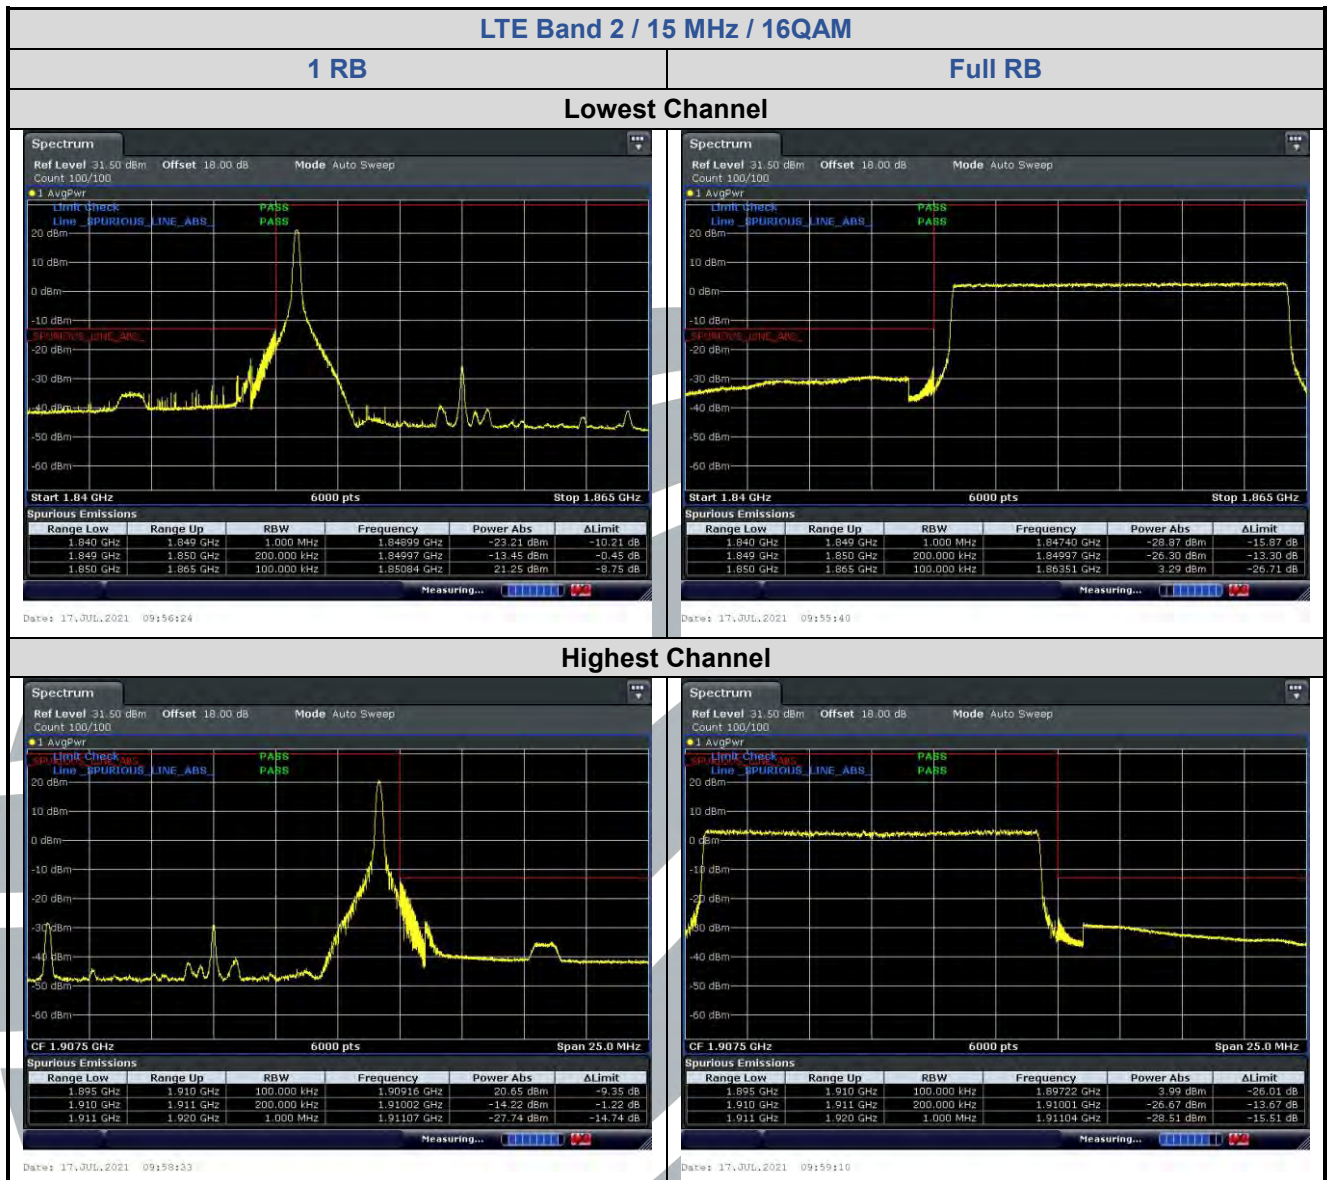

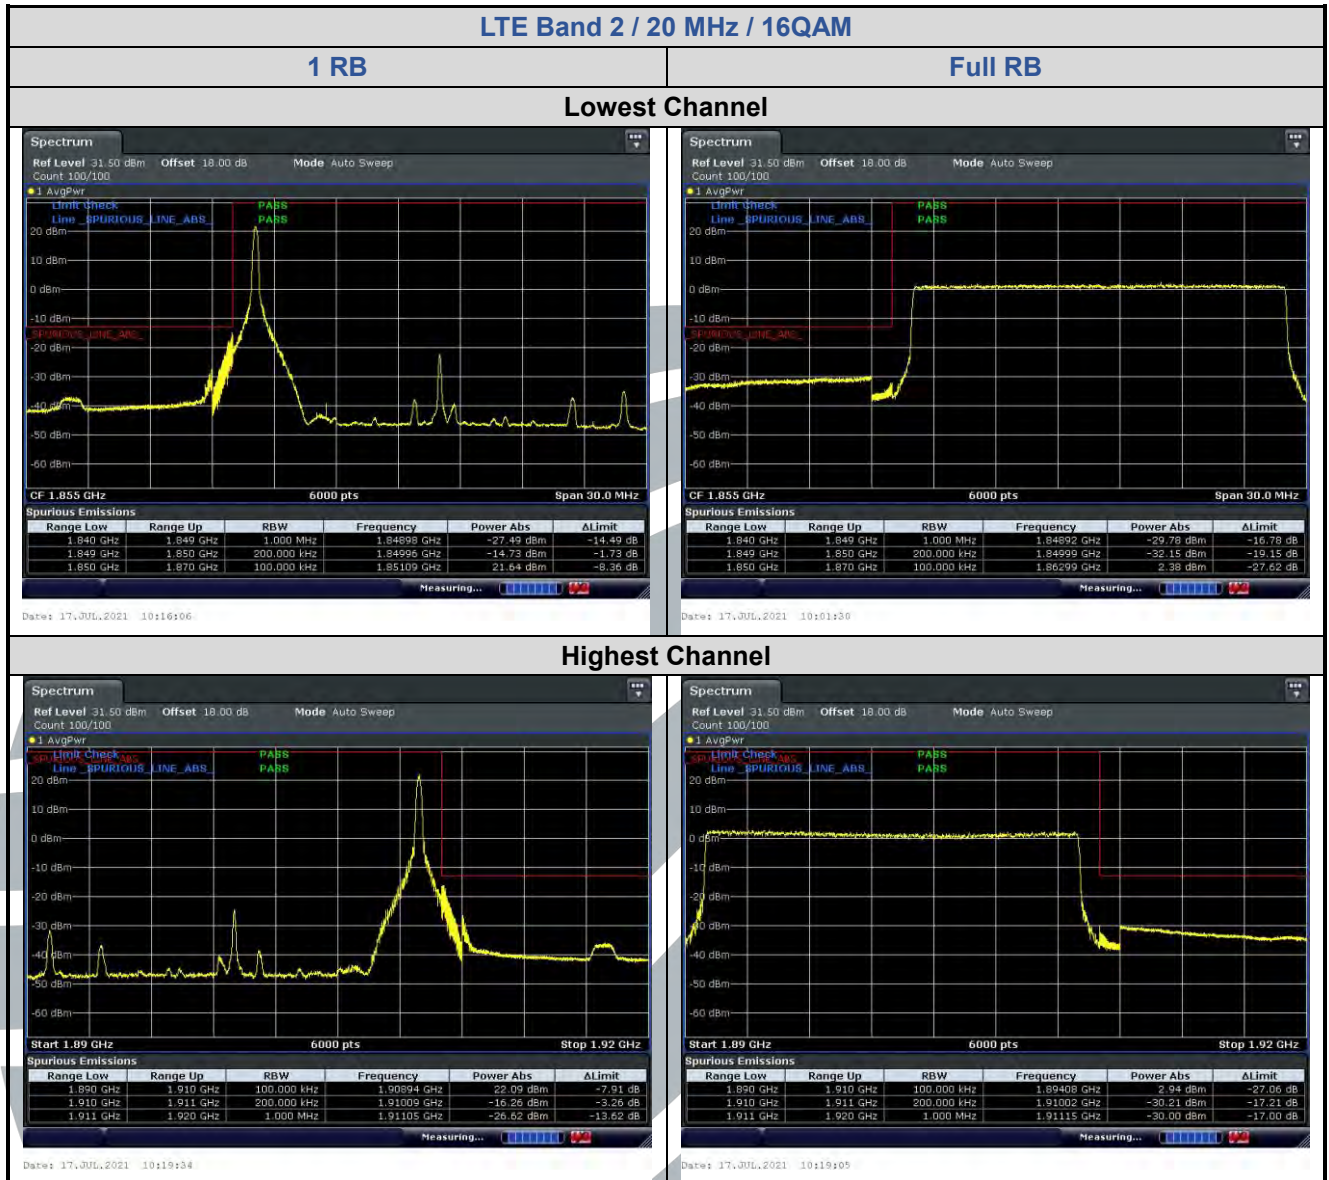

5.6.2 LTE Band 4

