

Thank you for purchasing this

velex

VX508 Bluetooth Amplifier

Please read through these instructions carefully so you will know how to operate your model properly.

After you have finished reading the instructions, keep this document in a safe place for future reference.

THIS PACKAGE CONTAINS


1-VX508 Bluetooth 2-CH Class D Amplifier




1-Multi-Function Controller



1-Flush Mount Bezel (preinstalled on the remote)



1-Handlebar Mounting Bracket & Hardware Kit



1-Power Harness



1-User Manual



velex

BEFORE YOU START

IMPORTANT SAFETY PRECAUTIONS

- BE SURE TO OBSERVE THE FOLLOWING GUIDELINES:
 - Do not turn up the volume so high that you can't hear what's around you.
 - Use caution or temporarily discontinue use in potentially hazardous situations.
- Do not operate mobile video equipment while driving a motorized vehicle - safe driving and safety consideration of others should always be your highest priority.
- Set your volume control at a low setting, then slowly increase the sound until you can hear it comfortably without distortion, or ear discomfort.
- In the event you should notice smoke, strange noises or odor from this product, or any other abnormal signs, immediately turn off the power and consult technician. Using this product in this condition may result in permanent damage to the system.

INSTALLATION PRECAUTIONS


WARNING Always consult with a professional installer

- Do not attempt to install or service this product by yourself. Installation or servicing of this product by persons without professional training and experience in electronic equipment and motorized vehicle accessories may be dangerous and could expose you to the risk of electric shock, injury or other hazards.
- **VX508** should be powered directly to a vehicle battery
- When wiring directly to vehicle battery, be sure to disconnect the batteries negative terminal wire before starting any wiring procedures, if extending the main power wire, it is suggested that an optional fuse and fuse holder (not included) with minimum rating of **20 Amperes** be in-line with the positive battery terminal.
- The ground cable length should not exceed 18-inches (See wiring diagram PG 4)
- The **VX508** has a weather resistant design, it should not be submerged in or under water under any circumstances
- Use only the installation parts provided with the **VX508**



CAUTIONS!! Using other mounting methods may void this warranty


WIRE DIAGRAM

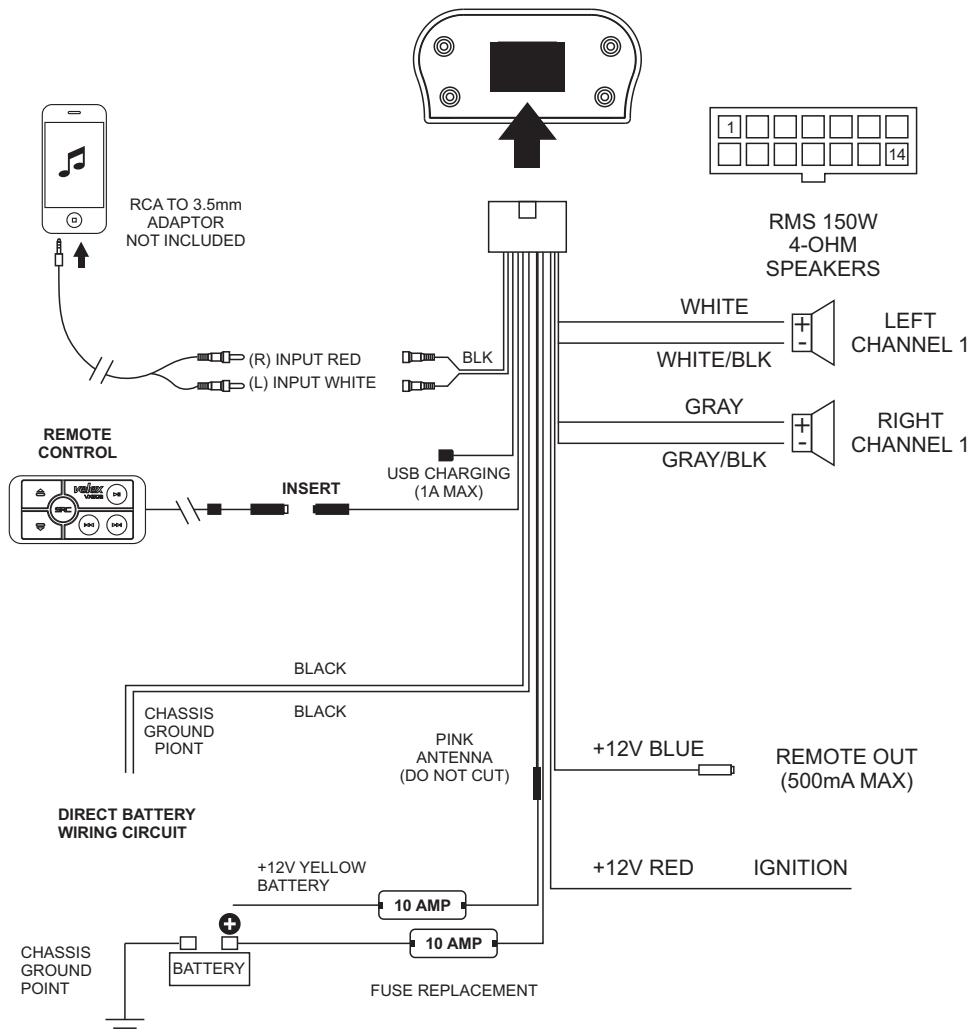

CAUTION!! Do not ground or short the PINK antenna wire

velex

BEFORE INSTALLING THIS PRODUCT

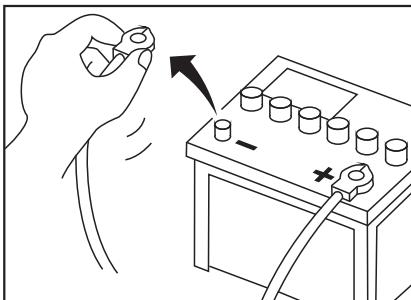


To avoid potential shorts in the electrical system, be sure to disconnect the (-) battery cable before installation. Use this unit with a 12-volt battery and negative grounding only. Failure to do so may result in a fire or malfunction.



When replacing the fuse, be sure to only use a fuse of the rating specified on this product.

To avoid short-circuiting, cover any disconnected lead with insulating tape. It is especially important to insulate any unused wires, which if left uncovered may cause a short circuit. When connecting other devices to this product, refer to the manual for the product to be connected. The black cable is ground, make sure to connect the ground wire first.

Ensure that the ground cable is properly connected to metal parts of the vehicles body frame or direct to the battery if your vehicle does not have a grounded chassis frame. The ground cable of this units power amp and a second powered system must be connected to the frame separately with different screws. If the screw for the ground wire loosens or falls out, it could result in fire or malfunction.



TOOLS NEEDED:


- Wrench and/or Pliers
- #2 Philips screwdriver
- Crimp tool
- Electrical tape

SUGGESTED MOUNTING METHODS

The **VX508** can be mounted in three different configurations:


1 Flush Mount

The flush mount quick mount bezel requires no screws. Use cutout dimensions: 3-3/16" W x 1-11/16" H (82mm x 43mm)

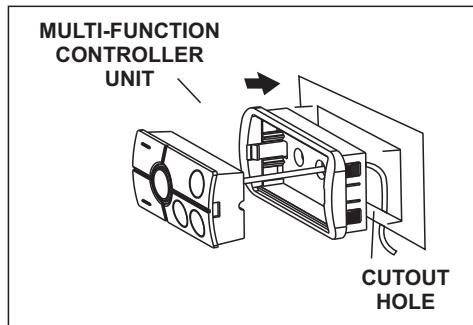


2 Surface Mount

The flush mount bezel has two recessed screw holes to facilitate the included two oval-head screws.

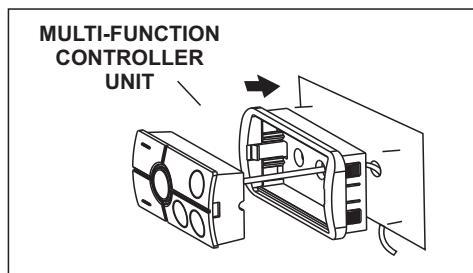

3 HANDLEBAR MOUNT

Use provided pan-head screws and stainless steel clamp, there are three mounting variations to secure the stainless steel clamp, try the best one for your application, securely tighten the stainless clamp to fit your application.

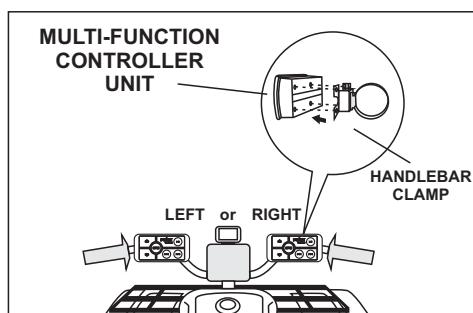


Tips: To release the **VX508** controller from the mounting bezel, insert a small jewelers screwdriver into the left/right slots of the bezel.

velex

GETTING STARTED

GETTING TO KNOW YOUR VX508 MULTIFUNCTION CONTROLLER (MFC)

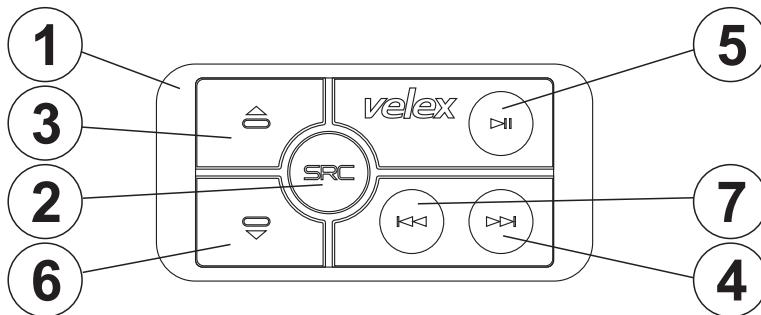

1

MFC-MULTIFUNCTIONAL CONTROLLER

2

SRC PURPLE = AUX IN / RED = USB MODE = BLUETOOTH

3

VOLUME UP

4

SHORT PRESS - NEXT TRACK / LONG PRESS – EQ SETTING

5

PLAY / PAUSE

6

VOLUME DOWN


7

SHORT PRESS – PREVIOUS TRACK / LONG PRESS- EQ SETTING

6

velex

BLUETOOTH OPERATION

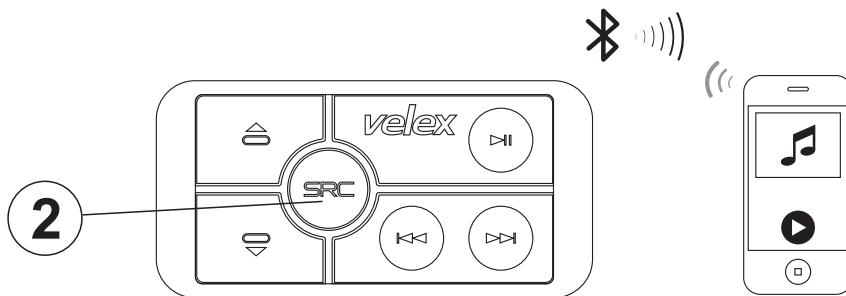

PAIRING & DISCOVERING A NEW BLUETOOTH CONNECTION


1. Power on the VX508 by short press the SRC **2** button, the Bluetooth blue LED will be switched on, a confirmation tone will be heard, signaling that VX508 is now ready for Bluetooth pairing.
2. Now that the VX508 (VELEX) is in pairing mode:
Android users:
 - a. Go into the Setting Menu of your device.
 - b. Enter the Bluetooth Menu and press SCAN.
 - c. VX508 (VELEX) will now be display under AVAILABLE DEVICES.
 - d. If prompted, enter passcode: "0000".
- IOS users:
 - a. Go into the Setting Menu of your device.
 - b. Enter the Bluetooth Menu.
 - c. VX508 (VELEX) will now be display.
 - d. If prompted, enter passcode: "0000".
3. If the VX508 is not seen, repeat the above steps to refresh the "Device List".
4. When the connection is successful, you are now ready to steam music from your devices favorite media player to the VX508.
5. Press and hold SRC button to power off VX508.



Tips: To avoid battery exhaustion be sure to run the vehicles engine while using this product. Using this product without running the engine can drain the battery.

velex


BLUETOOTH OPERATION

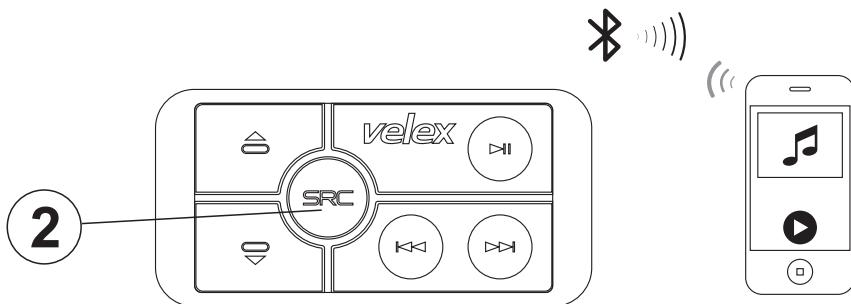

RECONNECTION

1. Power on the **VX508** and your last paired Bluetooth Device;
2. The unit will now automatically reconnect;
3. If your device was previous paired with **VX508**, but it wasn't the last paired device:
 - a. Ensure no other devices are currently paired
 - b. Enter the **Bluetooth Menu** on your device being paired
 - c. **VX508** will display under **AVAILABLE DEVICES**
 - d. Choose the **VX508** to reconnect
4. If the device is out of range from **VX508**, it will disconnect automatically:
 - a. To reconnect once device is back in range, press the **Power** (2) button once
 - b. The **VX508** will now reconnect to the device, a confirmation tone will be heard from the speakers.

STREAMING MUSIC

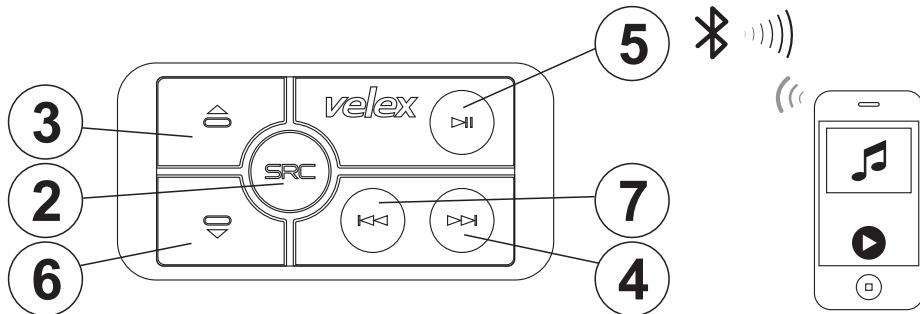

MULTIFUNCTIONAL CONTROLLER BLUETOOTH OPERATION

1. Press the **5 PLAY/PAUSE**, once to start playing music or press the **PLAY** button from your device touch screen, pressing again to **PAUSE**
2. To skip songs or advance, press the **NEXT TRACK** **4** button, press and hold to **FAST FORWARD**
3. To select the previous song, press the **PREVIOUS TRACK** **7** button, press and hold to **FAST REWIND**

VOLUME CONTROL

1. To raise the **VOLUME** press **UP** **3** button
2. To lower the **VOLUME** press **DOWN** **6** button

EQ Setting

Press and hold >> or << button for 2 seconds, VX508 will switch between POP, JAZZ, CLASSIC, ROCK and EQ OFF, a confirmation tone will be heard when adjustment complete.




Tips:

Turn the **BLUETOOTH** volume level on your device to its 100% level

velex

AUX-INPUT

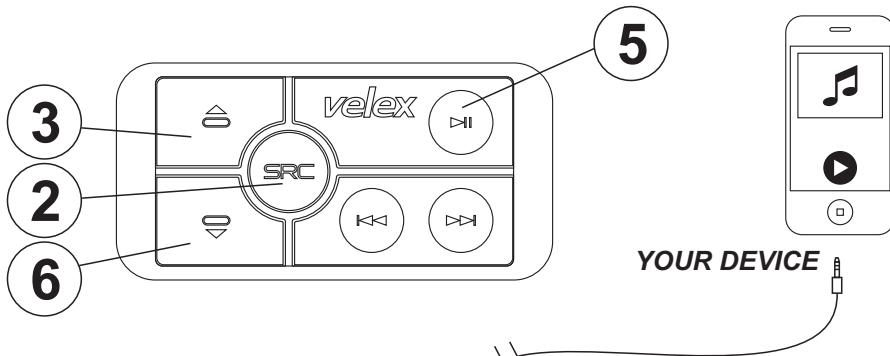

AUX-IN OPERATION

Vx508 can play audio from any device that has a pair of RCA output

1. Power on the **Vx508** by short press **SRC (2)** button
2. Short press the **SRC (2)** button again once, the controller LED lighting will change to **RED**, indicating the system is in **AUX-IN** mode.
3. **Bluetooth** devices will remain paired even in **AUX-IN MODE**
4. Connect the integrated **RCA AUX-IN** cable on the amplifier (if you have a 3.5mm jack device, please use the 3.5mm to RCA adaptor, 3.5mm to RCA adaptor is not included)
5. Route the audio wires back to a convenient storage place, secure your device.

VOLUME CONTROL

1. To raise the **VOLUME** press **UP (3)** button
2. To lower the **VOLUME** press **DOWN (6)** button
3. To **MUTE / UN-MUTE** the **VOLUME** press **PLAY / PAUSE (5)** button



Tips: Turn the **HEADPHONE** volume level on your device to its 100% level

TROUBLE SHOOTING GUIDE

TROUBLE	CAUSE	SOLUTION
Unit will not turn on	The fuse is blown	Check / replace the fuse
	Ignition not engaged	Turn ignition to on position
No sound is heard	Blown speaker	Replace faulty speaker
	Volume is low / muted	Press the volume level up
	Device is paused or muted	Check your devices playing / volume status
Can not pair Bluetooth	The Bluetooth function of the device is not enabled	Refer to the user manual of the device for how to enable the Bluetooth function
The audio quality is poor after connection with a Bluetooth enabled device	The Bluetooth reception is poor	Move the device closer to the audio system or remove any obstacle between the device and the systems antenna
Unit has become unresponsive	Power glitch or interference	Disconnect power for 10 seconds to reset

SPECIFICATIONS

BLUETOOTH

- BT: 5.0
- BT Range: 33FT / 10 M (CLASS 2)
- BT Profiles: A2DP

AMPLIFIER

- Channels: 2 Class D
- **MAX** Continuous Output: 150W x 2 Peak @4ohm speaker
- **PEAK** Power Rating
- **RMS** Total Power Output: 150W x 2
- Class AB
- Bridgeable to 300W x 1 peak @ 8ohm speaker, only for professional
- Frequency response: 20-20KHz
- 4 Ohm stable
- Input impedance: 22K Ohm

CHASSIS

- Dimension: W x L x H
99 x 203 x 50 mm
- Controller Dimensions W x L x H
47 x 95 x 22 mm
- Controller cable length: 3m
- Quick connect Molex power harness

GENERAL

- Power source: 14.4VDC (10.8 - 16V Allowable)
- Grounding System: Negative type
- Maximum Current Consumption: 20A
- 3-way protection circuitry (thermal, overload, and speaker short protection)
- USB output voltage: 5VDC @1A
- Unit weight: 2.08lbs / 0.94kgs
- Storage Temperature: 5 F to 113 F / - 15 to 45 degree
- Replacement Fuse: 10A

(Replace with ATO Fuse Type Only).

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.