



**F2 Labs**  
16740 Peters Road  
Middlefield, Ohio 44062  
United States of America  
[www.f2labs.com](http://www.f2labs.com)

## FCC CERTIFICATION TEST REPORT

**Manufacturer:** **Avuity, LLC**  
**302 West Third**  
**Suite 810**  
**Cincinnati, Ohio 45208 USA**

**Applicant:** **Same as Above**

**Product Name:** **Wireless Module**

**Product Description:** **A high integrated wireless module, which works in 2.4 GHz of ISM band. VuAi V1 adopts Nordic's RF chip nRF24L01+ and high efficiency RF amplifier.**

**Operating Voltage/Frequency:** **Battery-Powered**

**Model(s):** **VuAi V1**

**FCC ID:** **2AUPP-VUAI01**

**Testing Commenced:** **2019-09-18**

**Testing Ended:** **2021-01-19**

**Summary of Test Results:** **In Compliance**

The EUT complies with the EMC requirements when manufactured identically as the unit tested in this report, including any required modifications and/or manufacturer's statement. Any changes to the design or build of this unit subsequent to this testing may deem it non-compliant.

**Standards:**

- ❖ **FCC Part 15 Subpart C, Section 15.249**
- ❖ **FCC Part 15, Subpart C, Section 15.209**



**Order Number: F2P21720**

**Applicant: Avuity, LLC**

**Model: VuAi V1**

**Evaluation Conducted by:**

Julius Chiller, EMC/Wireless Engineer

**Report Reviewed by:**

Ken Littell, Vice President of EMC

F2 Labs  
26501 Ridge Road  
Damascus, MD 20872  
Ph 301.253.4500

F2 Labs  
16740 Peters Road  
Middlefield, OH 44062  
Ph 440.632.5541

F2 Labs  
8583 Zionsville Road  
Indianapolis, IN 46268  
Ph 317.610.0611

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



## TABLE OF CONTENTS

| Section | Title   | Page |
|---------|---|------|
| 1       | ADMINISTRATIVE INFORMATION                                | 4    |
| 2       | SUMMARY OF TEST RESULTS/MODIFICATIONS                     | 5    |
| 3       | ENGINEERING STATEMENT                                     | 6    |
| 4       | EUT INFORMATION   | 7    |
| 5       | TEST EQUIPMENT USED                                       | 8    |
| 6       | FIELD STRENGTH OF EMISSIONS FROM<br>INTENTIONAL RADIATORS | 9    |
| 7       | RADIATED SPURIOUS EMISSIONS                               | 13   |
| 8       | MPE CALCULATION   | 26   |
| 9       | PHOTOGRAPHS – TEST SETUP                                  | 27   |
| 10      |   |      |



Order Number: F2P21720

Applicant: Avuity, LLC

Model: VuAi V1

## 1 ADMINISTRATIVE INFORMATION

### 1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

### 1.2 Measurement Procedure:

All measurements were performed according to the 2013 version of ANSI C63.10 and recommended FCC procedure of measurement of DXT operating under Section 15.249. A list of the measurement equipment can be found in Section 6.

### 1.3 Uncertainty Budget:

The uncertainty in EMC measurements arises from several factors which affect the results, some associated with environmental conditions in the measurement room, the test equipment being used, and the measurement techniques adopted.

The measurement uncertainty budgets detailed below are calculated from the test and calibration data and are expressed with a 95% confidence factor. Note: Only measurements listed below which relate to tests included in this Test Report are applicable to it.

| Measurement Range                                   | Expanded Uncertainty | Combined Uncertainty |
|---|----------------------|----------------------|
| Radiated Emissions <1 GHz @ 3m                      | ±5.07dB              | ±2.54                |
| Radiated Emissions <1 GHz @10m                      | ±5.09dB              | ±2.55                |
| Radiated Emissions 1 GHz to 2.7 GHz                 | ±3.62dB              | ±1.81                |
| Radiated Emissions 2.7 GHz to 18 GHz                | ±3.10dB              | ±1.55                |
| AC Power Line Conducted Emissions, 150kHz to 30 MHz | ±2.76dB              | ±1.38                |

This Uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 1.4 Document History:

| Document Number     | Description  | Issue Date | Approved By |
|---------------------|--|------------|-------------|
| F2P21720-01E        | First Issue  | 2020-06-09 | K. Littell  |
| F2P21720-01E Rev. 1 | Freq. Range Correction and Band edge data replacement. | 2021-01-14 | K. Littell  |
| F2P21720-01E Rev. 2 | Various revisions, including model.                    | 2021-01-20 | K. Littell  |



Order Number: F2P21720

Applicant: Avuity, LLC

Model: VuAi V1

## 2 SUMMARY OF TEST RESULTS/MODIFICATIONS

| Test Name  | Standard(s)                         | Results  |
|--|-------------------------------------|----------|
| Field Strength of Emissions from Intentional Radiators | FCC PART 15.249(a)(d)               | Complies |
| Radiated Spurious Emission                             | CFR 47 Part 15.249(d) / Part 15.209 | Complies |

| Modifications Made to the Equipment |
|-------------------------------------|
| None                                |



**Order Number: F2P21720**

**Applicant: Avuity, LLC**

**Model: VuAi V1**

### **3 ENGINEERING STATEMENT**

This report has been prepared on behalf of Avuity, LLC to provide documentation for the testing described herein to be used as evidence that the Class II change, due to the addition of an antenna, has not increased the spurious emissions level of the original Grant and that the combined RF Exposures are within the MPE limits. This equipment has been tested and found to comply with parts 15.249 and 15.209 of the FCC Rules and using ANSI C63.4 standards. The test results found in this test report relate only to the items tested.



**Order Number: F2P21720**

**Applicant: Avuity, LLC**

**Model: VuAi V1**

## **4 EUT INFORMATION**

### **4.1 Equipment Under Test:**

| <b>Device</b>            | <b>Manufacturer</b> | <b>Model Number</b> | <b>Serial Number</b> | <b>FCC ID</b> |
|--------------------------|---------------------|---------------------|----------------------|---------------|
| Wireless Module          | Avuity, LLC         | VuAi V1             | None Specified       | 2AUPP-VUAI01  |
| 2.5dBi gain Chip Antenna | Johnson Technology  | p/n 2500AT44M0400   | None Specified       | N/A           |

**4.2 Trade Name:**  
**Avuity, LLC**

**4.3 Power Supply:**  
Battery-powered

**4.4 Applicable Rules:**  
CFR 47, Part 15.249, subpart C  
CFR 47, Part 15.209

**4.5 Equipment Category:**  
Radio Transmitter-DXT

**4.6 Accessories:** None

**4.7 Test Item Condition:**  
The equipment to be tested was received in good condition.

**4.8 Testing Algorithm:**  
EUT was set to transmit continuously. Readings were taken at low, mid and high channels to determine worst case spurious emissions. Low channel (2402 MHz) was determined to be worst case. Measurement table includes results for all channels.



Order Number: F2P21720

Applicant: Avuity, LLC

Model: VuAi V1

## 5.0 TEST EQUIPMENT USED

| Equipment Type                  | Asset Number           | Manufacturer       | Model                       | Serial Number                                    | Calibration Due Date |
|---------------------------------|------------------------|--------------------|-----------------------------|--|----------------------|
| Shielded Chamber 2014           | CL166-E                | AlbatrossProjects  | B83117-DF435-T261           | US140023   | Oct. 31, 2019        |
| Shield Room                     | 0175-3V                | Ray Proof          | N/A                         | 11645  | June 23, 2020        |
| Temp./Hum. Recorder             | CL261                  | Extech             | 445814                      | 04   | Feb. 12, 2021        |
| Receiver                        | CL151                  | Rohde & Schwarz    | ESU40                       | 100319   | Oct. 21, 2020        |
| Antenna, JB3 Combination        | CL175                  | Sunol Sciences     | JB3                         | A030315  | Oct. 11, 2019        |
| Low Loss Cable Set              | --                     | Pasternack         | PE3C0666-252 / PE3C066-50CM | None Spec.                                       | July 16, 2020        |
| Horn Antenna                    | CL098                  | Emco               | 3115                        | 9809-5580  | Jan. 31, 2021        |
| Pre-amplifier                   | CL153                  | Agilent            | 83006-69007                 | MY39500791                                       | Aug. 5, 2020         |
| Amplifier w/Monopole & 18" Loop | CL163-Loop             | A.H. Systems, Inc. | EHA-52B                     | 100  | July 24, 2020        |
| Antenna, Horn                   | CL114                  | A.H. Systems, Inc. | SAS-572                     | 237  | Feb. 4, 2021         |
| Software:                       | Tile Version 3.4.B.3.  |                    |                             | Software Verified: Sept. 18, 2019                |                      |
| Software                        | EMC 32, Version 8.53.0 |                    |                             | Software Verified: Sept. 18, 2019, Jan. 12, 2021 |                      |

## 6 FIELD STRENGTH OF EMISSIONS FROM INTENTIONAL RADIATORS

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--|--|
| 902-928 MHz           | 50   | 500  |
| 2400-2483.5 MHz       | 50   | 500  |
| 5725-5875 MHz         | 50   | 500  |
| 24.0-24.25 GHz        | 250  | 2500   |

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

NOTE: During the pre-scan evaluation, the EUT was rotated in all possible directions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions.



Order Number: F2P21720

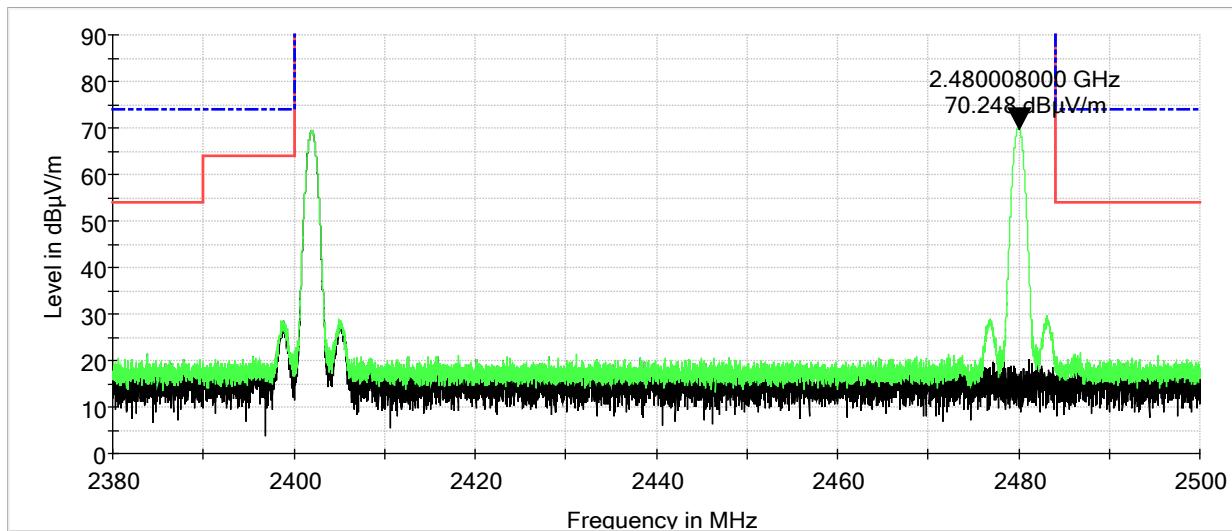
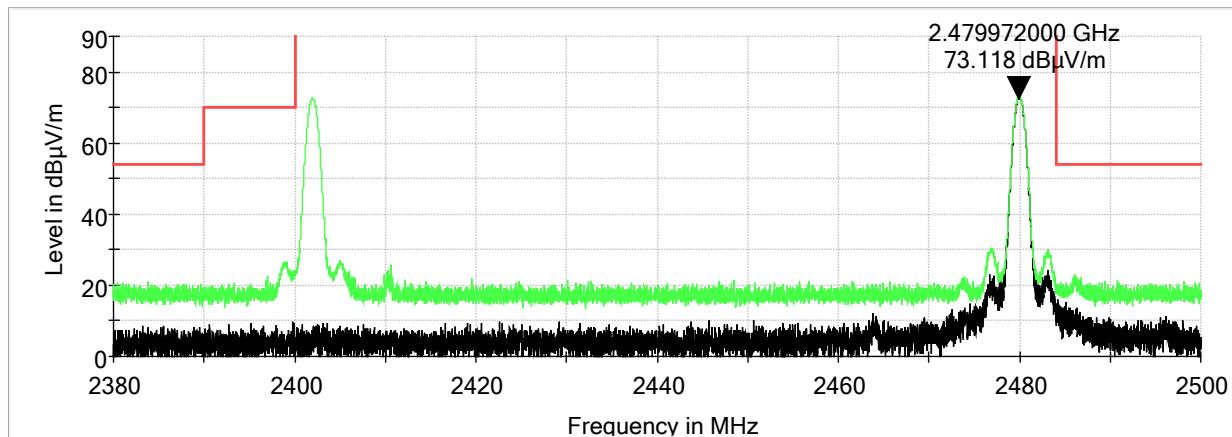
Applicant: Avuity, LLC

Model: VuAi V1

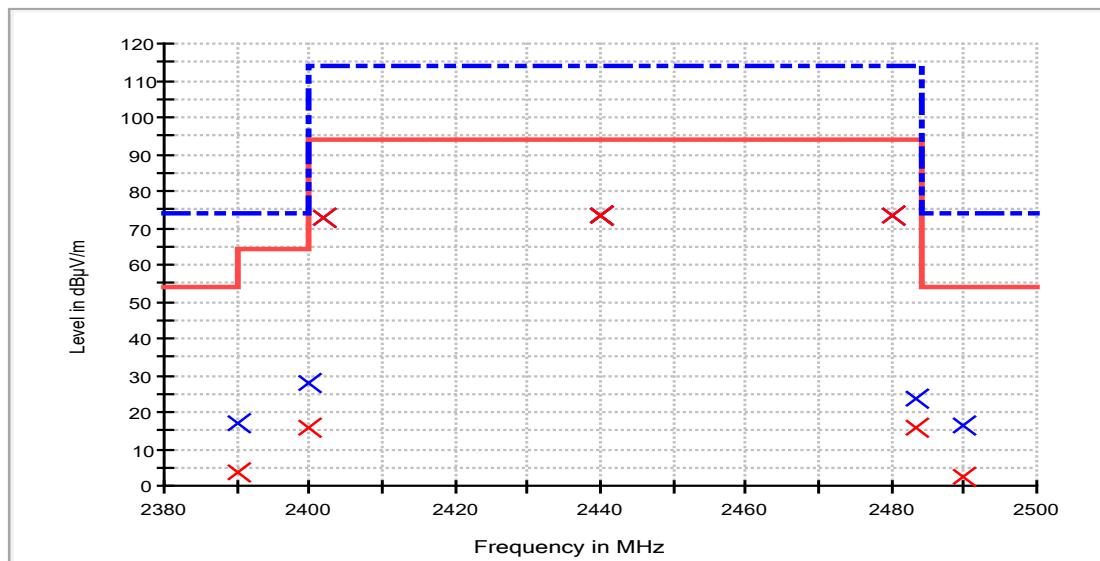
## 6.1 Test Data - Field Strength of Emissions from Intentional Radiators

|               |                       |                    |            |
|---------------|-----------------------|--------------------|------------|
| Test Date(s): | Jan. 19, 2021         | Test Engineer(s):  | J. Chiller |
| Standards:    | CFR 47 Part 15.249(a) | Air Temperature:   | 21.3°C     |
|               |                       | Relative Humidity: | 38%        |

| Test                                  | Low Channel<br>(2402 MHz)        | Mid Channel<br>(2440 MHz)        | High Channel<br>(2480 MHz)       |
|---------------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Peak Field Strength of Fundamental    | 72.90 dB $\mu$ V/m,<br>4.42 mV/m | 73.10 dB $\mu$ V/m,<br>4.52 mV/m | 73.30 dB $\mu$ V/m,<br>4.63 mV/m |
| Peak Limit for Fundamental            | 114 dB $\mu$ V/m,<br>501 mV/m    | 114 dB $\mu$ V/m,<br>501 mV/m    | 114 dB $\mu$ V/m,<br>501 mV/m    |
| Average Field Strength of Fundamental | 72.90 dB $\mu$ V/m,<br>4.42 mV/m | 73.10 dB $\mu$ V/m,<br>4.52 mV/m | 73.30 dB $\mu$ V/m,<br>4.63 mV/m |
| Average Limit for Fundamental         | 94 dB $\mu$ V/m,<br>50 mV/m      | 94 dB $\mu$ V/m,<br>50 mV/m      | 94 dB $\mu$ V/m,<br>50 mV/m      |

**Band Edge, Vertical****Band Edge, Horizontal**

### Band Edge, Measurements



### MaxPeak

| Frequency (MHz) | Antenna Polarization | Antenna Height (cm) | Azimuth (deg) | Reading (dBµV) | Cable Loss & Antenna Factor (dB) | Emission (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|----------------------|---------------------|---------------|----------------|----------------------------------|-------------------|----------------|-------------|
| 2400.00         | H                    | 100.00              | 0.00          | 29.7           | -2.1                             | 27.60             | 74.0           | -46.4       |
| 2402.00         | H                    | 100.00              | 0.00          | 74.7           | -1.9                             | 72.80             | 114.0          | -41.2       |
| 2440.00         | H                    | 150.00              | 0.00          | 75.2           | -2.1                             | 73.10             | 114.0          | -40.9       |
| 2480.00         | H                    | 275.00              | 0.00          | 75.0           | -1.7                             | 73.30             | 114.0          | -40.7       |
| 2483.50         | H                    | 275.00              | 0.00          | 25.5           | -1.6                             | 23.90             | 74.0           | -50.1       |

### AVG

| Frequency (MHz) | Antenna Polarization | Antenna Height (cm) | Azimuth (deg) | Reading (dBµV) | Cable Loss & Antenna Factor (dB) | Emission (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|----------------------|---------------------|---------------|----------------|----------------------------------|-------------------|----------------|-------------|
| 2400.00         | H                    | 100.00              | 0.00          | 18.0           | -2.1                             | 15.90             | 54.0           | -38.1       |
| 2402.00         | H                    | 100.00              | 0.00          | 74.8           | -1.9                             | 72.90             | 94.0           | -21.1       |
| 2440.00         | H                    | 150.00              | 0.00          | 75.2           | -2.1                             | 73.10             | 94.0           | -20.9       |
| 2480.00         | H                    | 275.00              | 0.00          | 75.0           | -1.7                             | 73.30             | 94.0           | -20.7       |
| 2483.50         | H                    | 275.00              | 0.00          | 17.1           | -1.6                             | 15.50             | 54.0           | -38.5       |



**Order Number: F2P21720**

**Applicant: Avuity, LLC**

**Model: VuAi V1**

## **7 RADIATED SPURIOUS EMISSION**

Notes: Plots are peak, max hold pre-scan data included only to determine what frequencies to investigate and measure. During the pre-scan evaluation, the EUT was rotated in all possible directions to find the maximum emissions. All three orthogonal positions were checked and the orthogonal position that showed the highest emissions was used. At some frequencies, no emissions from the EUT were measurable over the ambient noise floor. The readings did not change with EUT on and EUT off.

At least 6 of the highest frequencies were measured per ANSI 63.10 semi-anechoic chamber. From 9 kHz to 30 MHz the EUT was scanned with a loop antenna in all 3 orthogonal positions and there were no emissions above the ambient noise floor. Frequencies below 1 GHz were measured using a quasi-peak detector. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions. Some of the frequencies did not change with the EUT on or off. At those frequencies, the test distance was shortened to 1 meter and still no emissions from the EUT were visible or over the ambient or limit.

Note: The following tables include the significant emissions from the EUT. No other significant emissions were within 20dB of the limit.

### **7.1 Requirements:**

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



Order Number: F2P21720

Applicant: Avuity, LLC

Model: VuAi V1

## 7.2 Radiated Spurious Emission Test Data

|                    |   |                           |            |
|--------------------|---|---------------------------|------------|
| <b>Test Dates:</b> | Sept. 18, 2019                                    | <b>Test Engineers:</b>    | J. Chiller |
| <b>Standards:</b>  | CFR 47 Part 15.249(d);<br>Part 15.209 / KDB558074 | <b>Air Temperature:</b>   | 21.6°C     |
|                    |   | <b>Relative Humidity:</b> | 47%        |

Notes: Plots are peak, max hold data. During the evaluation, the EUT was rotated in all possible directions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions. Measurements were taken on High, Mid, and Low channels were tested and graphs of results are shown below. From 9kHz to 30 MHz, the worse-case channel was used for the graphs. The measurement table includes data from all three channels.

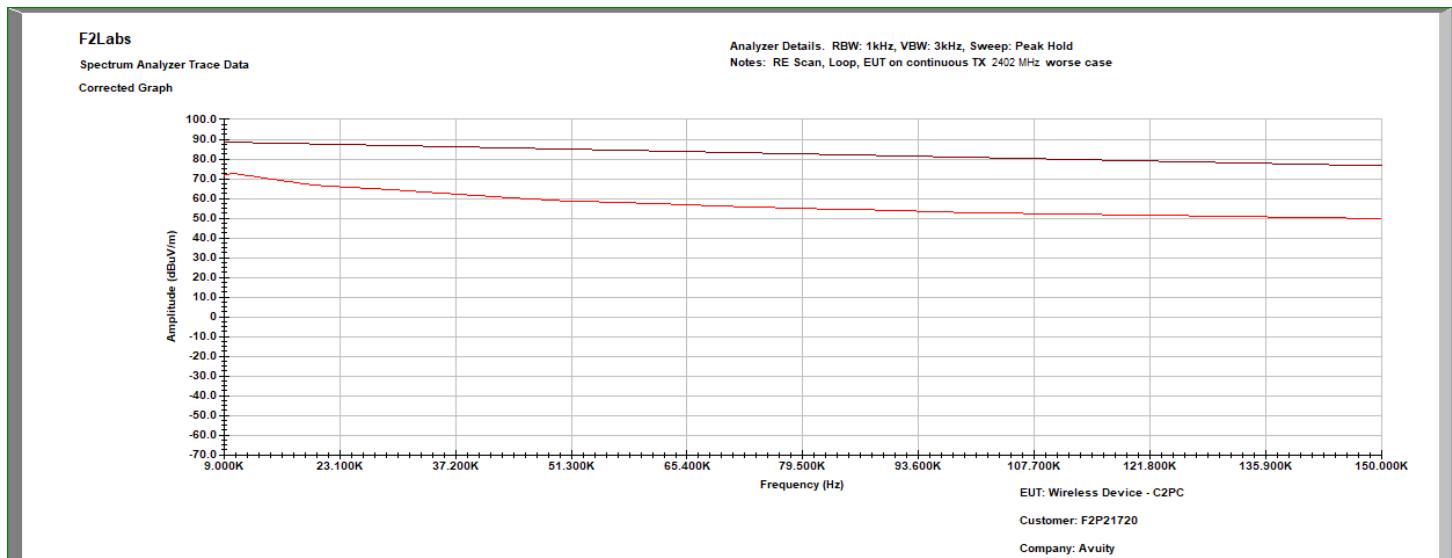


Order Number: F2P21720

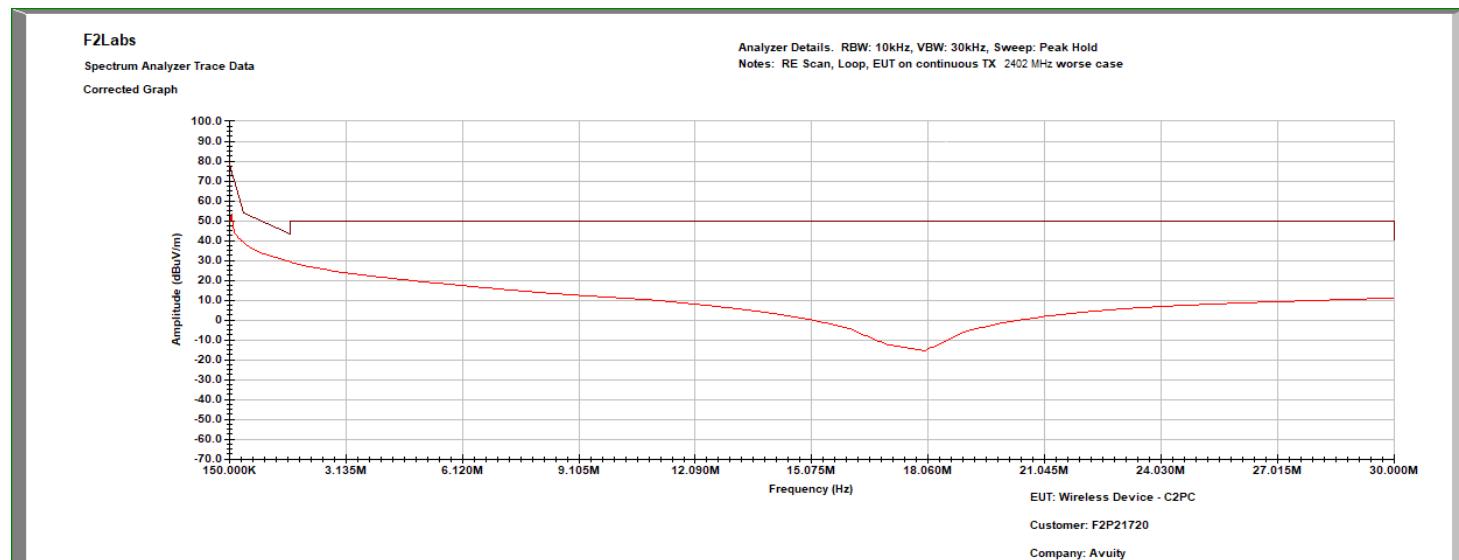
Applicant: Avuity, LLC

Model: VuAi V1

### Loop Antenna, 0.009 MHz to 0.15 MHz

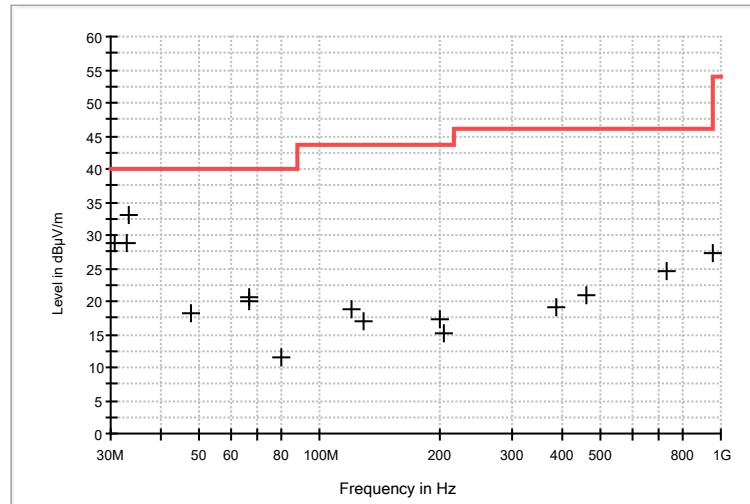


### Loop Antenna, 0.15 MHz to 30 MHz

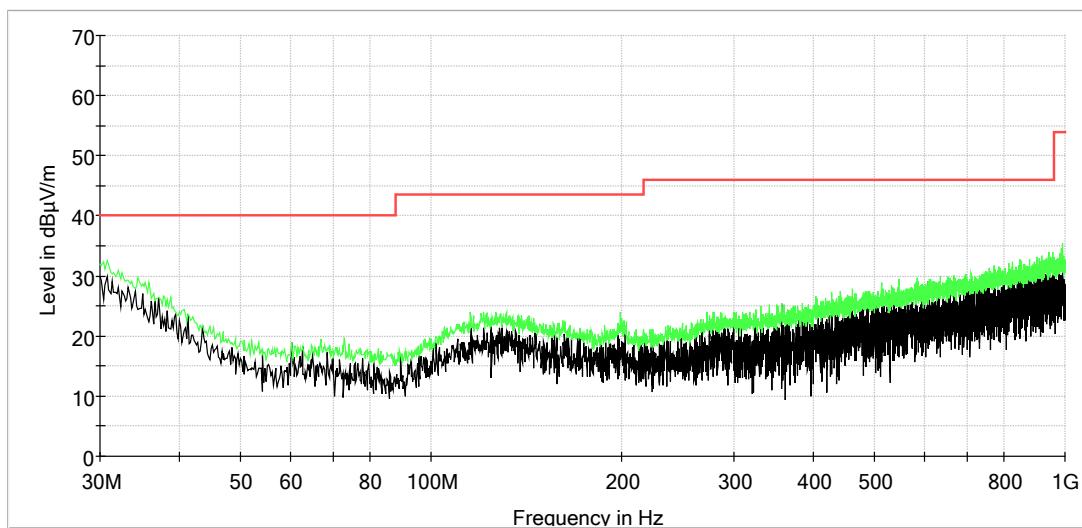
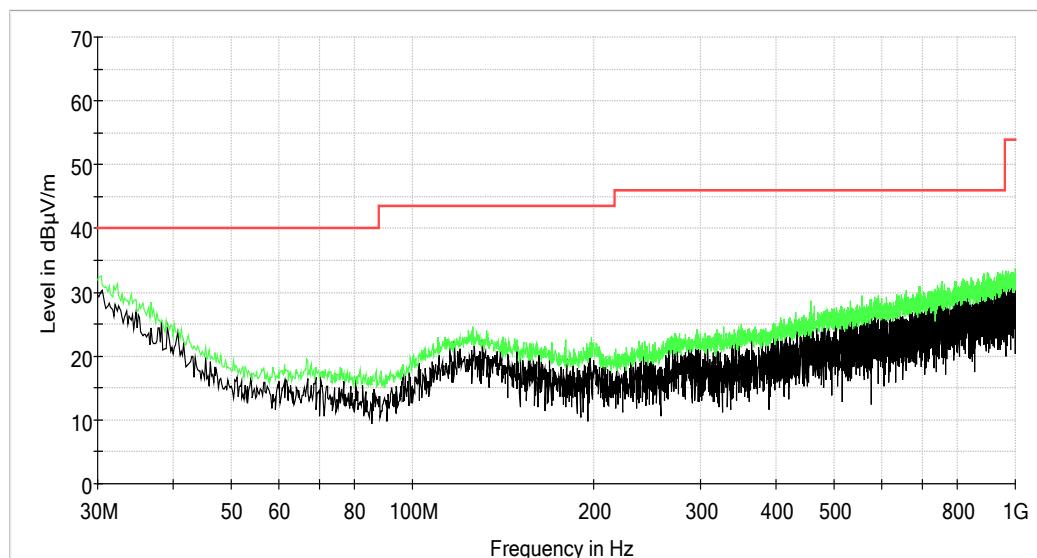


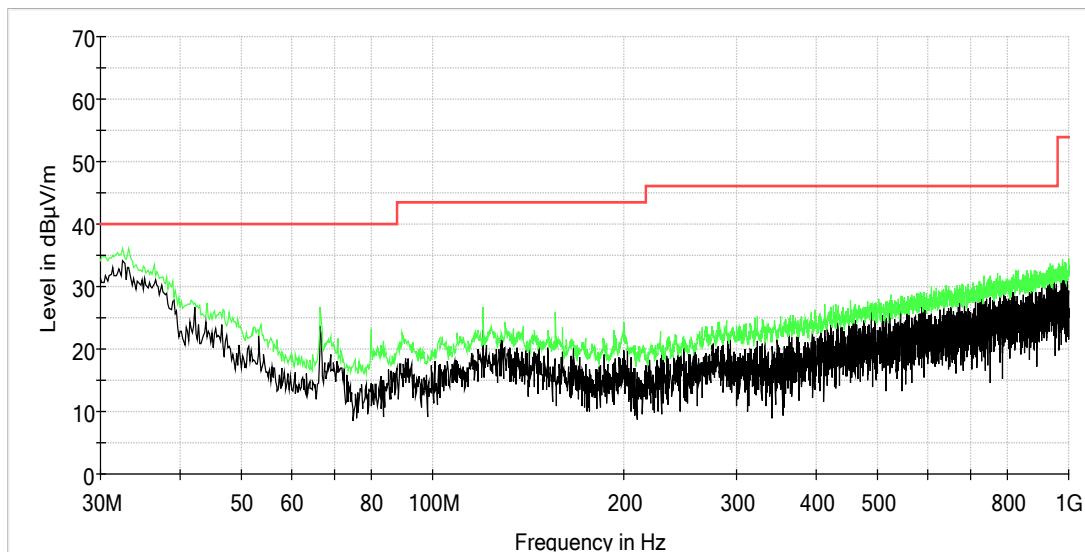
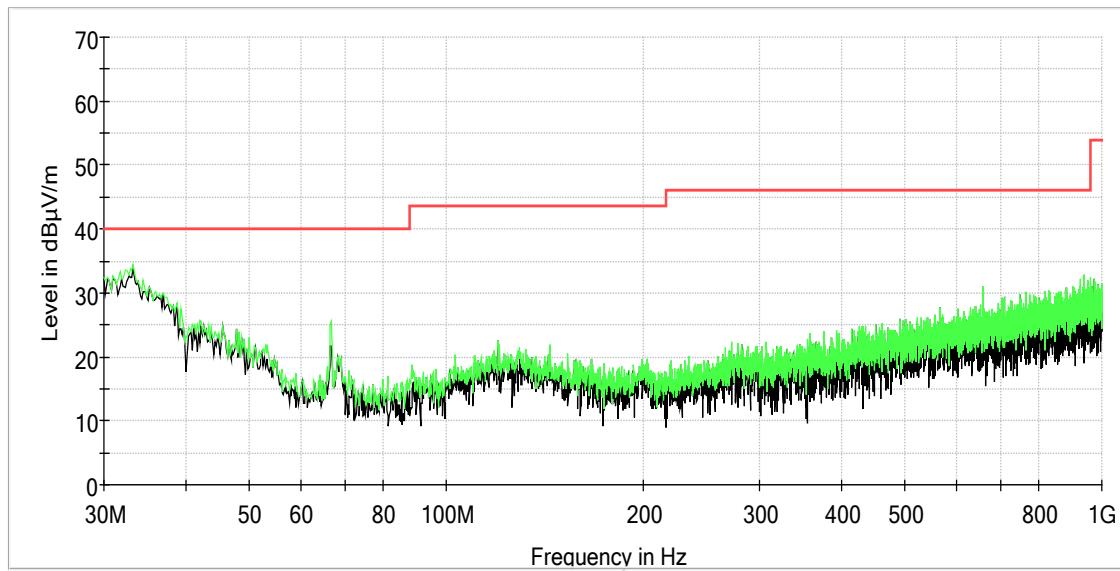
**Measurements: 30 MHz to 1000 MHz**

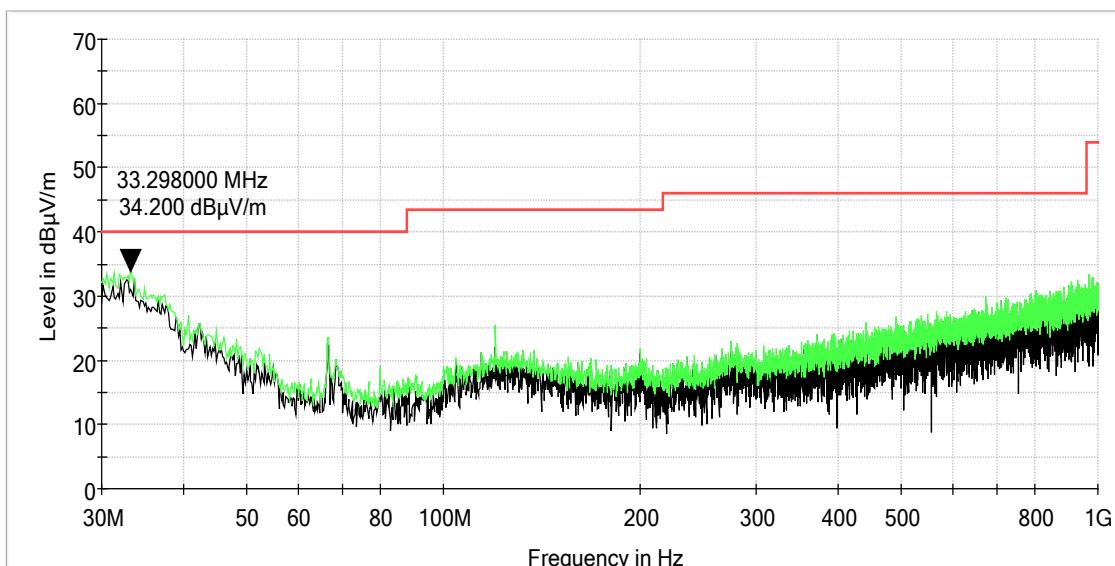
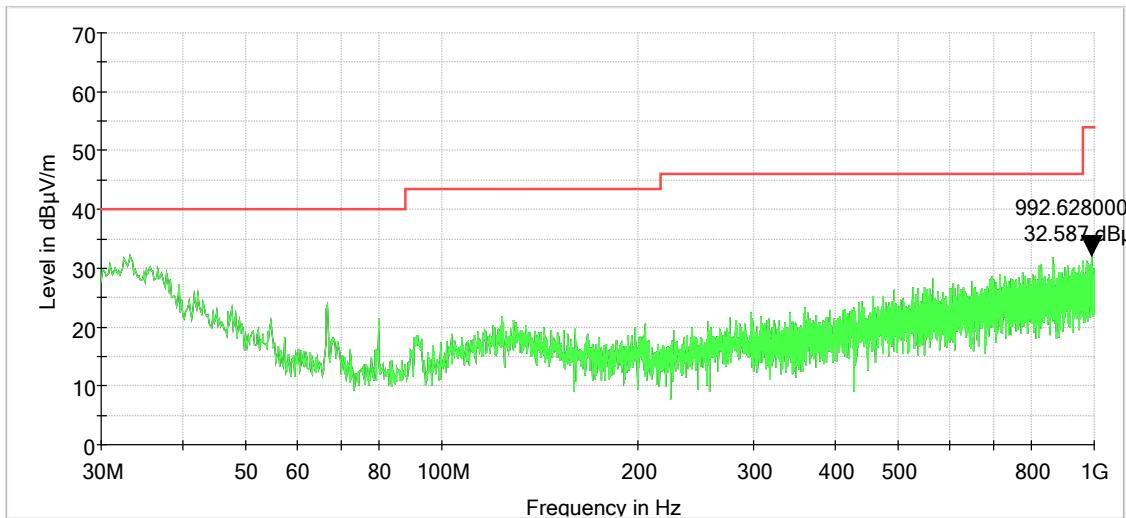
| Frequency (MHz) | Antenna Polarization | Antenna Height (em) | Azimuth (deg) | Reading (dB $\mu$ V) | Correction Factors (dB) | Emission (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|----------------------|---------------------|---------------|----------------------|-------------------------|-------------------------|----------------------|-------------|
| 30.76           | V                    | 100.00              | 0.00          | 22.50                | 6.4                     | 28.90                   | 40.0                 | -11.1       |
| 32.92           | H                    | 100.00              | 0.00          | 24.00                | 4.7                     | 28.70                   | 40.0                 | -11.3       |
| 33.28           | V                    | 100.00              | 0.00          | 28.50                | 4.4                     | 32.90                   | 40.0                 | -7.1        |
| 47.48           | H                    | 100.00              | 0.00          | 23.80                | -5.5                    | 18.30                   | 40.0                 | -21.7       |
| 66.48           | V                    | 100.00              | 0.00          | 27.80                | -7.2                    | 20.60                   | 40.0                 | -19.4       |
| 66.68           | H                    | 100.00              | 0.00          | 27.10                | -7.2                    | 19.90                   | 40.0                 | -20.1       |
| 79.84           | H                    | 100.00              | 0.00          | 19.20                | -7.6                    | 11.60                   | 40.0                 | -28.4       |
| 120             | V                    | 100.00              | 0.00          | 20.70                | -1.8                    | 18.90                   | 43.5                 | -24.6       |
| 128.76          | H                    | 100.00              | 0.00          | 18.70                | -1.7                    | 17.00                   | 43.5                 | -26.5       |
| 199.96          | V                    | 100.00              | 0.00          | 19.80                | -2.5                    | 17.30                   | 43.5                 | -26.2       |
| 204.6           | H                    | 100.00              | 0.00          | 18.90                | -3.9                    | 15.00                   | 43.5                 | -28.5       |
| 390.08          | H                    | 100.00              | 0.00          | 18.80                | 0.2                     | 19.00                   | 46.0                 | -27.0       |
| 462.24          | V                    | 100.00              | 0.00          | 18.90                | 2.1                     | 21.00                   | 46.0                 | -25.0       |
| 733.44          | H                    | 100.00              | 0.00          | 19.00                | 5.5                     | 24.50                   | 46.0                 | -21.5       |
| 952.68          | V                    | 100.00              | 0.00          | 19.50                | 7.8                     | 27.30                   | 46.0                 | -18.7       |

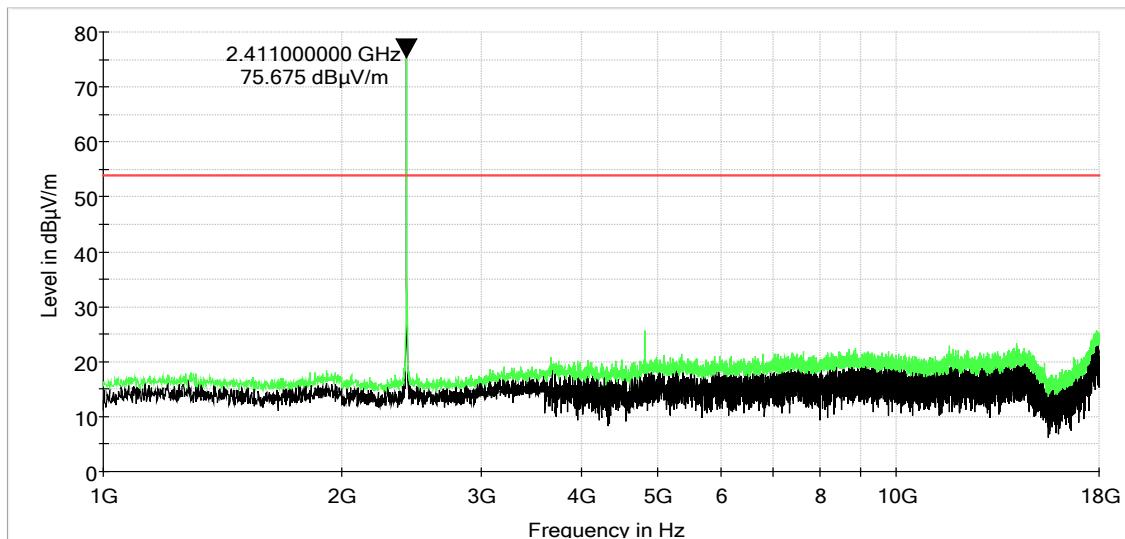
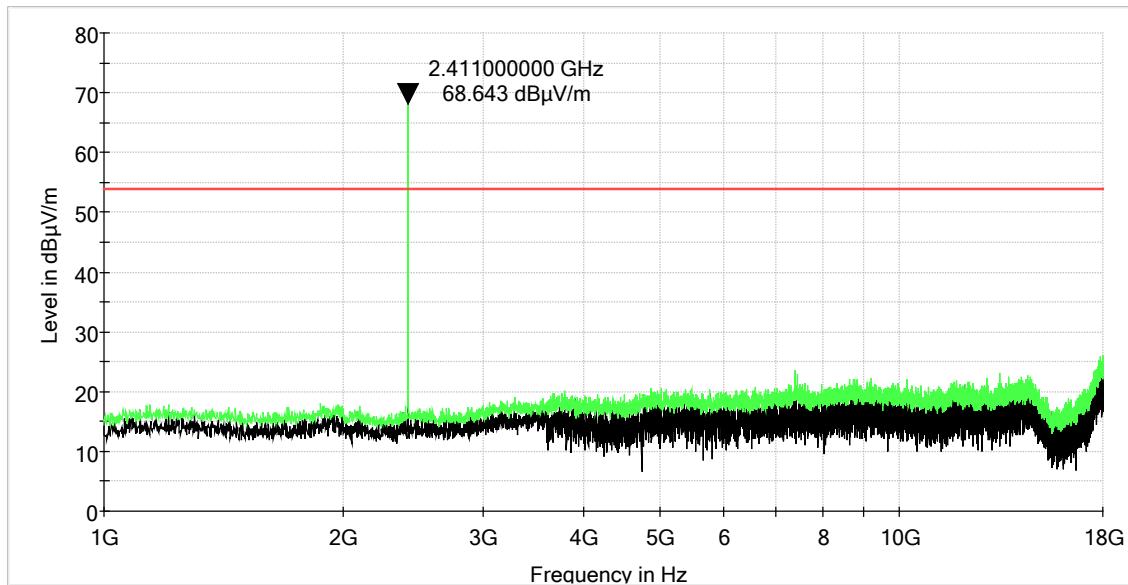


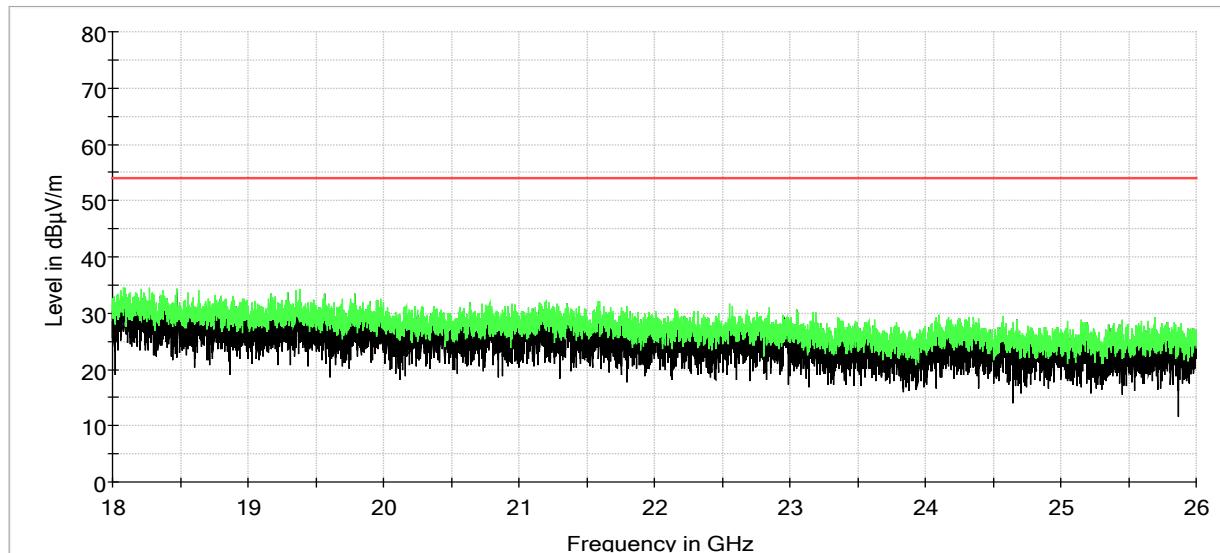
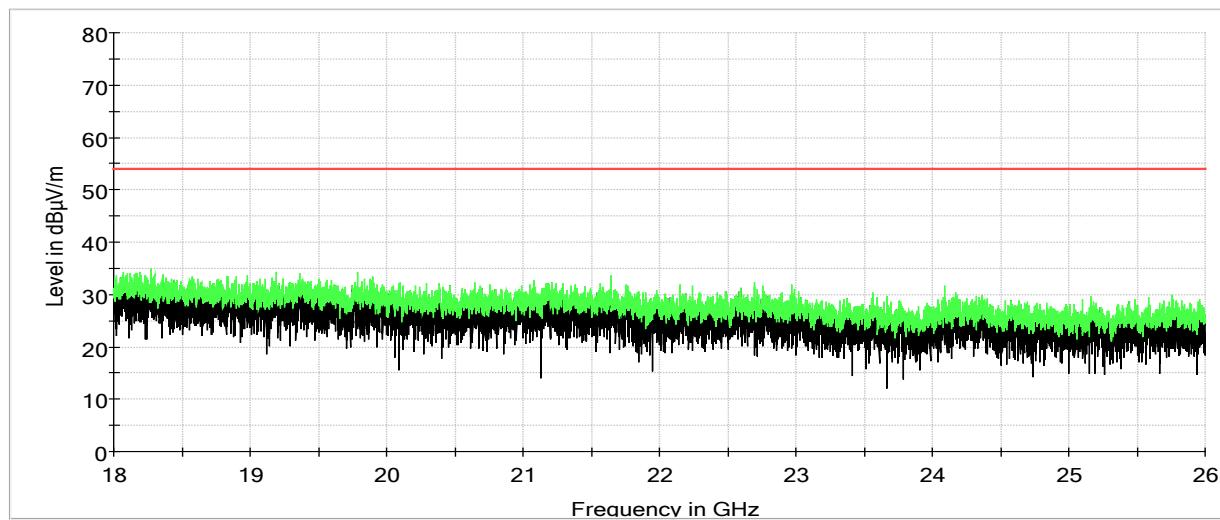
Note: In plots that follow, black waveform represents the active scan, green waveform represents MaxPk emissions readings with EUT on, red line is the limit line.

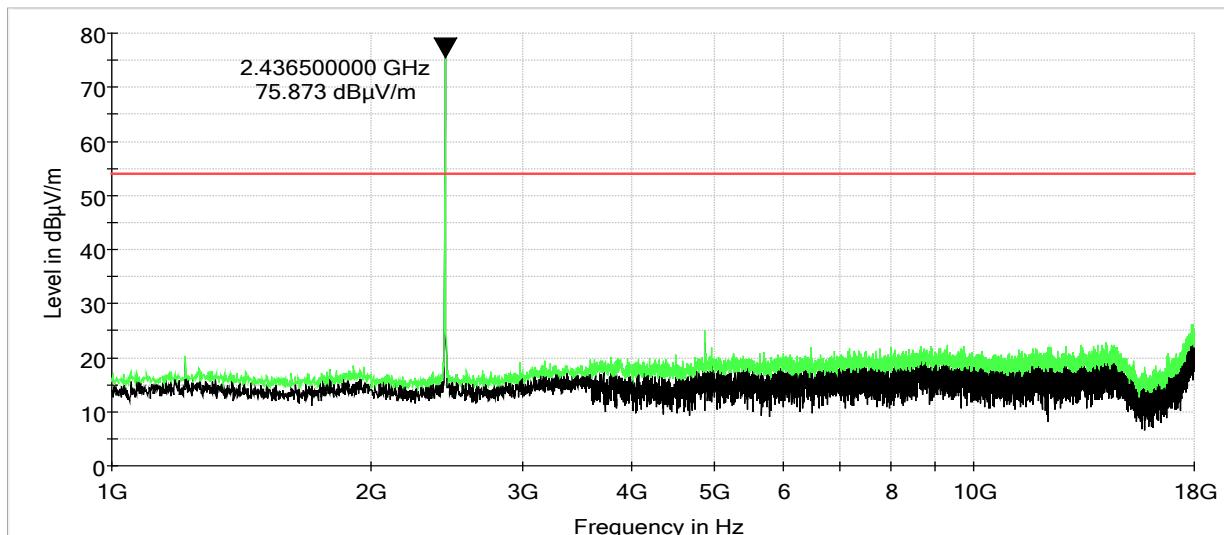
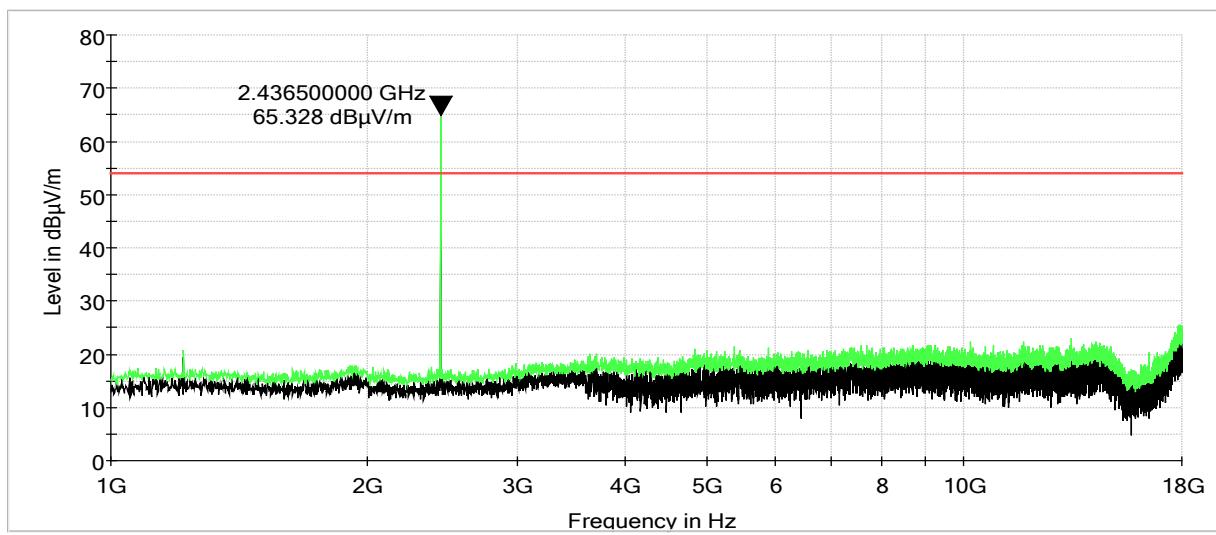
**Low Channel: Characterization Scan, 30 MHz to 1000 MHz, Vertical****Low Channel: Characterization Scan, 30 MHz to 1000 MHz, Horizontal**

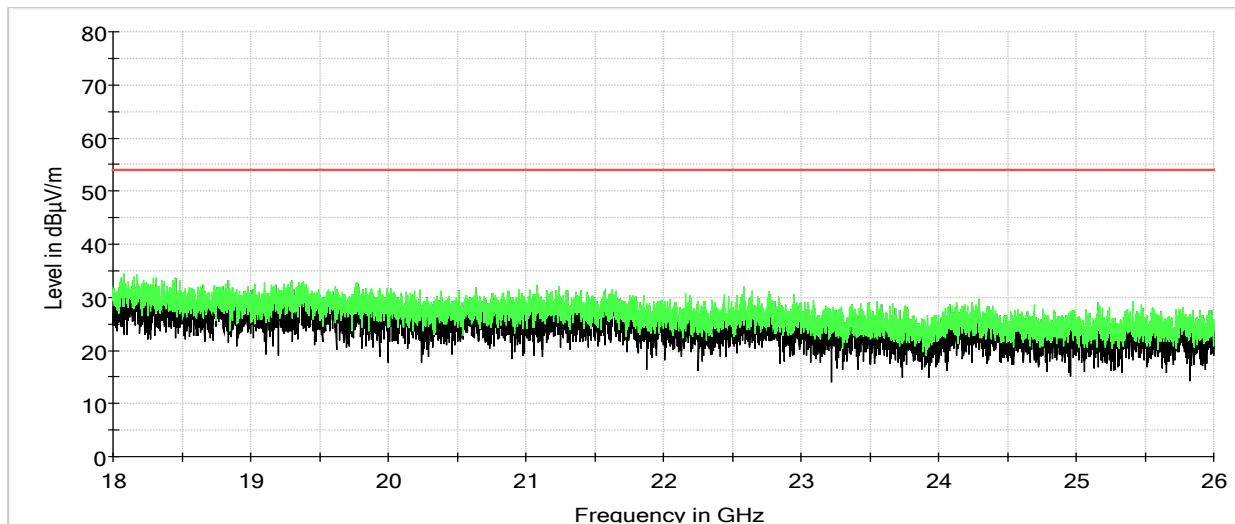
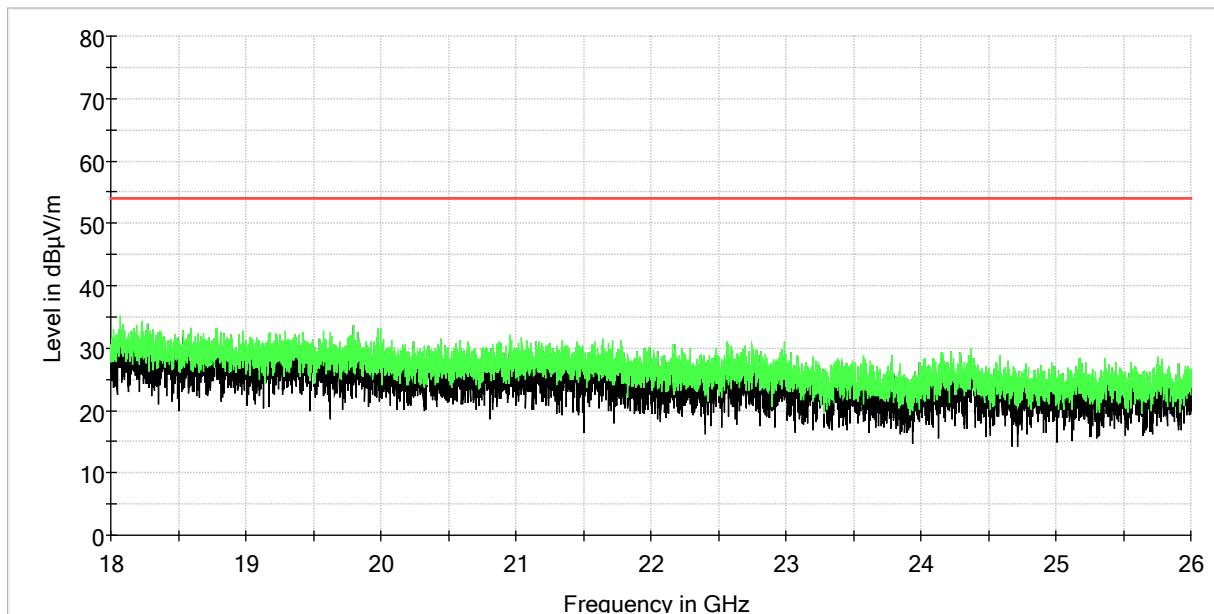
**Mid Channel: Characterization Scan, 30 MHz to 1000 MHz, Vertical****Mid Channel: Characterization Scan, 30 MHz to 1000 MHz, Horizontal**

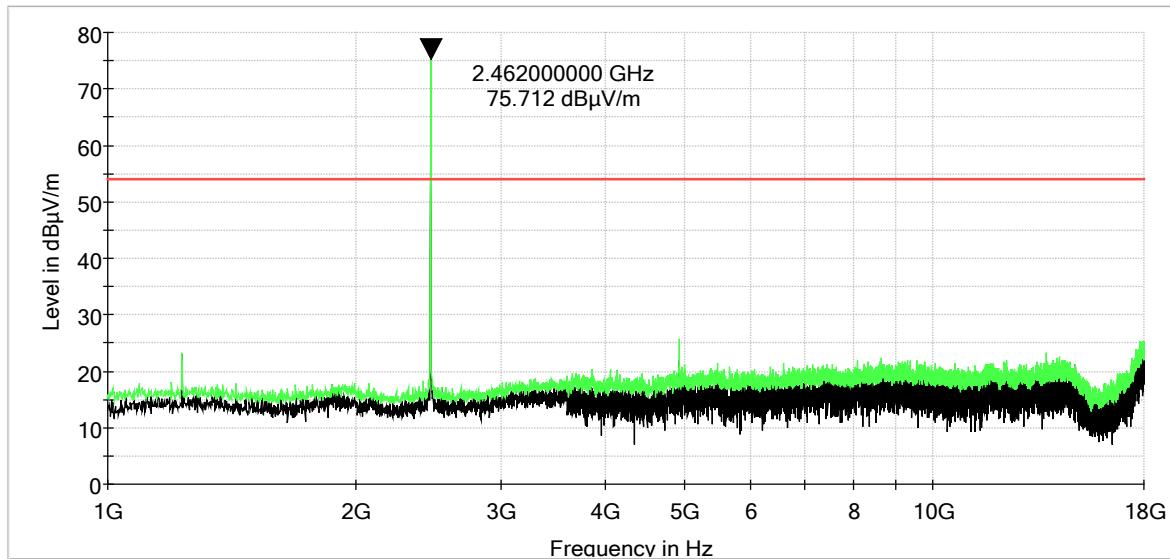
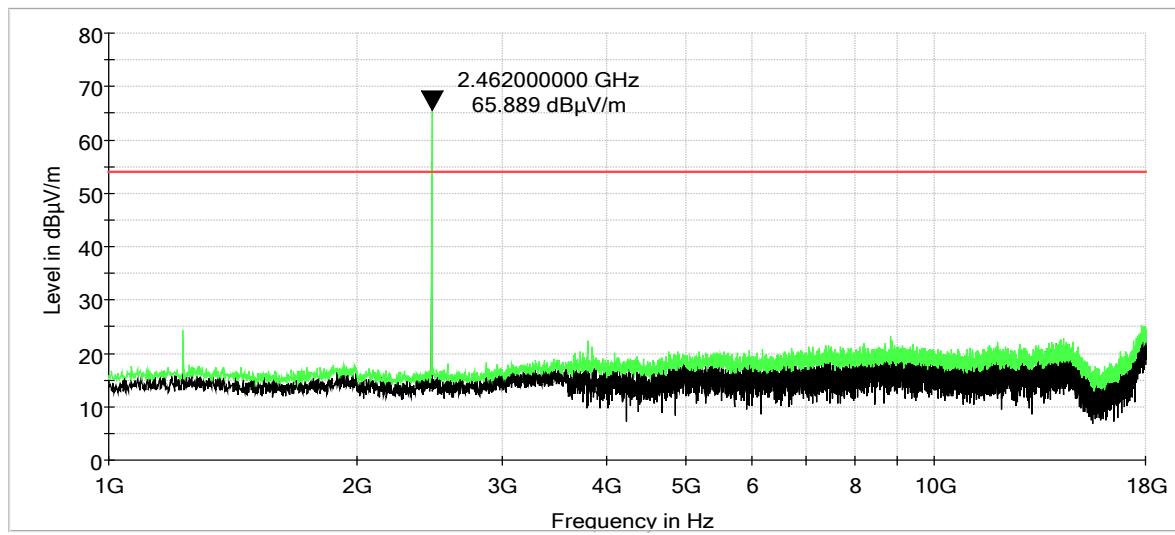
**High Channel: Characterization Scan, 30 MHz to 1000 MHz, Vertical****High Channel: Characterization Scan, 30 MHz to 1000 MHz, Horizontal**

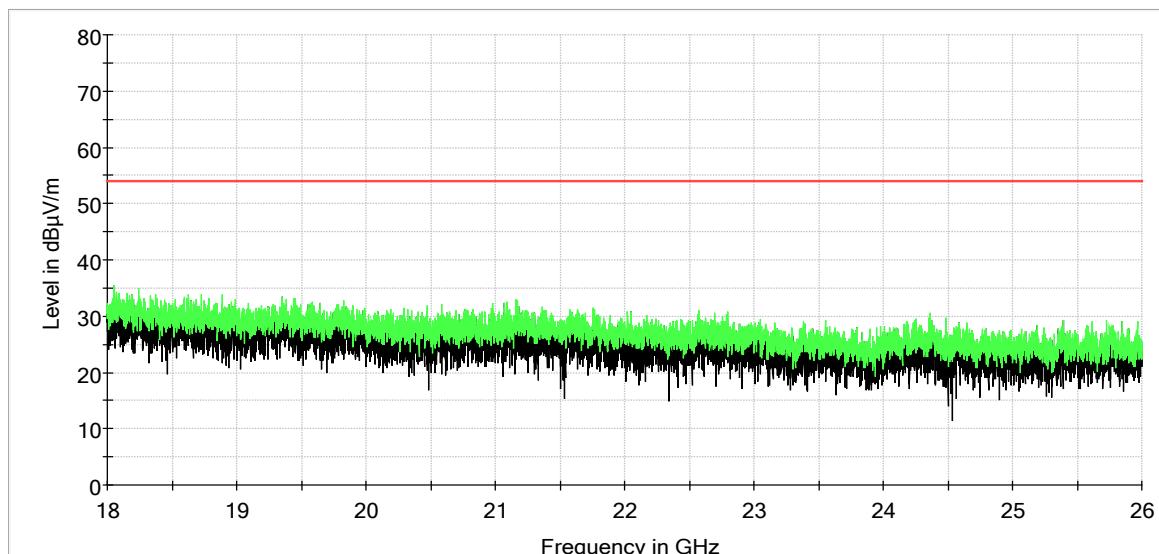
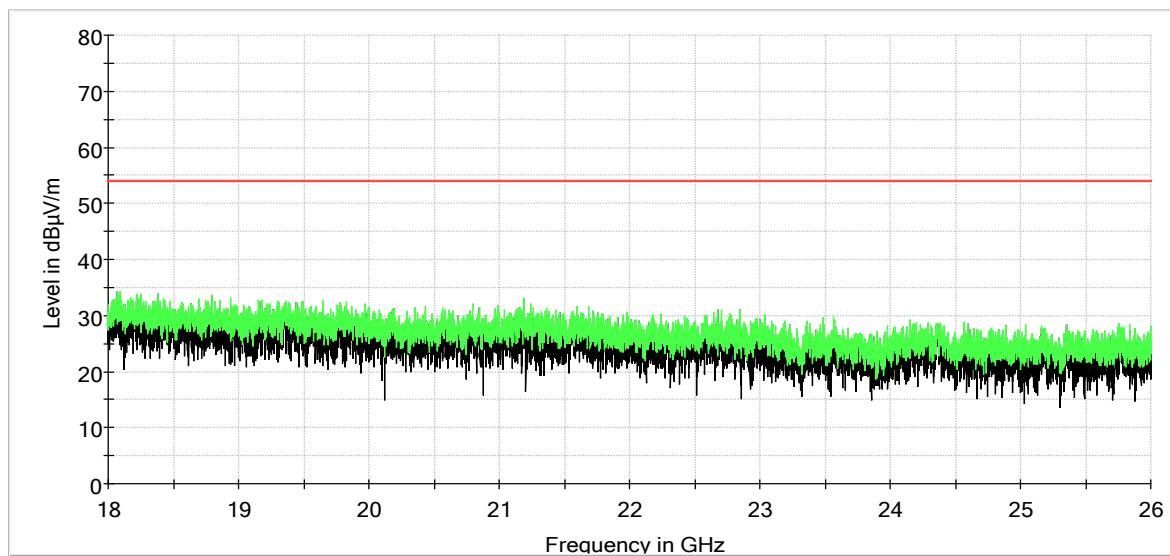
**Low Channel: 1 GHz to 18 GHz, Vertical****Low Channel: 1 GHz to 18 GHz, Horizontal**

**Low Channel: 18 GHz to 26 GHz, Vertical****Low Channel: 18 GHz to 26 GHz, Horizontal**

**Mid Channel: 1 GHz to 18 GHz, Vertical****Mid Channel: 1 GHz to 18 GHz, Horizontal**

**Mid Channel: 18 GHz to 26 GHz, Vertical****Mid Channel: 18 GHz to 26 GHz, Horizontal**

**High Channel: 1 GHz to 18 GHz, Vertical****High Channel: 1 GHz to 18 GHz, Horizontal**

**High Channel: 18 GHz to 26 GHz, Vertical****High Channel: 18 GHz to 26 GHz, Horizontal**



Order Number: F2P21720

Applicant: Avuity, LLC

Model: VuAi V1

## 8 MPE CALCULATION

The MPE calculation below uses the output power of this module with max power of a Wi-Fi module and 6dBi gain of antenna as worse case.

### MPE RF EXPOSURE FOR DEVICE

**Distance Used:** 20cm

**Limit:** 1mW/cm<sup>2</sup>

**Formula Used for Result:** 
$$\frac{\text{E.I.R.P.}}{4 \pi R^2}$$

**Results:** E.I.R.P = 4000.0046mW with worse case Wi-Fi

E.I.R.P of 0.0046mW was determined by using the worst case E.I.R.P., 73.3 dBuV/m @ 3m, which equals 0.0046V/m. Using C63.10 Annex G2, then:

**73.3 dBuV/m = 0.0046V/m**

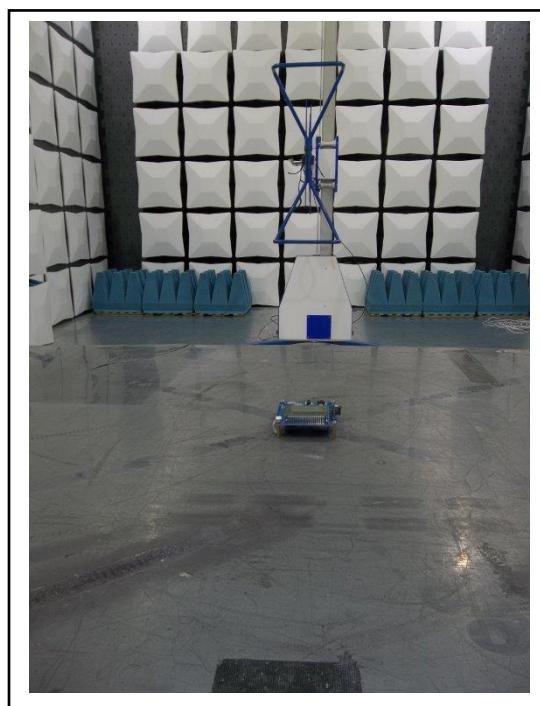
**E.I.R.P. = (0.0046V/m x 3) ^2 / 30 = 0.0000046W = 0.0046mW**

**Wi-Fi: Max E.I.R.P. = 4000mW**

**Combined E.I.R.P. (Wi-Fi + Module) = 4000mW+ 0.0046mW= 4000.0046mW**

**Combined MPE (Maximum allowed Wi-Fi + Module) =  
4000.0046mW / (4 (3.1416)(20 x 20)) =  
4000.0046/5026 = 0.7958 mW/cm<sup>2</sup>.**

**The calculated combined MPE is below the MPE limit when the Limited Modular Approved module is co-located with a Wi-Fi device operating in Maximum allowed E.I.R.P.**

**9 PHOTOGRAHPS – TEST SETUP****Loop Antenna****Less Than 1 GHz**

**Above 1 GHz**

