



FCC REPORT

Report Reference No..... : CHTEW19110110
Project No..... : SHT1909070704EW
FCC ID..... : 2AUSV-ETERAE880

Report verification:



Applicant's name..... : SINOTECH R&D GROUP LIMITED

Address..... : Room 2203, 22/F, WAH HING COMMERCIAL BUILDING, 283 LOCKHART ROAD, WAN CHAI, HONG KONG.

Manufacturer..... : SINOTECH R&D GROUP LIMITED

Address..... : Room 2203, 22/F, WAH HING COMMERCIAL BUILDING, 283 LOCKHART ROAD, WAN CHAI, HONG KONG.

Test item description : Smart Phone

Trade Mark : eTera

Model/Type reference..... : E880

Listed Model(s) : -

Standard : FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22
FCC CFR Title 47 Part 24
FCC CFR Title 47 Part 27

Date of receipt of test sample..... : Sep 25, 2019

Date of testing..... : Sep 26, 2019- Nov 18, 2019

Date of issue..... : Nov 19, 2019

Result..... : Pass

Compiled by
(position+printedname+signature).... : File administrators Silvia Li

Silvia Li

Supervised by
(position+printedname+signature).... : Project Engineer Aaron Fang

Aaron Fang

Approved by
(position+printedname+signature).... : Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Applicable Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	7
3.4.	EUT operation mode	8
3.5.	EUT configuration	9
3.6.	Modifications	9
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>10</u>
4.1.	Address of the test laboratory	10
4.2.	Test Facility	10
4.3.	Equipments Used during the Test	11
4.4.	Environmental conditions	12
4.5.	Statement of the measurement uncertainty	12
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>13</u>
5.1.	Conducted Output Power	13
5.2.	Peak-to-Average Ratio	14
5.3.	99% Occupied Bandwidth & 26 dB Bandwidth	15
5.4.	Band Edge	16
5.5.	Conducted Spurious Emissions	17
5.6.	Frequency stability VS Temperature measurement	18
5.7.	Frequency stability VS Voltage measurement	19
5.8.	ERP and EIRP	20
5.9.	Radiated Spurious Emission	29
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>42</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS</u>	<u>42</u>
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>42</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Rules Part 2:](#) FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Rules Part 22:](#) PUBLIC MOBILE SERVICES

[FCC Rules Part 24:](#) PERSONAL COMMUNICATIONS SERVICES

[FCC Rules Part 27:](#) MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[ANSI C63.26: 2015:](#) American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03:](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2019-11-19	Original

2. Test Description

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50	Pass	Jiongsheng Feng
Peak-to-Average Ratio	Part 24.232 Part 27.50	Pass	Jiongsheng Feng
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53	Pass	Jiongsheng Feng
Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass	Jiongsheng Feng
Conducted Spurious Emissions	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass	Jiongsheng Feng
Frequency stability VS Temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	Pass	Jiongsheng Feng
Frequency stability VS Voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	Pass	Jiongsheng Feng
ERP and EIRP	Part 22.913(a) Part 24.232(b) Part 27.50	Pass	Pan Xie
Radiated Spurious Emissions	Part 2.1053 Part 22.917 Part 24.238 Part 27.53	Pass	Pan Xie

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	SINOTECH R&D GROUP LIMITED
Address:	Room 2203, 22/F, WAH HING COMMERCIAL BUILDING, 283 LOCKHART ROAD, WAN CHAI, HONG KONG.
Manufacturer:	SINOTECH R&D GROUP LIMITED
Address:	Room 2203, 22/F, WAH HING COMMERCIAL BUILDING, 283 LOCKHART ROAD, WAN CHAI, HONG KONG.

3.2. Product Description

Name of EUT:	Smart Phone		
Trade Mark:	eTera		
Model No.:	E880		
Listed Model(s):	-		
IMEI Code:	Conducted: 352164110004109 Radiated: 352164110004601		
SIM Information:	Support Two SIM Card		
Power supply:	DC 3.8V		
Adapter information:	Moel:MR-0502000US Input:100-240Va.c., 50/60Hz, 0.3A Output:5.0Vd.c., 2.0A		
Hardware version:	K920_MB_P3_V03		
Software version:	E880_EU_GMS_V001_20190929		
4G			
Operation Band:	☒ FDD Band 2 ☒ FDD Band 7	☒ FDD Band 4 ☒ FDD Band 17	☒ FDD Band 5
Transmit frequency:	FDD Band 2: FDD Band 4: FDD Band 5: FDD Band 7: FDD Band 17:	1850.7 MHz – 1909.3 MHz 1710.7 MHz – 1754.3 MHz 824.7 MHz – 848.3 MHz 2502.5 MHz – 2567.5 MHz 706.5 MHz – 713.5 MHz	
Receive frequency:	FDD Band 2: FDD Band 4: FDD Band 5: FDD Band 7: FDD Band 17:	1930.7 MHz – 1989.3 MHz 2110.7 MHz – 2154.3 MHz 869.7 MHz – 893.3 MHz 2622.5 MHz – 2687.5 MHz 736.5 MHz – 743.5 MHz	

Channel bandwidth:	FDD Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz FDD Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz FDD Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz FDD Band 7: 5MHz, 10MHz, 15MHz, 20MHz FDD Band 17: 5MHz, 10MHz
Power Class:	Class 3
Modulation type:	QPSK, 16QAM
Antenna type	FPC Antenna
Antenna Gain	Band2:-1.68dBi Band4:-1.79dBi Band5:-1.60dBi Band7:-1.59dBi Band17:-1.59dBi

3.3. Operation state

➤ Test frequency list

FDD Band 2	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4 3 5 10 15 ^[1] 20 ^[1]	18607 18615 18625 18650 18675 18700	1850.7 1851.5 1852.5 1855 1857.5 1860	607 615 625 650 675 700	1930.7 1931.5 1932.5 1935 1937.5 1940
FDD Band 4	Mid Range	1.4/3/5/10 15 ^[1] /20 ^[1]	18900	1880	900	1960
	High Range	1.4 3 5 10 15 ^[1] 20 ^[1]	19193 19185 19175 19150 19125 19100	1909.3 1908.5 1907.5 1905 1902.5 1900	1193 1185 1175 1150 1125 1100	1989.3 1988.5 1987.5 1985 1982.5 1980
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.						
FDD Band 5	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4 3 5 10 15 20	19957 19965 19975 20000 20025 20050	1710.7 1711.5 1712.5 1715 1717.5 1720	1957 1965 1975 2000 2025 2050	2110.7 2111.5 2112.5 2115 2117.5 2120
FDD Band 7	Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5
	High Range	1.4 3 5 10 15 20	20393 20385 20375 20350 20325 20300	1754.3 1753.5 1752.5 1750 1747.5 1745	2393 2385 2375 2350 2325 2300	2154.3 2153.5 2152.5 2150 2147.5 2145
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.						
FDD Band 17	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	1.4 3 5 10 ^[1]	20407 20415 20425 20450	824.7 825.5 826.5 829	2407 2415 2425 2450	869.7 870.5 871.5 874
FDD Band 17	Mid Range	1.4/3/5 10 ^[1]	20525	836.5	2525	881.5
	High Range	1.4 3 5 10 ^[1]	20643 20635 20625 20600	848.3 847.5 846.5 844	2643 2635 2625 2600	893.3 892.5 891.5 889
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.						
FDD Band 17	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	5 10 15 20 ^[1]	20775 20800 20825 20850	2502.5 2505 2507.5 2510	2775 2800 2825 2850	2622.5 2625 2627.5 2630
FDD Band 17	Mid Range	5/10/15 20 ^[1]	21100	2535	3100	2655
	High Range	5 10 15 20 ^[1]	21425 21400 21375 21350	2567.5 2565 2562.5 2560	3425 3400 3375 3350	2687.5 2685 2682.5 2680
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.						
FDD Band 17	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
	Low Range	5 ^[1] 10 ^[1]	23755 23780	706.5 709	5755 5780	736.5 739
FDD Band 17	Mid Range	5 ^[1] /10 ^[1]	23790	710	5790	740
	High Range	5 ^[1] 10 ^[1]	23825 23800	713.5 711	5825 5800	743.5 741
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.						

3.4. EUT operation mode

For RF test items

The EUT has been tested under typical operating condition. Testing was performed by configuring EUT to maximum output power status.

The Test EUT support two SIM card(SIM1,SIM2),so all the tests are performed at each SIM card (SIM1,SIM2) mode, the datum recorded is the worst case for all the mode at SIM1 Card mode.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full
Conducted Output Power	2	o	o	o	o	o	o	o	o	o	o	o
	4	o	o	o	o	o	o	o	o	o	o	o
	5	o	o	o	o	-	-	o	o	o	o	o
	7	-	-	o	o	o	o	o	o	o	o	o
	17	-	-	o	o	-	-	o	o	o	o	o
Peak-to-Average Ratio	2	o	o	o	o	o	o	o	o	o	-	o
	4	o	o	o	o	o	o	o	o	o	-	o
	5	o	o	o	o	-	-	o	o	o	-	o
	7	-	-	o	o	o	o	o	o	o	-	o
	17	-	-	o	o	-	-	o	o	o	-	o
99% Occupied Bandwidth & 26 dB Bandwidth	2	o	o	o	o	o	o	o	o	-	-	o
	4	o	o	o	o	o	o	o	o	-	-	o
	5	o	o	o	o	-	-	o	o	-	-	o
	7	-	-	o	o	o	o	o	o	-	-	o
	17	-	-	o	o	-	-	o	o	-	-	o
Band Edge	2	o	o	o	o	o	o	o	o	o	-	o
	4	o	o	o	o	o	o	o	o	o	-	o
	5	o	o	o	o	-	-	o	o	o	-	o
	7	-	-	o	o	o	o	o	o	o	-	o
	17	-	-	o	o	-	-	o	o	o	-	o
Conducted Spurious Emission	2	o	o	o	o	o	o	o	o	o	-	-
	4	o	o	o	o	o	o	o	o	o	-	-
	5	o	o	o	o	-	-	o	o	o	-	-
	7	-	-	o	o	o	o	o	o	o	-	-
	17	-	-	o	o	-	-	o	o	o	-	-
Frequency Stability	2	o	o	o	o	o	o	o	o	-	-	o
	4	o	o	o	o	o	o	o	o	-	-	o
	5	o	o	o	o	-	-	o	o	-	-	o
	7	-	-	o	o	o	o	o	o	-	-	o
	17	-	-	o	o	-	-	o	o	-	-	o
ERP and EIRP	2	o	o	o	o	o	o	o	o	o	-	-
	4	o	o	o	o	o	o	o	o	o	-	-
	5	o	o	o	o	-	-	o	o	o	-	-
	7	-	-	o	o	o	o	o	o	o	-	-
	17	-	-	o	o	-	-	o	o	o	-	-
Radiated Spurious Emission	2	o	o	o	o	o	o	o	-	o	-	-
	4	o	o	o	o	o	o	o	-	o	-	-
	5	o	o	o	o	-	-	o	-	o	-	-
	7	-	-	o	o	o	o	o	-	o	-	-
	17	--	-	o	o	-	-	o	-	o	-	-
Remark	1. The mark " o"means that this configuration is chosenfor testing 2. The mark "- "means that this bandwidth is not test. 3. The device is investigatedfrom 30MHz to10 times offundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.											

3.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.6. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2019/10/26	2020/10/25
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2019/10/26	2020/10/25
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2019/10/26	2020/10/25
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Radiated Spurious Emission

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/11
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2018/04/04	2021/04/03
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2017/04/01	2020/03/31
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Preamplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	EMI Test Software	Audix	N/A	E3	N/A	N/A	N/A

4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Voltage	VN=Nominal Voltage	DC 3.80V
	VL=Lower Voltage	DC 3.60V
	VH=Higher Voltage	DC 4.20V
Temperature	TN=Normal Temperature	25 °C
	Extreme Temperature	From -30° to + 50° centigrade
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Transmitter power Radiated	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Radiated spurious emissions	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Occupied Bandwidth	15Hz for <1GHz 70Hz for >1GHz	(1)
Frequency error	15Hz for <1GHz 70Hz for >1GHz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.


5. TEST CONDITIONS AND RESULTS

5.1. Conducted Output Power

LIMIT

N/A

TEST CONFIGURATION

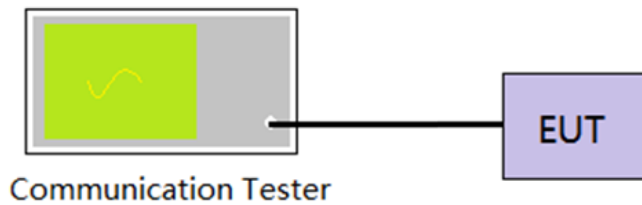

TEST PROCEDURE

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Refer to appendix A on the section 8 appendix report

5.2. Peak-to-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

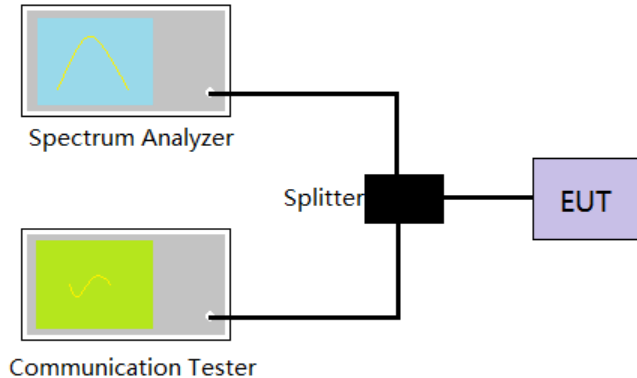

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS


☒ Passed ☐ Not Applicable

Refer to appendix B on the section 8 appendix report

5.3. 99% Occupied Bandwidth & 26 dB Bandwidth

LIMIT

N/A

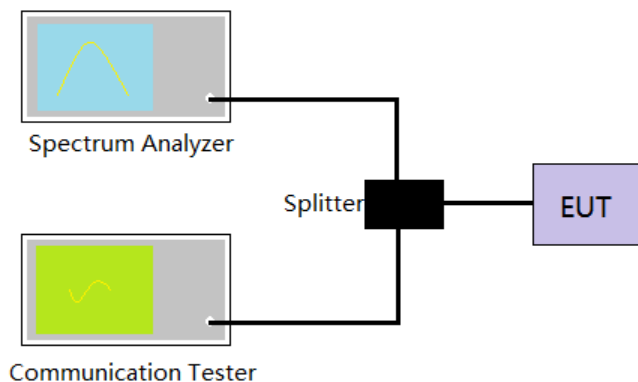TEST CONFIGURATION**TEST PROCEDURE**

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Center Frequency= Carrier frequency, RBW=1% to 5% of the anticipated OBW, VBW= 3 * RBW,
Detector=Peak,
Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and 26dB bandwidth.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS☒ **Passed** ☐ **Not Applicable**

Refer to appendix C on the section 8 appendix report

5.4. Band Edge

LIMIT


Part 24.238 and Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

LTE Band 7

Part 27.53 m(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

TEST CONFIGURATION

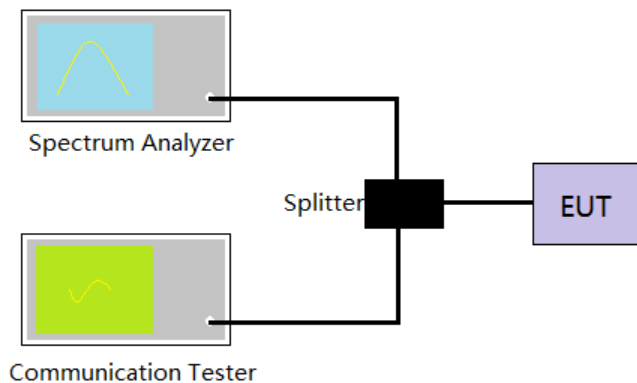

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:
RBW= no less than 1% of the OBW, VBW =3 * RBW, Sweep time= Auto
5. Record the test plot.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Refer to appendix D on the section 8 appendix report

5.5. Conducted Spurious Emissions

LIMIT


Part 24.238 and Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

LTE Band 7

Part 27.53 m(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Limit < -25 dBm

TEST CONFIGURATION

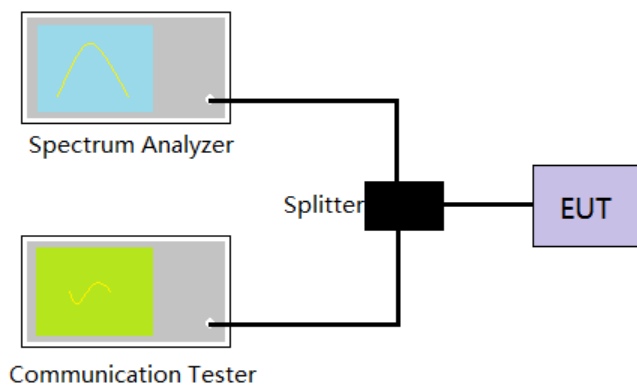

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto
Scan frequency range up to 10th harmonic.
4. Record the test plot.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Refer to appendix E on the section 8 appendix report

5.6. Frequency stability VS Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

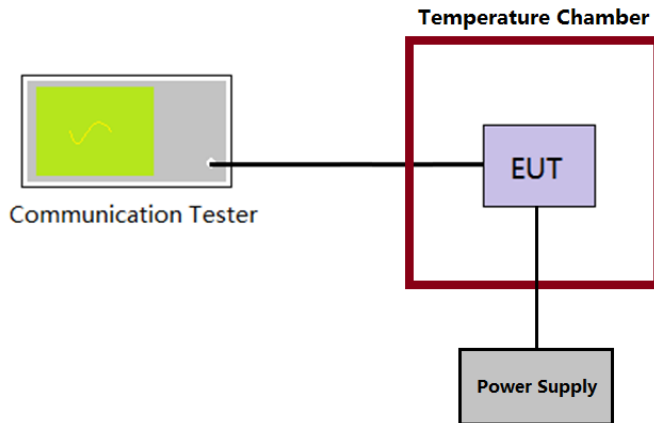

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Refer to appendix F on the section 8 appendix report

5.7. Frequency stability VS Voltage measurement

LIMIT

2.5ppm

TEST CONFIGURATION

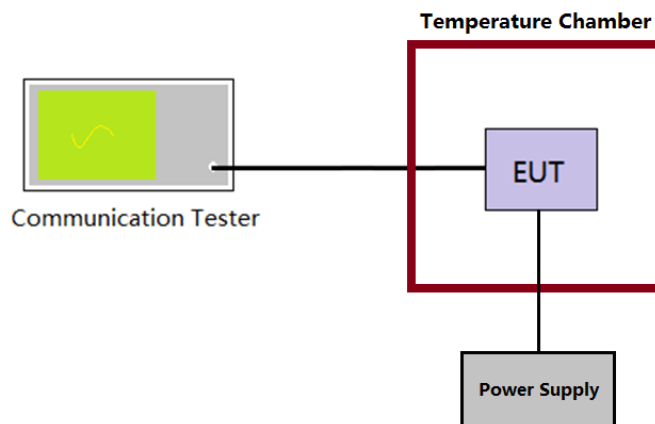

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C
4. The power supply voltage to the EUT was varied $\pm 15\%$ of the nominal value measured at the input to the EUT
5. Record the maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Refer to appendix F on the section 8 appendix report

5.8. ERP and EIRP

LIMIT


LTE Band 2/7: 2W(33dBm) EIRP

LTE Band 4: 1W(30dBm) EIRP

LTE Band 5: 7W(38.50dBm) ERP

LTE Band 17: 3W(34.77dBm) ERP

TEST CONFIGURATION

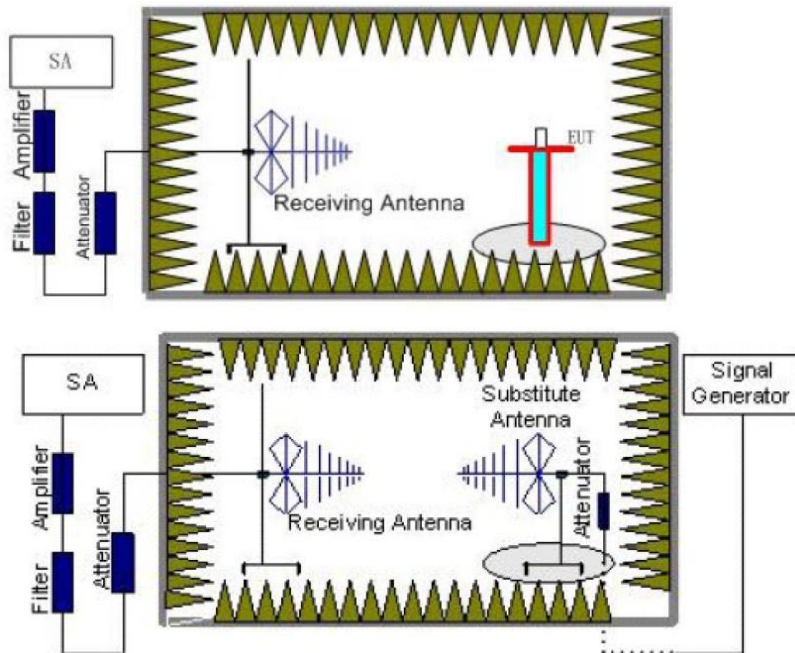

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.

- d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
- e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

LTE Band 2-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.67	18.22	≤33.00	PASS
	Mid	20.88	18.16		
	High	20.56	18.18		
16QAM	Low	19.90	17.53		PASS
	Mid	20.13	17.55		
	High	19.77	17.62		

LTE Band 2-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.58	18.04	≤33.00	PASS
	Mid	20.82	18.15		
	High	20.46	18.11		
16QAM	Low	20.15	17.79		PASS
	Mid	20.27	17.68		
	High	19.78	17.68		

LTE Band 2-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.99	18.43	≤33.00	PASS
	Mid	21.19	18.34		
	High	20.94	18.38		
16QAM	Low	20.26	17.73		PASS
	Mid	20.43	17.74		
	High	20.06	17.79		

LTE Band 2-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.97	18.47	≤33.00	PASS
	Mid	21.18	18.37		
	High	20.92	18.45		
16QAM	Low	20.24	17.79		PASS
	Mid	20.42	17.82		
	High	20.04	17.84		

LTE Band 2-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.84	18.26	≤33.00	PASS
	Mid	21.08	18.34		
	High	20.77	18.35		
16QAM	Low	20.45	18.02		PASS
	Mid	20.52	17.91		
	High	20.02	17.87		

LTE Band 2-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.92	18.32	≤33.00	PASS
	Mid	21.19	18.42		
	High	20.89	18.42		
16QAM	Low	20.55	18.16		PASS
	Mid	20.61	17.98		
	High	20.10	17.91		

LTE Band 4-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.78	20.10	≤30.00	PASS
	Mid	22.11	20.38		
	High	22.05	20.08		
16QAM	Low	20.76	19.34		PASS
	Mid	21.05	19.65		
	High	20.94	19.41		

LTE Band 4-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.97	20.10	≤30.00	PASS
	Mid	22.07	20.27		
	High	21.91	20.01		
16QAM	Low	20.89	19.54		PASS
	Mid	21.15	19.41		
	High	21.08	19.50		

LTE Band 4-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.25	20.34	≤30.00	PASS
	Mid	22.49	20.61		
	High	22.42	20.33		
16QAM	Low	21.11	19.51		PASS
	Mid	21.36	20.06		
	High	21.19	19.54		

LTE Band 4-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.05	20.27	≤30.00	PASS
	Mid	22.33	20.54		
	High	22.26	20.24		
16QAM	Low	20.96	19.48		PASS
	Mid	21.22	19.77		
	High	21.09	19.51		

LTE Band 4-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.25	20.25	≤30.00	PASS
	Mid	22.30	20.41		
	High	22.13	20.16		
16QAM	Low	21.10	19.64		PASS
	Mid	21.33	19.66		
	High	21.23	19.58		

LTE Band 4-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.28	20.27	≤30.00	PASS
	Mid	22.41	20.46		
	High	22.22	20.18		
16QAM	Low	21.09	19.68		PASS
	Mid	21.44	19.63		
	High	21.34	19.65		

LTE Band 5-1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.82	20.42	≤38.50	PASS
	Mid	21.91	20.72		
	High	21.89	20.62		
16QAM	Low	21.10	19.70		PASS
	Mid	21.09	20.09		
	High	21.10	19.90		

LTE Band 5-3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.28	20.22	≤38.50	PASS
	Mid	22.12	20.51		
	High	21.85	20.32		
16QAM	Low	21.13	19.96		PASS
	Mid	21.14	19.99		
	High	21.15	19.82		

LTE Band 5-5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.11	20.33	≤38.50	PASS
	Mid	22.00	20.62		
	High	21.76	20.38		
16QAM	Low	21.33	19.97		PASS
	Mid	21.24	20.26		
	High	21.22	20.12		

LTE Band 5-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.08	20.34	≤38.50	PASS
	Mid	21.97	20.63		
	High	21.74	20.39		
16QAM	Low	21.28	19.79		PASS
	Mid	21.29	20.19		
	High	21.31	20.01		

LTE Band 7-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.83	19.17	≤33.00	PASS
	Mid	20.93	19.12		
	High	20.79	18.93		
16QAM	Low	20.01	18.84		PASS
	Mid	20.11	18.77		
	High	19.98	18.75		

LTE Band 7-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.77	19.06	≤33.00	PASS
	Mid	20.83	18.93		
	High	20.70	18.91		
16QAM	Low	20.20	18.89		PASS
	Mid	20.21	18.72		
	High	20.10	18.66		

LTE Band 7-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.77	19.09	≤33.00	PASS
	Mid	20.87	19.11		
	High	20.72	19.04		
16QAM	Low	20.07	18.75		PASS
	Mid	20.17	18.65		
	High	20.04	18.65		

LTE Band 7-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.76	19.14	≤33.00	PASS
	Mid	20.82	19.00		
	High	20.68	18.99		
16QAM	Low	20.24	18.93		PASS
	Mid	20.37	18.93		
	High	20.20	18.90		

LTE Band 17-5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.13	19.05	≤34.77	PASS
	Mid	21.48	19.18		
	High	21.00	19.02		
16QAM	Low	20.24	18.38		PASS
	Mid	20.61	18.66		
	High	20.23	18.56		

LTE Band 17-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.10	18.85	≤34.77	PASS
	Mid	21.45	19.10		
	High	20.98	18.94		
16QAM	Low	20.26	18.42		PASS
	Mid	20.63	18.68		
	High	20.25	18.57		


5.9. Radiated Spurious Emission

LIMIT

LTE Band 2/4/5/17: -13dBm;

LTE Band 7: -25dBm

TEST CONFIGURATION

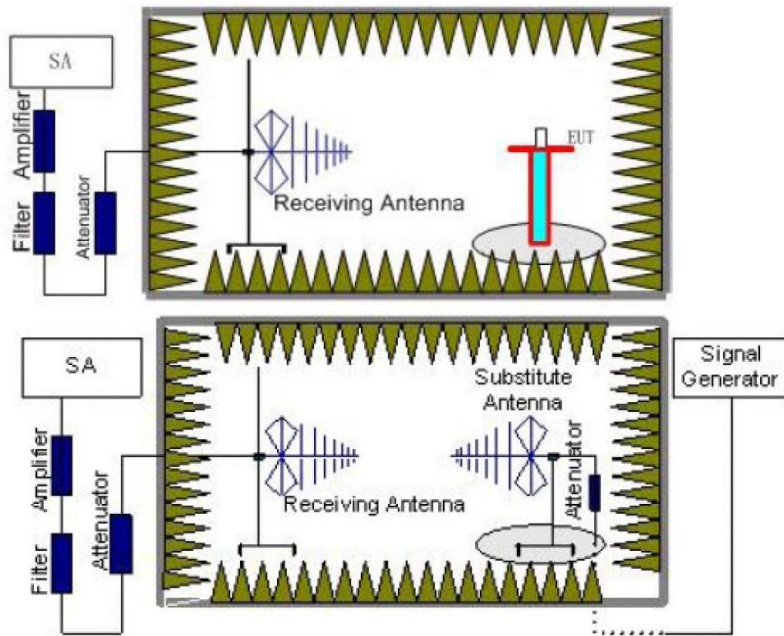

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency

6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

LTE Band 2-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3701.40	Vertical	-35.44	≤-13.00	Pass
	5552.10	V	-39.09		
	7402.80	V	-40.24		
	3701.40	Horizontal	-37.15	≤-13.00	Pass
	5552.10	H	-40.70		
	7402.80	H	-41.61		
Mid	3760.00	Vertical	-34.15	≤-13.00	Pass
	5640.00	V	-37.88		
	7520.00	V	-39.10		
	3760.00	Horizontal	-35.58	≤-13.00	Pass
	5640.00	H	-39.43		
	7520.00	H	-40.40		
High	3818.60	Vertical	-31.95	≤-13.00	Pass
	5727.90	V	-35.88		
	7637.20	V	-37.20		
	3818.60	Horizontal	-34.81	≤-13.00	Pass
	5727.90	H	-38.71		
	7637.20	H	-39.79		

LTE Band 2-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3703.00	Vertical	-30.53	≤-13.00	Pass
	5554.50	V	-31.86		
	7406.00	V	-34.27		
	3703.00	Horizontal	-31.33	≤-13.00	Pass
	5554.50	H	-34.59		
	7406.00	H	-37.63		
Mid	3760.00	Vertical	-26.60	≤-13.00	Pass
	5640.00	V	-28.16		
	7520.00	V	-30.23		
	3760.00	Horizontal	-28.05	≤-13.00	Pass
	5640.00	H	-32.30		
	7520.00	H	-35.00		
High	3817.00	Vertical	-23.00	≤-13.00	Pass
	5725.50	V	-25.55		
	7634.00	V	-28.53		
	3817.00	Horizontal	-24.60	≤-13.00	Pass
	5725.50	H	-29.68		
	7634.00	H	-30.38		

LTE Band 2-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3705.00	Vertical	-19.14	≤-13.00	Pass
	5557.50	V	-19.69		
	7410.00	V	-24.13		
	3705.00	Horizontal	-27.54	≤-13.00	Pass
	5557.50	H	-34.91		
	7410.00	H	-32.95		
Mid	3760.00	Vertical	-21.03	≤-13.00	Pass
	5640.00	V	-23.19		
	7520.00	V	-27.16		
	3760.00	Horizontal	-31.91	≤-13.00	Pass
	5640.00	H	-37.87		
	7520.00	H	-35.22		
High	3815.00	Vertical	-25.79	≤-13.00	Pass
	5722.50	V	-26.58		
	7630.00	V	-30.08		
	3815.00	Horizontal	-35.33	≤-13.00	Pass
	5722.50	H	-41.04		
	7630.00	H	-37.63		

LTE Band 2-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3710.00	Vertical	-22.62	≤-13.00	Pass
	5565.00	V	-24.87		
	7420.00	V	-28.02		
	3710.00	Horizontal	-40.17	≤-13.00	Pass
	5565.00	H	-44.35		
	7420.00	H	-41.44		
Mid	3760.00	Vertical	-26.38	≤-13.00	Pass
	5640.00	V	-28.02		
	7520.00	V	-31.80		
	3760.00	Horizontal	-42.65	≤-13.00	Pass
	5640.00	H	-48.04		
	7520.00	H	-44.36		
High	3810.00	Vertical	-27.78	≤-13.00	Pass
	5715.00	V	-31.16		
	7620.00	V	-35.44		
	3810.00	Horizontal	-39.66	≤-13.00	Pass
	5715.00	H	-46.30		
	7620.00	H	-42.04		

LTE Band 2-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3715.00	Vertical	-25.23	≤-13.00	Pass
	5572.50	V	-28.86		
	7430.00	V	-32.98		
	3715.00	Horizontal	-42.08	≤-13.00	Pass
	5572.50	H	-48.57		
	7430.00	H	-43.97		
Mid	3760.00	Vertical	-27.05	≤-13.00	Pass
	5640.00	V	-30.57		
	7520.00	V	-34.58		
	3760.00	Horizontal	-39.79	≤-13.00	Pass
	5640.00	H	-46.18		
	7520.00	H	-42.62		
High	3805.00	Vertical	-25.16	≤-13.00	Pass
	5707.50	V	-27.04		
	7610.00	V	-31.07		
	3805.00	Horizontal	-42.79	≤-13.00	Pass
	5707.50	H	-51.04		
	7610.00	H	-47.62		

LTE Band 2-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3720.00	Vertical	-28.14	≤-13.00	Pass
	5580.00	V	-30.42		
	7440.00	V	-33.62		
	3720.00	Horizontal	-43.23	≤-13.00	Pass
	5580.00	H	-51.46		
	7440.00	H	-47.97		
Mid	3760.00	Vertical	-28.47	≤-13.00	Pass
	5640.00	V	-30.73		
	7520.00	V	-33.91		
	3760.00	Horizontal	-43.52	≤-13.00	Pass
	5640.00	H	-51.70		
	7520.00	H	-48.19		
High	3800.00	Vertical	-26.30	≤-13.00	Pass
	5700.00	V	-27.82		
	7600.00	V	-31.81		
	3800.00	Horizontal	-43.83	≤-13.00	Pass
	5700.00	H	-51.99		
	7600.00	H	-48.44		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3421.40	Vertical	-31.89	≤-13.00	Pass
	5132.10	V	-37.98		
	6842.80	V	-36.91		
	3421.40	Horizontal	-34.17	≤-13.00	Pass
	5132.10	H	-40.12		
	6842.80	H	-38.73		
Mid	3465.00	Vertical	-30.18	≤-13.00	Pass
	5197.50	V	-36.37		
	6930.00	V	-35.40		
	3465.00	Horizontal	-32.08	≤-13.00	Pass
	5197.50	H	-38.43		
	6930.00	H	-37.12		
High	3508.60	Vertical	-27.26	≤-13.00	Pass
	5262.90	V	-33.71		
	7017.20	V	-32.87		
	3508.60	Horizontal	-29.68	≤-13.00	Pass
	5262.90	H	-36.15		
	7017.20	H	-34.95		

LTE Band 4-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3423.00	Vertical	-30.92	≤-13.00	Pass
	5134.50	V	-36.98		
	6846.00	V	-36.10		
	3423.00	Horizontal	-32.59	≤-13.00	Pass
	5134.50	H	-40.76		
	6846.00	H	-38.46		
Mid	3465.00	Vertical	-34.75	≤-13.00	Pass
	5197.50	V	-40.80		
	6930.00	V	-39.05		
	3465.00	Horizontal	-39.93	≤-13.00	Pass
	5197.50	H	-45.93		
	6930.00	H	-44.47		
High	3507.00	Vertical	-37.32	≤-13.00	Pass
	5260.50	V	-43.14		
	7014.00	V	-41.27		
	3507.00	Horizontal	-43.48	≤-13.00	Pass
	5260.50	H	-49.93		
	7014.00	H	-47.39		

LTE Band 4-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3425.00	Vertical	-42.02	≤-13.00	Pass
	5137.50	V	-46.59		
	6850.00	V	-45.95		
	3425.00	Horizontal	-45.36	≤-13.00	Pass
	5137.50	H	-51.69		
	6850.00	H	-48.89		
Mid	3465.00	Vertical	-43.43	≤-13.00	Pass
	5197.50	V	-47.92		
	6930.00	V	-47.20		
	3465.00	Horizontal	-47.01	≤-13.00	Pass
	5197.50	H	-53.03		
	6930.00	H	-50.16		
High	3505.00	Vertical	-45.46	≤-13.00	Pass
	5257.50	V	-49.77		
	7010.00	V	-48.96		
	3505.00	Horizontal	-48.34	≤-13.00	Pass
	5257.50	H	-54.28		
	7010.00	H	-51.22		

LTE Band 4-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3430.00	Vertical	-49.05	≤-13.00	Pass
	5145.00	V	-51.97		
	6860.00	V	-50.29		
	3430.00	Horizontal	-48.60	≤-13.00	Pass
	5145.00	H	-54.52		
	6860.00	H	-51.43		
Mid	3465.00	Vertical	-49.24	≤-13.00	Pass
	5197.50	V	-52.15		
	6930.00	V	-50.82		
	3465.00	Horizontal	-48.81	≤-13.00	Pass
	5197.50	H	-54.69		
	6930.00	H	-51.59		
High	3500.00	Vertical	-49.50	≤-13.00	Pass
	5250.00	V	-52.39		
	7000.00	V	-51.05		
	3500.00	Horizontal	-49.01	≤-13.00	Pass
	5250.00	H	-54.88		
	7000.00	H	-51.75		

LTE Band 4-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3435.00	Vertical	-50.19	≤-13.00	Pass
	5152.50	V	-53.09		
	6870.00	V	-51.60		
	3435.00	Horizontal	-51.87	≤-13.00	Pass
	5152.50	H	-57.57		
	6870.00	H	-56.73		
Mid	3465.00	Vertical	-54.87	≤-13.00	Pass
	5197.50	V	-57.49		
	6930.00	V	-55.74		
	3465.00	Horizontal	-55.51	≤-13.00	Pass
	5197.50	H	-60.52		
	6930.00	H	-59.53		
High	3495.00	Vertical	-58.32	≤-13.00	Pass
	5242.50	V	-60.63		
	6990.00	V	-58.72		
	3495.00	Horizontal	-58.59	≤-13.00	Pass
	5242.50	H	-63.42		
	6990.00	H	-64.89		

LTE Band 4-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3440.00	Vertical	-75.33	≤-13.00	Pass
	5160.00	V	-64.50		
	6880.00	V	-62.01		
	3440.00	Horizontal	-61.86	≤-13.00	Pass
	5160.00	H	-77.51		
	6880.00	H	-79.03		
Mid	3465.00	Vertical	-90.49	≤-13.00	Pass
	5197.50	V	-71.72		
	6930.00	V	-68.80		
	3465.00	Horizontal	-71.45	≤-13.00	Pass
	5197.50	H	-87.33		
	6930.00	H	-84.32		
High	3490.00	Vertical	-94.81	≤-13.00	Pass
	5235.00	V	-74.50		
	6980.00	V	-71.33		
	3490.00	Horizontal	-73.85	≤-13.00	Pass
	5235.00	H	-89.61		
	6980.00	H	-86.49		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 5-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1649.40	Vertical	-35.48	≤-13.00	Pass
	2474.10	V	-43.13		
	3298.80	V	-43.56		
	1649.40	Horizontal	-38.76	≤-13.00	Pass
	2474.10	H	-46.99		
	3298.80	H	-47.07		
Mid	1673.00	Vertical	-34.51	≤-13.00	Pass
	2509.50	V	-42.22		
	3346.00	V	-42.50		
	1673.00	Horizontal	-37.76	≤-13.00	Pass
	2509.50	H	-46.05		
	3346.00	H	-46.19		
High	1696.60	Vertical	-33.40	≤-13.00	Pass
	2544.90	V	-41.32		
	3393.20	V	-41.64		
	1696.60	Horizontal	-33.88	≤-13.00	Pass
	2544.90	H	-40.85		
	3393.20	H	-42.44		

LTE Band 5-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1651.00	Vertical	-31.38	≤-13.00	Pass
	2476.50	V	-39.42		
	3302.00	V	-40.02		
	1651.00	Horizontal	-32.55	≤-13.00	Pass
	2476.50	H	-39.60		
	3302.00	H	-41.38		
Mid	1673.00	Vertical	-30.38	≤-13.00	Pass
	2509.50	V	-38.48		
	3346.00	V	-39.14		
	1673.00	Horizontal	-30.77	≤-13.00	Pass
	2509.50	H	-38.16		
	3346.00	H	-40.01		
High	1695.00	Vertical	-28.19	≤-13.00	Pass
	2542.50	V	-36.49		
	3390.00	V	-37.25		
	1695.00	Horizontal	-29.14	≤-13.00	Pass
	2542.50	H	-36.63		
	3390.00	H	-38.71		

LTE Band 5-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1653.00	Vertical	-24.14	≤-13.00	Pass
	2479.50	V	-33.97		
	3306.00	V	-33.93		
	1653.00	Horizontal	-30.11	≤-13.00	Pass
	2479.50	H	-37.55		
	3306.00	H	-39.49		
Mid	1673.00	Vertical	-24.87	≤-13.00	Pass
	2509.50	V	-34.66		
	3346.00	V	-34.58		
	1673.00	Horizontal	-30.26	≤-13.00	Pass
	2509.50	H	-37.67		
	3346.00	H	-39.61		
High	1693.00	Vertical	-25.77	≤-13.00	Pass
	2539.50	V	-35.48		
	3386.00	V	-35.36		
	1693.00	Horizontal	-28.58	≤-13.00	Pass
	2539.50	H	-36.09		
	3386.00	H	-38.26		

LTE Band 5-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1658.00	Vertical	-24.63	≤-13.00	Pass
	2487.00	V	-34.51		
	3316.00	V	-34.53		
	1658.00	Horizontal	-29.89	≤-13.00	Pass
	2487.00	H	-37.32		
	3316.00	H	-39.30		
Mid	1673.00	Vertical	-25.61	≤-13.00	Pass
	2509.50	V	-35.43		
	3346.00	V	-35.40		
	1673.00	Horizontal	-30.08	≤-13.00	Pass
	2509.50	H	-37.47		
	3346.00	H	-39.45		
High	1688.00	Vertical	-25.84	≤-13.00	Pass
	2532.00	V	-35.64		
	3376.00	V	-35.60		
	1688.00	Horizontal	-30.26	≤-13.00	Pass
	2532.00	H	-37.64		
	3376.00	H	-39.59		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5005.00	Vertical	-36.24	≤-25.00	Pass
	7507.50	V	-40.51		
	10010.00	V	-40.87		
	5005.00	Horizontal	-39.67	≤-25.00	Pass
	7507.50	H	-44.73		
	10010.00	H	-43.35		
Mid	5070.00	Vertical	-34.50	≤-25.00	Pass
	7605.00	V	-37.95		
	10140.00	V	-38.72		
	5070.00	Horizontal	-34.95	≤-25.00	Pass
	7605.00	H	-40.72		
	10140.00	H	-40.66		
High	5135.00	Vertical	-29.62	≤-25.00	Pass
	7702.50	V	-33.51		
	10270.00	V	-34.50		
	5135.00	Horizontal	-31.70	≤-25.00	Pass
	7702.50	H	-37.67		
	10270.00	H	-38.07		

LTE Band 7-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5010.00	Vertical	-27.41	≤-25.00	Pass
	7515.00	V	-31.64		
	10020.00	V	-32.91		
	5010.00	Horizontal	-33.54	≤-25.00	Pass
	7515.00	H	-39.40		
	10020.00	H	-39.54		
Mid	5070.00	Vertical	-28.79	≤-25.00	Pass
	7605.00	V	-32.94		
	10140.00	V	-34.13		
	5070.00	Horizontal	-35.76	≤-25.00	Pass
	7605.00	H	-41.20		
	10140.00	H	-41.25		
High	5130.00	Vertical	-31.05	≤-25.00	Pass
	7695.00	V	-34.99		
	10260.00	V	-36.08		
	5130.00	Horizontal	-37.22	≤-25.00	Pass
	7695.00	H	-42.58		
	10260.00	H	-42.42		

LTE Band 7-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5015.00	Vertical	-29.06	≤-25.00	Pass
	7522.50	V	-33.30		
	10030.00	V	-34.64		
	5015.00	Horizontal	-40.29	≤-25.00	Pass
	7522.50	H	-47.05		
	10030.00	H	-46.78		
Mid	5070.00	Vertical	-33.25	≤-25.00	Pass
	7605.00	V	-36.99		
	10140.00	V	-37.34		
	5070.00	Horizontal	-38.54	≤-25.00	Pass
	7605.00	H	-45.63		
	10140.00	H	-45.43		
High	5125.00	Vertical	-31.10	≤-25.00	Pass
	7687.50	V	-35.03		
	10250.00	V	-35.48		
	5125.00	Horizontal	-37.11	≤-25.00	Pass
	7687.50	H	-44.28		
	10250.00	H	-44.28		

LTE Band 7-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	5020.00	Vertical	-28.98	≤-25.00	Pass
	7530.00	V	-32.38		
	10040.00	V	-33.23		
	5020.00	Horizontal	-35.07	≤-25.00	Pass
	7530.00	H	-42.36		
	10040.00	H	-42.65		
Mid	5070.00	Vertical	-27.45	≤-25.00	Pass
	7605.00	V	-30.94		
	10140.00	V	-31.88		
	5070.00	Horizontal	-32.41	≤-25.00	Pass
	7605.00	H	-40.20		
	10140.00	H	-40.60		
High	5120.00	Vertical	-25.57	≤-25.00	Pass
	7680.00	V	-29.23		
	10240.00	V	-30.25		
	5120.00	Horizontal	-35.26	≤-25.00	Pass
	7680.00	H	-42.88		
	10240.00	H	-42.88		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.



LTE Band 17-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1413.00	Vertical	-36.74	≤-13.00	Pass
	2119.50	V	-39.41		
	2826.00	V	-40.15		
	1413.00	Horizontal	-40.30	≤-13.00	Pass
	2119.50	H	-42.76		
	2826.00	H	-43.00		
Mid	1420.00	Vertical	-34.07	≤-13.00	Pass
	2130.00	V	-36.90		
	2840.00	V	-37.79		
	1420.00	Horizontal	-36.99	≤-13.00	Pass
	2130.00	H	-39.24		
	2840.00	H	-39.66		
High	1427.00	Vertical	-28.00	≤-13.00	Pass
	2140.50	V	-31.38		
	2854.00	V	-32.54		
	1427.00	Horizontal	-32.95	≤-13.00	Pass
	2140.50	H	-35.44		
	2854.00	H	-34.91		

LTE Band 17-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1418.00	Vertical	-23.96	≤-13.00	Pass
	2127.00	V	-27.95		
	2836.00	V	-29.62		
	1418.00	Horizontal	-29.22	≤-13.00	Pass
	2127.00	H	-31.93		
	2836.00	H	-31.93		
Mid	1420.00	Vertical	-21.16	≤-13.00	Pass
	2130.00	V	-25.31		
	2840.00	V	-27.14		
	1420.00	Horizontal	-26.05	≤-13.00	Pass
	2130.00	H	-29.36		
	2840.00	H	-29.49		
High	1422.00	Vertical	-18.11	≤-13.00	Pass
	2133.00	V	-22.54		
	2844.00	V	-24.51		
	1422.00	Horizontal	-23.10	≤-13.00	Pass
	2133.00	H	-26.59		
	2844.00	H	-27.13		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report

6. TEST SETUP PHOTOS OF THE EUT

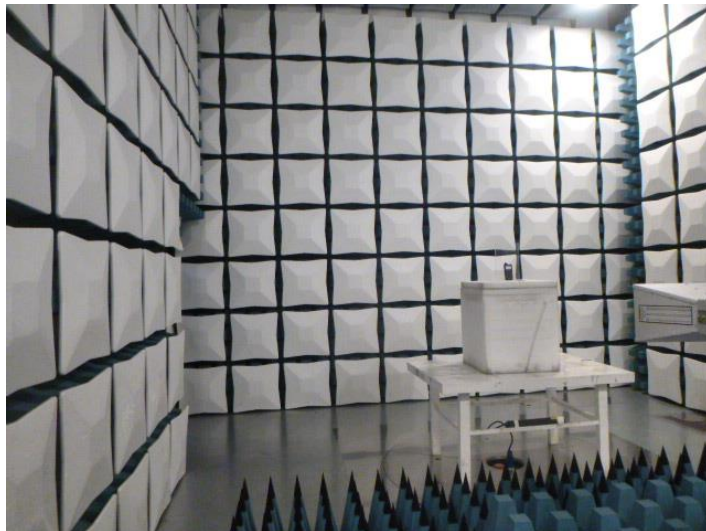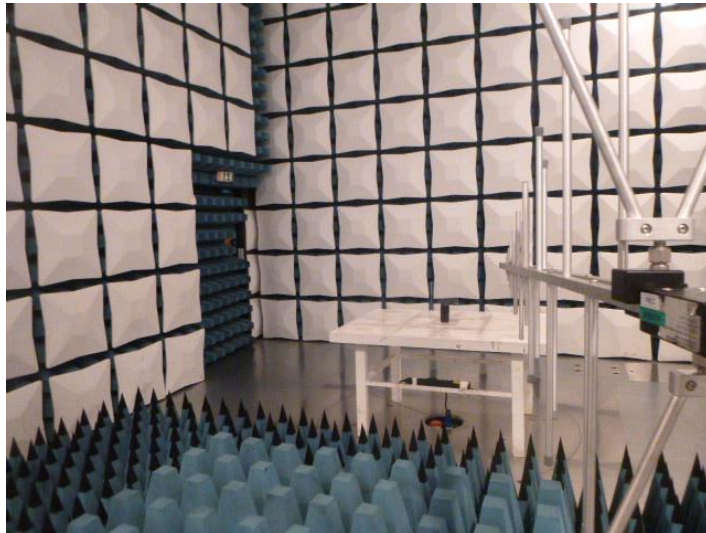

7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Refere to the test report No.: CHTEW19110108

8. APPENDIX REPORT