



TEST REPORT Nr. R20181502

Federal Communication Commission (FCC)

Report Reference No.	R20181502
Date of issue:	25.01.2021
Total number pages:	72
Applicant's name	Intercomp S.p.A.
Address	Via della Scienza, 27, 37139 Verona (VR) - Italy
Test specification:	
Standards	FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247
Non-standard test method	N/A
Test Report Form No.	15-247_HoppingCMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF	2021-01
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
Test item description	LoRa WAN magnetic sensor for parked vehicles detection for inground installation
Trademark	Intercomp
Manufacturer	Intercomp S.p.A.
Model / Type reference	Ecoh-915
FCC ID	2AUT7ECOH-915
Rating(s)	3,6 Vdc from battery
Report	
Tested by (name + signature)	G. Gandini
Approved by (name + signature)	R. Beghetto



1	Summary	
1	Summary.....	2
2	Reference standard	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of tested item and testing condition(s)	5
6.1	Photos of the test item	6
7	Verdict summary section	8
8	Test conditions	10
8.1	General	10
9	Test results	11
9.1	Antenna requirements	11
9.2	Emissions in restricted frequency bands and in unrestricted frequency bands	12
9.3	20 dB bandwidth.....	47
9.4	Channel separation.....	50
9.5	Number of hopping channels.....	53
9.6	Time of occupancy.....	57
9.7	Band edge	60
9.8	Peak Output Power.....	66



2 Reference standard	
FCC Rules and Regulation Title 47 part 15:2019	--
3 List of attachments	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

Revision index	Date	Change history
1.0	25.01.2021	--



Testing and sampling:	
Date of receipt of test item	05.10.2020
Testing start date	11.11.2020
Testing end date	19.01.2021
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion. The results relate to the sample as it has been received.
Internal identification	Adhesive label with the product number P200985
General remarks:	
This report shall not be reproduced, except in full, without the written approval of CMC. The test results presented in this report relate only to the object tested. “(see appended table)”: refers to a table appended to the report. Throughout this report a comma is used as the decimal separator.	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
Definition of symbols used in this test report:	
☒ Indicates that the listed condition, standard or equipment is applicable for this report. ☐ Indicates that the listed condition, standard or equipment is not applicable for this report.	










6 General description of tested item and testing condition(s)

Description	LoRa WAN magnetic sensor for parked vehicles detection for inground installation						
Model Number	Ecoh-915						
FCC ID	2AUT7ECOH-915						
Serial Number	--						
Brand name	Intercomp						
Frequency band	902 – 928 MHz						
Nominal frequencies	F _L : 902,30 MHz		F _M : 908,50 MHz		F _H : 914,90 MHz		
Test power supply.....		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	☐	AC:	☐	☐	☐	☐	☐
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: 3,6 V from battery					☐
Software version	0.0.0						
Pseudo randomly ordered list of hopping frequencies	See document FCC_HoppingChannelList						
Test configuration	☒	Table top equipment					
	☐	Floor standing equipment					
	☐	Hand-held equipment					
Type of equipment.....	☒	Transmitter unit					
	☐	Receiver unit					
Type of station	☐	Portable station					
	☒	Mobile station					
Operating modes	No.	Operating mode of test item					
	1	EUT in continuous transmission at maximum power					



6.1 Photos of the test item

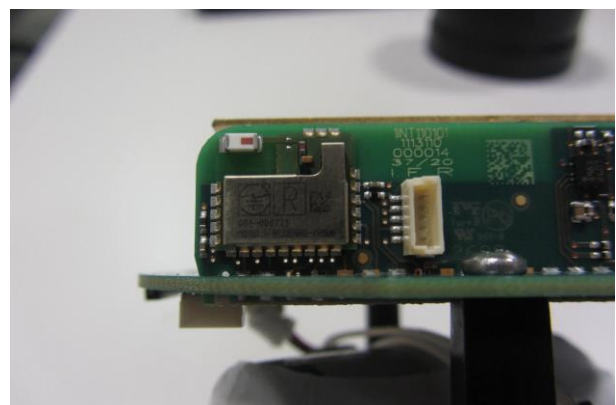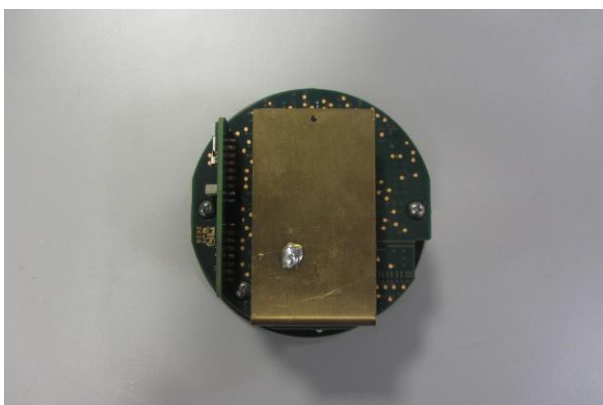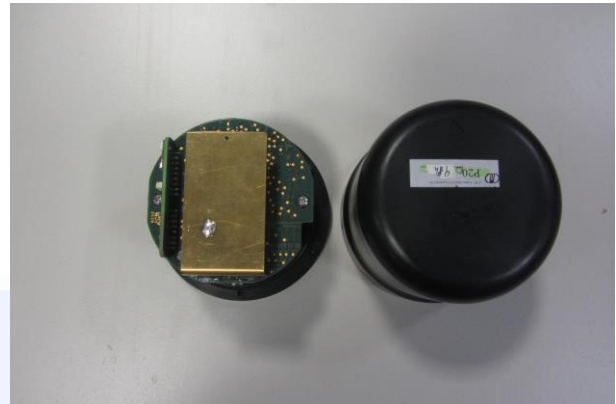

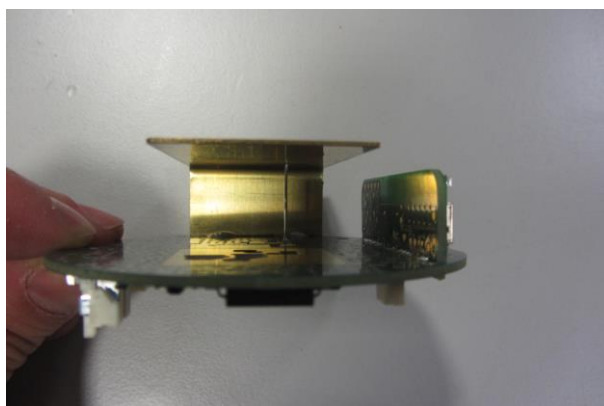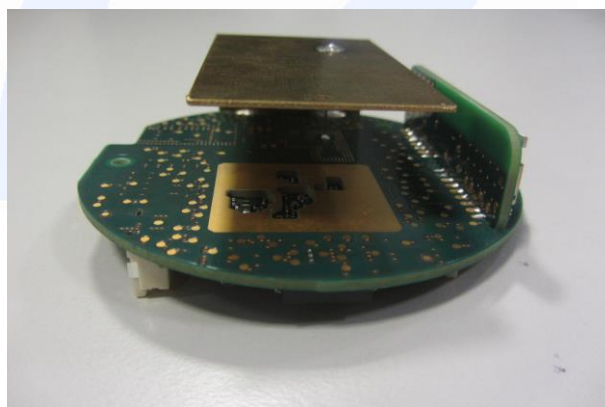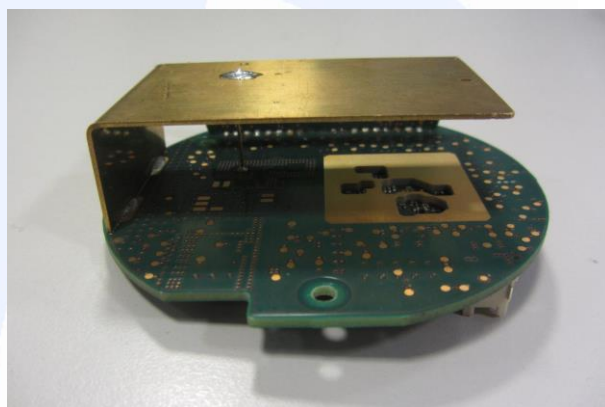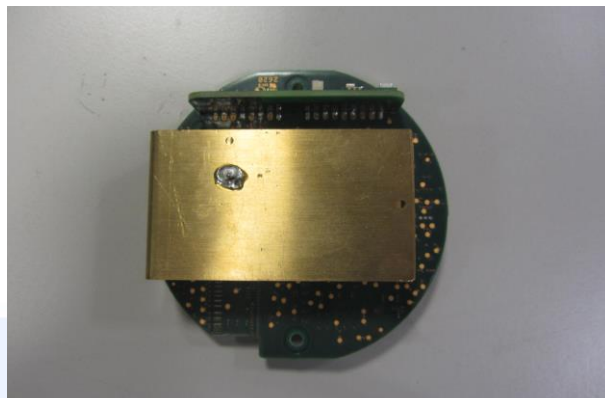



7 Verdict summary section

FCC Rules & Regulations, Title 47:2019 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.247 (a) (1)	Pseudo randomly ordered list of hopping frequencies	--	P
Part 15.203	Antenna requirements	ANSI C63.10	P
Part 15.207	Conducted emissions	ANSI C63.10	N/A (+)
Part 15.209	Radiated emissions and spurious emission	ANSI C63.10	P
Part 15.247	20 dB Bandwidth	ANSI C63.10	P
Part 15.247	Channel Separation	ANSI C63.10	P
Part 15.247	Number of Hopping Channel	ANSI C63.10	P
Part 15.247	Time of occupancy	ANSI C63.10	P
Part 15.247	Band edge	ANSI C63.10	P
Part 15.209 and 15.247	Peak Output Power	ANSI C63.10	P

(+) Devices which only employ battery power. See FCC Part 15.207 (c)



Normative references	
Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2019	--
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC rules
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices



8 Test conditions

8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:		
	Temperature	Humidity	Atmospheric pressure
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties	Attachment 1		



9 Test results

9.1 Antenna requirements

Tested by	G. Gandini	
Test date	11.11.2020	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded	
Antenna type.....	☐	Integral antenna
	☐	External antenna
	☒	Dedicated antenna
Antenna gain.....	-6 dBi	
External R.F. power amplifier	Not Present	



9.2 Emissions in restricted frequency bands and in unrestricted frequency bands

Tested by	G. Gandini	
Test date	11.11.2020	
Test location (stand)	Semi-anechoic chamber (CMC A070)	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description	☒	Table top equipment set-up (80 cm above the reference ground plane)
	☐	Floor standing equipment set-up (insulating material up to 12 mm thick)
	☐	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description	--	
Test method applied	SAC with measurement distance [m]: 10	
Supplementary information.....	--	

Acceptance limits

Acceptance limits for emissions in restricted frequency bands ($f < 1000$ MHz)		
Frequency range (MHz)	Test distance (m)	Limits [dB(μ V/m)]
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Acceptance limits for emissions in restricted frequency bands ($f \geq 1000$ MHz)			
Frequency (MHz)	Test distance (m)	AV limits [dB(μ V/m)]	Peak limits [dB(μ V/m)]
> 1000	3	54	74



The restricted frequency bands are listed in the following table


MHz	MHz	MHz	GHz
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

Acceptance limits for emissions in non-restricted frequency bands

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test setup


Frequency ≤ 30 MHz

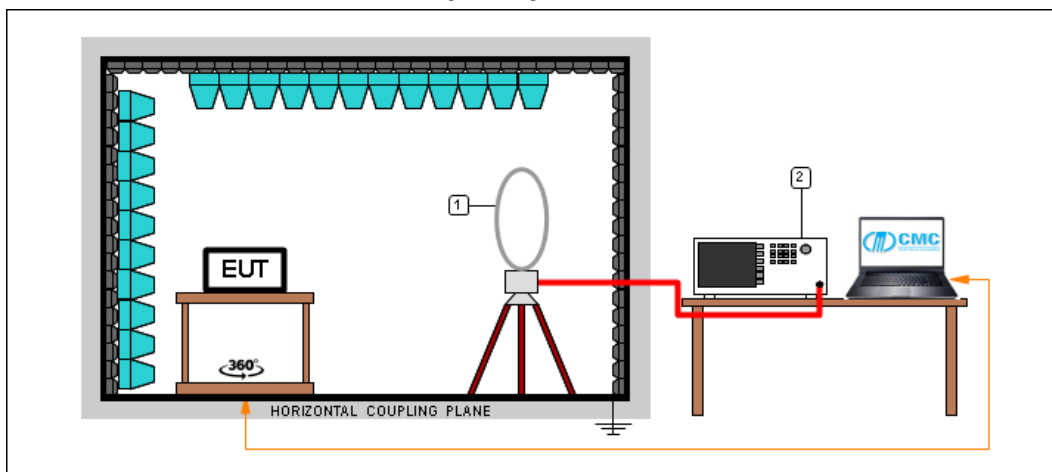

Test setup PE004_01

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

Frequency ≤ 1 GHz

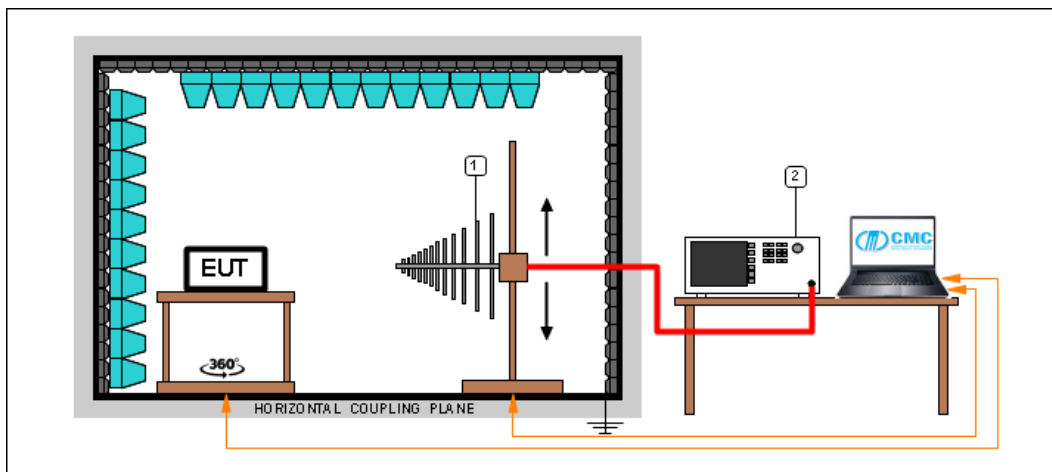

Test setup PE004_02


Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

Test setup PE004_03

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna



Frequency > 1 GHz

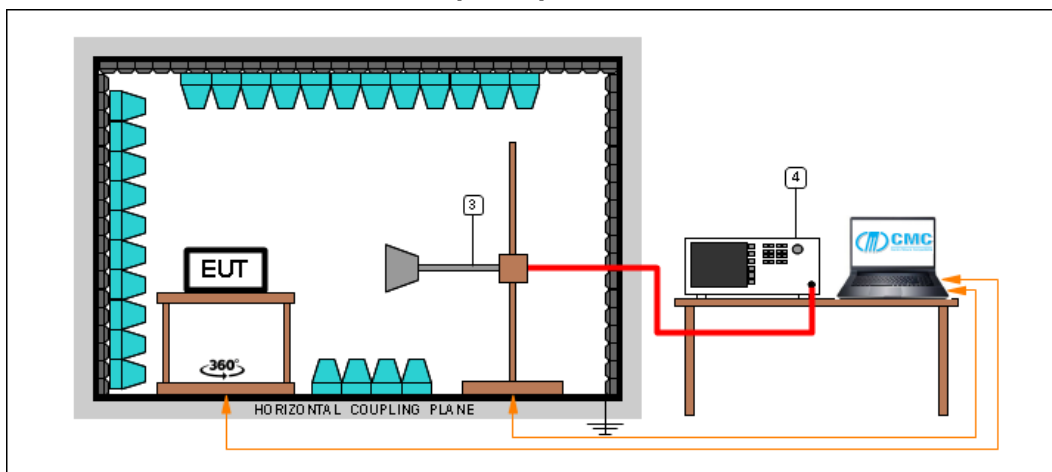

Test setup PE004_04

Nr.	Id. Number	Manufacturer	Model	Description
4	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
3	CMC S108	Emco	3115	Waveguide antenna



Result

Nominal frequency (MHz)	Polarization	Frequency Range (MHz)	Graphs	Result
902,30	V	1000 – 10000	G20181501	P
902,30	H	1000 – 10000	G20181502	P
908,50	H	1000 – 10000	G20181503	P
908,50	V	1000 – 10000	G20181504	P
914,90	V	1000 – 10000	G20181505	P
914,90	H	1000 – 10000	G20181506	P
902,30	V	300 – 1000	G20181513	P
902,30	H	300 – 1000	G20181514	P
908,50	H	300 – 1000	G20181515	P
908,50	V	300 – 1000	G20181516	P
914,90	V	300 – 1000	G20181517	P
914,90	H	300 – 1000	G20181518	P
Worst case	H	30 – 300	G20181527	P
Worst case	V	30 – 300	G20181528	P
Worst case	Loop	0,009 – 30	G20181529	P

Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels.

Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.

Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $20\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.

Peaks above the limits are caused by the nominal transmitting frequencies


Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +

AV: Average; AV [1s] (average at 1 second) values are marked with a X



Graphs

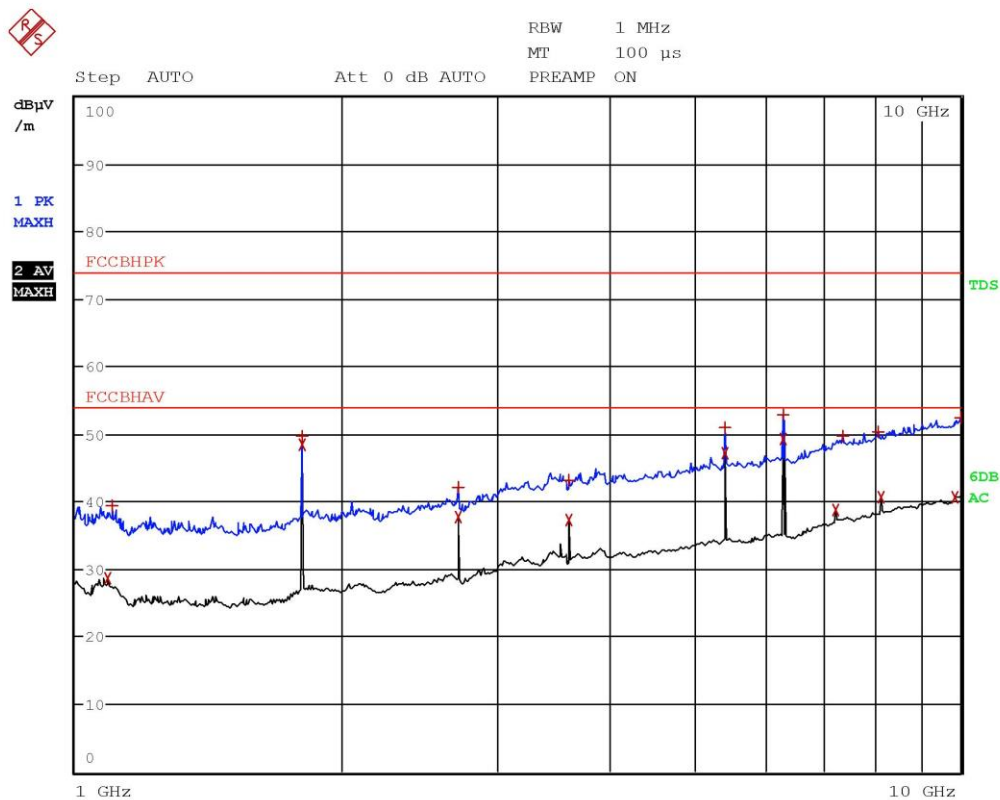


Gandini 20181501



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL, dBμV/m	DELTA LIMIT dB
2 Average	1.0876 GHz	28.70	-25.27
1 Max Peak	1.1008 GHz	39.44	-34.53
1 Max Peak	1.8048 GHz	49.66	-24.31
2 Average	1.8048 GHz	48.50	-5.47
2 Average	2.7068 GHz	37.65	-16.32
1 Max Peak	2.7068 GHz	42.17	-31.80
2 Average	3.6092 GHz	37.30	-16.67
1 Max Peak	3.6092 GHz	43.11	-30.86
2 Average	5.4136 GHz	47.06	-6.91
1 Max Peak	5.414 GHz	50.92	-23.06
1 Max Peak	6.316 GHz	52.85	-21.12
2 Average	6.316 GHz	49.31	-4.66
2 Average	7.2188 GHz	38.71	-15.27
1 Max Peak	7.3624 GHz	49.72	-24.25
1 Max Peak	8.0612 GHz	50.39	-23.58
2 Average	8.1204 GHz	40.68	-13.29
2 Average	9.8424 GHz	40.58	-13.39
1 Max Peak	9.9852 GHz	52.45	-21.52

Gandini 20181501

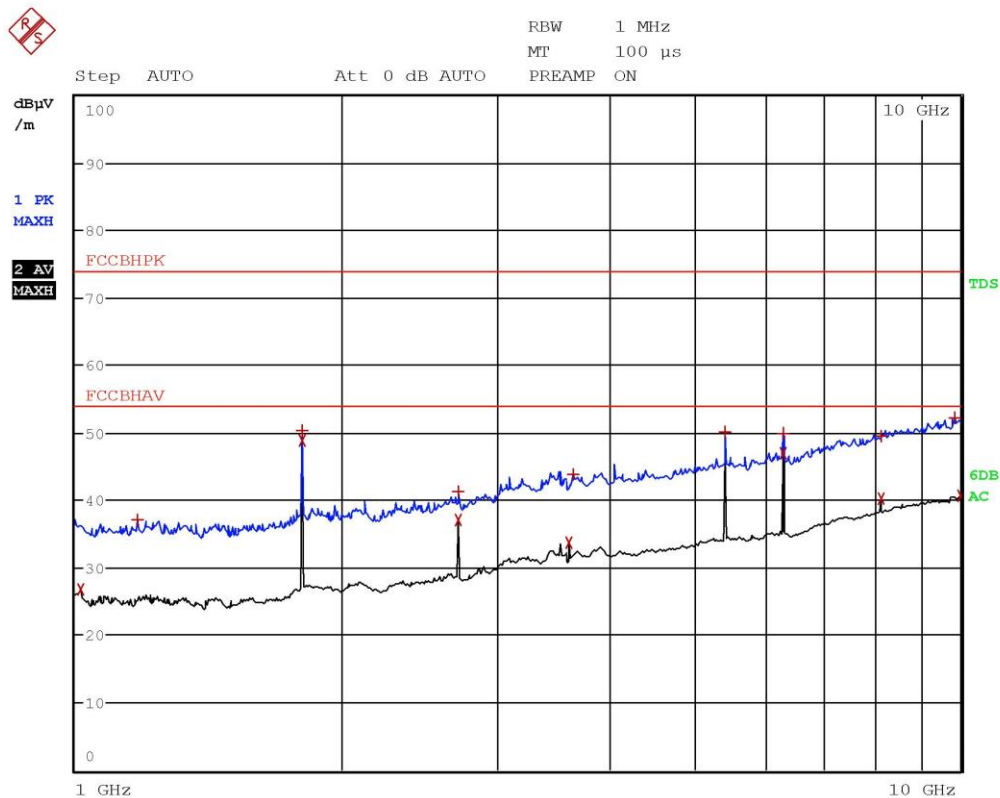


Gandini 20181502



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL, dBμV/m	DELTA LIMIT dB
2 Average	1.0148 GHz	26.71	-27.26
1 Max Peak	1.178 GHz	37.10	-36.88
1 Max Peak	1.8048 GHz	50.22	-23.75
2 Average	1.8048 GHz	48.90	-5.07
2 Average	2.7068 GHz	37.05	-16.92
1 Max Peak	2.7072 GHz	41.27	-32.70
2 Average	3.6092 GHz	33.64	-20.33
1 Max Peak	3.6576 GHz	43.80	-30.17
1 Max Peak	5.4136 GHz	50.00	-23.97
1 Max Peak	6.316 GHz	49.98	-23.99
2 Average	6.316 GHz	47.02	-6.95
1 Max Peak	8.1196 GHz	49.42	-24.55
2 Average	8.1212 GHz	40.25	-13.73
1 Max Peak	9.8652 GHz	52.13	-21.84
2 Average	9.9816 GHz	40.66	-13.31

Gandini 20181502

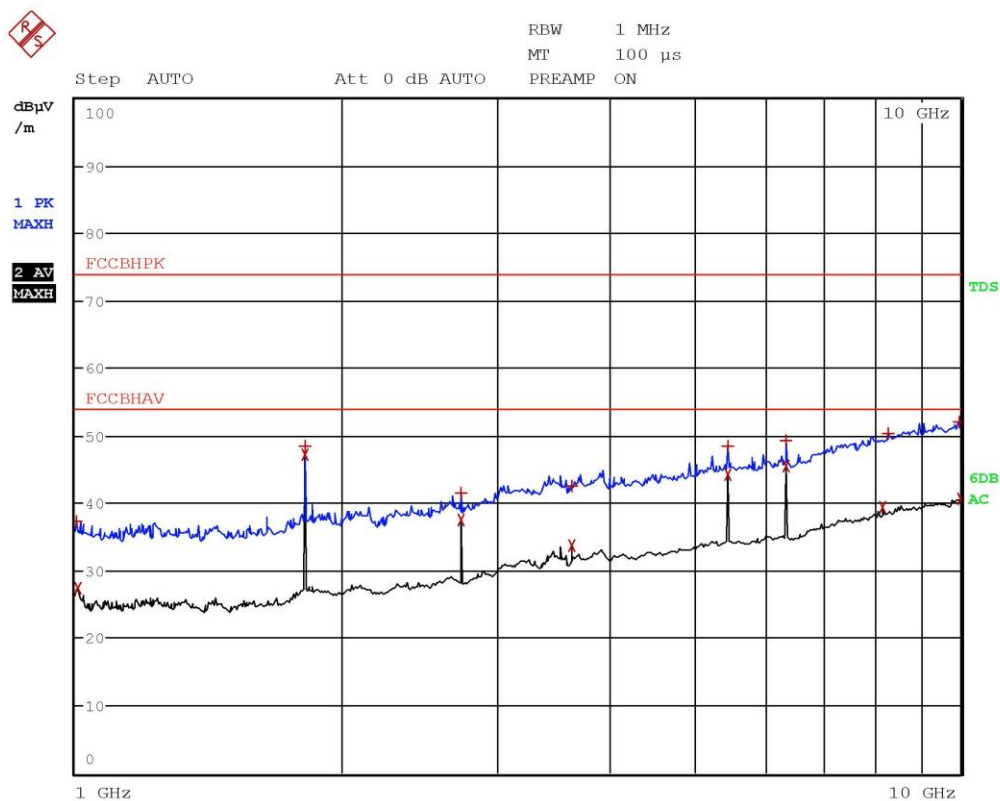


Gandini 20181503



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Max Peak	1.0044 GHz	37.27	-36.70
2 Average	1.006 GHz	27.37	-26.60
1 Max Peak	1.8172 GHz	48.36	-25.61
2 Average	1.8172 GHz	47.15	-6.82
2 Average	2.7256 GHz	37.56	-16.42
1 Max Peak	2.7256 GHz	41.41	-32.56
2 Average	3.634 GHz	33.65	-20.32
1 Max Peak	3.6436 GHz	42.44	-31.53
2 Average	5.4508 GHz	44.31	-9.66
1 Max Peak	5.4512 GHz	48.46	-25.51
1 Max Peak	6.3592 GHz	49.22	-24.75
2 Average	6.3592 GHz	45.42	-8.55
2 Average	8.1764 GHz	39.39	-14.58
1 Max Peak	8.2928 GHz	50.22	-23.75
1 Max Peak	9.9784 GHz	51.90	-22.07
2 Average	9.9836 GHz	40.68	-13.30

Gandini 20181503

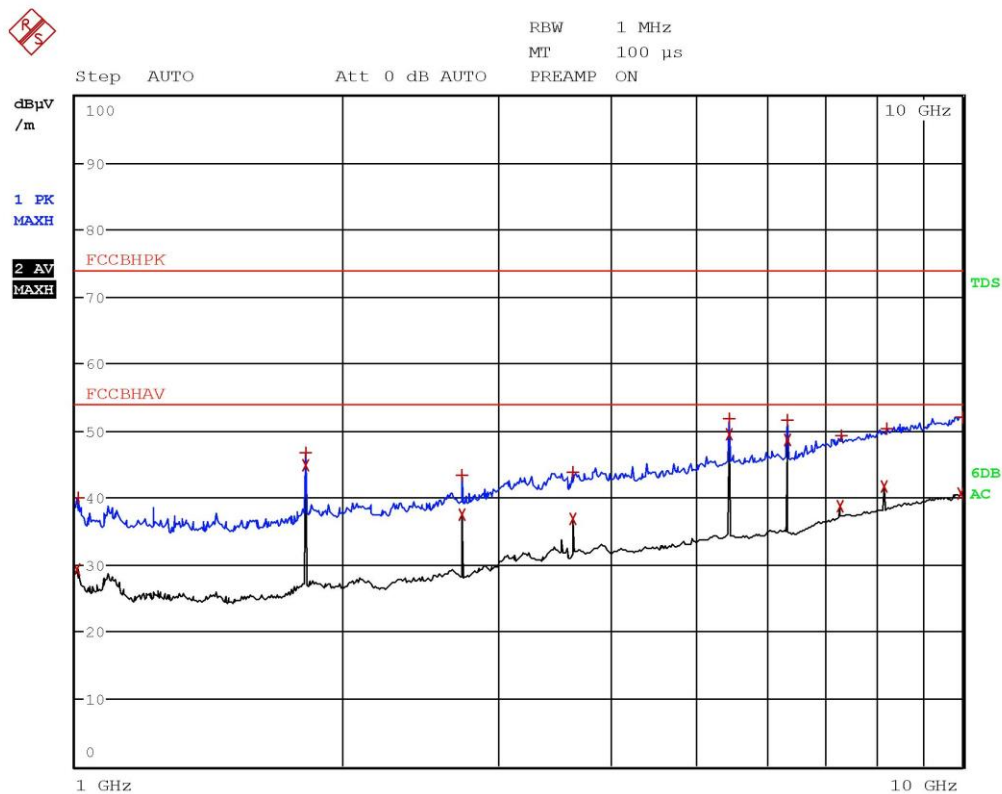


Gandini 20181504



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
2 Average	1.0032 GHz	29.29	-24.68
1 Max Peak	1.0084 GHz	40.07	-33.90
1 Max Peak	1.8172 GHz	46.68	-27.29
2 Average	1.8172 GHz	44.86	-9.11
1 Max Peak	2.7256 GHz	43.28	-30.69
2 Average	2.7256 GHz	37.43	-16.54
2 Average	3.634 GHz	36.84	-17.13
1 Max Peak	3.634 GHz	43.87	-30.10
2 Average	5.4508 GHz	49.54	-4.43
1 Max Peak	5.4512 GHz	51.80	-22.17
2 Average	6.3592 GHz	48.65	-5.32
1 Max Peak	6.3596 GHz	51.64	-22.34
2 Average	7.2684 GHz	38.66	-15.31
1 Max Peak	7.2948 GHz	49.23	-24.74
2 Average	8.176 GHz	41.71	-12.26
1 Max Peak	8.2208 GHz	50.21	-23.76
2 Average	9.9728 GHz	40.63	-13.35
1 Max Peak	9.9972 GHz	52.06	-21.91

Gandini 20181504

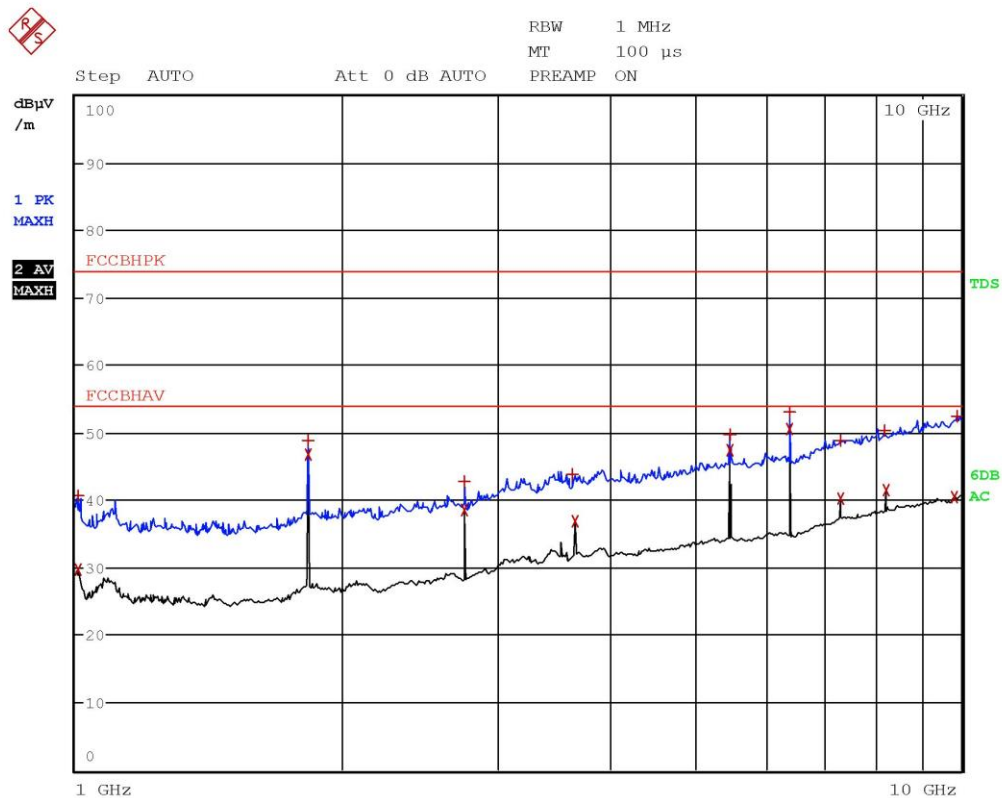


Gandini 20181505



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Max Peak	1.0052 GHz	40.72	-33.25
2 Average	1.0064 GHz	29.68	-24.29
1 Max Peak	1.83 GHz	48.85	-25.12
2 Average	1.83 GHz	46.64	-7.34
1 Max Peak	2.7444 GHz	42.80	-31.17
2 Average	2.7448 GHz	38.57	-15.40
1 Max Peak	3.64 GHz	43.76	-30.21
2 Average	3.6596 GHz	36.87	-17.10
2 Average	5.4892 GHz	47.29	-6.68
1 Max Peak	5.4896 GHz	49.72	-24.25
1 Max Peak	6.4044 GHz	53.10	-20.88
2 Average	6.4044 GHz	50.46	-3.51
1 Max Peak	7.2944 GHz	48.78	-25.19
2 Average	7.3196 GHz	40.28	-13.70
1 Max Peak	8.1852 GHz	50.23	-23.74
2 Average	8.234 GHz	41.49	-12.48
2 Average	9.8324 GHz	40.48	-13.49
1 Max Peak	9.878 GHz	52.37	-21.60

Gandini 20181505

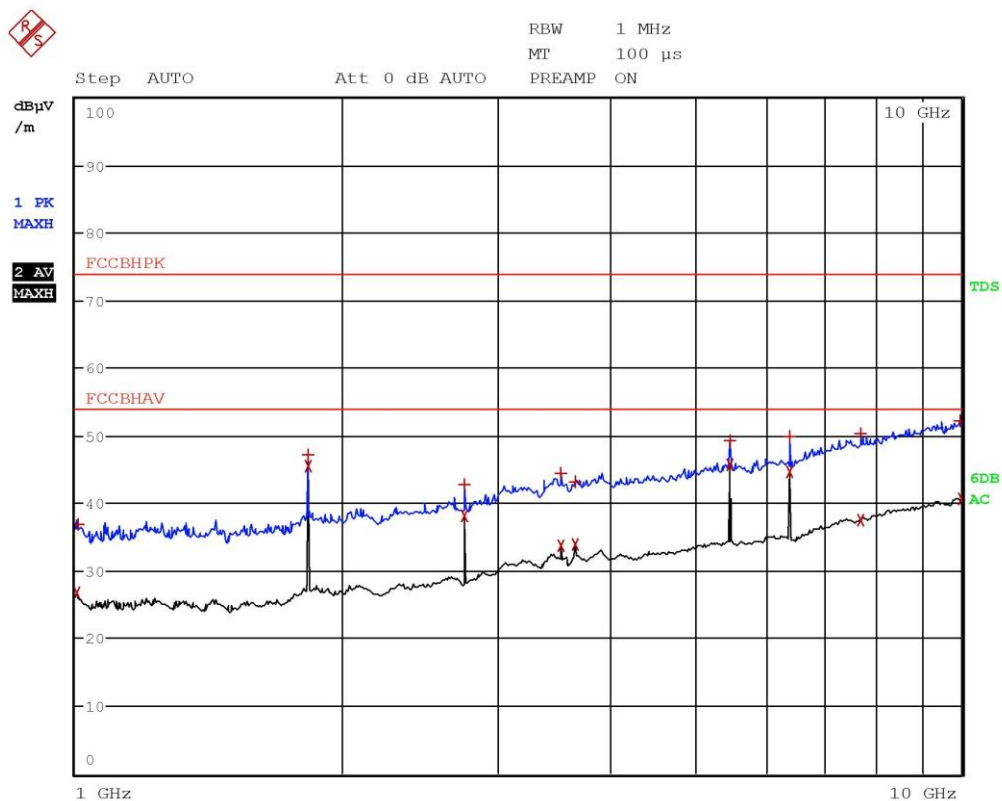


Gandini 20181506



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
2 Average	1.0044 GHz	26.87	-27.10
1 Max Peak	1.0052 GHz	36.93	-37.04
1 Max Peak	1.83 GHz	47.13	-26.84
2 Average	1.83 GHz	45.50	-8.47
1 Max Peak	2.7448 GHz	42.80	-31.17
2 Average	2.7448 GHz	38.09	-15.88
2 Average	3.5356 GHz	33.68	-20.29
1 Max Peak	3.5356 GHz	44.52	-29.45
2 Average	3.6596 GHz	34.02	-19.95
1 Max Peak	3.6672 GHz	43.24	-30.73
1 Max Peak	5.4896 GHz	49.32	-24.65
2 Average	5.4896 GHz	45.63	-8.34
2 Average	6.404 GHz	44.59	-9.38
1 Max Peak	6.404 GHz	49.86	-24.11
1 Max Peak	7.6848 GHz	50.33	-23.64
2 Average	7.6884 GHz	37.57	-16.40
1 Max Peak	9.9676 GHz	52.29	-21.69
2 Average	9.9872 GHz	40.70	-13.27

Gandini 20181506

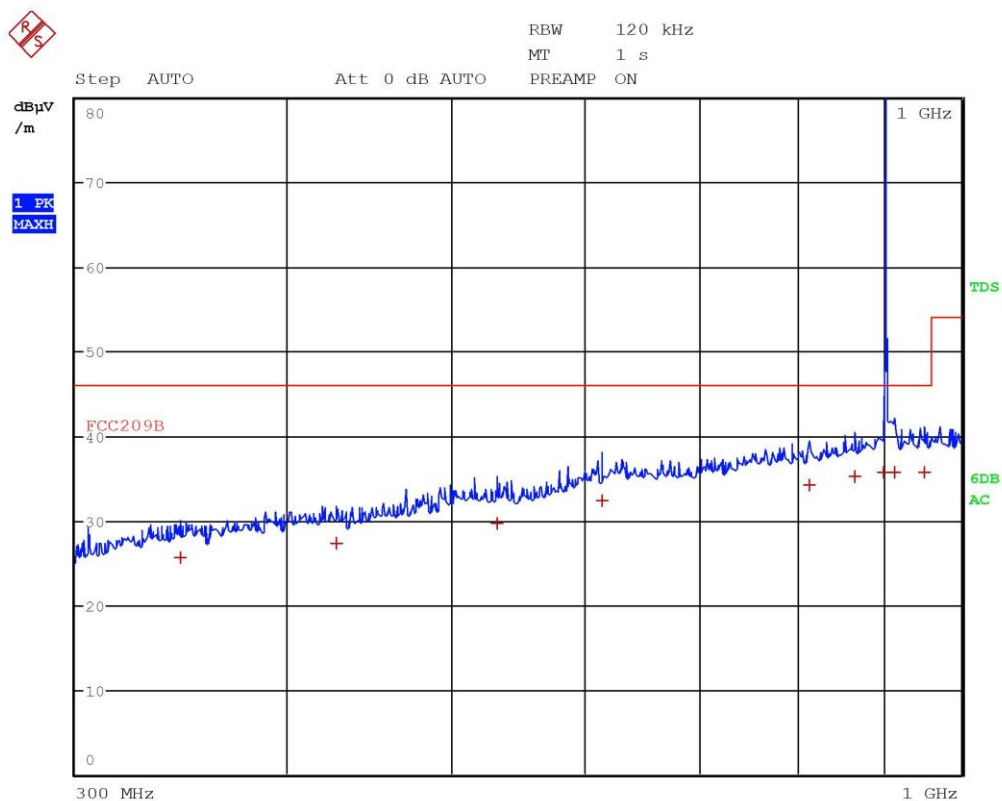


Gandini 20181513



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	345.92 MHz	25.70	-20.32
1 Quasi Peak	427.72 MHz	27.25	-18.76
1 Quasi Peak	531.8 MHz	29.71	-16.30
1 Quasi Peak	614 MHz	32.31	-13.70
1 Quasi Peak	813.72 MHz	34.17	-11.84
1 Quasi Peak	865.64 MHz	35.20	-10.81
1 Quasi Peak	898.48 MHz	35.73	-10.28
1 Quasi Peak	913 MHz	35.74	-10.27
1 Quasi Peak	950.16 MHz	35.66	-10.35

Gandini 20181513

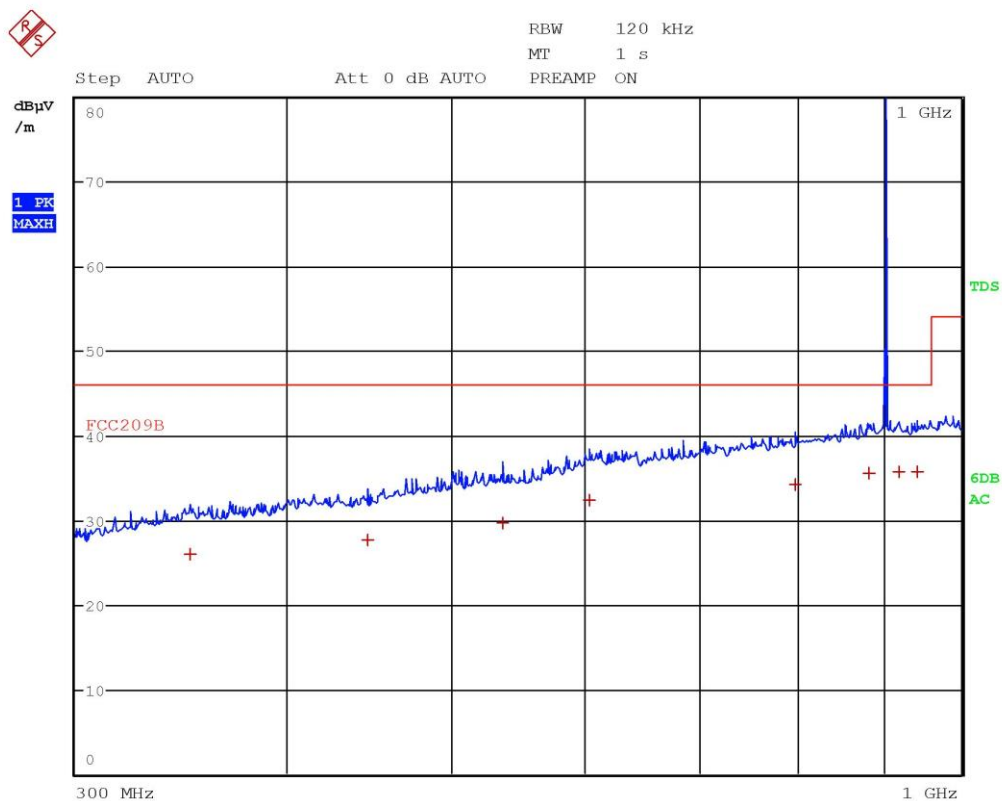


Gandini 20181514



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	350.84 MHz	25.88	-20.13
1 Quasi Peak	446.64 MHz	27.57	-18.44
1 Quasi Peak	536.4 MHz	29.65	-16.36
1 Quasi Peak	602.72 MHz	32.38	-13.63
1 Quasi Peak	798.64 MHz	34.12	-11.89
1 Quasi Peak	881.56 MHz	35.52	-10.49
1 Quasi Peak	918.52 MHz	35.77	-10.24
1 Quasi Peak	941.72 MHz	35.66	-10.35

Gandini 20181514

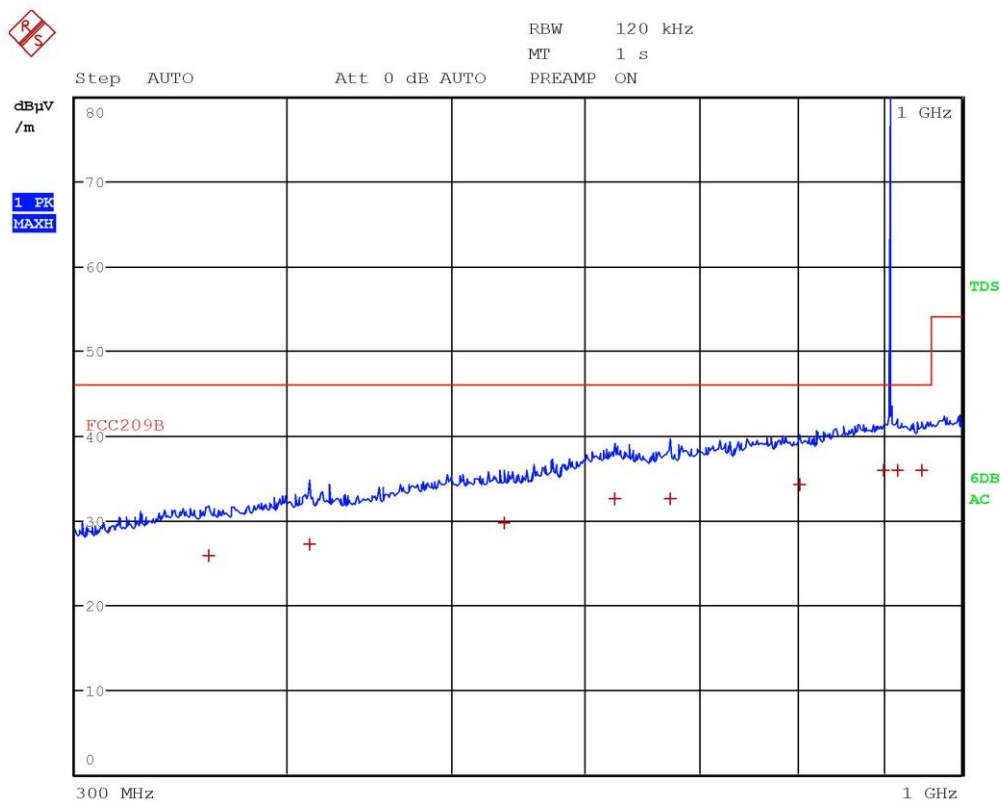


Gandini 20181515



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	359.48 MHz	25.86	-20.15
1 Quasi Peak	412.52 MHz	27.15	-18.86
1 Quasi Peak	537.28 MHz	29.59	-16.42
1 Quasi Peak	624.2 MHz	32.44	-13.57
1 Quasi Peak	673.32 MHz	32.52	-13.49
1 Quasi Peak	802.48 MHz	34.15	-11.86
1 Quasi Peak	899.56 MHz	35.93	-10.08
1 Quasi Peak	917.28 MHz	35.92	-10.09
1 Quasi Peak	947.76 MHz	35.82	-10.20

Gandini 20181515

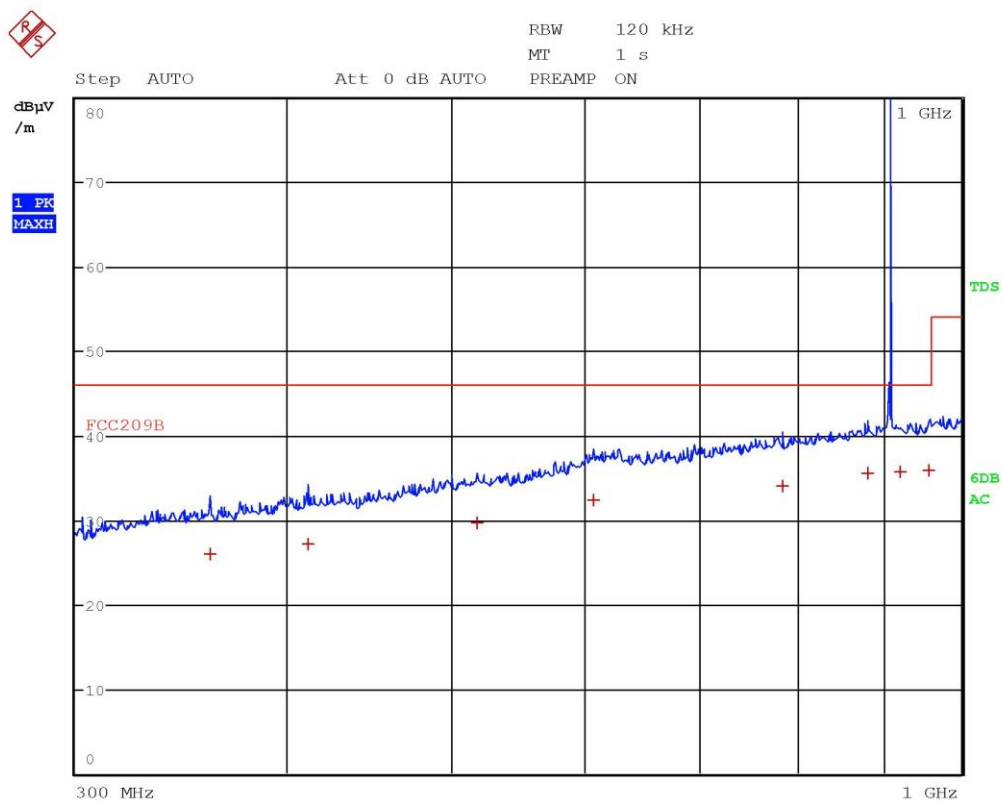

Gandini 20181516



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	360.56 MHz	25.90	-20.11
1 Quasi Peak	411.68 MHz	27.21	-18.80
1 Quasi Peak	518.04 MHz	29.58	-16.44
1 Quasi Peak	606.64 MHz	32.34	-13.68
1 Quasi Peak	784.68 MHz	33.99	-12.02
1 Quasi Peak	880.56 MHz	35.47	-10.55
1 Quasi Peak	920.96 MHz	35.76	-10.25
1 Quasi Peak	955.8 MHz	35.84	-10.17

Gandini 20181516