PHOTOGRAPHS OF THE EUT

Otis ONE

Otis ONE

Otis ONE
BATSW
RST

Otis ONE
USB
ETH
VOICE2
VOICE1
RS422
CAN
PWR2
PWR1
CELLULAR

Otis ONE®
BAT
RUN
MDM
RSSI
LINK
DEV
SENSOR

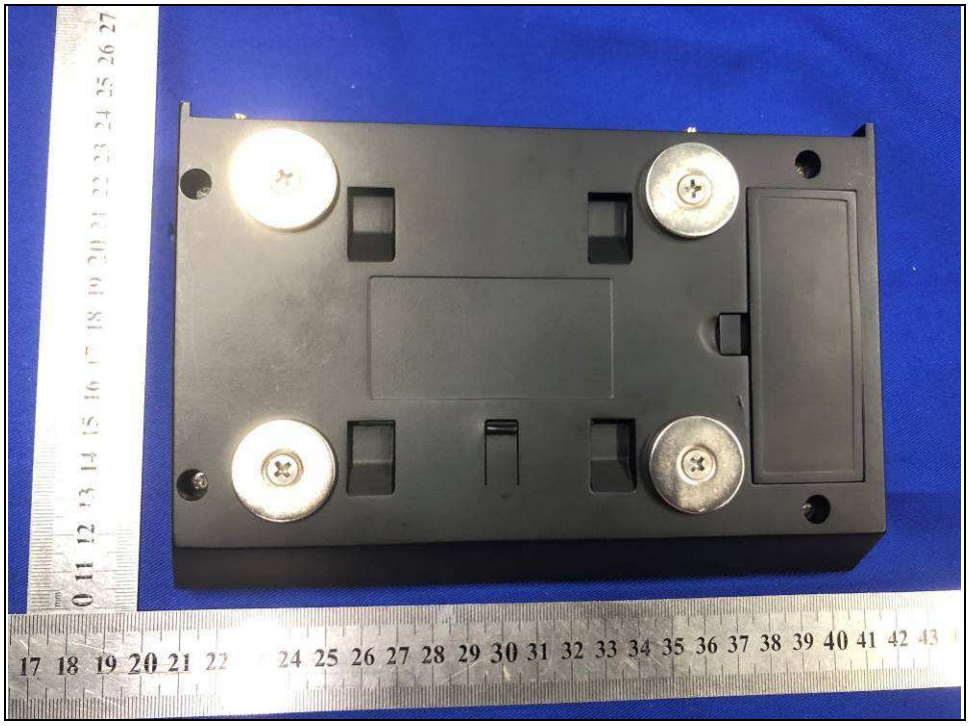

VOICE1 Port and VIOCE2 Port are only reserved for the prototype without any function. Please refer to the manual for details.
Micro USB Port is only for engineering debugging.
USB
ETH
VOICE2
VOICE1
RS422
CAN
PWR2
PWR1

Otis ONE
BAT
RUN
BATSW
RST