

Test Report

Report No.: MTi210628011-04E3

Date of issue: Jan. 18, 2022

Applicant: Xiamen Hanin Electronic Technology Co., Ltd.

Product: Barcode Printer

Model(s): iT4R, HT4R, iV3800R, ST34R, P54R, 324R,
J-5400R, Y12R, PZ420R, T432R, ST14R,
P43R, T430R

FCC ID: 2AUTE-IT4R

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions


1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1	General Description	5
1.1	Description of EUT	5
1.2	Description of test modes	5
1.3	Measurement uncertainty	7
2	Summary of Test Result.....	8
3	Test Facilities and Accreditations	9
3.1	Test laboratory	9
4	Equipment List	10
5	Test Result	11
5.1	Antenna requirement	11
5.2	AC power line conducted emissions.....	12
5.3	6dB occupied bandwidth	21
5.4	Conducted peak output power	23
5.5	Power spectral density test	25
5.6	Conducted emissions at the band edge	27
5.7	Conducted spurious emissions	29
5.8	Duty Cycle	32
5.9	Radiated spurious emission	33
	Photographs of the Test Setup.....	43
	Photographs of the EUT.....	44


Test Result Certification	
Applicant:	Xiamen Hanin Electronic Technology Co., Ltd.
Address:	Room 305A, Angye Building, Pioneering Park, Torch High-tech, Zone, Xiamen
Manufacturer:	Xiamen Hanin Electronic Technology Co., Ltd.
Address:	Room 305A, Angye Building, Pioneering Park, Torch High-tech, Zone, Xiamen
Factory:	Xiamen Hanin Electronic Technology Co., Ltd.
Address:	No.96, Rongyuan Road, Tong'an District, Xiamen
Product description	
Product name:	Barcode Printer
Trademark:	HPRT, iDPRT
Model name:	iT4R
Serial Model:	HT4R, iV3800R, ST34R, P54R, 324R, J-5400R, Y12R, PZ420R, T432R, ST14R, P43R, T430R
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013
Date of Test	
Date of test:	2021-12-14 ~ 2022-01-18
Test result:	Pass

Test Engineer :



(Cindy Qin)

Reviewed By :



(Leon Chen)

Approved By :



(Tom Xue)

1 General Description

1.1 Description of EUT

Product name:	Barcode Printer
Model name:	iT4R
Series Model:	HT4R, iV3800R, ST34R, P54R, 324R, J-5400R, Y12R, PZ420R, T432R, ST14R, P43R, T430R
Model difference:	All the models are the same circuit and RF module, except the model name.
Electrical rating:	DC 24V from adapter AC 120V/60Hz
Hardware version:	iT4RMB
Software version:	V iT4R S
Accessories:	Adapter 1: MODEL: GM60-240250-F INPUT: 100-240V~50/60Hz 2.0A OUTPUT: 24.0V=2.5A; 60.0W Adapter 2: MODEL: AP115G-240250 INPUT: 100-240V~50/60Hz 2.0A Max. OUTPUT: 24.0V=2.5A 60.0W
EUT serial number:	MTi210628011-04-S0001
RF specification:	
Bluetooth version:	V5.0
Operation frequency:	2402 MHz ~ 2480 MHz
Modulation type:	GFSK
Antenna designation:	PCB antenna, antenna Gain: 1 dBi
Max. peak conducted output power:	5.155 dBm

1.2 Description of test modes

1.2.1 Operation channel list

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478

9	2420	19	2440	29	2460	39	2480
---	------	----	------	----	------	----	------

1.2.2 Test channels

Chanel	Frequency
Lowest (CH0)	2402MHz
Middle (CH19)	2440MHz
Highest (CH39)	2480MHz

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

1.2.3 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
/	/	/	/

1.3 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	± 2.5 dB
Occupied Bandwidth	± 3 %
Conducted RF output power	± 0.16 dB
Conducted spurious emissions	± 0.21 dB
Radiated emission (9 kHz ~ 30 MHz)	± 4.0 dB
Radiated emission (30 MHz~1 GHz)	± 4.2 dB
Radiated emission (above 1 GHz)	± 4.3 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	15.247(a)(2)	6dB occupied bandwidth	Pass
4	15.247(b)(3)	Conducted peak output power	Pass
5	15.247(e)	Power Spectral Density	Pass
6	15.247(d)	Conducted emission at the band edge	Pass
7	15.247(d)	Conducted spurious emissions	Pass
8	/	Duty Cycle	Pass
9	15.247(d)	Radiated spurious emissions	Pass

Note: N/A means not applicable.

3 Test Facilities and Accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2021/06/02	2022/06/01
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127#841	2021/06/02	2022/06/01
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2021/06/02	2022/06/01
MTi-E043	EMI test receiver	R&S	ESCI7	101166	2021/06/02	2022/06/01
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2021/05/30	2023/05/29
MTi-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2023/05/29
MTi-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2023/05/29
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2021/06/02	2022/06/01
MTi-E048	Pre-amplifier	Agilent	8449B	3008A01120	2021/06/02	2022/06/01
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2023/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2021/04/16	2022/04/15
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2021/05/06	2022/05/05
MTi-E135	Horn antenna	Schwarzbeck	BBHA 9170	00987	2021/05/30	2023/05/29
MTi-E136	Pre-amplifier	Space-Dtronics	EWLAN1840G-G45	210405001	2021/06/02	2022/06/01
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2021/06/23	2022/06/22
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2021/06/02	2022/06/01
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D8060153	2021/06/02	2022/06/01
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2021/06/02	2022/06/01
MTi-E010S	EMI Measurement Software	Farad	EZ-EMC Ver. EMEC-3A1	/	/	/
MTi-E014S	RF Test System	Tonscend	TS®JS1120 V2.6.88.0330	/	/	/

5 Test Result

5.1 Antenna requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of EUT is PCB antenna (Antenna Gain: 1 dBi). which is no consideration of replacement.

5.2 AC power line conducted emissions

5.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

5.2.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

5.2.3 Test setup

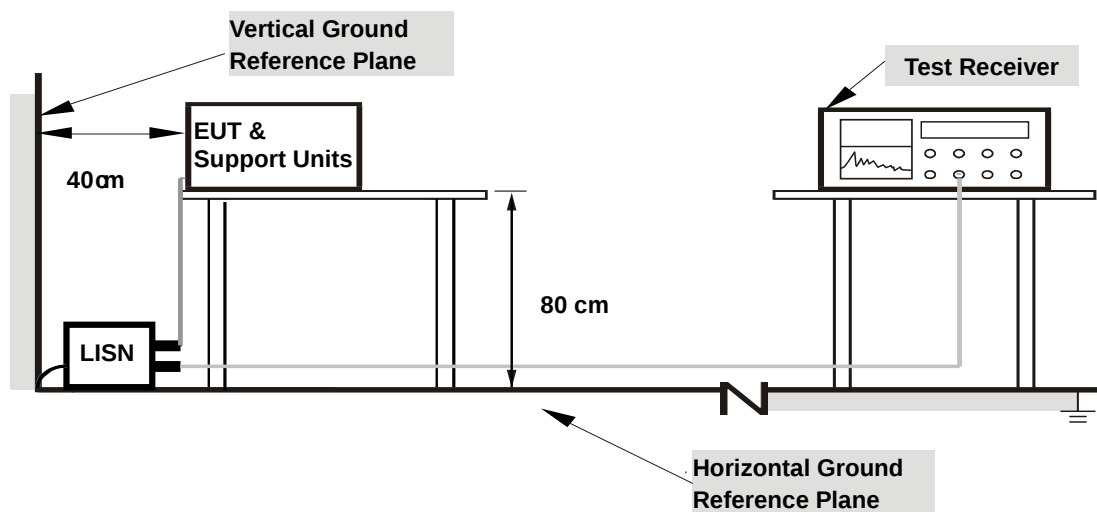

For the actual test configuration, please refer to the related item – Photographs of the test setup.


5.2.4 Test Result

Note:

- The three modulated high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is GFSK CH00.
- Emission Level = Reading Level + Factor, Margin= Emission Level- Limit, Factor = LISN modulus + Cable Loss.


The model for GM60-240250-F AC/DC adapter test data

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 24V from adapter AC 120V/60Hz	Test Mode:	Charging + TX

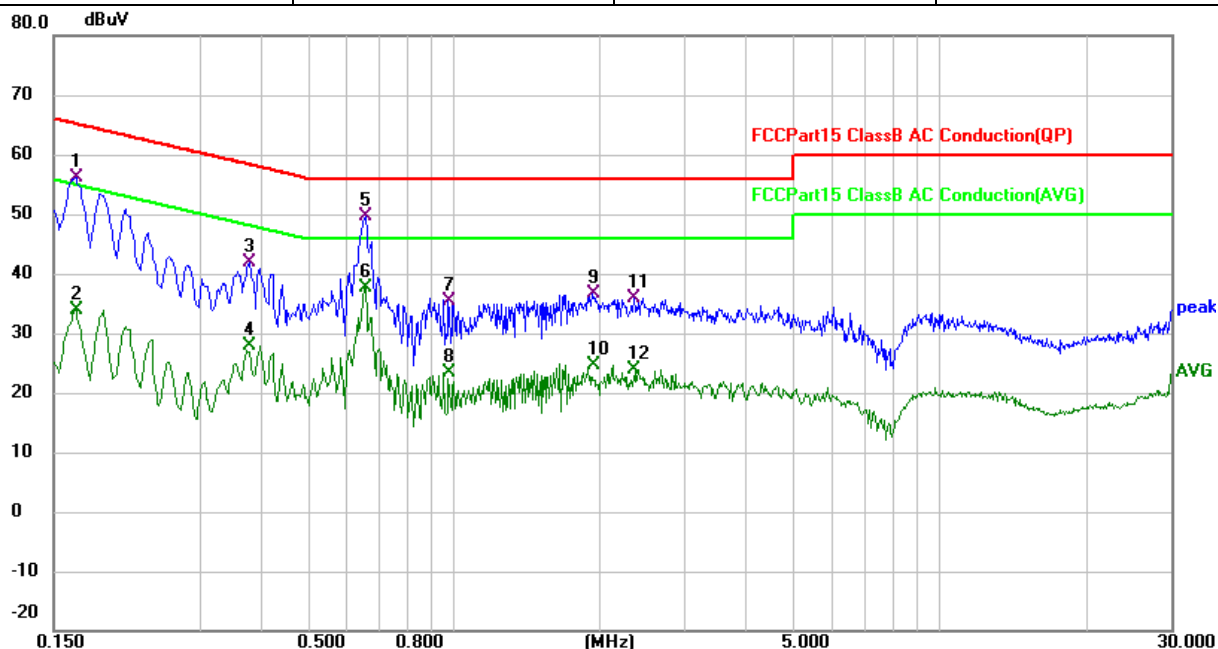


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1660	45.12	10.99	56.11	65.16	-9.05	QP
2		0.1660	22.92	10.99	33.91	55.16	-21.25	AVG
3		0.3780	31.00	10.97	41.97	58.32	-16.35	QP
4		0.3780	16.82	10.97	27.79	48.32	-20.53	CAV
5	*	0.6580	38.49	11.08	49.57	56.00	-6.43	QP
6		0.6580	26.50	11.08	37.58	46.00	-8.42	AVG
7		0.9780	22.03	13.23	35.26	56.00	-20.74	QP
8		0.9780	10.05	13.23	23.28	46.00	-22.72	AVG
9		1.9340	21.30	15.27	36.57	56.00	-19.43	QP
10		1.9340	9.37	15.27	24.64	46.00	-21.36	AVG
11		2.3580	19.80	16.12	35.92	56.00	-20.08	QP
12		2.3580	7.84	16.12	23.96	46.00	-22.04	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 24V from adapter AC 120V/60Hz	Test Mode:	Charging + TX

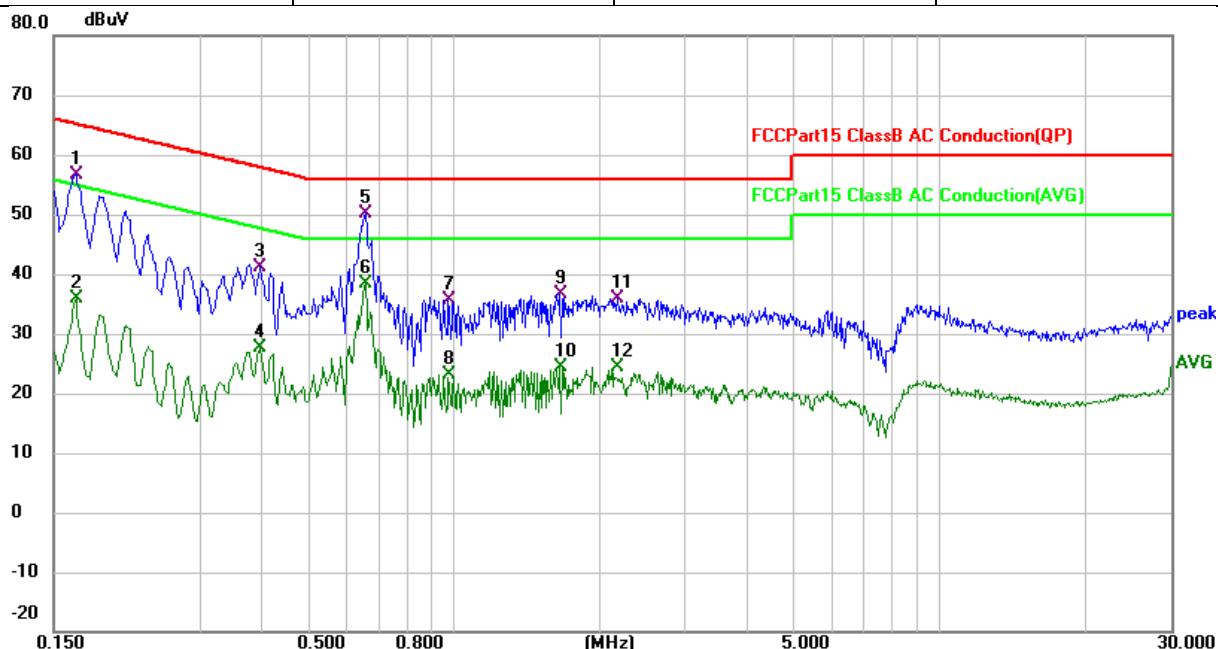


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1660	45.66	10.97	56.63	65.16	-8.53	QP
2		0.1660	24.90	10.97	35.87	55.16	-19.29	AVG
3		0.3980	30.35	10.90	41.25	57.90	-16.65	QP
4		0.3980	16.62	10.90	27.52	47.90	-20.38	CAV
5	*	0.6580	39.19	11.04	50.23	56.00	-5.77	QP
6		0.6580	27.42	11.04	38.46	46.00	-7.54	AVG
7		0.9780	22.56	13.16	35.72	56.00	-20.28	QP
8		0.9780	10.02	13.16	23.18	46.00	-22.82	AVG
9		1.6540	22.10	14.63	36.73	56.00	-19.27	QP
10		1.6540	9.69	14.63	24.32	46.00	-21.68	AVG
11		2.1740	20.17	15.74	35.91	56.00	-20.09	QP
12		2.1740	8.64	15.74	24.38	46.00	-21.62	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 24V from adapter AC 240V/60Hz	Test Mode:	Charging + TX

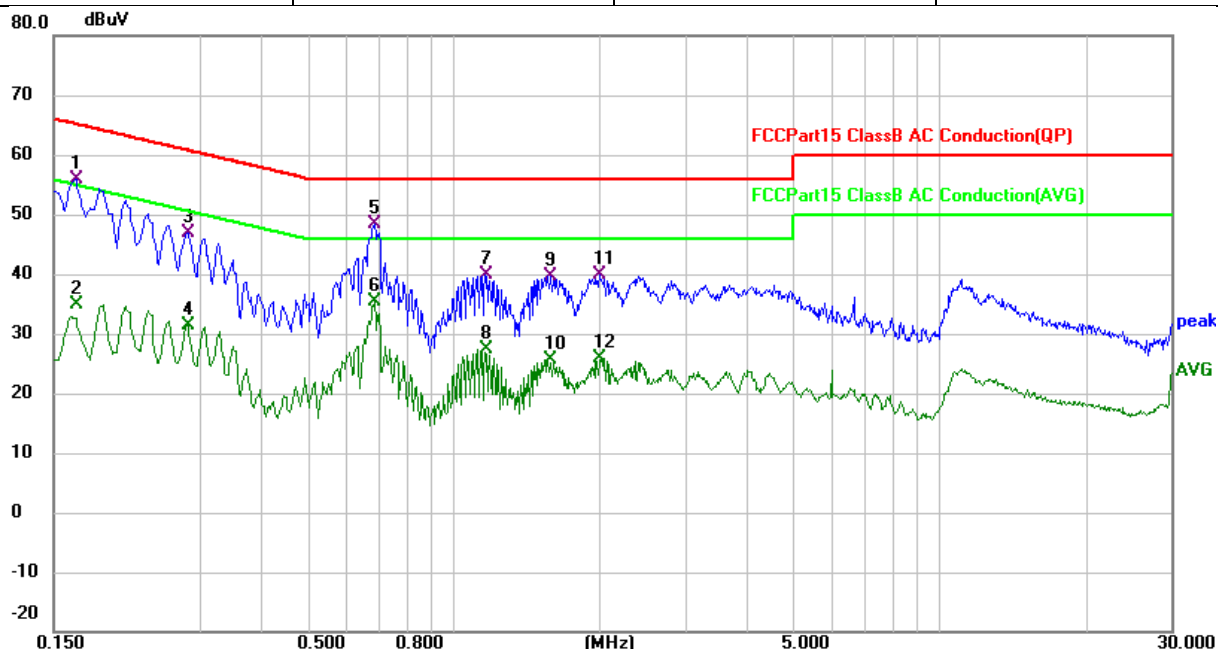

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1660	44.95	10.97	55.92	65.16	-9.24	QP
2		0.1660	23.84	10.97	34.81	55.16	-20.35	AVG
3		0.2819	35.97	10.89	46.86	60.76	-13.90	QP
4		0.2819	20.57	10.89	31.46	50.76	-19.30	AVG
5	*	0.6860	37.26	11.07	48.33	56.00	-7.67	QP
6		0.6860	24.20	11.07	35.27	46.00	-10.73	AVG
7		1.1620	26.22	13.54	39.76	56.00	-16.24	QP
8		1.1620	13.94	13.54	27.48	46.00	-18.52	AVG
9		1.5859	25.18	14.49	39.67	56.00	-16.33	QP
10		1.5859	11.15	14.49	25.64	46.00	-20.36	AVG
11		1.9980	24.51	15.40	39.91	56.00	-16.09	QP
12		1.9980	10.57	15.40	25.97	46.00	-20.03	AVG


EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 24V from adapter AC 240V/60Hz	Test Mode:	Charging + TX

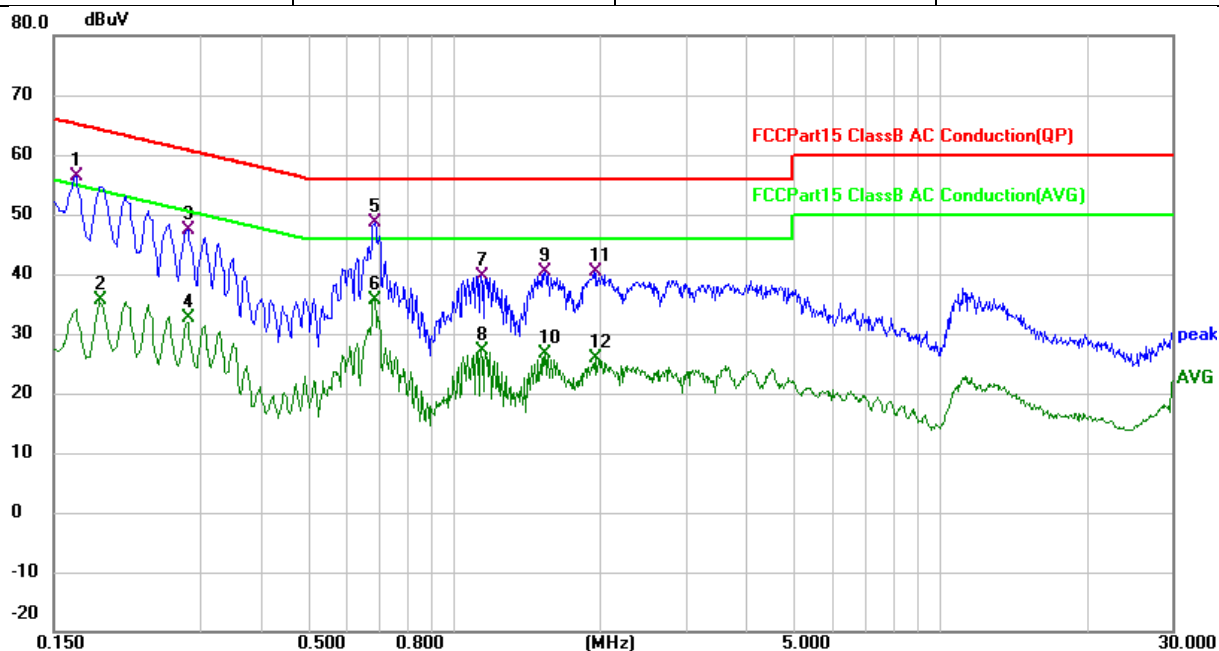

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1660	45.48	10.97	56.45	65.16	-8.71	QP
2		0.1860	24.66	10.94	35.60	54.21	-18.61	AVG
3		0.2819	36.48	10.89	47.37	60.76	-13.39	QP
4		0.2819	21.86	10.89	32.75	50.76	-18.01	AVG
5	*	0.6860	37.57	11.07	48.64	56.00	-7.36	QP
6		0.6860	24.63	11.07	35.70	46.00	-10.30	AVG
7		1.1380	26.18	13.51	39.69	56.00	-16.31	QP
8		1.1380	13.57	13.51	27.08	46.00	-18.92	AVG
9		1.5380	25.94	14.38	40.32	56.00	-15.68	QP
10		1.5380	12.16	14.38	26.54	46.00	-19.46	AVG
11		1.9420	25.05	15.27	40.32	56.00	-15.68	QP
12		1.9420	10.63	15.27	25.90	46.00	-20.10	AVG


The model for AP115G-24250 AC/DC adapter test data

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 24V from adapter AC 120V/60Hz	Test Mode:	Charging + TX

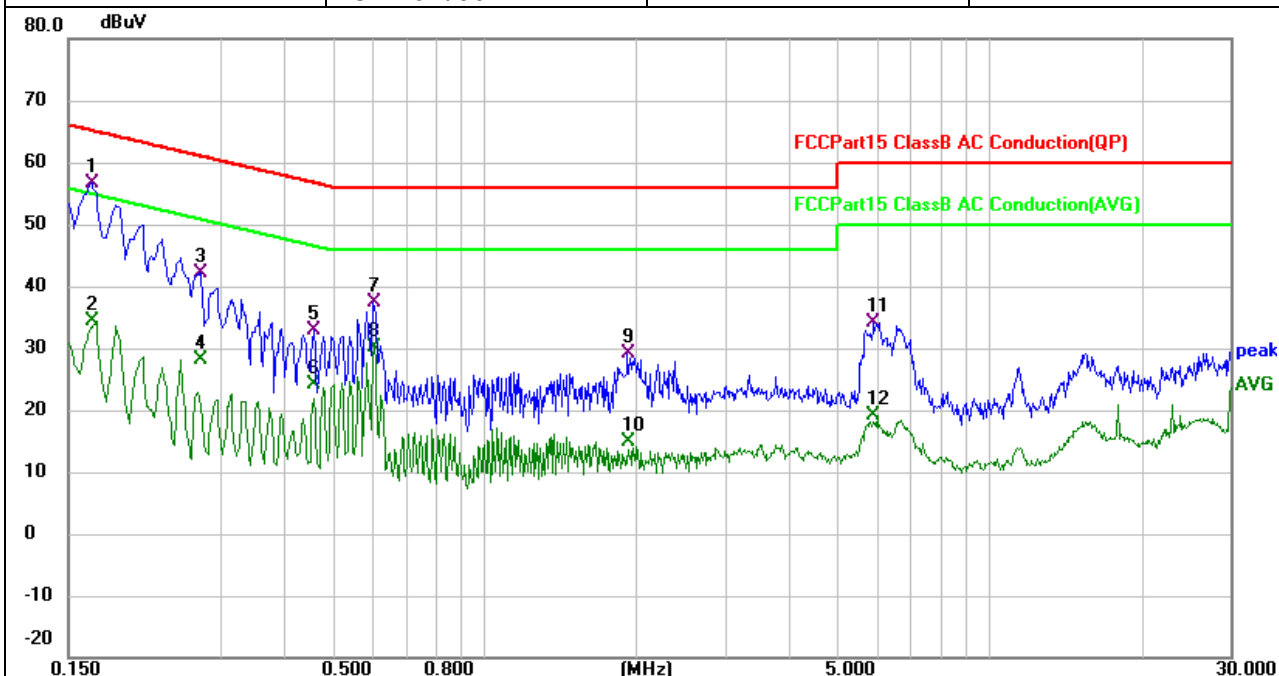


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1660	45.63	10.99	56.62	65.16	-8.54	QP
2		0.1660	23.31	10.99	34.30	55.16	-20.86	AVG
3		0.2740	31.23	10.99	42.22	61.00	-18.78	QP
4		0.2740	17.12	10.99	28.11	51.00	-22.89	AVG
5		0.4580	21.73	11.03	32.76	56.73	-23.97	QP
6		0.4580	13.18	11.03	24.21	46.73	-22.52	AVG
7		0.6020	26.38	11.07	37.45	56.00	-18.55	QP
8		0.6020	19.16	11.07	30.23	46.00	-15.77	AVG
9		1.9260	13.75	15.27	29.02	56.00	-26.98	QP
10		1.9260	-0.44	15.27	14.83	46.00	-31.17	AVG
11		5.9100	22.51	11.54	34.05	60.00	-25.95	QP
12		5.9100	7.59	11.54	19.13	50.00	-30.87	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 24V from adapter AC 120V/60Hz	Test Mode:	Charging + TX

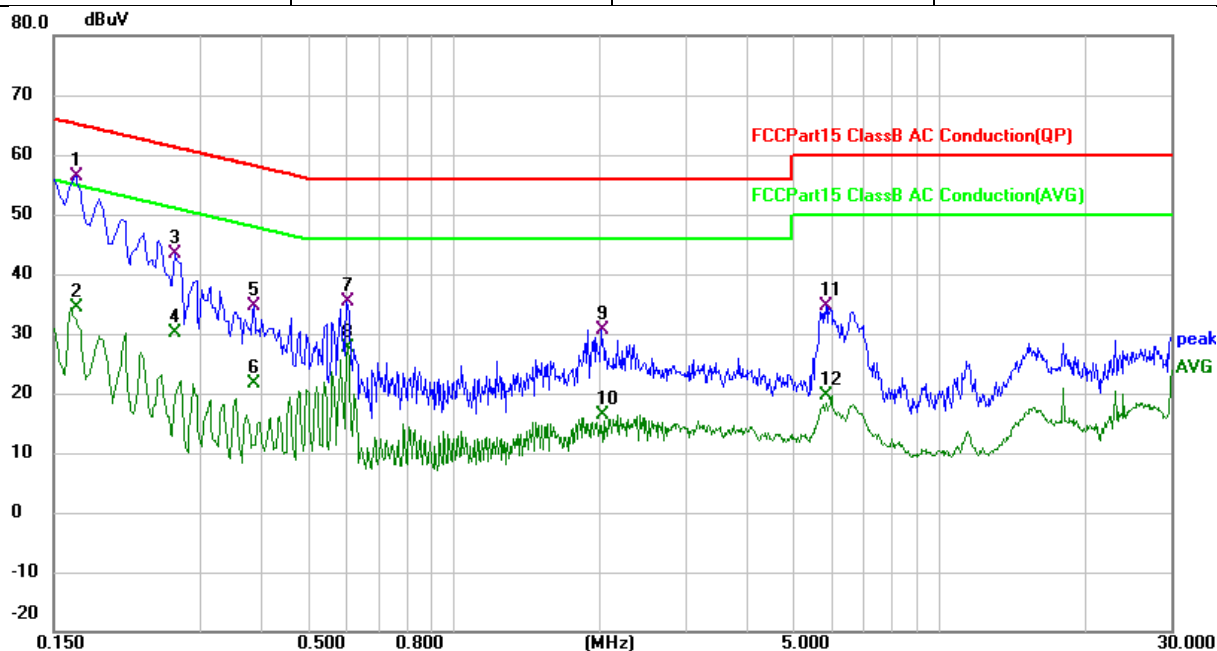


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1660	45.36	10.97	56.33	65.16	-8.83	QP
2		0.1660	23.30	10.97	34.27	55.16	-20.89	AVG
3		0.2660	32.43	10.89	43.32	61.24	-17.92	QP
4		0.2660	19.16	10.89	30.05	51.24	-21.19	AVG
5		0.3860	23.66	10.89	34.55	58.15	-23.60	QP
6		0.3860	10.72	10.89	21.61	48.15	-26.54	AVG
7		0.6020	24.49	10.99	35.48	56.00	-20.52	QP
8		0.6020	16.61	10.99	27.60	46.00	-18.40	AVG
9		2.0220	15.20	15.43	30.63	56.00	-25.37	QP
10		2.0220	0.99	15.43	16.42	46.00	-29.58	AVG
11		5.8619	23.27	11.39	34.66	60.00	-25.34	QP
12		5.8619	8.30	11.39	19.69	50.00	-30.31	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 24V from adapter AC 240V/60Hz	Test Mode:	Charging + TX

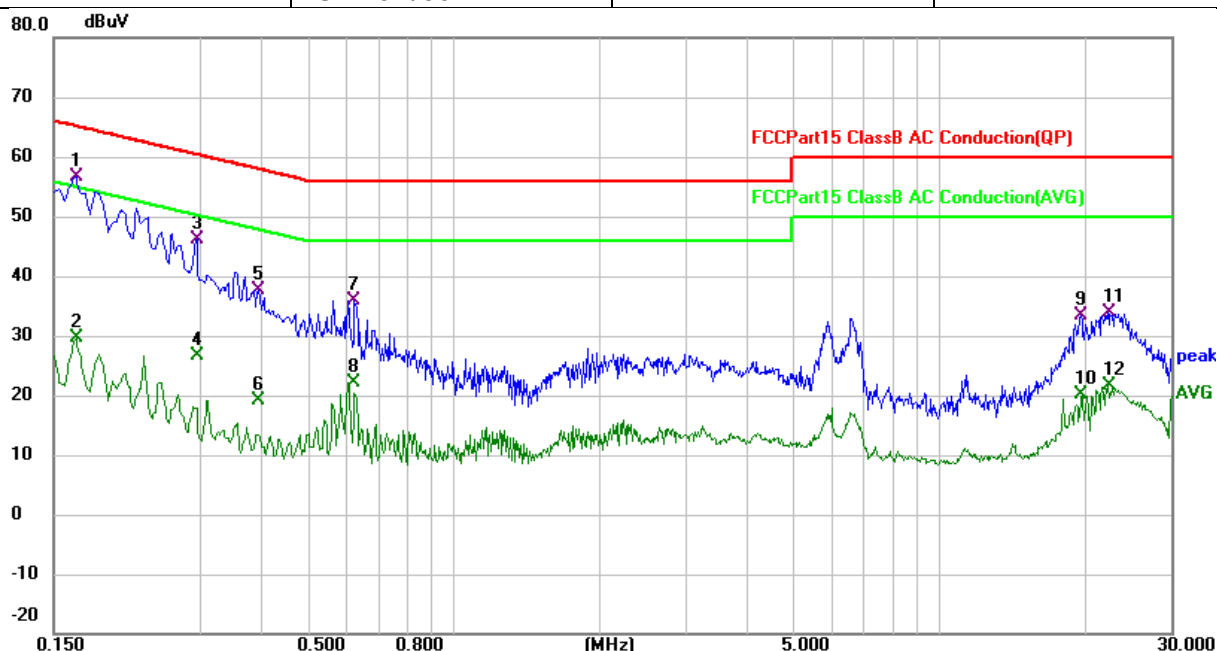

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1660	45.66	10.99	56.65	65.16	-8.51	QP
2		0.1660	18.59	10.99	29.58	55.16	-25.58	AVG
3		0.2940	35.04	10.98	46.02	60.41	-14.39	QP
4		0.2940	15.61	10.98	26.59	50.41	-23.82	AVG
5		0.3940	26.72	10.97	37.69	57.98	-20.29	QP
6		0.3940	8.28	10.97	19.25	47.98	-28.73	AVG
7		0.6260	24.91	11.08	35.99	56.00	-20.01	QP
8		0.6260	11.02	11.08	22.10	46.00	-23.90	AVG
9		19.6139	21.58	11.83	33.41	60.00	-26.59	QP
10		19.6139	8.42	11.83	20.25	50.00	-29.75	AVG
11		22.1820	22.02	11.82	33.84	60.00	-26.16	QP
12		22.1820	9.69	11.82	21.51	50.00	-28.49	AVG

EUT:	Barcode Printer	Model Name:	iT4R
Pressure:	1010hPa	Phase:	N
Test Voltage:	DC 24V from adapter AC 240V/60Hz	Test Mode:	Charging + TX

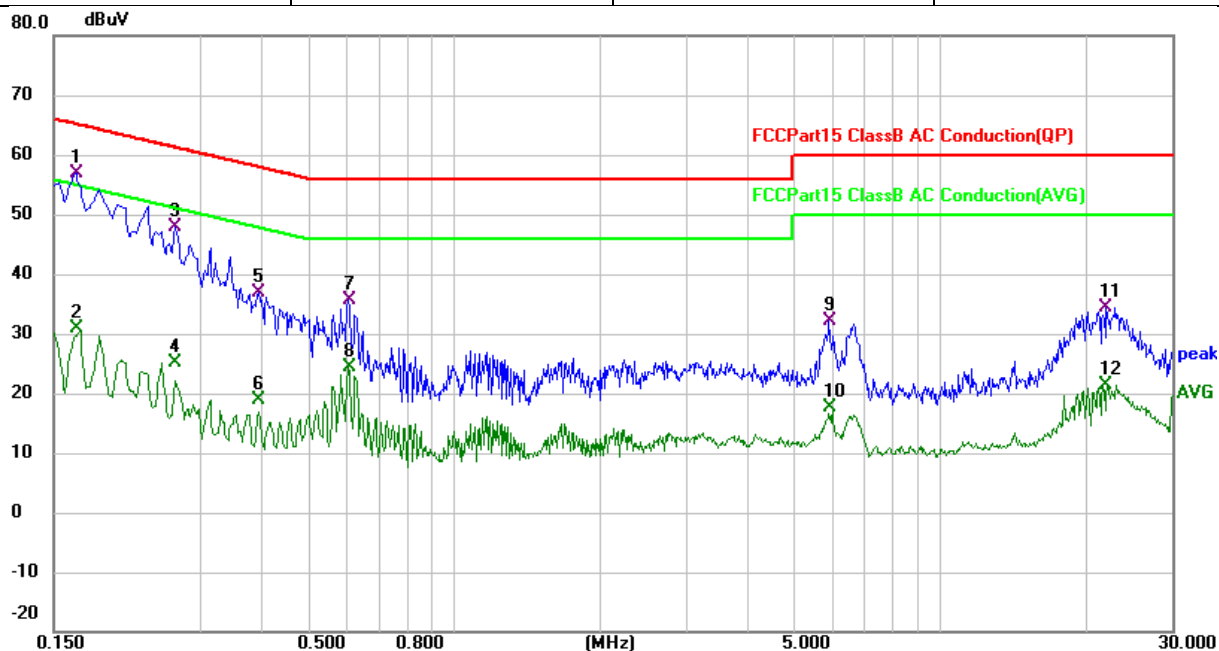


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1660	45.88	10.97	56.85	65.16	-8.31	QP
2		0.1660	20.01	10.97	30.98	55.16	-24.18	AVG
3		0.2660	37.06	10.89	47.95	61.24	-13.29	QP
4		0.2660	14.15	10.89	25.04	51.24	-26.20	AVG
5		0.3940	25.91	10.91	36.82	57.98	-21.16	QP
6		0.3940	8.07	10.91	18.98	47.98	-29.00	AVG
7		0.6060	24.52	10.99	35.51	56.00	-20.49	QP
8		0.6060	13.39	10.99	24.38	46.00	-21.62	AVG
9		5.9219	20.69	11.39	32.08	60.00	-27.92	QP
10		5.9219	6.29	11.39	17.68	50.00	-32.32	AVG
11		22.0419	22.55	11.82	34.37	60.00	-25.63	QP
12		22.0419	9.63	11.82	21.45	50.00	-28.55	AVG

5.3 6dB occupied bandwidth

5.3.1 Limits

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3.2 Test setup






5.3.3 Test procedures

- Test method: ANSI C63.10-2013 Section 11.8.2.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, detector = Peak

5.3.4 Test results

Mode	Test channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
BLE 1Mbps	CH0	2402	0.7075	≥ 0.5
	CH19	2440	0.7186	≥ 0.5
	CH39	2480	0.7076	≥ 0.5

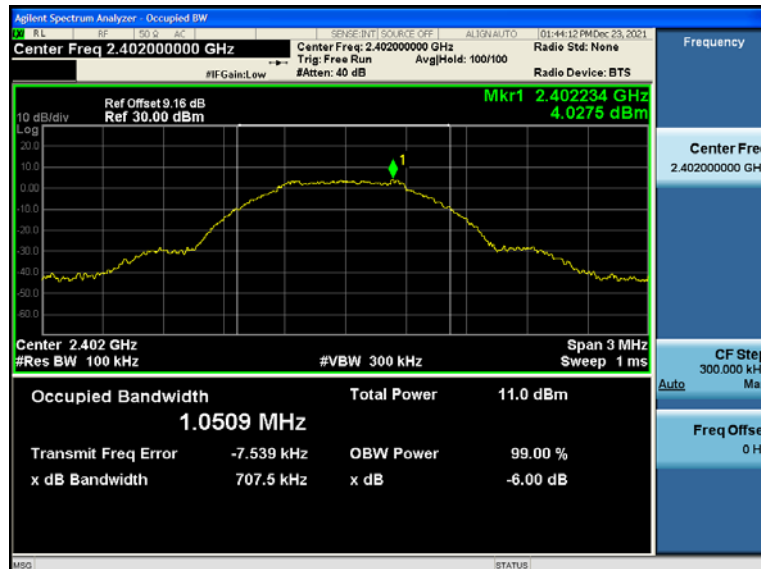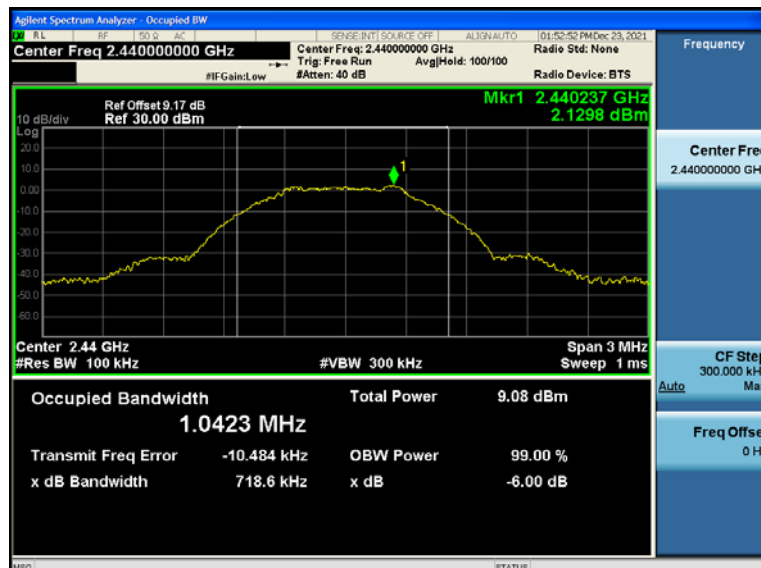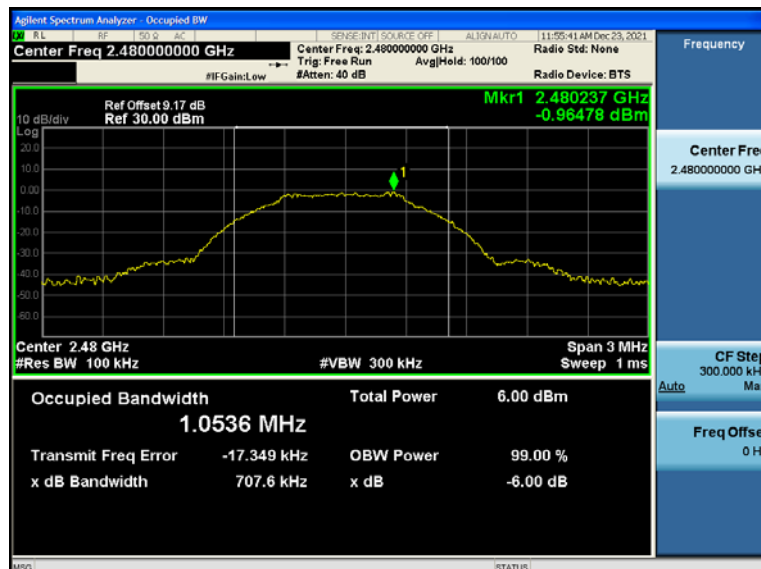
6dB occupied bandwidth
CH0

CH19

CH39


5.4 Conducted peak output power

5.4.1 Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.4.2 Test setup






5.4.3 Test procedure

- Test method: ANSI C63.10-2013 Section 11.9.1.1.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW $\geq$ 6dB occupied bandwidth, VBW $\geq$ 3 $\times$ RBW, detector = Peak

5.4.4 Test results

Mode	Test channel	Frequency (MHz)	Conducted peak output power (dBm)	Limit (dBm)
BLE 1Mbps	CH0	2402	5.155	≤ 30
	CH19	2440	3.169	≤ 30
	CH39	2480	0.215	≤ 30

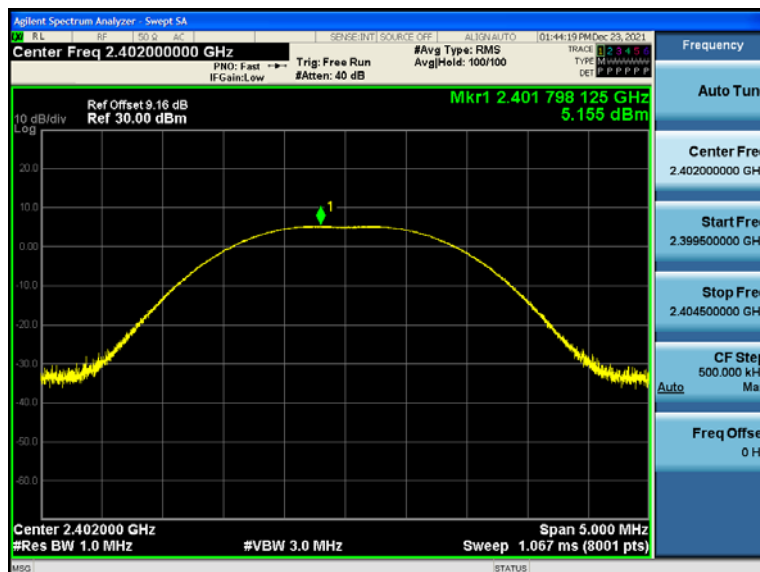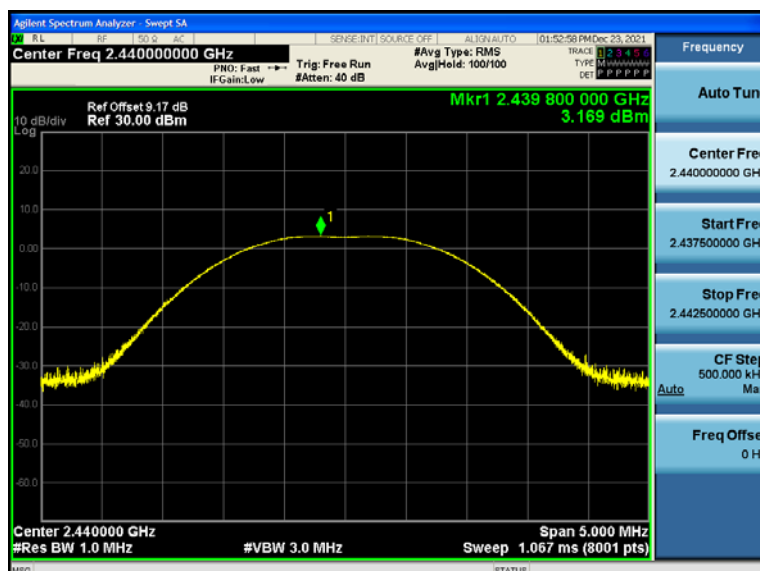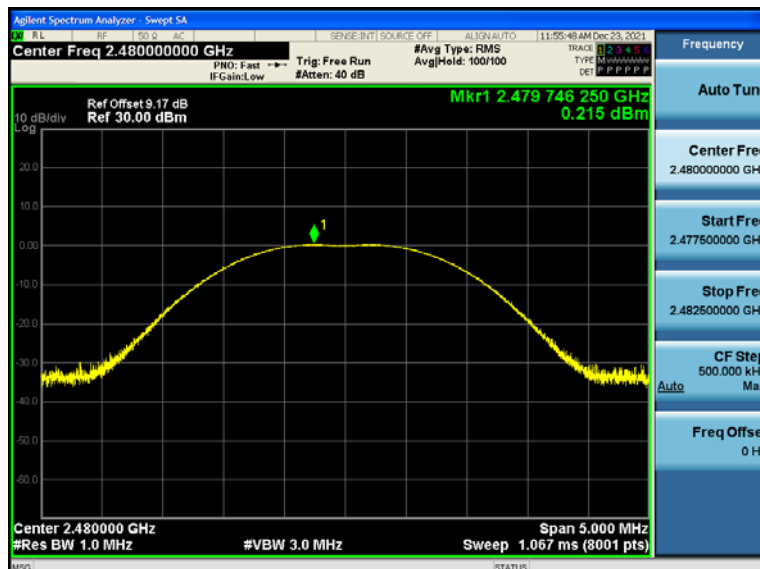
Peak conducted output power
CH0

CH19

CH39


5.5 Power spectral density test

5.5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.5.2 Test setup



5.5.3 Test Procedure

- Test method: ANSI C63.10-2013 Section 11.10.2.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 3 kHz, VBW = 10 kHz, detector = Peak

5.5.4 Test Results


Mode	Test channel	Frequency (MHz)	Power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	CH0	2402	-11.221	≤ 8
	CH19	2440	-13.434	≤ 8
	CH39	2480	-16.388	≤ 8

Power spectral density


CH0



CH19

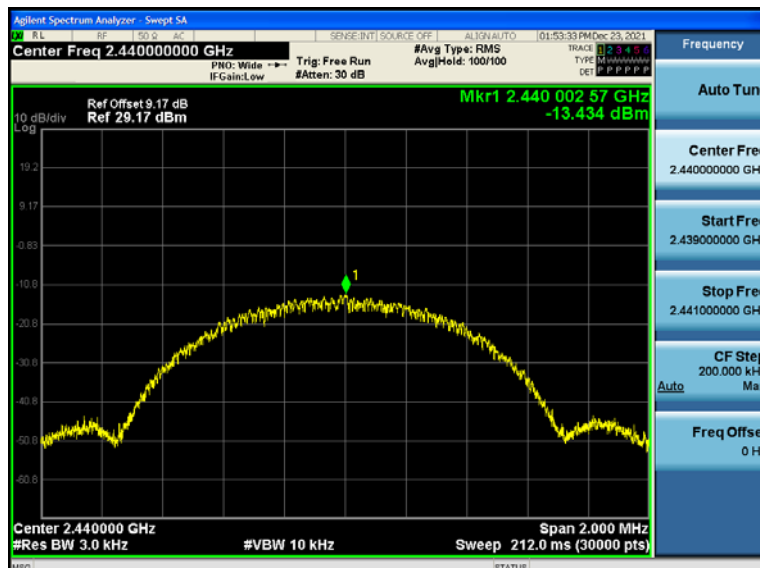

CH39

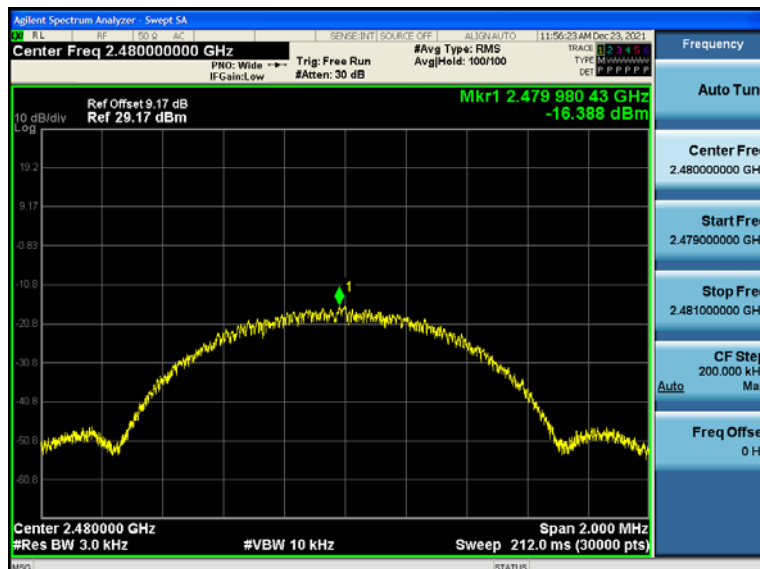


5.6 Conducted emissions at the band edge

5.6.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.6.2 Test setup




5.6.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 11.13
- b) The EUT was set to continuously transmitting in the max power during the test.
- c) The transmitter output of EUT is connected to the spectrum analyzer.
- d) Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.


5.6.4 Test results

BLE 1Mbps - conducted emissions at the band edge

Low band-edge

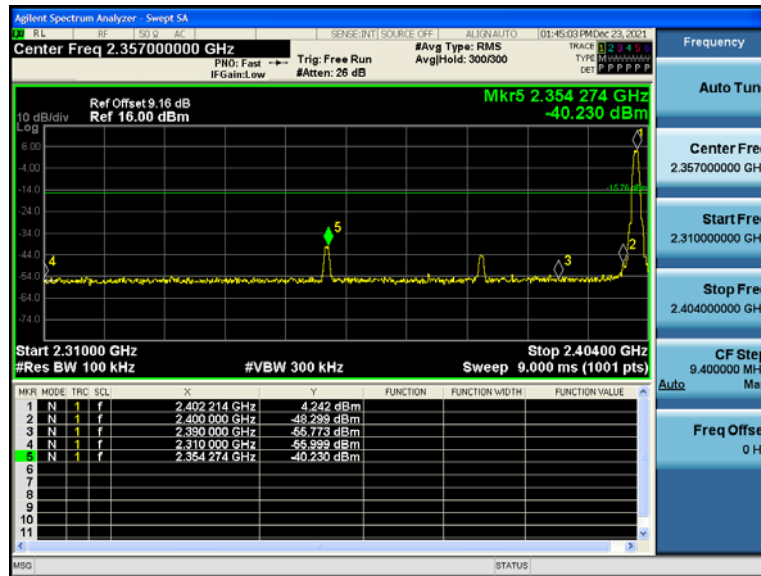

High band-edge

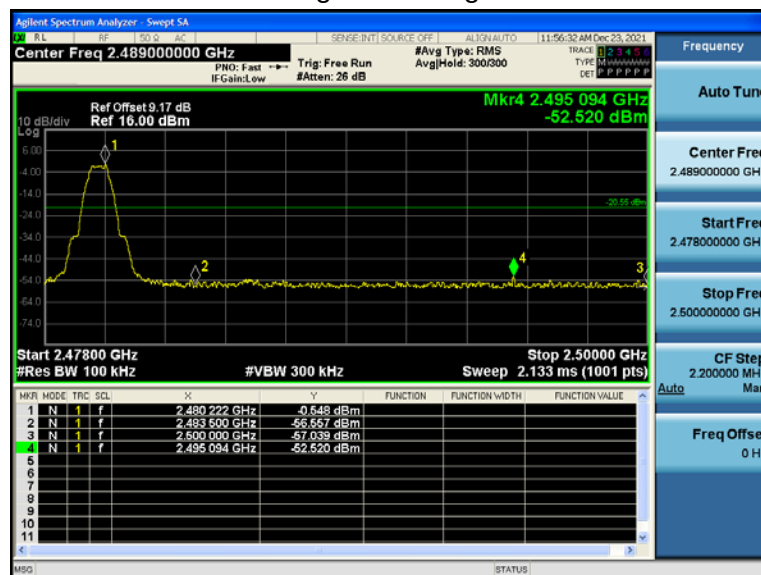


5.7 Conducted spurious emissions

5.7.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.7.2 Test setup



5.7.3 Test procedure



- Test method: ANSI C63.10-2013 Section 11.11 & 11.12.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.

5.7.4 Test results

BLE 1Mbps - conducted spurious emissions



CH0

CH0

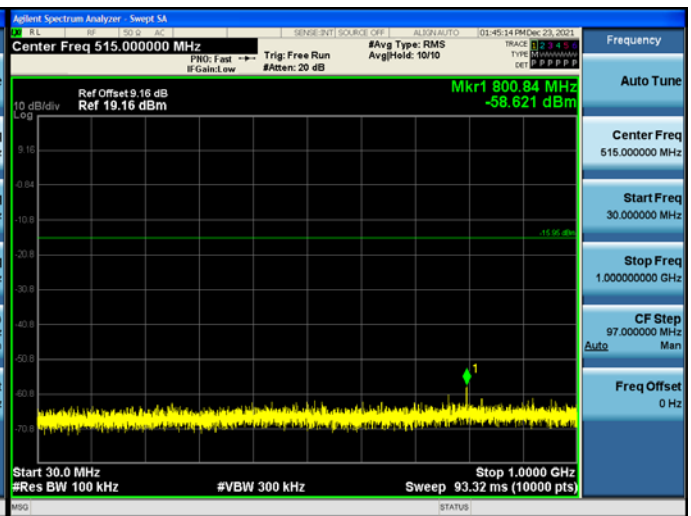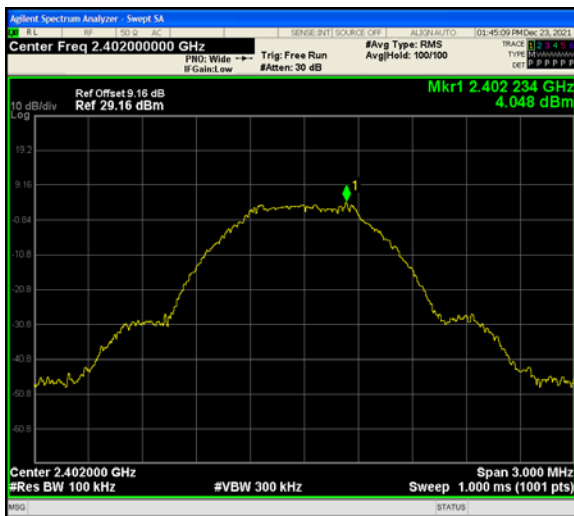



CH0

CH19

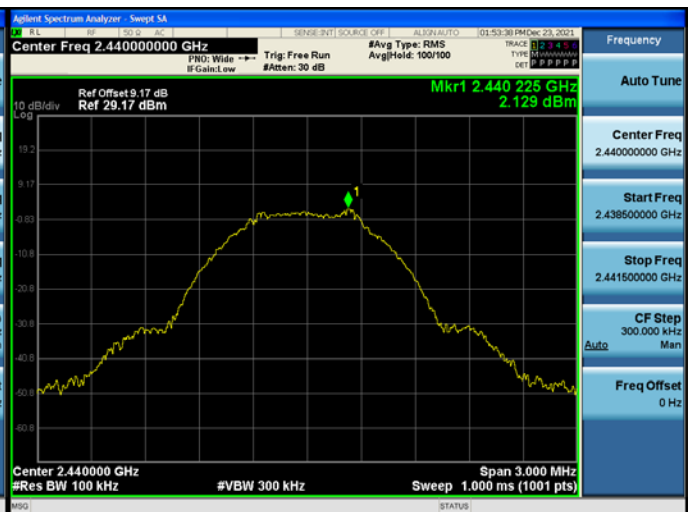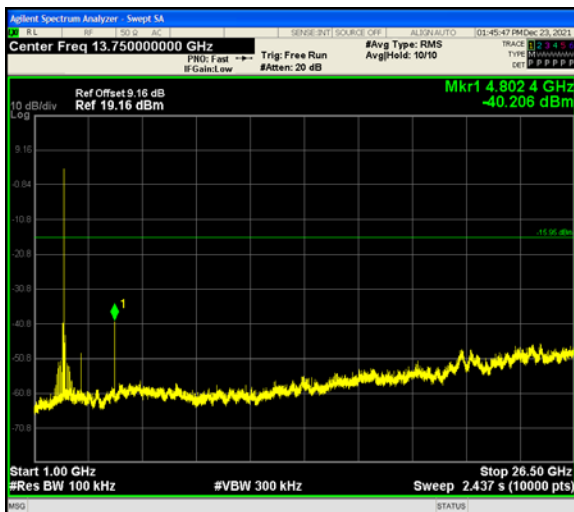

CH19


CH19

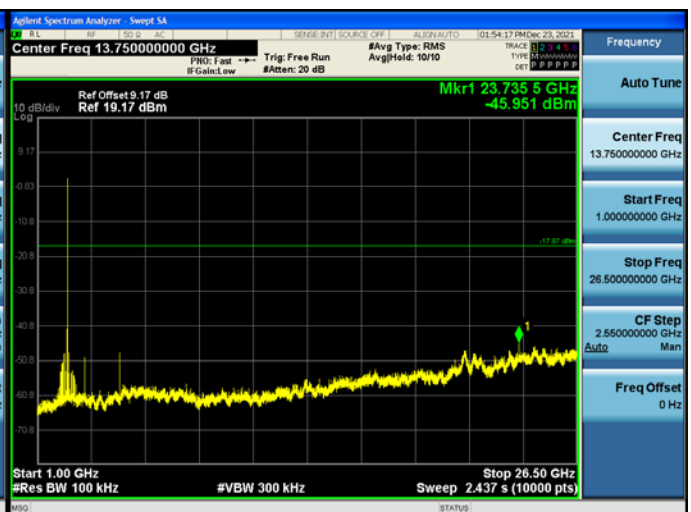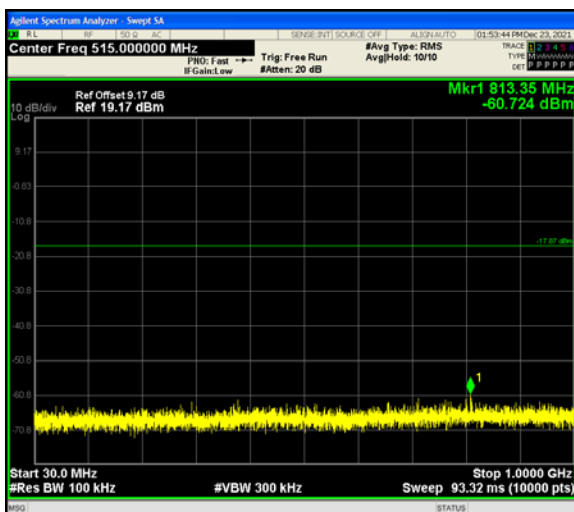


BLE 1Mbps - conducted spurious emissions

CH39

CH39

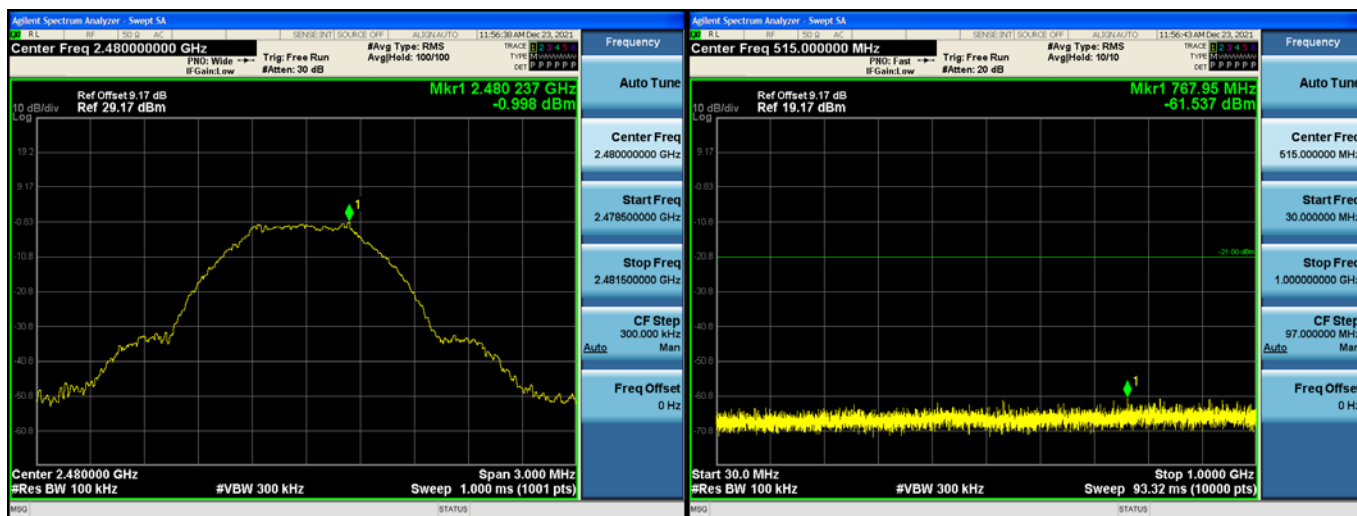

CH39

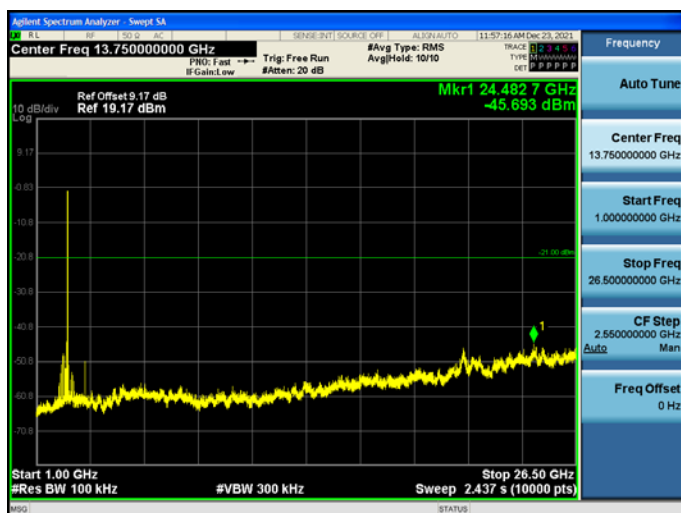


5.8 Duty Cycle

5.8.1 Conformance Limit

None, for reporting purposes only.

5.8.2 Test setup




5.8.3 Test procedure

- Test method: KDB 558074 Zero-span spectrum analyzer method.
- The EUT was set to continuously transmitting in the max power during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.

5.8.4 Test Results

TestMode	Transmission Duration (ms]	Transmission Period (ms]	Duty Cycle (%)
BLE 1Mbps	50.00	50.00	100.00

BLE 1Mbps

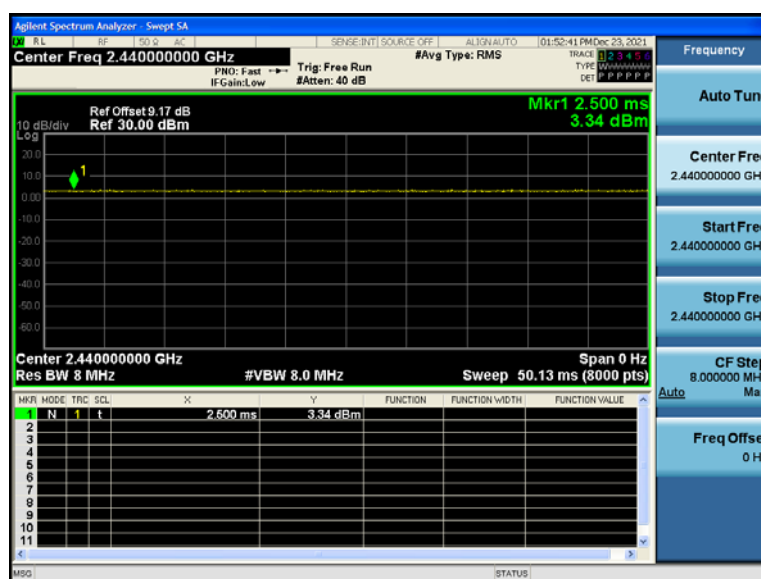

5.9 Radiated spurious emission

5.9.1 Limits

§ 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

§ 15.209 Radiated emission limits at restricted bands:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

5.9.2 Test setup


Below 30MHz:

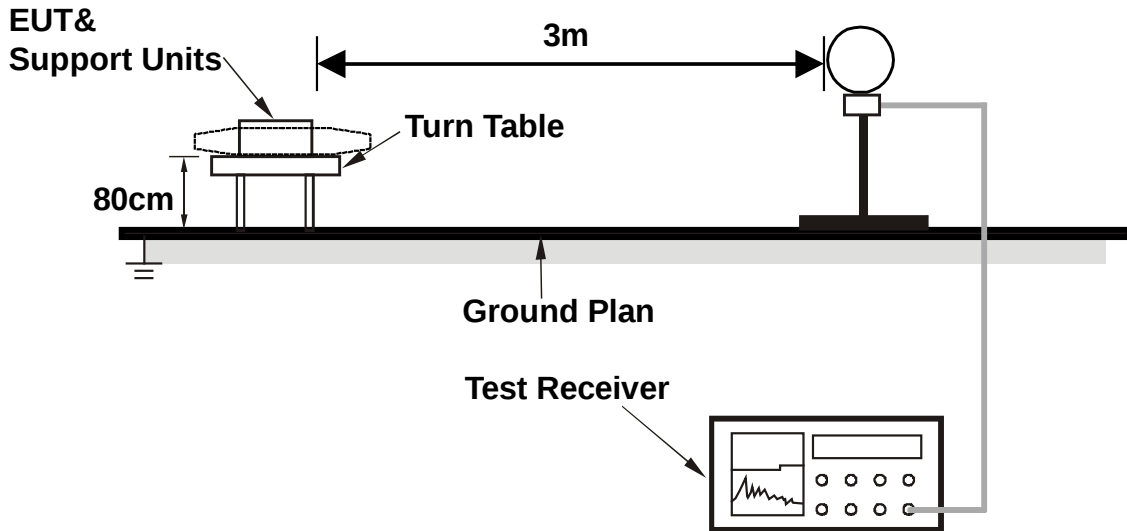

30MHz~1GHz:

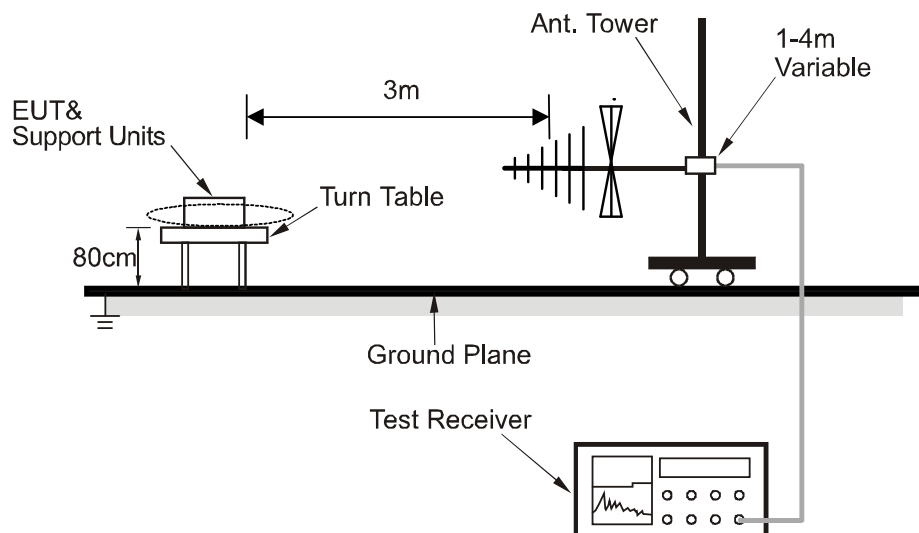

Above 1GHz:

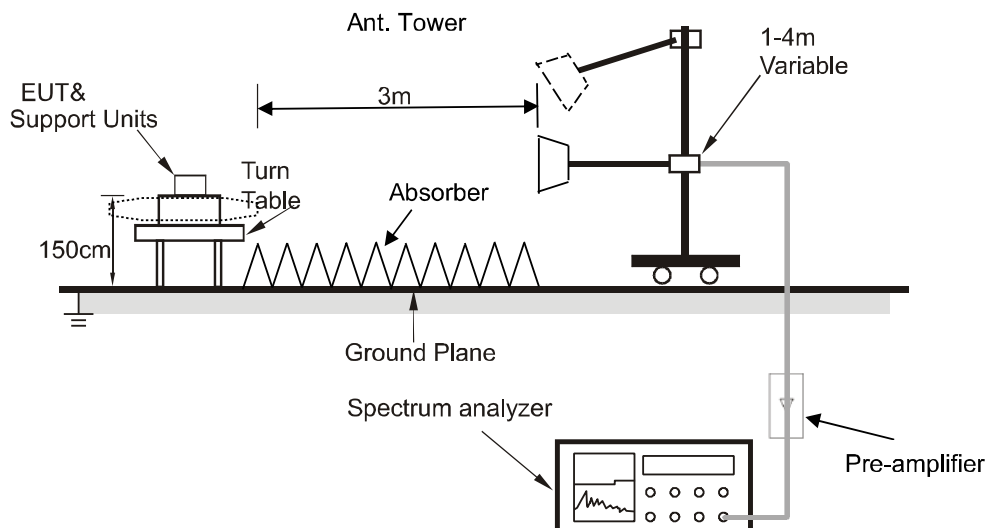

For the actual test configuration, please refer to the related item – Photographs of the test setup.

5.9.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.3, 6.4, 6.5, 6.6, 11.11, 11.12, 11.13.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector

5.9.4 Test results

Notes:

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported.

There were no emissions found below 30MHz within 20dB of the limit.


Calculation formula:

Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)


Radiated emissions between 30MHz – 1GHz
The model for GM60-240250-F AC/DC adapter test data:

Test mode:	BLE 1Mbps – 2402 MHz TX mode	Polarization:	Horizontal
Power supply:	DC 24V	Test site:	RE chamber 2

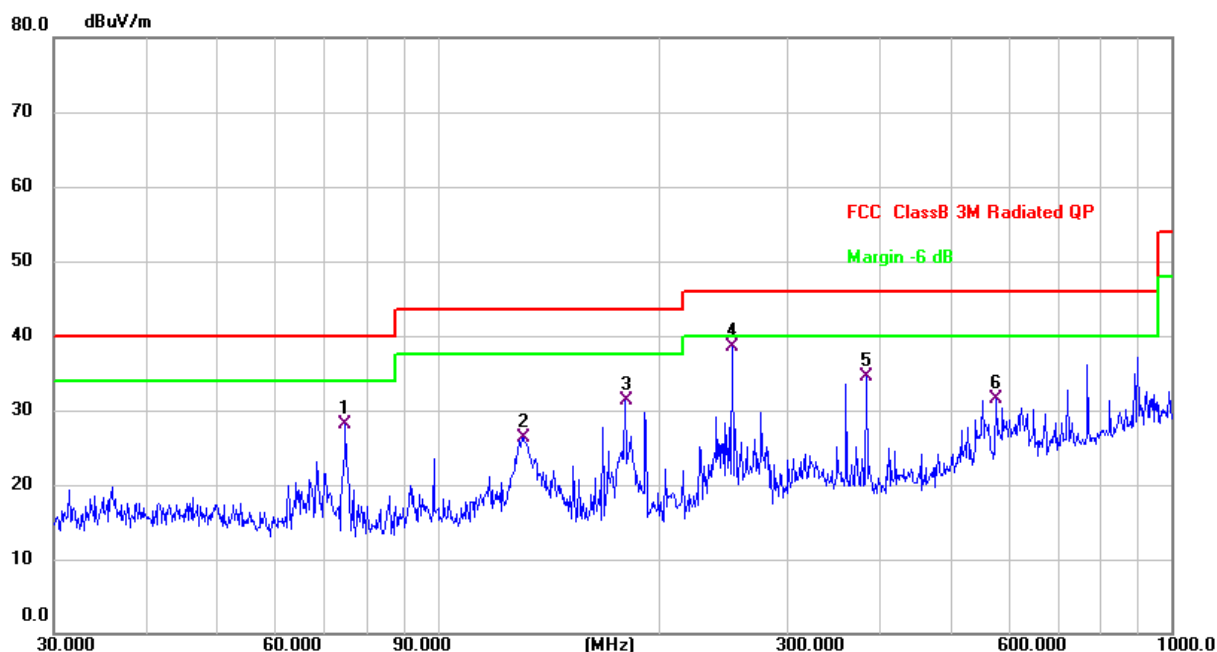

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		74.9191	38.16	-10.11	28.05	40.00	-11.95	QP
2		130.8369	37.17	-10.80	26.37	43.50	-17.13	QP
3		180.0165	40.21	-8.87	31.34	43.50	-12.16	QP
4	*	252.0627	44.36	-5.82	38.54	46.00	-7.46	QP
5		383.9318	38.90	-4.45	34.45	46.00	-11.55	QP
6		576.6443	31.74	-0.24	31.50	46.00	-14.50	QP


Test mode:	BLE 1Mbps – 2402 MHz TX mode	Polarization:	Vertical
Power supply:	DC 24V	Test site:	RE chamber 2

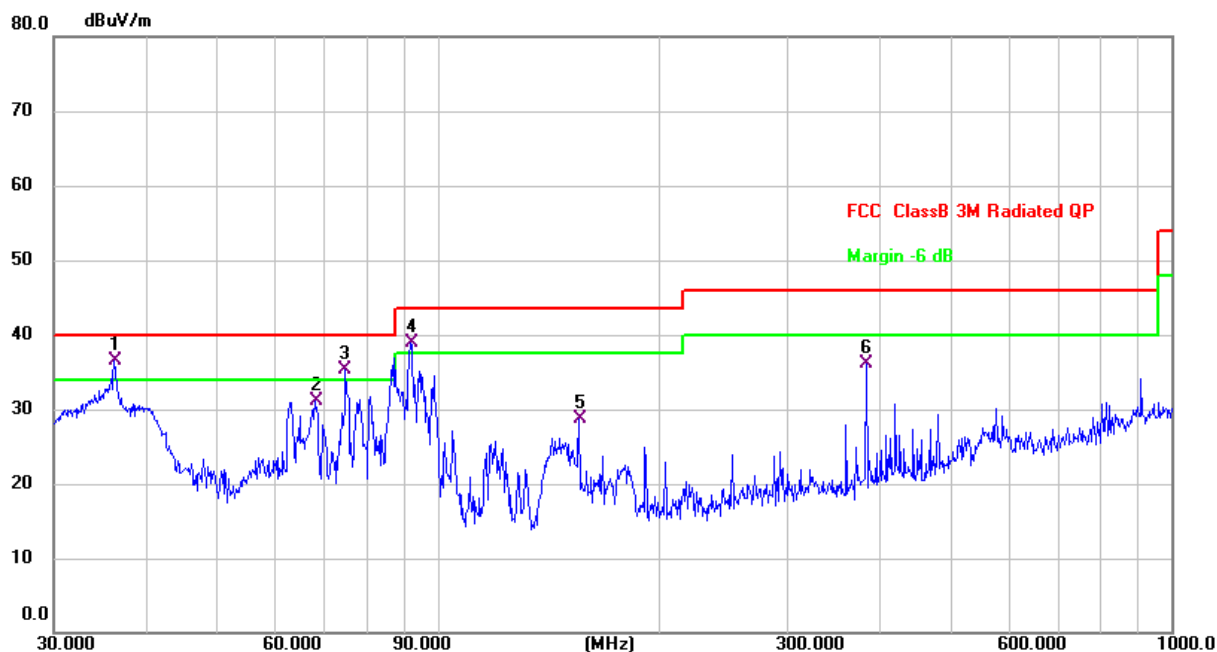

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	36.2541	44.65	-8.13	36.52	40.00	-3.48	QP
2		68.1514	40.99	-9.90	31.09	40.00	-8.91	QP
3	!	74.9191	45.34	-10.11	35.23	40.00	-4.77	QP
4	!	91.8163	47.66	-8.84	38.82	43.50	-4.68	QP
5		155.9101	38.78	-10.05	28.73	43.50	-14.77	QP
6		383.9318	40.63	-4.45	36.18	46.00	-9.82	QP


The model for AP115G-24250 AC/DC adapter test data:

Test mode:	BLE 1Mbps – 2402 MHz TX mode	Polarization:	Horizontal
Power supply:	DC 24V from adapter AC 120V/60Hz	Test site:	RE chamber 2

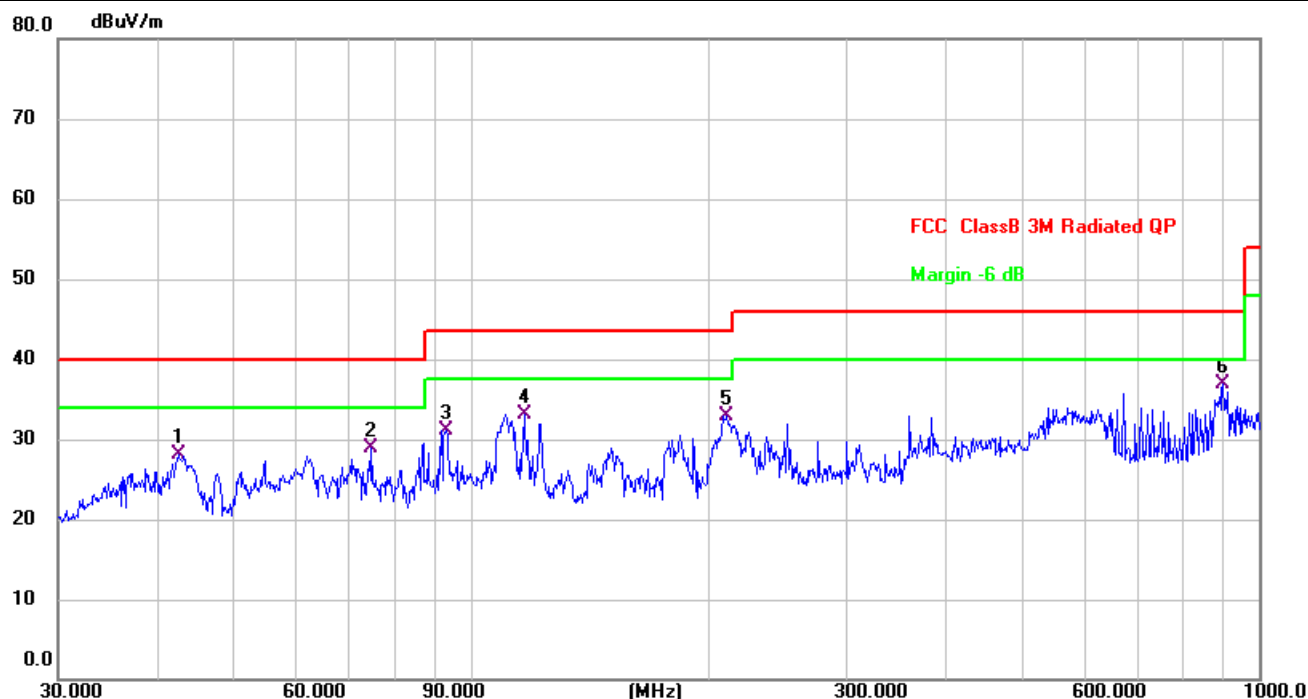

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		42.6000	35.89	-7.76	28.13	40.00	-11.87	QP
2		74.9191	39.07	-10.11	28.96	40.00	-11.04	QP
3		93.1131	39.91	-8.78	31.13	43.50	-12.37	QP
4		116.9492	42.96	-9.78	33.18	43.50	-10.32	QP
5		211.5261	40.29	-7.35	32.94	43.50	-10.56	QP
6	*	900.1471	33.28	3.60	36.88	46.00	-9.12	QP

Test mode:	BLE 1Mbps – 2402 MHz TX mode	Polarization:	Vertical
Power supply:	DC 24V from adapter AC 120V/60Hz	Test site:	RE chamber 2

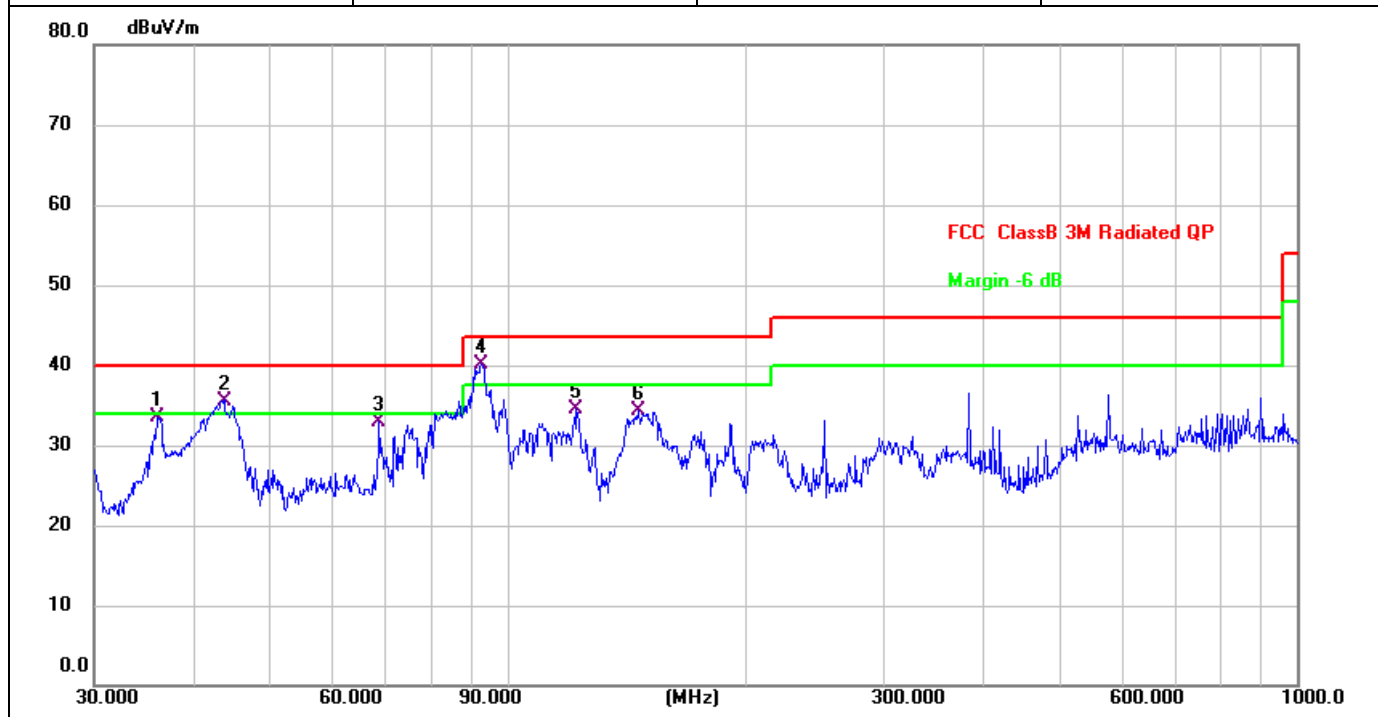

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		36.1269	41.71	-8.12	33.59	40.00	-6.41	QP
2	!	43.8119	43.17	-7.57	35.60	40.00	-4.40	QP
3		68.8721	42.88	-9.93	32.95	40.00	-7.05	QP
4	*	92.7870	48.88	-8.79	40.09	43.50	-3.41	QP
5		122.4038	44.95	-10.36	34.59	43.50	-8.91	QP
6		146.3734	44.95	-10.55	34.40	43.50	-9.10	QP

Radiated emissions 1 GHz ~ 25 GHz

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2402 MHz)-Above 1G									
4804.338	63.24	4.36	32.92	45.53	54.99	74.00	-19.01	Pk	Vertical
4804.338	42.76	4.36	32.92	45.53	34.51	54.00	-19.49	AV	Vertical
7206.107	60.49	5.02	37.63	45.56	57.58	74.00	-16.42	Pk	Vertical
7206.107	41.61	5.02	37.63	45.56	38.70	54.00	-15.30	AV	Vertical
4804.169	64.67	4.36	32.92	45.53	56.42	74.00	-17.58	Pk	Horizontal
4804.169	42.84	4.36	32.92	45.53	34.59	54.00	-19.41	AV	Horizontal
7206.214	61.77	5.02	37.63	45.56	58.86	74.00	-15.14	Pk	Horizontal
7206.214	41.32	5.02	37.63	45.56	38.41	54.00	-15.59	AV	Horizontal
Mid Channel (2440 MHz)-Above 1G									
4880.473	63.94	4.41	33.01	45.76	55.60	74.00	-18.40	Pk	Vertical
4880.473	44.45	4.41	33.01	45.76	36.11	54.00	-17.89	AV	Vertical
7320.265	65.36	5.02	37.68	45.59	62.47	74.00	-11.53	Pk	Vertical
7320.265	41.37	5.02	37.68	45.59	38.48	54.00	-15.52	AV	Vertical
4880.366	62.02	4.41	33.01	45.76	53.68	74.00	-20.32	Pk	Horizontal
4880.366	41.37	4.41	33.01	45.76	33.03	54.00	-20.97	AV	Horizontal
7320.234	59.47	5.02	37.68	45.59	56.58	74.00	-17.42	Pk	Horizontal
7320.234	44.08	5.02	37.68	45.59	41.19	54.00	-12.81	AV	Horizontal
High Channel (2480 MHz)- Above 1G									
4960.482	63.70	4.50	33.26	46.07	55.39	74.00	-18.61	Pk	Vertical
4960.482	41.80	4.50	33.26	46.07	33.49	54.00	-20.51	AV	Vertical
7440.131	63.75	5.02	37.78	45.77	60.78	74.00	-13.22	Pk	Vertical
7440.131	49.40	5.02	37.78	45.77	46.43	54.00	-7.57	AV	Vertical
4960.326	64.21	4.50	33.26	46.07	55.90	74.00	-18.10	Pk	Horizontal
4960.326	44.84	4.50	33.26	46.07	36.53	54.00	-17.47	AV	Horizontal
7440.199	64.06	5.02	37.78	45.77	61.09	74.00	-12.91	Pk	Horizontal
7440.199	45.37	5.02	37.78	45.77	42.40	54.00	-11.60	AV	Horizontal

Note:

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
3. All the modulation modes have been tested, and the worst results are reflected in the report.

Radiated emissions at band edge

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
GFSK									
2310.00	63.90	2.40	27.70	40.40	53.60	74	-20.40	Pk	Horizontal
2310.00	43.85	2.40	27.70	40.40	33.55	54	-20.45	AV	Horizontal
2310.00	60.76	2.40	27.70	40.40	50.46	74	-23.54	Pk	Vertical
2310.00	41.42	2.40	27.70	40.40	31.12	54	-22.88	AV	Vertical
2390.00	64.32	2.44	28.30	40.10	54.96	74	-19.04	Pk	Vertical
2390.00	43.86	2.44	28.30	40.10	34.50	54	-19.50	AV	Vertical
2390.00	64.53	2.44	28.30	40.10	55.17	74	-18.83	Pk	Horizontal
2390.00	43.11	2.44	28.30	40.10	33.75	54	-20.25	AV	Horizontal
2483.50	62.83	2.48	28.70	39.80	54.21	74	-19.79	Pk	Vertical
2483.50	42.80	2.48	28.70	39.80	34.18	54	-19.82	AV	Vertical
2483.50	65.54	2.48	28.70	39.80	56.92	74	-17.08	Pk	Horizontal
2483.50	43.44	2.48	28.70	39.80	34.82	54	-19.18	AV	Horizontal

Photographs of the Test Setup

See the appendix – Test Setup Photos.

Photographs of the EUT

See the appendix - EUT Photos.

---End of Report---