

Prüfbericht-Nr.: <i>Test Report No.:</i>	50306368 001	Auftrags-Nr.: <i>Order No.:</i>	238109972	Seite 1 von 35 <i>Page 1 of 35</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	3-Oct-2019	
Auftraggeber: <i>Client:</i>	SAMSUNG C&T TAIWAN CORPORATION. Rm. 2203, 22F, Int'l Trade Bldg., No.333, Keelung Rd., Sec.1, Taipei 110, Taiwan, R.O.C.			
Prüfgegenstand: <i>Test item:</i>	FITGRIP			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	SR01			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C / ISCED RSS-247 Test report			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247(DTS) ISCED RSS-247 (02-2017)			
Wareneingangsdatum: <i>Date of receipt:</i>	05-Oct-2019			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000990860-011 A000990860-012			
Prüfzeitraum: <i>Testing period:</i>	18-Oct-2019 – 21-Oct-2019			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
Report date / tested by:		kontrolliert von / reviewed by:		
23-Oct-2019 Mars Y.J. Lin/Project Engineer		23-Oct-2019 Arvin Ho/Vice General Manager		
Datum	Name / Stellung	Unterschrift	Datum	Name / Stellung
<i>Date</i>	<i>Name / Position</i>	<i>Signature</i>	<i>Date</i>	<i>Name / Position</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 MAXIMUM CONDUCTED PEAK OUTPUT POWER

RESULT: Passed

5.1.3 6dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Passed

5.1.4 POWER DENSITY

RESULT: Passed

5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100kHz BANDWIDTH

RESULT: Passed

5.1.6 SPURIOUS EMISSION

RESULT: Passed

5.2.1 MAINS CONDUCTED EMISSIONS

RESULT: Passed

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Passed

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
1.2	DECISION RULE OF CONFORMITY.....	5
2.	TEST SITES	6
2.1	TEST LABORATORY	6
2.2	TEST FACILITY.....	6
2.3	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.4	TRACEABILITY	8
2.5	CALIBRATION	8
2.6	MEASUREMENT UNCERTAINTY	8
3.	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	SYSTEM DETAILS AND RATINGS.....	9
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	13
4.5	TEST SETUP DIAGRAM	13
5.	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1	<i>Antenna Requirement</i>	<i>15</i>
5.1.2	<i>Maximum conducted Peak output power.....</i>	<i>16</i>
5.1.3	<i>6dB Bandwidth and 99% Bandwidth.....</i>	<i>17</i>
5.1.4	<i>Power Density</i>	<i>20</i>
5.1.5	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....</i>	<i>23</i>
5.1.6	<i>Spurious Emission</i>	<i>27</i>
5.2	MAINS EMISSIONS.....	28
5.2.1	<i>Mains Conducted Emissions.....</i>	<i>28</i>
6.	SAFETY HUMAN EXPOSURE	29

6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	29
6.1.1	<i>Electromagnetic Fields.....</i>	<i>29</i>
7.	PHOTOGRAPHS OF THE TEST SET-UP.....	30
8.	LIST OF TABLES	35
9.	LIST OF PHOTOGRAPHS.....	35

1. General Remarks

1.1 Complementary Materials

The following attachments are integral parts of this test report:

Appendix P: Photo Documentation internal view
(File Name: 50306368 001 APPENDIXP)

Appendix D: Test Result of Radiated Emissions
(File Name: 50306368 001 APPENDIXD)

Test Specifications

The following standards were applied.

Table 1: Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247 FCC 47CFR Part 2: Subpart J Section 2.1091 ISED RSS-247 Issue 2, Feb 2017 ISED RSS-102 Issue 5, March 2015 ISED RSS-~Gen, Issue 5, March 2019 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v05r02 KDB447498 D01 General RF Exposure Guidance v06

1.2 Decision Rule of conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

TUV Rheinland Taiwan Ltd.
Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC RegistrationNo.: 180491
IC Canada Registration No.: 9465A
TAF Accredited NCC Test Lab. No.:3567
TAF ISO17025 Certification effective period: 6th-May-2019 to 05th-May-2022



Testing Laboratory
3567

2.3 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manu-facturer	Type	S/N	Last Calibration	Next Calibration
Test Software	Audix	e3	Ver.9	N/A	N/A
EMI Test Receiver	R&S	ESR 7	101549	2018/11/12	2019/11/10
Spectrum Analyzer	R&S	FSV 40	100921	2019/04/30	2020/04/30
Preamplifier (30MHz -1GHz)	Hewlett Packard	8447D	2944A06641	2019/01/08	2020/01/08
Preamplifier (18 GHz -40 GHz)	EMC Instruments	EMC184045SE	980652	2019/02/25	2020/02/25
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM01G18G	60649	2019/09/11	2020/09/11
Bilog Antenna	TESEQ	CBL 6111D	29804	2019/07/12	2020/07/12
Horn Antenna	ETS-Lindgren	3117	218931	2018/12/27	2019/12/27
Horn Antenna (18GHz~40GHz)	COM-POWER	AH-840	101029	2018/12/22	2019/12/22
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2019/07/11	2020/07/11
power Meter	Anritsu	ML2495A	1901008	2019/04/29	2020/04/28
Power Sensor	Anritsu	MA2411B	1725269	2019/04/29	2020/04/28
EMI Test Receiver	R&S	ESCI 7	100797	2019/01/16	2020/01/16
LISN (1 phase)	R&S	ENV216	101243	2019/06/23	2020/06/23
LISN	R&S	ENV216	101262	2019/07/16	2020/07/16

2.4 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.5 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular schedule using in house standards or comparisons.

2.6 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements .

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
RF power density, conducted	± 3 dB
spurious emissions, conducted	± 3 dB
all emissions, radiated	± 6 dB
Temperature	± 1 °C
Humidity	± 5 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a FITGRIP. It contains a BLE compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	FITGRIP
Type Designation	SR01
FCC ID	2AUTQ-SR0001
IC	25551-SR01
HVIN	SR01

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequencies	2402~2480MHz
Channel number	40
Operation Voltage	3.3 Vdc
Modulation	GFSK
Antenna gain	-3.01 dBi

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Blocking Diagram
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level.

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Table 6: Table for Parameters of Test Software Setting

Mode	Channel Frequency		
	2402 MHz	2440 MHz	2480 MHz
GFSK	P_m0dBm	P_m0dBm	P_m0dBm

4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB SPI interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed in section 3.3 as appropriate.

The samples were used as follows:

Conducted sample: A000990860-011

Radiation sample: A000990860-012

Full test was applied on all test modes, but only worst case was shown

BLE mode:

Channel Low (2402MHz), Channel Mid (2440MHz) and Channel High (2480MHz) were chosen for full testing. The worst condition was determined based on the test result of Maximum peak output power.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


Description	Manufacturer	Model No.	Serial No.
Notebook(EMC-06)	Lenovo	TP00048A	PB-0F8B2

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

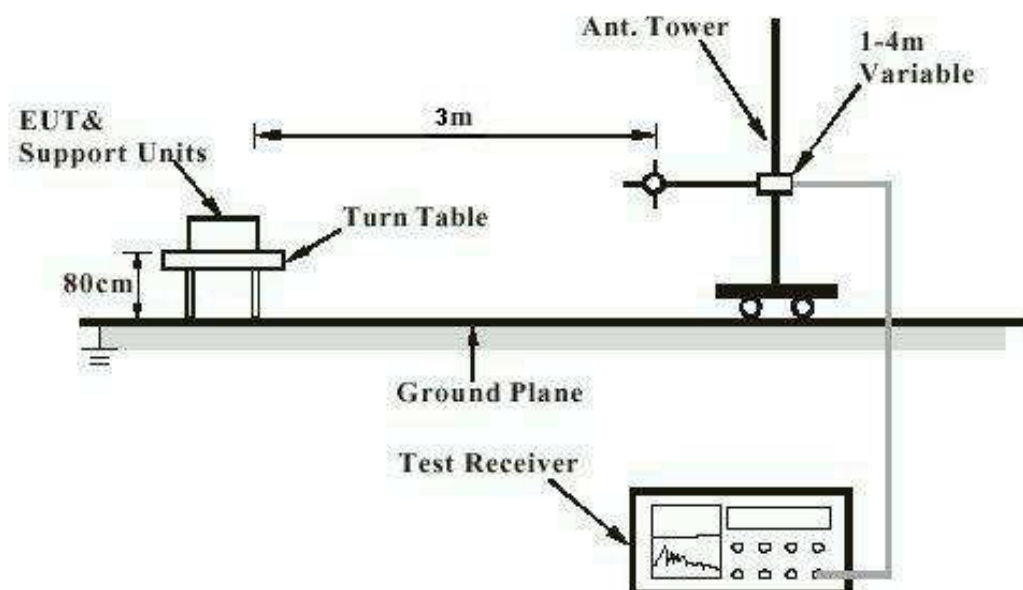

Note: Measurements above 1 GHz are done with a table height of 1.5m

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


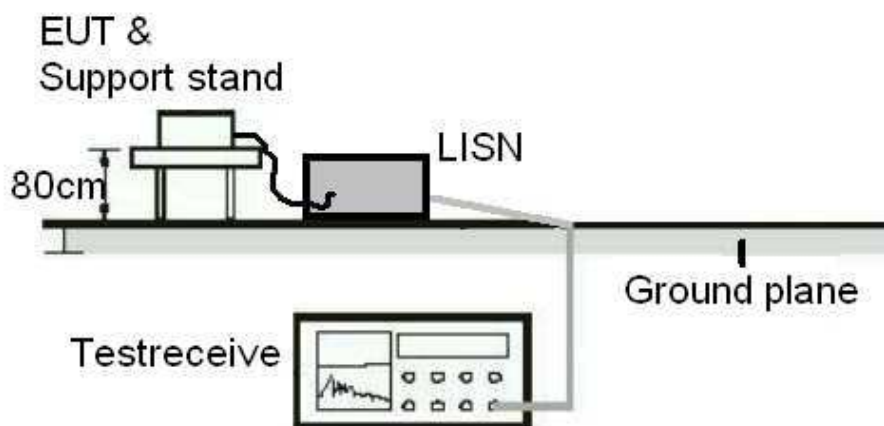


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

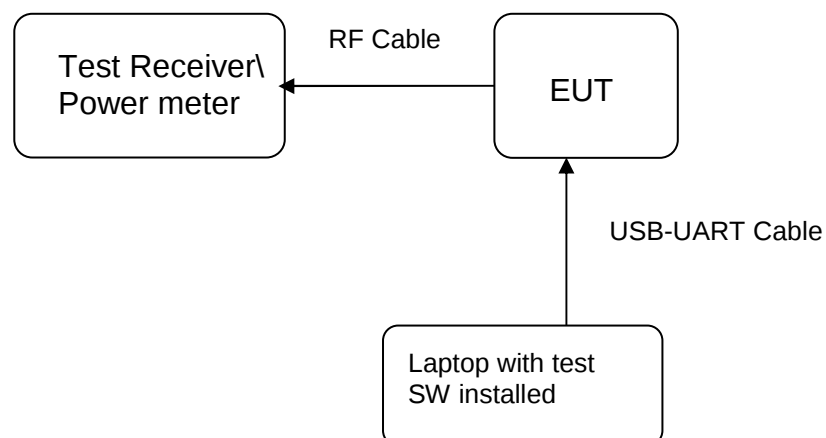

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test standard : FCC Part 15.247(b)(4), Part 15.203 and RSS-Gen 6.8

Requirement : use of approved antennas only with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with Max directional gain of -3.01 dBi. The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Maximum conducted Peak output power

RESULT:
Passed

Test standard : FCC Part 15.247(b)(3), RSS-247 5.4(b)
 Basic standard : ANSI C63.10:2013, KDB558074
 Limit : 1 Watt
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A

Ambient temperature : 20-24 °C
 Relative humidity : 50-65 %
 Atmospheric pressure : 100-103 kPa

Table 7: Test result of Maximum conducted Peak output power, LE 1M

Channel	Channel Frequency (MHz)	Output Power		Average Power	Limit
		(dBm)	(W)	(dBm)	(W)
Low Channel	2402	-6.69	0.00021	-7.18	1
Middle Channel	2440	-6.80	0.00021	-7.33	1
High Channel	2480	-6.84	0.00021	-7.32	1

5.1.3 6dB Bandwidth and 99% Bandwidth

RESULT:
Passed

Test standard : FCC Part 15.247(a)(2), RSS-247 5.2(a)
 RSS-Gen (Issue 5) 6.7
 Basic standard : ANSI C63.10:2013, KDB558074
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A

Ambient temperature : 20-24°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103 kPa

Table 8: Test result of 6dB Bandwidth, LE 1M


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	827.17	>500	Pass
Mid Channel	2440	827.17	>500	Pass
High Channel	2480	860.14	>500	Pass

Table 9: Test result of 99% Bandwidth, LE 1M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.1029
Middle Channel	2440	1.1179
High Channel	2480	1.1538


Test Plot of 6dB Bandwidth and Test Plot of 99% Bandwidth

Low Channel

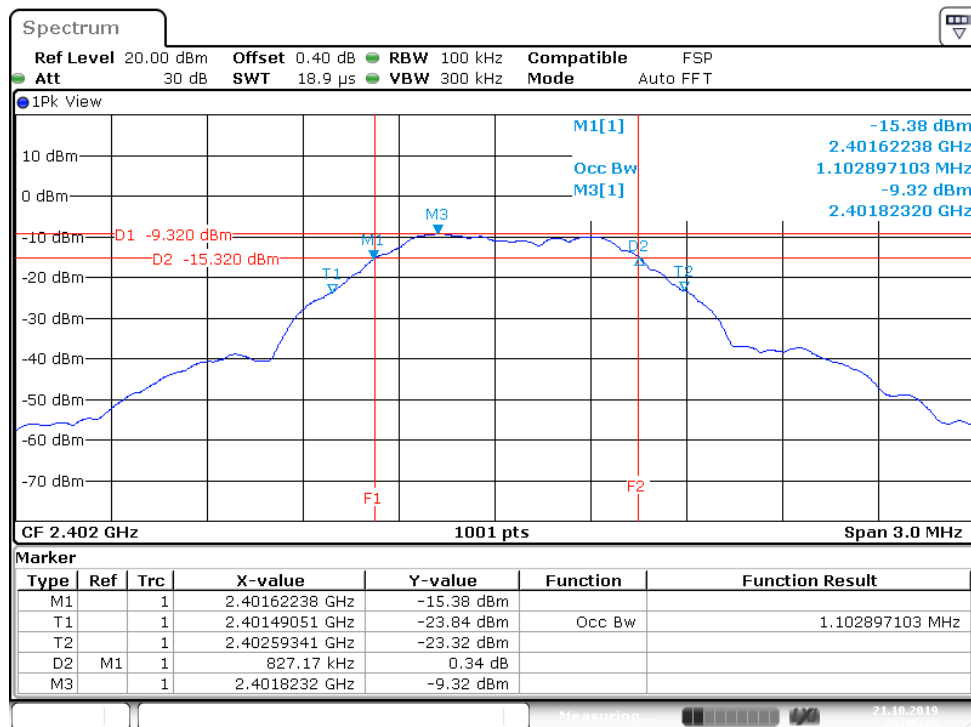


Date: 21.OCT.2019 20:45:16

Middle Channel

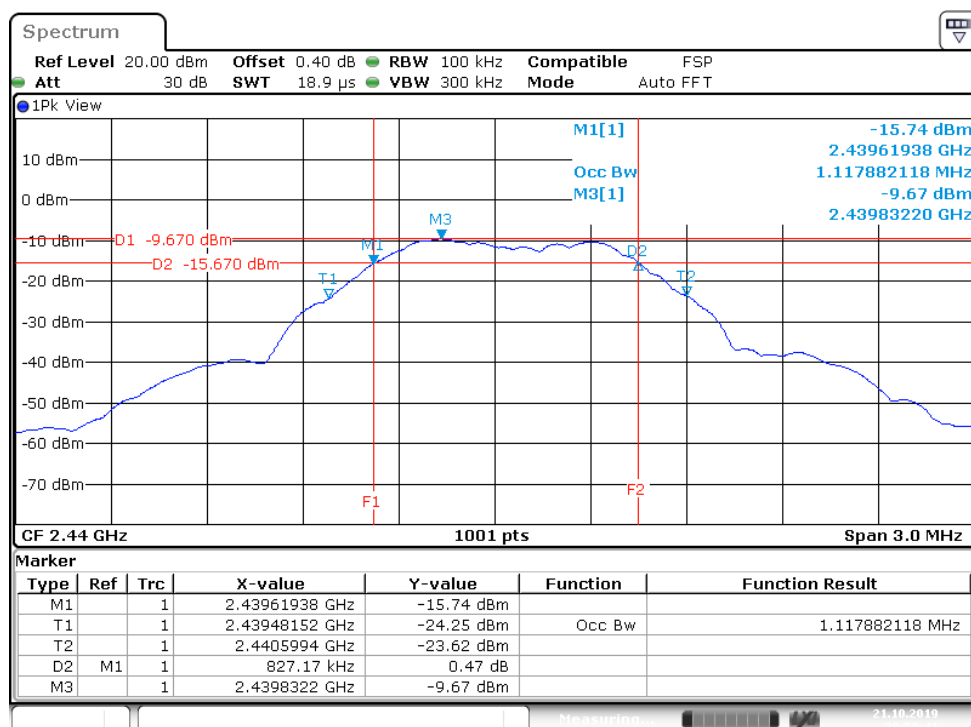

Date: 21.OCT.2019 20:50:41

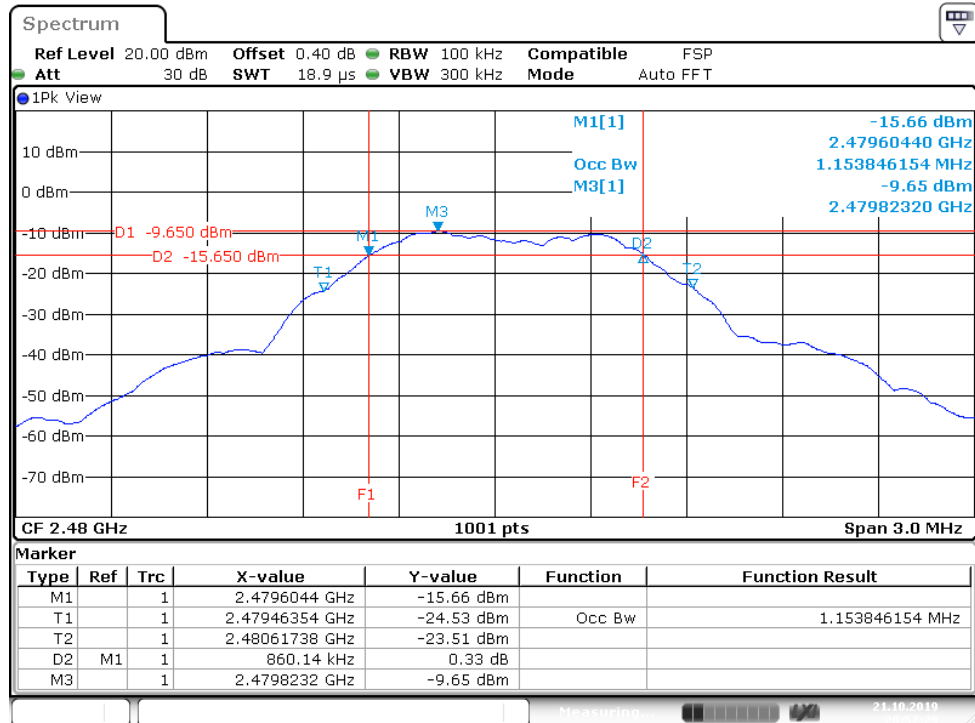High Channel


Date: 21.OCT.2019 20:57:29

5.1.4 Power Density

RESULT:**Passed**

Test standard : FCC Part 15.247(e) , RSS-247 5.2(b)
Basic standard : ANSI C63.10:2013, KDB558074
Kind of test site : Shielded room

Test setup


Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 20-24°C
Relative humidity : 50-65%
Atmospheric pressure : 100-103 kPa

Table 10: Test result of Power Density, LE 1M

Channel	Channel Frequency (MHz)	Power Density	Limit
		(dBm)	(dBm)
Low Channel	2402	-17.34	8
Middle Channel	2440	-17.70	8
High Channel	2480	-17.77	8


Test Plot of Power Density, LE 1M

Low Channel

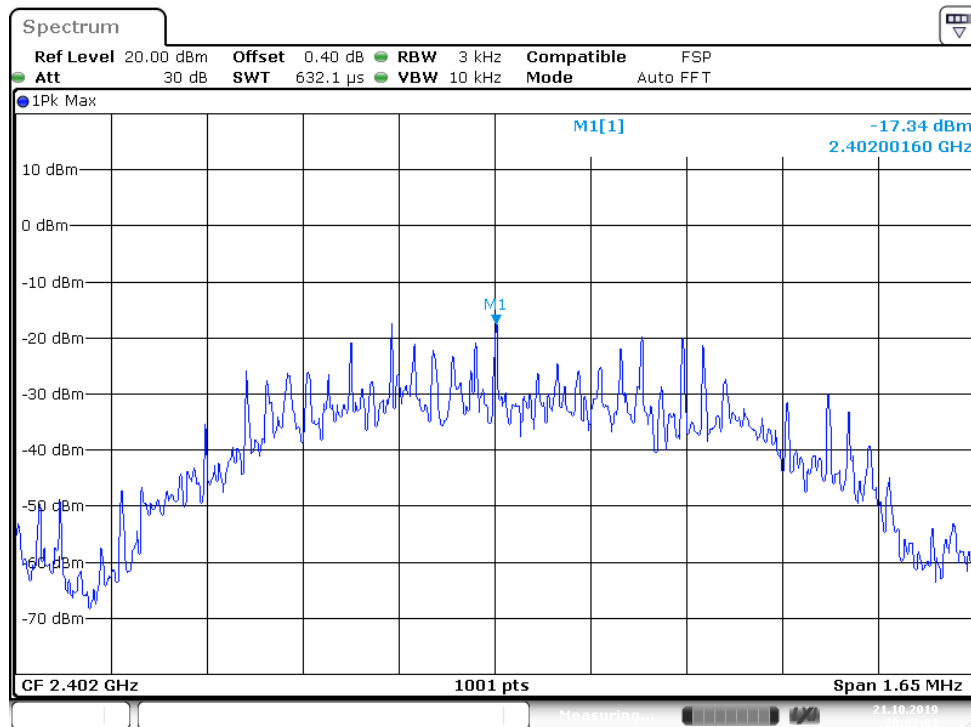


Date: 21.OCT.2019 20:47:02

Middle Channel

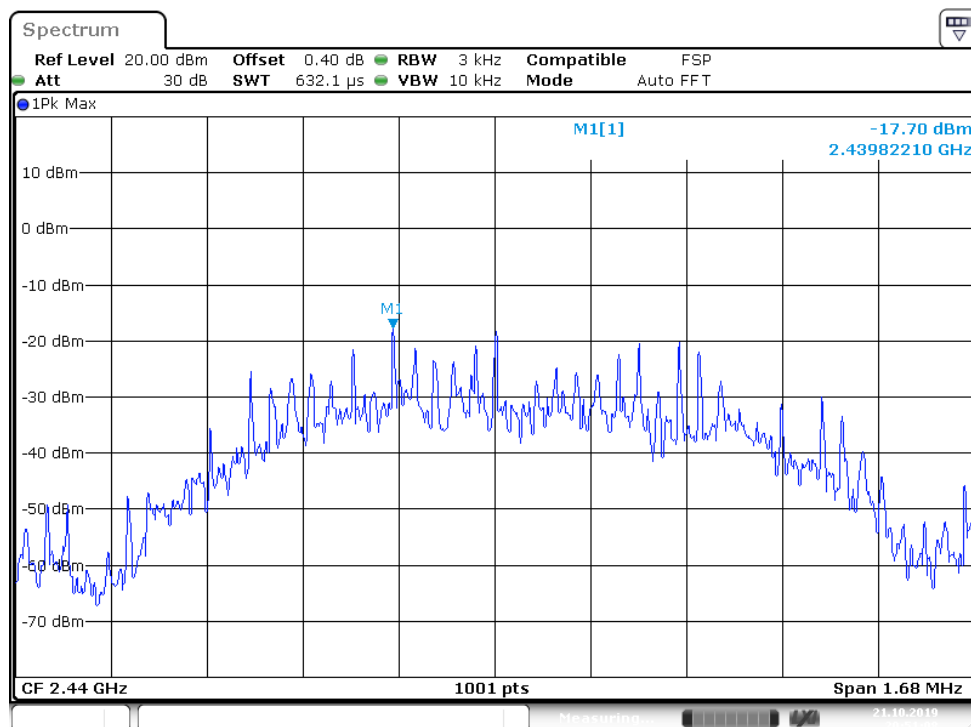

Date: 21.OCT.2019 20:51:09

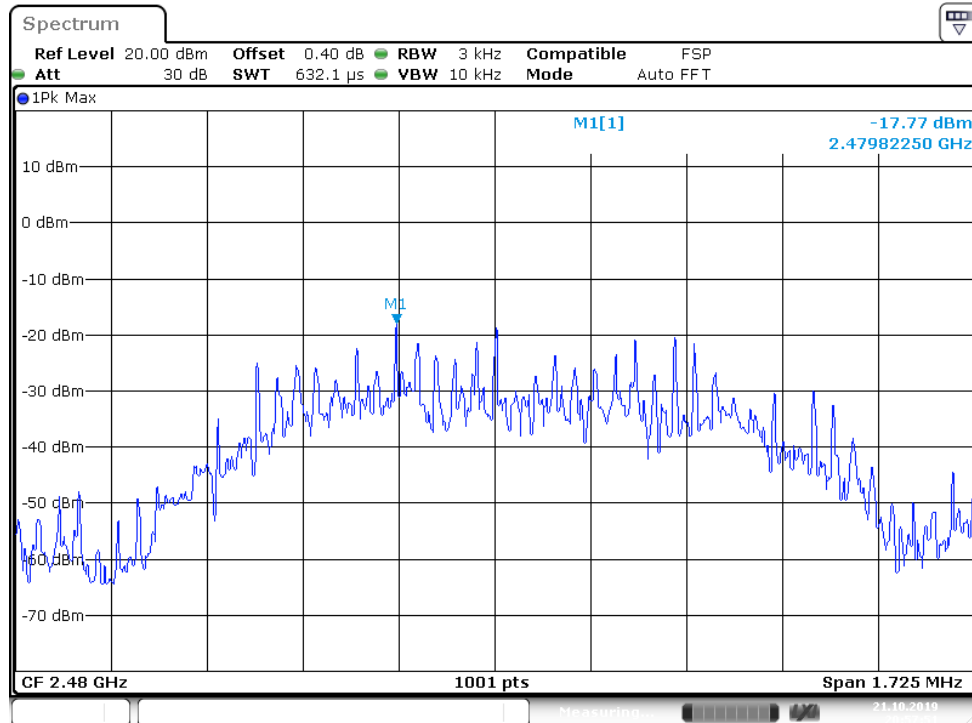High Channel


Date: 21.OCT.2019 20:57:51

5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), RSS-247 5.5
Basic standard	:	ANSI C63.10:2013, KDB558074
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup


Test Channel	:	Low/ Mid/ High for spurious, Low/ High for Band Edge
Operation mode	:	A
Ambient temperature	:	20-24°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.

Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.


Test Plot 100kHz Conducted Emissions, LE 1M

Low Channel

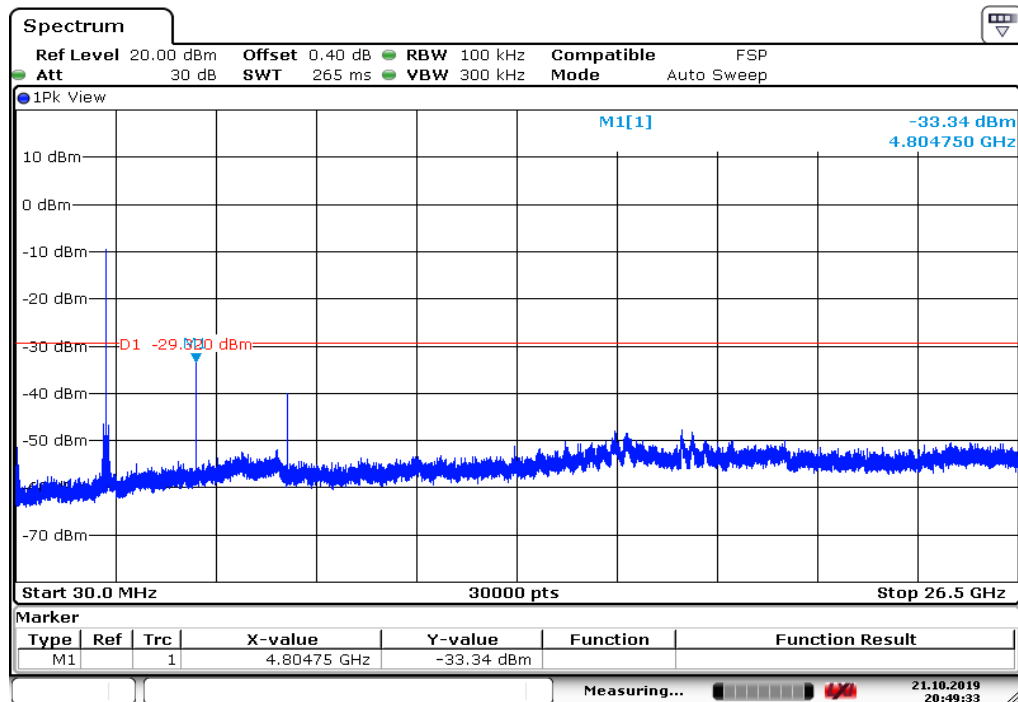


Date: 21.OCT.2019 20:49:33

Middle Channel

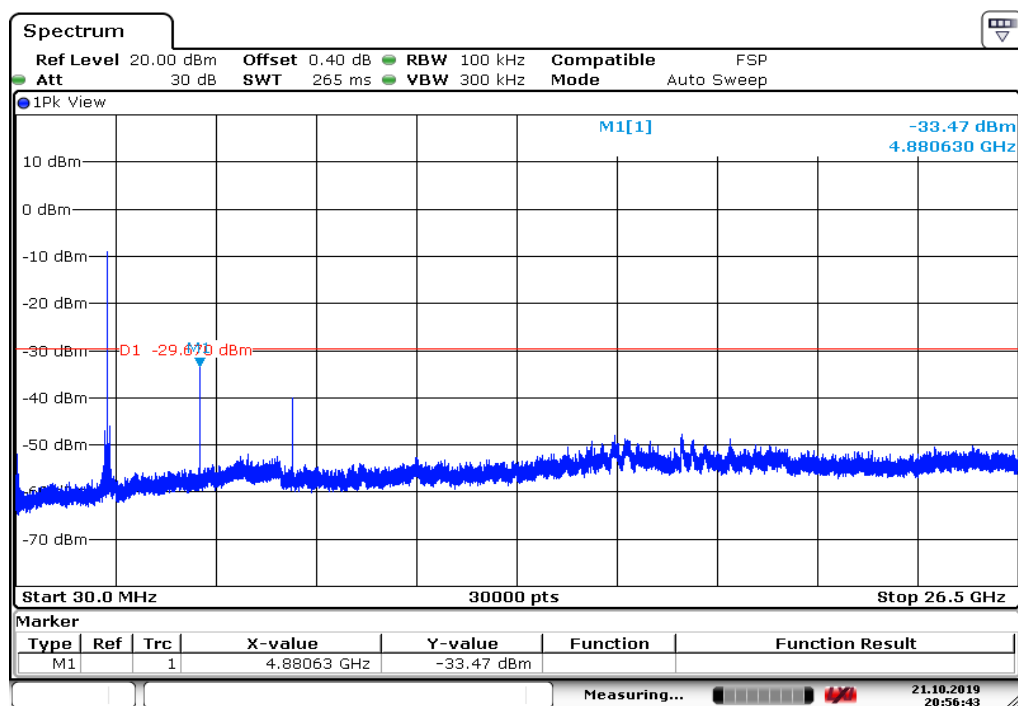


Date: 21.OCT.2019 20:56:43

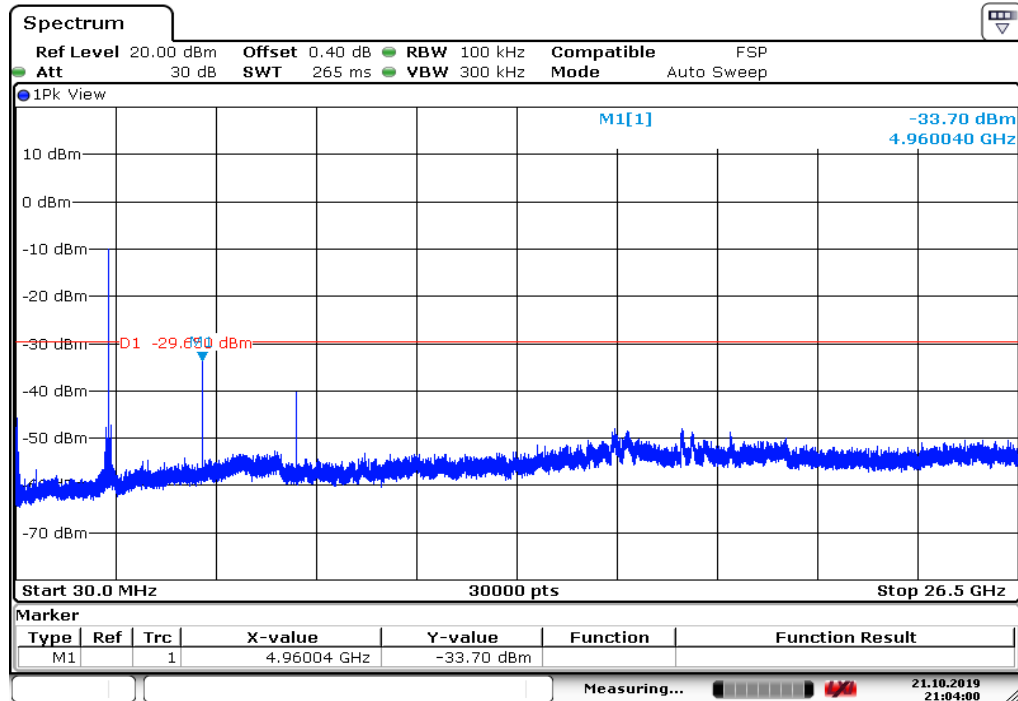High Channel


Date: 21.OCT.2019 21:04:00


Test Plot 100kHz RBW Band Edge, LE 1M

Low Channel

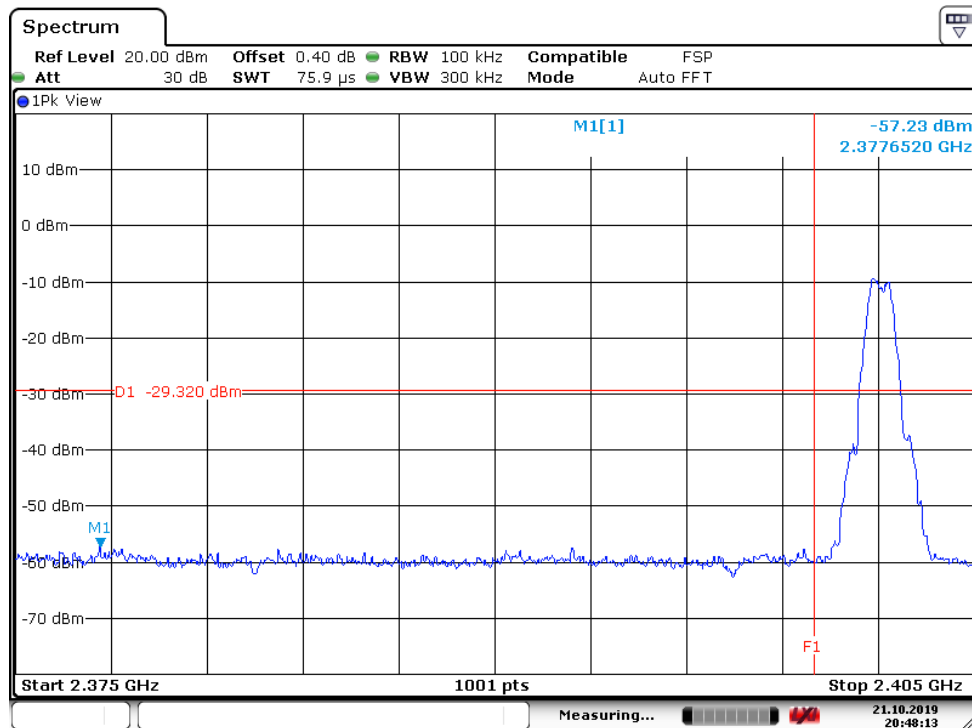

Date: 21.OCT.2019 20:48:14

High Channel

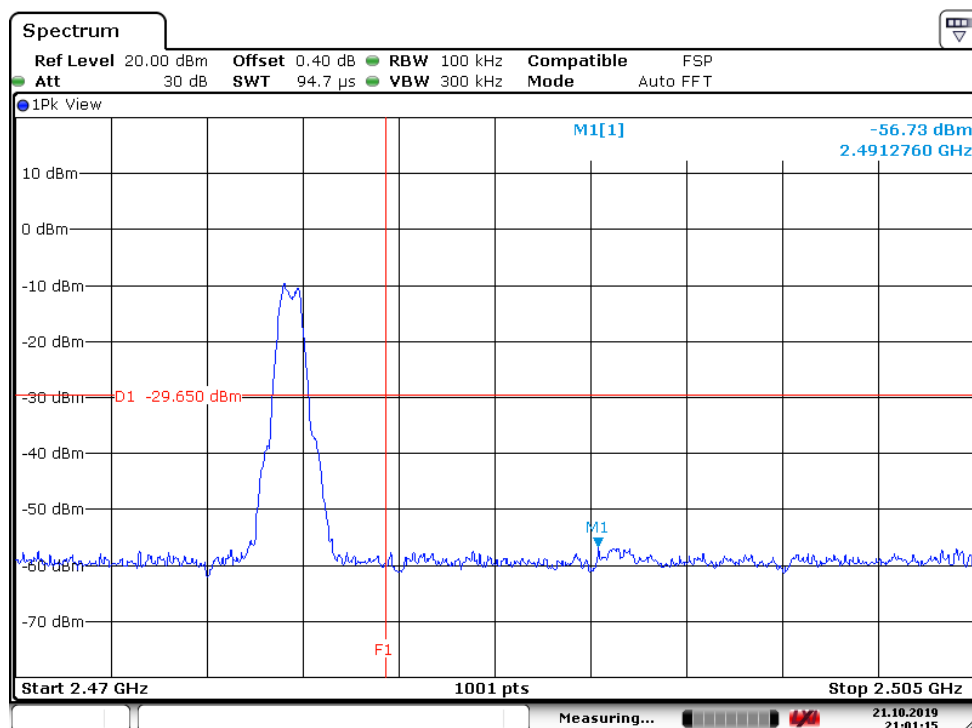

Date: 21.OCT.2019 21:01:15

5.1.6 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), FCC 15.205, FCC 15.209, RSS-247 5.5 and RSS-Gen issue 5
Basic standard	:	ANSI C63.10: 2013
Limits	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen i5, 8.10 (Table 7), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen i5, 8.9 (Table 5 and 6). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen i5, 8.9 (Table 5 and 6).
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Factor (dB/m)=Antenna Factor(dB/m)+Cable loss (dB)
Level(dBuV/m)=Reading(dBuV)+ Factor(dB/m)

5.2 Mains Emissions

5.2.1 Mains Conducted Emissions

RESULT:**Passed**

Test standard : FCC Part 15.207
FCC Part 15.107
RSS-Gen i5 8.8

Limits : Mains Conducted emissions as defined in
above test standards must comply with the
mains conducted emission limits specified

Kind of test site : Shielded Room

Test setup

Test Channel : Middle
Operation mode : A

Remark: For details refer to Appendix D.

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Passed**

Test standard : FCC KDB Publication 447498 D01 v06
47CFR 1.1310
47CFR 2.1091
RSS-102 issue 5

The Maximum average output power is -7.18dBm(0.19mW)

FCC:

Therefore the maximum output power of the transmitter is 0.19mW < 10mW(Distance: 5 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile Portable RF Exposure.

Canada:

Maximum conducted average power: 0.19mW
Antenna Gain: 0.5(-3.01dBi)
Maximum EIRP available 0.095mW

Since maximum output power of the transmitter is 0.095mW < 4mW (distance ≤ 5mm), hence the EUT is excluded from SAR evaluation according to Table 1 in RSS-102, For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 of RSS-102 are multiplied by a factor of 2.5.

---End---

7. Photographs of the Test Set-Up

Photograph 1: Set-up for Spurious Emissions (Front View 1)



Photograph 2: Set-up for Spurious Emissions (Front View 2)




Photograph 3: Set-up for Spurious Emissions (Back View 1)




Photograph 4: Set-up for Spurious Emissions (Back View 2)




Photograph 5: Set-up for Spurious Emissions (Back View 3)

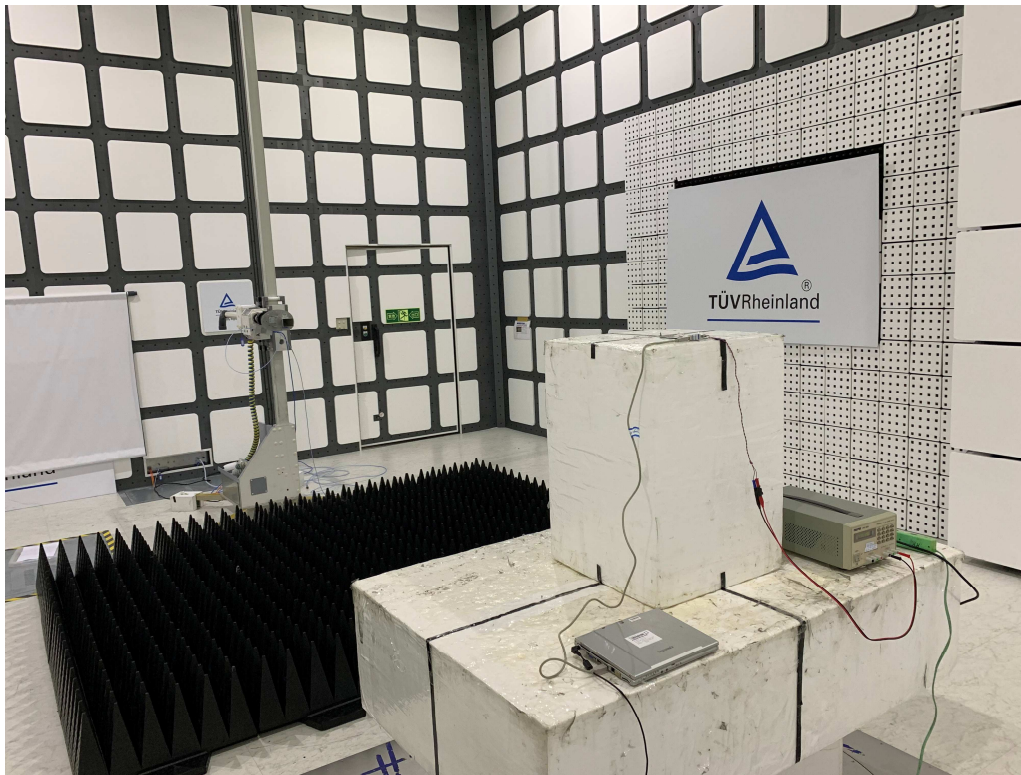


Photograph 6: Set-up for Spurious Emissions (Back View 4)

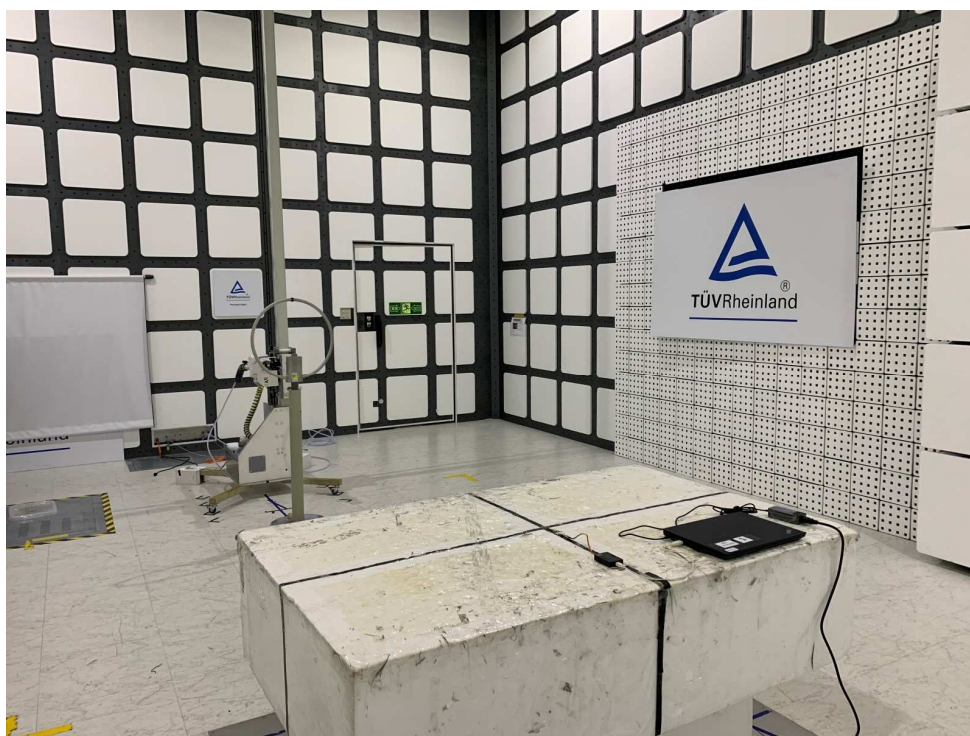

Photograph 7: Set-up for Conducted testing

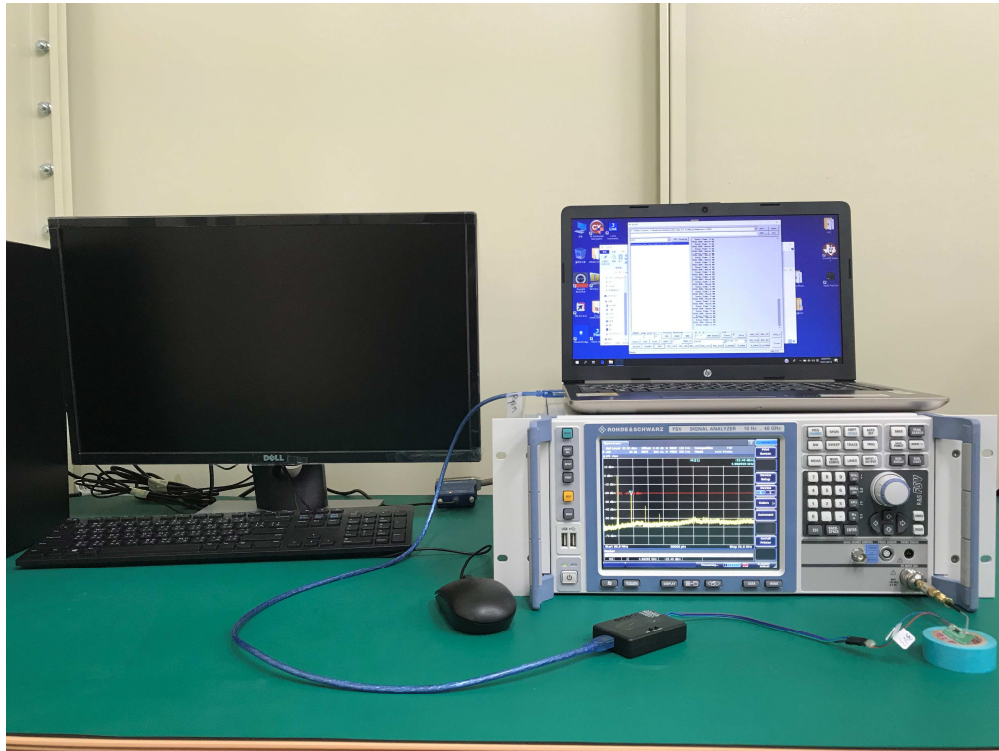

Photograph 8: Set-up for Conducted testing

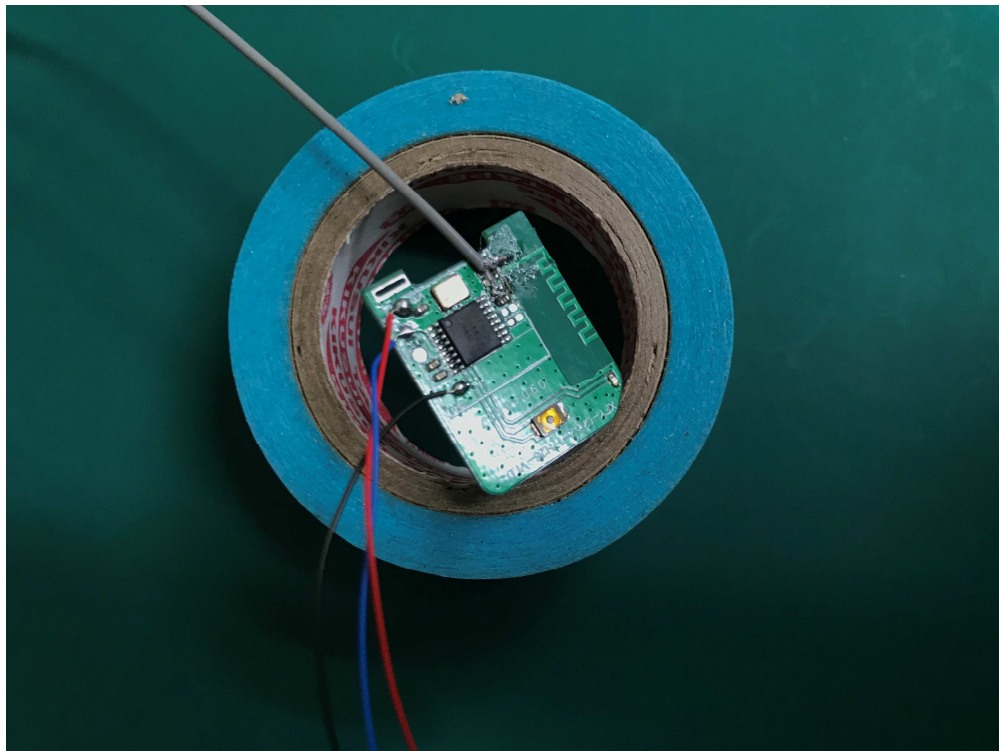

Photograph 9: Set-up for Mains Conducted testing (Front View)



Photograph 10: Set-up for Mains Conducted testing (Back View)



8. List of Tables

Table 1: Applied Standard and Test Levels	5
Table 2: List of Test and Measurement Equipment	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Table for Parameters of Test Software Setting	11
Table 7: Test result of Maximum conducted Peak output power, LE 1M.....	16
Table 8: Test result of 6dB Bandwidth, LE 1M	17
Table 9: Test result of 99% Bandwidth, LE 1M	17
Table 10: Test result of Power Density, LE 1M.....	20

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View 1).....	30
Photograph 2: Set-up for Spurious Emissions (Front View 2).....	30
Photograph 3: Set-up for Spurious Emissions (Back View 1)	31
Photograph 4: Set-up for Spurious Emissions (Back View 2)	31
Photograph 5: Set-up for Spurious Emissions (Back View 3)	32
Photograph 6: Set-up for Spurious Emissions (Back View 4)	32
Photograph 7: Set-up for Conducted testing	33
Photograph 8: Set-up for Conducted testing	33
Photograph 9: Set-up for Mains Conducted testing (Front View).....	34
Photograph 10: Set-up for Mains Conducted testing (Back View)	34