



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden No.98, Pingxin North Road, Shangmugu, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

TEST REPORT

FCC Part 22 Subpart H / Part 24 Subpart E

Report Reference No.....: **GTS20191021009-1-9-1**

FCC ID.....: **2AUUB-S900PLUS**

Compiled by

(position+printed name+signature) ..: File administrators Jimmy Wang

Supervised by

(position+printed name+signature) ..: Test Engineer Aaron Tan

Approved by

(position+printed name+signature) ..: Manager Jason Hu

Date of issue.....: Oct. 24, 2019

Testing Laboratory Name: **Shenzhen Global Test Service Co.,Ltd.**

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden No.98, Pingxin North Road, Shangmugu, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Applicant's name: **BOXCHIP CO.,LTD**

Address: Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Test specification

FCC CFR Title 47 Part 2, Part 22H, Part 24E

Standard: **ANSI/TIA-603-E-2016**
KDB 971168 D01

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Smart Terminal

Trade Mark: **BOXCHIP**

Manufacturer: **BOXCHIP CO.,LTD**

Model/Type reference.....: S900Plus

Listed Models: S900A_Plus, S900B_Plus, S1000, TVX-588d

Ratings: DC 3.8V from battery

Modulation: GMSK, 8PSK, QPSK

Hardware version: TVH30_S900+_MB_V2.0

Software version: V1.0

Frequency.....: GSM850, PCS1900, UMTS Band II, UMTS Band V

Result.....: **PASS**

TEST REPORT

| | | |
|--------------------------|-----------------------------|---------------|
| Test Report No. : | GTS20191021009-1-9-1 | Oct. 24, 2019 |
| | | Date of issue |

Equipment under Test : Smart Terminal

Model /Type : S900Plus

Listed Models : S900A_Plus, S900B_Plus, S1000, TVX-588d

Applicant : **BOXCHIP CO.,LTD**

Address : Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Manufacturer : **BOXCHIP CO.,LTD**

Address : Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

| | |
|--------------------|---------------|
| Test result | Pass * |
|--------------------|---------------|

* In the configuration tested, the EUT complied with the standards specified page 4.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the testlaboratory.

Contents

| | | |
|----------|--|-----------|
| 1 | SUMMARY | 4 |
| 1.1 | TEST STANDARDS | 4 |
| 1.2 | ADDRESS OF THE TEST LABORATORY | 5 |
| 1.3 | TEST FACILITY | 5 |
| 1.4 | STATEMENT OF THE MEASUREMENT UNCERTAINTY | 5 |
| 2 | GENERAL INFORMATION | 6 |
| 2.1 | ENVIRONMENTAL CONDITIONS | 6 |
| 2.2 | GENERAL DESCRIPTION OF EUT | 6 |
| 2.3 | DESCRIPTION OF TEST MODES AND TEST FREQUENCY | 7 |
| 2.4 | EQUIPMENTS USED DURING THE TEST | 8 |
| 2.5 | RELATED SUBMITTAL(S) / GRANT (S) | 8 |
| 2.6 | MODIFICATIONS | 8 |
| 3 | TEST CONDITIONS AND RESULTS | 9 |
| 3.1 | OUTPUT POWER | 9 |
| 3.2 | OCCUPIED BANDWIDTH | 14 |
| 3.3 | BAND EDGE COMPLIANCE | 18 |
| 3.4 | SPURIOUS EMISSION | 22 |
| 3.5 | FREQUENCY STABILITY UNDER TEMPERATURE & VOLTAGE VARIATIONS | 35 |
| 4 | TEST SETUP PHOTOS OF THE EUT | 38 |
| 5 | EXTERNAL AND INTERNAL PHOTOS OF THE EUT | 39 |

1 SUMMARY

1.1 TEST STANDARDS

The tests were performed according to following standards:

FCC Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

FCC Part 22 Subpart H: PRIVATE LAND MOBILE RADIO SERVICES.

FCC Part 24 Subpart E: PUBLIC MOBILE SERVICES

ANSI/TIA-603-E-2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.10-2013 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

FCC KDB971168D01 Power Meas License Digital Systems

Test Description

| Test Item | Section in CFR 47 | Result |
|--|--|--------|
| RF Output Power | Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c) | Pass |
| Peak-to-Average Ratio | Part 24.232 (d) | Pass |
| 99% & -26 dB Occupied Bandwidth | Part 2.1049 Part 22.917 | Pass |
| Spurious Emissions at Antenna Terminal | Part 2.1051 Part 22.917 (a) Part 24.238 (a) | Pass |
| Field Strength of Spurious Radiation | Part 2.1053 Part 22.917 (a) Part 24.238 (a) | Pass |
| Out of band emission, Band Edge | Part 22.917 (a) Part 24.238 (a) | Pass |
| Frequency stability | Part 2.1055 Part 22.355 Part 24.235 | Pass |

1.2 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SWSWR requirement for radiated emission above 1GHz.

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 165725

Shenzhen Global Test Service Co.,Ltd EMC Laborns Commission. The acceptance letter from the FCC is maintained in our files.

atory has been registered and fully described in a report filed with the (FCC) Federal Communicatio

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

1.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Global Test Service Co.,Ltd. is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-------------------------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 4.10 dB | (1) |
| Radiated Emission | 1~18GHz | 4.32 dB | (1) |
| Radiated Emission | 18~40GHz | 5.54 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.12 dB | (1) |
| Conducted Power | 9KHz~18GHz | 0.61 dB | (1) |
| Spurious RF Conducted Emission | 9KHz~40GHz | 1.22 dB | (1) |
| Band Edge Compliance of RF Emission | 9KHz~40GHz | 1.22 dB | (1) |
| Occupied Bandwidth | 9KHz~40GHz | - | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|---------------------|---------|
| Normal Temperature: | 25°C |
| Relative Humidity: | 55 % |
| Air Pressure: | 101 kPa |

2.2 General Description of EUT

| | |
|------------------------|---|
| Product Name: | Smart Terminal |
| Model/Type reference: | S900Plus |
| Power supply: | DC 3.8V from battery |
| GSM | |
| Operation Band: | GSM850, PCS1900 |
| Supported Type: | GSM/GPRS/EGPRS |
| Power Class: | GSM850:Power Class 4 PCS1900:Power Class 1 |
| Modulation Type: | GMSK for GPRS, 8-PSK for EGPRS |
| GSM Release Version | R99 |
| GPRS Multislot Class | 12 |
| EGPRS Multislot Class | 12 |
| Antenna type: | FPC antenna |
| WCDMA | |
| Operation Band: | FDD Band II, FDD Band V |
| Power Class: | Power Class 3 |
| Modulation Type: | QPSK for HSUPA/HSDPA |
| WCDMA Release Version: | Rel-5 |
| HSDPA Category: | Category 14 |
| HSUPA Category: | Category 6 |
| Antenna type: | FPC antenna |

Note: For more details, refer to the user's manual of the EUT.

2.3 Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CUM200 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Test Frequency:

| GSM 850 | | PCS1900 | |
|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 128 | 824.20 | 512 | 1850.20 |
| 190 | 836.60 | 661 | 1880.00 |
| 251 | 848.80 | 810 | 1909.80 |

| FDD Band II | | FDD Band V | |
|-------------|-----------------|------------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 9262 | 1852.4 | 4132 | 826.40 |
| 9400 | 1880.0 | 4182 | 836.60 |
| 9538 | 1907.6 | 4233 | 846.60 |

Test Modes:

The test mode(s) are selected according to relevant radio technology specifications.

| Test Mode | Test Modes Description |
|-----------|-----------------------------------|
| Mode 1 | GSM system, GSM, GMSK modulation |
| Mode 2 | GSM system, GPRS, GMSK modulation |
| Mode 3 | GSM system, EDGE, 8PSK modulation |
| Mode 4 | WCDMA system, QPSK modulation |
| Mode 5 | HSDPA system, QPSK modulation |
| Mode 6 | HSUPA system, QPSK modulation |

Note:

1. As GPRS and GSM with the same emission designator, test result recorded in this report at the worst case Mode 1 only after exploratory scan.
2. As HSDPA and HSUPA with the same emission designator, test result recorded in this report at the worst case Mode 4 with RCM 12.2Kbps only after exploratory scan.

2.4 Equipments Used during the Test

| Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|----------------------------|----------------|-----------------------|--------------|------------------|----------------------|
| LISN | R&S | ENV216 | 3560.6550.08 | 2019/09/20 | 2020/09/19 |
| LISN | R&S | ESH2-Z5 | 893606/008 | 2019/09/20 | 2020/09/19 |
| Bilog Antenna | Schwarzbeck | VULB9163 | 976 | 2019/09/20 | 2020/09/19 |
| Bilog Antenna | Schwarzbeck | VULB9163 | 979 | 2019/09/20 | 2020/09/19 |
| EMI Test Receiver | R&S | ESCI7 | 101102 | 2019/09/20 | 2020/09/19 |
| Spectrum Analyzer | Agilent | N9020A | MY48010425 | 2019/09/20 | 2020/09/19 |
| Spectrum Analyzer | R&S | FSP40 | 100019 | 2019/09/20 | 2020/09/19 |
| Controller | EM Electronics | Controller EM 1000 | N/A | N/A | N/A |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 01622 | 2019/09/20 | 2020/09/19 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 01652 | 2019/09/20 | 2020/09/19 |
| Active Loop Antenna | SCHWARZBECK | FMZB1519 | 1519-037 | 2019/09/20 | 2020/09/19 |
| Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | 971 | 2019/09/20 | 2020/09/19 |
| Amplifier | Schwarzbeck | BBV 9743 | #202 | 2019/09/20 | 2020/09/19 |
| Amplifier | EMCI | EMC051845B | 980355 | 2019/09/20 | 2020/09/19 |
| Temperature/Humidity Meter | Gangxing | CTH-608 | 02 | 2019/09/20 | 2020/09/19 |
| High-Pass Filter | K&L | 9SH10-2700/X12750-O/O | KL142031 | 2019/09/20 | 2020/09/19 |
| High-Pass Filter | K&L | 41H10-1375/U12750-O/O | KL142032 | 2019/09/20 | 2020/09/19 |
| RF Cable(below 1GHz) | HUBER+SUHN ER | RG214 | RE01 | 2019/09/20 | 2020/09/19 |
| RF Cable(above 1GHz) | HUBER+SUHN ER | RG214 | RE02 | 2019/09/20 | 2020/09/19 |
| Data acquisition card | Agilent | U2531A | TW53323507 | 2019/09/20 | 2020/09/19 |
| Power Sensor | Agilent | U2021XA | MY5365004 | 2019/09/20 | 2020/09/19 |
| EMI Test Software | R&S | ES-K1 | V1.7.1 | 2019/09/20 | 2020/09/19 |
| EMI Test Software | JS Tonscend | JS32-RE | 2.0.1.5 | 2019/09/20 | 2020/09/19 |
| EMI Test Software | Audix | E3 | 2..1.1 | 2019/09/20 | 2020/09/19 |

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID:2AUUB-S900PLUS filing to comply with of the FCC Part 22 and Part 24 Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.

3 TEST CONDITIONS AND RESULTS

3.1 Output Power

LIMIT

GSM850/WCDMA Band V: 7W


PCS1900/WCDMA Band II: 2W

WCDMA Band IV: 1W


The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

Conducted Power Measurement

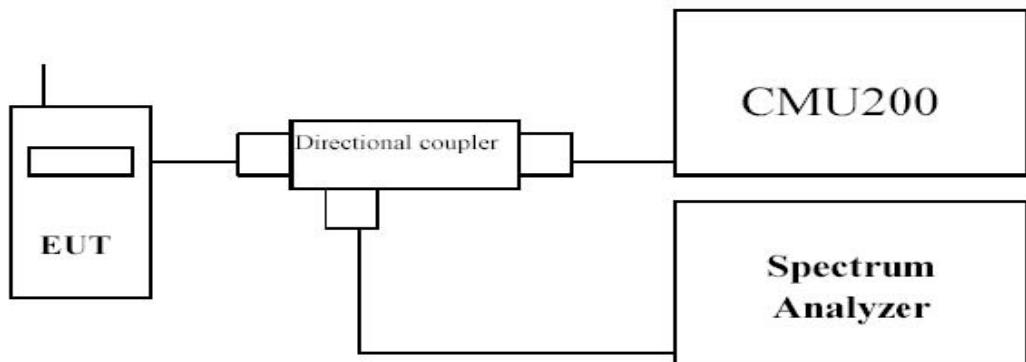

Radiated Power Measurement:

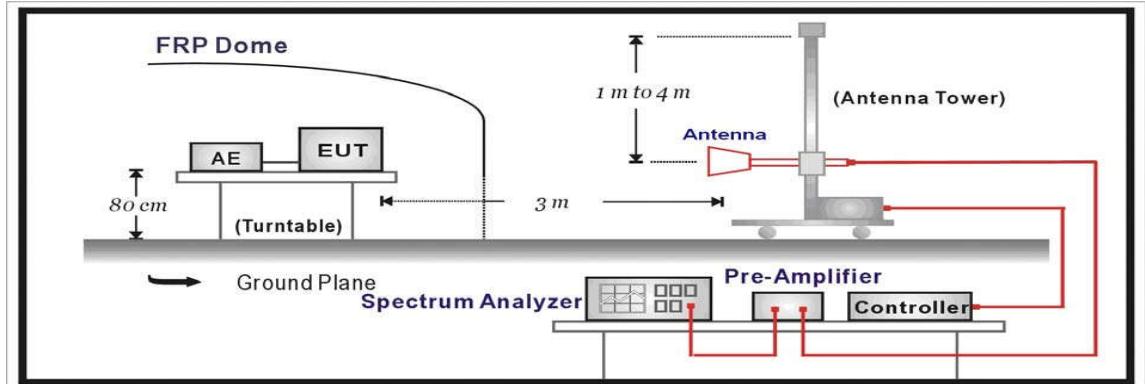

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603C

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.

- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

TEST RESULTS**Conducted Measurement:**

| EUT Mode | Channel | Frequency (MHz) | Avg.Burst Power (dBm) | Peak-to-Average Ratio (dB) | Result |
|------------------------|---------|-----------------|-----------------------|----------------------------|--------|
| GSM850 (GMSK,1Slot) | 128 | 824.20 | 32.44 | 0.60 | Pass |
| | 190 | 836.60 | 32.36 | 0.93 | |
| | 251 | 848.80 | 32.38 | 0.55 | |
| GPRS850 (GMSK,1Slot) | 128 | 824.20 | 32.47 | 0.66 | Pass |
| | 190 | 836.60 | 32.55 | 0.46 | |
| | 251 | 848.80 | 32.61 | 0.78 | |
| EGPRS850 (8PSK,1Slot) | 128 | 824.20 | 26.39 | 3.25 | Pass |
| | 190 | 836.60 | 26.47 | 3.27 | |
| | 251 | 848.80 | 26.52 | 3.28 | |
| GSM1900 (GMSK,1Slot) | 512 | 1850.20 | 30.21 | 0.28 | Pass |
| | 661 | 1880.00 | 30.42 | 0.68 | |
| | 810 | 1909.80 | 30.38 | 0.56 | |
| GPRS1900 (GMSK,1Slot) | 512 | 1850.20 | 30.28 | 0.37 | Pass |
| | 661 | 1880.00 | 30.66 | 0.63 | |
| | 810 | 1909.80 | 30.18 | 0.86 | |
| EGPRS1900 (8PSK,1Slot) | 512 | 1850.20 | 24.61 | 3.32 | Pass |
| | 661 | 1880.00 | 24.65 | 3.35 | |
| | 810 | 1909.80 | 24.52 | 3.56 | |
| HSDPA Band II (QPSK) | 9262 | 1852.40 | 23.86 | 3.76 | Pass |
| | 9400 | 1880.00 | 23.66 | 3.64 | |
| | 9538 | 1907.60 | 23.68 | 3.87 | |
| HSUPA Band V (QPSK) | 4132 | 826.40 | 23.46 | 3.60 | Pass |
| | 4183 | 836.60 | 23.49 | 3.82 | |
| | 4233 | 846.60 | 23.39 | 3.11 | |

Note: 1. Peak-to-Average Ratio= maximum PK burst power-maximum Avg. burst power.

Radiated Measurement:

Note: 1. The field strength of radiation emission was measured in the following position: EUT stand-up position (Zaxis), lie-down position (X, Y axis). The data show in this report only with the worst case setup. After exploratory measurement the worst case of Z axis was reported.

Note: 2. We test the H direction and V direction and V direction is worse.

GSM850

| Channel | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|---------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|-------------|--------------|
| 128 | -9.16 | 2.42 | 8.45 | 2.15 | 36.82 | 31.54 | 38.45 | 6.91 | V |
| 190 | -8.88 | 2.46 | 8.45 | 2.15 | 36.82 | 31.78 | 38.45 | 6.67 | V |
| 251 | -9.05 | 2.53 | 8.36 | 2.15 | 36.82 | 31.45 | 38.45 | 7.00 | V |

GPRS850

| Channel | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|---------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|-------------|--------------|
| 128 | -9.72 | 2.42 | 8.45 | 2.15 | 36.82 | 30.98 | 38.45 | 7.47 | V |
| 190 | -9.79 | 2.46 | 8.45 | 2.15 | 36.82 | 30.87 | 38.45 | 7.58 | V |
| 251 | -9.35 | 2.53 | 8.36 | 2.15 | 36.82 | 31.15 | 38.45 | 7.30 | V |

EGPRS850

| Channel | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|---------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|-------------|--------------|
| 128 | -15.05 | 2.42 | 8.45 | 2.15 | 36.82 | 25.65 | 38.45 | 12.80 | V |
| 190 | -14.97 | 2.46 | 8.45 | 2.15 | 36.82 | 25.69 | 38.45 | 12.76 | V |
| 251 | -15.61 | 2.53 | 8.36 | 2.15 | 36.82 | 24.89 | 38.45 | 13.56 | V |

PCS1900

| Channel | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|---------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 512 | -9.38 | 3.41 | 10.24 | 33.6 | 31.05 | 33.01 | 1.96 | V |
| 661 | -9.51 | 3.49 | 10.24 | 33.6 | 30.84 | 33.01 | 2.17 | V |
| 810 | -9.13 | 3.55 | 10.23 | 33.6 | 31.15 | 33.01 | 1.86 | V |

GPRS1900

| Channel | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|---------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 512 | -9.21 | 3.41 | 10.24 | 33.6 | 31.22 | 33.01 | 1.79 | V |
| 661 | -9.03 | 3.49 | 10.24 | 33.6 | 31.32 | 33.01 | 1.69 | V |
| 810 | -9.14 | 3.55 | 10.23 | 33.6 | 31.14 | 33.01 | 1.87 | V |

EGPRS1900

| Channel | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|---------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 512 | -17.31 | 3.41 | 10.24 | 33.6 | 23.12 | 33.01 | 9.89 | V |
| 661 | -17.56 | 3.49 | 10.24 | 33.6 | 22.79 | 33.01 | 10.22 | V |
| 810 | -16.87 | 3.55 | 10.23 | 33.6 | 23.41 | 33.01 | 9.60 | V |

WCDMA BAND II

| Channel | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | P _{Ag} (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|---------|---------------------------|-------------------------|---------------------------------------|-------------------------|---------------|----------------|----------------|--------------|
| 9262 | -19.20 | 3.41 | 10.24 | 33.60 | 21.23 | 33.01 | 11.78 | V |
| 9400 | -18.61 | 3.49 | 10.24 | 33.60 | 21.74 | 33.01 | 11.27 | V |
| 9538 | -19.73 | 3.55 | 10.23 | 33.60 | 20.55 | 33.01 | 12.46 | V |

WCDMA BAND V

| Channel | P _{Mea} (dBm) | P _{cl} (dB) | G _a Antenna Gain(dB) | Correction (dB) | P _{Ag} (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|---------|---------------------------|-------------------------|---------------------------------------|--------------------|-------------------------|--------------|----------------|----------------|--------------|
| 4132 | -19.29 | 2.42 | 8.45 | 2.15 | 36.82 | 21.41 | 38.45 | 17.04 | V |
| 4183 | -19.13 | 2.46 | 8.45 | 2.15 | 36.82 | 21.53 | 38.45 | 16.92 | V |
| 4233 | -19.66 | 2.53 | 8.36 | 2.15 | 36.82 | 20.84 | 38.45 | 17.61 | V |

Remark:


1. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
2. $ERP = EIRP - 2.15dBi$ as $EIRP$ by subtracting the gain of the dipole.

3.2 Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

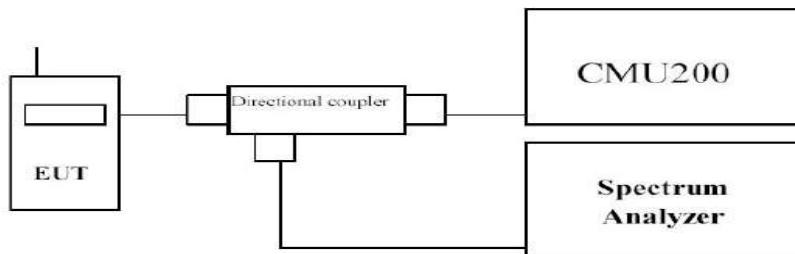

TEST PROCEDURE

1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, $VBW \geq 3$ times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

| EUT Mode | Channel | Frequency (MHz) | 99% Occupy bandwidth (KHz) | -26dB bandwidth (KHz) |
|---------------------------|---------|-----------------|----------------------------|-----------------------|
| GSM850 (GMSK,1Slot) | 128 | 824.20 | 243.91 | 309.90 |
| | 190 | 836.60 | 242.01 | 312.00 |
| | 251 | 848.80 | 243.79 | 313.70 |
| EGPRS850 (8PSK,1Slot) | 128 | 824.20 | 246.63 | 30.80 |
| | 190 | 836.60 | 244.21 | 317.70 |
| | 251 | 848.80 | 247.10 | 307.30 |
| GSM1900 (GMSK,1Slot) | 512 | 1850.20 | 246.95 | 313.90 |
| | 661 | 1880.00 | 247.50 | 308.40 |
| | 810 | 1909.80 | 244.39 | 305.20 |
| EGPRS1900 (8PSK,1Slot) | 512 | 1850.20 | 244.79 | 317.10 |
| | 661 | 1880.00 | 243.54 | 304.40 |
| | 810 | 1909.80 | 245.77 | 310.20 |
| WCDMA Band II (QPSK) | 9262 | 1852.4 | 4148.10 | 4627.00 |
| | 9400 | 1880.0 | 4153.60 | 4614.00 |
| | 9538 | 1907.6 | 4147.10 | 4628.00 |
| WCDMA Band V (QPSK) | 4132 | 826.4 | 4166.40 | 4639.00 |
| | 4183 | 836.6 | 4137.30 | 4609.00 |
| | 4233 | 846.6 | 4156.90 | 4653.00 |

Test plots as follow:

GSM850 For GMSK Modulation



EGPRS850 For 8-PSK Modulation



Channel 128



Channel 128



Channel 190





Channel 190



Channel 251

Channel 251

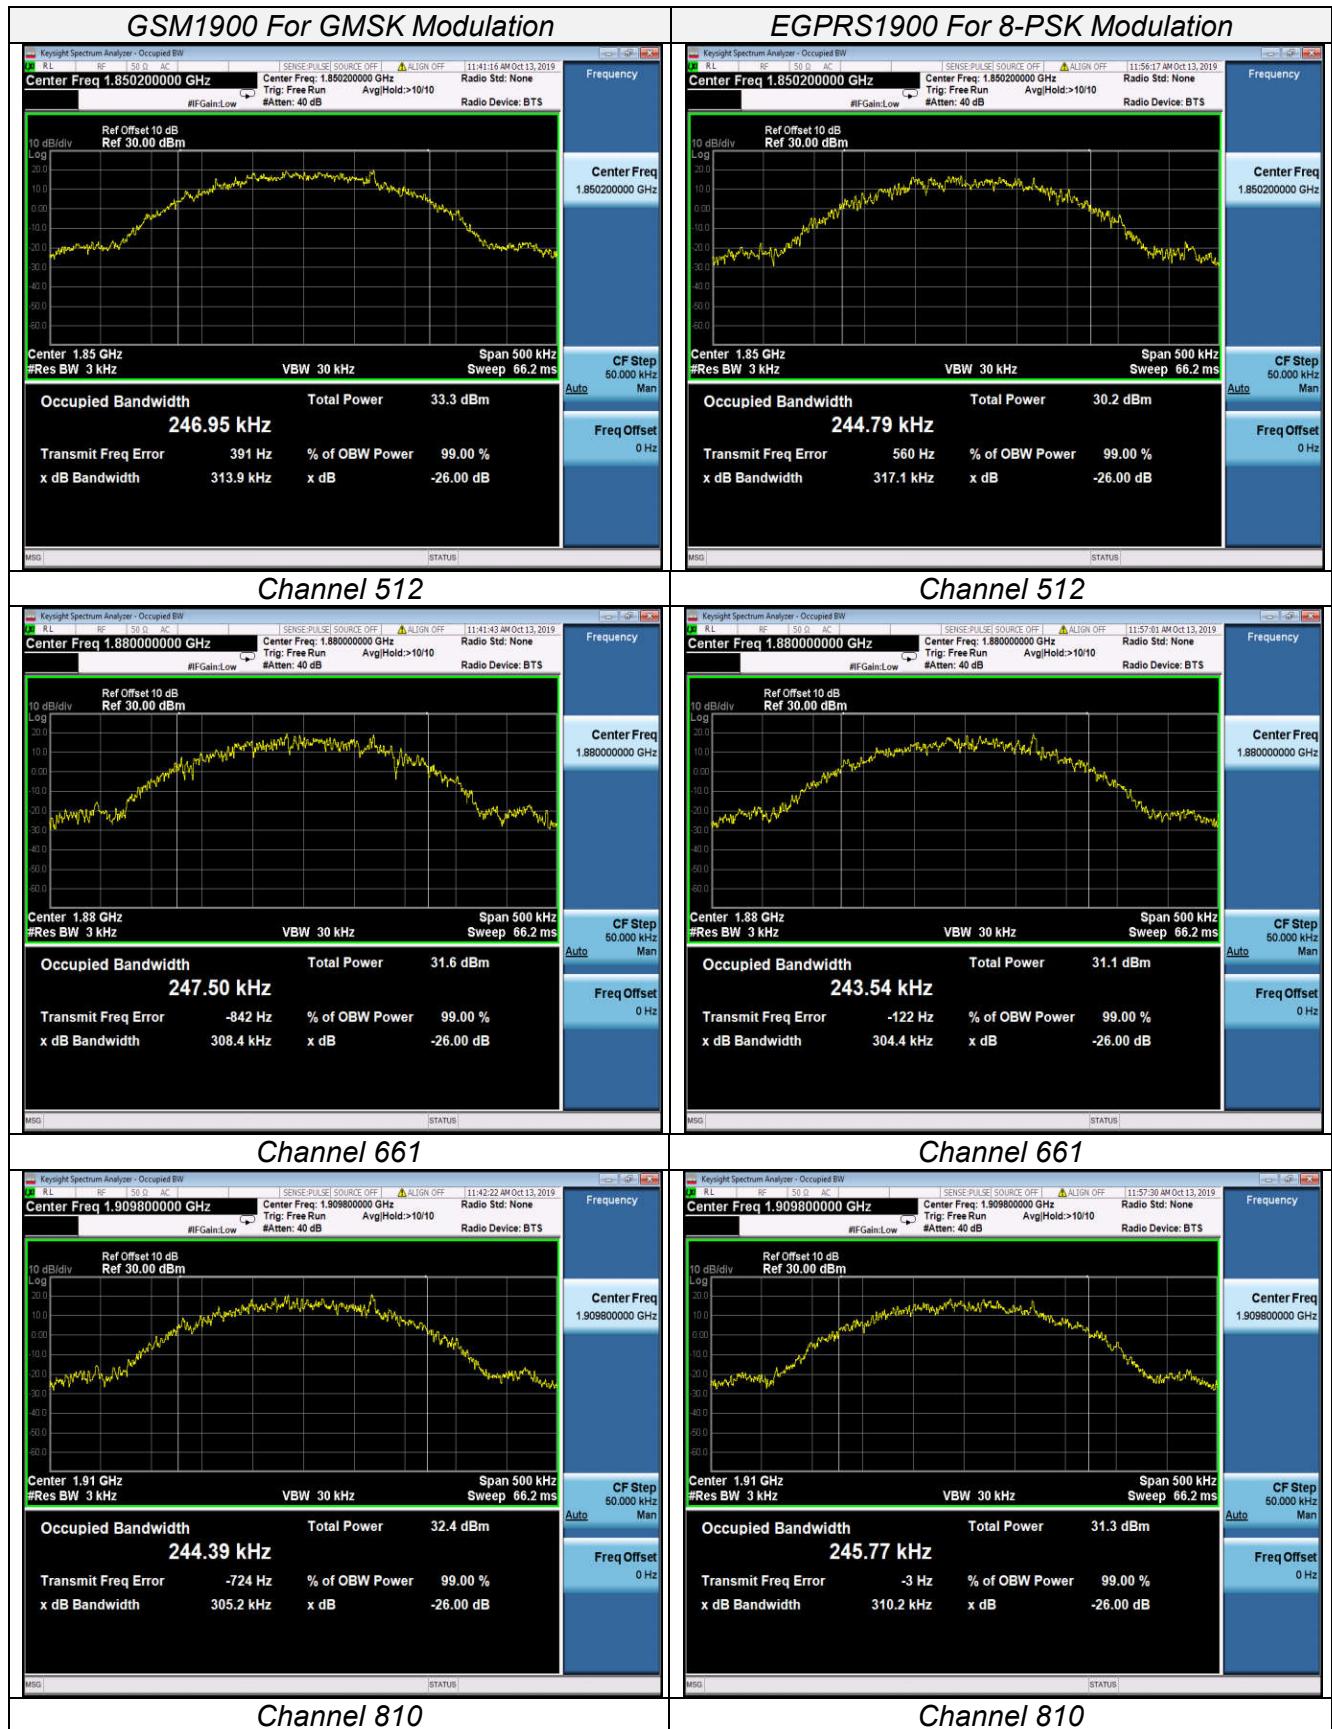

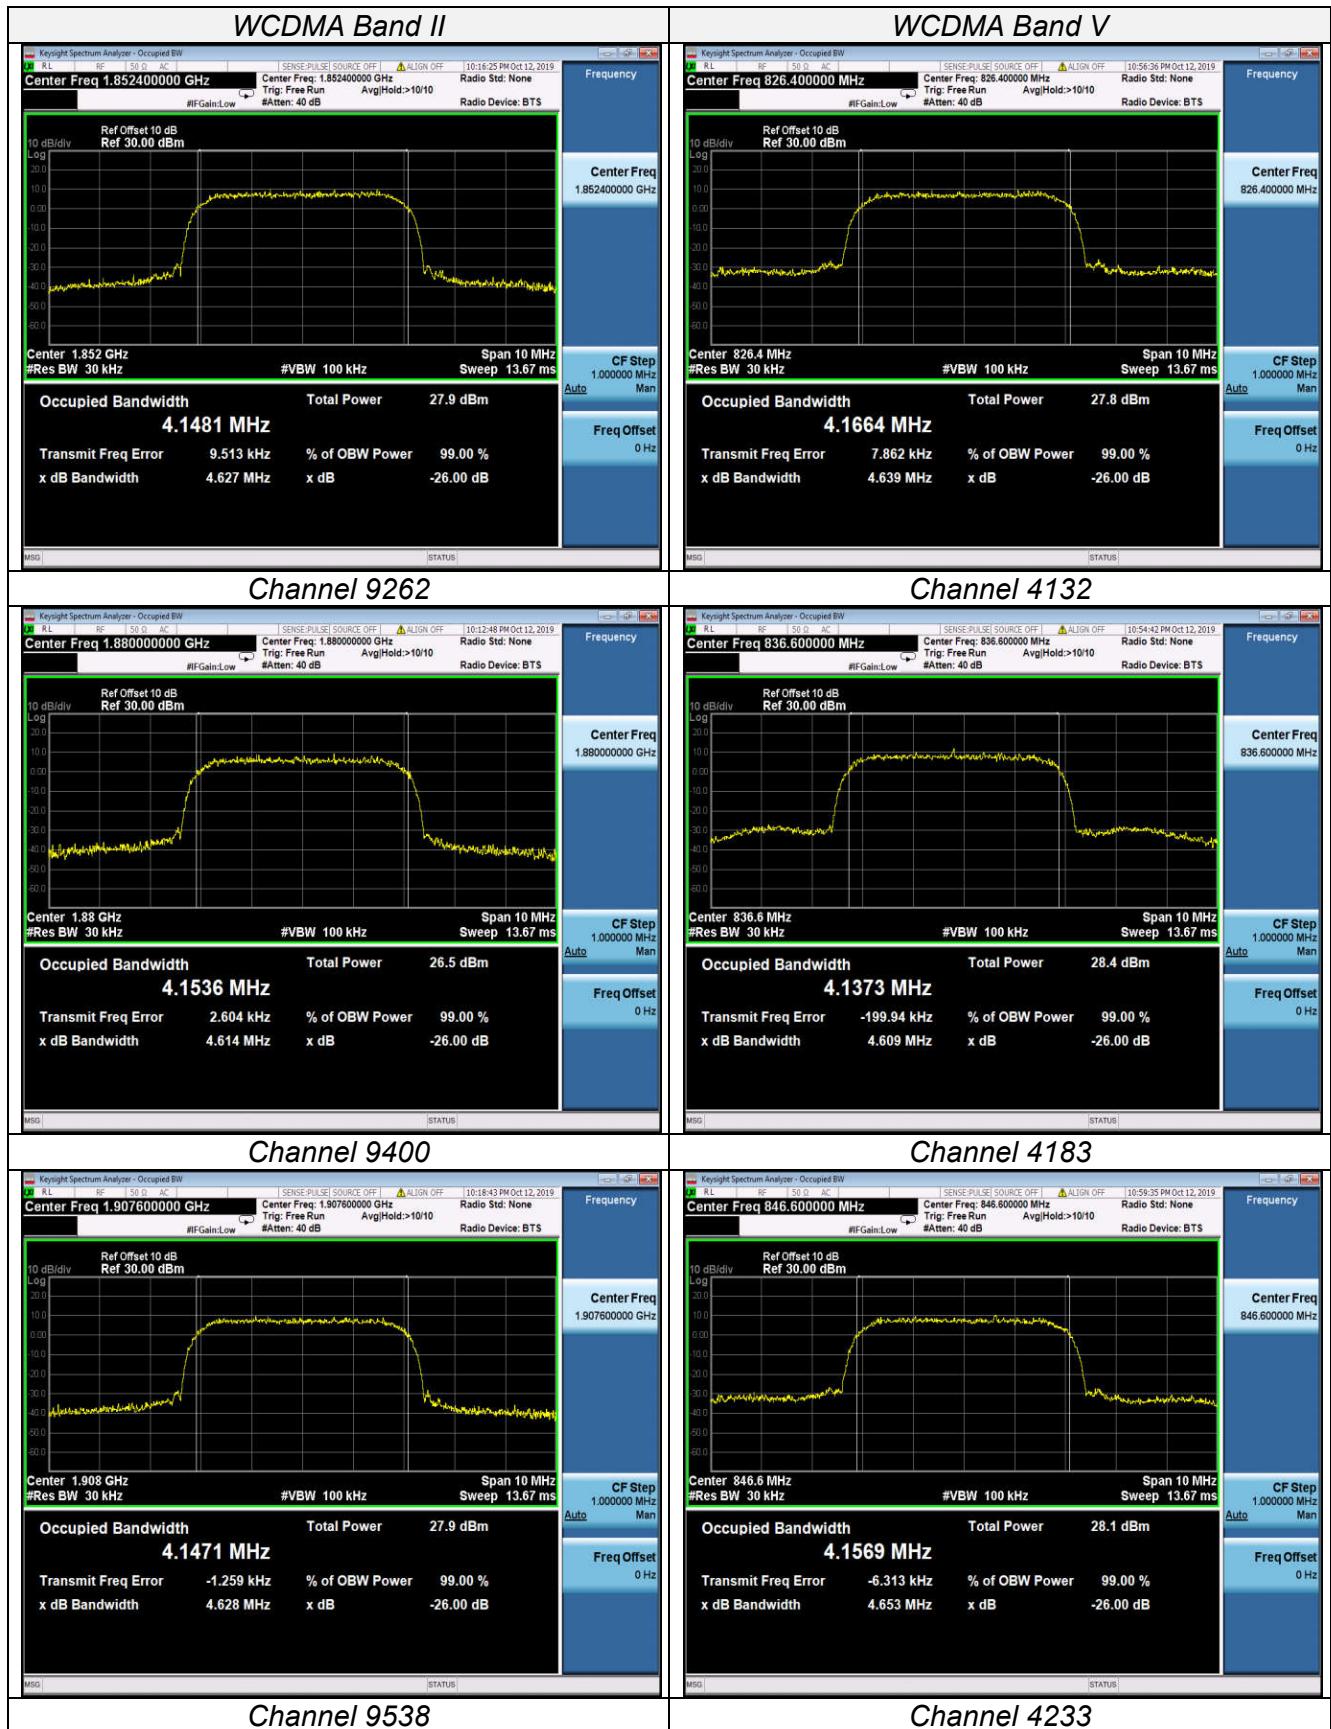


3.3 Band Edge compliance

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.


TEST CONFIGURATION


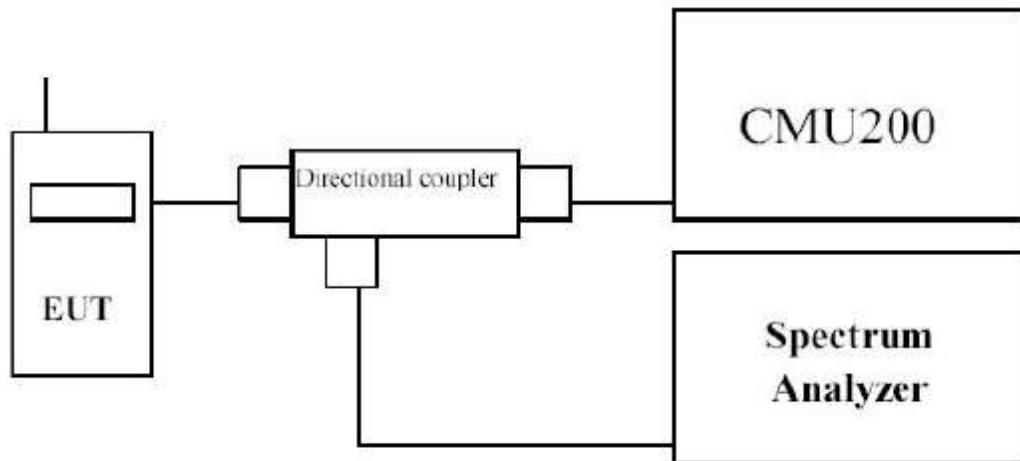




TEST PROCEDURE

In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

TEST RESULTS

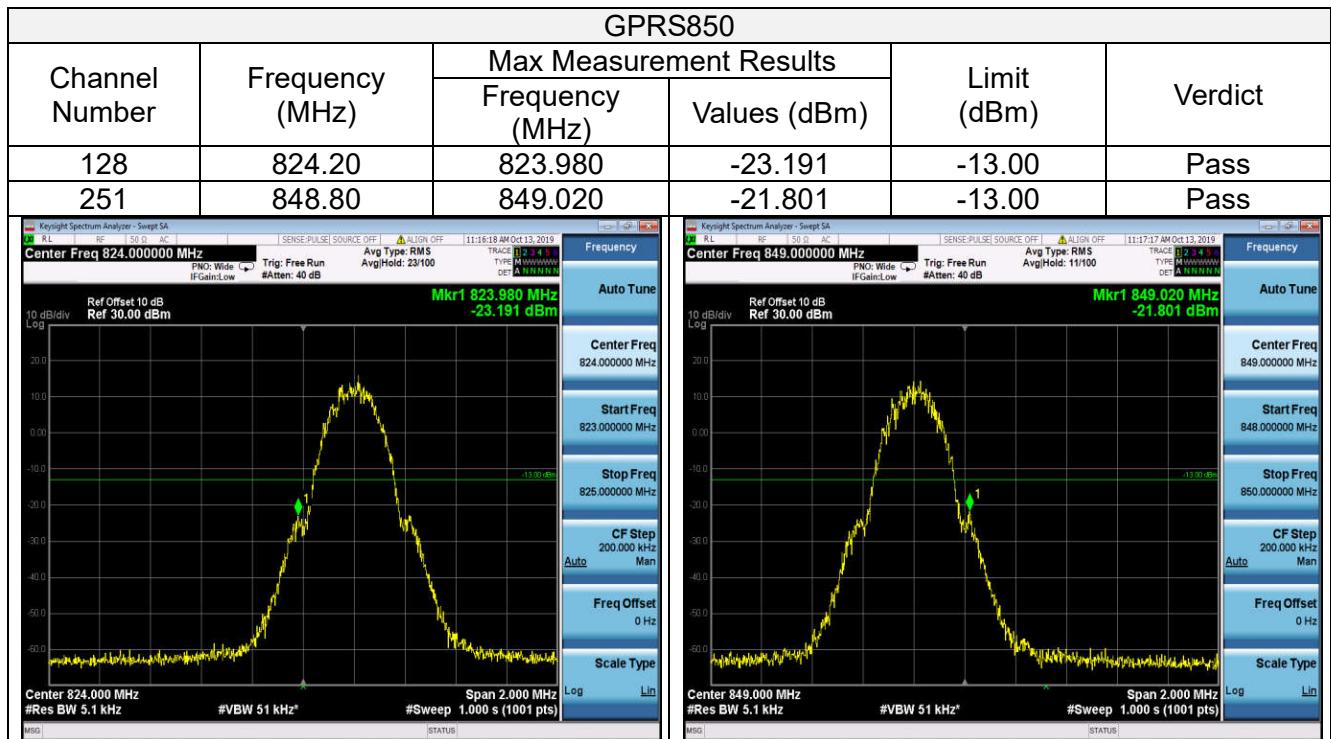

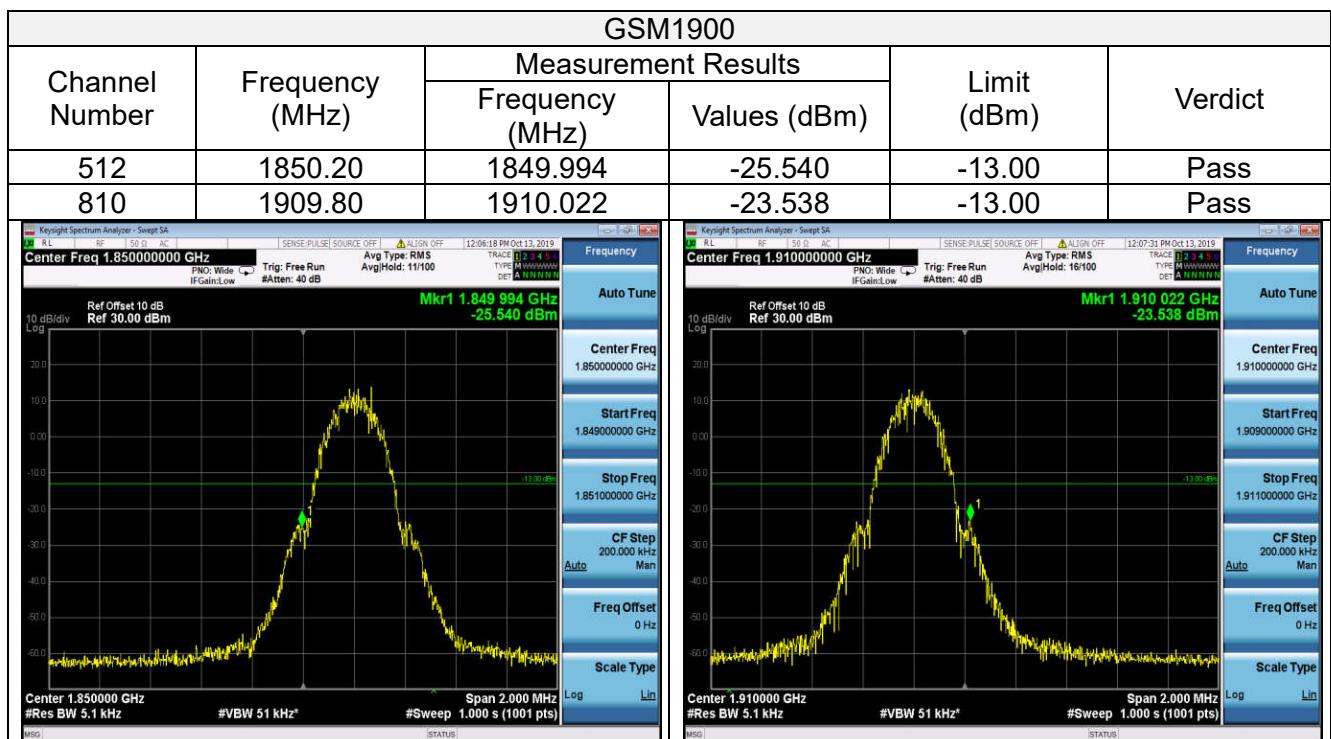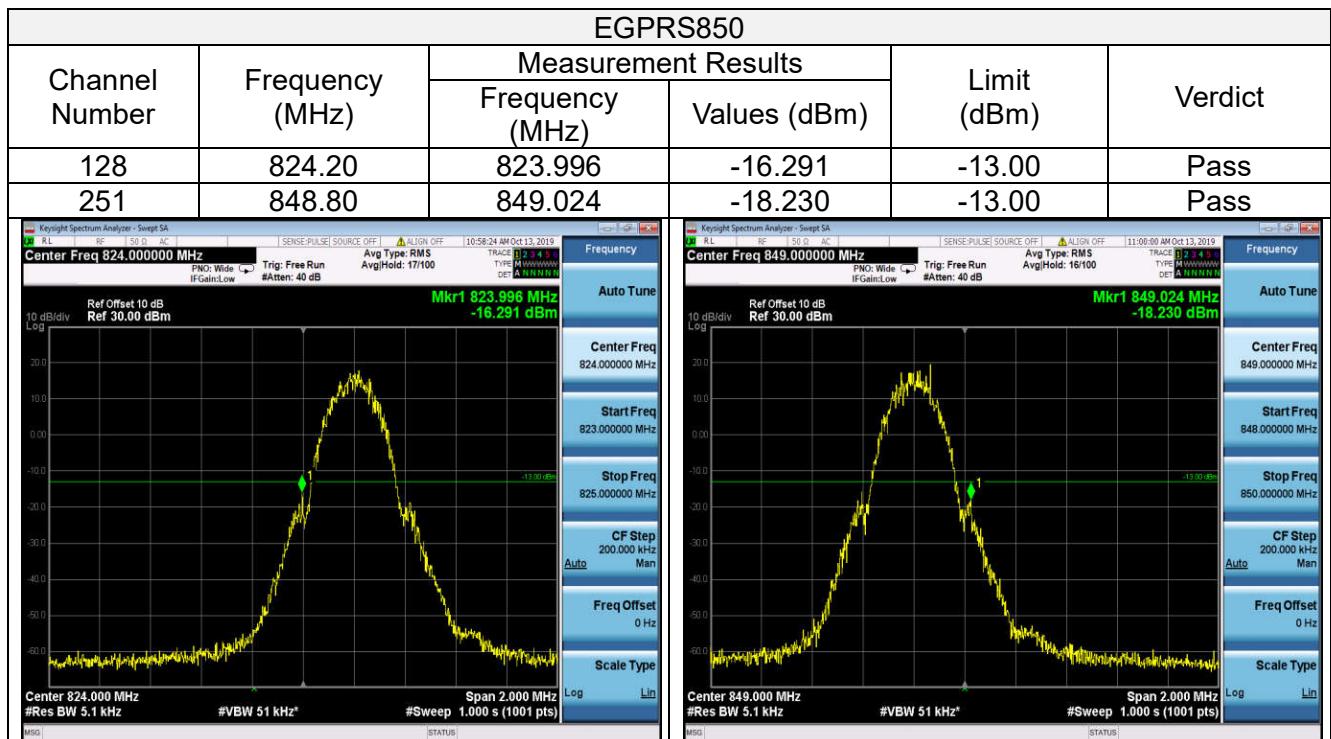

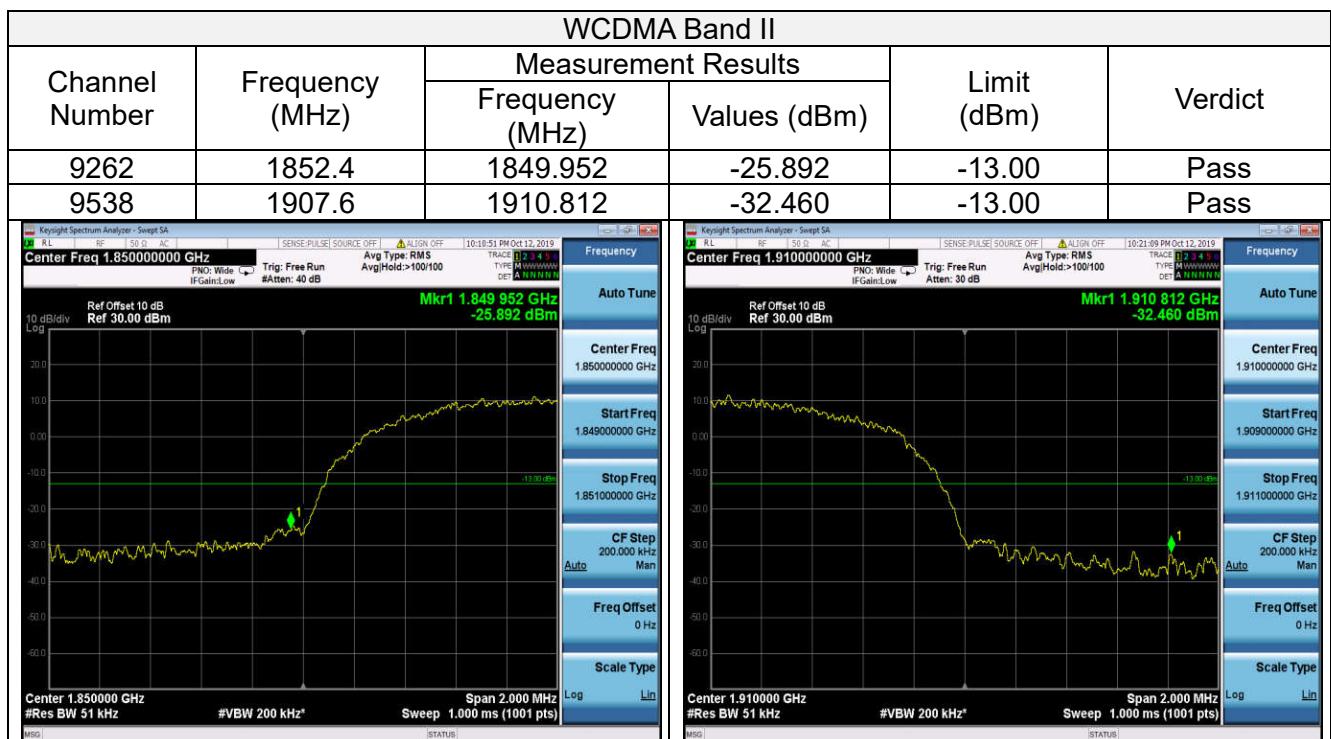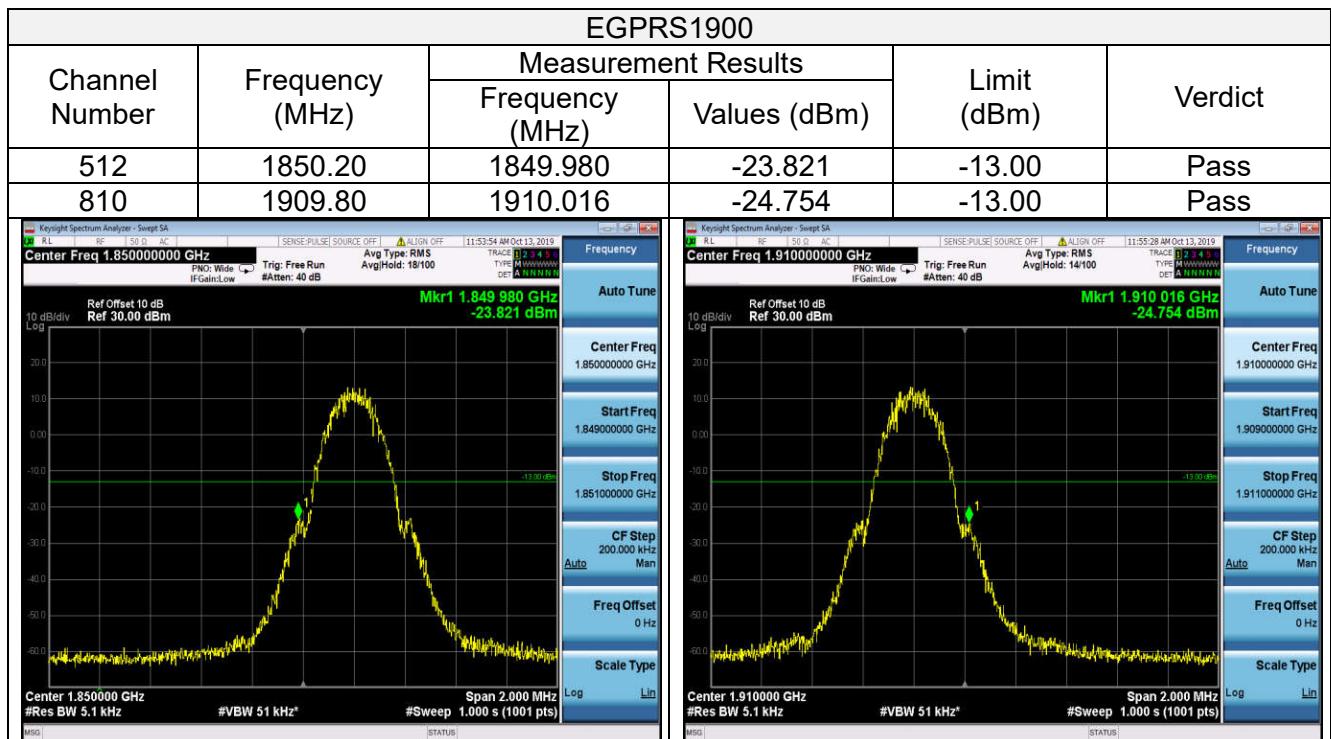

| WCDMA Band V | | | | | |
|----------------|-----------------|---------------------|--------------|-------------|---------|
| Channel Number | Frequency (MHz) | Measurement Results | | Limit (dBm) | Verdict |
| | | Frequency (MHz) | Values (dBm) | | |
| 4132 | 826.4 | 823.770 | -25.219 | -13.00 | Pass |
| 4233 | 846.6 | 849.010 | -26.021 | -13.00 | Pass |




3.4 Spurious Emission

LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

Conducted Spurious Measurement:

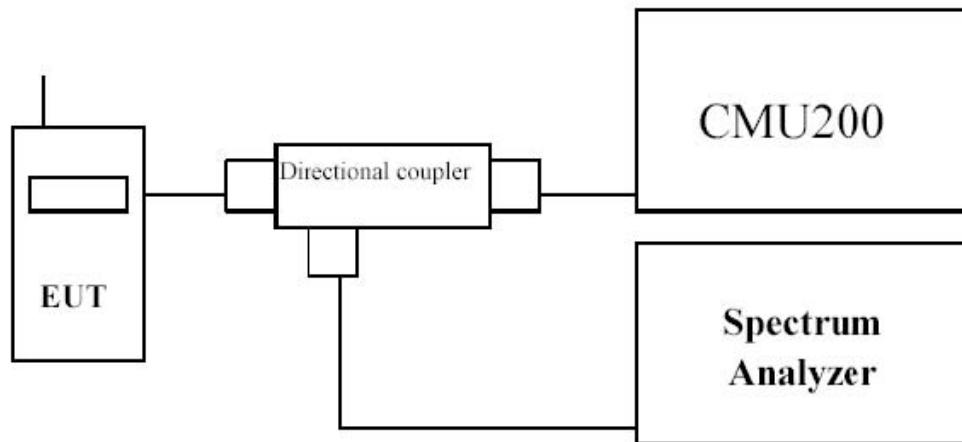

Radiated Spurious Measurement:

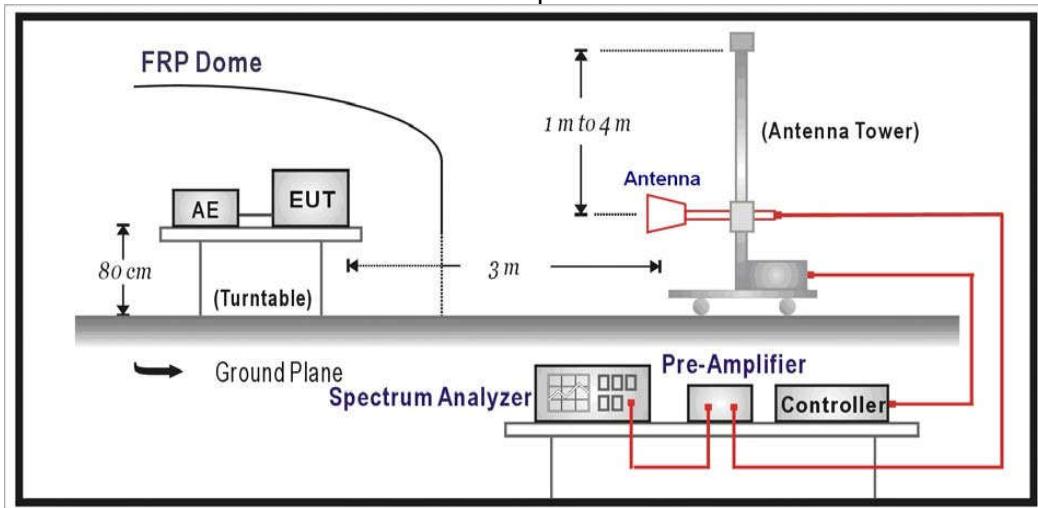

TEST PROCEDURE


The EUT was setup according to EIA/TIA 603C

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- EUT Communicate with CMU200 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set at 1MHz for Part 22 and 1MHz for Part 24, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.

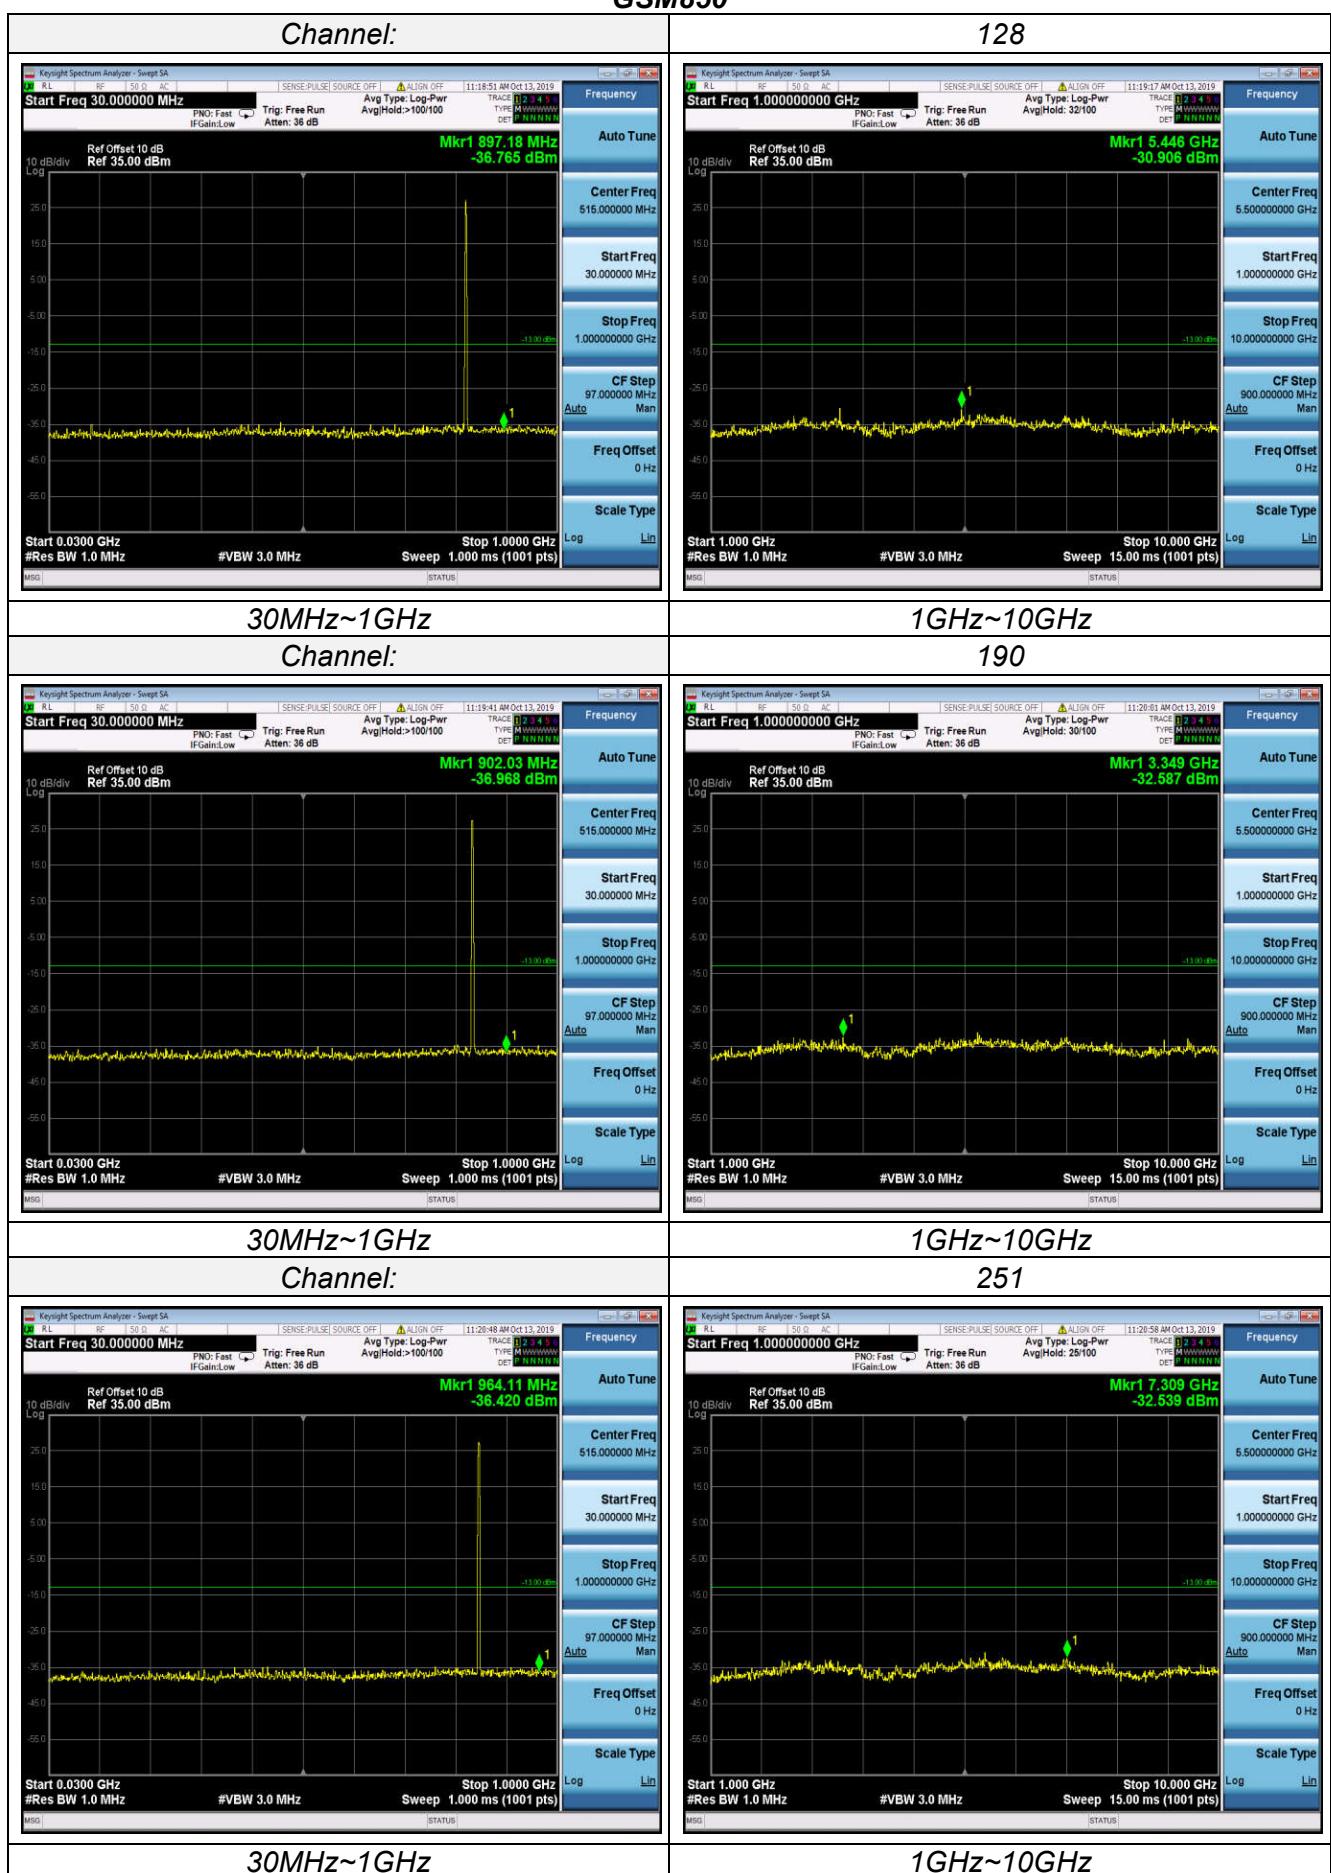TEST RESULTS**Conducted Measurement:****GSM850**

EGPRS850

