



MEASUREMENT REPORT FCC Part 30 5G mmWave

Applicant Name:

Pivotal Commware
10801 120th Ave NE #200,
Kirkland, WA 98033
United States

Date of Testing:

9/17/2020-10/16/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2008040118-02.2AUVU

FCC ID: 2AUVU-P28DUGA1

APPLICANT: Pivotal Commware

Application Type: Certification

Model: PIV28DUGA1

EUT Type: 5G mmWave Repeater (Donor Unit)


FCC Classification: Part 30 Transportable Transmitter (5GT)

FCC Rule Part(s): 2, 30

Test Procedure(s): ANSI C63.26-2015, KDB 842590 D01 v01, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President





FCC ID: 2AUVU-P28DUGA1	 PCTEST Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)	Page 1 of 42	

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure.....	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS.....	11
7.1	Summary.....	11
7.2	Occupied Bandwidth	12
7.3	Conducted Power.....	17
7.4	Equivalent Isotropic Radiated Power.....	19
7.5	Radiated Spurious and Harmonic Emissions	21
7.6	Band Edge Emissions	31
7.7	Frequency Stability / Temperature Variation	37
8.0	CONCLUSION.....	40
9.0	APPENDIX A	41
9.1	VDI Mixer Verification Certificate.....	41

FCC ID: 2AUUVU-P28DUGA1	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 2 of 42

MEASUREMENT REPORT

FCC Part 30

Band	Ant. Pol.	Bandwidth (MHz)	CCs Active	FCC Rule Part	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
						Max. Power (W)	Max. Power (dBm)		
n261	H	50	1	30	27500 - 28350	5.675	37.54	45M9G7D	QPSK
n261	H	50	1	30	27500 - 28350	4.989	36.98	46M0W7D	16QAM
n261	V	50	1	30	27500 - 28350	5.212	37.17	45M9G7D	QPSK
n261	H	100	4	30	27500 - 28350	3.811	35.81	393MG7D	QPSK
n261	V	100	4	30	27500 - 28350	4.009	36.03	392MG7D	QPSK
n261	V	100	4	30	27500 - 28350	3.443	35.37	392MW7D	16QAM

EUT Overview

FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 3 of 42

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO/IEC 17025:2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 4 of 42

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Pivotal Commware 5G mmWave Repeater (Donor Unit)** **FCC ID: 2AUVU-P28DUGA1**. The test data contained in this report pertains only to the emissions due to the EUT's 5G mmWave function.

The EUT has a Holographic Beam Forming (HBF) antenna. The antenna configuration is comprised of two separate antenna feeds - one for horizontally polarized transmission and one for vertically polarized transmission.

The EUT supports any combination of bandwidths, number of carriers, and modulations as input signals. It will transmit all signals within the 5G n261 band that are received.

Test Device Serial No.: 00008, 00100

2.2 Device Capabilities

This device contains the following capabilities:

5G FR2 (mmWave), WIFI, LTE

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated tests.

All testing was performed using a signal generator connected to the input port of the EUT via waveguide adapters. The signal generator was set to transmit a simulated a 5G mmWave NR signal in various sized bandwidth and modulations.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2AUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 5 of 42

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015) was used in the measurement of the EUT. KDB 842590 D01 v01 was referenced for testing the EUT as well.

3.2 Radiated Power and Radiated Spurious Emissions

§30.202, §30.203

The radiated test facilities consisted of an indoor 3 meter anechoic chamber used for final measurements and exploratory measurements, when necessary for radiated emissions measurements in the spurious domain. The test site conforms to the site validation requirements of CISPR 16-1-4. The measurement area is contained within the anechoic chamber which is shielded from any ambient interference. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane.

A positioner was used to manipulate the EUT through several positions in space by rotating about the roll axis as shown in the figure below. The positioner was mounted on top of a turntable bringing the total EUT height to 1.5m.

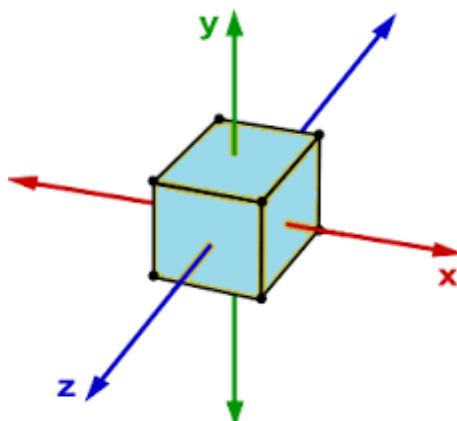


Figure 3-1. Rotation of the EUT Through Three Orthogonal Planes

FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 6 of 42

The equipment under test was transmitting while connected to its patch or HBF antenna and is placed on a positioner. The measurement antenna is in the far field of the EUT per formula $2D^2/\lambda$ where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. For radiated power and radiated spurious emission measurements, "D" is the largest dimension of the measurement antenna per KDB 842590 D01. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst case polarization/positioning. It was determined that H=0 degree and V=90 degree are the worst case positions when the EUT was transmitting horizontally and vertically polarized beams, respectively.

The maximized power level is recorded using the spectrum analyzer's "Channel Power" function with the integration bandwidth set to the emissions' occupied bandwidth. The EIRP is calculated from the raw power level measured with the spectrum analyzer using the formulas shown below.

Effective Isotropic Radiated Power Sample Calculation

The measured e.i.r.p is converted to E-field in V/m. Then, the distance correction is applied before converting back to calculated e.i.r.p, as explained in KDB 971168 D01.

$$\begin{aligned}
 \text{Field Strength [dB}\mu\text{V/m]} &= \text{Measured Value [dBm]} + \text{AFCL [dB/m]} + 107 \\
 &= -34.06 \text{ dBm} + (40.6 \text{ dB/m} + 8.49 \text{ dB}) + 107 = 122.03 \text{ dBuV/m} \\
 &= 10^{(122.03/20)/1000000} = 1.26 \text{ V/m} \\
 \\
 \text{e.i.r.p. [dBm]} &= 10 * \log((\text{E-Field} * D_m)^{2/30}) + 30 \text{ dB} \\
 &= 10 * \log((1.26 \text{ V/m} * 1.00 \text{ m})^{2/30}) + 30 \text{ dB} \\
 &= \mathbf{17.24 \text{ dBm e.i.r.p.}}
 \end{aligned}$$

FCC ID: 2AUUVU-P28DUGA1	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL[®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)			Page 7 of 42

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 8 of 42

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to an accredited ISO/IEC 17025 calibration facility. Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
Agilent	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Virginia Diodes Inc	SAX253	SAX Module (90 - 140GHz)	9/30/2019	Annual	10/30/2020	SAX253
Virginia Diodes Inc	SAX252	SAX Module (60 - 90GHz)	9/30/2019	Annual	10/30/2020	SAX252
Virginia Diodes Inc	SAX411	SAX Module (40 - 60GHz)	10/2/2019	Annual	11/2/2020	SAX411
ETS-Lindgren	3116C	DRG Horn Antenna	3/11/2019	Biennial	3/11/2021	218893
OML Inc.	M19RH	WR-19 Horn Antenna, 24dBi, 40 to 60 GHz	7/30/2018	Biennial	10/30/2020	18073001
OML Inc.	M12RH	WR-12 Horn Antenna, 24dBi, 60 to 90 GHz	7/30/2018	Biennial	10/30/2020	18073001
OML Inc.	M08RH	WR-08 Horn Antenna, 24dBi, 90 to 140 GHz	7/30/2018	Biennial	10/30/2020	18073001
Rohde & Schwarz	SMW200A	Vector Signal Generator		N/A		105744

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 9 of 42

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 800MG7D

BW = 800 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 802MW7D

BW = 802 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 10 of 42

7.0 TEST RESULTS

7.1 Summary

Company Name: Pivotal Commware
 FCC ID: 2AUVU-P28DUGA1
 FCC Classification: Part 30 Transportable Transmitter (5GT)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1046	Conducted Power	N/A		PASS	Section 7.3
2.1051, 30.203	Out-of-Band Emissions at the Band Edge	-13dBm/MHz for all out-of-band emissions, -5dBm/MHz from the band edge up to 10% of the channel BW		PASS	Section 7.6
30.202(c)	Equivalent Isotropic Radiated Power	55dBm	RADIATED	PASS	Section 7.4
2.1051, 30.203	Spurious Emissions	-13dBm/MHz for all out-of-band emissions		PASS	Section 7.5
2.1055	Frequency Stability	Fundamental emissions stay within authorized frequency block		PASS	Section 7.7

Table 7-1. Summary of Radiated Test Results

Notes:

- 1) Per 2.1057(a)(2), spurious emissions were investigated up to 100GHz.
- 2) Testing was completed with a signal generator creating a representative mmWave 5G NR signal, using DFT-s-OFDM scheme, various modulations including QPSK, and QAM, 120kHz subcarrier spacing, with one and four carrier configurations using 50MHz and 100MHz bandwidths, full and single resource block allocations.
- 3) The input signal to the EUT was set in order to produce the max power of the AGC range.
- 4) Based upon investigations of all possible modulations, testing was mainly performed with QPSK modulation.
- 5) The EUT was fitted with a waveguide-to-coax adapter to facilitate conducted measurements. Conducted testing was performed for Occupied Bandwidth, Conducted Power and Band Edge test cases as shown in the table above.
- 6) Triggering from the signal generator was used in order to more accurately gate on the TDD signal with the analyzer.

FCC ID: 2AUVU-P28DUGA1	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 11 of 42

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 Section 5.4.3

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7


Occupied Bandwidth

Channel	Bandwidth	CCs Active	Beam Pol	Modulation	OBW [MHz]
Mid	50	1	H	QPSK	45.94
			H	16QAM	45.96
			V	QPSK	45.93
			V	16QAM	45.91
	100	4	H	QPSK	392.61
			H	16QAM	392.24
			V	QPSK	391.92
			V	16QAM	391.79

Table 7-2. Summary of Occupied Bandwidths


FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 12 of 42

ACLRResults

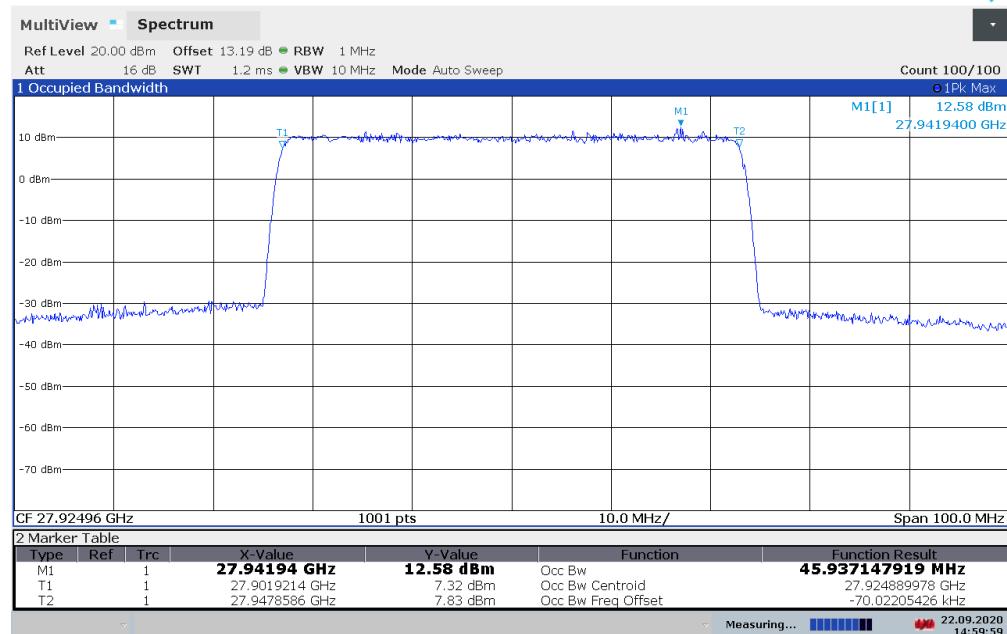

15:00:00 22.09.2020

Plot 7-1. Occupied Bandwidth Plot - HBF Antenna (50MHz - QPSK - Mid Channel) – H

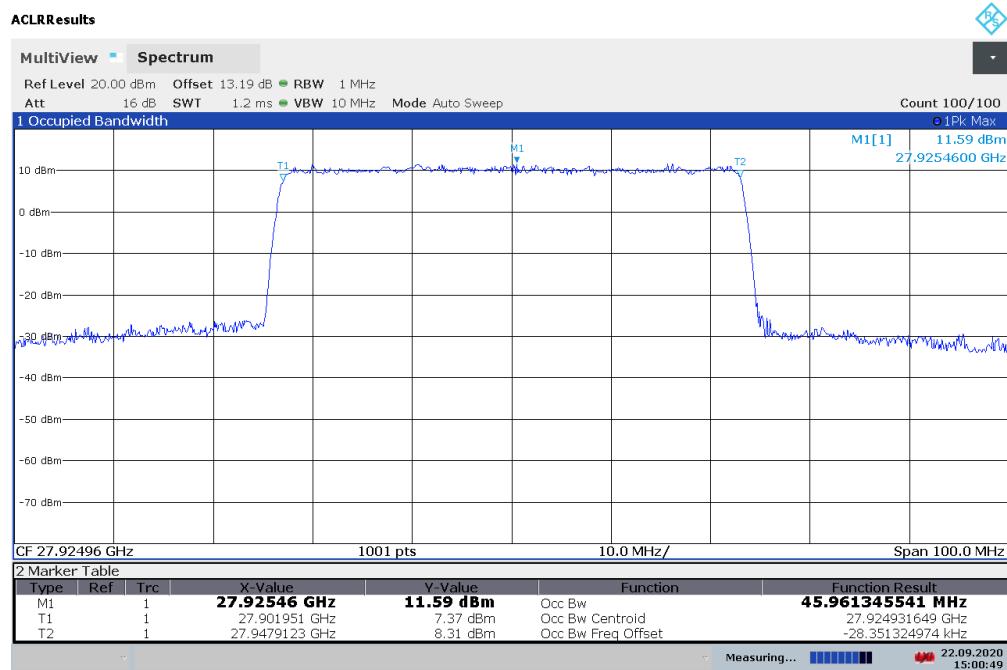


15:00:50 22.09.2020

Plot 7-2. Occupied Bandwidth Plot - HBF Antenna (50MHz - 16QAM - Mid Channel) – H


FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 13 of 42

ACLRResults

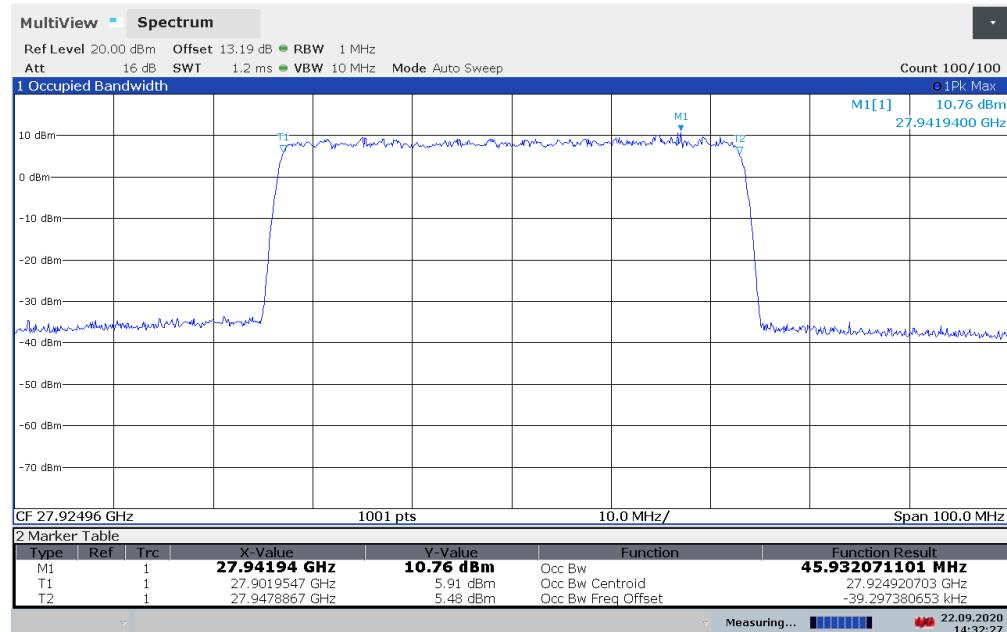

14:32:27 22.09.2020

Plot 7-3. Occupied Bandwidth Plot - HBF Antenna (50MHz - QPSK - Mid Channel) – V

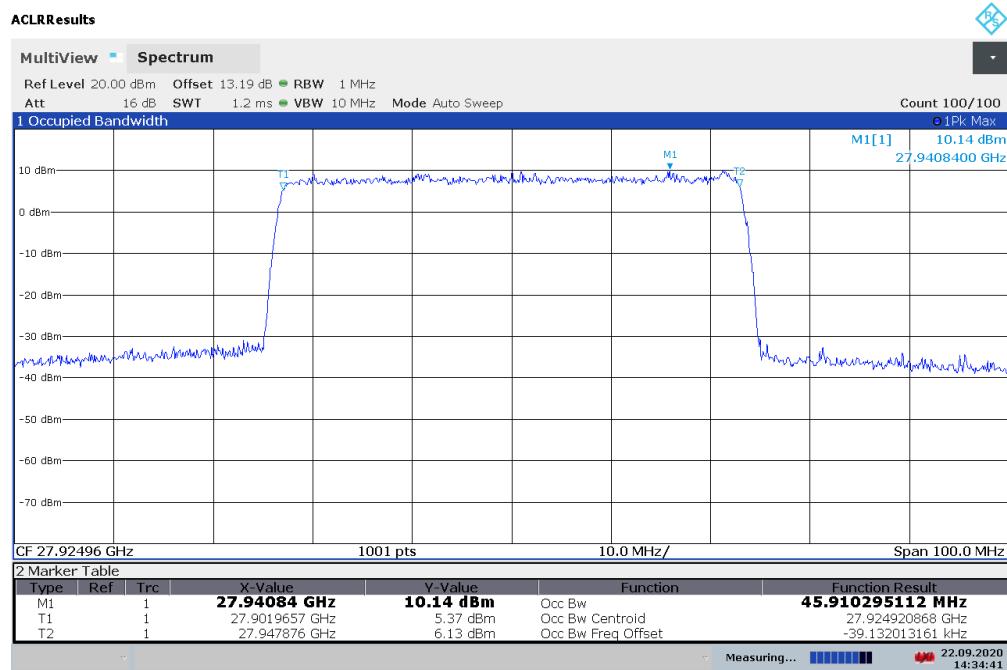


14:34:42 22.09.2020

Plot 7-4. Occupied Bandwidth Plot - HBF Antenna (50MHz - 16QAM - Mid Channel) – V


FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 14 of 42

ACLRResults

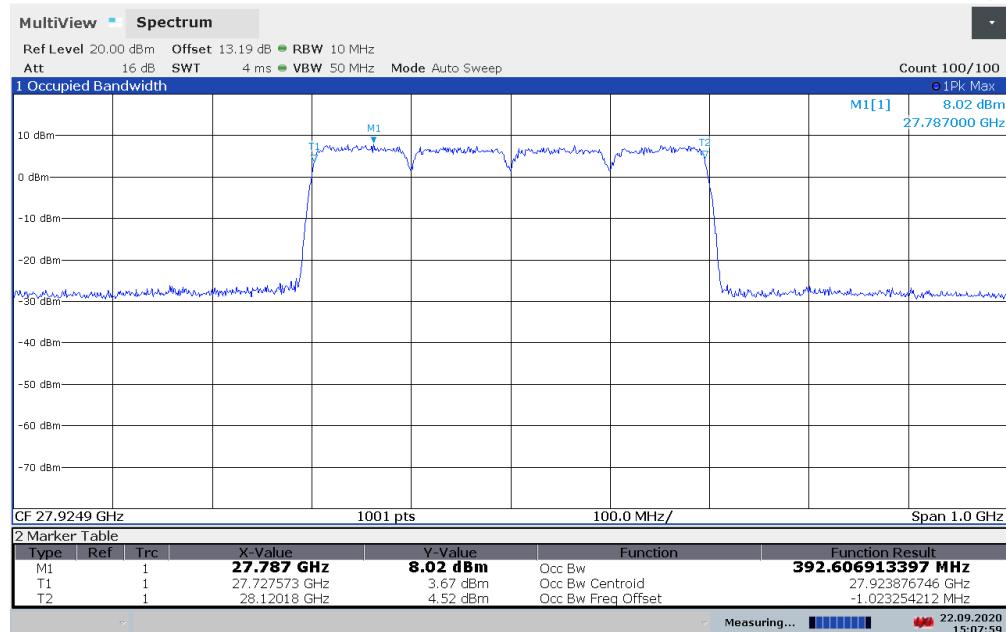

15:08:00 22.09.2020

Plot 7-5. Occupied Bandwidth - HBF Antenna Plot (100MHz 4CC- QPSK - Mid Channel) – H

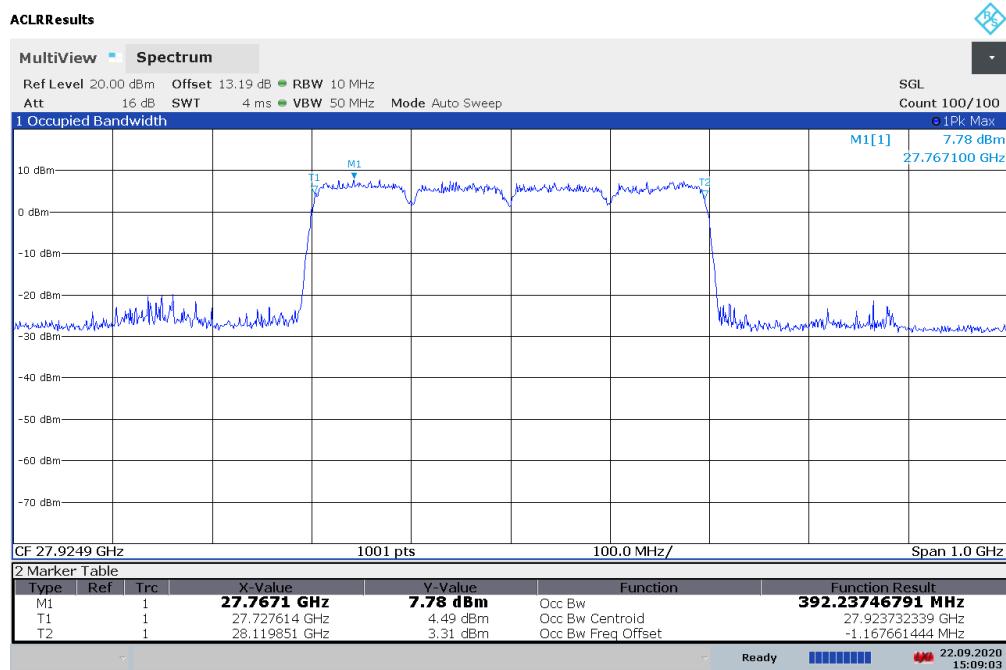

15:09:03 22.09.2020


Plot 7-6. Occupied Bandwidth Plot - HBF Antenna (400MHz 4CC- 16QAM - Mid Channel) – H

FCC ID: 2AUUVU-P28DUGA1	 PCTEST[®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)	Page 15 of 42

© 2020 PCTEST


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0

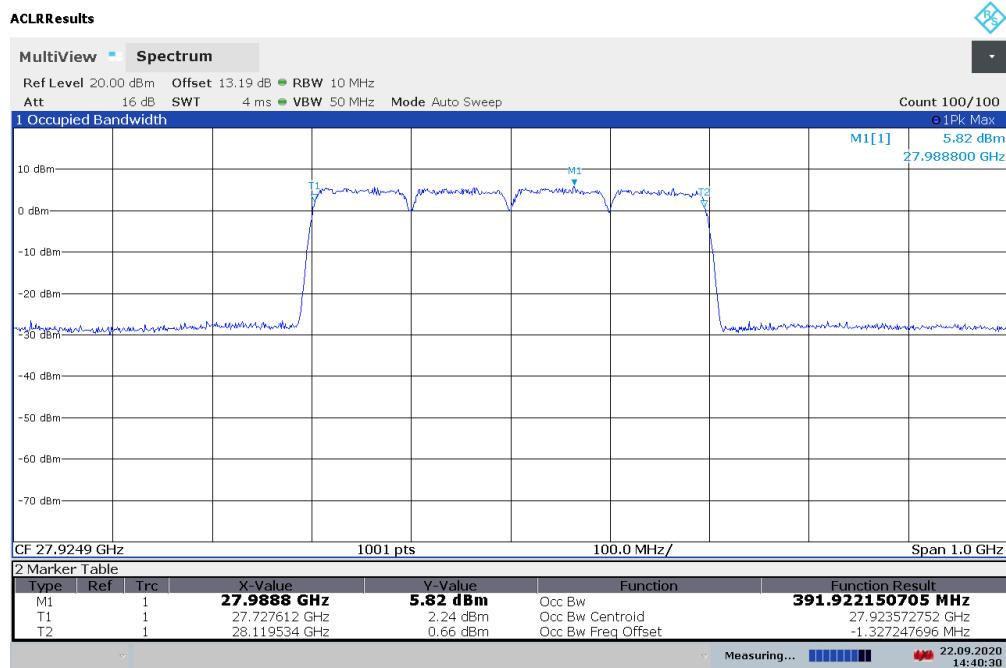

14:40:31 22.09.2020

Plot 7-7. Occupied Bandwidth - HBF Antenna Plot (100MHz 4CC- QPSK - Mid Channel) – V

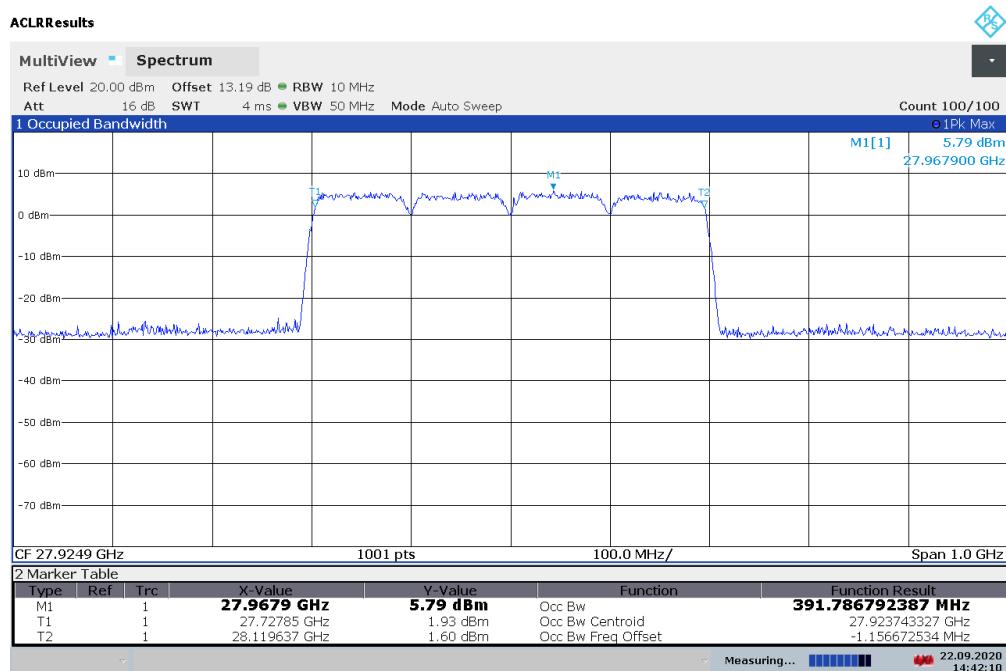

14:42:10 22.09.2020

Plot 7-8. Occupied Bandwidth Plot - HBF Antenna (400MHz 4CC- 16QAM - Mid Channel) – V

FCC ID: 2AUUV-P28DUGA1	 PCTEST[®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)	Page 16 of 42

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0

7.3 Conducted Power

§2.1046

Test Overview

A transmitter port of the EUT is connected to the input of a signal analyzer. A signal generator supplies a 5G NR signal directly into the input port of the device. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 Section 5.2.4.4.1

Test Settings

1. Conducted power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 2x to 3x the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
8. Trace mode = trace averaging (RMS) over 100 sweeps
9. The trace was allowed to stabilize

Test Notes

- 1) The MIMO Conducted Power were calculated by using the "measure and sum the spectral maxima across the outputs" technique specified in Section 6.4.3.2.3 of ANSI C63.26-2015. The spectral were summed linearly and converted to dBm for comparison with the limit.
- 2) The MIMO Conducted Power shown below are mathematically summed conducted powers between measurements on H Beam and V Beam.

Sample MIMO Calculation:

Antenna 1 + Antenna 2 = MIMO

$$(21.32\text{dBm} + 21.39\text{dBm}) = (135.52\text{mW} + 137.72\text{mW}) = 273.24\text{mW} = 24.37\text{dBm}$$

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 17 of 42

Center Frequency (MHz)	Ant.Pol.	Access Scheme	Modulation	Bandwidth (MHz)	# of Carriers (CCs)	No. RBs	Conducted Power (dBm)
27525.00	V	DFT-s-OFDM	QPSK	50	1	Full	20.60
27924.96	V	DFT-s-OFDM	QPSK	50	1	Full	21.32
28324.92	V	DFT-s-OFDM	QPSK	50	1	Full	21.02
27550.08	V	DFT-s-OFDM	QPSK	100	1	Full	20.73
27924.96	V	DFT-s-OFDM	QPSK	100	1	Full	21.33
28299.96	V	DFT-s-OFDM	QPSK	100	1	Full	20.71
27700.02	V	DFT-s-OFDM	QPSK	100	4	Full	19.09
27924.96	V	DFT-s-OFDM	QPSK	100	4	Full	19.18
28150.02	V	DFT-s-OFDM	QPSK	100	4	Full	19.01
27525.00	H	DFT-s-OFDM	QPSK	50	1	Full	21.30
27924.96	H	DFT-s-OFDM	QPSK	50	1	Full	21.39
28324.92	H	DFT-s-OFDM	QPSK	50	1	Full	21.50
27550.08	H	DFT-s-OFDM	QPSK	100	1	Full	21.48
27924.96	H	DFT-s-OFDM	QPSK	100	1	Full	21.41
28299.96	H	DFT-s-OFDM	QPSK	100	1	Full	21.49
27700.02	H	DFT-s-OFDM	QPSK	100	4	Full	20.02
27924.96	H	DFT-s-OFDM	QPSK	100	4	Full	19.90
28150.02	H	DFT-s-OFDM	QPSK	100	4	Full	20.15

Table 7-3. Conducted Power - SISO

Center Frequency (MHz)	Ant.Pol.	Access Scheme	Modulation	Bandwidth (MHz)	# of Carriers (CCs)	No. RBs	MIMO Conducted Power (dBm)
27525.00	MIMO	DFT-s-OFDM	QPSK	50	1	Full	23.97
27924.96	MIMO	DFT-s-OFDM	QPSK	50	1	Full	24.37
28324.92	MIMO	DFT-s-OFDM	QPSK	50	1	Full	24.28
27550.08	MIMO	DFT-s-OFDM	QPSK	100	1	Full	24.13
27924.96	MIMO	DFT-s-OFDM	QPSK	100	1	Full	24.38
28299.96	MIMO	DFT-s-OFDM	QPSK	100	1	Full	24.13
27700.02	MIMO	DFT-s-OFDM	QPSK	100	4	Full	22.59
27924.96	MIMO	DFT-s-OFDM	QPSK	100	4	Full	22.57
28150.02	MIMO	DFT-s-OFDM	QPSK	100	4	Full	22.63

Table 7-4. Conducted Power - MIMO

FCC ID: 2AUUVU-P28DUGA1	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 18 of 42

7.4 Equivalent Isotropic Radiated Power

§30.202(c)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at the appropriate frequencies with the max power condition as specified by the AGC software of the EUT.

The average power of the sum of all antenna elements is limited to a maximum EIRP of +55 dBm.

Test Procedures Used

ANSI C63.26-2015 Section 5.2.4.4.1

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 2x to 3x the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
8. Trace mode = trace averaging (RMS) over 100 sweeps
9. The trace was allowed to stabilize

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The input signal to the EUT was set in order to produce the max power allowed by the AGC software of the EUT.
- 3) EIRP measurements were taken in the far field.
- 4) A signal generator fed a 5G NR mmWave signal into the EUT.
- 5) The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: EIRP (dBm) = E (dB μ V/m) + 20log(D) – 104.8; where D is the measurement distance (in the far field region) in m. The field strength E is calculated E (dB μ V/m) = Spectrum Analyzer Channel Power Level (dBm) + Antenna Factor (dB/m) + Cable Loss (dB) + 107.

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 19 of 42

CCs active	Bandwidth [MHz]	Frequency [MHz]	Channel	Beam Pol	Modulation	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Azimuth Roll [degrees]	RB Size/Offset	EIRP [dBm]	Limit [dBm]	Margin [dB]
1	50	27525.00	Low	H	QPSK	H	1	2	Full RB	37.54	55.00	-17.46
		27525.00	Low	V	QPSK	V	1	2	Full RB	37.17	55.00	-17.83
		27924.96	Mid	H	QPSK	H	0	2	Full RB	37.23	55.00	-17.77
		27924.96	Mid	H	QPSK	H	0	2	1 / 16	34.11	55.00	-20.89
		27924.96	Mid	V	QPSK	V	1	0	Full RB	36.71	55.00	-18.29
		27924.96	Mid	V	QPSK	V	1	0	1 / 16	33.52	55.00	-21.48
		28324.92	High	H	QPSK	H	0	1	Full RB	36.82	55.00	-18.18
		28324.92	High	V	QPSK	V	1	1	Full RB	36.61	55.00	-18.39
		27525.00	Low	H	16QAM	H	1	2	Full RB	36.98	55.00	-18.02

Table 7-5. HBF EIRP - 50MHz Bandwidth 1CC Full RB

CCs active	Bandwidth [MHz]	Frequency [MHz]	Channel	Beam Pol	Modulation	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Azimuth Roll [degrees]	RB Size/Offset	EIRP [dBm]	Limit [dBm]	Margin [dB]
4	100	27700.02	Low	H	QPSK	H	0	2	Full RB	35.81	55.00	-19.19
		27700.02	Low	V	QPSK	V	1	359	Full RB	36.03	55.00	-18.97
		27924.96	Mid	H	QPSK	H	0	2	Full RB	35.77	55.00	-19.23
		27924.96	Mid	V	QPSK	V	1	359	Full RB	35.25	55.00	-19.75
		28150.02	High	H	QPSK	H	0	2	Full RB	35.10	55.00	-19.90
		28150.02	High	V	QPSK	V	1	1	Full RB	35.02	55.00	-19.98
		27700.02	Low	V	16QAM	V	1	359	Full RB	35.37	55.00	-19.63

Table 7-6. HBF EIRP - 100MHz Bandwidth 4CC Full RB

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 20 of 42

7.5 Radiated Spurious and Harmonic Emissions

§2.1051, §30.203

Test Overview

The spectrum is scanned from 30MHz to 100GHz. All out of band emissions are measured in a radiated test setup while the EUT is operating at the appropriate frequencies with the max power condition as specified by the AGC software of the EUT. All modulations were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conductive power or total radiated power of any emissions outside a licensee's frequency block shall be -13dBm/1MHz.

Test Procedure Used

ANSI C63.26-2015 Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 100 GHz. Several plots are used to show investigations in this entire span.
2. Detector = RMS
3. Trace mode = trace average (Max Hold for pulsed emissions)
4. Sweep time = auto couple
5. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
6. The trace was allowed to stabilize
7. RBW = 1MHz, VBW = 3MHz

Test Notes


- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below. The worst case found was QPSK, 1RB and was tested as such.
- 2) All radiated spurious emissions were measured as EIRP to compare with the §30.203 TRP limits.
- 3) The plots from 1-100GHz show corrected average EIRP levels. Plots below 1GHz are corrected field strength levels. The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: $\text{EIRP (dBm)} = \text{E (dB}\mu\text{V/m)} + 20\log(\text{D}) - 104.8$; where D is the measurement distance (in the far field region) in m. The field strength E is calculated $\text{E (dB}\mu\text{V/m)} = \text{Spectrum Analyzer Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + \text{Harmonic Mixer Conversion Loss (dB)} + 107$. All appropriate Antenna Factor and Cable Loss have been applied in the spectrum analyzer for each measurement. For measurements > 40GHz, Harmonic Mixer Conversion Loss was also applied to the spectrum analyzer.

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 21 of 42

- 4) Emissions below 18GHz were measured at a 3 meter test distance, while emissions above 18GHz were measured at the appropriate far field distance. The far field of the mmWave signal is based on formula: $R > 2D^2/\text{wavelength}$, where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT.
- 5) All emissions from 30MHz - 40GHz were measured using a spectrum analyzer with an internal preamplifier. Emissions >40GHz were measured using a harmonic mixer with the spectrum analyzer.
- 6) To cover the simultaneous transmissions, both the LTE module (FCC ID: 2AUVU-UBR410M) and WLAN module (FCC ID: Z64-WL18SBMOD) are set to transmit at the same time as the mmWave functionality of the host. EUT is transmitting WLAN at 2437MHz in 802.11b mode simultaneously with the LTE B13/ B4 signal.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: 2AUVU-P28DUGA1	 Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)			Page 22 of 42

30MHz – 1GHz

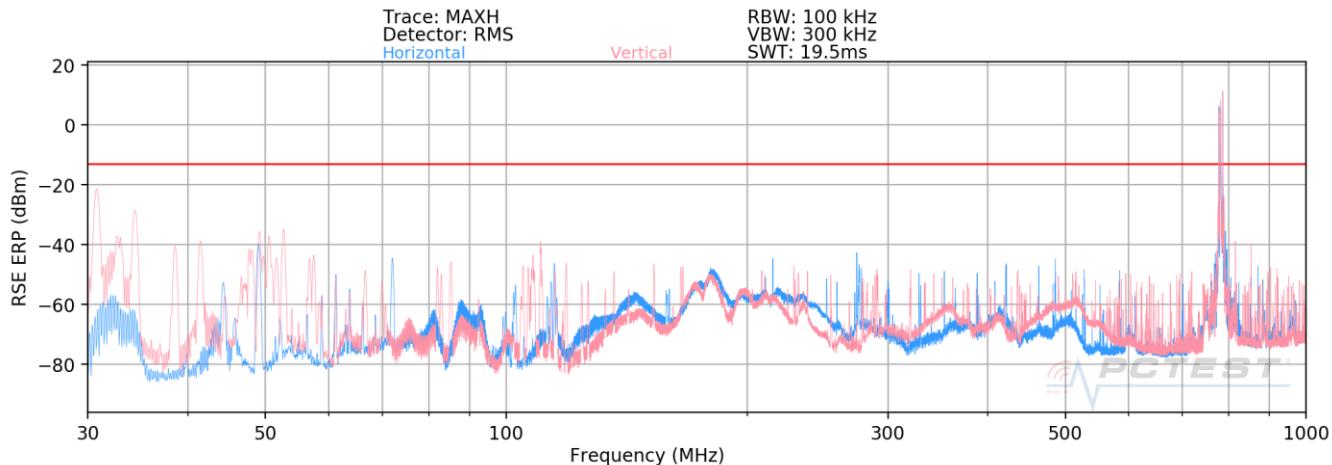

Plot 7-9. HBF Antenna Radiated Spurious Plot 30 MHz - 1 GHz (1CC QPSK Mid Channel H Beam)

Spurious Emissions ERP Sample Calculation

The raw radiated spurious level is converted to field strength in dB μ V/m. Then, the RSE ERP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE ERP [dBm]} = \text{Analyzer Level [dBm]} + 107 + \text{AFCL [dB/m]} + 20\text{Log}(\text{Dm}) - 104.8 - 2.15\text{dB}$$

Frequency [MHz]	Channnel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
32.04	Mid	50	V	QPSK	V	114	328	-35.85	-13.00	-22.85
49.03	Mid	50	V	QPSK	V	272	48	-42.09	-13.00	-29.09
108.40	Mid	50	V	QPSK	V	102	135	-49.48	-13.00	-36.48


Table 7-7. Spurious Emissions Table (30MHz-1GHz)

Notes

1. The RSE ERP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses. Measurements were performed at a distance of 3 meter.
2. To cover the simultaneous transmissions, both the LTE module (FCC ID: 2AUVU-UBR410M) and WLAN module (FCC ID: Z64-WL18SBMOD) are set to transmit at the same time as the mmWave functionality of the host. EUT is transmitting WLAN at 2437MHz in 802.11b mode simultaneously with the LTE B13 signal.

FCC ID: 2AUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 23 of 42

1 – 18GHz

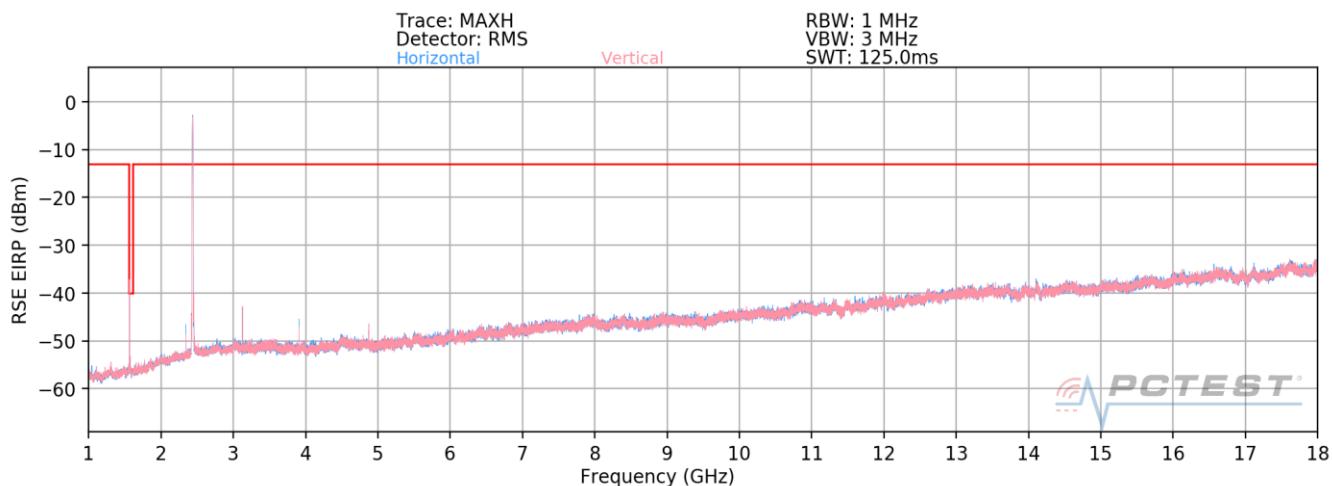

Plot 7-10. Radiated Spurious Plot 1-18 GHz (1CC QPSK Mid Channel H Beam) – B13

Spurious Emissions EIRP Sample Calculation

The raw radiated spurious level is converted to field strength in dB μ V/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP [dBm]} = \text{Analyzer Level [dBm]} + 107 + \text{AFCL [dB/m]} + 20\text{Log}(D_m) - 104.8$$

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1564.00	V	121	318	-47.58	4.53	-43.05	-3.1
2346.00	V	142	79	-55.99	4.88	-51.11	-38.1
3128.00	V	169	347	-53.36	6.14	-47.22	-34.2
3910.00	V	116	64	-59.52	7.23	-52.30	-39.3
4692.00	V	-	-	-68.53	8.30	-60.23	-47.2

Table 7-8. Spurious Emissions Table (1GHz-18GHz)

Notes


1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses. Measurements were performed at a distance of 3 meter.
2. To cover the simultaneous transmissions, both the LTE module (FCC ID: 2AUUVU-UBR410M) and WLAN module (FCC ID: Z64-WL18SBMOD) are set to transmit at the same time as the mmWave functionality of the host. EUT is transmitting WLAN at 2437MHz in 802.11b mode simultaneously with the LTE B13 signal.
3. For 1564MHz measurement, the test procedure used was from ANSI C63.26-2015 Section 5.2.4.4.2. This method utilized an average trace mode and a calculated duty cycle correction factor which is calculated as DCCF = 10log(1/Duty Cycle). The duty cycle correction of 5.23dB is included in the -43.05dBm reading at the antenna terminal.

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 24 of 42

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0

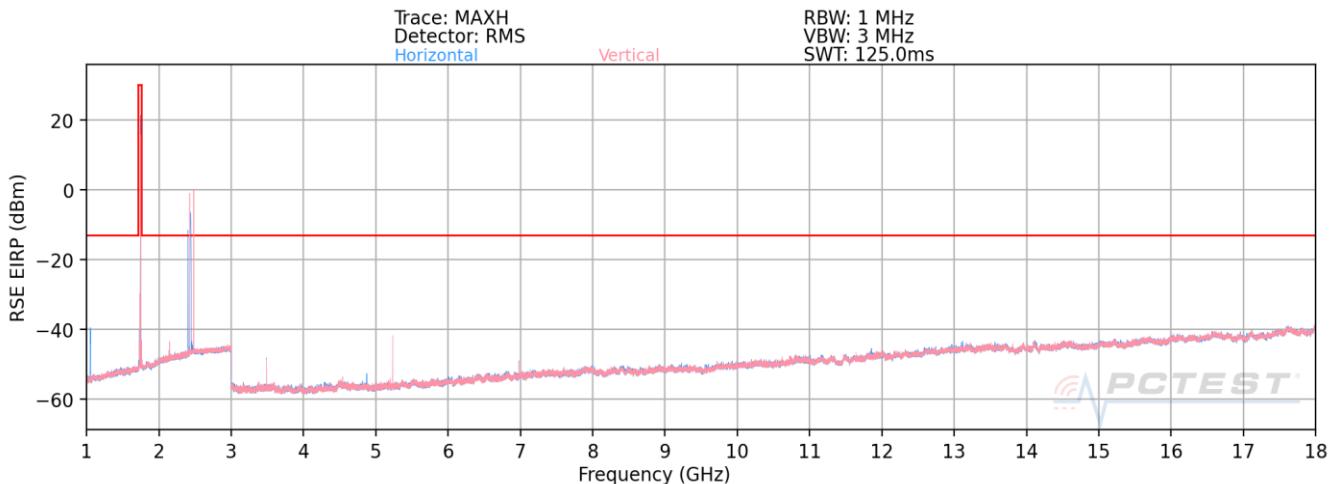

Plot 7-11. Radiated Spurious Plot 1-18 GHz (1CC QPSK Mid Channel H Beam) – B4

Spurious Emissions EIRP Sample Calculation

The raw radiated spurious level is converted to field strength in dB μ V/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP [dBm]} = \text{Analyzer Level [dBm]} + 107 + \text{AFCL [dB/m]} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1028.00	H	397	53	-41.52	2.52	-39.00	-26.0
3465.00	H	121	312	-48.62	6.59	-42.04	-29.0
5197.50	H	131	249	-51.68	8.61	-43.07	-30.1
6930.00	H	144	63	-53.42	8.96	-44.47	-31.5
8662.50	H	-	-	-65.15	9.84	-55.31	-42.3


Table 7-9. Spurious Emissions Table (1GHz-18GHz)

Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses. Measurements were performed at a distance of 3 meter.
2. To cover the simultaneous transmissions, both the LTE module (FCC ID: 2AUVU-UBR410M) and WLAN module (FCC ID: Z64-WL18SBMOD) are set to transmit at the same time as the mmWave functionality of the host. EUT is transmitting WLAN at 2437MHz in 802.11b mode simultaneously with the LTE B4 signal.

FCC ID: 2AUVU-P28DUGA1	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 25 of 42

18 – 27.5GHz

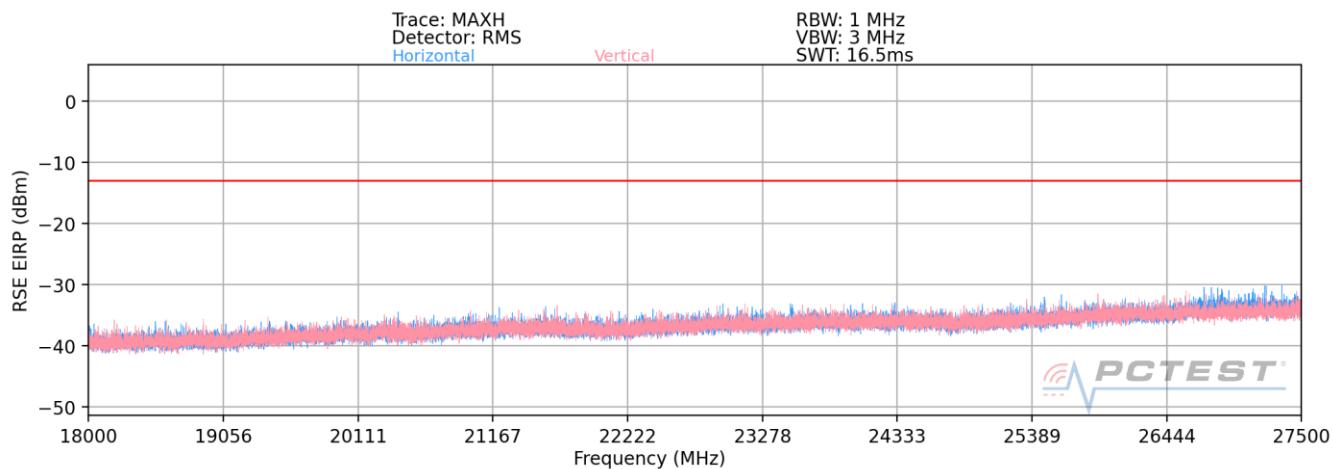

Spurious Emissions EIRP Sample Calculation

The raw radiated spurious level is converted to field strength in dB μ V/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP [dBm]} = \text{Analyzer Level [dBm]} + 107 + \text{AFCL [dB/m]} + 20\text{Log}(D_m) - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
27494.80	Low	50	H	QPSK	H	12	8	-30.43	-13.00	-17.43
27420.00	Mid	50	H	QPSK	H	10	5	-31.74	-13.00	-18.74
27489.80	High	50	H	QPSK	H	10	358	-31.59	-13.00	-18.59


Table 7-10. Spurious Emissions Table (18-27.5GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses. Measurements were performed at a distance of 1 meter.

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 26 of 42

28.35 – 40GHz

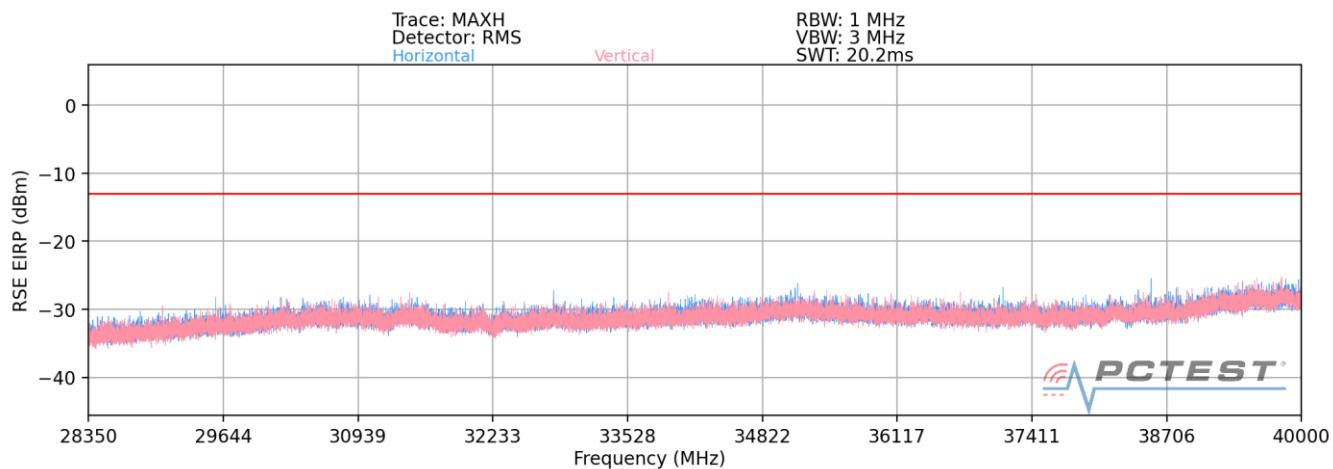

Plot 7-13. Radiated Spurious Plot 28.35-40 GHz (1CC QPSK Mid Channel H Beam)

Spurious Emissions EIRP Sample Calculation

The raw radiated spurious level is converted to field strength in dB μ V/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP [dBm]} = \text{Analyzer Level [dBm]} + 107 + \text{AFCL [dB/m]} + 20\text{Log}(D_m) - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28408.20	Low	50	H	QPSK	H	-	-	-35.86	-13.00	-22.86
28350.60	Mid	50	H	QPSK	H	10	8	-30.46	-13.00	-17.46
28479.30	High	50	H	QPSK	H	-	-	-35.08	-13.00	-22.08


Table 7-11. Spurious Emissions Table (28.35-40 GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses. Measurements were performed at a distance of 1 meter.

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)			Page 27 of 42

40 – 60GHz

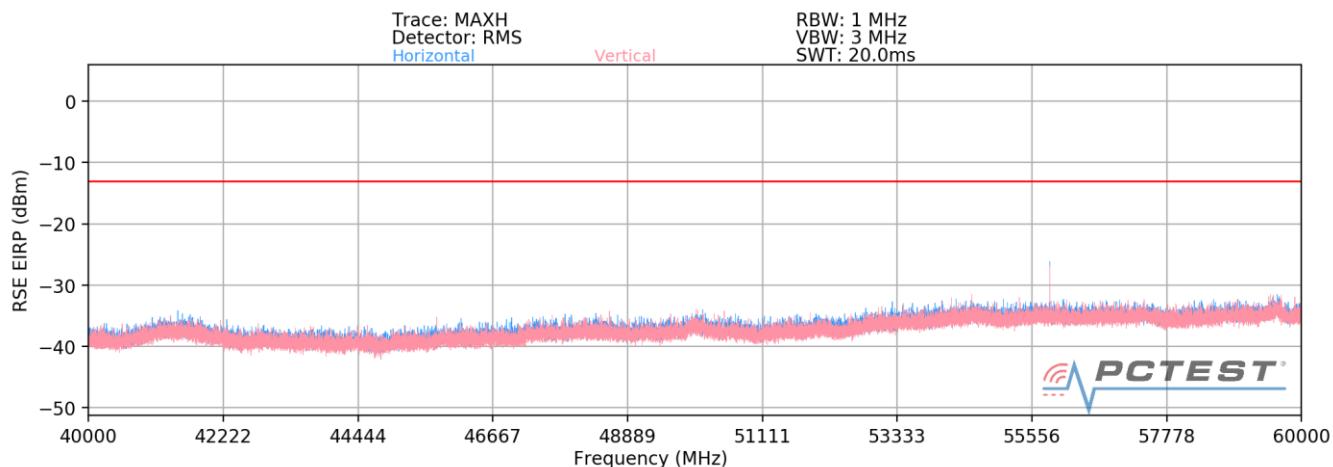

Plot 7-14. Radiated Spurious Plot 40-60 GHz (1CC QPSK Mid Channel H Beam)

Spurious Emissions EIRP Sample Calculation

The raw radiated spurious level is converted to field strength in dB μ V/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP [dBm] = Analyzer Level [dBm] + 107 + AFCL [dB/m] + 20Log(Dm) + Harmonic Mixer Loss (dB) – 104.8

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55051.56	Low	50	H	QPSK	H	3	356	-25.54	-13.00	-12.54
55851.42	Mid	50	H	QPSK	H	4	3	-26.89	-13.00	-13.89
56649.34	High	50	H	QPSK	H	357	3	-27.57	-13.00	-14.57

Table 7-12. Spurious Emissions Table (40 - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.


FCC ID: 2AUUVU-P28DUGA1	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)	Page 28 of 42	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0

60 – 90GHz

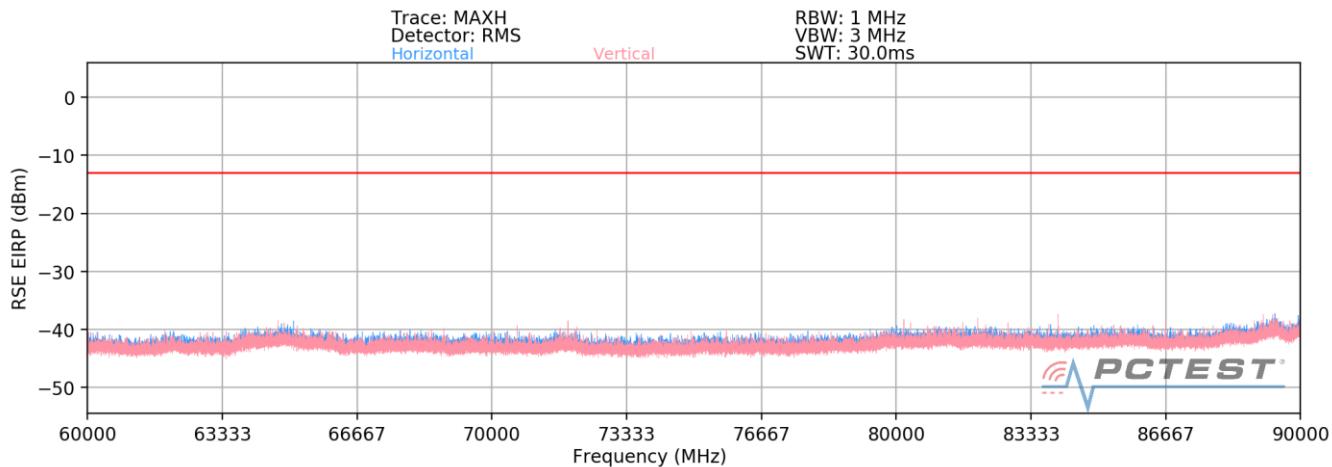

Plot 7-15. Radiated Spurious Plot 60-90 GHz (1CC QPSK Mid Channel H Beam)

Spurious Emissions EIRP Sample Calculation

The raw radiated spurious level is converted to field strength in dB μ V/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP [dBm]} = \text{Analyzer Level [dBm]} + 107 + \text{AFCL [dB/m]} + 20\text{Log}(Dm) + \text{Harmonic Mixer Loss (dB)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82571.31	Low	50	H	QPSK	H	-	-	-38.84	-13.00	-25.84
83798.84	Mid	50	H	QPSK	H	-	-	-39.32	-13.00	-26.32
84968.43	High	50	H	QPSK	H	-	-	-38.26	-13.00	-25.26


Table 7-13. Spurious Emissions Table (60-90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: 2AUUVU-P28DUGA1	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)			Page 29 of 42

90 – 100GHz

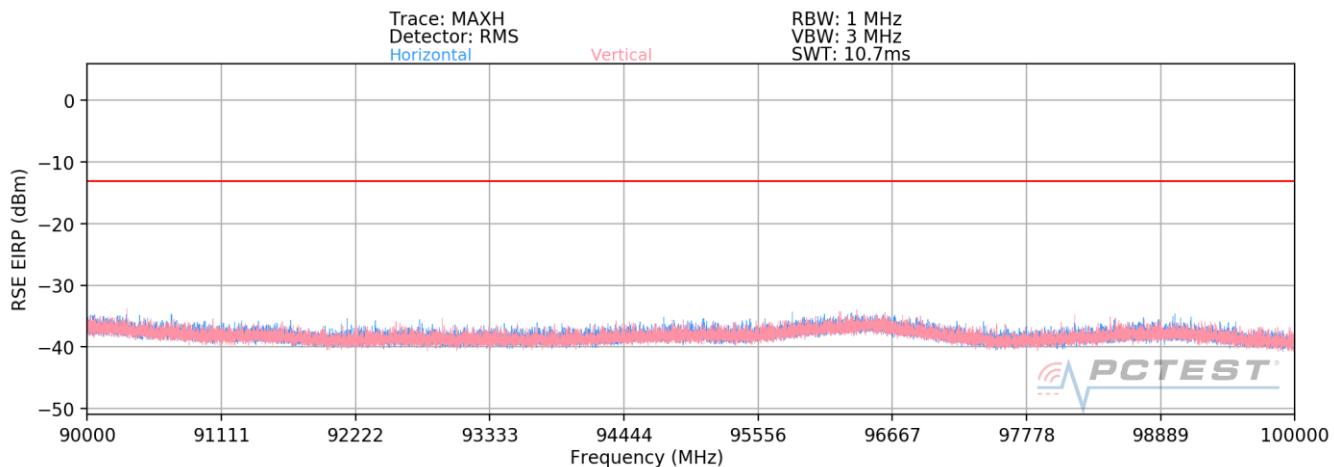

Plot 7-16. Radiated Spurious Plot 90-100 GHz (1CC QPSK Mid Channel H Beam)

Spurious Emissions EIRP Sample Calculation

The raw radiated spurious level is converted to field strength in $\text{dB}\mu\text{V/m}$. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP [dBm] = Analyzer Level [dBm] + 107 + AFCL[dB/m] + 20Log(Dm) + Harmonic Mixer Loss (dB) – 104.8

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
96502.70	Low	50	H	QPSK	H	-	-	-34.46	-13.00	-21.46
96488.40	Mid	50	H	QPSK	H	-	-	-34.43	-13.00	-21.43
96481.85	High	50	H	QPSK	H	-	-	-33.78	-13.00	-20.78

Table 7-14. Spurious Emissions Table (90-100GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: 2AUUV-P28DUGA1	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)			Page 30 of 42

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0

7.6 Band Edge Emissions

§2.1051, §30.203

Test Overview

The EUT was fed a 5G NR mmWave representative signal via waveguide adapter. All out of band emissions are measured in a conducted setup while the EUT is operating at its maximum AGC level, at maximum power, and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is -13dBm/1MHz. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

Test Procedure Used

ANSI C63.26-2015 Section 5 and ANSI C63.26-2015 Section 6.4

Test Settings

1. Start and stop frequency were set such that both upper and lower band edges are measured.
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 1MHz
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 31 of 42

Test Notes

- 1) Band Edge measurements in this section are shown as conducted powers for direct comparison to the 30.203 limit. Band Edge measurements were performed using waveguide adapters to the input and output ports of the EUT which allowed for direct RF connection to the spectrum analyzer.
- 2) The spectrum plots in this section show measurement of some emissions that may be considered as part of the spurious domain, extending beyond the band edges by more than 10% of the occupied bandwidth of the test signal. These measurements were made with a WR28 waveguide-to-RF adapter where the operating range of the WR28 waveguide is in the 26.5 – 40GHz range. Thus, all spurious emission measurements shown in the following plots remain valid.
- 3) The MIMO Band Edges were calculated by using the “measure and sum the spectra across the outputs” technique specified in Section 6.4.3.2.2 of ANSI C63.26-2015. The spectra were summed linearly and converted to dBm for comparison with the limit.
- 4) The MIMO Band Edge plots shown below are mathematically summed conducted powers between spectrum analyzer measurements on H Beam and V Beam.

Sample MIMO Calculation:


Antenna 1 + Antenna 2 = MIMO

$$(-22.78 \text{ dBm} + -25.23 \text{ dBm}) = (0.00527 \text{ mW} + 0.00300 \text{ mW}) = 0.00827 \text{ mW} = -20.83 \text{ dBm}$$

FCC ID: 2AUUVU-P28DUGA1	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL[®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)	Page 32 of 42		

PASS


Center Freq: 28 GHz Trace: AVERAGE
Span: 125 MHz Detector: RMS
 RBW: 1 MHz
 VBW: 3 MHz
 SWP Count: 100
 SWP: 1001

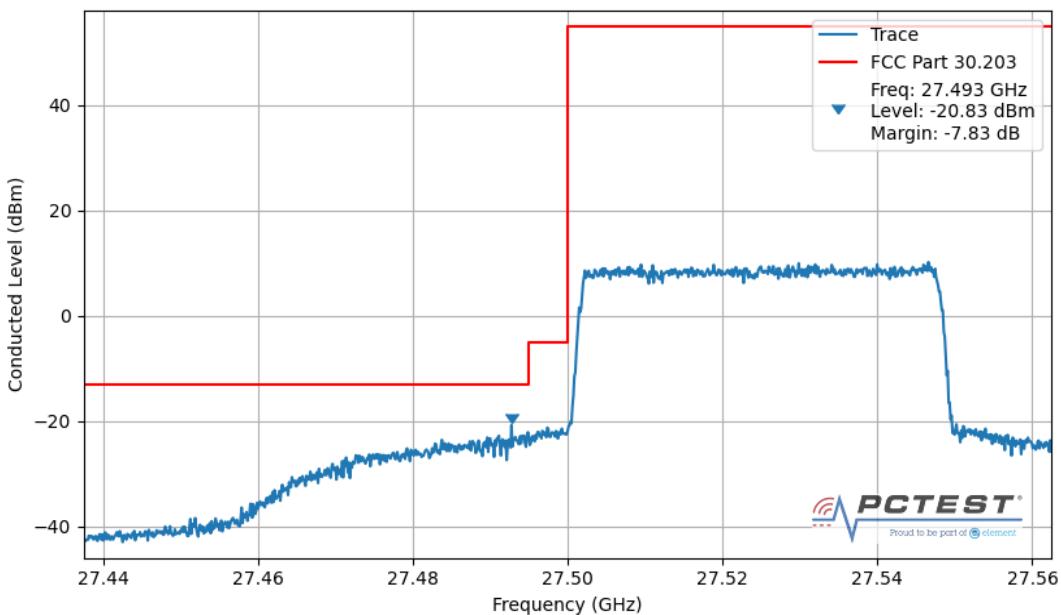

Plot 7-17. Lower Band Edge Plot (50MHz QPSK Full RB)

PASS

Center Freq: 28 GHz Trace: AVERAGE
Span: 125 MHz Detector: RMS
 RBW: 1 MHz
 VBW: 3 MHz
 SWP Count: 100
 SWP: 1001

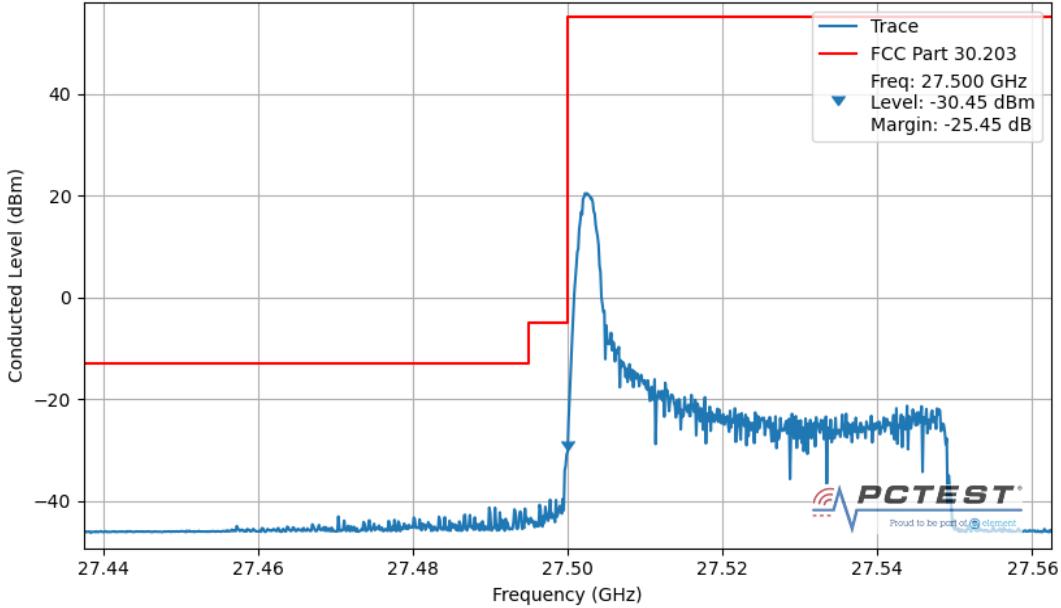


Plot 7-18. Lower Band Edge Plot (50MHz QPSK 1 RB)

FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 33 of 42

PASS

Center Freq: 28 GHz
Span: 125 MHz
Trace: AVERAGE
Detector: RMS
SWP Count: 100

RBW: 1 MHz
VBW: 3 MHz
SWP: 1001

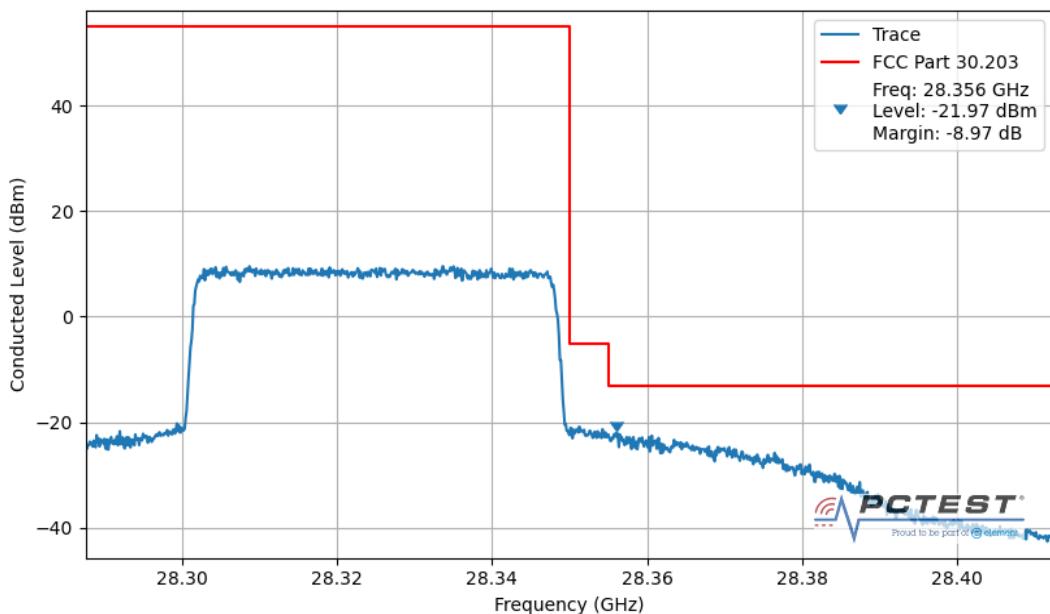


Plot 7-19. Upper Band Edge Plot (50MHz QPSK Full RB)

PASS

Center Freq: 28 GHz
Span: 125 MHz
Trace: AVERAGE
Detector: RMS
SWP Count: 100

RBW: 1 MHz
VBW: 3 MHz
SWP: 1001

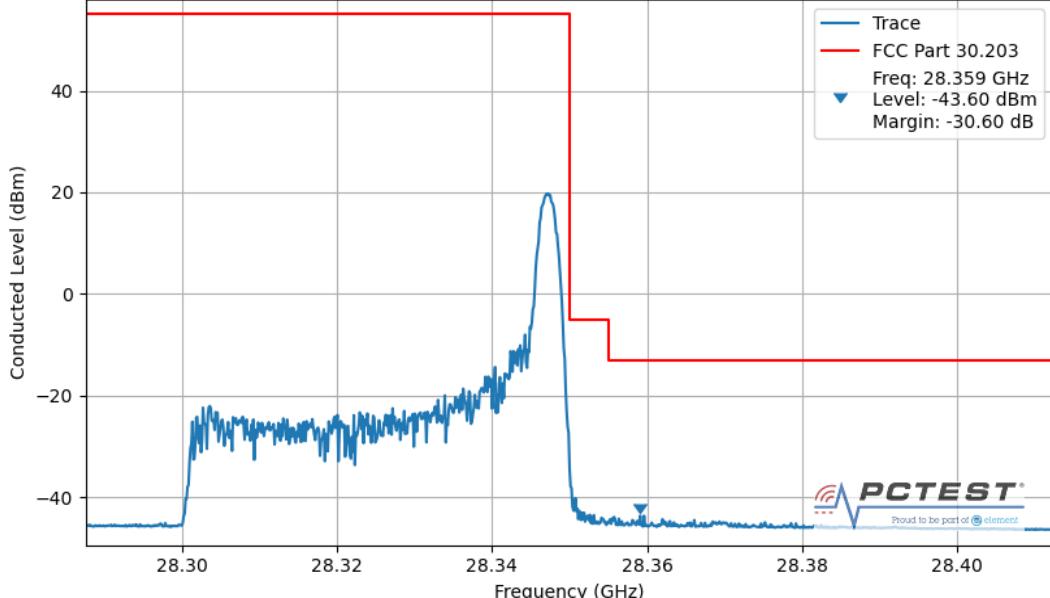


Plot 7-20. Upper Band Edge Plot (50MHz QPSK 1 RB)

FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 34 of 42

PASS


Center Freq: 28 GHz
Span: 1000 MHz
Trace: AVERAGE
Detector: RMS
RBW: 1 MHz
VBW: 3 MHz
SWP Count: 100
SWP: 2001

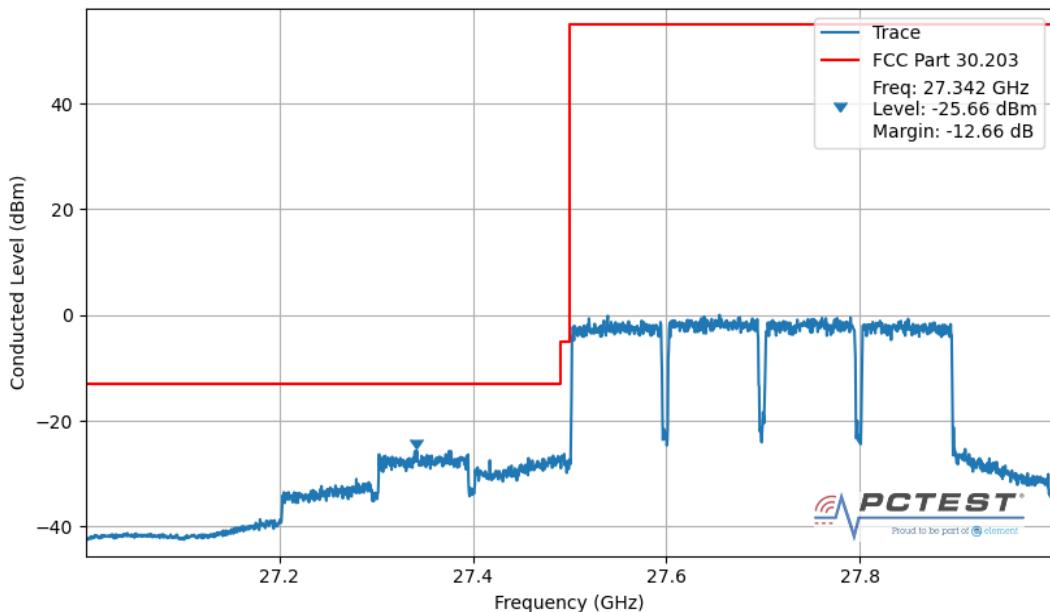

Plot 7-21. Lower Band Edge Plot (100MHz 4CC QPSK Full RB)

PASS

Center Freq: 28 GHz
Span: 1000 MHz
Trace: AVERAGE
Detector: RMS
RBW: 1 MHz
VBW: 3 MHz
SWP Count: 100
SWP: 2001

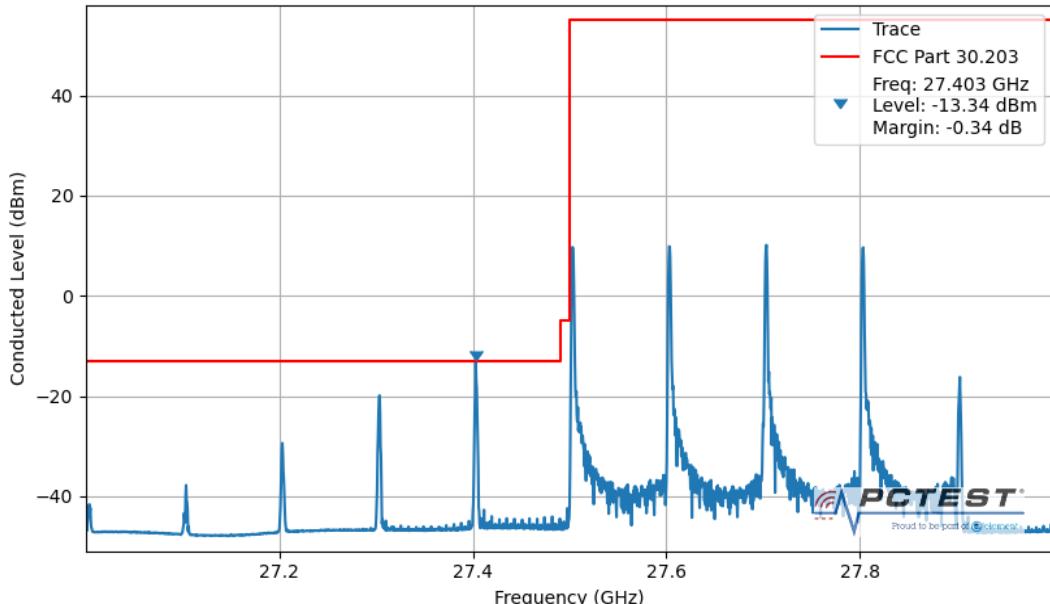


Plot 7-22. Lower Band Edge Plot (100MHz 4CC QPSK 1 RB)

FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 35 of 42

PASS


Center Freq: 28 GHz
Span: 1000 MHz
Trace: AVERAGE
Detector: RMS
RBW: 1 MHz
VBW: 3 MHz
SWP Count: 100
SWP: 2001

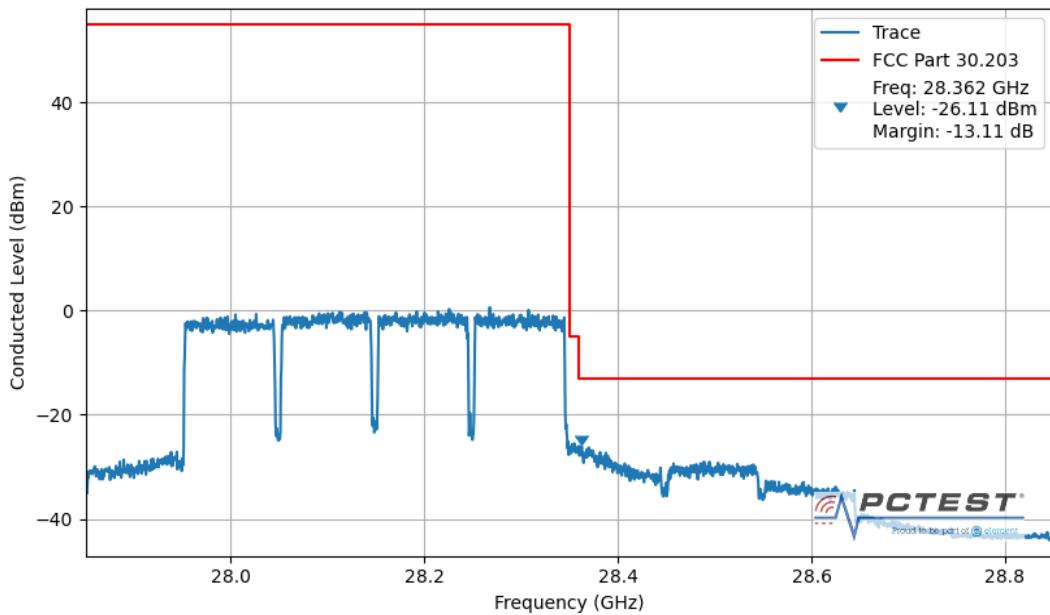

Plot 7-23. Upper Band Edge Plot (100MHz 4CC QPSK Full RB)

PASS

Center Freq: 28 GHz
Span: 1000 MHz
Trace: AVERAGE
Detector: RMS
RBW: 1 MHz
VBW: 3 MHz
SWP Count: 100
SWP: 2001

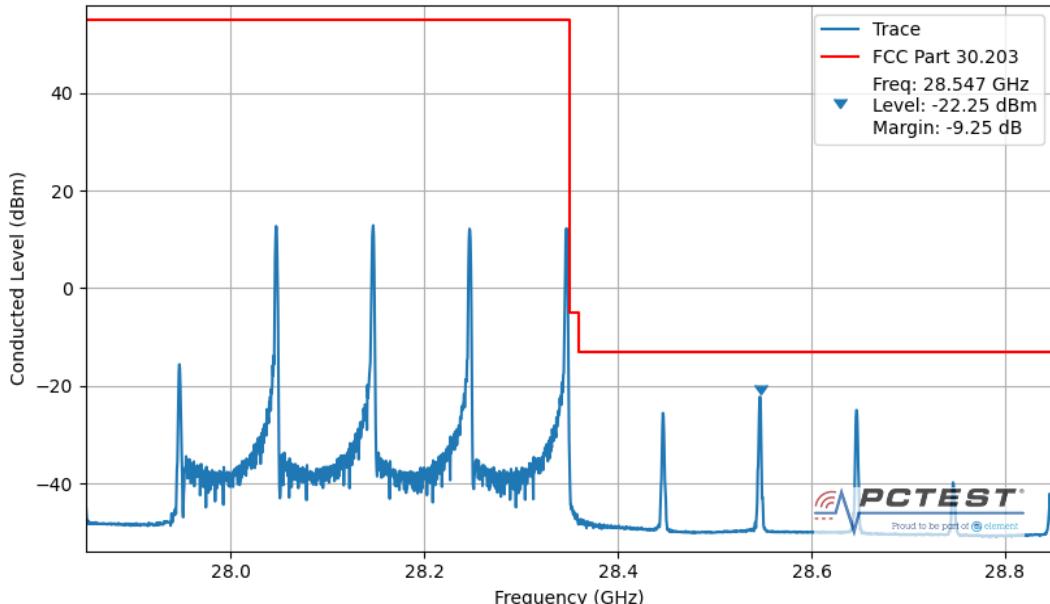

Plot 7-24. Upper Band Edge Plot (100MHz 4CC QPSK 1 RB)

FCC ID: 2AUUVU-P28DUGA1	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 36 of 42

7.7 Frequency Stability / Temperature Variation

§2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Test Procedure Used

ANSI C63.5-2015 Section 5.6

Test Settings

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was measured using horn antenna connected to a spectrum analyzer. The EUT was placed inside an environmental chamber. Using a foam plug, the horn antenna measured the frequency of the fundamental signal.

Test Notes

The Frequency Deviation column in the table below is the amount of deviation measured from the center frequency of the Reference measurement (first row).

FCC ID: 2AUUVU-P28DUGA1	 PCTEST [®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)			Page 37 of 42

Frequency Stability Measurements

§2.1055

OPERATING FREQUENCY: 27,924.96 Hz
 REFERENCE VOLTAGE: -48.00 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	-48.00	- 30	27,923,430,000	90,000	0.0003223
100 %		- 20	27,923,440,000	80,000	0.0002865
100 %		- 10	27,923,490,000	30,000	0.0001074
100 %		0	27,923,630,000	-110,000	-0.0003939
100 %		+ 10	27,923,625,000	-105,000	-0.0003760
100 %		+ 20	27,923,630,000	-110,000	-0.0003939
100 %		+ 30	27,923,560,000	-40,000	-0.0001432
100 %		+ 40	27,923,455,000	65,000	0.0002328
100 %		+ 50	27,923,440,000	80,000	0.0002865
85 %	-40.80	+ 20	27,923,510,000	10,000	0.0000358
115 %	-55.20	+20	27,923,520,000	46,000	0.0001647

Table 7-15. Frequency Stability Data

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: 2AUUV-P28DUGA1	 PCTEST® Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 38 of 42

Frequency Stability Measurements

§2.1055

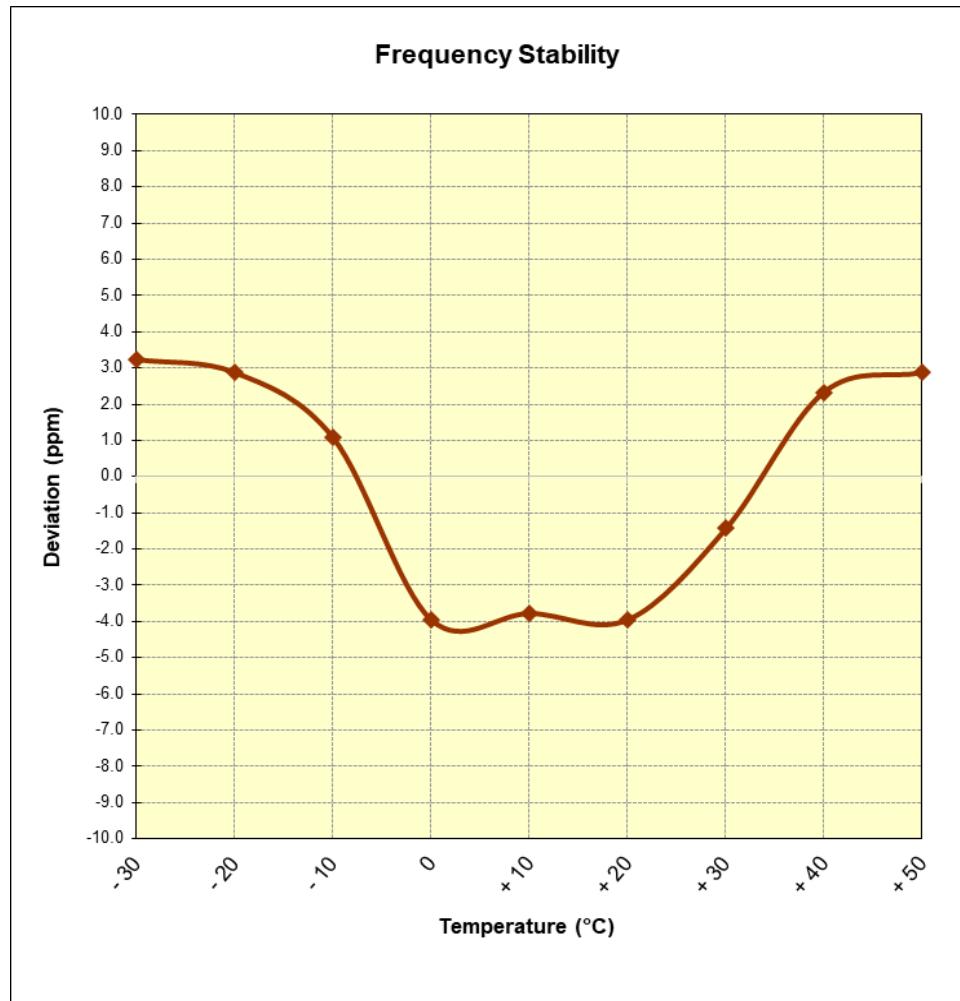


Figure 7-1. Frequency Stability Graph

FCC ID: 2AUUVU-P28DUGA1	 PCTEST® <small>Proud to be part of element</small>		MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL <small>COMMWARE</small>	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)			Page 39 of 42

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Pivotal Commware 5G mmWave Repeater (Donor Unit) FCC ID: 2AUVU-P28DUGA1** complies with all the requirements of Part 30.

FCC ID: 2AUVU-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 40 of 42

9.0 APPENDIX A

9.1 VDI Mixer Verification Certificate



Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
7185 Oakland Mills Road
Columbia, MD 21046
United States


From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 193065

Today's Date: 10/02/19

Quantity	Shipped	Unit	Description	Order-Job Number
1	EA	VDIWR19.0SAX	WR19SAX / SN: SAX 411	19329-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).



Authorized Signature
Virginia Diodes, Inc

Page 1 of 1

FCC ID: 2AUUV-P28DUGA1	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)	Page 41 of 42	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0



Virginia Diodes, Inc

979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
7185 Oakland Mills Road
Columbia, MD 21046
United States

From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 193037
Shipping Date: 09/30/19

Today's Date: 09/30/19
PO Number: 190719.DP1R

Quantity <u>Shipped</u>	Unit <u>Unit</u>	Description	<u>Order-Job Number</u>
1	EA	SAX RETEST-WR12SAX WR12SAX / SN: SAX 252	19408-01
1	EA	SAX RETEST-WR8.0SAX WR8.0SAX / SN: SAX 253	19408-02
1	EA	SAX RETEST-WR5.1SAX WR5.1SAX / SN: SAX 254	19408-03

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

Authorized Signature
Virginia Diodes, Inc



Page 1 of 1

FCC ID: 2AUUV-P28DUGA1	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL [®] COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2008040118-02.2AUUV	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Donor Unit)		Page 42 of 42