

## MEASUREMENT REPORT FCC Part 20 Industrial Signal Booster (CMRS)

**Applicant Name:**

Pivotal Commware  
10801 120th Ave NE #200,  
Kirkland, WA 98033  
United States

**Date of Testing:**

9/17/2020-10/16/2020

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M2010120161-03.2AUVU

<b>FCC ID:</b>	<b>2AUVU-P28SUGA1</b>
<b>APPLICANT:</b>	<b>Pivotal Commware</b>

**Application Type:**

Certification

**Model:**

PIV28SUGA1

**EUT Type:**

5G mmWave Repeater (Service Unit)

**FCC Classification:**

Part 20 Industrial Booster (CMRS) (B2I)

**FCC Rule Part(s):**

2, 20, 30

**Test Procedure(s):**

ANSI C63.26-2015, KDB 935210 D02 v04r02, KDB 935210 D05 v01r04,  
KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in 2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



FCC ID: 2AUVU-P28SUGA1	 <b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 <b>PIVOTAL</b> COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 1 of 19

## T A B L E   O F   C O N T E N T S

---

1.0	Introduction .....	3
1.1	Scope.....	3
1.2	PCTEST Test Location .....	3
1.3	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION .....	4
2.1	Equipment Description.....	4
2.2	Device Capabilities .....	4
2.3	Test Configuration .....	4
2.4	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TESTS .....	5
3.1	Measurement Procedure .....	5
3.2	Industrial Booster Test Cases.....	5
3.3	Environmental Conditions .....	5
4.0	Measurement Uncertainty .....	6
5.0	TEST EQUIPMENT CALIBRATION DATA.....	7
6.0	TEST RESULTS .....	8
6.1	Summary .....	8
6.2	Input-Versus-Output Signal Comparison .....	9
6.3	Out-of-band Emissions Conducted Measurements .....	12
6.4	Out-of-band Rejection.....	15
6.5	Measuring AGC Threshold Level, Mean Output Power and Amplifier/Booster Gain .....	17
7.0	CONCLUSION .....	19

FCC ID: 2AUUVU-P28SUGA1	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL <sup>®</sup> COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 2 of 19

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO/IEC 17025:2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: 2AUVU-P28SUGA1	PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL <sup>®</sup> COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)			Page 3 of 19

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Pivotal Commware 5G mmWave Repeater (Service Unit)** **FCC ID:2AUVU-P28SUGA1**. The test data contained in this report covers the requirements for the operation of an industrial booster per FCC Part 20.21, KDB 935210 D02, and KDB 935210 D05.

The EUT has an open-ended waveguide horn antenna. The antenna configuration is comprised of two separate antenna feeds – one for horizontal and one for the vertical polarization.

The EUT supports any combination of bandwidths, number of carriers, and modulations as input signals in the n261 (28GHz) band.

**Test Device Serial No.:** 10001

### 2.2 Device Capabilities

This device contains the following capabilities:

5G FR2 (mmWave), WIFI, LTE

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015 and KDB 935210 D05 in a conducted setup. The EUT was fitted with waveguide adapters that allowed direct injection of an input signal into one of the two antennas for measurement from the other antenna. See Section 6.0 of this test report for a description of the tests.

All testing was performed using a signal generator connected to the input port of the EUT via waveguide adapters. The signal generator was set to transmit a representative 5G mmWave NR signal in various sized bandwidths and modulations.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2AUVU-P28SUGA1	PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL <sup>®</sup> COMMWARE	Approved by: Technical Manager
1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020		EUT Type: 5G mmWave Repeater (Service Unit)		
			Page 4 of 19		

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The measurement procedures described in the document titled "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015) and KDB 935210 D05 were used in the measurement of the EUT. KDB 842590 D01 v01 was referenced for testing the EUT as well.

### 3.2 Industrial Booster Test Cases

Per the requirements of KDB 935210 D05, the following test cases shall be investigated for Industrial Boosters under FCC Part 20.21:

1. AGC Threshold Level
2. Out-of-Band Rejection
3. Input-versus-Output Signal Comparison
4. Mean Output Power and Amplifier/Booster Gain
5. Out-of-Band/Out-of-Block Emissions and Spurious Emissions
6. Frequency Stability
7. Radiated Spurious Emissions

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2AUVU-P28SUGA1	PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL <sup>®</sup> COMMWARE	Approved by: Technical Manager
Test Report S/N:	Test Dates:		EUT Type:		
1M2010120161-03.2AUVU	9/17/2020-10/16/2020		5G mmWave Repeater (Service Unit)		
			Page 5 of 19		

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: 2AUVU-P28SUGA1	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 6 of 19

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Rohde & Schwarz	SMW200A	Vector Signal Generator		N/A		105744

**Table 5-1. Annual Test Equipment Calibration Schedule**

FCC ID: 2AUVU-P28SUGA1	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 PIVOTAL <sup>®</sup> COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 7 of 19

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: Pivotal Commware

FCC ID: 2AUVU-P28SUGA1

FCC Classification: Part 20 Industrial Booster (CMRS) (B2I)

FCC Part Section(s)	KDB 935210 D05 Section(s)	Test Description	Test Limit	Test Result	Reference
2.1049, 20.21	3.4	Occupied Bandwidth / Input-Versus-Output Signal Comparison	N/A	PASS	Section 6.2
2.1051, 30.203, 20.21	3.8	Radiated Spurious Emissions	-13dBm/MHz for all out-of-band emissions	PASS	See Part 30 Report
2.1051, 30.203, 20.21	3.6	Out-of-Band/Out of Block Emissions	-13dBm/MHz for all out-of-band emissions, -5dBm/MHz from the band edge up to 10% of the channel BW	PASS	See Part 30 Report
2.1055, 20.21	3.7	Frequency Stability	Fundamental emissions stay within authorized frequency block	PASS	See part 30 Report
20.21	3.3	Out-of-Band Rejection	N/A	PASS	Section 6.4
2.1046, 30.202, 20.21	3.2, 3.5	Measuring AGC Threshold Level / Mean Output Power and Amplifier/Booster Gain	N/A	PASS	Section 6.5

Table 6-1. Summary of Radiated Test Results

#### Notes:

- 1) Since the EUT can only operate as a Booster, some of the test requirements specified in KDB 935210 D05 are already addressed in the Part 30 report in this filing.
- 2) The EUT was fitted with waveguide-to-RF adapters that allowed direct conducted measurements. All measurements, except for those referencing the Part 30 report in this filing, were performed in a conducted test setup.
- 3) Due to the design of the device with waveguides, conducted spurious emission measurements were not applicable.

FCC ID: 2AUVU-P28SUGA1	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL <sup>®</sup> COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 8 of 19

## 6.2 Input-Versus-Output Signal Comparison

§2.1049, §20.21

### Test Overview

The Input-versus-Output Signal Comparison checks for the change in occupied bandwidth of the output signal from the booster at 3dB above the AGC threshold level and just below the AGC threshold level while not more than 0.5dB below the threshold level. All modes of operation were investigated and the worst case configuration results are reported in this section. Per KDB 935210 D05 clause 3.4, this is to be measured on both the input signal and the output signal.

### Test Procedure Used

ANSI C63.26-2015 – Section 5.4.3, KDB 935210 D05 – Section 3.4

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize


### Test Notes

Per FCC guidance, a 50MHz 5G NR mmWave signal was used as the input signal as opposed to the 4.1MHz AWGN required in KDB 935210 D05.


AGC Threshold Level	Channel	Bandwidth	Output Power OBW [MHz]	Input Power OBW [MHz]
0.5dB below Threshold	Mid	50	45.80	45.97
3dB above Threshold	Mid	50	45.95	45.83

**Table 6-2. Occupied Bandwidth by AGC Threshold Level**

FCC ID: 2AUVU-P28SUGA1	 <b>PCTEST®</b> <small>Proud to be part of element</small>			MEASUREMENT REPORT (CERTIFICATION)	 <b>PIVOTAL® COMMWARE</b>	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)				Page 9 of 19

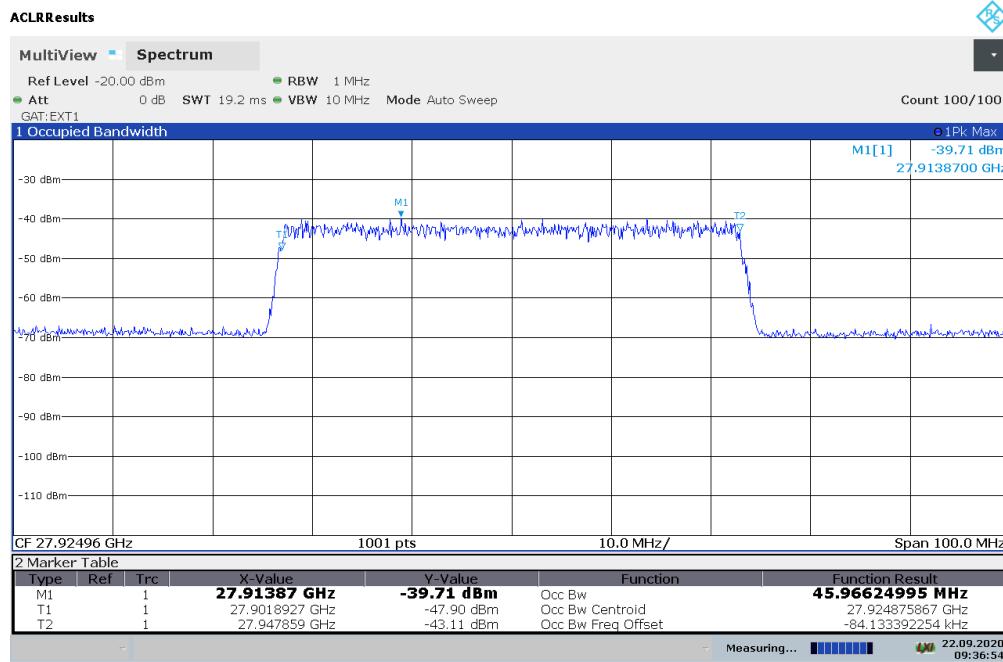


**Plot 6-1. Occupied Bandwidth Input at 0.5dB below AGC Threshold.**

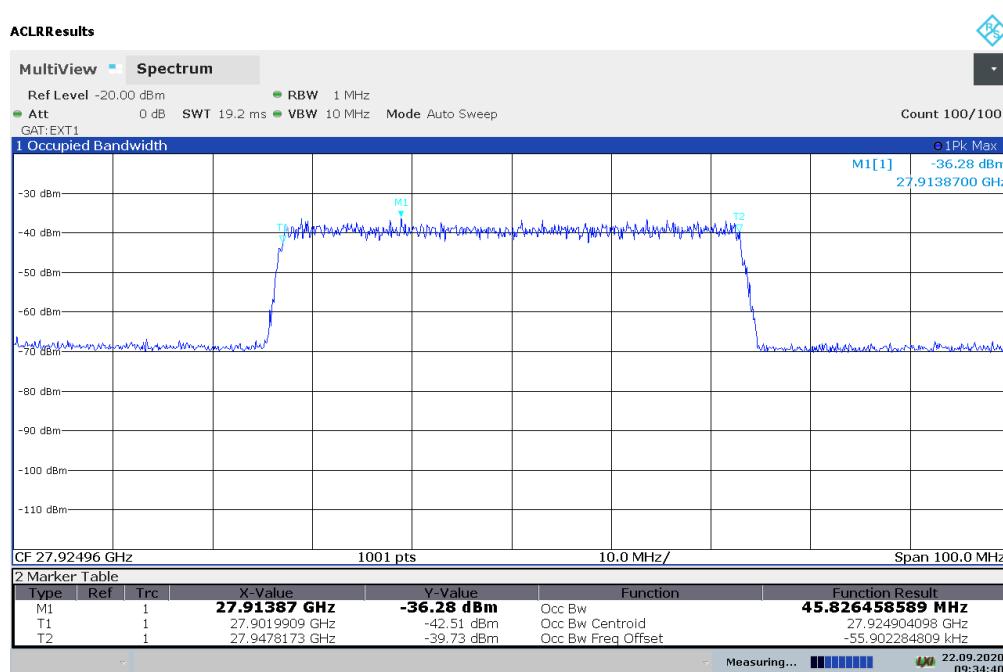


**Plot 6-2. Occupied Bandwidth Input at 3dB above AGC Threshold.**

FCC ID: 2AUVU-P28SUGA1	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)			

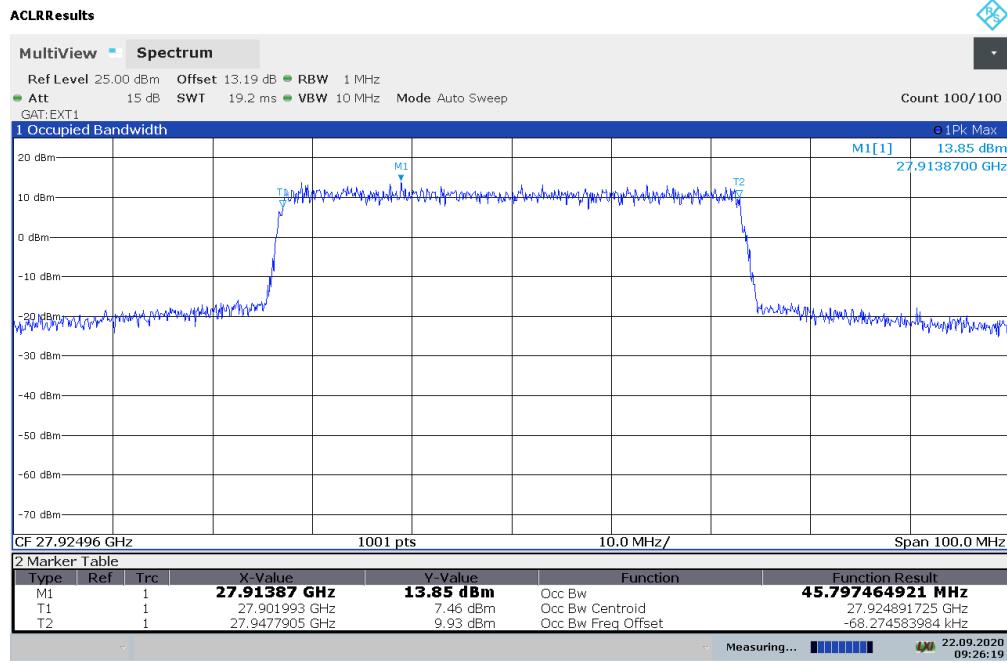

09:26:20 22.09.2020

**Plot 6-3. Occupied Bandwidth Output at 0.5dB below AGC Threshold.**

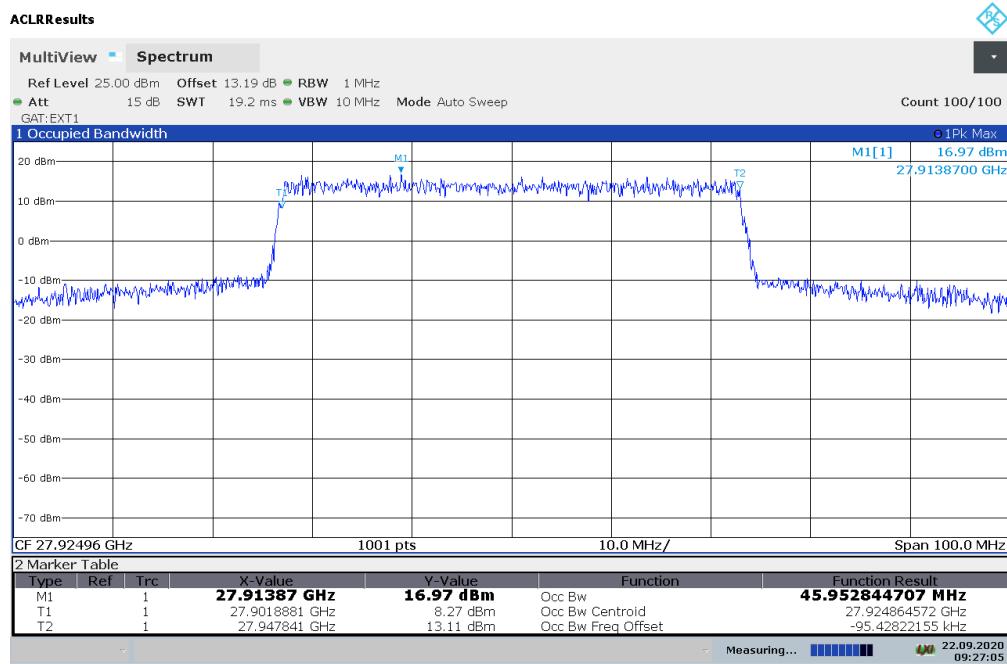

09:27:06 22.09.2020

**Plot 6-4. Occupied Bandwidth Output at 3dB above AGC Threshold.**

FCC ID: 2AUVU-P28SUGA1	 <b>PCTEST®</b> Proud to be part of  <b>MEASUREMENT REPORT (CERTIFICATION)</b>				Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)			

## 6.3 Out-of-band Emissions Conducted Measurements

### Test Overview

All out-of-band emissions are measured with a spectrum analyzer connected to the RF port of EUT while the EUT is operating at maximum power (within its AGC threshold) at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section. Per KDB 935210 D05, there are two stimulus conditions – one with a single test signal tuned to the lower and upper band edges, the data for which may be found in the Part 30 report and another with two adjacent signals tuned to the lowest and highest frequencies of the block under examination. The data representing two adjacent signals is found in this section.

***The minimum permissible attenuation level of any spurious emission is -13dBm/1MHz. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.***

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0, KDB 935210 D05 – Section 3.6

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average for continuous emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-1. Test Instrument & Measurement Setup**

### Test Notes

Per FCC guidance, a 50MHz 5G NR mmWave signal was used as the input signal as opposed to the 4.1MHz AWGN required in KDB 935210 D05.


FCC ID: 2AUVU-P28SUGA1	 <b>PCTEST®</b> <small>Proud to be part of element</small>		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)			Page 12 of 19

**PASS**

Center Freq: 28 GHz  
Span: 250 MHz

Trace: AVERAGE  
Detector: RMS  
SWP Count: 100

RBW: 1 MHz  
VBW: 3 MHz  
SWP: 1001

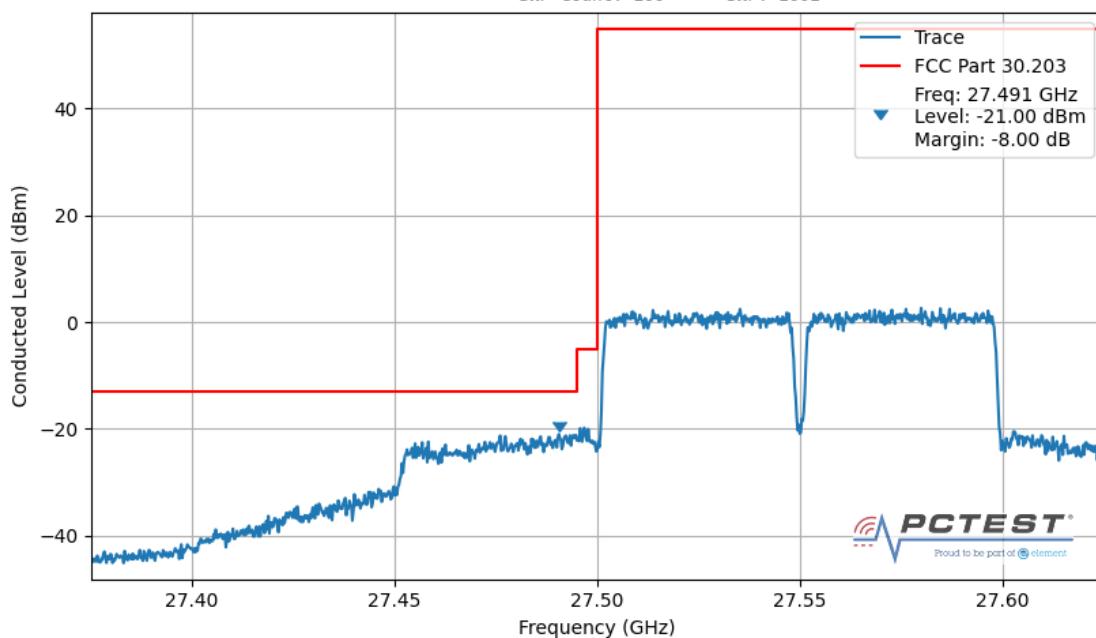


**Plot 6-5. Horn Antenna Lower Band Edge Plot with 2 Carriers – Full RB.**

**PASS**

Center Freq: 28 GHz  
Span: 250 MHz

Trace: AVERAGE  
Detector: RMS  
SWP Count: 100

RBW: 1 MHz  
VBW: 3 MHz  
SWP: 1001

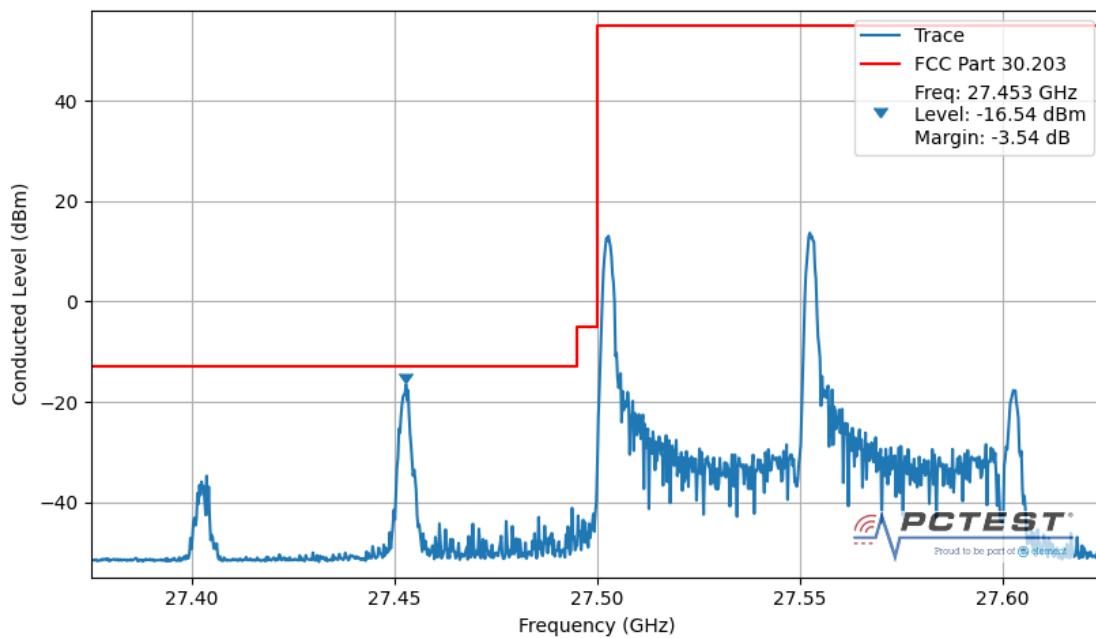

**Plot 6-6. Horn Antenna Lower Band Edge Plot with 2 Carriers – 1RB.**


FCC ID: 2AUUVU-P28SUGA1	<b>PCTEST®</b> Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	<b>PIVOTAL COMMWARE</b>	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)				Page 13 of 19

**PASS**

Center Freq: 28 GHz  
Span: 250 MHz

Trace: AVERAGE  
Detector: RMS  
SWP Count: 100

RBW: 1 MHz  
VBW: 3 MHz  
SWP: 1001

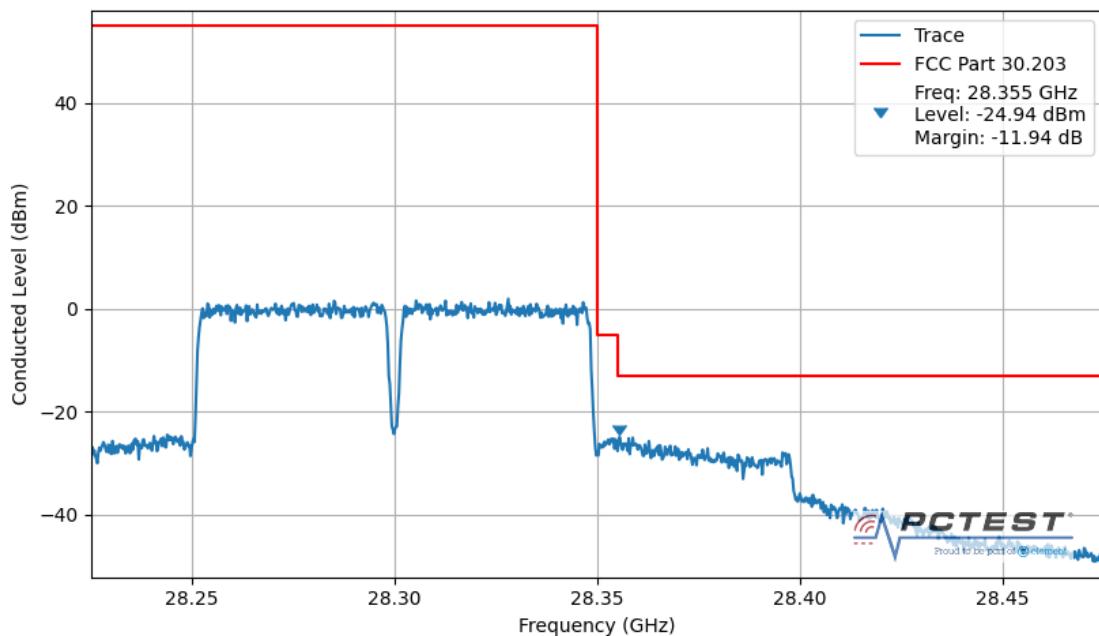


**Plot 6-7. Horn Antenna Upper Band Edge Plot with 2 Carriers – Full RB.**

**PASS**

Center Freq: 28 GHz  
Span: 250 MHz

Trace: AVERAGE  
Detector: RMS  
SWP Count: 100

RBW: 1 MHz  
VBW: 3 MHz  
SWP: 1001

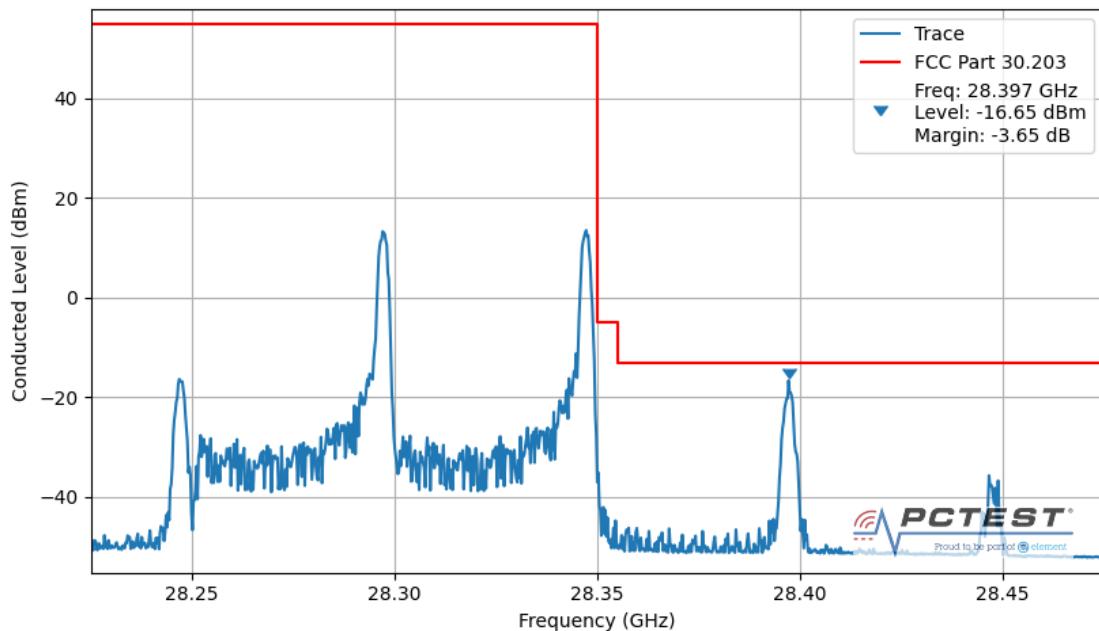

**Plot 6-8. Horn Antenna Upper Band Edge Plot with 2 Carriers – 1RB.**

FCC ID: 2AUVU-P28SUGA1	<b>PCTEST®</b> Proud to be part of 			MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)				Page 14 of 19

## 6.4 Out-of-band Rejection

### Test Overview

A signal generator is set to the input port of the EUT, and the output of the EUT shall be connected to a spectrum analyzer. Per KDB 935210 D05 Section 3.3, the signal generator will sweep a CW signal to  $\pm 250\%$  of the passband. Per FCC Part 20, an industrial booster shall have its 20dB bandwidth analyzed in order to assess the pass band of the booster.

### Test Procedure Used

KDB 935210 D05 v01r04 – Section 3.3

### Test Settings

1. Start and stop frequency of the signal generator shall be  $\pm 250\%$  of the passband, for each applicable CMRS band
2. Span same as the frequency range of the signal generator
3. RBW  $\geq 1\%$  to 5 % of the EUT passband
4. VBW  $\geq 3 \times$  RBW
5. Detector = Peak/Max Hold
6. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-2. Test Instrument & Measurement Setup**

### Test Notes

In the plots on the following page, a spectrum plot is shown with a CW signal sweeping across the input of the EUT for both antennas. The sweep is set based on  $\pm 250\%$  of the passband which is equal to  $\pm 2.5 \times (28.35\text{GHz} - 27.5\text{GHz}) = \pm 2.125\text{GHz}$ . Therefore, the following plots demonstrate the frequency response of the EUT when a CW signal is sweeping from 25.375GHz to 30.475GHz.

The “D1” and “D2” markers in the plots are provided to demonstrate the approximate OBW of the output frequency response.

FCC ID: 2AUUVU-P28SUGA1	PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	PIVOTAL <sup>®</sup> COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)			Page 15 of 19

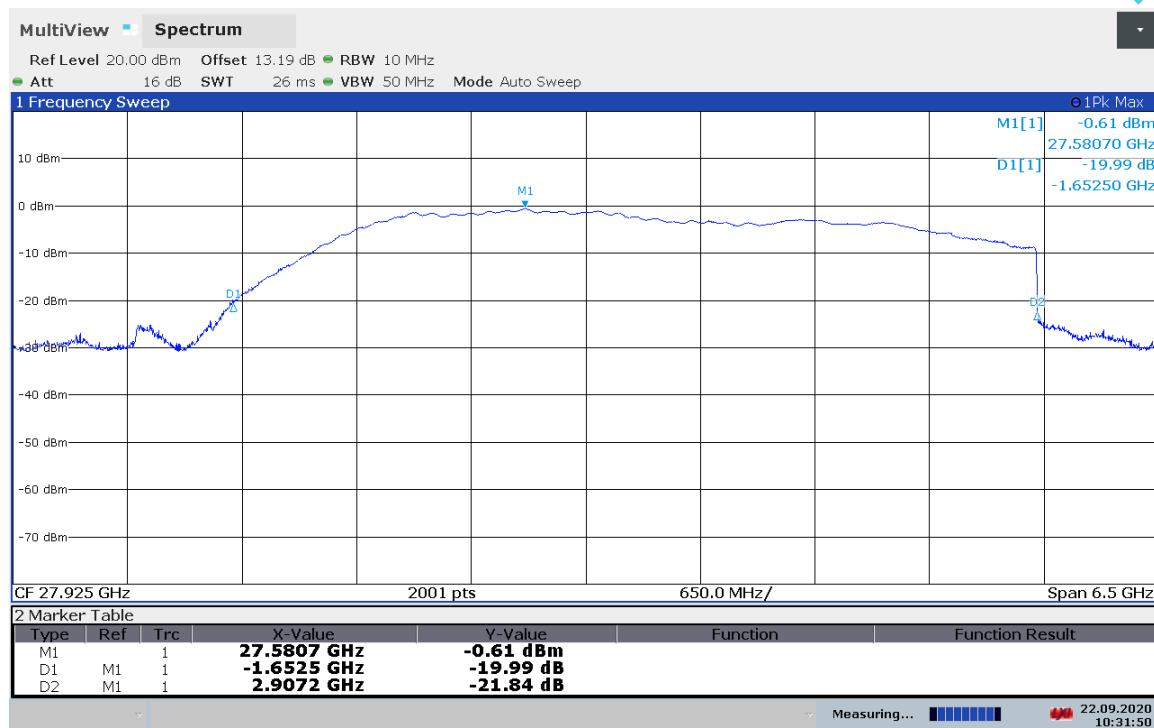**ACLRResults**


10:31:51 22.09.2020

**Plot 6-9. Out-Of-Band Rejection**

FCC ID: 2AUVU-P28SUGA1	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 16 of 19

## 6.5 Measuring AGC Threshold Level, Mean Output Power and Amplifier/Booster Gain

§2.1046, §30.202

### Test Overview

A signal generator supplies a 5G NR mmWave signal directly into the input port of the device. The output port of the EUT is connected to the input of a signal analyzer. The AGC threshold level is measured by output power of the EUT until a 1dB increase in the input signal power no longer causes a 1dB increase in the output signal power. The Booster Gain is measured by calculating the gain between the input and the output power of the EUT at the signal generator level just below the AGC threshold level, but not more than 0.5dB below.

### Test Procedures Used

KDB 935210 D05 V01R04 – Section 3.2 - Measuring AGC threshold level

KDB 935210 D05 V01R04 – Section 3.5 - Mean output power and amplifier/booster gain

### Test Settings

1. Conducted power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 2x to 3x the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
8. Trace mode = trace averaging (RMS) over 100 sweeps
9. The trace was allowed to stabilize

### Test Notes

Per FCC guidance, a 50MHz 5G NR mmWave signal was used as the input signal as opposed to the 4.1MHz AWGN required in KDB 935210 D05.

FCC ID: 2AUVU-P28SUGA1	 <b>PCTEST®</b> <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)	 <b>PIVOTAL®</b> COMMWARE	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 17 of 19

Bandwidth (MHz)	Frequency [MHz]	Channel	Modulation	RB Size	EUT Input Power Level (dBm)	Conducted Power [dBm]	Calculated Change in Output Power	Calculated gain (dB)
50	27924.96	Mid	QPSK	Full RB	-36.64	15.41	-	52.05
50	27924.96	Mid	QPSK	Full RB	-35.57	16.34	0.93	51.91
50	27924.96	Mid	QPSK	Full RB	-34.55	17.29	0.95	51.84
50	27924.96	Mid	QPSK	Full RB	-33.58	18.09	0.80	51.67
50	27924.96	Mid	QPSK	Full RB	-32.58	18.82	0.73	51.40
50	27924.96	Mid	QPSK	Full RB	-31.45	18.92	0.10	50.37
50	27924.96	Mid	QPSK	Full RB	-30.41	19.05	0.13	49.46
50	27924.96	Mid	QPSK	Full RB	-29.49	18.59	-0.46	48.08
50	27924.96	Mid	QPSK	Full RB	-28.54	19.12	0.53	47.66
50	27924.96	Mid	QPSK	Full RB	-27.48	18.98	-0.14	46.46
50	27924.96	Mid	QPSK	Full RB	-26.48	19.31	0.33	45.79
50	27924.96	Mid	QPSK	Full RB	-25.52	19.25	-0.06	44.77

**Table 6-3. Full RB AGC Threshold and Booster Gain – 50MHz 1CC**

**Note:** AGC Level is found at **-31.45dBm** EUT Input Power Level.

Bandwidth (MHz)	Frequency [MHz]	Channel	Modulation	RB Size	EUT Input Power Level (dBm)	Conducted Power [dBm]	Calculated Change in Output Power	Calculated gain (dB)
100	27924.96	Mid	QPSK	Full RB	-39.91	10.05	-	49.96
100	27924.96	Mid	QPSK	Full RB	-39.08	11.01	0.96	50.09
100	27924.96	Mid	QPSK	Full RB	-38.29	11.93	0.92	50.22
100	27924.96	Mid	QPSK	Full RB	-37.54	12.94	1.01	50.48
100	27924.96	Mid	QPSK	Full RB	-36.67	13.86	0.92	50.53
100	27924.96	Mid	QPSK	Full RB	-35.89	14.74	0.88	50.63
100	27924.96	Mid	QPSK	Full RB	-34.92	15.69	0.95	50.61
100	27924.96	Mid	QPSK	Full RB	-34.11	16.54	0.85	50.65
100	27924.96	Mid	QPSK	Full RB	-33.11	17.31	0.77	50.42
100	27924.96	Mid	QPSK	Full RB	-32.19	17.61	0.30	49.80
100	27924.96	Mid	QPSK	Full RB	-31.20	16.27	-1.34	47.47
100	27924.96	Mid	QPSK	Full RB	-30.24	17.05	0.78	47.29

**Table 6-4. Full RB AGC Threshold and Booster Gain – 100MHz 4CC**

**Note:** AGC Level is found at **-33.11dBm** EUT Input Power Level.

FCC ID: 2AUVU-P28SUGA1	 <b>PCTEST®</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 <b>PIVOTAL COMMWARE</b>	Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 18 of 19

## 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Pivotal Commware 5G mmWave Repeater (Service Unit) FCC ID: 2AUVU-P28SUGA1** has been tested to comply with the requirements specified in §20.21 and KDB 935210 D05 for Industrial Booster operation.

FCC ID: 2AUVU-P28SUGA1	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2010120161-03.2AUVU	Test Dates: 9/17/2020-10/16/2020	EUT Type: 5G mmWave Repeater (Service Unit)		Page 19 of 19