



## MEASUREMENT REPORT LTE

**Applicant Name:**

Pivotal Commware  
10801 120th Ave NE #200,  
Kirkland, WA 98033  
United States

**Date of Testing:**

10/7/2019-11/27/2019

**Test Site/Location:**

PCTEST Lab. Columbia, MD

**Test Report Serial No.:**

1M1909170154-04.2AUVU

<b>FCC ID:</b>	<b>2AUVU-UBR410M</b>
<b>APPLICANT:</b>	<b>Pivotal Commware</b>

**Application Type:**

Class II Permissive Change

**Model:**

UBR410M

**EUT Type:**

Multi-Band Cat. M1 LTE Module

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**FCC Rule Part(s):**

2, 27

**Test Procedure(s):**

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01,

**Class II Permissive Change:**

Please see FCC change document

**Original Grant Date:**

12/16/2019

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
\_\_\_\_\_  
Randy Ortanez  
President


FCC ID: 2AUVU-UBR410M	 <b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module	Approved by: Quality Manager Page 1 of 23

## T A B L E   O F   C O N T E N T S

1.0	INTRODUCTION .....	3
1.1	Scope .....	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities.....	4
2.3	Test Configuration .....	4
2.4	EMI Suppression Device(s)/Modifications .....	4
3.0	DESCRIPTION OF TESTS .....	5
3.1	Measurement Procedure.....	5
3.2	Block C Frequency Range .....	5
3.3	AWS - Base Frequency Blocks .....	5
3.4	AWS - Mobile Frequency Blocks.....	5
3.5	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Conducted Power.....	11
7.3	Radiated Spurious Emissions Measurements .....	14
7.4	Simultaneous Transmission .....	20
8.0	CONCLUSION.....	23

FCC ID: 2AUVU-UBR410M	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 2 of 23

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: 2AUVU-UBR410M	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 3 of 23

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Pivotal Commware Multi-Band Cat. M1 LTE Module** **FCC ID: 2AUVU-UBR410M**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

Emissions are measured to determine the RSE's from the co-located antennas of the various integrated modules into the previously certified host product (FCC ID: 2AUVU-OES3). This report contains emissions from both the LTE functions and the co-transmission functions of the end product with the integrated modules

**Test Device Serial No.:** 00007, 67214

### 2.2 Device Capabilities

This device contains the following capabilities: Cat. M1 LTE

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2AUVU-UBR410M	PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module			Page 4 of 23

## 3.0 DESCRIPTION OF TESTS


### 3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.


### 3.2 Block C Frequency Range

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

### 3.3 AWS - Base Frequency Blocks

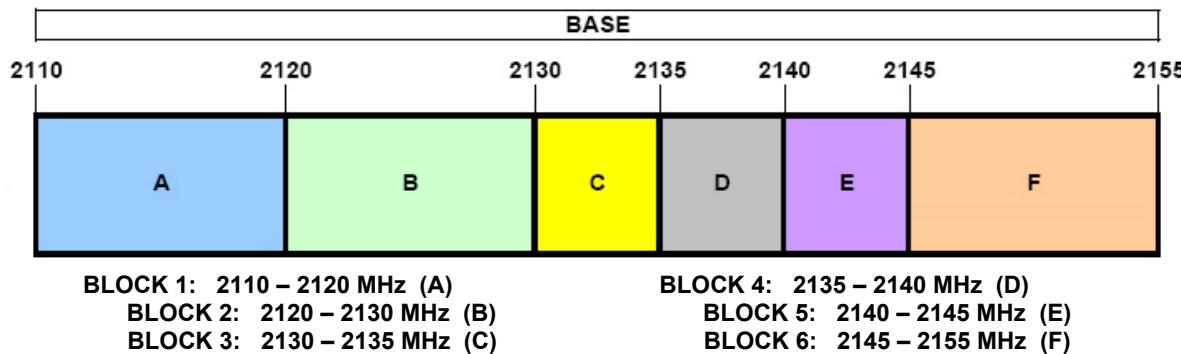

### 3.4 AWS - Mobile Frequency Blocks

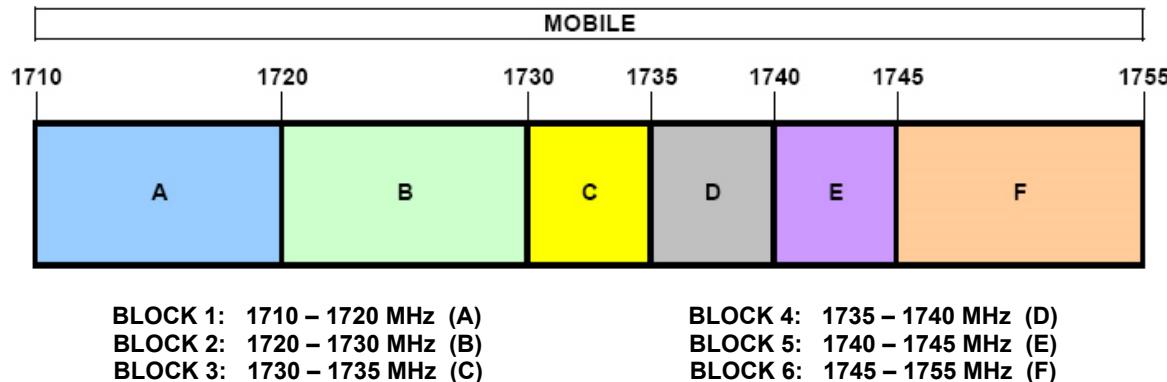

FCC ID: 2AUVU-UBR410M	 <b>MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>				Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module			

### 3.5 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01. Per the guidelines of KDB 412172 D01 v01r01, radiated power levels are measured using the following formula:

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10 \log_{10}(\text{Power [Watts]})$ .

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: 2AUVU-UBR410M	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 6 of 23

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: 2AUVU-UBR410M		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 7 of 23

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	5/10/2019	Annual	5/10/2020	441112
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
OML, Inc.	M05RH	Horn Antenna (140 - 220GHz)	7/30/2019	Annual	7/30/2020	18073001
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	5/6/2019	Annual	5/6/2020	103200
Rohde & Schwarz	CMW500	Radio Communication Tester		N/A		100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/11/2019	Annual	7/11/2020	102134
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

**Table 5-1. Test Equipment**

**Notes:**

Equipment with a calibration date of “N/A” shown in this list was not used to make direct calibrated measurements.

FCC ID: 2AUVU-UBR410M	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT <small>(CLASS II PERMISSIVE CHANGE)</small>	 <b>PIVOTAL</b> <small>COMMWARE</small>	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 8 of 23

## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation

**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: 2AUVU-UBR410M		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 9 of 23

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Pivotal Commware  
 FCC ID: 2AUVU-UBR410M  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1046	Transmitter Conducted Output Power	N/A	CONDUCTED	PASS	Section 7.2
2.1053 27.53(c) 27.53(h)	Undesirable Emissions (Band 13, 4)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	RADIATED	PASS	Section 7.3
27.53(f)	Undesirable Emissions (Band 13)	< -70 dBW/MHz (for wideband signals) For all emissions in the band 1559 – 1610 MHz		PASS	Section 7.3
2.1053 27.53(c) 27.53(f) 27.53(h) 15.247 30.203	Simultaneous Transmission	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions < -70 dBW/MHz (for wideband signals) For all emissions in the band 1559 – 1610 MHz		PASS	Section 7.4

**Table 7-1. Summary of Conducted Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 3) Conducted powers were spot checked to make sure that they were less than or equal to the powers on the Grant of the original module (FCC ID: XPY2AGQN4NNN).

FCC ID: 2AUVU-UBR410M	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT <small>(CLASS II PERMISSIVE CHANGE)</small>	 <b>PIVOTAL</b> <small>COMMWARE</small>	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 10 of 23

## 7.2 Conducted Power

### Test Overview

Conducted Power measurements are performed using a simulated base station and analyzer. The base station created a connection with a device to bring into a call and the analyzer is attached to the output port of the EUT. The power conduction from the antenna port is then measured.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: 2AUVU-UBR410M	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT <small>(CLASS II PERMISSIVE CHANGE)</small>	 <b>PIVOTAL</b> <small>COMMWARE</small>	Approved by: <small>Quality Manager</small>
Test Report S/N: <small>1M1909170154-04.2AUVU</small>	Test Dates: <small>10/7/2019-11/27/2019</small>	EUT Type: <small>Multi-Band Cat. M1 LTE Module</small>		Page 11 of 23

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Conducted Power Measurement Setup**

## Test Notes

- 1) Conducted Power measurements were tested while powered by a DC power source providing 14V.
- 2) The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.

FCC ID: 2AUVU-UBR410M	 <b>PCTEST®</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>PIVOTAL®</b> COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 12 of 23

## 7.2.1 Conducted Power

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]
782.00	10	QPSK	1 / 0	<b>22.88</b>	<b>0.194</b>

Table 7-2. Conducted Power Data (Band 13)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]
17720.00	20.0	QPSK	1 / 0	22.26	0.168
1732.50	20.0	QPSK	1 / 0	<b>22.29</b>	<b>0.169</b>
1745.00	20.0	QPSK	1 / 0	21.82	0.152

Table 7-3. Conducted Power (Band 4)

**Note:**

In the original Grant for this module (FCC ID XPY2AGQN4NNN), the highest reported power was 24.4dBm for LTE Band 13 and 23.9dBm for LTE Band 4.

FCC ID: 2AUVU-UBR410M		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 13 of 23

## 7.3 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8  
 ANSI C63.26-2015 Sections: 5.2.4.4.1 or 5.2.4.4.3  
 ANSI/TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: 2AUVU-UBR410M	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT <small>(CLASS II PERMISSIVE CHANGE)</small>	 <b>PIVOTAL</b> <small>COMMWARE</small>	Approved by: <small>Quality Manager</small>
Test Report S/N: <small>1M1909170154-04.2AUVU</small>	Test Dates: <small>10/7/2019-11/27/2019</small>	EUT Type: <small>Multi-Band Cat. M1 LTE Module</small>		Page 14 of 23

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

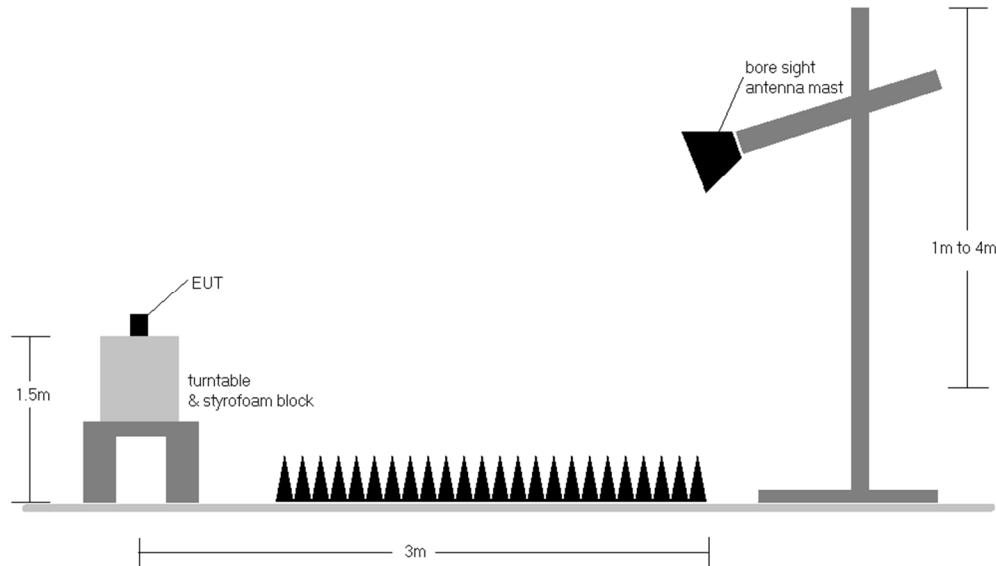


**Figure 7-2. Test Instrument & Measurement Setup**

## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) Conducted Power measurements were tested while powered by a DC power source providing 14V.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: 2AUVU-UBR410M	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 15 of 23

### 7.3.1 Radiated Spurious Emissions Measurements Band 13

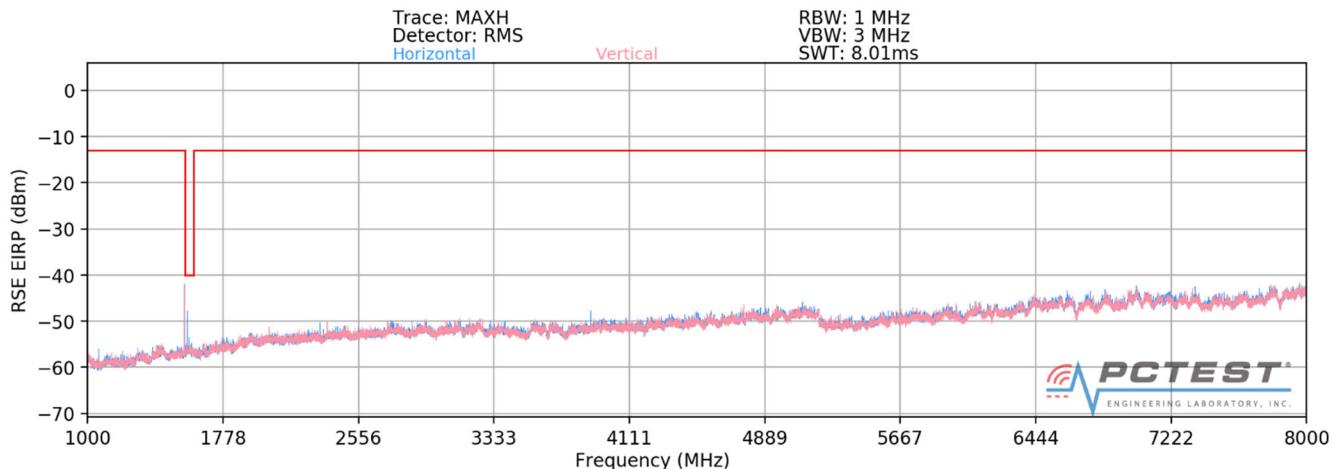

**Plot 7-1. Radiated Spurious Plot above 1GHz (Band 13)**

MODULATION SIGNAL:	QPSK	
BANDWIDTH:	10.00 MHz	
DISTANCE:	3 meters	
NARROWBAND EMISSION LIMIT:	-50 dBm	
WIDEBAND EMISSION LIMIT:	-40 dBm/MHz	

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1564.00	H	115	42	-44.27	3.98	-40.29	-0.3

**Table 7-4. Wideband 1559-1610 MHz Radiated Spurious Data (Band 13 – Mid Channel)**

**Note:**

For this harmonic measurement, the test procedure used was from ANSI C63.26-2015 Section 5.2.4.4.2. This method utilized an average trace mode and a calculated duty cycle correction factor which is calculated as DCCF =  $10\log(1/\text{Duty Cycle})$ . The duty cycle correction of 4.53dB is included in the -44.27dBm reading at the antenna terminal.

FCC ID: 2AUVU-UBR410M	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>PIVOTAL</b> COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 16 of 23


OPERATING FREQUENCY: 782.00 MHz  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2346.00	H	106	44	-55.63	5.65	-49.99	-37.0
3128.00	H	172	44	-58.65	7.15	-51.49	-38.5
3910.00	H	346	48	-52.18	8.26	-43.92	-30.9
4692.00	H	-	-	-70.62	9.67	-60.95	-47.9
5474.00	H	-	-	-71.20	10.48	-60.73	-47.7

Table 7-5. Radiated Spurious Data (Band 13 – Mid Channel)

FCC ID: 2AUVU-UBR410M	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	MEASUREMENT REPORT <small>(CLASS II PERMISSIVE CHANGE)</small>	 <b>PIVOTAL</b> <small>COMMWARE</small>	Approved by: <small>Quality Manager</small>
Test Report S/N: <small>1M1909170154-04.2AUVU</small>	Test Dates: <small>10/7/2019-11/27/2019</small>	EUT Type: <small>Multi-Band Cat. M1 LTE Module</small>		Page 17 of 23

## Band 4

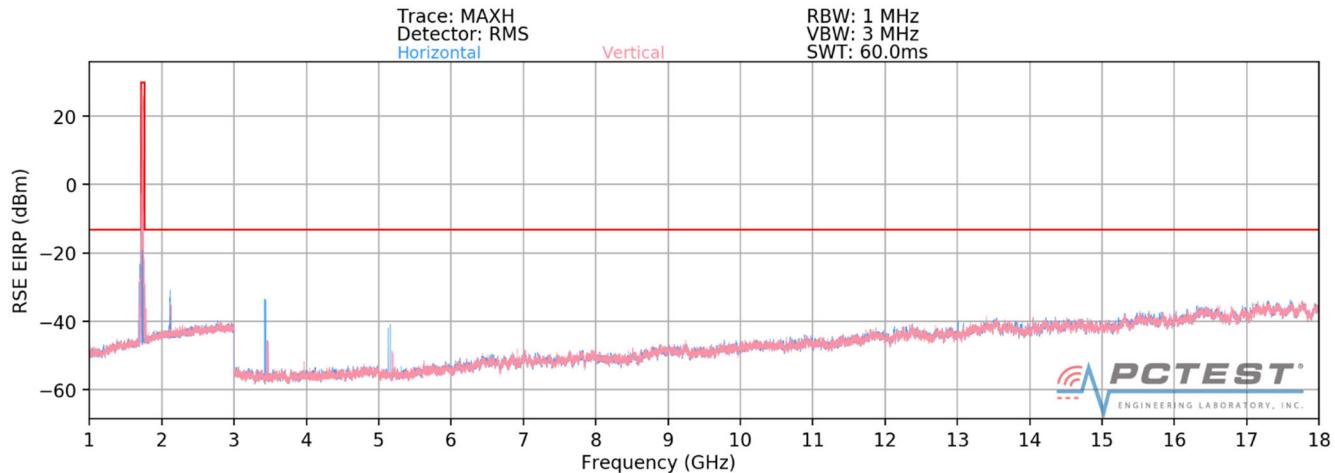

Plot 7-2. Radiated Spurious Plot above 1GHz (Band 4)

OPERATING FREQUENCY: 1720.00 MHz  
MODULATION SIGNAL: QPSK  
BANDWIDTH: 20.0 MHz  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3440.00	H	111	274	-33.66	6.66	-27.00	-14.0
5160.00	H	113	234	-44.21	8.94	-35.27	-22.3
6880.00	H	296	9	-56.91	9.40	-47.51	-34.5
8600.00	H	-	-	-66.79	9.55	-57.24	-44.2
10320.00	H	-	-	-63.31	9.41	-53.90	-40.9

Table 7-6. Radiated Spurious Data (Band 4 – Low Channel)

FCC ID: 2AUVU-UBR410M	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>PIVOTAL</b> COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 18 of 23

OPERATING FREQUENCY: 1732.50 MHz  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.00	H	120	37	-28.13	6.72	-21.40	-8.4
5197.50	H	323	103	-38.00	9.03	-28.96	-16.0
6930.00	H	205	302	-47.69	9.41	-38.28	-25.3
8662.50	H	-	-	-64.39	9.53	-54.86	-41.9
10395.00	H	-	-	-62.65	9.33	-53.32	-40.3

Table 7-7. Radiated Spurious Data (Band 4 – Mid Channel)

OPERATING FREQUENCY: 1745.00 MHz  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20.0 MHz  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3490.00	H	126	233	-34.55	6.79	-27.76	-14.8
5235.00	H	400	108	-42.97	9.00	-33.97	-21.0
6980.00	H	102	127	-53.70	9.42	-44.29	-31.3
8725.00	H	-	-	-65.30	9.55	-55.76	-42.8
10470.00	H	-	-	-63.06	9.29	-53.77	-40.8

Table 7-8. Radiated Spurious Data (Band 4 – High Channel)

FCC ID: 2AUVU-UBR410M	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 19 of 23

## 7.4 Simultaneous Transmission

### Test Overview

To cover the simultaneous transmissions arising from integrating this module into the host device (FCC ID :2AUVU-OES3), both the LTE and WLAN modules are set to transmit at the same time as the mmWave functionality of the host. EUT is transmitting WLAN at 2437MHz in 802.11b mode simultaneously with the LTE B13 signal. Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8  
 ANSI C63.26-2015 Sections: 5.2.4.4.1 or 5.2.4.4.3  
 ANSI/TIA-603-E-2016 – Section 2.2.12

### Test Settings


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

### Test Notes

1. The spectrum scan plot on the following pages are used for the purpose of signal identification. Each emission is subject to a unique limit based on the rule under which the transmitter operates. For instances where an emission is the product of two co-located transmitters, the limit on that emission is the least stringent between the rule parts under which each transmitter operates.
2. Aside from the fundamental mmW transmitter at 28GHz, no significant spurious emissions were found in the 18 – 100GHz range.

FCC ID: 2AUVU-UBR410M	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module	Page 20 of 23	

### 7.4.1 Simultaneous Transmission Results

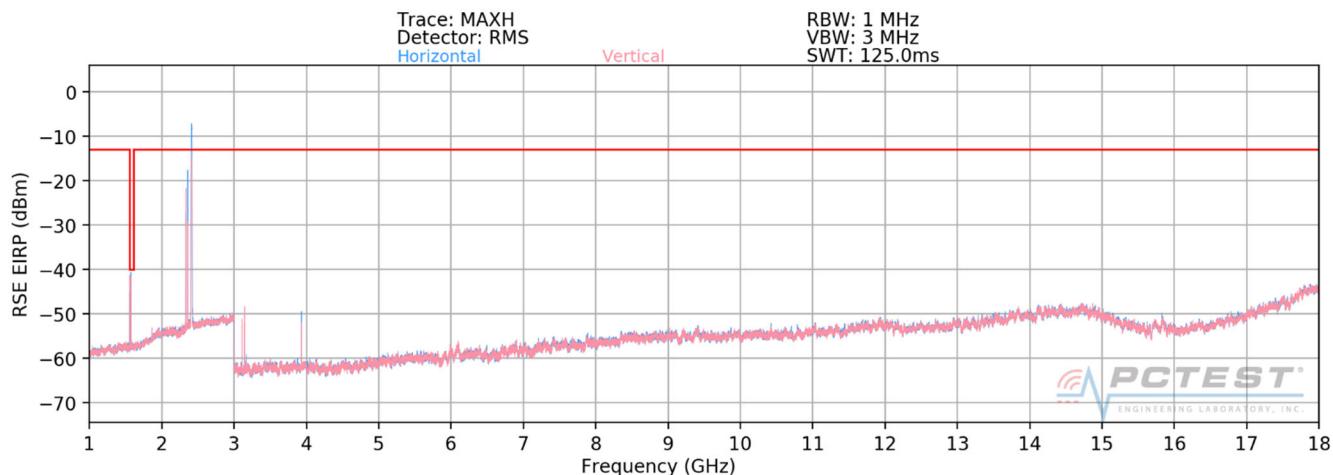

Plot 7-3. Band 13 - Radiated Spurious Emissions Plot <18GHz

**MODULATION SIGNAL:** QPSK  
**BANDWIDTH:** 10.00 MHz  
**DISTANCE:** 3 meters  
**WIDEBAND EMISSION LIMIT:** -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1564.00	H	128	218	-45.97	4.21	-41.76	-1.8


Table 7-9. Wideband 1559-1610 MHz Radiated Spurious Data (Band 13 – Mid Channel)

**OPERATING FREQUENCY:** 782.00 MHz  
**MODULATION SIGNAL:** QPSK  
**BANDWIDTH:** 10.0 MHz  
**DISTANCE:** 3 meters  
**LIMIT:** -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2346.00	H	128	229	-57.13	4.22	-52.92	-39.9
3128.00	H	186	218	-60.13	6.20	-53.93	-40.9
3910.00	H	234	210	-54.58	7.65	-46.93	-33.9
4692.00	H	-	-	-69.44	8.49	-60.95	-47.9

Table 7-10. Radiated Spurious Data (Band 13 – Mid Channel)

FCC ID: 2AUVU-UBR410M	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module			Page 21 of 23

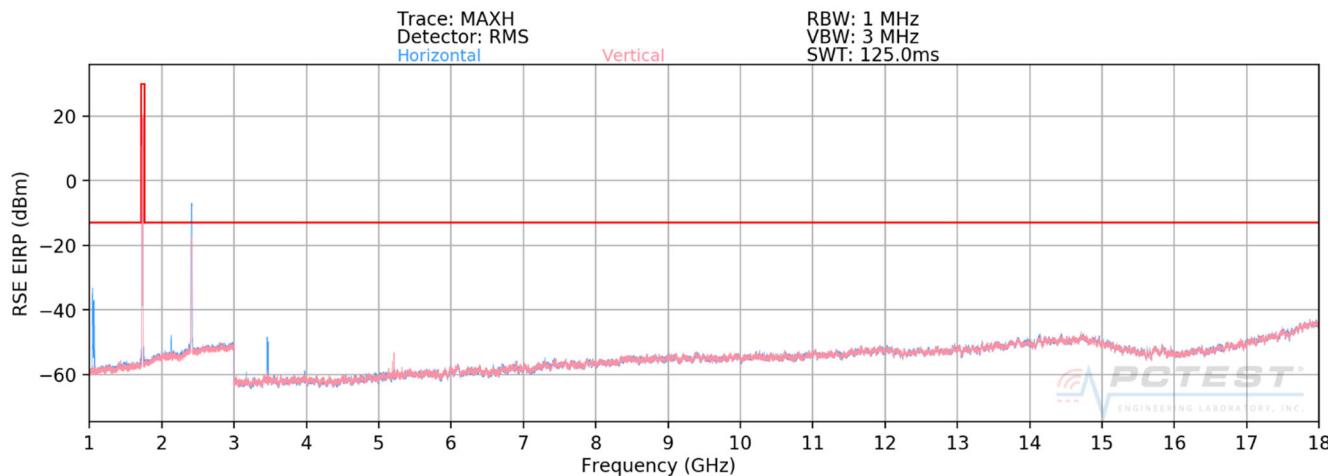

OPERATING FREQUENCY: 1732.50 MHz

MODULATION SIGNAL: QPSK

BANDWIDTH: 10.0 MHz

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1058.00	H	126	235	-41.84	6.81	-35.02	-22.0
3465.00	H	108	218	-32.88	6.81	-26.06	-13.1
5197.50	H	128	189	-39.75	9.15	-30.60	-17.6
6930.00	H	114	305	-50.73	9.71	-41.02	-28.0
8662.50	H	-	-	-64.31	9.81	-54.51	-41.5

Table 7-11. Radiated Spurious Data (Band 4 – Mid Channel)

FCC ID: 2AUVU-UBR410M	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>PIVOTAL</b> COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 22 of 23

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Pivotal Commware Multi-Band Cat. M1 LTE Module FCC ID: 2AUVU-UBR410M** complies with all of the technical requirements when integrated into the host device (FCC ID: 2AUVU-OES3) and while transmitting simultaneously with all supported transmitters.

FCC ID: 2AUVU-UBR410M	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 PIVOTAL COMMWARE	Approved by: Quality Manager
Test Report S/N: 1M1909170154-04.2AUVU	Test Dates: 10/7/2019-11/27/2019	EUT Type: Multi-Band Cat. M1 LTE Module		Page 23 of 23