



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

Jare (Fujian) Electronic Technology Co., Ltd

Dacheng Road.Qin Xi Yang Industrial zone. Fu'an City. Fujian Province.China

FCC ID: 2AUWQ-JR-S7


Report Type: Original Report	Product Name: Massage Chair
Report Number: RXM190613057-00	
Report Date: 2019-10-25	
Reviewed By:	Gavin Xu RF Engineer 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	7
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	7
SUPPORT CABLE LIST AND DETAILS	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31

TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	40
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA	46
FCC §15.247(d) - BAND EDGES TESTING	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	49

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Massage Chair
EUT Model:	JR-S7
MULTIPLE Models:	JR-R5, JR-R6, JR-R7, JR-R9, JR-S6, JR-S9, JR-Q8, JR-Q9, JR-M2, JR-M5, JR-M6, JR-M7, JR-M8, JR-M9, JR-A5, JR-A6, JR-A7, JR-A8, JR-X8, JR-S2, JR-S5, JR-K1, JR-K2, JR-K3, JR-K5, JR-K6, JR-K7, JR-K8, JR-K9, JR-L1, JR-L2, JR-L3, JR-L5, JR-L6, JR-L7, JR-L8, JR-L9, JR-268, JR-666, JR-688, JR-888, JR-168, JR-198, JR-988, JR-588, JR-390, JR-800
Operation Frequency:	2402-2480MHz
Maximum Output Power (Conducted):	4.24 dBm
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	120Vac
Serial Number:	190613057
EUT Received Date:	2019/6/17
EUT Status:	Good

Notes: Model JR-S7 was selected for fully testing, the detailed information about the difference among JR-R5, JR-R6, JR-R7, JR-R9, JR-S6, JR-S9, JR-Q8, JR-Q9, JR-M2, JR-M5, JR-M6, JR-M7, JR-M8, JR-M9, JR-A5, JR-A6, JR-A7, JR-A8, JR-X8, JR-S2, JR-S5, JR-K1, JR-K2, JR-K3, JR-K5, JR-K6, JR-K7, JR-K8, JR-K9, JR-L1, JR-L2, JR-L3, JR-L5, JR-L6, JR-L7, JR-L8, JR-L9, JR-268, JR-666, JR-688, JR-888, JR-168, JR-198, JR-988, JR-588, JR-390, JR-800 and model JR-S7 can be referred to the declaration letter which was stated and guaranteed by the manufacturer.

Objective

This report is prepared on behalf of **Jare (Fujian) Electronic Technology Co., Ltd** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s)

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk "★".

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

Software and version

BK3221 RF Test-v1.3

Mode	Packet type	Channel	Frequency (MHz)	Packet length	Power Level
GFSK	DH1	Low	2402	27	5
		Middle	2441	27	5
		High	2480	27	5
	DH3	Low	2402	183	5
		Middle	2441	183	5
		High	2480	183	5
	DH5	Low	2402	339	5
		Middle	2441	339	5
		High	2480	339	5
$\pi/4$ DQPSK	2DH1	Low	2402	54	5
		Middle	2441	54	5
		High	2480	54	5
	2DH3	Low	2402	367	5
		Middle	2441	367	5
		High	2480	367	5
	2DH5	Low	2402	679	5
		Middle	2441	679	5
		High	2480	679	5
8DPSK	3DH1	Low	2402	83	5
		Middle	2441	83	5
		High	2480	83	5
	3DH3	Low	2402	552	5
		Middle	2441	552	5
		High	2480	552	5
	3DH5	Low	2402	1021	5
		Middle	2441	1021	5
		High	2480	1021	5

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Apple	iPhone6s Plus	MGAA2CH/A	FK1R96UYG5QT

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
/	/	/	/	/	/

Block Diagram of Test Setup

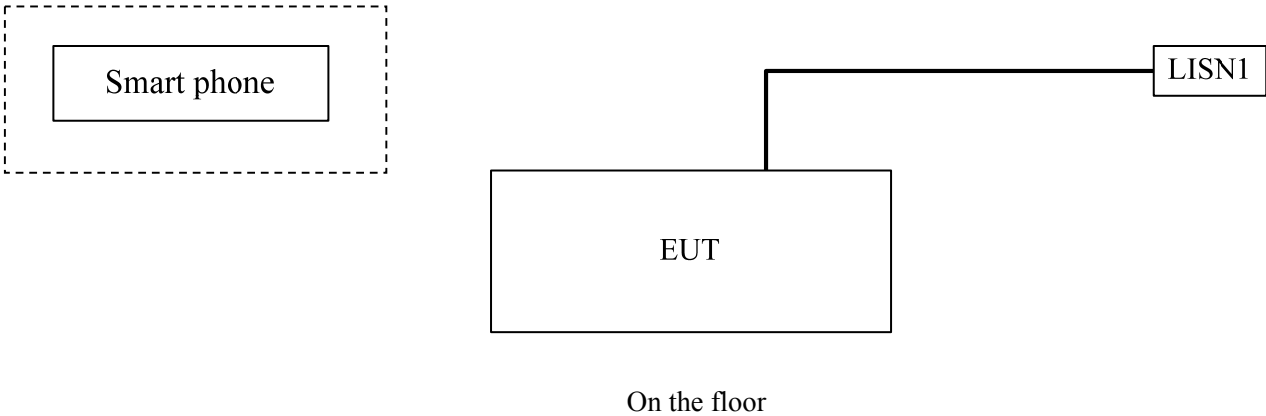

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC §15.203	Antenna requirement	Compliance
FCC §15.207(a)	AC line conducted emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Spurious emissions	Compliance
FCC §15.247(a)(1)	Channel separation	Compliance
FCC §15.247(a)(1)	20 dB bandwidth	Compliance
FCC §15.247(a)(1)(iii)	Quantity of hopping channel test	Compliance
FCC §15.247(a)(1)(iii)	Time of occupancy (dwell time)	Compliance
FCC §15.247(b)(1)	Peak output power measurement	Compliance
FCC §15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Bluetooth	2402-2480	0	1.00	5	3.16	20.00	0.0006	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for BT, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

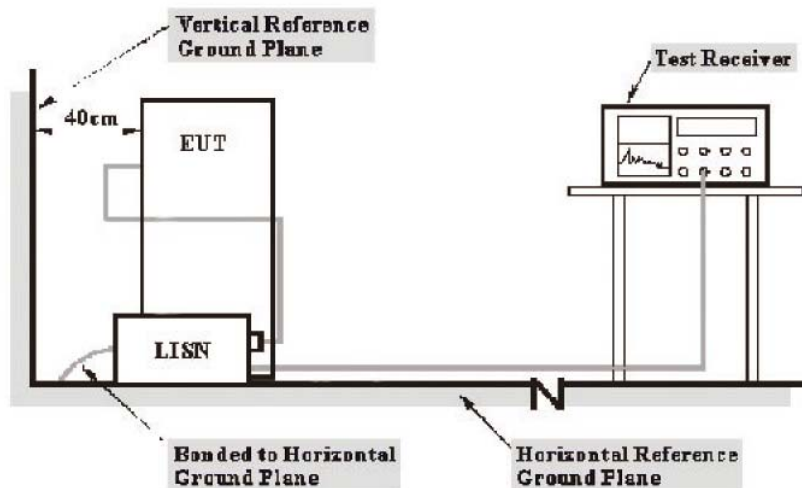

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESCI	101121	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data

Environmental Conditions

Temperature:	26.0 °C
Relative Humidity:	60 %
ATM Pressure:	100.6 kPa
Tester:	Sem Xiang
Test Date:	2019-10-21


Test Result: Compliance

Test Mode: Transmitting

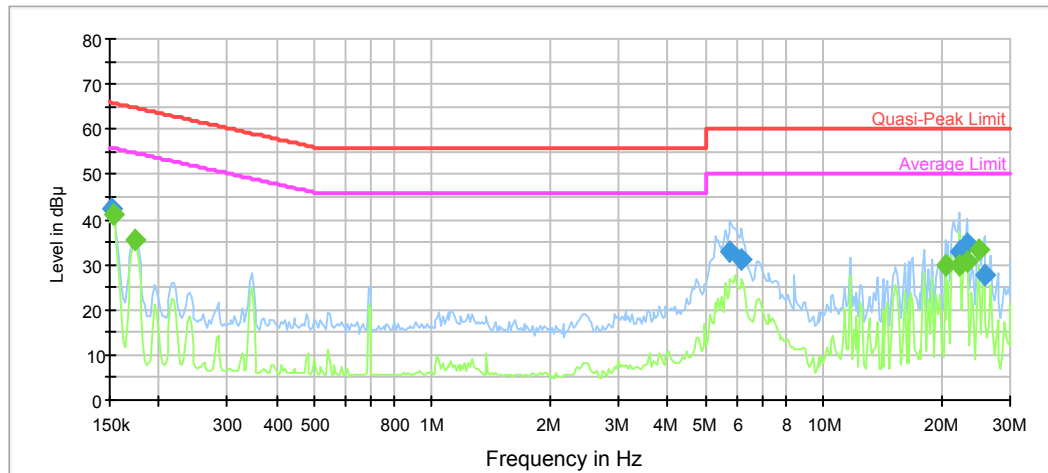AC120V, 60 Hz, Line:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.151500	42.5	9.000	L1	11.2	23.4	65.9
5.781436	33.0	9.000	L1	9.8	27.0	60.0
6.198482	31.3	9.000	L1	9.8	28.7	60.0
22.373945	33.0	9.000	L1	10.1	27.0	60.0
23.282417	34.5	9.000	L1	10.1	25.5	60.0
25.718273	27.7	9.000	L1	10.1	32.3	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153015	40.9	9.000	L1	11.1	14.9	55.8
0.174145	35.6	9.000	L1	10.9	19.2	54.8
20.457389	29.9	9.000	L1	10.1	20.1	50.0
22.373945	30.0	9.000	L1	10.1	20.0	50.0
23.282417	30.8	9.000	L1	10.1	19.2	50.0
24.961902	33.3	9.000	L1	10.1	16.7	50.0

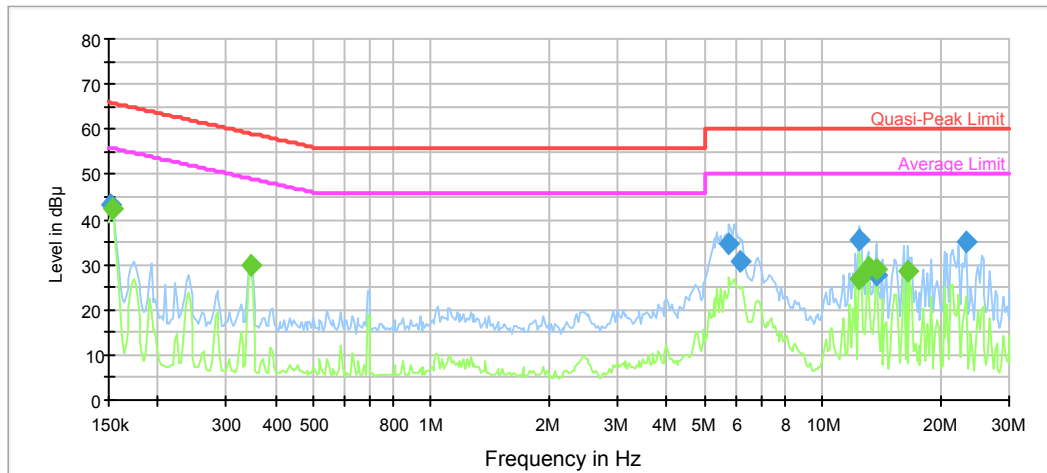AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.151500	43.3	9.000	N	11.1	22.6	65.9
5.781436	34.7	9.000	N	9.8	25.3	60.0
6.137111	30.8	9.000	N	9.8	29.2	60.0
12.438887	35.6	9.000	N	9.9	24.4	60.0
13.740269	27.8	9.000	N	9.9	32.2	60.0
23.282417	34.9	9.000	N	10.0	25.1	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153015	42.4	9.000	N	11.1	13.4	55.8
0.346009	29.7	9.000	N	10.0	19.4	49.1
12.438887	26.9	9.000	N	9.9	23.1	50.0
13.073395	29.2	9.000	N	9.9	20.8	50.0
13.740269	29.1	9.000	N	9.9	20.9	50.0
16.435388	28.3	9.000	N	9.9	21.7	50.0


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

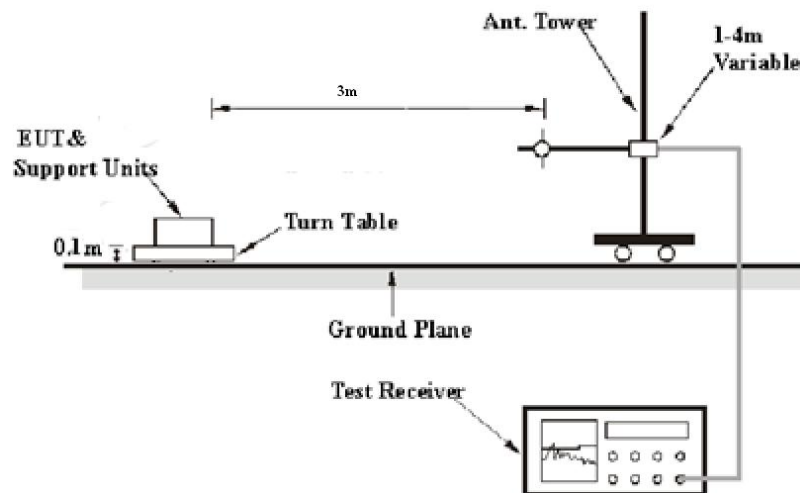

Above 1GHz:

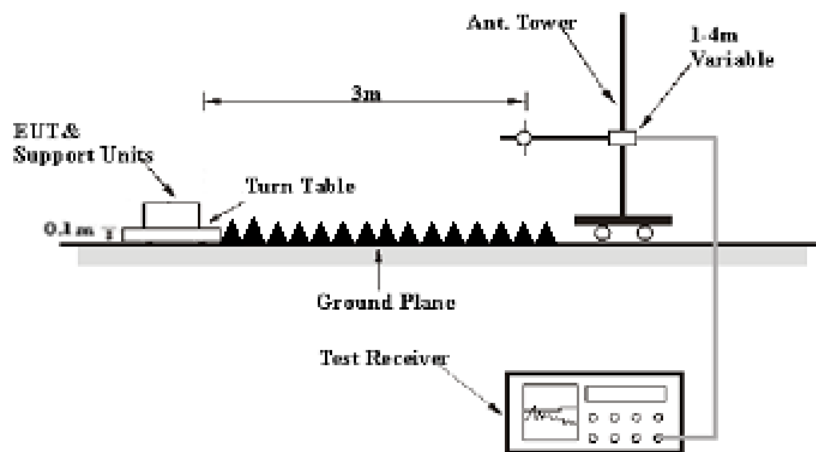

The radiated emission below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, during the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2019-06-26	2020-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	27.1°C	28.1°C
Relative Humidity:	38%	60%
ATM Pressure:	100.2kPa	100.6kPa
Tester:	Neil Liao	Neil Liao
Test Date:	2019-10-23	2019-10-21


Test Mode: Transmitting

1) 30MHz-1GHz (GFSK low channel was the worst)

Horizontal:

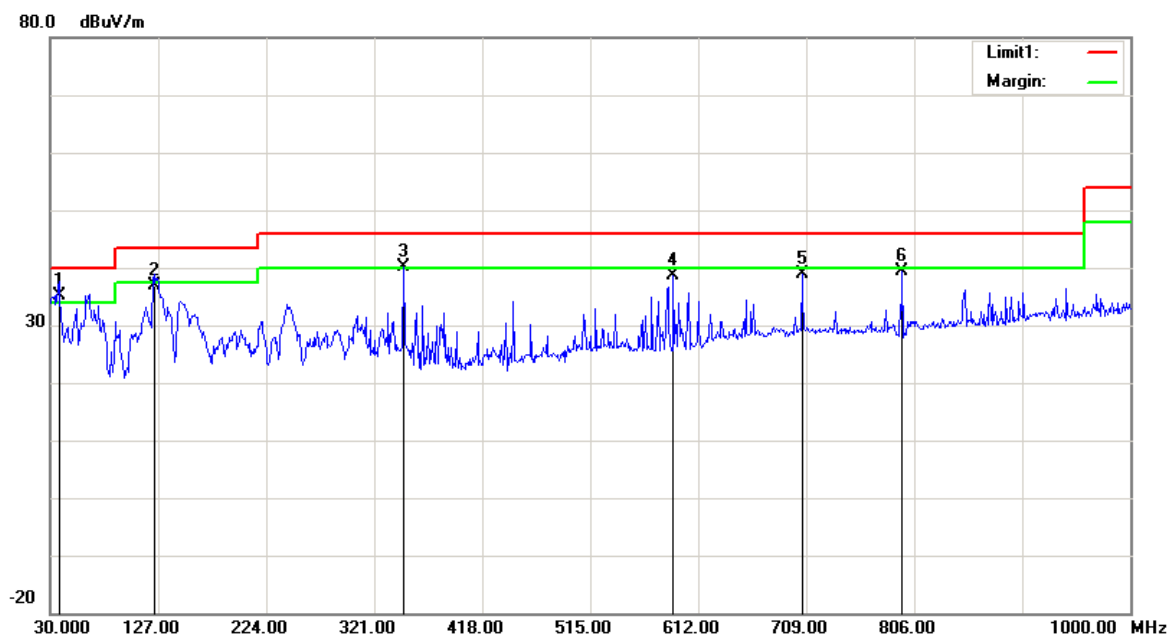

Frequency (MHz)	Receiver Reading (dBμV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
37.7600	39.27	QP	-4.22	35.05	40.00	4.95
123.1200	41.35	peak	-4.57	36.78	43.50	6.72
347.1900	43.30	QP	-3.15	40.15	46.00	5.85
589.6900	37.68	peak	0.84	38.52	46.00	7.48
705.1200	35.72	peak	3.18	38.90	46.00	7.10
795.3300	35.16	peak	4.28	39.44	46.00	6.56

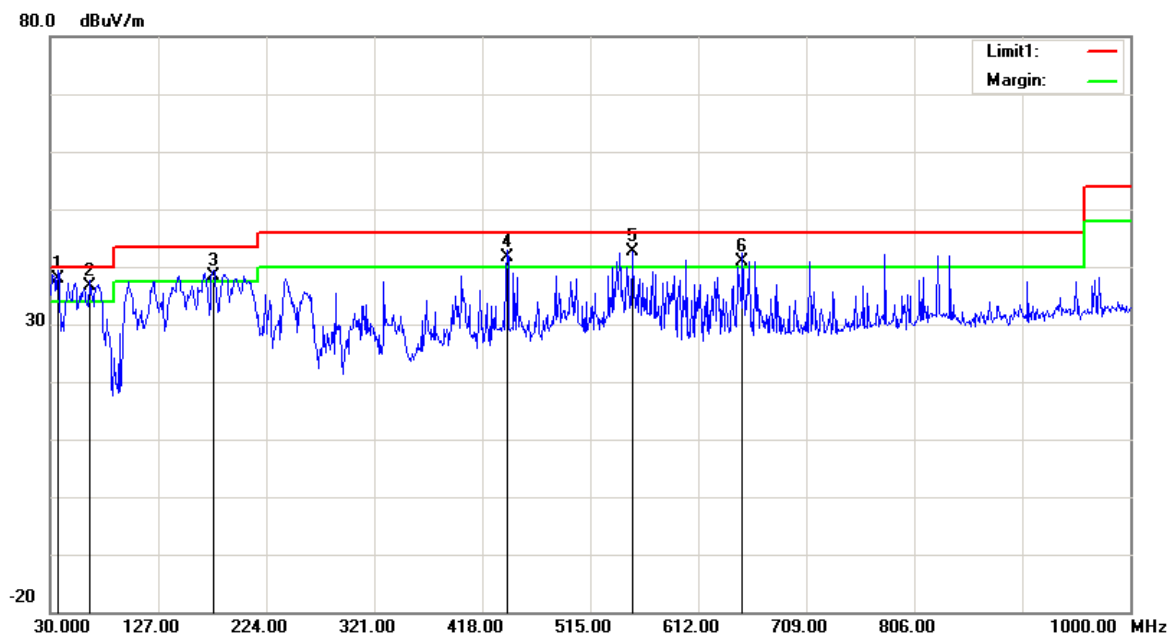Vertical:

Frequency (MHz)	Receiver Reading (dB μ V)	Remark	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
36.7900	41.23	QP	-3.38	37.85	40.00	2.15
65.8900	48.12	QP	-11.60	36.52	40.00	3.48
176.4700	45.32	QP	-6.93	38.39	43.50	5.11
440.3100	42.77	QP	-1.22	41.55	46.00	4.45
552.8300	42.34	QP	0.36	42.70	46.00	3.30
651.7700	38.79	QP	2.12	40.91	46.00	5.09

2)1GHz-25GHz:**BDR(GFSK) mode was the worst**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2390.00	24.50	PK	V	28.08	1.80	0.00	54.38	74.00	19.62
2390.00	12.51	AV	V	28.08	1.80	0.00	42.39	54.00	11.61
4804.00	58.94	PK	V	32.91	3.17	37.20	57.82	74.00	16.18
4804.00	48.18	AV	V	32.91	3.17	37.20	47.06	54.00	6.94
7206.00	59.03	PK	V	35.74	4.82	37.23	62.36	74.00	11.64
7206.00	46.58	AV	V	35.74	4.82	37.23	49.91	54.00	4.09
Middle Channel: 2441 MHz									
4882.00	54.07	PK	V	33.06	3.27	37.21	53.19	74.00	20.81
4882.00	42.98	AV	V	33.06	3.27	37.21	42.10	54.00	11.90
7323.00	58.27	PK	V	36.04	4.62	37.38	61.55	74.00	12.45
7323.00	45.69	AV	V	36.04	4.62	37.38	48.97	54.00	5.03
High Channel: 2480 MHz									
2483.50	33.31	PK	V	28.27	1.84	0.00	63.42	74.00	10.58
2483.50	13.21	AV	V	28.27	1.84	0.00	43.32	54.00	10.68
4960.00	53.46	PK	V	33.22	3.23	37.25	52.66	74.00	21.34
4960.00	42.33	AV	V	33.22	3.23	37.25	41.53	54.00	12.47
7440.00	56.12	PK	V	36.34	4.41	37.52	59.35	74.00	14.65
7440.00	43.69	AV	V	36.34	4.41	37.52	46.92	54.00	7.08

π/4-DQPSK




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2390.00	27.52	PK	V	28.08	1.80	0.00	57.40	74.00	16.60
2390.00	12.32	AV	V	28.08	1.80	0.00	42.20	54.00	11.80
4804.00	57.58	PK	V	32.91	3.17	37.20	56.46	74.00	17.54
4804.00	38.96	AV	V	32.91	3.17	37.20	37.84	54.00	16.16
7206.00	56.23	PK	V	35.74	4.82	37.23	59.56	74.00	14.44
7206.00	36.71	AV	V	35.74	4.82	37.23	40.04	54.00	13.96
Middle Channel: 2441 MHz									
4882.00	53.45	PK	V	33.06	3.27	37.21	52.57	74.00	21.43
4882.00	36.98	AV	V	33.06	3.27	37.21	36.10	54.00	17.90
7323.00	56.25	PK	V	36.04	4.62	37.38	59.53	74.00	14.47
7323.00	37.11	AV	V	36.04	4.62	37.38	40.39	54.00	13.61
High Channel: 2480 MHz									
2483.50	27.98	PK	V	28.27	1.84	0.00	58.09	74.00	15.91
2483.50	14.32	AV	V	28.27	1.84	0.00	44.43	54.00	9.57
4960.00	53.17	PK	V	33.22	3.23	37.25	52.37	74.00	21.63
4960.00	37.84	AV	V	33.22	3.23	37.25	37.04	54.00	16.96
7440.00	54.54	PK	V	36.34	4.41	37.52	57.77	74.00	16.23
7440.00	35.82	AV	V	36.34	4.41	37.52	39.05	54.00	14.95

8-DPSK

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2390.00	26.61	PK	V	28.08	1.80	0.00	56.49	74.00	17.51
2390.00	12.34	AV	V	28.08	1.80	0.00	42.22	54.00	11.78
4804.00	57.63	PK	V	32.91	3.17	37.20	56.51	74.00	17.49
4804.00	37.69	AV	V	32.91	3.17	37.20	36.57	54.00	17.43
7206.00	56.13	PK	V	35.74	4.82	37.23	59.46	74.00	14.54
7206.00	36.56	AV	V	35.74	4.82	37.23	39.89	54.00	14.11
Middle Channel: 2441 MHz									
4882.00	53.85	PK	V	33.06	3.27	37.21	52.97	74.00	21.03
4882.00	36.21	AV	V	33.06	3.27	37.21	35.33	54.00	18.67
7323.00	56.26	PK	V	36.04	4.62	37.38	59.54	74.00	14.46
7323.00	36.81	AV	V	36.04	4.62	37.38	40.09	54.00	13.91
High Channel: 2480 MHz									
2483.50	28.46	PK	V	28.27	1.84	0.00	58.57	74.00	15.43
2483.50	14.06	AV	V	28.27	1.84	0.00	44.17	54.00	9.83
4960.00	53.47	PK	V	33.22	3.23	37.25	52.67	74.00	21.33
4960.00	36.11	AV	V	33.22	3.23	37.25	35.31	54.00	18.69
7440.00	53.94	PK	V	36.34	4.41	37.52	57.17	74.00	16.83
7440.00	35.27	AV	V	36.34	4.41	37.52	38.50	54.00	15.50




Worst plots (GFSK High channel was the worst)
Horizontal

Fundamental
Test with Band
Rejection Filter

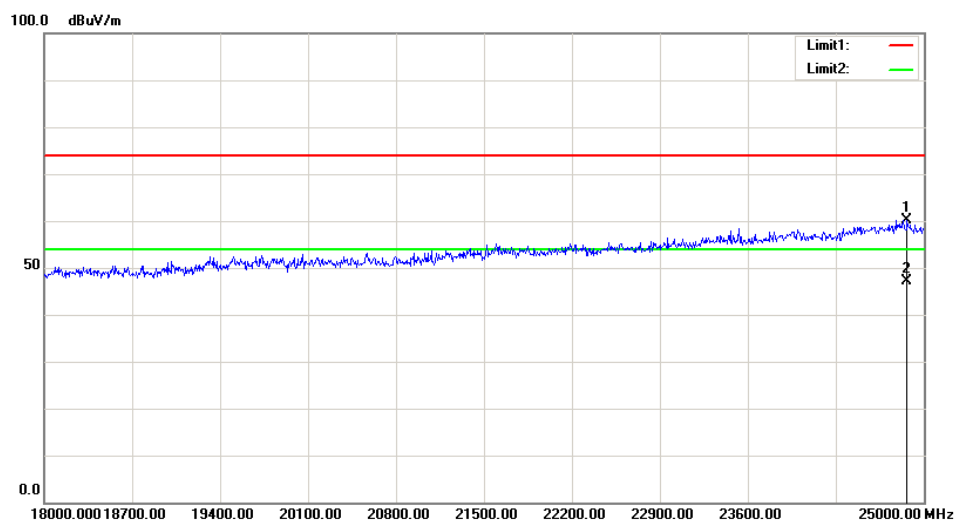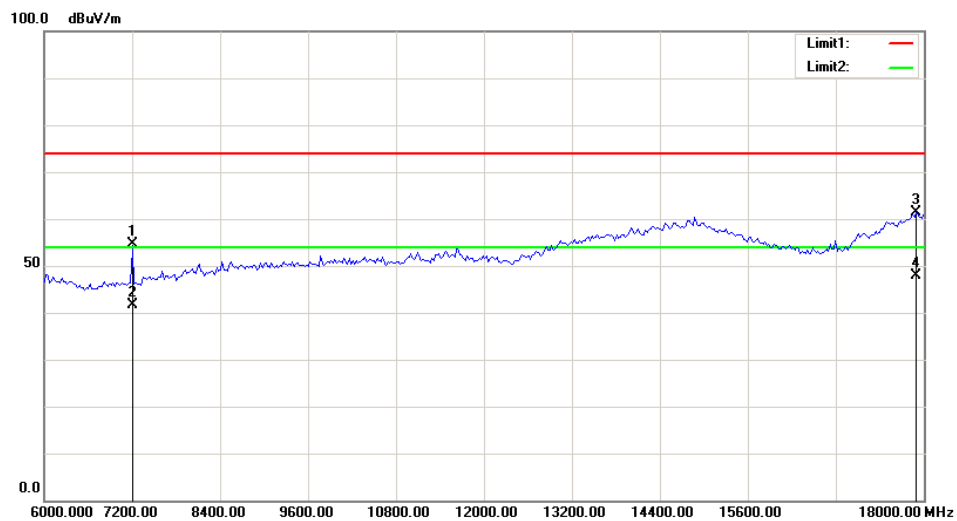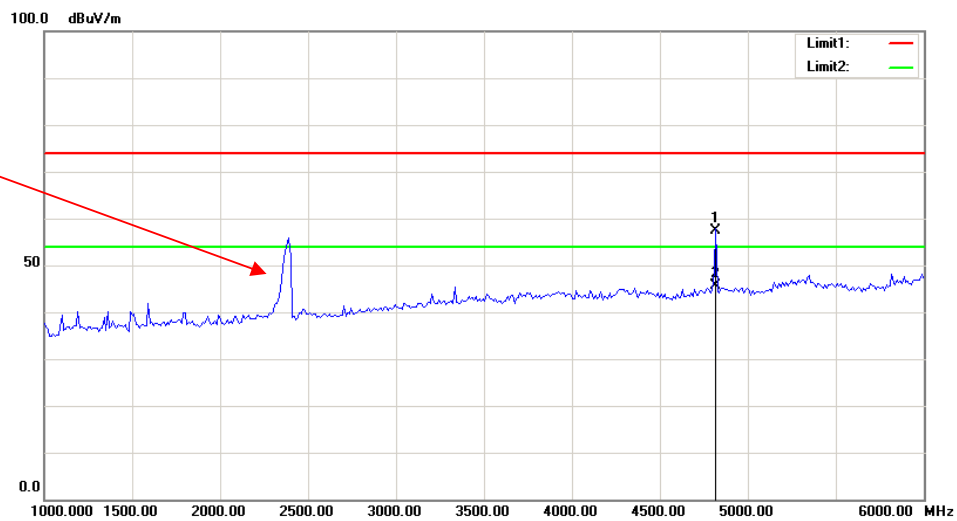

Vertical

Fundamental
Test with Band
Rejection Filter

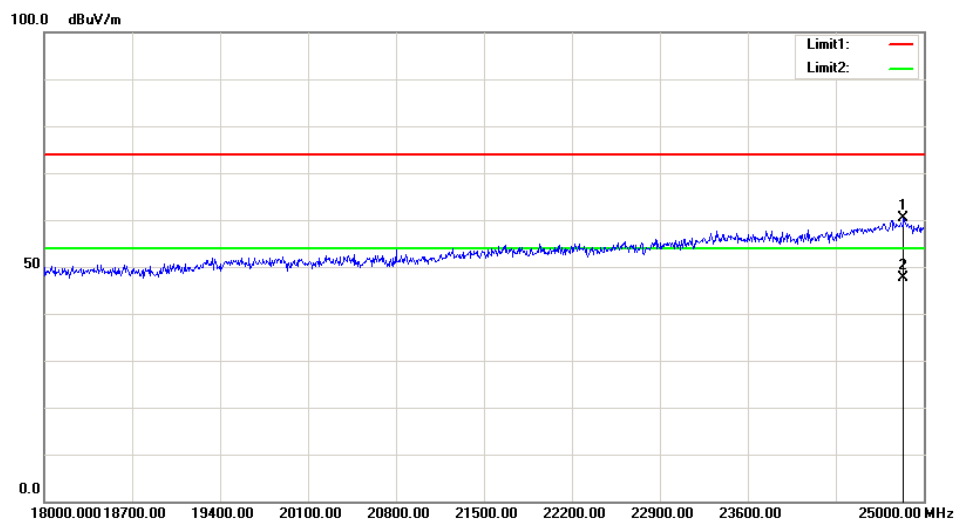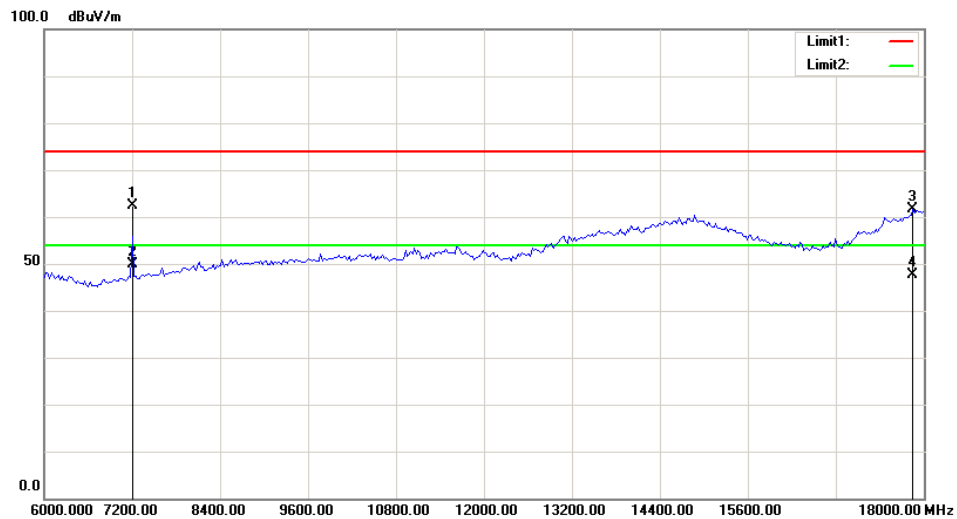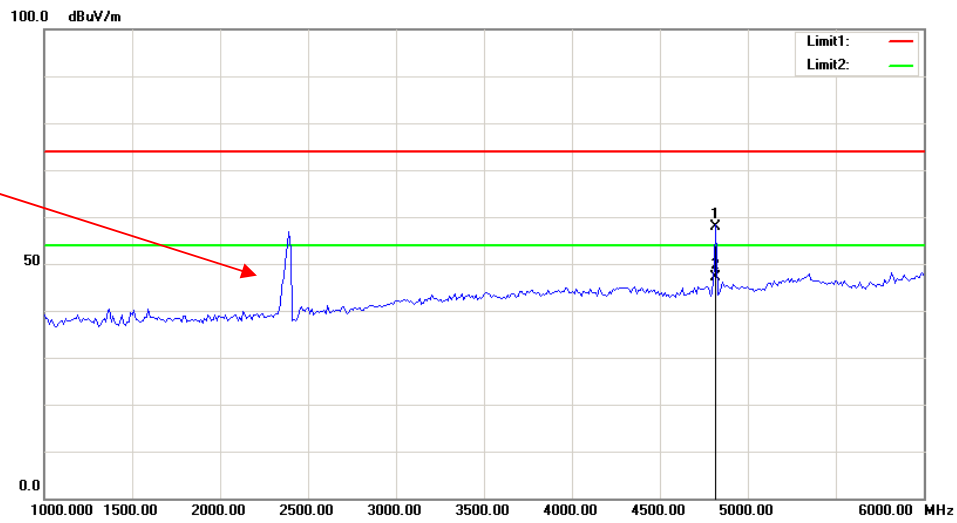

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	23.6°C
Relative Humidity:	61%
ATM Pressure:	100.1kPa
Tester:	Elena Lei
Test Date:	2019-07-16

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.000	0.68
	Middle	2441	1.000	0.67
	High	2480	1.000	0.68
EDR ($\pi/4$ -DQPSK)	Low	2402	1.004	0.88
	Middle	2441	1.012	0.89
	High	2480	0.992	0.89
EDR (8DPSK)	Low	2402	1.032	0.92
	Middle	2441	0.984	0.91
	High	2480	0.980	0.90


Note: Limit = $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

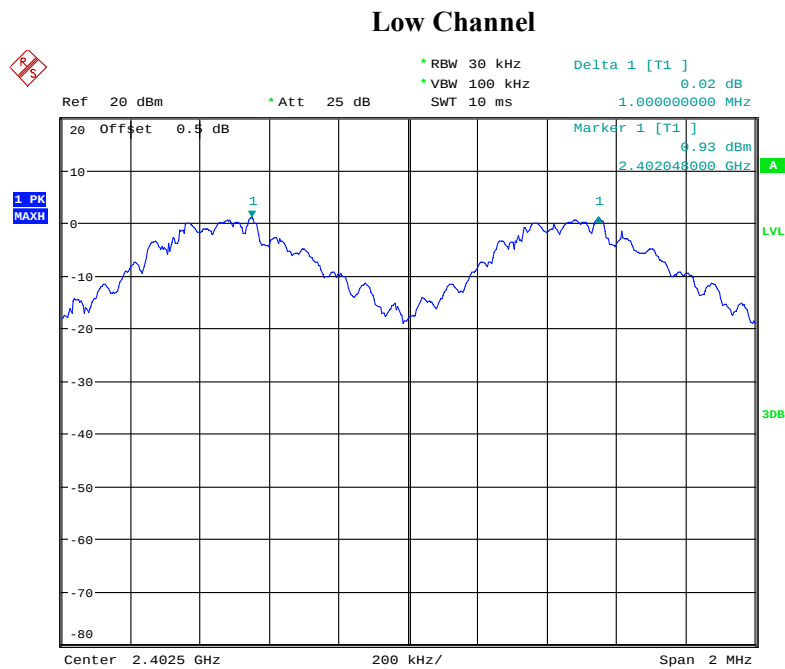


Date: 16.JUL.2019 11:07:20

Middle Channel

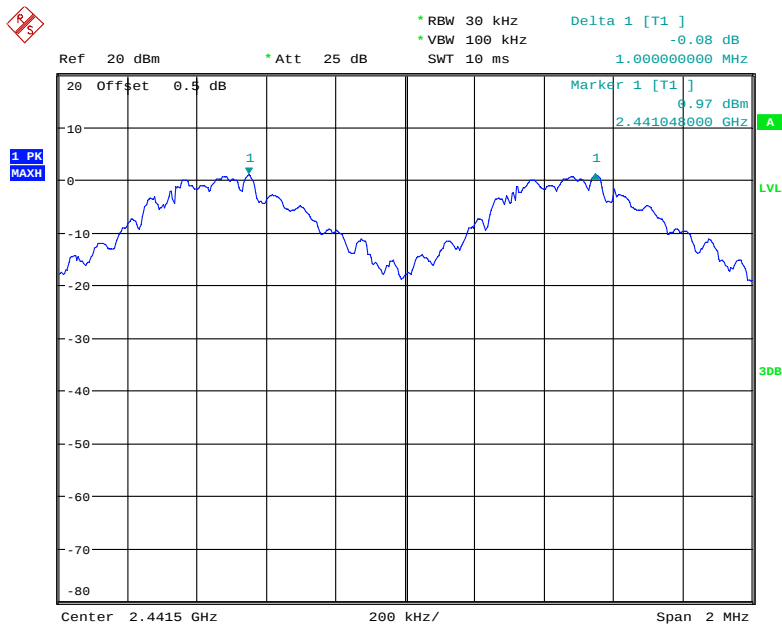


Date: 16.JUL.2019 11:07:56


High Channel

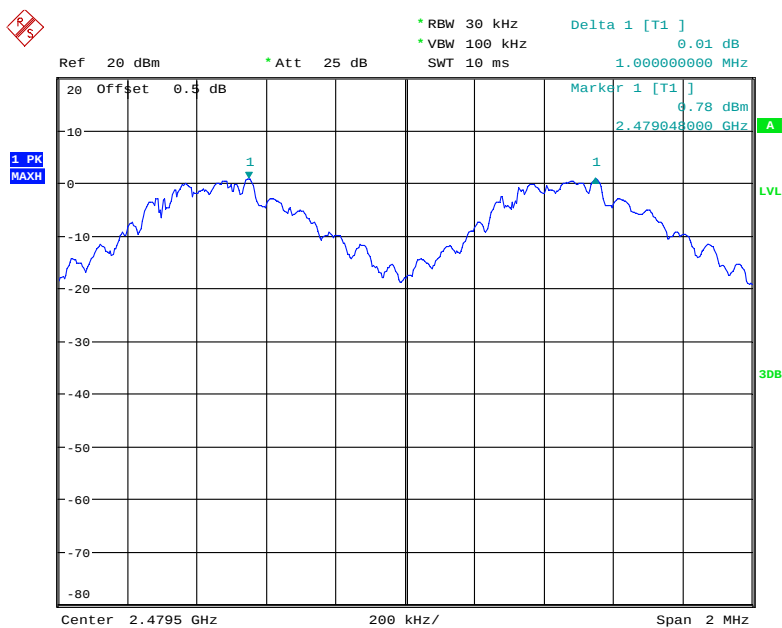


Date: 16.JUL.2019 11:06:48

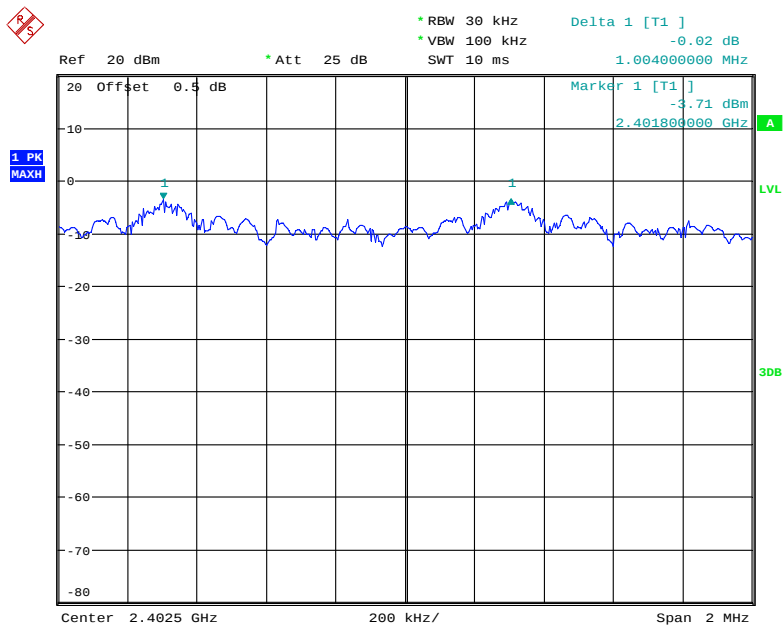*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**


Date: 16.JUL.2019 11:04:30

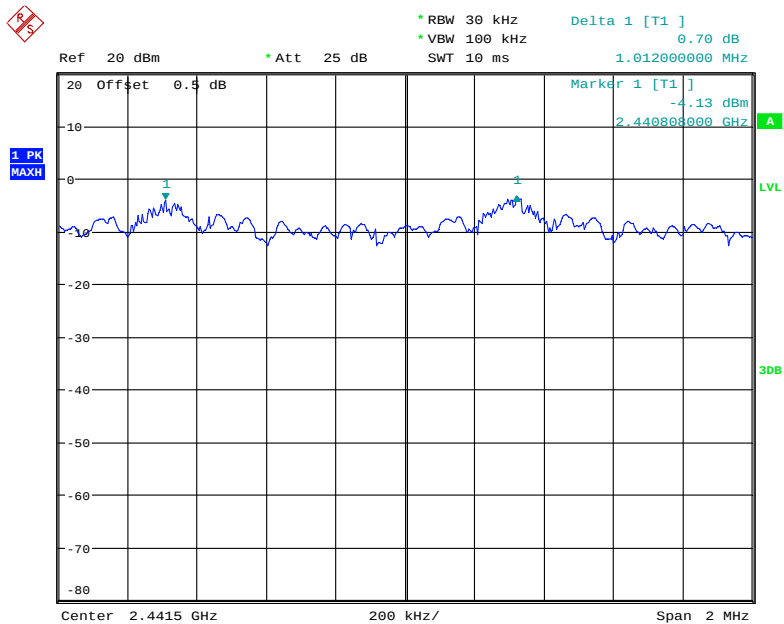Middle Channel

Date: 16.JUL.2019 11:05:14

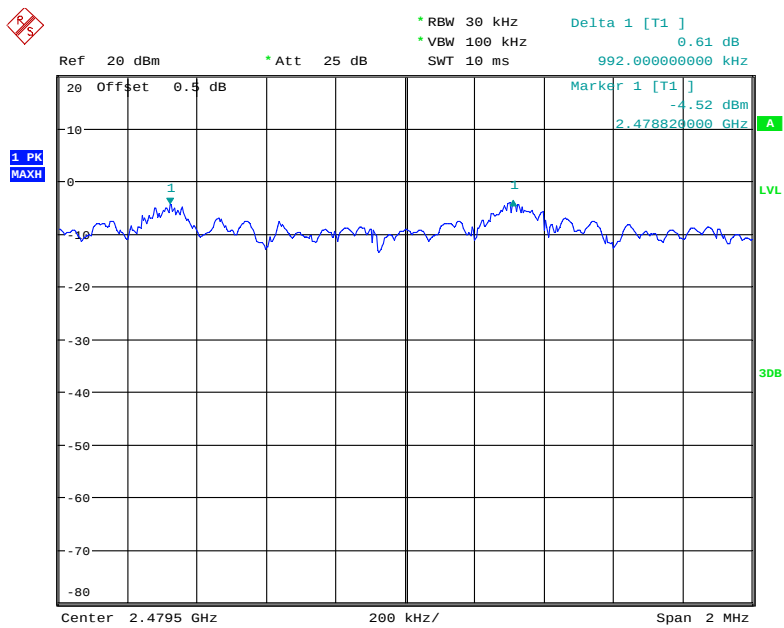
High Channel

Date: 16.JUL.2019 11:05:59

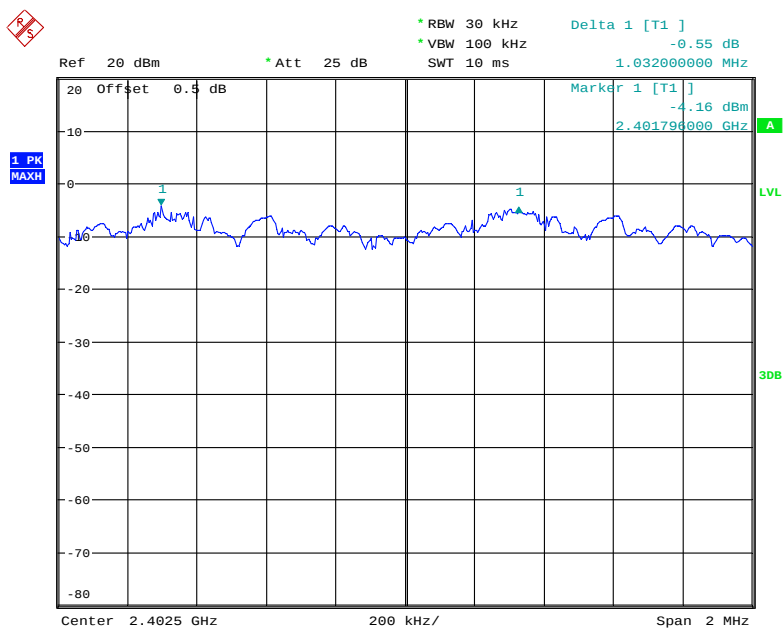*EDR Mode (8DPSK):***Low Channel**


Date: 16.JUL.2019 11:01:35

Middle Channel

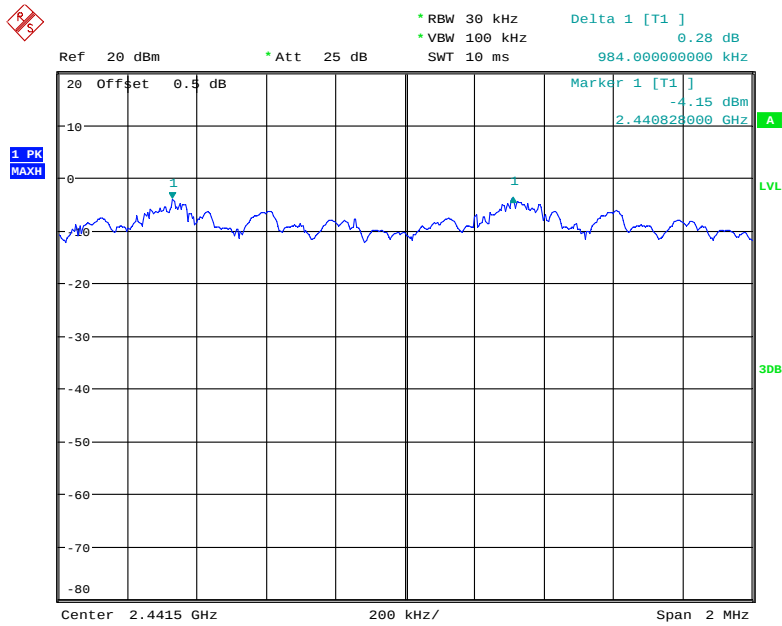

Date: 16.JUL.2019 11:02:34

High Channel

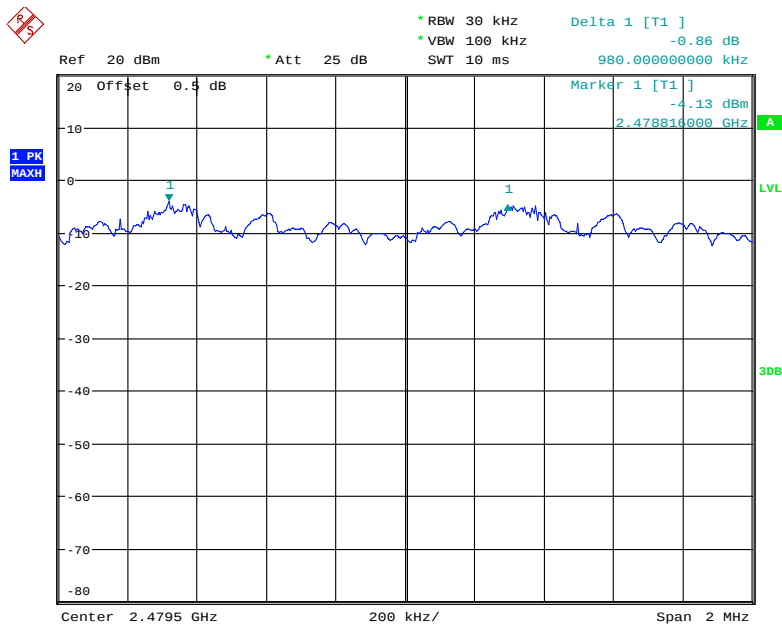

Date: 16.JUL.2019 11:03:30

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.6°C
Relative Humidity:	61%
ATM Pressure:	100.1kPa
Tester:	Elena Lei
Test Date:	2019-07-16


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	1.014
	Middle	2441	1.010
	High	2480	1.014
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.323
	Middle	2441	1.339
	High	2480	1.331
EDR Mode (8DPSK)	Low	2402	1.375
	Middle	2441	1.359
	High	2480	1.355

BDR Mode (GFSK):

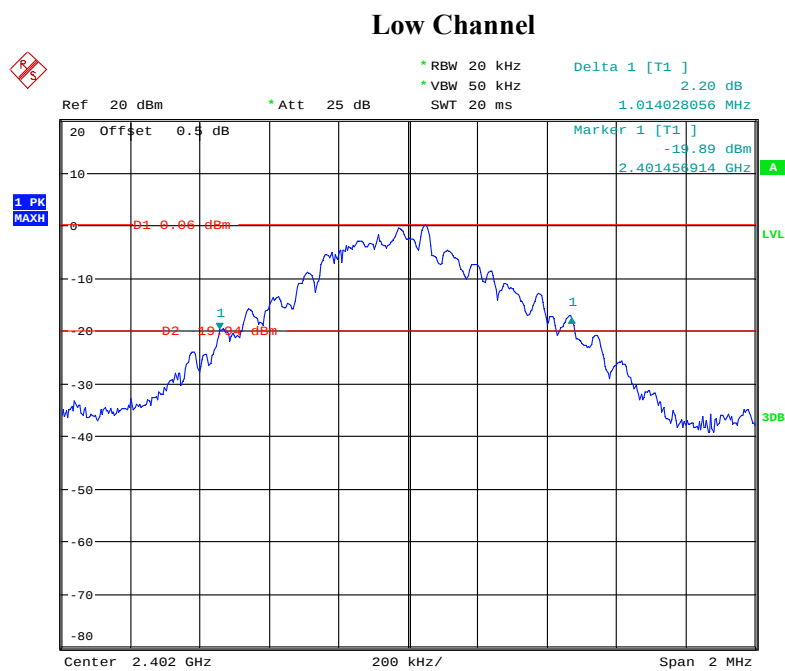


Date: 16.JUL.2019 10:40:36

Middle Channel

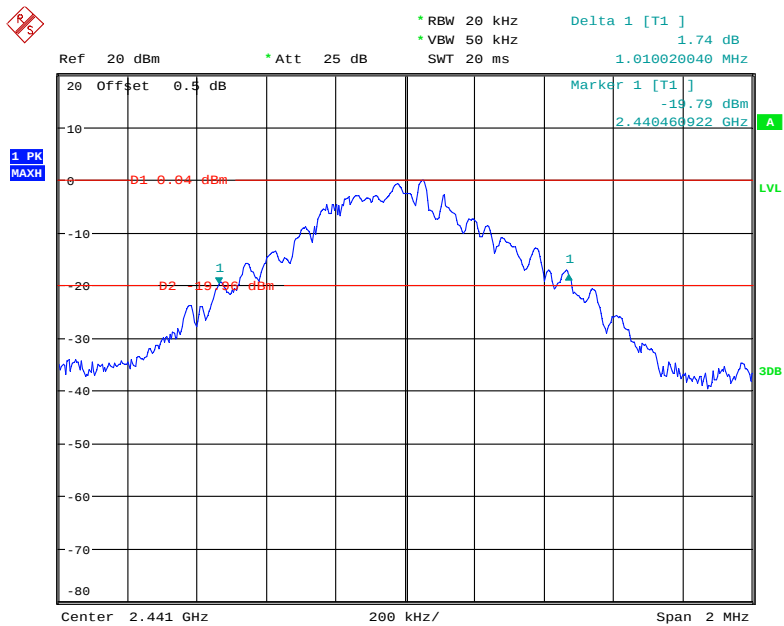


Date: 16.JUL.2019 10:44:17


High Channel

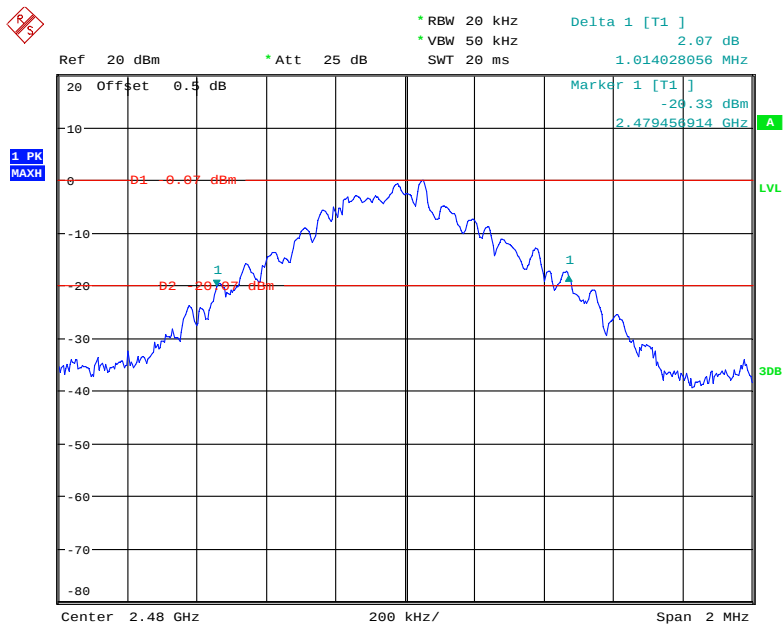

Date: 16.JUL.2019 10:42:34

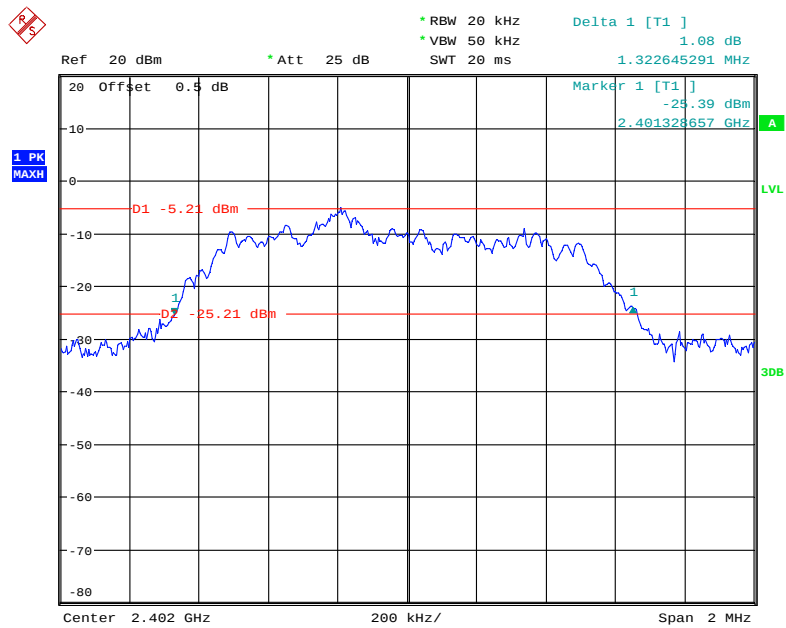
*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**

Date: 16.JUL.2019 10:48:20

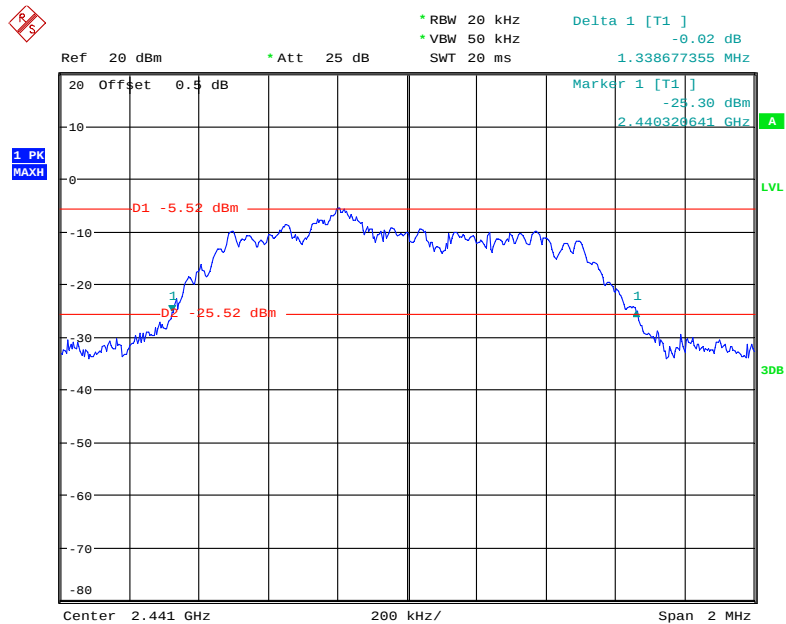Middle Channel

Date: 16.JUL.2019 10:46:14


High Channel

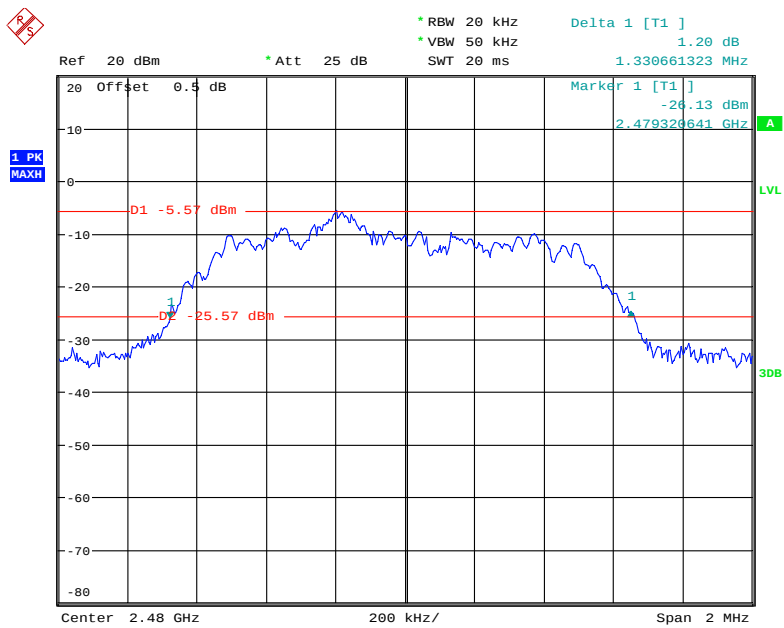

Date: 16.JUL.2019 10:50:56


EDR Mode (8DPSK):

Low Channel

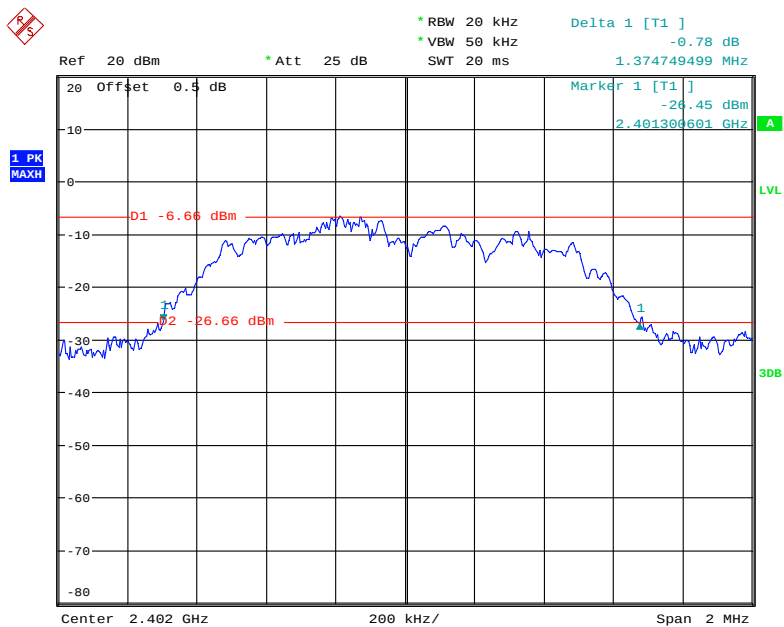


Date: 16.JUL.2019 10:56:24

Middle Channel

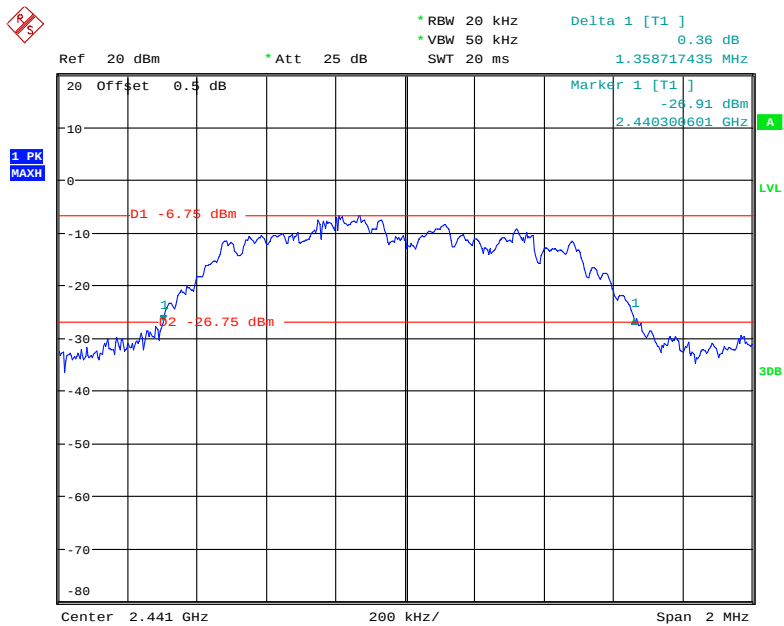

Date: 16.JUL.2019 10:58:44

High Channel

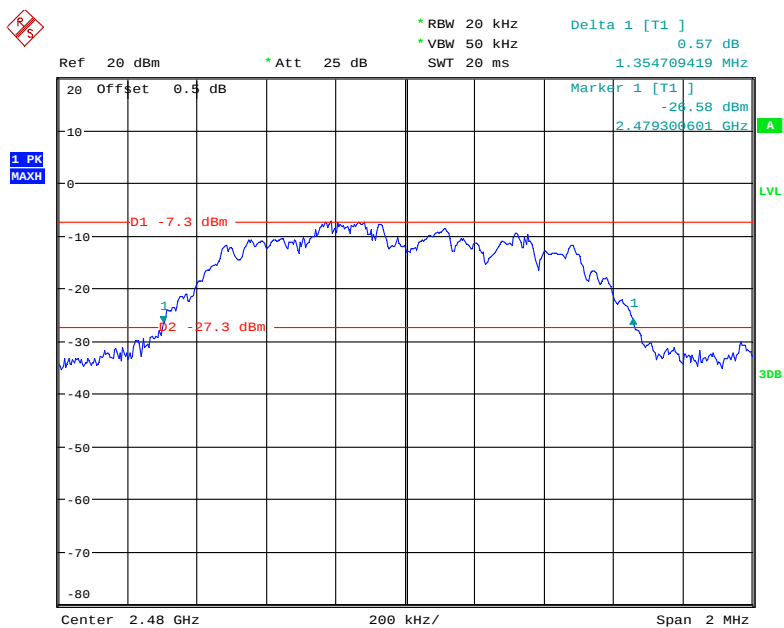

Date: 16.JUL.2019 10:53:43

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	23.6°C
Relative Humidity:	61%
ATM Pressure:	100.1kPa
Tester:	Elena Lei
Test Date:	2019-07-16

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

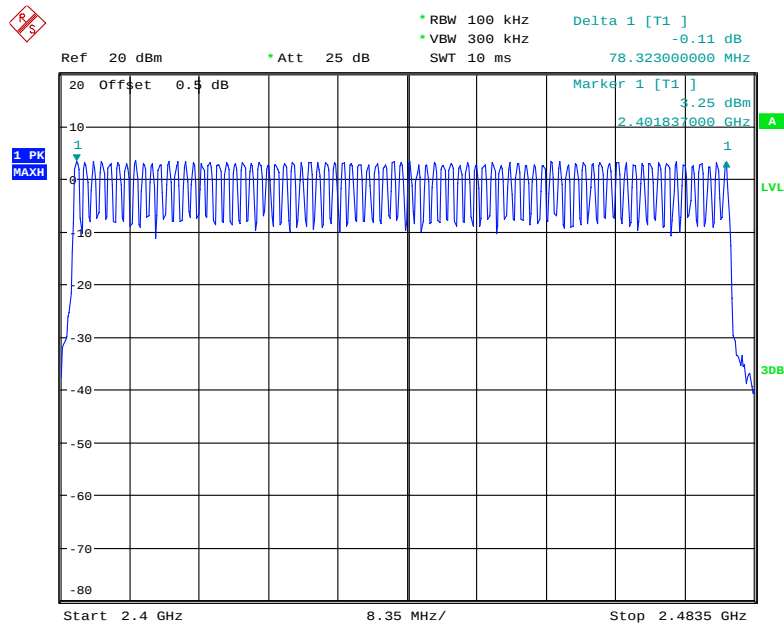GFSK


Date: 16.JUL.2019 11:10:33

$\pi/4$ -DQPSK

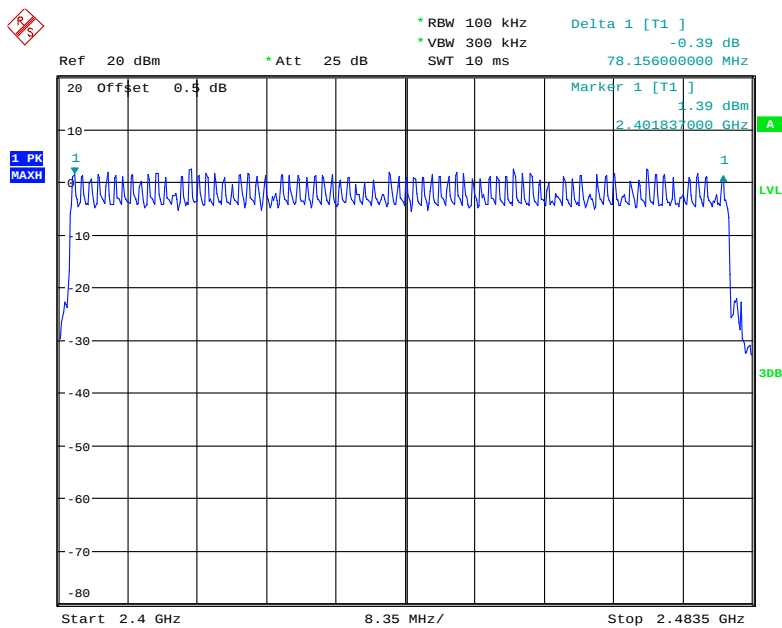

Date: 16.JUL.2019 11:20:41

8DPSK

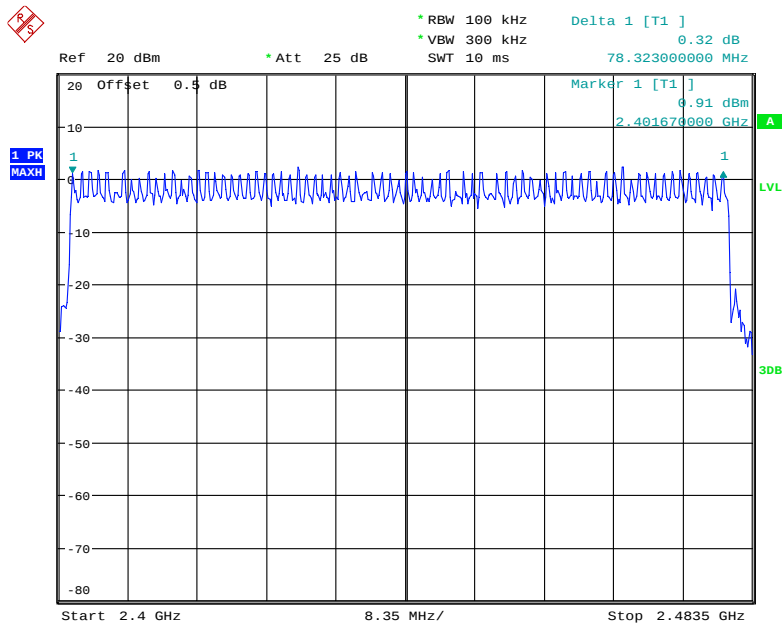

Date: 16.JUL.2019 11:28:46

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	23.6°C
Relative Humidity:	61%
ATM Pressure:	100.1kPa
Tester:	Elena Lei
Test Date:	2019-07-16

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Mode	Packet type	Channel	Frequency (MHz)	Puse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.407	0.130	0.4
	DH3	Middle	2441	1.605	0.257	
	DH5	Middle	2441	2.786	0.297	
$\pi/4$ DQPSK	2DH1	Middle	2441	0.399	0.128	
	2DH3	Middle	2441	1.581	0.253	
	2DH5	Middle	2441	2.806	0.299	
8DPSK	3DH1	Middle	2441	0.423	0.135	
	3DH3	Middle	2441	1.629	0.261	
	3DH5	Middle	2441	2.846	0.304	
Note: DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s						

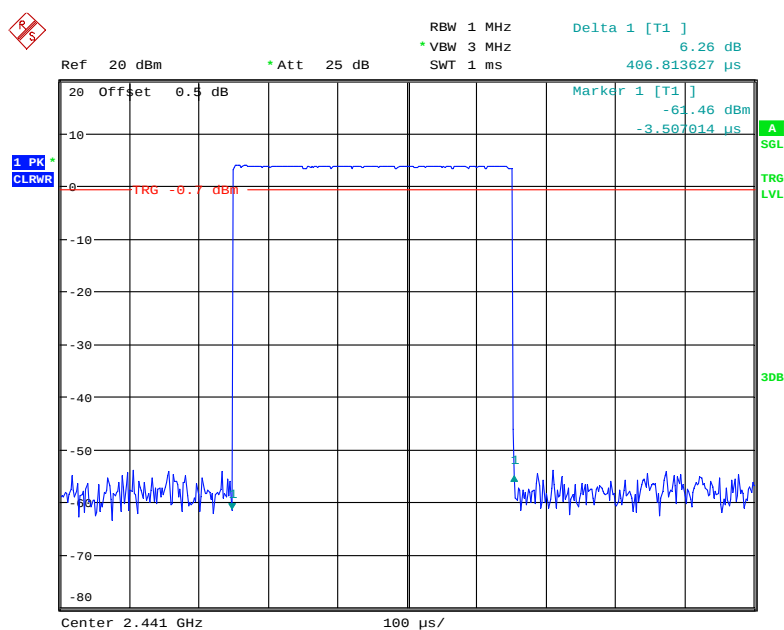*BDR Mode (GFSK):***DH1: Middle Channel**

Date: 16.JUL.2019 11:33:43

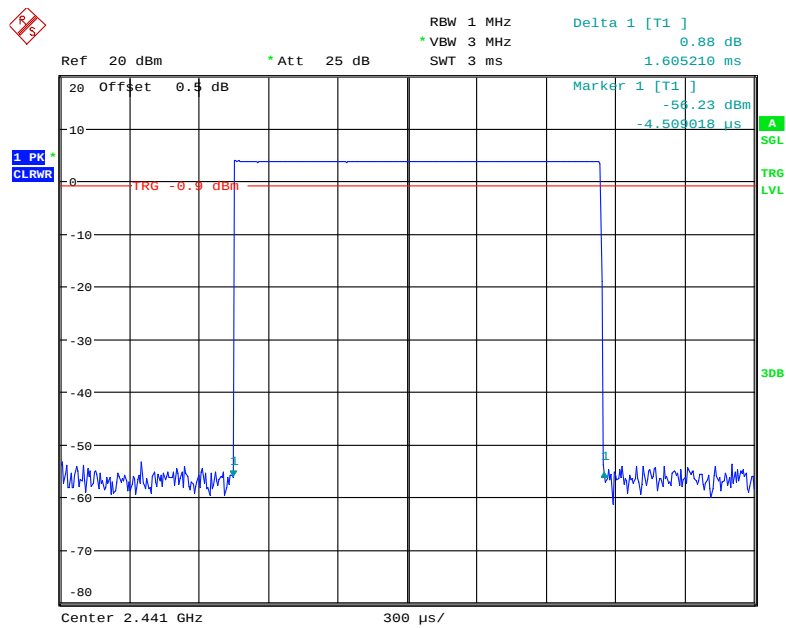DH3: Middle Channel


Date: 16.JUL.2019 11:34:09

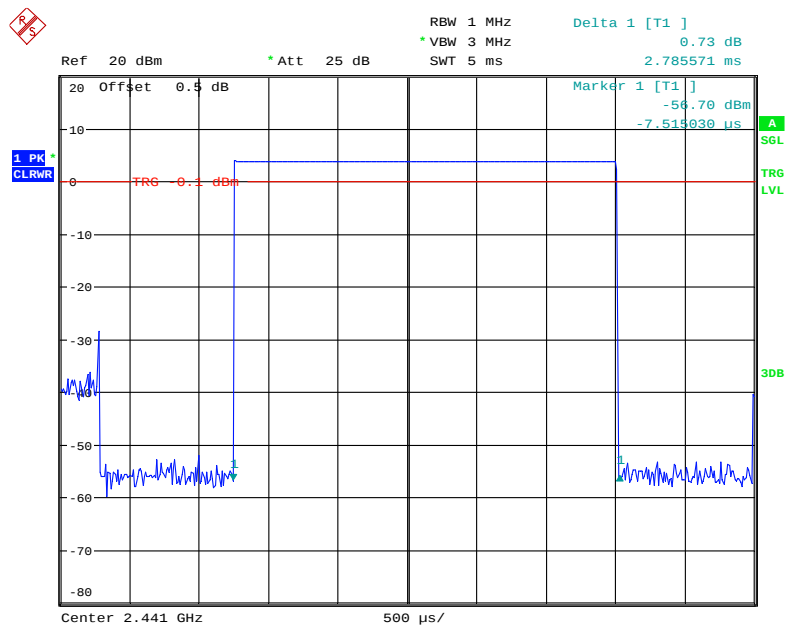DH5: Middle Channel

Date: 16.JUL.2019 11:34:58


EDR Mode ($\pi/4$ -DQPSK):

2DH1: Middle Channel

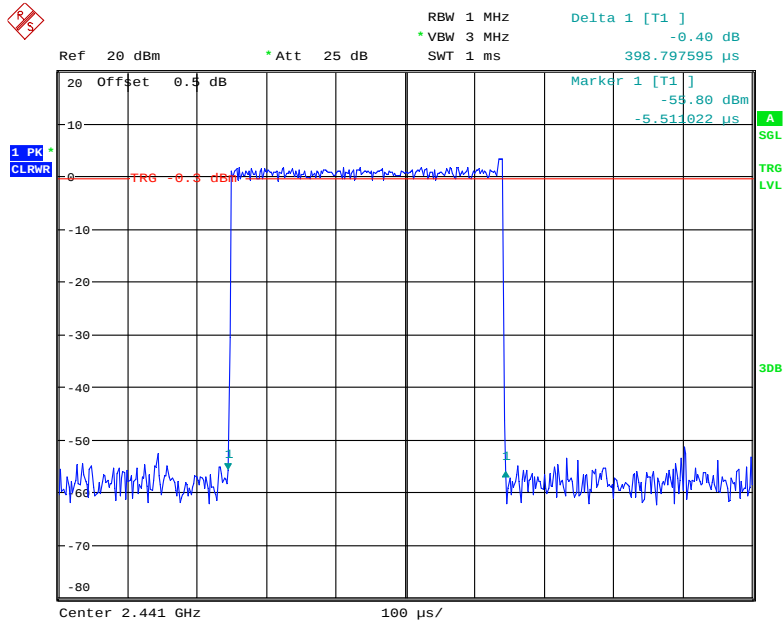


Date: 16.JUL.2019 11:32:12


2DH3: Middle Channel

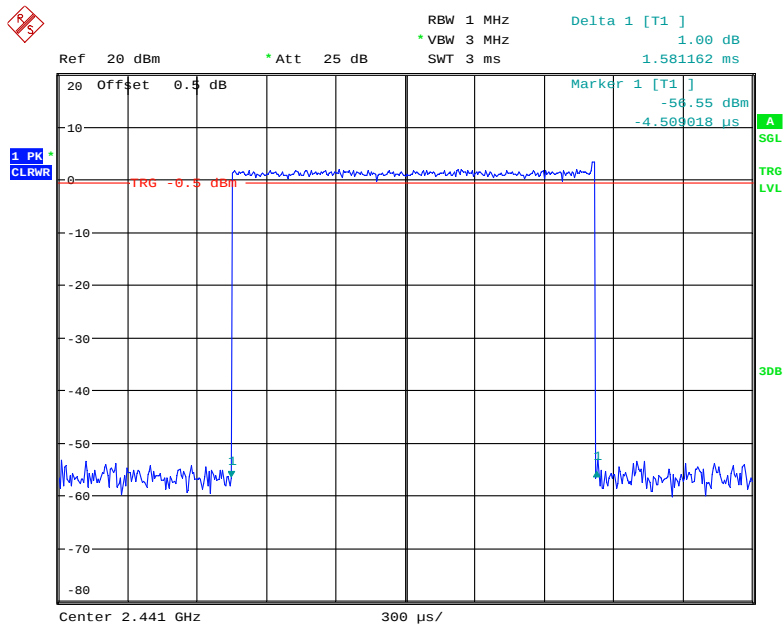


Date: 16.JUL.2019 11:32:42

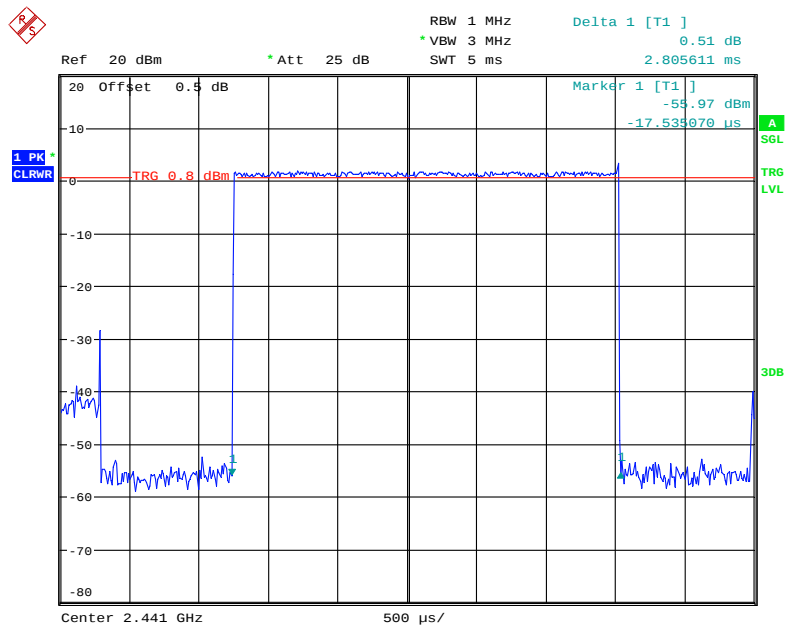2DH5: Middle Channel


Date: 16.JUL.2019 11:33:08

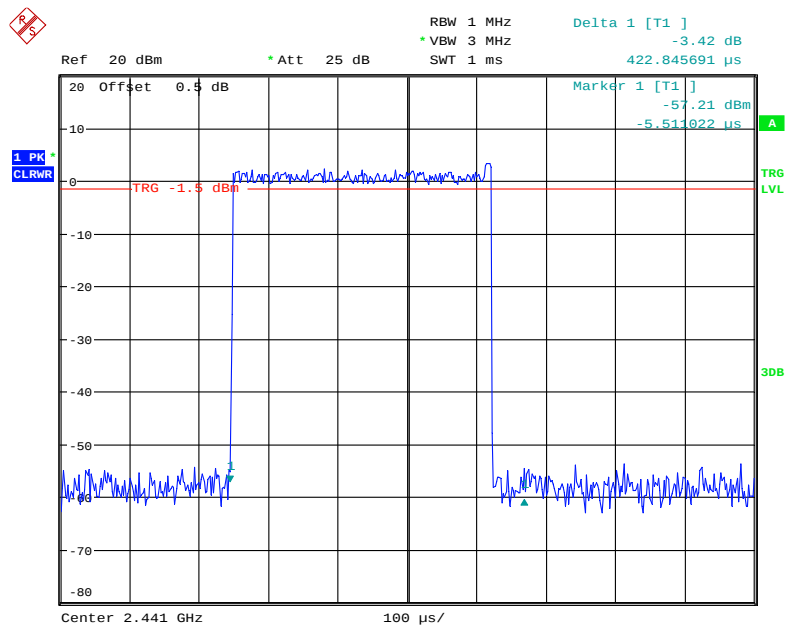*EDR Mode (8DPSK):***3DH1: Middle Channel**

Date: 16.JUL.2019 11:30:34

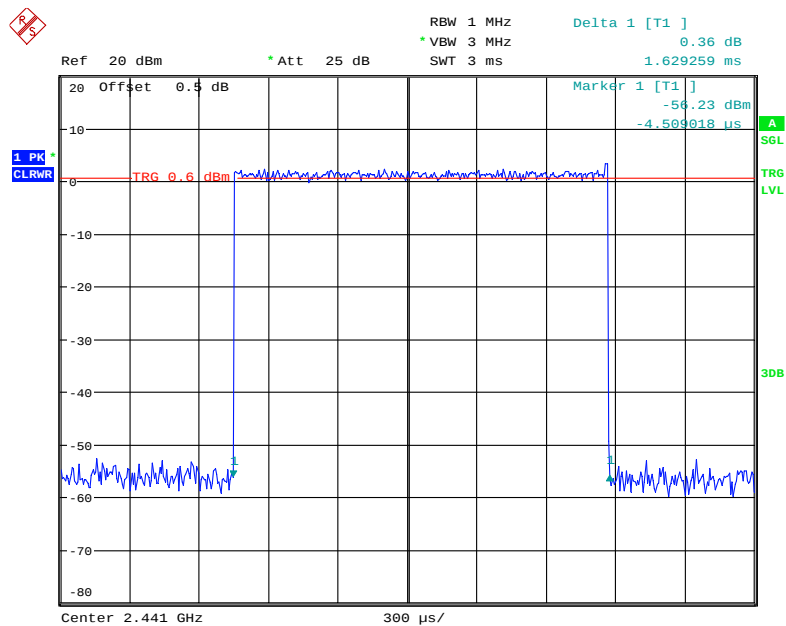3DH3: Middle Channel

Date: 16.JUL.2019 11:31:06

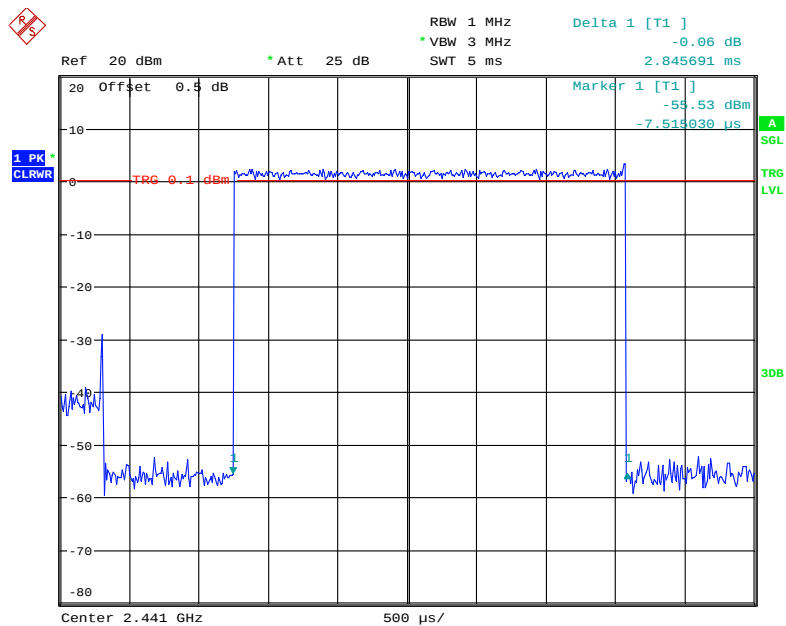3DH5: Middle Channel

Date: 16.JUL.2019 11:31:37

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05
narda	Attenuator	6dB	04270	2018-09-06	2019-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.6°C
Relative Humidity:	61%
ATM Pressure:	100.1kPa
Tester:	Elena Lei
Test Date:	2019-07-16

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	4.24	21
	2441	4.21	21
	2480	4.08	21
EDR Mode ($\pi/4$ -DQPSK)	2402	3.95	21
	2441	3.91	21
	2480	3.81	21
EDR Mode (8DPSK)	2402	3.98	21
	2441	3.93	21
	2480	3.81	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	23.6°C
Relative Humidity:	61%
ATM Pressure:	100.1kPa
Tester:	Elena Lei
Test Date:	2019-07-16

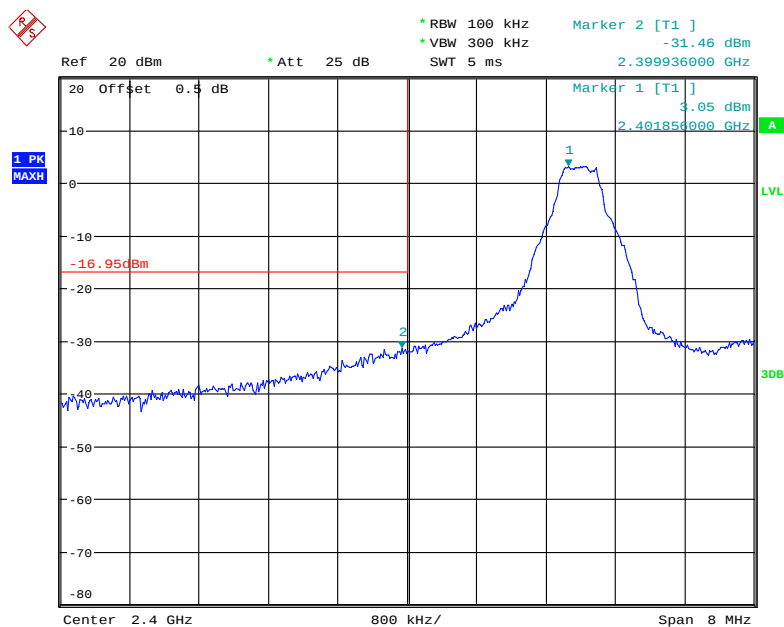Test Result: Compliance*Single Channel:**BDR Mode (GFSK):***Band Edge, Left Side**

Date: 16.JUL.2019 10:41:45


Band Edge, Right Side

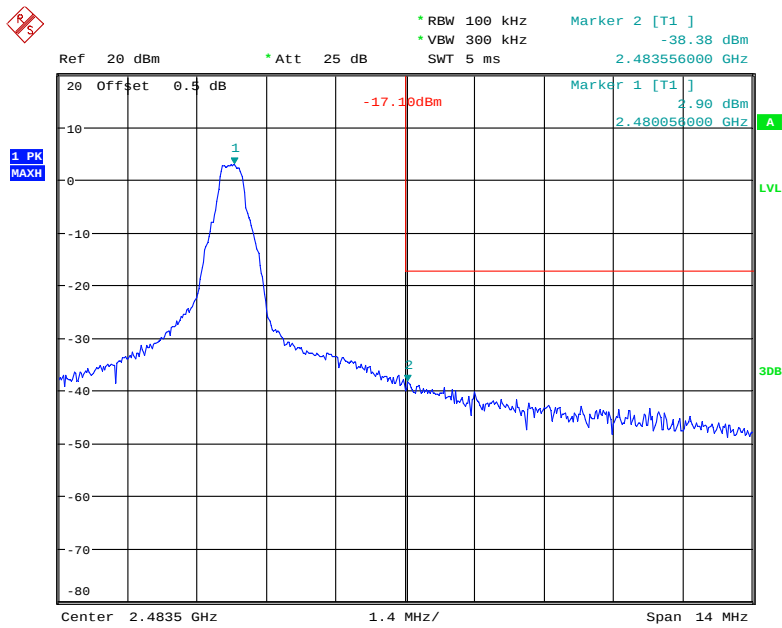

Date: 16.JUL.2019 10:43:39


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

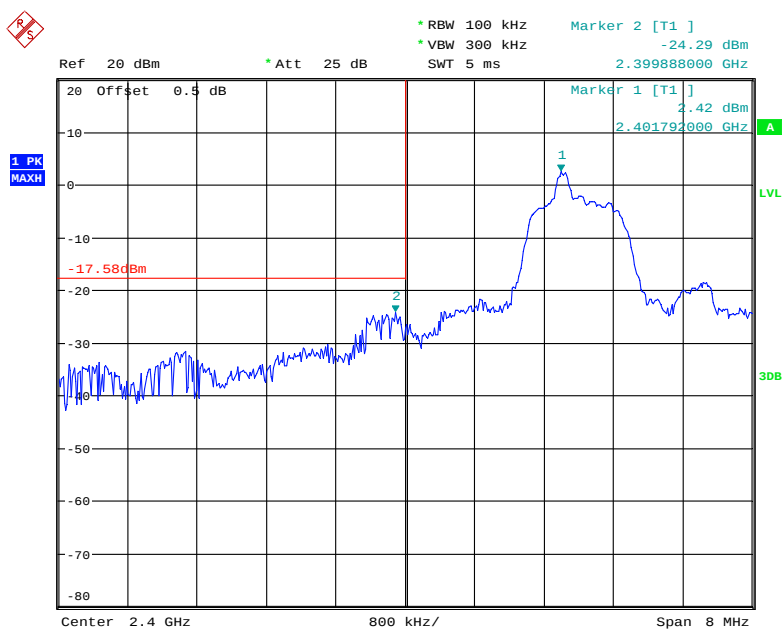

Date: 16.JUL.2019 10:50:17


Band Edge, Right Side

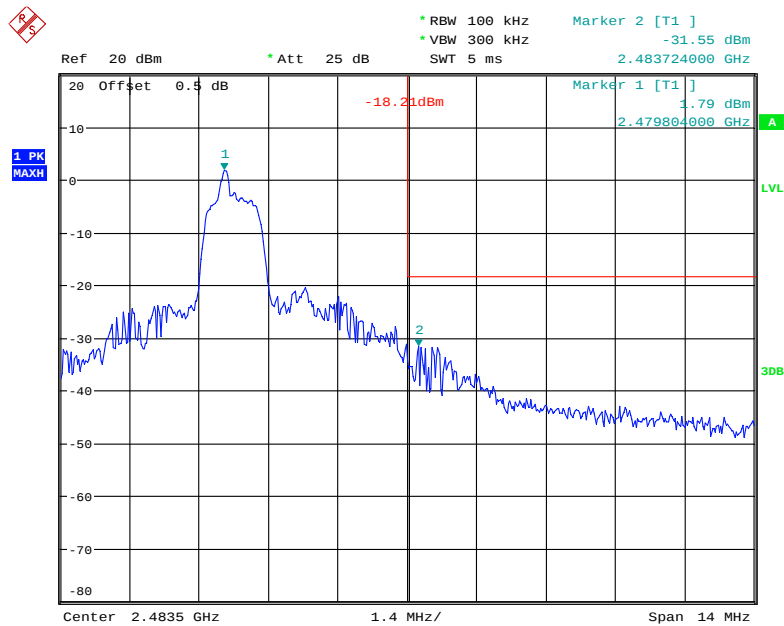


Date: 16.JUL.2019 10:52:57

EDR Mode (8DPSK):

Band Edge, Left Side

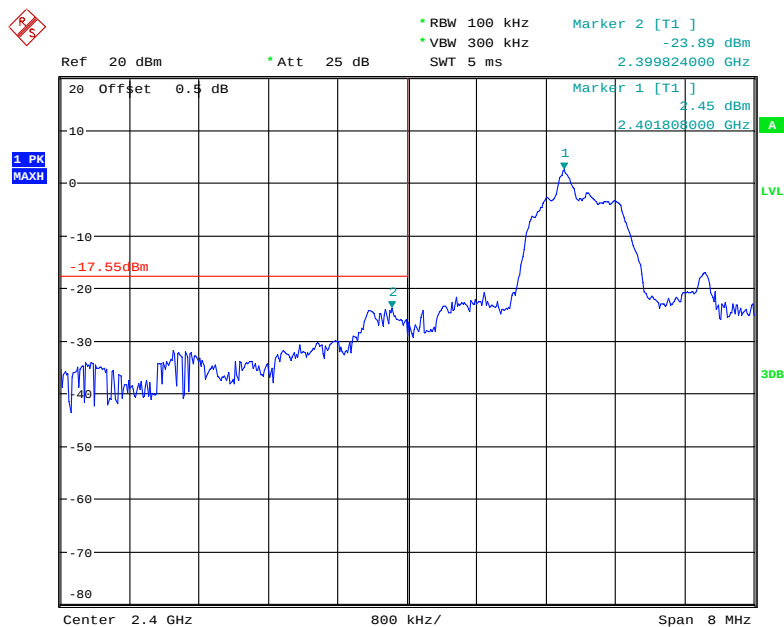


Date: 16.JUL.2019 10:58:09

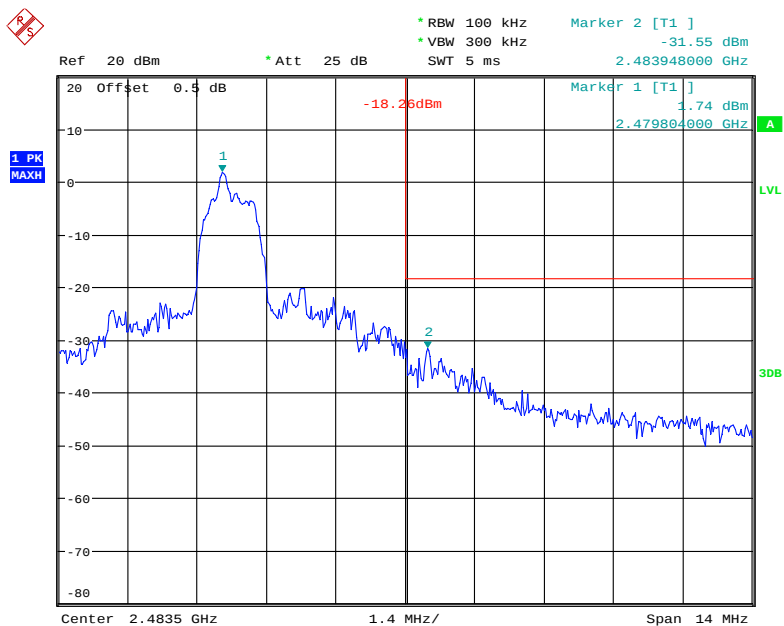Band Edge, Right Side


Date: 16.JUL.2019 10:55:45

*Hopping Mode,
EDR Mode (GFSK):*

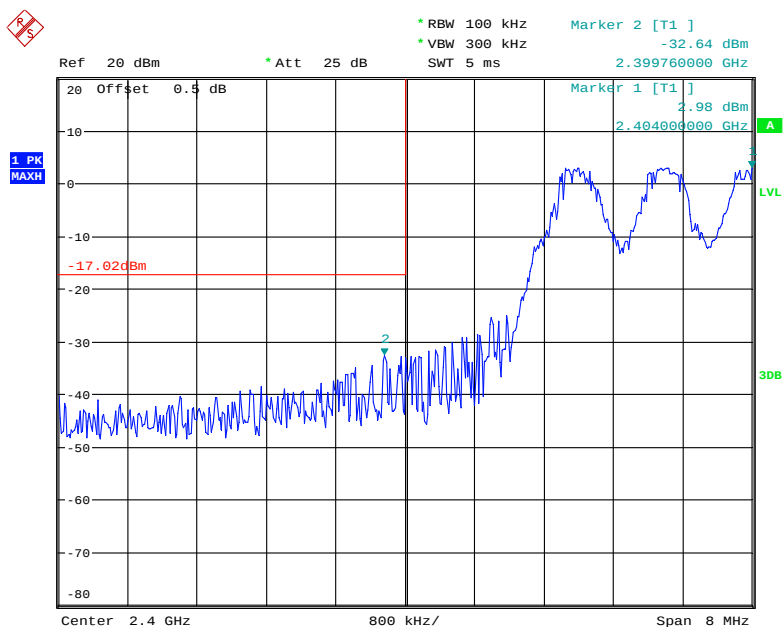Band Edge, Left Side

Date: 16.JUL.2019 11:37:14


Band Edge, Right Side

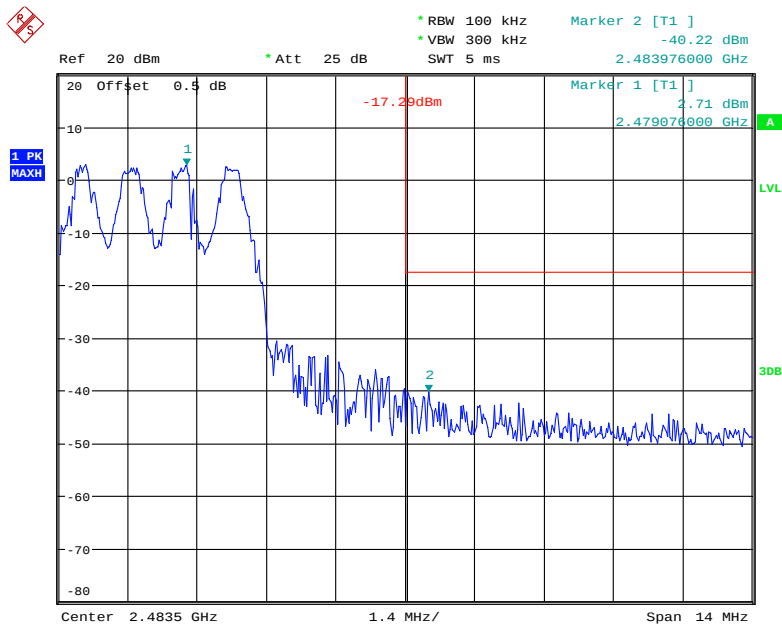

Date: 16.JUL.2019 11:38:35


BDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

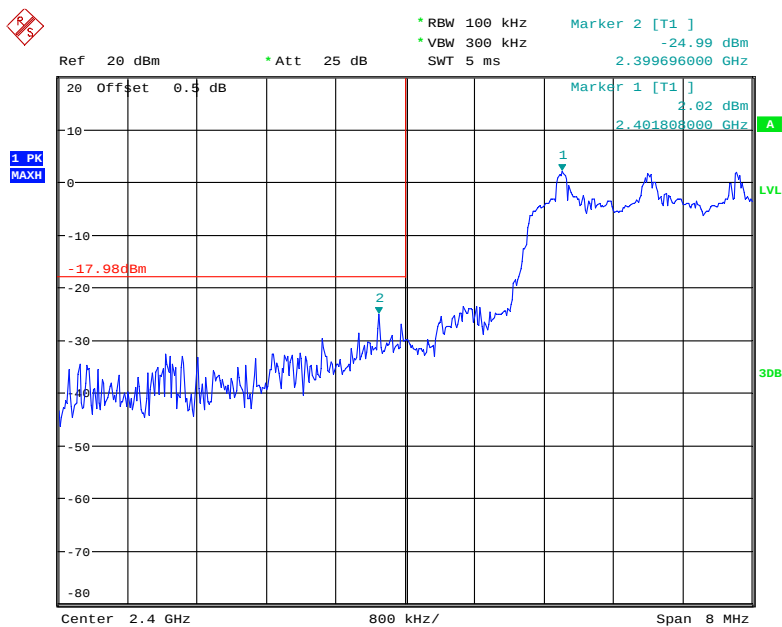

Date: 16.JUL.2019 11:41:39


Band Edge, Right Side

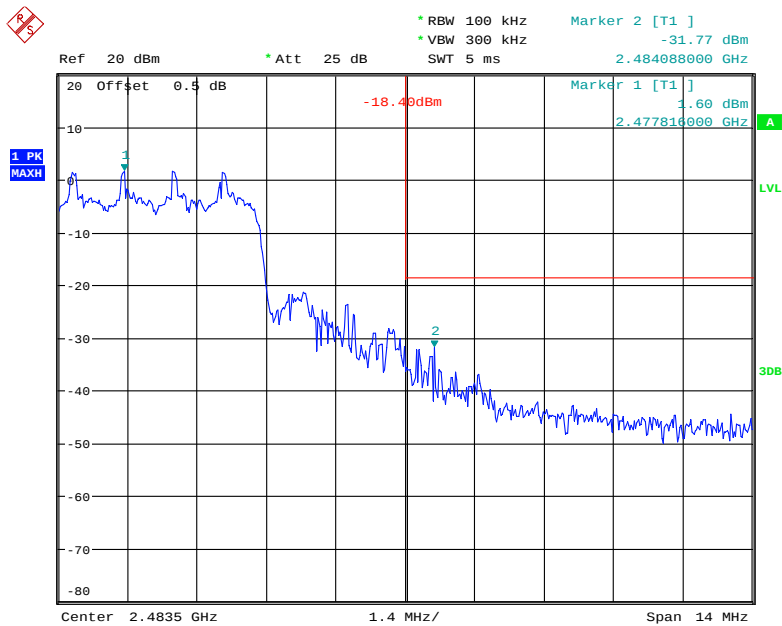

Date: 16.JUL.2019 11:40:51


BDR Mode (8DPSK):

Band Edge, Left Side

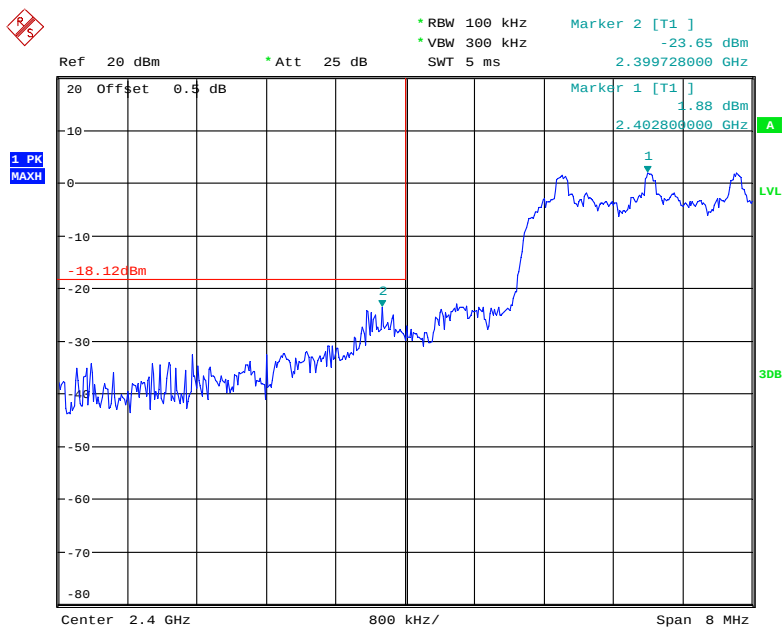

Date: 16.JUL.2019 11:44:50

Band Edge, Right Side

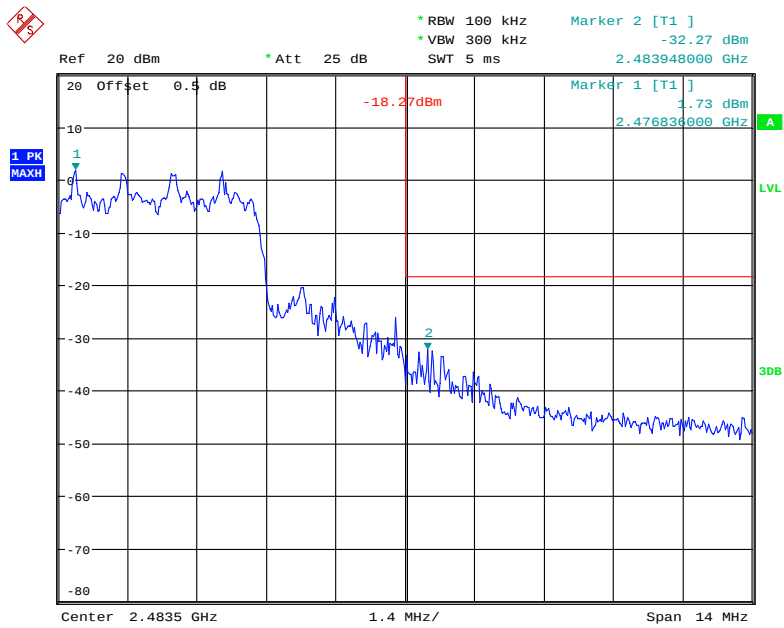

Date: 16.JUL.2019 11:46:03

**** END OF REPORT ****