



FCC RF Test Report

APPLICANT : FairPhone B.V.
EQUIPMENT : Fairphone (Gen.6)
BRAND NAME : Fairphone
MODEL NAME : FP6
FCC ID : 2AUWUFP6
STANDARD : 47 CFR Part 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Apr. 28, 2025 ~ Jun. 30, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	7
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Conducted Test	13
3.4 Conducted Output Power and EIRP	14
3.5 Peak-to-Average Ratio	15
3.6 Occupied Bandwidth	16
3.7 Conducted Band Edge	17
3.8 Conducted Spurious Emission	18
3.9 Frequency Stability	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission	22
5 LIST OF MEASURING EQUIPMENT	23
6 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG521107-01H	Rev. 01	Initial issue of report	Jul. 25, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n41, n38)	EIRP < 2Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])	PASS	Under limit 27.00 dB at 7626.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

FairPhone B.V.

Van Diemenstraat 200, 1013 CP,Amsterdam, The Netherlands

1.2 Manufacturer

FairPhone B.V.

Van Diemenstraat 200, 1013 CP,Amsterdam, The Netherlands

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Fairphone (Gen.6)
Brand Name	Fairphone
Model Name	FP6
FCC ID	2AUWUFP6
IMEI Code	Conducted : 123456789012345 Radiation : 355870094596159
HW Version	DVT2
SW Version	FP6.DEV.15.66.0
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz
Rx Frequency	5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz
Bandwidth	n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz / 50MHz n38: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz n41 : 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
SCS	15kHz for n7, 30kHz for n38/n41
Antenna Gain	<ANT4> n7: 0.8 dBi n38: 0.9 dBi n41: 1.5 dBi <ANT6> n7: -5.1 dBi n41: -5.1 dBi <ANT0> n41: -1.9 dBi <ANT5> n41: -0.4 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP are shown in the report, 5G NR n7/n38/n41 for Ant. 4.
2. The device supports two PAs for 5G NR n7 (main PA for SA mode, other PA support CA_n7A-n78A mode on ant6 only), both the PAs are full tested, the maximum power of main PA is higher than the other PA for n7, therefore, we chose higher power PA to calculate the EIRP and show in the report.
3. 5G NR n41 supports HPUE mode.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n7		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.3155	4M52G7D	0.2460	4M49W7D
10	2505.0 ~ 2565.0	0.3148	9M39G7D	0.2432	9M43W7D
15	2507.5 ~ 2562.5	0.3273	14M2G7D	0.2541	14M2W7D
20	2510.0 ~ 2560.0	0.3273	19M1G7D	0.2518	19M0W7D
25	2512.5 ~ 2557.5	0.3342	23M8G7D	0.2612	23M8W7D
30	2515.0 ~ 2555.0	0.3373	28M6G7D	0.2570	28M6W7D
40	2520.0 ~ 2550.0	0.3373	38M7G7D	0.2594	38M8W7D
50	2525.0 ~ 2545.0	0.3126	48M5G7D	0.2495	48M3W7D
5G NR n38		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2575.0 ~ 2615.0	0.2818	8M59G7D	0.2259	8M62W7D
15	2577.5 ~ 2612.5	0.2897	13M6G7D	0.2355	13M6W7D
20	2580.0 ~ 2610.0	0.2851	18M2G7D	0.2312	18M2W7D
30	2585.0 ~ 2605.0	0.3041	27M7G7D	0.2455	27M9W7D
40	2590.0 ~ 2600.0	0.3048	37M9G7D	0.2535	38M1W7D
5G NR n41		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2501.01 ~ 2685.00	0.5105	8M59G7D	0.4018	8M62W7D
15	2503.50 ~ 2682.48	0.5093	13M6G7D	0.4130	13M6W7D
20	2506.02 ~ 2679.99	0.5093	18M2G7D	0.4111	18M2W7D
30	2511.00 ~ 2674.98	0.5212	27M7G7D	0.4207	27M9W7D
40	2516.01 ~ 2670.00	0.5309	37M9G7D	0.4295	38M1W7D
50	2521.02 ~ 2664.99	0.5012	47M5G7D	0.4093	47M6W7D
60	2526.00 ~ 2659.98	0.4977	57M8G7D	0.4093	57M9W7D
70	2531.01 ~ 2655.00	0.4989	67M5G7D	0.3890	67M6W7D
80	2536.02 ~ 2649.99	0.4920	77M4G7D	0.3990	77M6W7D
90	2541.00 ~ 2644.98	0.4909	87M5G7D	0.4036	87M5W7D
100	2546.01 ~ 2640.00	0.5012	97M5G7D	0.4093	97M7W7D

Note:

- 5G NR n41 overlaps the entire frequency range of 5G NR n38. Therefore, the test results provided in this report covers 5G NR n41 as well as 5G NR n38.
- All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH04-KS	AUDIX	E3	210616

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.


The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)														Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
Max. Output Power	n7	v	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n38	-	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n41	-	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n7				v					-	-	-	-	-	v	v				v	v		v		
	n41	-			v	-									v	v				v	v		v		
26dB and 99% Bandwidth	n7	v	v	v	v	v	v	v	v	-	-	-	-	-		v	v	v	v		v		v		
	n41	-	v	v	v	-	v	v	v	v	v	v	v	v		v	v	v	v		v		v		
Conducted Band Edge	n7	v				v			v	-	-	-	-	-	v	v				v	v	v		v	
	n41	-	v			-			v					v	v	v				v	v	v		v	
Conducted Spurious Emission	n7	v				v			v	-	-	-	-	-	v	v				v		v	v	v	
	n41	-	v			-			v					v	v	v				v		v	v	v	
Frequency Stability	n7				v					-	-	-	-	-		v						v	v		
	n41	-			v	-										v						v	v		
E.I.R.P.	n7	v	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n38	-	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n41	-	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	

Radiated Spurious Emission	n7	Worst Case		v	
	n41	Worst Case		v	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability: Normal Voltage = 3.91V ; Low Voltage =3.50V.; High Voltage =4.50V				

2.2 Connection Diagram of Test System

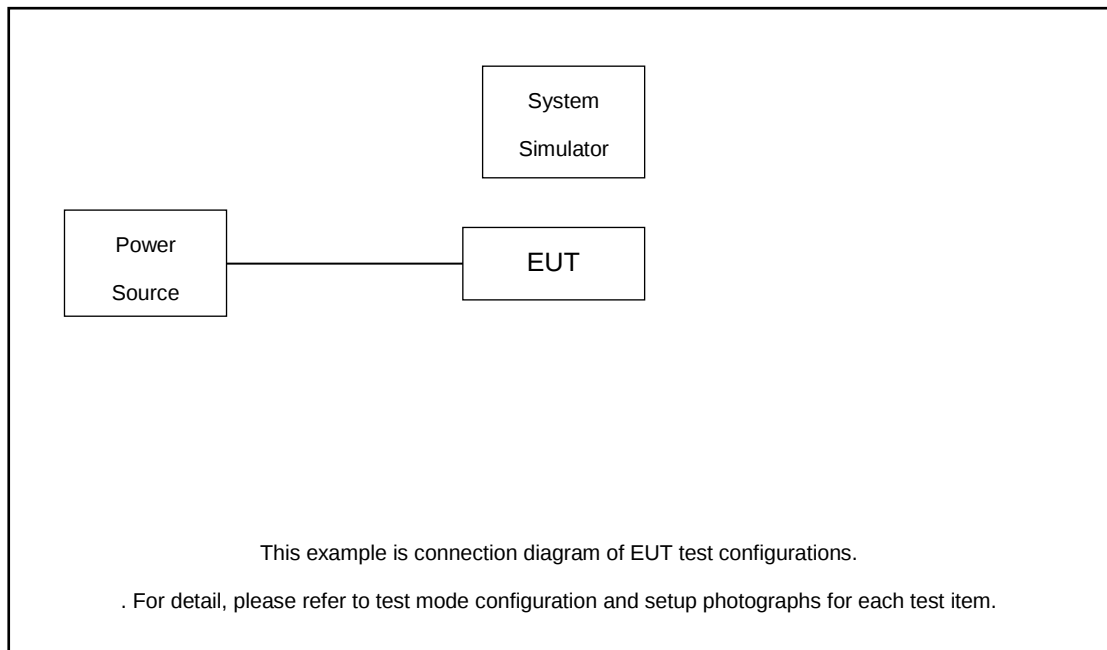

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Adapter	Fairphone B.V	N/A	N/A	N/A	N/A
5.	USB Cable	Fairphone B.V	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.0 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.0 + 20 = 26.0 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5



5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615

5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

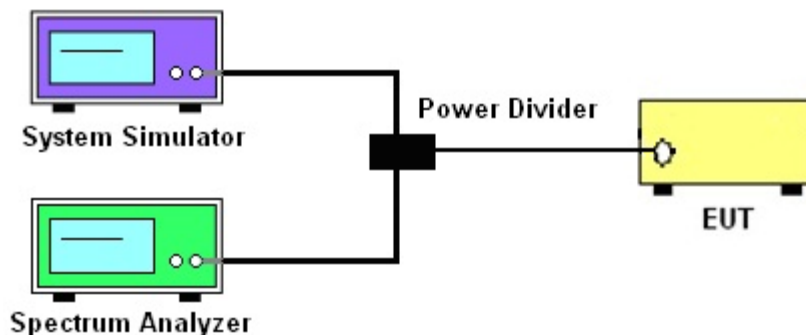

3.2.3 Frequency Stability

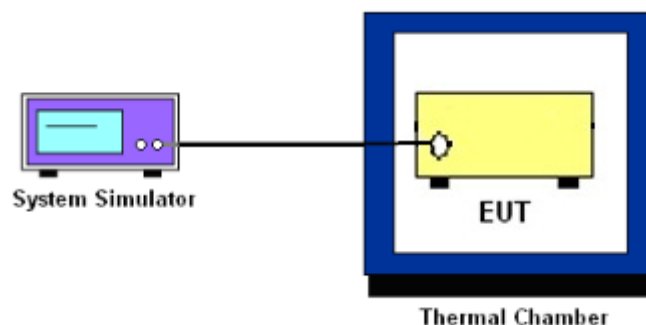

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7, n38, n41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

The testing follows ANSI C63.26 Section 5.2.6 (PAPR).

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set EUT in maximum power output.
3. Set the RBW = 1MHz, VBW = 3MHz, Detector = Peak, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
4. Set the RBW = 1MHz, VBW = 3MHz, Detector = power averaging, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
5. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission.
6. $\text{PAPR (dB)} = P_{\text{Pk}} \text{ (dBm)} - P_{\text{Avg}} \text{ (dBm)}$

where

PAPR peak-to-average power ratio, in dB

P_{Pk} measured peak power level, in dBm

P_{Avg} measured average power level, in dBm

7. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. For 5G NR n7/n38/n41, the other 40 dB, and 55 dB have additionally applied same calculation above.
9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. For 5G NR n7/n38/n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [55 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
= -25dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

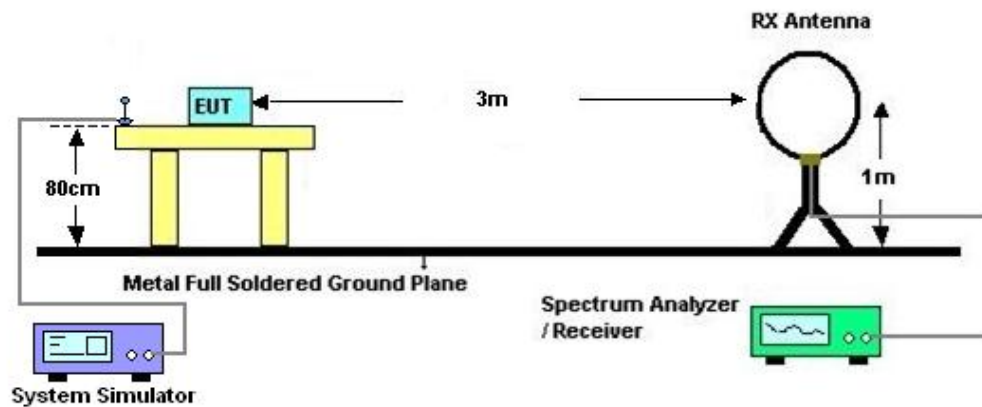

4.2.2 For radiated test from 30MHz to 1GHz

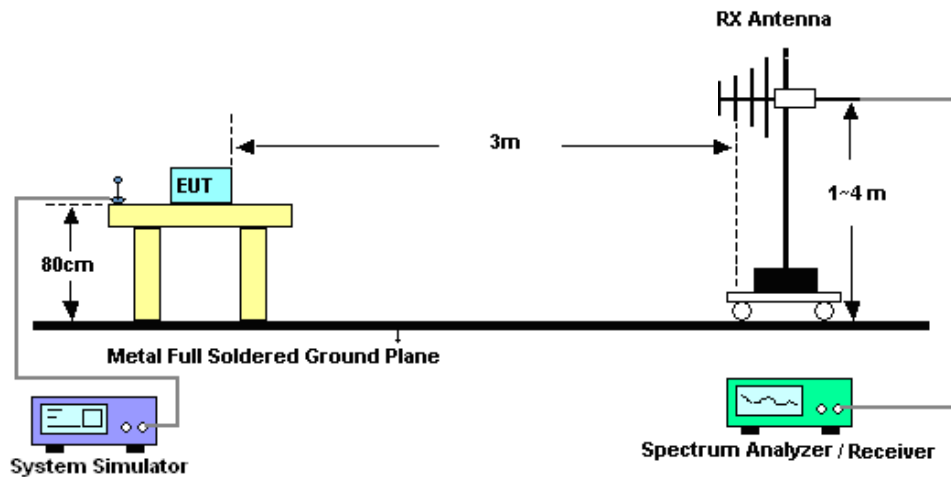

4.2.3 For radiated test above 1GHz

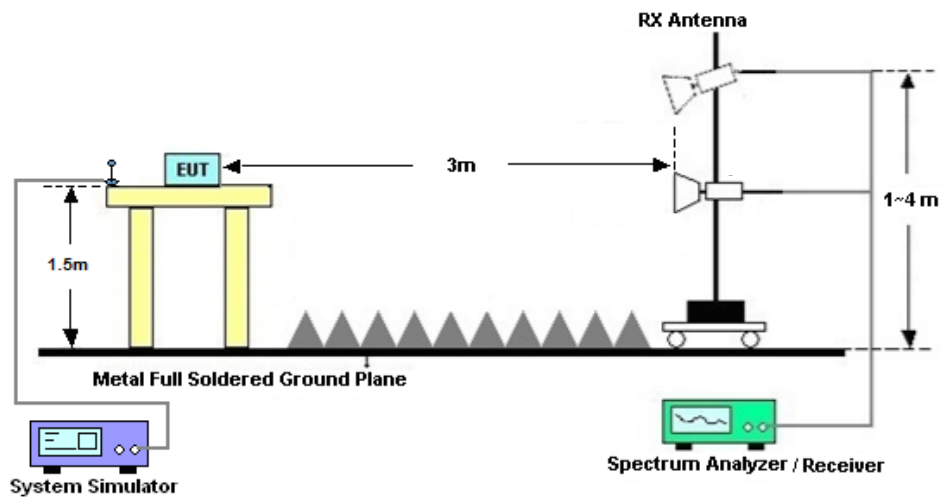

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. For 5G NR n7/n38/n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 28, 2025~ Jun. 30, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Apr. 28, 2025~ Jun. 30, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Apr. 28, 2025~ Jun. 30, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Dec. 03, 2024	May 28, 2025	Dec. 02, 2025	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	May 28, 2025	Sep. 07, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Nov. 23, 2024	May 28, 2025	Nov. 22, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	May 28, 2025	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	May 28, 2025	Oct. 21, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	May 28, 2025	Jul. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060852	18~40GHz	Jan. 03, 2025	May 28, 2025	Jan. 02, 2026	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 09, 2024	May 28, 2025	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 09, 2024	May 28, 2025	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 28, 2025	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 28, 2025	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 28, 2025	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.38 ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.82 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23℃
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N7

Transmitter Conducted Output Power And EIRP, ($G_T - L_c$)=0.8 dB

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	5	500500	2502.5	DFT-s-OFDM PI/2 BPSK	12@6	23.74	24.54	0.2844
7	15	5	500500	2502.5	DFT-s-OFDM PI/2 BPSK	1@1	23.72	24.52	0.2831
7	15	5	500500	2502.5	DFT-s-OFDM PI/2 BPSK	1@23	23.73	24.53	0.2838
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	12@6	23.76	24.56	0.2858
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@1	23.77	24.57	0.2864
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@23	24.10	24.90	0.3090
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	12@6	22.99	23.79	0.2393
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@1	22.70	23.50	0.2239
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@23	22.81	23.61	0.2296
7	15	5	500500	2502.5	DFT-s-OFDM 64 QAM	12@6	21.36	22.16	0.1644
7	15	5	500500	2502.5	DFT-s-OFDM 64 QAM	1@1	21.43	22.23	0.1671
7	15	5	500500	2502.5	DFT-s-OFDM 64 QAM	1@23	21.55	22.35	0.1718
7	15	5	500500	2502.5	DFT-s-OFDM 256 QAM	12@6	18.73	19.53	0.0897
7	15	5	500500	2502.5	DFT-s-OFDM 256 QAM	1@1	18.71	19.51	0.0893
7	15	5	500500	2502.5	DFT-s-OFDM 256 QAM	1@23	18.83	19.63	0.0918
7	15	5	500500	2502.5	CP-OFDM QPSK	13@6	22.37	23.17	0.2075
7	15	5	500500	2502.5	CP-OFDM QPSK	1@1	22.15	22.95	0.1972
7	15	5	500500	2502.5	CP-OFDM QPSK	1@23	22.18	22.98	0.1986
7	15	5	507000	2535	DFT-s-OFDM PI/2 BPSK	12@6	23.91	24.71	0.2958
7	15	5	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	23.88	24.68	0.2938
7	15	5	507000	2535	DFT-s-OFDM PI/2 BPSK	1@23	24.01	24.81	0.3027
7	15	5	507000	2535	DFT-s-OFDM QPSK	12@6	23.95	24.75	0.2985
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@1	24.02	24.82	0.3034
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@23	24.19	24.99	0.3155
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	12@6	23.10	23.90	0.2455
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.83	23.63	0.2307
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@23	22.96	23.76	0.2377
7	15	5	507000	2535	DFT-s-OFDM 64 QAM	12@6	21.57	22.37	0.1726
7	15	5	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.68	22.48	0.1770
7	15	5	507000	2535	DFT-s-OFDM 64 QAM	1@23	21.67	22.47	0.1766
7	15	5	507000	2535	DFT-s-OFDM 256 QAM	12@6	18.83	19.63	0.0918
7	15	5	507000	2535	DFT-s-OFDM 256 QAM	1@1	18.88	19.68	0.0929
7	15	5	507000	2535	DFT-s-OFDM 256 QAM	1@23	18.95	19.75	0.0944



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	5	507000	2535	CP-OFDM QPSK	13@6	22.51	23.31	0.2143
7	15	5	507000	2535	CP-OFDM QPSK	1@1	22.44	23.24	0.2109
7	15	5	507000	2535	CP-OFDM QPSK	1@23	22.35	23.15	0.2065
7	15	5	513500	2567.5	DFT-s-OFDM PI/2 BPSK	12@6	23.99	24.79	0.3013
7	15	5	513500	2567.5	DFT-s-OFDM PI/2 BPSK	1@1	23.85	24.65	0.2917
7	15	5	513500	2567.5	DFT-s-OFDM PI/2 BPSK	1@23	23.91	24.71	0.2958
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	12@6	23.88	24.68	0.2938
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@1	24.11	24.91	0.3097
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@23	24.16	24.96	0.3133
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	12@6	23.11	23.91	0.2460
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@1	22.95	23.75	0.2371
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@23	22.81	23.61	0.2296
7	15	5	513500	2567.5	DFT-s-OFDM 64 QAM	12@6	21.50	22.30	0.1698
7	15	5	513500	2567.5	DFT-s-OFDM 64 QAM	1@1	21.57	22.37	0.1726
7	15	5	513500	2567.5	DFT-s-OFDM 64 QAM	1@23	21.65	22.45	0.1758
7	15	5	513500	2567.5	DFT-s-OFDM 256 QAM	12@6	18.85	19.65	0.0923
7	15	5	513500	2567.5	DFT-s-OFDM 256 QAM	1@1	18.80	19.60	0.0912
7	15	5	513500	2567.5	DFT-s-OFDM 256 QAM	1@23	18.93	19.73	0.0940
7	15	5	513500	2567.5	CP-OFDM QPSK	13@6	22.48	23.28	0.2128
7	15	5	513500	2567.5	CP-OFDM QPSK	1@1	22.32	23.12	0.2051
7	15	5	513500	2567.5	CP-OFDM QPSK	1@23	22.45	23.25	0.2113
7	15	10	501000	2505	DFT-s-OFDM PI/2 BPSK	25@12	23.84	24.64	0.2911
7	15	10	501000	2505	DFT-s-OFDM PI/2 BPSK	1@1	23.66	24.46	0.2793
7	15	10	501000	2505	DFT-s-OFDM PI/2 BPSK	1@50	23.77	24.57	0.2864
7	15	10	501000	2505	DFT-s-OFDM QPSK	25@12	23.85	24.65	0.2917
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@1	23.80	24.60	0.2884
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@50	23.87	24.67	0.2931
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	25@12	22.86	23.66	0.2323
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@1	22.63	23.43	0.2203
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@50	22.82	23.62	0.2301
7	15	10	501000	2505	DFT-s-OFDM 64 QAM	25@12	21.36	22.16	0.1644
7	15	10	501000	2505	DFT-s-OFDM 64 QAM	1@1	21.52	22.32	0.1706
7	15	10	501000	2505	DFT-s-OFDM 64 QAM	1@50	21.59	22.39	0.1734
7	15	10	501000	2505	DFT-s-OFDM 256 QAM	25@12	18.79	19.59	0.0910
7	15	10	501000	2505	DFT-s-OFDM 256 QAM	1@1	18.72	19.52	0.0895
7	15	10	501000	2505	DFT-s-OFDM 256 QAM	1@50	18.84	19.64	0.0920
7	15	10	501000	2505	CP-OFDM QPSK	26@13	22.29	23.09	0.2037
7	15	10	501000	2505	CP-OFDM QPSK	1@1	22.26	23.06	0.2023



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	10	501000	2505	CP-OFDM QPSK	1@50	22.25	23.05	0.2018
7	15	10	507000	2535	DFT-s-OFDM PI/2 BPSK	25@12	23.98	24.78	0.3006
7	15	10	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	23.83	24.63	0.2904
7	15	10	507000	2535	DFT-s-OFDM PI/2 BPSK	1@50	23.95	24.75	0.2985
7	15	10	507000	2535	DFT-s-OFDM QPSK	25@12	23.97	24.77	0.2999
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@1	24.01	24.81	0.3027
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@50	24.07	24.87	0.3069
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	25@12	23.06	23.86	0.2432
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.90	23.70	0.2344
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@50	22.93	23.73	0.2360
7	15	10	507000	2535	DFT-s-OFDM 64 QAM	25@12	21.53	22.33	0.1710
7	15	10	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.59	22.39	0.1734
7	15	10	507000	2535	DFT-s-OFDM 64 QAM	1@50	21.69	22.49	0.1774
7	15	10	507000	2535	DFT-s-OFDM 256 QAM	25@12	18.95	19.75	0.0944
7	15	10	507000	2535	DFT-s-OFDM 256 QAM	1@1	18.91	19.71	0.0935
7	15	10	507000	2535	DFT-s-OFDM 256 QAM	1@50	18.93	19.73	0.0940
7	15	10	507000	2535	CP-OFDM QPSK	26@13	22.40	23.20	0.2089
7	15	10	507000	2535	CP-OFDM QPSK	1@1	22.47	23.27	0.2123
7	15	10	507000	2535	CP-OFDM QPSK	1@50	22.37	23.17	0.2075
7	15	10	513000	2565	DFT-s-OFDM PI/2 BPSK	25@12	23.87	24.67	0.2931
7	15	10	513000	2565	DFT-s-OFDM PI/2 BPSK	1@1	23.87	24.67	0.2931
7	15	10	513000	2565	DFT-s-OFDM PI/2 BPSK	1@50	23.93	24.73	0.2972
7	15	10	513000	2565	DFT-s-OFDM QPSK	25@12	23.94	24.74	0.2979
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@1	24.04	24.84	0.3048
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@50	24.18	24.98	0.3148
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	25@12	23.02	23.82	0.2410
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@1	22.80	23.60	0.2291
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@50	22.92	23.72	0.2355
7	15	10	513000	2565	DFT-s-OFDM 64 QAM	25@12	21.49	22.29	0.1694
7	15	10	513000	2565	DFT-s-OFDM 64 QAM	1@1	21.57	22.37	0.1726
7	15	10	513000	2565	DFT-s-OFDM 64 QAM	1@50	21.66	22.46	0.1762
7	15	10	513000	2565	DFT-s-OFDM 256 QAM	25@12	18.87	19.67	0.0927
7	15	10	513000	2565	DFT-s-OFDM 256 QAM	1@1	18.83	19.63	0.0918
7	15	10	513000	2565	DFT-s-OFDM 256 QAM	1@50	18.91	19.71	0.0935
7	15	10	513000	2565	CP-OFDM QPSK	26@13	22.35	23.15	0.2065
7	15	10	513000	2565	CP-OFDM QPSK	1@1	22.33	23.13	0.2056
7	15	10	513000	2565	CP-OFDM QPSK	1@50	22.38	23.18	0.2080
7	15	15	501500	2507.5	DFT-s-OFDM PI/2 BPSK	36@18	23.89	24.69	0.2944



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	15	501500	2507.5	DFT-s-OFDM PI/2 BPSK	1@1	23.75	24.55	0.2851
7	15	15	501500	2507.5	DFT-s-OFDM PI/2 BPSK	1@77	23.87	24.67	0.2931
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	36@18	23.99	24.79	0.3013
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@1	23.81	24.61	0.2891
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@77	24.23	25.03	0.3184
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	36@18	23.04	23.84	0.2421
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@1	22.81	23.61	0.2296
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@77	22.83	23.63	0.2307
7	15	15	501500	2507.5	DFT-s-OFDM 64 QAM	36@18	21.55	22.35	0.1718
7	15	15	501500	2507.5	DFT-s-OFDM 64 QAM	1@1	21.62	22.42	0.1746
7	15	15	501500	2507.5	DFT-s-OFDM 64 QAM	1@77	21.64	22.44	0.1754
7	15	15	501500	2507.5	DFT-s-OFDM 256 QAM	36@18	18.89	19.69	0.0931
7	15	15	501500	2507.5	DFT-s-OFDM 256 QAM	1@1	18.84	19.64	0.0920
7	15	15	501500	2507.5	DFT-s-OFDM 256 QAM	1@77	18.97	19.77	0.0948
7	15	15	501500	2507.5	CP-OFDM QPSK	39@19	22.45	23.25	0.2113
7	15	15	501500	2507.5	CP-OFDM QPSK	1@1	22.49	23.29	0.2133
7	15	15	501500	2507.5	CP-OFDM QPSK	1@77	22.49	23.29	0.2133
7	15	15	507000	2535	DFT-s-OFDM PI/2 BPSK	36@18	24.22	25.02	0.3177
7	15	15	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.13	24.93	0.3112
7	15	15	507000	2535	DFT-s-OFDM PI/2 BPSK	1@77	24.08	24.88	0.3076
7	15	15	507000	2535	DFT-s-OFDM QPSK	36@18	24.18	24.98	0.3148
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@1	24.31	25.11	0.3243
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@77	24.35	25.15	0.3273
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	36@18	23.25	24.05	0.2541
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.05	23.85	0.2427
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@77	23.03	23.83	0.2415
7	15	15	507000	2535	DFT-s-OFDM 64 QAM	36@18	21.77	22.57	0.1807
7	15	15	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.85	22.65	0.1841
7	15	15	507000	2535	DFT-s-OFDM 64 QAM	1@77	21.79	22.59	0.1816
7	15	15	507000	2535	DFT-s-OFDM 256 QAM	36@18	19.03	19.83	0.0962
7	15	15	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.05	19.85	0.0966
7	15	15	507000	2535	DFT-s-OFDM 256 QAM	1@77	19.06	19.86	0.0968
7	15	15	507000	2535	CP-OFDM QPSK	39@19	22.61	23.41	0.2193
7	15	15	507000	2535	CP-OFDM QPSK	1@1	22.72	23.52	0.2249
7	15	15	507000	2535	CP-OFDM QPSK	1@77	22.65	23.45	0.2213
7	15	15	512500	2562.5	DFT-s-OFDM PI/2 BPSK	36@18	24.25	25.05	0.3199
7	15	15	512500	2562.5	DFT-s-OFDM PI/2 BPSK	1@1	24.16	24.96	0.3133
7	15	15	512500	2562.5	DFT-s-OFDM PI/2 BPSK	1@77	24.08	24.88	0.3076



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	36@18	24.14	24.94	0.3119
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@1	24.10	24.90	0.3090
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@77	24.16	24.96	0.3133
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	36@18	23.21	24.01	0.2518
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@1	22.97	23.77	0.2382
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@77	23.11	23.91	0.2460
7	15	15	512500	2562.5	DFT-s-OFDM 64 QAM	36@18	21.70	22.50	0.1778
7	15	15	512500	2562.5	DFT-s-OFDM 64 QAM	1@1	21.80	22.60	0.1820
7	15	15	512500	2562.5	DFT-s-OFDM 64 QAM	1@77	21.83	22.63	0.1832
7	15	15	512500	2562.5	DFT-s-OFDM 256 QAM	36@18	18.89	19.69	0.0931
7	15	15	512500	2562.5	DFT-s-OFDM 256 QAM	1@1	19.03	19.83	0.0962
7	15	15	512500	2562.5	DFT-s-OFDM 256 QAM	1@77	19.04	19.84	0.0964
7	15	15	512500	2562.5	CP-OFDM QPSK	39@19	22.62	23.42	0.2198
7	15	15	512500	2562.5	CP-OFDM QPSK	1@1	22.65	23.45	0.2213
7	15	15	512500	2562.5	CP-OFDM QPSK	1@77	22.62	23.42	0.2198
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	50@25	23.95	24.75	0.2985
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@1	23.79	24.59	0.2877
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@104	23.97	24.77	0.2999
7	15	20	502000	2510	DFT-s-OFDM QPSK	50@25	24.06	24.86	0.3062
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@1	23.92	24.72	0.2965
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@104	24.01	24.81	0.3027
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	50@25	23.12	23.92	0.2466
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@1	22.78	23.58	0.2280
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@104	22.92	23.72	0.2355
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	50@25	21.61	22.41	0.1742
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	1@1	21.52	22.32	0.1706
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	1@104	21.67	22.47	0.1766
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	50@25	19.54	20.34	0.1081
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	1@1	18.92	19.72	0.0938
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	1@104	19.02	19.82	0.0959
7	15	20	502000	2510	CP-OFDM QPSK	53@26	22.50	23.30	0.2138
7	15	20	502000	2510	CP-OFDM QPSK	1@1	22.35	23.15	0.2065
7	15	20	502000	2510	CP-OFDM QPSK	1@104	22.49	23.29	0.2133
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	50@25	24.16	24.96	0.3133
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.15	24.95	0.3126
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@104	24.10	24.90	0.3090
7	15	20	507000	2535	DFT-s-OFDM QPSK	50@25	24.19	24.99	0.3155
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@1	24.30	25.10	0.3236



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@104	24.35	25.15	0.3273
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	50@25	23.20	24.00	0.2512
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.06	23.86	0.2432
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@104	23.10	23.90	0.2455
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	50@25	21.73	22.53	0.1791
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.90	22.70	0.1862
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	1@104	21.85	22.65	0.1841
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	50@25	19.03	19.83	0.0962
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.07	19.87	0.0971
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	1@104	19.10	19.90	0.0977
7	15	20	507000	2535	CP-OFDM QPSK	53@26	22.62	23.42	0.2198
7	15	20	507000	2535	CP-OFDM QPSK	1@1	22.68	23.48	0.2228
7	15	20	507000	2535	CP-OFDM QPSK	1@104	22.53	23.33	0.2153
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	50@25	24.12	24.92	0.3105
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@1	24.03	24.83	0.3041
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@104	24.09	24.89	0.3083
7	15	20	512000	2560	DFT-s-OFDM QPSK	50@25	24.16	24.96	0.3133
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@1	24.15	24.95	0.3126
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@104	24.18	24.98	0.3148
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	50@25	23.21	24.01	0.2518
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@1	23.00	23.80	0.2399
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@104	23.07	23.87	0.2438
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	50@25	21.79	22.59	0.1816
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	1@1	21.81	22.61	0.1824
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	1@104	21.84	22.64	0.1837
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	50@25	19.15	19.95	0.0989
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	1@1	19.04	19.84	0.0964
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	1@104	19.10	19.90	0.0977
7	15	20	512000	2560	CP-OFDM QPSK	53@26	22.62	23.42	0.2198
7	15	20	512000	2560	CP-OFDM QPSK	1@1	22.66	23.46	0.2218
7	15	20	512000	2560	CP-OFDM QPSK	1@104	22.59	23.39	0.2183
7	15	25	502500	2512.5	DFT-s-OFDM PI/2 BPSK	64@32	24.11	24.91	0.3097
7	15	25	502500	2512.5	DFT-s-OFDM PI/2 BPSK	1@1	24.13	24.93	0.3112
7	15	25	502500	2512.5	DFT-s-OFDM PI/2 BPSK	1@131	24.22	25.02	0.3177
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	64@32	24.21	25.01	0.3170
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@1	24.12	24.92	0.3105
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@131	24.26	25.06	0.3206
7	15	25	502500	2512.5	DFT-s-OFDM 16 QAM	64@32	23.26	24.06	0.2547



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	25	502500	2512.5	DFT-s-OFDM 16 QAM	1@1	23.00	23.80	0.2399
7	15	25	502500	2512.5	DFT-s-OFDM 16 QAM	1@131	23.27	24.07	0.2553
7	15	25	502500	2512.5	DFT-s-OFDM 64 QAM	64@32	21.73	22.53	0.1791
7	15	25	502500	2512.5	DFT-s-OFDM 64 QAM	1@1	21.81	22.61	0.1824
7	15	25	502500	2512.5	DFT-s-OFDM 64 QAM	1@131	21.94	22.74	0.1879
7	15	25	502500	2512.5	DFT-s-OFDM 256 QAM	64@32	19.67	20.47	0.1114
7	15	25	502500	2512.5	DFT-s-OFDM 256 QAM	1@1	19.13	19.93	0.0984
7	15	25	502500	2512.5	DFT-s-OFDM 256 QAM	1@131	19.23	20.03	0.1007
7	15	25	502500	2512.5	CP-OFDM QPSK	67@33	22.70	23.50	0.2239
7	15	25	502500	2512.5	CP-OFDM QPSK	1@1	22.67	23.47	0.2223
7	15	25	502500	2512.5	CP-OFDM QPSK	1@131	22.73	23.53	0.2254
7	15	25	507000	2535	DFT-s-OFDM PI/2 BPSK	64@32	24.23	25.03	0.3184
7	15	25	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.24	25.04	0.3192
7	15	25	507000	2535	DFT-s-OFDM PI/2 BPSK	1@131	24.19	24.99	0.3155
7	15	25	507000	2535	DFT-s-OFDM QPSK	64@32	24.30	25.10	0.3236
7	15	25	507000	2535	DFT-s-OFDM QPSK	1@1	24.43	25.23	0.3334
7	15	25	507000	2535	DFT-s-OFDM QPSK	1@131	24.39	25.19	0.3304
7	15	25	507000	2535	DFT-s-OFDM 16 QAM	64@32	23.37	24.17	0.2612
7	15	25	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.25	24.05	0.2541
7	15	25	507000	2535	DFT-s-OFDM 16 QAM	1@131	23.18	23.98	0.2500
7	15	25	507000	2535	DFT-s-OFDM 64 QAM	64@32	21.90	22.70	0.1862
7	15	25	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.99	22.79	0.1901
7	15	25	507000	2535	DFT-s-OFDM 64 QAM	1@131	21.89	22.69	0.1858
7	15	25	507000	2535	DFT-s-OFDM 256 QAM	64@32	19.24	20.04	0.1009
7	15	25	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.28	20.08	0.1019
7	15	25	507000	2535	DFT-s-OFDM 256 QAM	1@131	19.15	19.95	0.0989
7	15	25	507000	2535	CP-OFDM QPSK	67@33	22.75	23.55	0.2265
7	15	25	507000	2535	CP-OFDM QPSK	1@1	22.87	23.67	0.2328
7	15	25	507000	2535	CP-OFDM QPSK	1@131	22.63	23.43	0.2203
7	15	25	511500	2557.5	DFT-s-OFDM PI/2 BPSK	64@32	24.18	24.98	0.3148
7	15	25	511500	2557.5	DFT-s-OFDM PI/2 BPSK	1@1	24.17	24.97	0.3141
7	15	25	511500	2557.5	DFT-s-OFDM PI/2 BPSK	1@131	24.24	25.04	0.3192
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	64@32	24.23	25.03	0.3184
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@1	24.25	25.05	0.3199
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@131	24.44	25.24	0.3342
7	15	25	511500	2557.5	DFT-s-OFDM 16 QAM	64@32	23.26	24.06	0.2547
7	15	25	511500	2557.5	DFT-s-OFDM 16 QAM	1@1	23.11	23.91	0.2460
7	15	25	511500	2557.5	DFT-s-OFDM 16 QAM	1@131	23.19	23.99	0.2506



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	25	511500	2557.5	DFT-s-OFDM 64 QAM	64@32	21.85	22.65	0.1841
7	15	25	511500	2557.5	DFT-s-OFDM 64 QAM	1@1	21.78	22.58	0.1811
7	15	25	511500	2557.5	DFT-s-OFDM 64 QAM	1@131	22.01	22.81	0.1910
7	15	25	511500	2557.5	DFT-s-OFDM 256 QAM	64@32	19.25	20.05	0.1012
7	15	25	511500	2557.5	DFT-s-OFDM 256 QAM	1@1	19.20	20.00	0.1000
7	15	25	511500	2557.5	DFT-s-OFDM 256 QAM	1@131	19.22	20.02	0.1005
7	15	25	511500	2557.5	CP-OFDM QPSK	67@33	22.65	23.45	0.2213
7	15	25	511500	2557.5	CP-OFDM QPSK	1@1	22.74	23.54	0.2259
7	15	25	511500	2557.5	CP-OFDM QPSK	1@131	22.72	23.52	0.2249
7	15	30	503000	2515	DFT-s-OFDM PI/2 BPSK	80@40	24.19	24.99	0.3155
7	15	30	503000	2515	DFT-s-OFDM PI/2 BPSK	1@1	24.07	24.87	0.3069
7	15	30	503000	2515	DFT-s-OFDM PI/2 BPSK	1@158	24.25	25.05	0.3199
7	15	30	503000	2515	DFT-s-OFDM QPSK	80@40	24.30	25.10	0.3236
7	15	30	503000	2515	DFT-s-OFDM QPSK	1@1	24.17	24.97	0.3141
7	15	30	503000	2515	DFT-s-OFDM QPSK	1@158	24.48	25.28	0.3373
7	15	30	503000	2515	DFT-s-OFDM 16 QAM	80@40	23.24	24.04	0.2535
7	15	30	503000	2515	DFT-s-OFDM 16 QAM	1@1	23.02	23.82	0.2410
7	15	30	503000	2515	DFT-s-OFDM 16 QAM	1@158	23.21	24.01	0.2518
7	15	30	503000	2515	DFT-s-OFDM 64 QAM	80@40	21.78	22.58	0.1811
7	15	30	503000	2515	DFT-s-OFDM 64 QAM	1@1	21.76	22.56	0.1803
7	15	30	503000	2515	DFT-s-OFDM 64 QAM	1@158	21.88	22.68	0.1854
7	15	30	503000	2515	DFT-s-OFDM 256 QAM	80@40	19.75	20.55	0.1135
7	15	30	503000	2515	DFT-s-OFDM 256 QAM	1@1	19.14	19.94	0.0986
7	15	30	503000	2515	DFT-s-OFDM 256 QAM	1@158	19.28	20.08	0.1019
7	15	30	503000	2515	CP-OFDM QPSK	80@40	22.77	23.57	0.2275
7	15	30	503000	2515	CP-OFDM QPSK	1@1	22.61	23.41	0.2193
7	15	30	503000	2515	CP-OFDM QPSK	1@158	22.75	23.55	0.2265
7	15	30	507000	2535	DFT-s-OFDM PI/2 BPSK	80@40	24.18	24.98	0.3148
7	15	30	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.27	25.07	0.3214
7	15	30	507000	2535	DFT-s-OFDM PI/2 BPSK	1@158	24.16	24.96	0.3133
7	15	30	507000	2535	DFT-s-OFDM QPSK	80@40	24.26	25.06	0.3206
7	15	30	507000	2535	DFT-s-OFDM QPSK	1@1	24.36	25.16	0.3281
7	15	30	507000	2535	DFT-s-OFDM QPSK	1@158	24.43	25.23	0.3334
7	15	30	507000	2535	DFT-s-OFDM 16 QAM	80@40	23.24	24.04	0.2535
7	15	30	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.25	24.05	0.2541
7	15	30	507000	2535	DFT-s-OFDM 16 QAM	1@158	23.18	23.98	0.2500
7	15	30	507000	2535	DFT-s-OFDM 64 QAM	80@40	21.85	22.65	0.1841
7	15	30	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.98	22.78	0.1897



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	30	507000	2535	DFT-s-OFDM 64 QAM	1@158	21.87	22.67	0.1849
7	15	30	507000	2535	DFT-s-OFDM 256 QAM	80@40	19.34	20.14	0.1033
7	15	30	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.30	20.10	0.1023
7	15	30	507000	2535	DFT-s-OFDM 256 QAM	1@158	19.23	20.03	0.1007
7	15	30	507000	2535	CP-OFDM QPSK	80@40	22.71	23.51	0.2244
7	15	30	507000	2535	CP-OFDM QPSK	1@1	22.93	23.73	0.2360
7	15	30	507000	2535	CP-OFDM QPSK	1@158	22.60	23.40	0.2188
7	15	30	511000	2555	DFT-s-OFDM PI/2 BPSK	80@40	24.15	24.95	0.3126
7	15	30	511000	2555	DFT-s-OFDM PI/2 BPSK	1@1	24.18	24.98	0.3148
7	15	30	511000	2555	DFT-s-OFDM PI/2 BPSK	1@158	24.26	25.06	0.3206
7	15	30	511000	2555	DFT-s-OFDM QPSK	80@40	24.29	25.09	0.3228
7	15	30	511000	2555	DFT-s-OFDM QPSK	1@1	24.32	25.12	0.3251
7	15	30	511000	2555	DFT-s-OFDM QPSK	1@158	24.45	25.25	0.3350
7	15	30	511000	2555	DFT-s-OFDM 16 QAM	80@40	23.30	24.10	0.2570
7	15	30	511000	2555	DFT-s-OFDM 16 QAM	1@1	23.15	23.95	0.2483
7	15	30	511000	2555	DFT-s-OFDM 16 QAM	1@158	23.29	24.09	0.2564
7	15	30	511000	2555	DFT-s-OFDM 64 QAM	80@40	21.84	22.64	0.1837
7	15	30	511000	2555	DFT-s-OFDM 64 QAM	1@1	21.98	22.78	0.1897
7	15	30	511000	2555	DFT-s-OFDM 64 QAM	1@158	22.06	22.86	0.1932
7	15	30	511000	2555	DFT-s-OFDM 256 QAM	80@40	19.27	20.07	0.1016
7	15	30	511000	2555	DFT-s-OFDM 256 QAM	1@1	19.19	19.99	0.0998
7	15	30	511000	2555	DFT-s-OFDM 256 QAM	1@158	19.29	20.09	0.1021
7	15	30	511000	2555	CP-OFDM QPSK	80@40	22.70	23.50	0.2239
7	15	30	511000	2555	CP-OFDM QPSK	1@1	22.84	23.64	0.2312
7	15	30	511000	2555	CP-OFDM QPSK	1@158	22.76	23.56	0.2270
7	15	40	504000	2520	DFT-s-OFDM PI/2 BPSK	108@54	24.27	25.07	0.3214
7	15	40	504000	2520	DFT-s-OFDM PI/2 BPSK	1@1	24.13	24.93	0.3112
7	15	40	504000	2520	DFT-s-OFDM PI/2 BPSK	1@214	24.14	24.94	0.3119
7	15	40	504000	2520	DFT-s-OFDM QPSK	108@54	24.32	25.12	0.3251
7	15	40	504000	2520	DFT-s-OFDM QPSK	1@1	24.12	24.92	0.3105
7	15	40	504000	2520	DFT-s-OFDM QPSK	1@214	24.30	25.10	0.3236
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	108@54	23.33	24.13	0.2588
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	1@1	23.14	23.94	0.2477
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	1@214	23.08	23.88	0.2443
7	15	40	504000	2520	DFT-s-OFDM 64 QAM	108@54	21.83	22.63	0.1832
7	15	40	504000	2520	DFT-s-OFDM 64 QAM	1@1	21.77	22.57	0.1807
7	15	40	504000	2520	DFT-s-OFDM 64 QAM	1@214	21.86	22.66	0.1845
7	15	40	504000	2520	DFT-s-OFDM 256 QAM	108@54	19.76	20.56	0.1138



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	40	504000	2520	DFT-s-OFDM 256 QAM	1@1	19.18	19.98	0.0995
7	15	40	504000	2520	DFT-s-OFDM 256 QAM	1@214	19.24	20.04	0.1009
7	15	40	504000	2520	CP-OFDM QPSK	108@54	22.88	23.68	0.2333
7	15	40	504000	2520	CP-OFDM QPSK	1@1	22.81	23.61	0.2296
7	15	40	504000	2520	CP-OFDM QPSK	1@214	22.65	23.45	0.2213
7	15	40	507000	2535	DFT-s-OFDM PI/2 BPSK	108@54	24.23	25.03	0.3184
7	15	40	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.36	25.16	0.3281
7	15	40	507000	2535	DFT-s-OFDM PI/2 BPSK	1@214	24.20	25.00	0.3162
7	15	40	507000	2535	DFT-s-OFDM QPSK	108@54	24.28	25.08	0.3221
7	15	40	507000	2535	DFT-s-OFDM QPSK	1@1	24.38	25.18	0.3296
7	15	40	507000	2535	DFT-s-OFDM QPSK	1@214	24.41	25.21	0.3319
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	108@54	23.33	24.13	0.2588
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.17	23.97	0.2495
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	1@214	23.18	23.98	0.2500
7	15	40	507000	2535	DFT-s-OFDM 64 QAM	108@54	21.81	22.61	0.1824
7	15	40	507000	2535	DFT-s-OFDM 64 QAM	1@1	22.01	22.81	0.1910
7	15	40	507000	2535	DFT-s-OFDM 64 QAM	1@214	21.92	22.72	0.1871
7	15	40	507000	2535	DFT-s-OFDM 256 QAM	108@54	19.23	20.03	0.1007
7	15	40	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.26	20.06	0.1014
7	15	40	507000	2535	DFT-s-OFDM 256 QAM	1@214	19.35	20.15	0.1035
7	15	40	507000	2535	CP-OFDM QPSK	108@54	22.77	23.57	0.2275
7	15	40	507000	2535	CP-OFDM QPSK	1@1	22.89	23.69	0.2339
7	15	40	507000	2535	CP-OFDM QPSK	1@214	22.70	23.50	0.2239
7	15	40	510000	2550	DFT-s-OFDM PI/2 BPSK	108@54	24.20	25.00	0.3162
7	15	40	510000	2550	DFT-s-OFDM PI/2 BPSK	1@1	24.32	25.12	0.3251
7	15	40	510000	2550	DFT-s-OFDM PI/2 BPSK	1@214	24.24	25.04	0.3192
7	15	40	510000	2550	DFT-s-OFDM QPSK	108@54	24.32	25.12	0.3251
7	15	40	510000	2550	DFT-s-OFDM QPSK	1@1	24.48	25.28	0.3373
7	15	40	510000	2550	DFT-s-OFDM QPSK	1@214	24.43	25.23	0.3334
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	108@54	23.34	24.14	0.2594
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	1@1	23.31	24.11	0.2576
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	1@214	23.26	24.06	0.2547
7	15	40	510000	2550	DFT-s-OFDM 64 QAM	108@54	21.81	22.61	0.1824
7	15	40	510000	2550	DFT-s-OFDM 64 QAM	1@1	22.02	22.82	0.1914
7	15	40	510000	2550	DFT-s-OFDM 64 QAM	1@214	22.02	22.82	0.1914
7	15	40	510000	2550	DFT-s-OFDM 256 QAM	108@54	19.74	20.54	0.1132
7	15	40	510000	2550	DFT-s-OFDM 256 QAM	1@1	19.37	20.17	0.1040
7	15	40	510000	2550	DFT-s-OFDM 256 QAM	1@214	19.46	20.26	0.1062



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	40	510000	2550	CP-OFDM QPSK	108@54	22.85	23.65	0.2317
7	15	40	510000	2550	CP-OFDM QPSK	1@1	22.94	23.74	0.2366
7	15	40	510000	2550	CP-OFDM QPSK	1@214	22.74	23.54	0.2259
7	15	50	505000	2525	DFT-s-OFDM PI/2 BPSK	135@67	23.87	24.67	0.2931
7	15	50	505000	2525	DFT-s-OFDM PI/2 BPSK	1@1	23.67	24.47	0.2799
7	15	50	505000	2525	DFT-s-OFDM PI/2 BPSK	1@268	23.73	24.53	0.2838
7	15	50	505000	2525	DFT-s-OFDM QPSK	135@67	23.87	24.67	0.2931
7	15	50	505000	2525	DFT-s-OFDM QPSK	1@1	23.92	24.72	0.2965
7	15	50	505000	2525	DFT-s-OFDM QPSK	1@268	23.96	24.76	0.2992
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	135@67	22.96	23.76	0.2377
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	1@1	22.91	23.71	0.2350
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	1@268	22.94	23.74	0.2366
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	135@67	21.44	22.24	0.1675
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	1@1	21.42	22.22	0.1667
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	1@268	21.46	22.26	0.1683
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	135@67	18.95	19.75	0.0944
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	1@1	18.87	19.67	0.0927
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	1@268	19.18	19.98	0.0995
7	15	50	505000	2525	CP-OFDM QPSK	135@67	22.34	23.14	0.2061
7	15	50	505000	2525	CP-OFDM QPSK	1@1	22.15	22.95	0.1972
7	15	50	505000	2525	CP-OFDM QPSK	1@268	21.99	22.79	0.1901
7	15	50	507000	2535	DFT-s-OFDM PI/2 BPSK	135@67	23.84	24.64	0.2911
7	15	50	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	23.73	24.53	0.2838
7	15	50	507000	2535	DFT-s-OFDM PI/2 BPSK	1@268	23.96	24.76	0.2992
7	15	50	507000	2535	DFT-s-OFDM QPSK	135@67	23.95	24.75	0.2985
7	15	50	507000	2535	DFT-s-OFDM QPSK	1@1	24.15	24.95	0.3126
7	15	50	507000	2535	DFT-s-OFDM QPSK	1@268	23.95	24.75	0.2985
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	135@67	22.99	23.79	0.2393
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.12	23.92	0.2466
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	1@268	23.11	23.91	0.2460
7	15	50	507000	2535	DFT-s-OFDM 64 QAM	135@67	21.48	22.28	0.1690
7	15	50	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.50	22.30	0.1698
7	15	50	507000	2535	DFT-s-OFDM 64 QAM	1@268	21.51	22.31	0.1702
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	135@67	19.12	19.92	0.0982
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.01	19.81	0.0957
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	1@268	19.19	19.99	0.0998
7	15	50	507000	2535	CP-OFDM QPSK	135@67	22.41	23.21	0.2094
7	15	50	507000	2535	CP-OFDM QPSK	1@1	22.28	23.08	0.2032



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	50	507000	2535	CP-OFDM QPSK	1@268	22.01	22.81	0.1910
7	15	50	509000	2545	DFT-s-OFDM PI/2 BPSK	135@67	23.76	24.56	0.2858
7	15	50	509000	2545	DFT-s-OFDM PI/2 BPSK	1@1	23.82	24.62	0.2897
7	15	50	509000	2545	DFT-s-OFDM PI/2 BPSK	1@268	23.99	24.79	0.3013
7	15	50	509000	2545	DFT-s-OFDM QPSK	135@67	23.88	24.68	0.2938
7	15	50	509000	2545	DFT-s-OFDM QPSK	1@1	23.98	24.78	0.3006
7	15	50	509000	2545	DFT-s-OFDM QPSK	1@268	24.02	24.82	0.3034
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	135@67	22.91	23.71	0.2350
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	1@1	23.10	23.90	0.2455
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	1@268	23.17	23.97	0.2495
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	135@67	21.42	22.22	0.1667
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	1@1	21.57	22.37	0.1726
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	1@268	21.61	22.41	0.1742
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	135@67	19.12	19.92	0.0982
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	1@1	19.05	19.85	0.0966
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	1@268	19.30	20.10	0.1023
7	15	50	509000	2545	CP-OFDM QPSK	135@67	22.35	23.15	0.2065
7	15	50	509000	2545	CP-OFDM QPSK	1@1	22.29	23.09	0.2037
7	15	50	509000	2545	CP-OFDM QPSK	1@268	22.04	22.84	0.1923



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0069	PASS	NV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0037	PASS	LV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0055	PASS	HV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0047	PASS	-30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0034	PASS	-20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0042	PASS	-10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0082	PASS	0°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0042	PASS	10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0067	PASS	20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0059	PASS	30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0074	PASS	40°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	75@0	0.0037	PASS	50°C



Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	3.84	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	1@0	3.34	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	4.98	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	4.88	13	PASS



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH



N7(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH



N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH



**Occupied Bandwidth**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
7	15	5	507000	2535.0	CP-OFDM QPSK	25@0	4.4702	5.151
7	15	5	507000	2535.0	CP-OFDM 16 QAM	25@0	4.4895	5.097
7	15	5	507000	2535.0	CP-OFDM 64 QAM	25@0	4.4655	5.056
7	15	5	507000	2535.0	CP-OFDM 256 QAM	25@0	4.4858	5.123
7	15	10	507000	2535.0	CP-OFDM QPSK	52@0	9.2829	10.01
7	15	10	507000	2535.0	CP-OFDM 16 QAM	52@0	9.278	10.0
7	15	10	507000	2535.0	CP-OFDM 64 QAM	52@0	9.2774	9.932
7	15	10	507000	2535.0	CP-OFDM 256 QAM	52@0	9.2897	10.09
7	15	15	507000	2535.0	CP-OFDM QPSK	79@0	14.093	14.87
7	15	15	507000	2535.0	CP-OFDM 16 QAM	79@0	14.116	14.82
7	15	15	507000	2535.0	CP-OFDM 64 QAM	79@0	14.106	14.94
7	15	15	507000	2535.0	CP-OFDM 256 QAM	79@0	14.089	15.13
7	15	20	507000	2535.0	CP-OFDM QPSK	106@0	18.943	20.04
7	15	20	507000	2535.0	CP-OFDM 16 QAM	106@0	18.954	19.81
7	15	20	507000	2535.0	CP-OFDM 64 QAM	106@0	18.953	19.86
7	15	20	507000	2535.0	CP-OFDM 256 QAM	106@0	18.964	19.79
7	15	25	507000	2535.0	CP-OFDM QPSK	133@0	23.759	25.01
7	15	25	507000	2535.0	CP-OFDM 16 QAM	133@0	23.805	24.77
7	15	25	507000	2535.0	CP-OFDM 64 QAM	133@0	23.846	24.79
7	15	25	507000	2535.0	CP-OFDM 256 QAM	133@0	23.77	24.86
7	15	30	507000	2535.0	CP-OFDM QPSK	160@0	28.585	29.75
7	15	30	507000	2535.0	CP-OFDM 16 QAM	160@0	28.568	29.59
7	15	30	507000	2535.0	CP-OFDM 64 QAM	160@0	28.497	29.67
7	15	30	507000	2535.0	CP-OFDM 256 QAM	160@0	28.526	29.62



7	15	40	507000	2535.0	CP-OFDM QPSK	216@0	38.611	39.95
7	15	40	507000	2535.0	CP-OFDM 16 QAM	216@0	38.666	40.02
7	15	40	507000	2535.0	CP-OFDM 64 QAM	216@0	38.668	39.97
7	15	40	507000	2535.0	CP-OFDM 256 QAM	216@0	38.542	39.87
7	15	50	507000	2535.0	CP-OFDM QPSK	270@0	48.252	49.79
7	15	50	507000	2535.0	CP-OFDM 16 QAM	270@0	48.203	49.76
7	15	50	507000	2535.0	CP-OFDM 64 QAM	270@0	48.234	49.84
7	15	50	507000	2535.0	CP-OFDM 256 QAM	270@0	48.236	49.99



N7(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N7(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH



N7(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH




N7(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

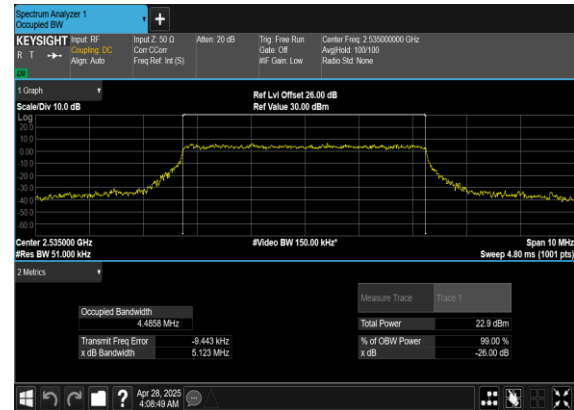





N7(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

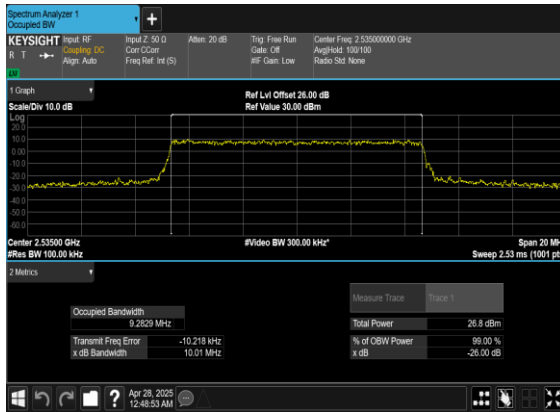


N7(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

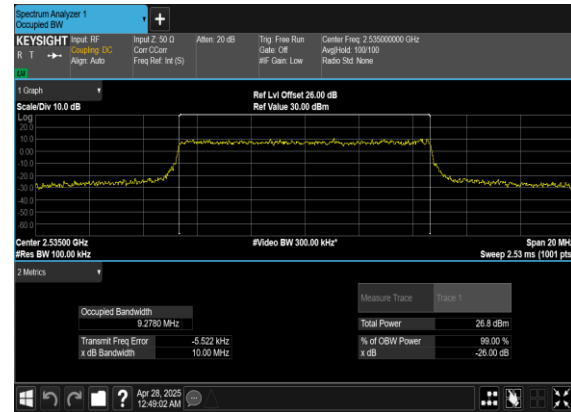

N7(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

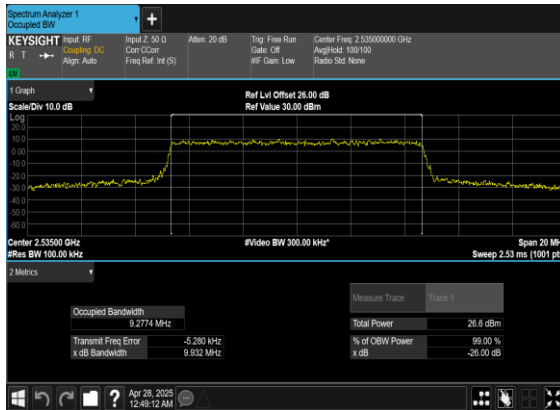


N7(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

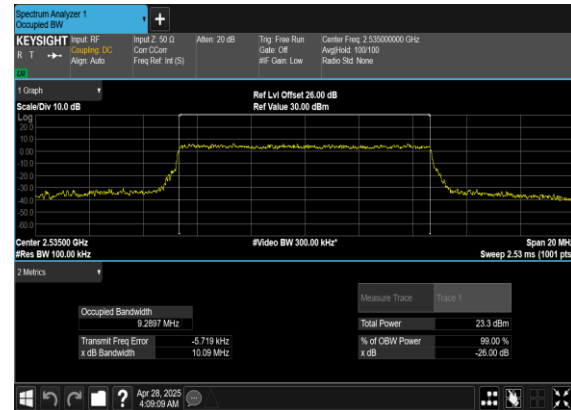





N7(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

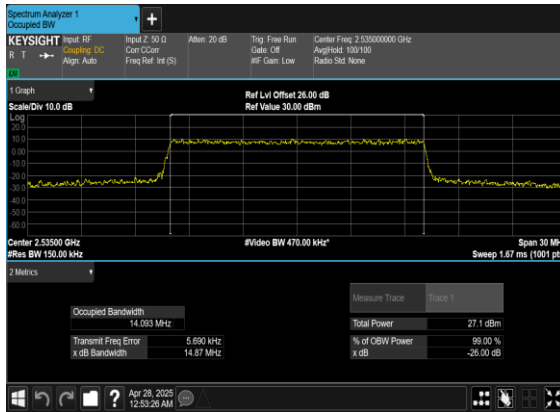


N7(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

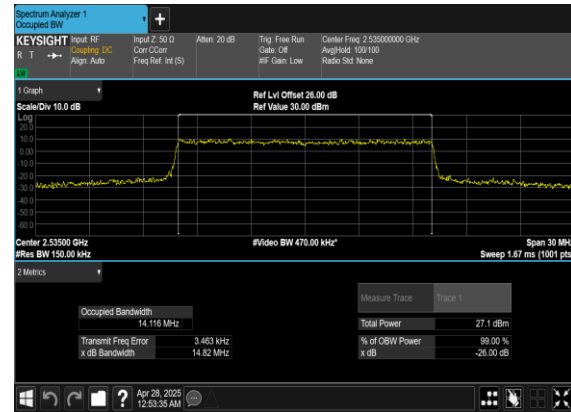

N7(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

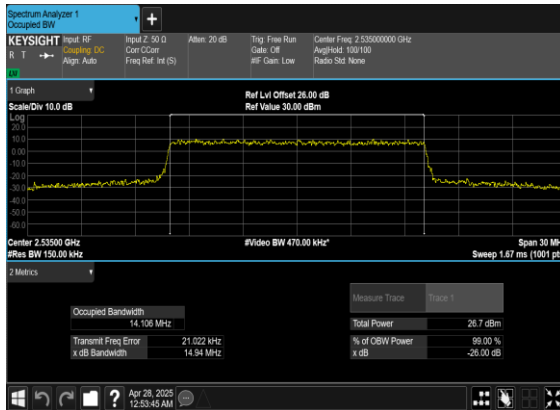


N7(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

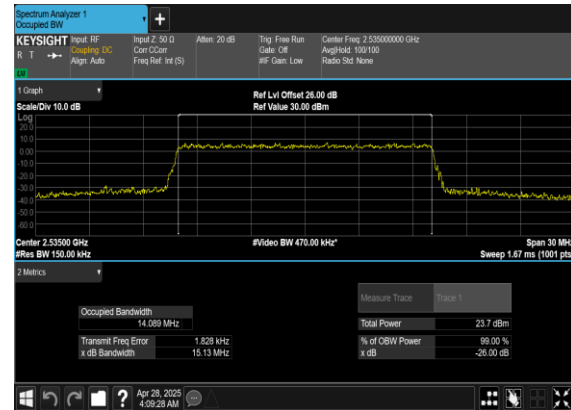





N7(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

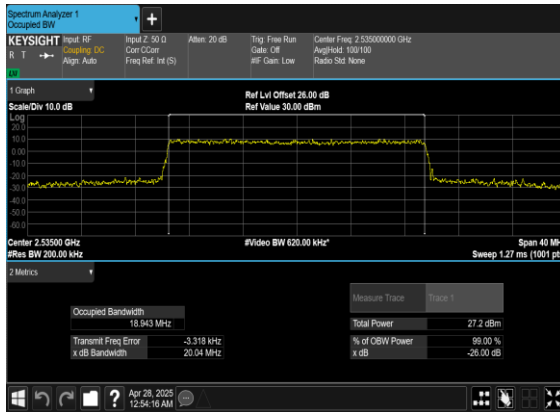


N7(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

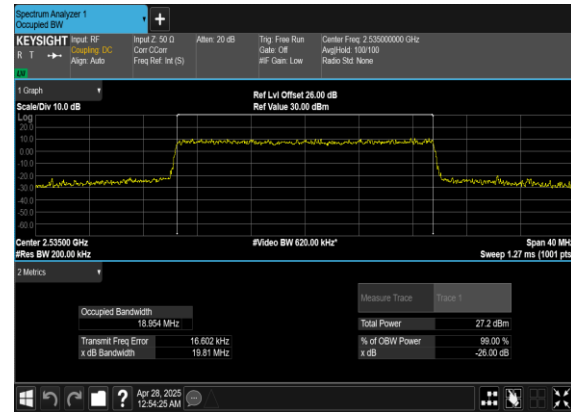

N7(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

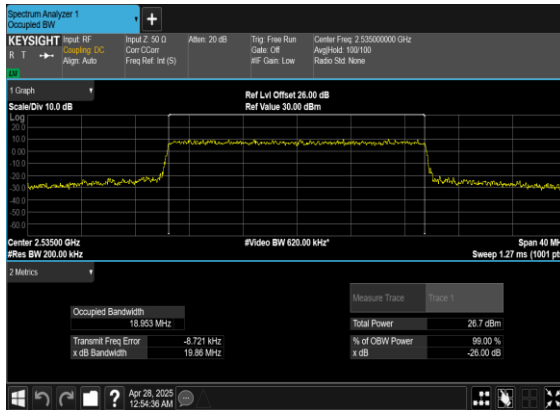


N7(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

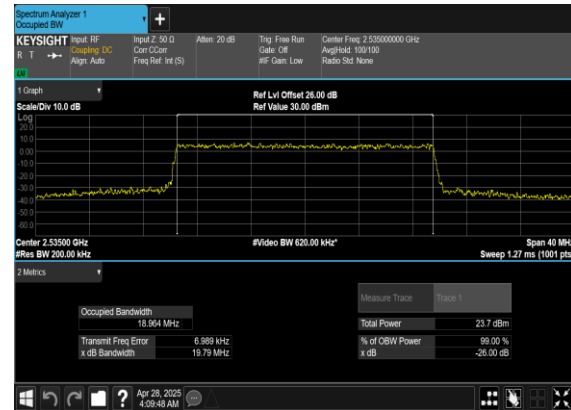





N7(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

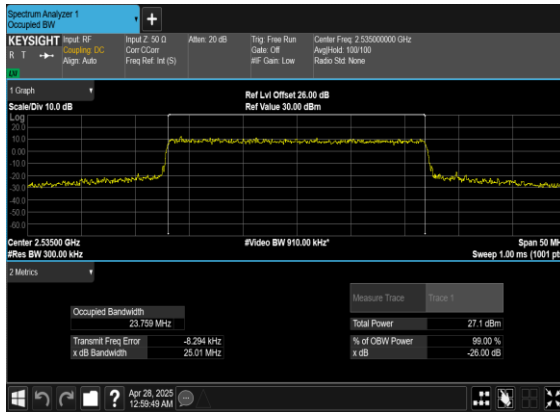


N7(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

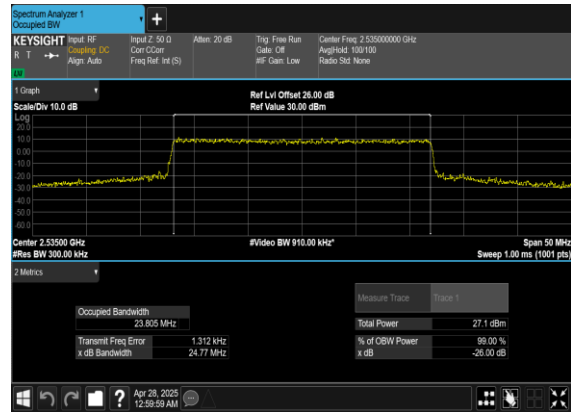

N7(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

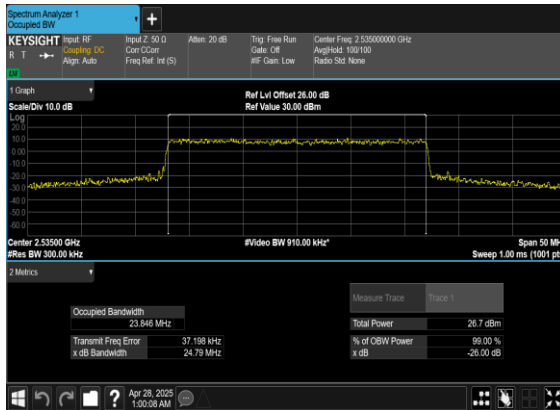

N7(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

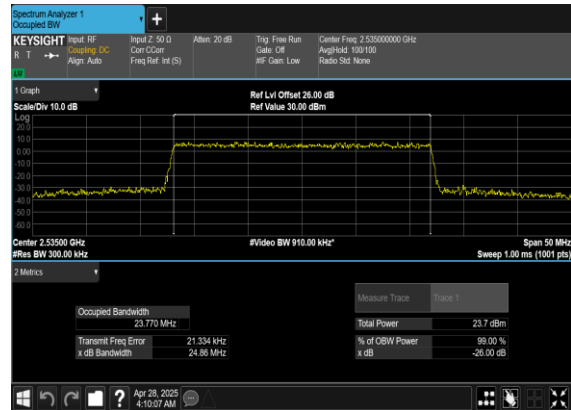





N7(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N7(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

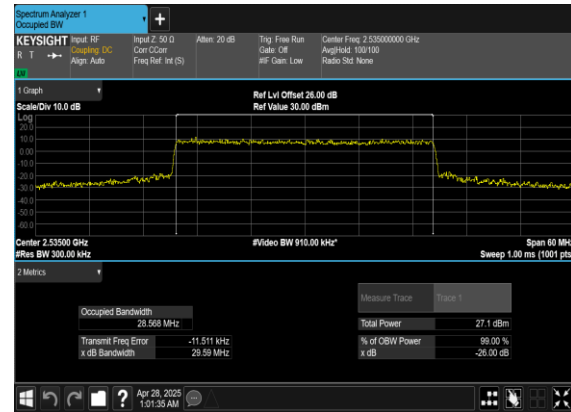

N7(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

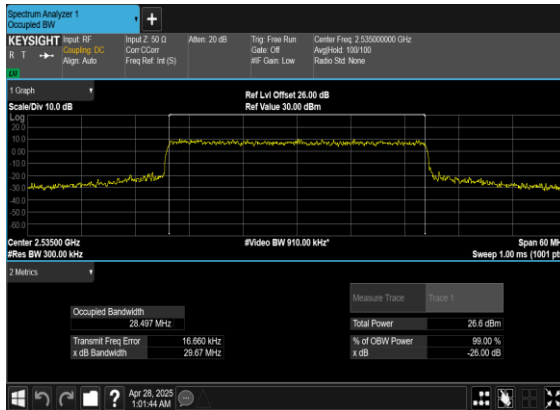


N7(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

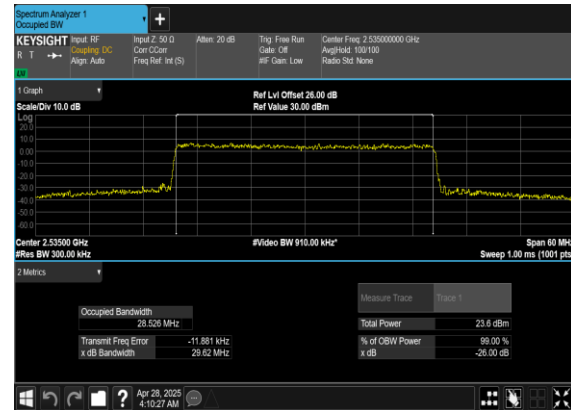





N7(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

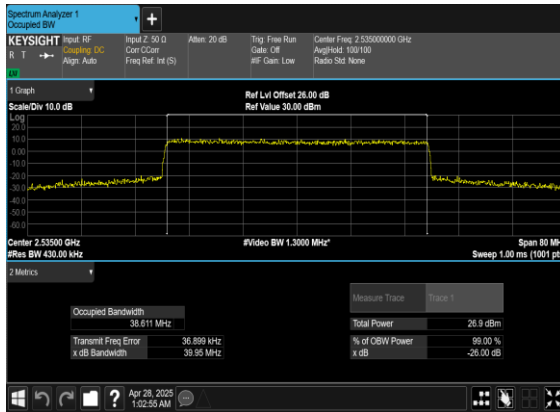


N7(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

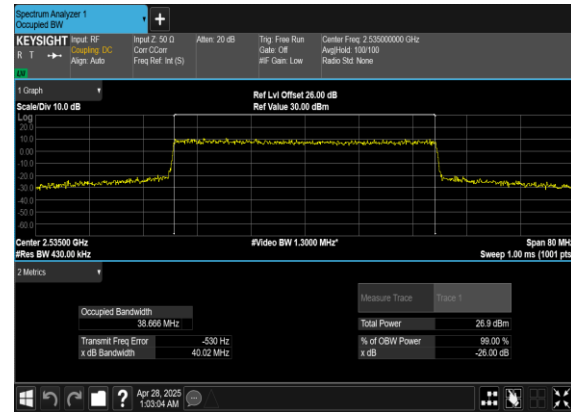

N7(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

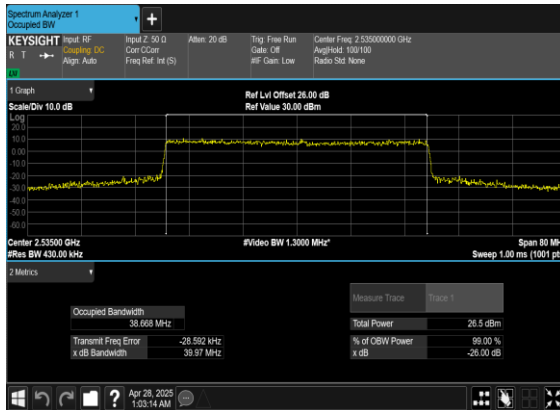


N7(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

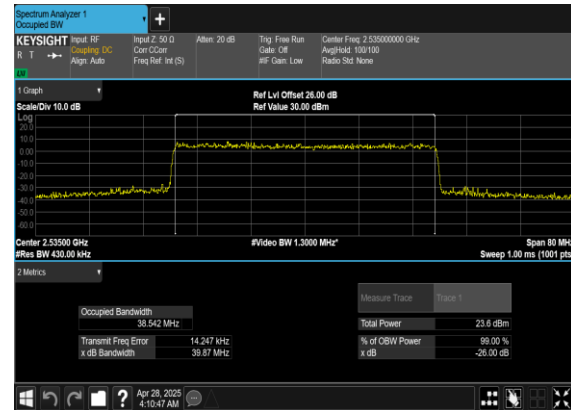





N7(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

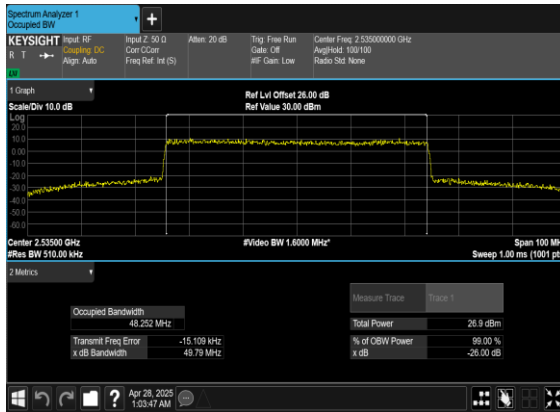


N7(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

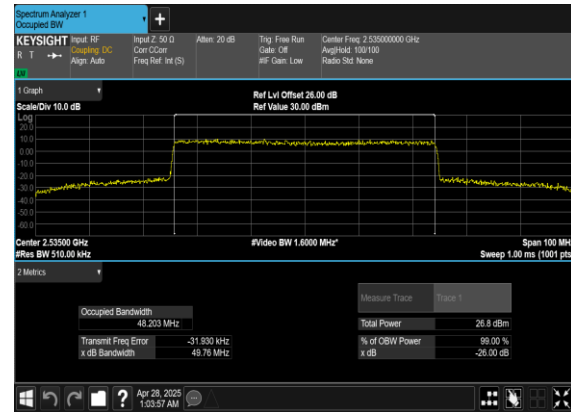

N7(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

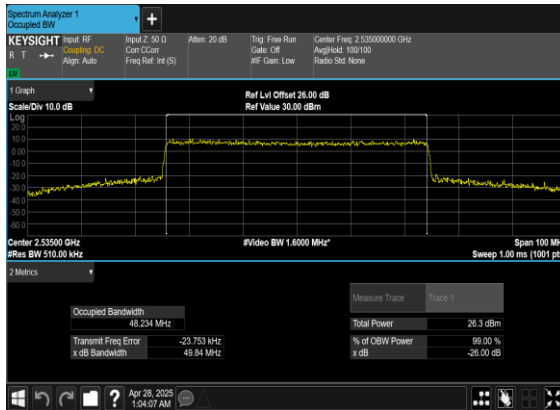

N7(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

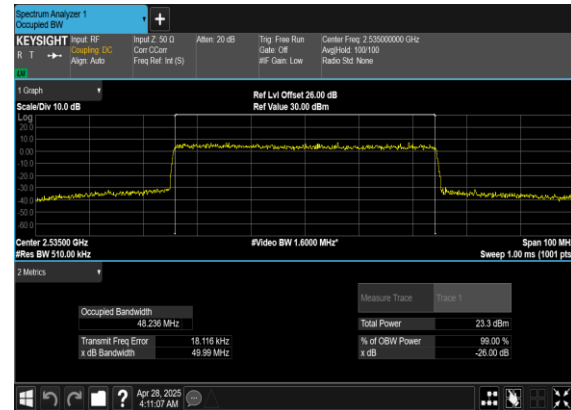

**Conducted Spurious Emissions**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	1@0	see graph	PASS




7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	25	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS




7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

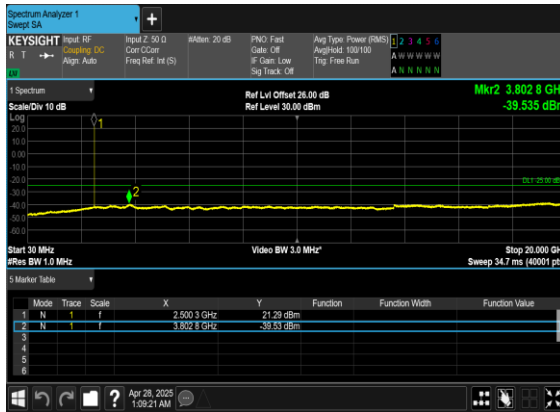


N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

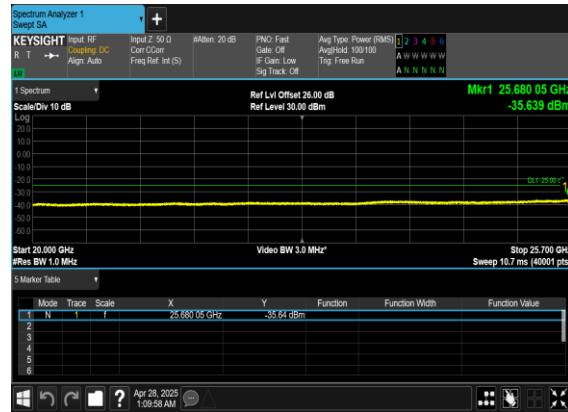

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

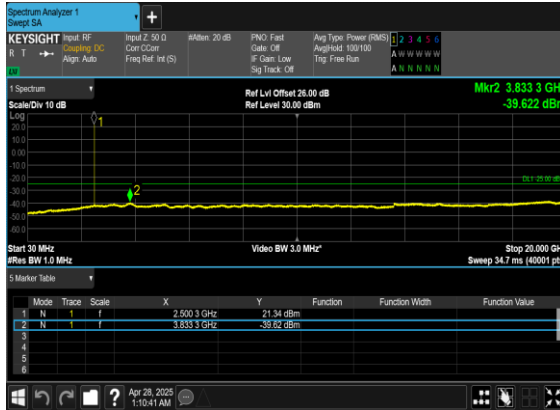

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

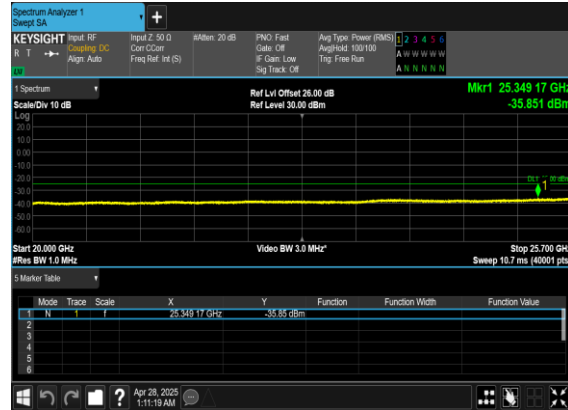





N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

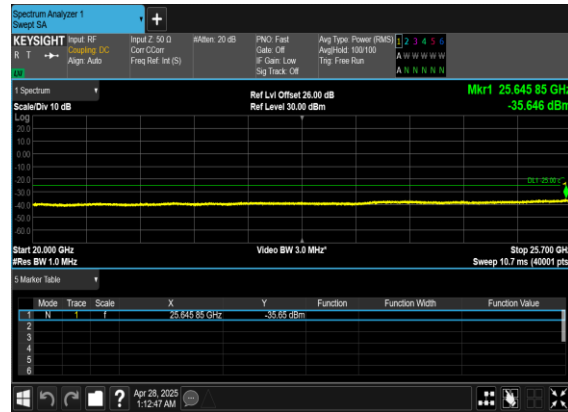

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

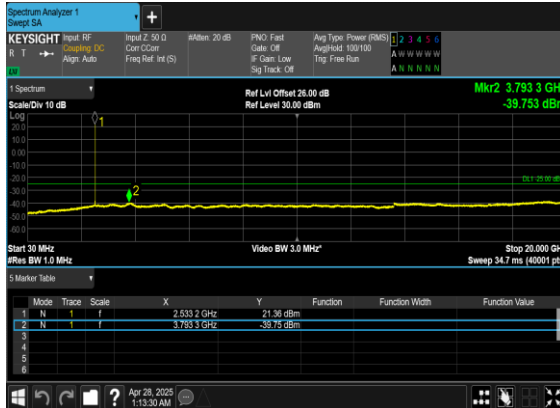

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

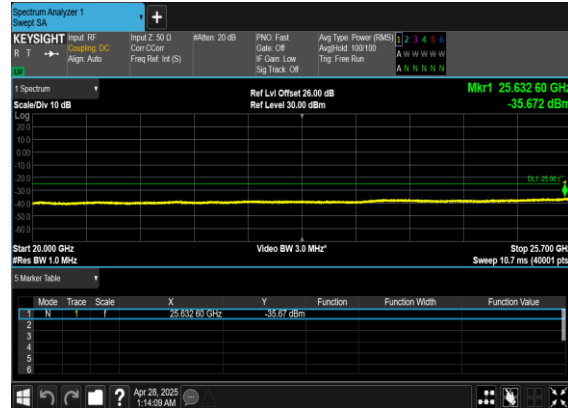





N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH




N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

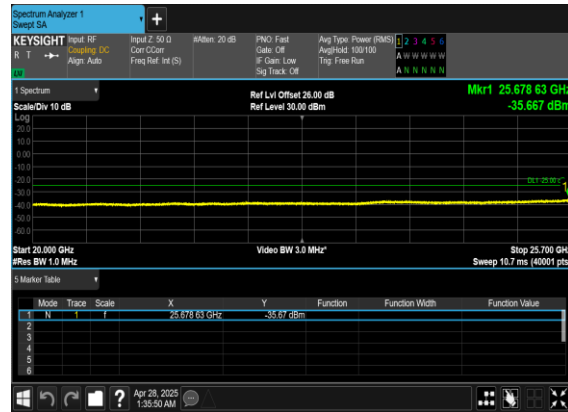

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

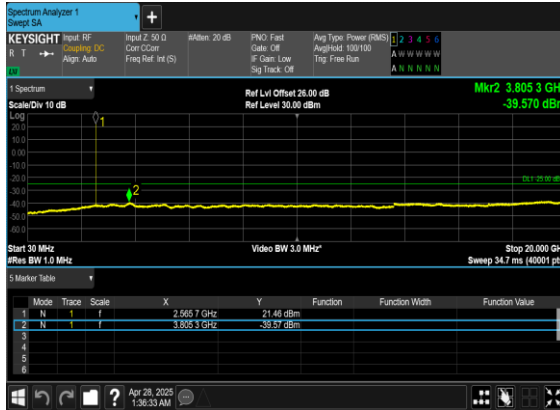


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

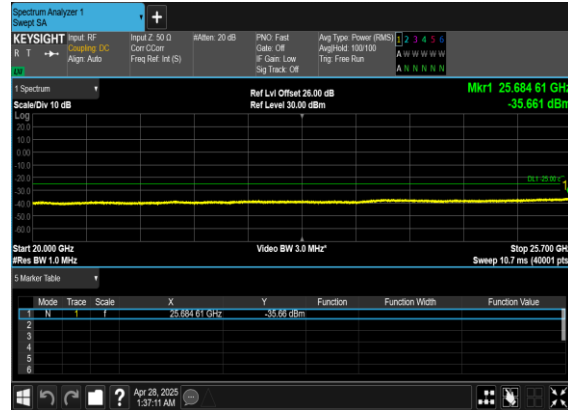





N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

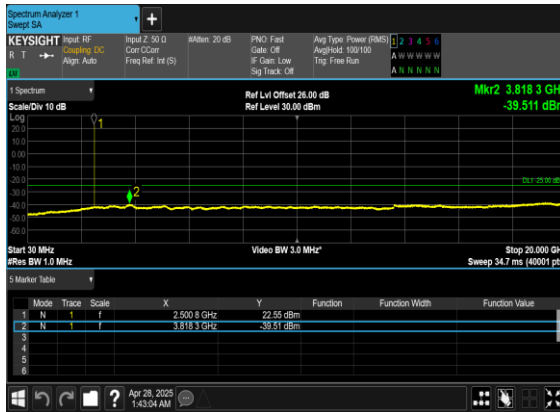


N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

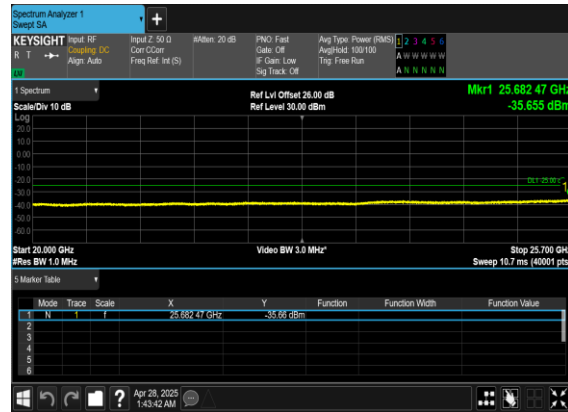

N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

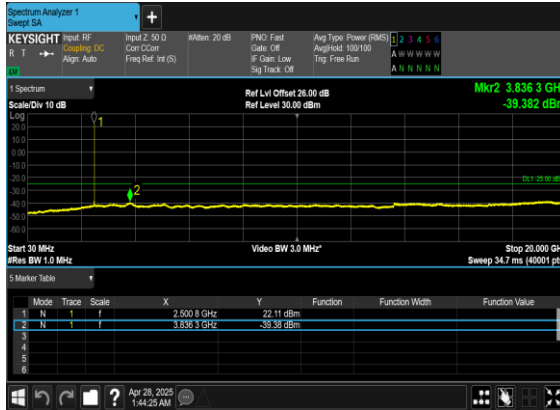

N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

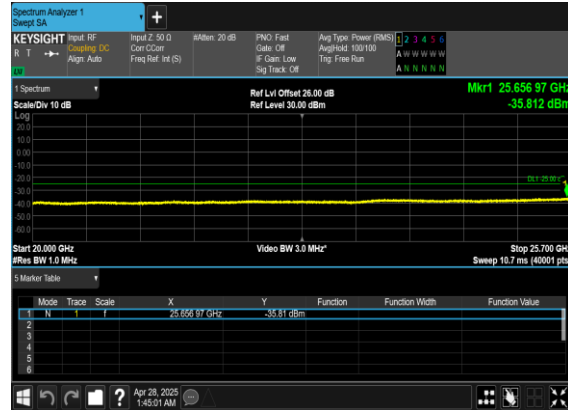





N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

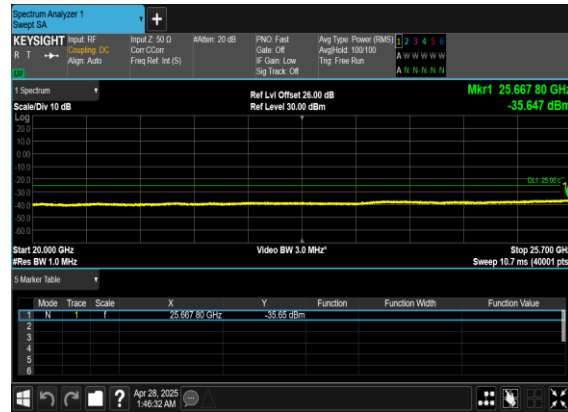

N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

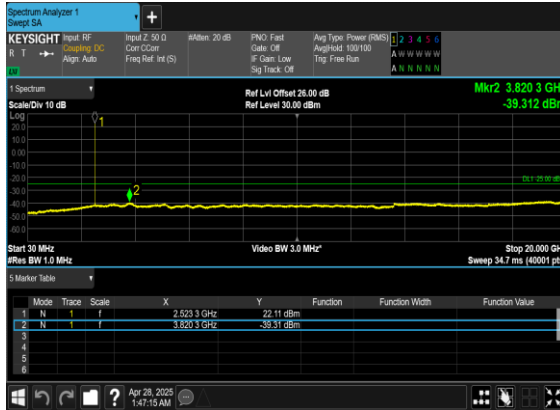

N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

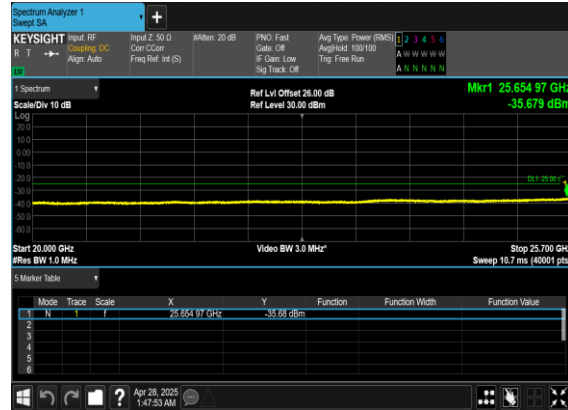





N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH




N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

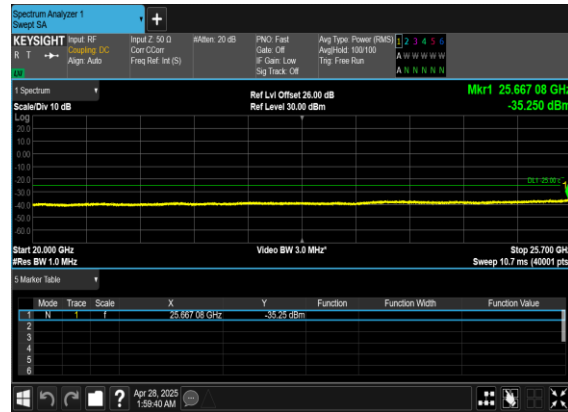

N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

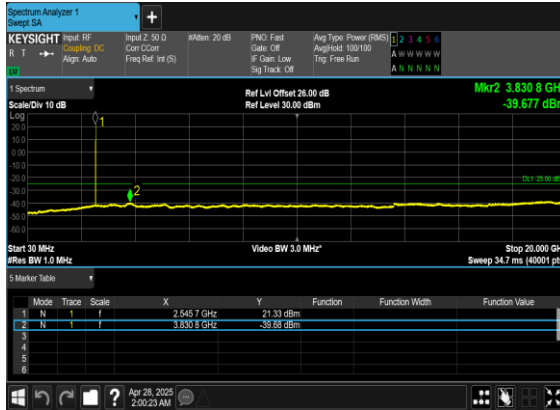


N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

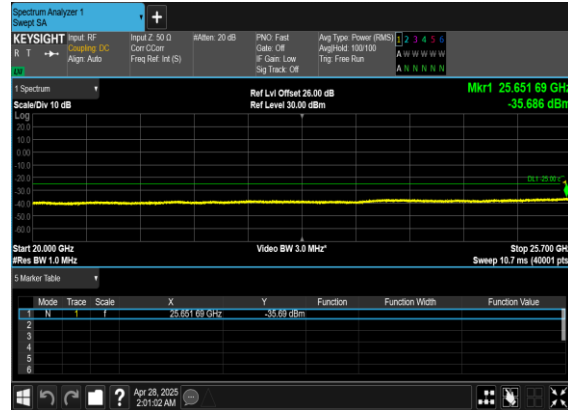





N7(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

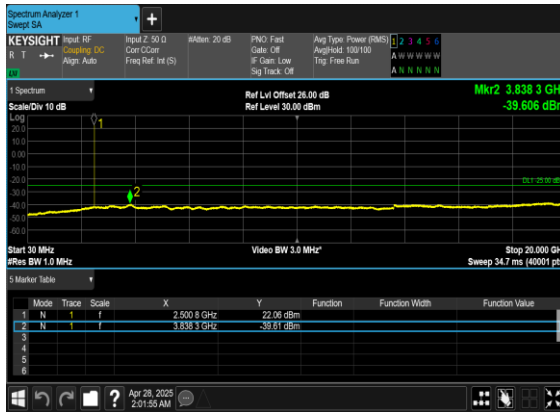


N7(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

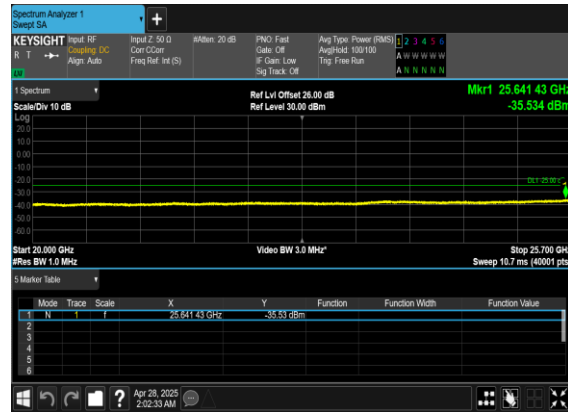

N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

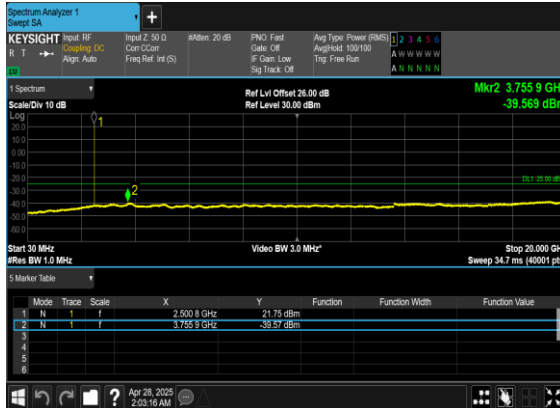


N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

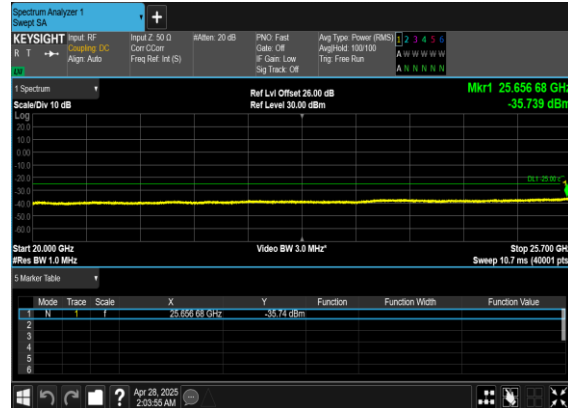





N7(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

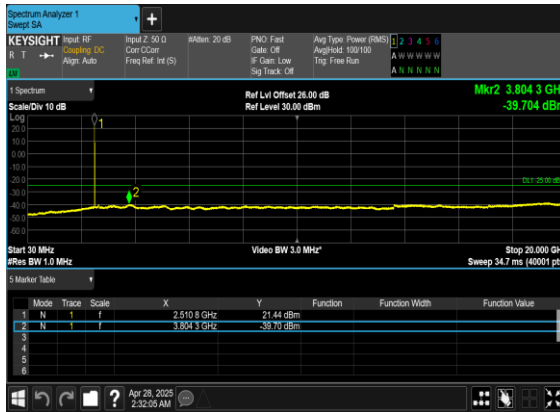


N7(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

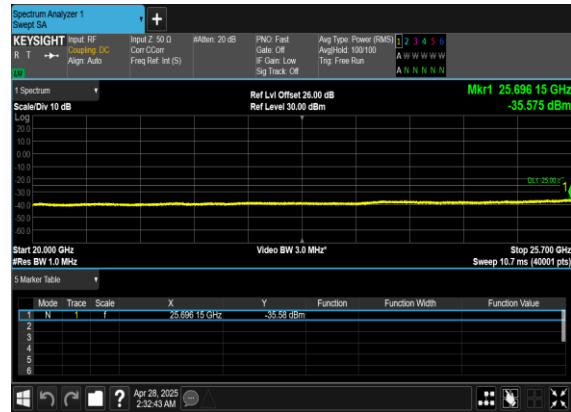

N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

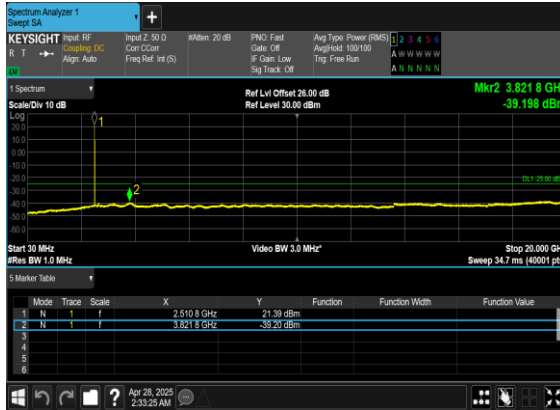

N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

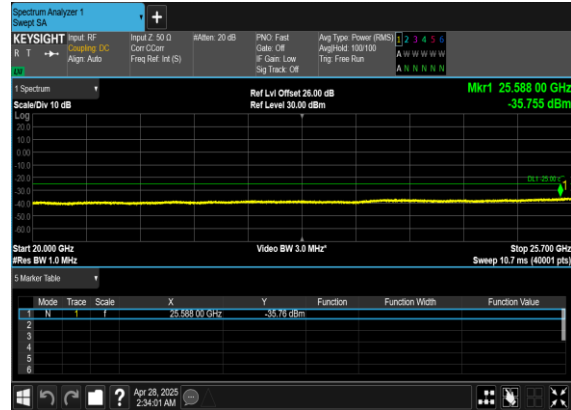



N7(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH




N7(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH



N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH



N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

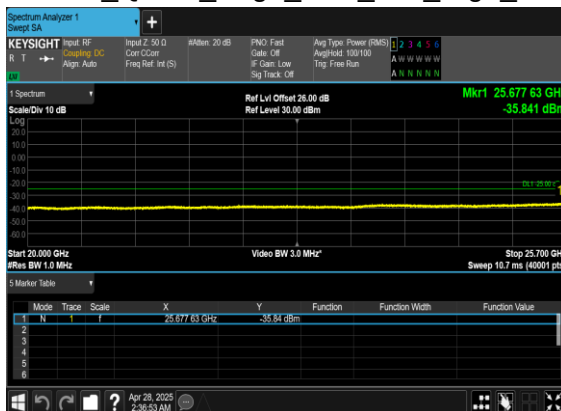


**Conducted Band Edge**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	1@132	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@132	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	270@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@269	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@269	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	270@0	see graph	PASS




N7(5M)_DFT-s-
OFDM BPSK Edge 1RB Left Low CH

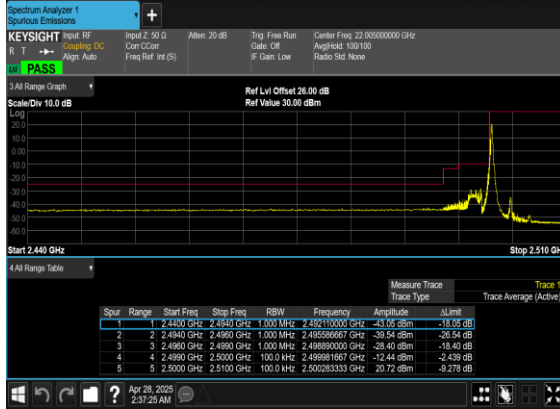


N7(5M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH

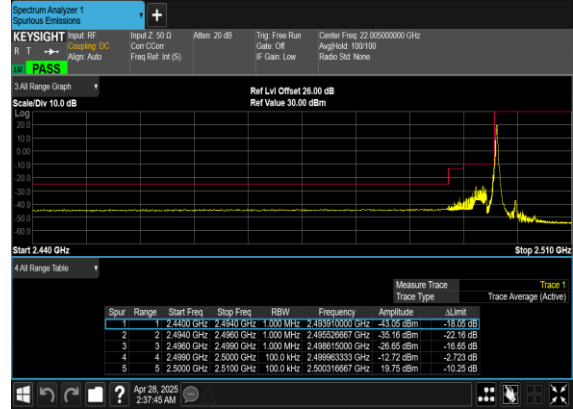

N7(5M)_DFT-s-
OFDM BPSK Outer Full Low CH

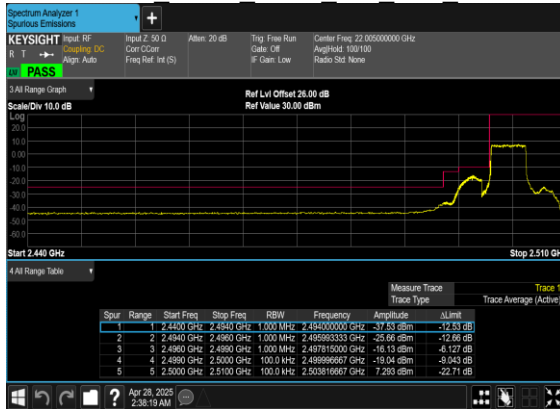


N7(5M)_DFT-s-
OFDM QPSK Outer Full Low CH

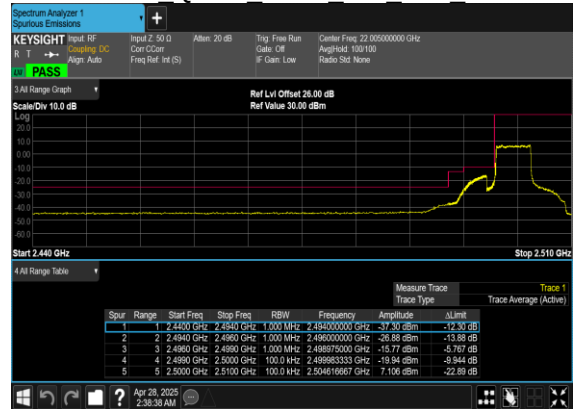





N7(5M)_DFT-s-
OFDM BPSK Edge 1RB Right High CH

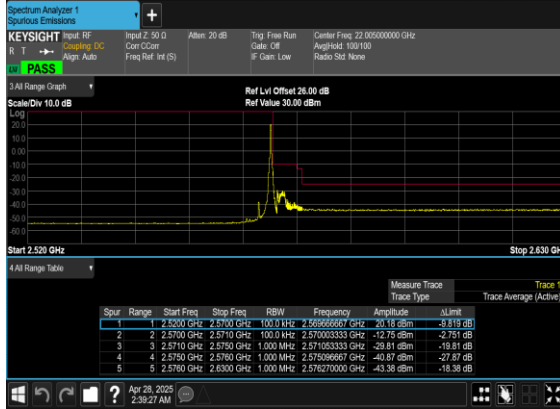


N7(5M)_DFT-s-
OFDM QPSK Edge 1RB Right High CH

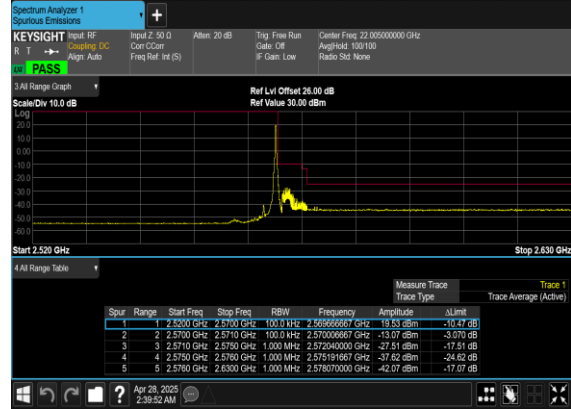

N7(5M)_DFT-s-
OFDM BPSK Outer Full High CH

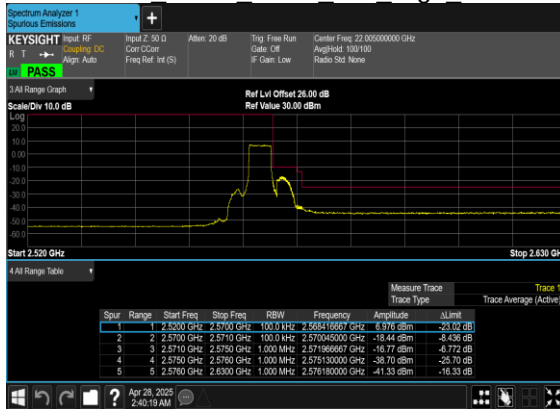


N7(5M)_DFT-s-
OFDM QPSK Outer Full High CH

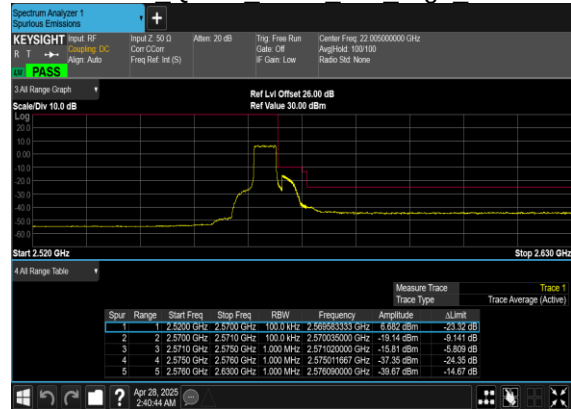





N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

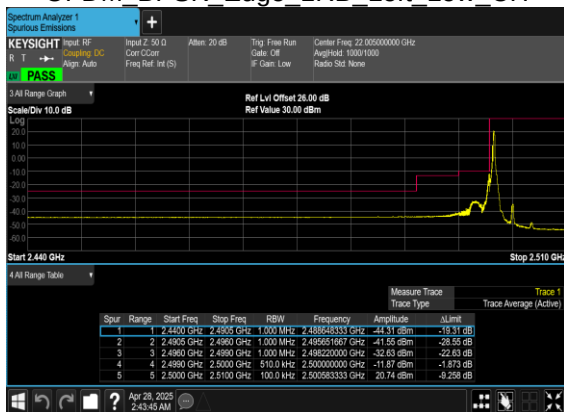

N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

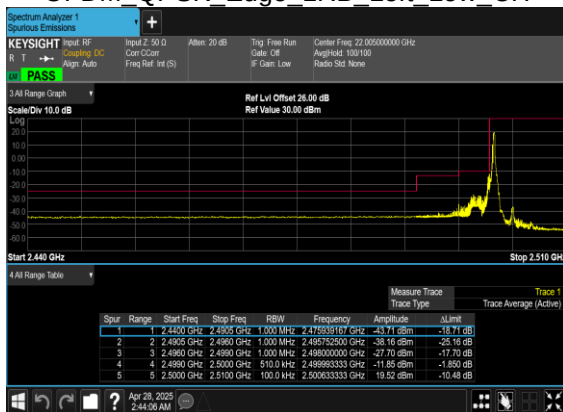

N7(25M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

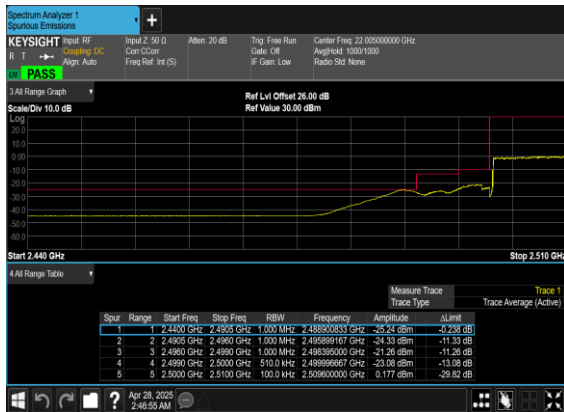

N7(25M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH
_CHP_PASS

