

TEST REPORT

Product : Tablet PC
Trade mark : N/A
Model/Type reference : MW-100
Serial Number : N/A
Report Number : EED32R80934504
FCC ID : 2AUX7-MW100
Date of Issue : Jul. 09, 2025
Test Standards : 47 CFR Part 15 Subpart E
Test result : PASS

Prepared for:


Estone Technology LTD

**2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road,
Bao'an, Shenzhen 518101, China**

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Park, Zone 70, Bao'an District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:



Reviewed by:



Approved by:

Keven Tan

Date:

Frazer Li

Jul. 09, 2025

Aaron Ma

Date:

Check No.: 5436090625



1 Content

1 CONTENT	2
2 TEST SUMMARY	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST CONFIGURATION	6
3.4 TEST ENVIRONMENT	6
3.5 DESCRIPTION OF SUPPORT UNITS	7
3.6 TEST LOCATION	7
3.7 DEVIATION FROM STANDARDS	7
3.8 ABNORMALITIES FROM STANDARD CONDITIONS	7
3.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
3.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	7
4 EQUIPMENT LIST	8
5 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	11
5.1 ANTENNA REQUIREMENT	11
5.2 AC POWER LINE CONDUCTED EMISSIONS	12
5.3 MAXIMUM CONDUCTED OUTPUT POWER	16
5.4 6dB EMISSION BANDWIDTH	17
5.5 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	18
5.6 MAXIMUM POWER SPECTRAL DENSITY	19
5.7 FREQUENCY STABILITY	20
5.8 RADIATED EMISSION	21
5.9 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BANDS	32
6 APPENDIX A	99
PHOTOGRAPHS OF TEST SETUP	100
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	103

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	PASS
Duty Cycle	47 CFR Part 15 Subpart E Section 15.407	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
26dB Emission Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
99% Occupied Bandwidth	\	PASS
6dB Emission Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (e)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	PASS
Radiated Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS
Radiated Emissions which fall in the restricted bands	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS

3 General Information

3.1 Client Information

Applicant:	Estone Technology LTD
Address of Applicant:	2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road, Bao'an, Shenzhen 518101, China
Manufacturer:	Estone Technology LTD
Address of Manufacturer:	2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road, Bao'an, Shenzhen 518101, China
Factory :	Estone Technology LTD
Address of Factory :	2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road, Bao'an, Shenzhen 518101, China

3.2 General Description of EUT

Product Name:	Tablet PC	
Model No.:	MW-100	
Trade mark:	N/A	
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fixed Location	
Type of Modulation:	IEEE 802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11n(HT20/HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11ac(VHT20/VHT40/VHT80): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) IEEE 802.11ax(HE20/HE40/HE80): OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM,1024QAM)	
Operating Frequency	U-NII-1: 5150-5250MHz U-NII-3:5745-5825MHz	
Antenna Type:	FPC Antenna	
Antenna Gain:	ANT0: 2.7 dBi ANT1: 1.54 dBi	
Power Supply:	Adapter: Battery:	Model: MX36C1-1203000 Input: 100-240V, 50-60Hz, 1.4A Output: 12V, 3A DC 7.6V
Test voltage:	DC 12V	
Sample Received Date:	Jun. 23, 2025	
Sample tested Date:	Jun. 23, 2025 to Jun. 30, 2025	

Operation Frequency each of channel

802.11a/802.11n/802.11ac/802.11ax (20MHz) Frequency/Channel Operations:

U-NII-1		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
-	-	165	5825

802.11n/802.11ac/802.11ax (40MHz) Frequency/Channel Operations:

U-NII-1		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

802.11ac/802.11ax (80MHz) Frequency/Channel Operations:

U-NII-1		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
42	5210	155	5775

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

3.3 Test Configuration

EUT Test Software Settings:	
Software:	N/A
EUT Power Grade:	Default
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
Test Mode:	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(VHT20)	MCS0
802.11ac(VHT40)	MCS0
802.11ac(VHT80)	MCS0
802.11ax(VHT20)	MCS0
802.11ax(VHT40)	MCS0
802.11ax(VHT80)	MCS0

3.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Temperature:	NT (Normal Temperature)
	LT (Low Temperature)
	HT (High Temperature)
Working Voltage of the EUT:	NV (Normal Voltage)
	LV (Low Voltage)
	HV (High Voltage)

3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	Dell	P77F	FCC&CE	CTI

3.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

3.7 Deviation from Standards

None.

3.8 Abnormalities from Standard Conditions

None.

3.9 Other Information Requested by the Customer

None.

3.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Communication test set	R&S	CMW500	107929	06-16-2025	06-15-2026
Signal Generator	R&S	SMBV100A	1407.6004K02-262149-CV	09-02-2024	09-01-2025
Spectrum Analyzer	R&S	FSV40	101200	07-18-2024	07-17-2025
RF control unit(power unit)	MWRF-test	MW100-RFCB	MW220620CTI-42	06-16-2025	06-15-2026
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-30-2024	11-29-2025
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-26-2025	05-25-2026
BT&WI-FI Automatic test software	MWRF-test	MTS 8310	V2.0.0.0	---	---
Spectrum Analyzer	R&S	FSV3044	101509	02-14-2025	02-13-2026

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-08-2025	04-07-2026
Temperature/ Humidity Indicator	Defu	TH128	/	03-31-2025	03-30-2026
LISN	R&S	ENV216	100098	09-19-2024	09-18-2025
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-18-2024 06-07-2025	06-17-2025 06-06-2026

ISN	TESEQ	ISN T800	30297	12-05-2024	12-04-2025
-----	-------	----------	-------	------------	------------

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial	Cal. date	Cal. Due date
			Number	(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESCI7	100938-003	09/07/2024	09/06/2025
Spectrum Analyzer	R&S	FSV40	101200	07/18/2024	07/17/2025
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/14/2025	05/13/2026
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/07/2025	04/06/2026
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/05/2024	12/04/2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023	07/01/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/07/2025	04/06/2026
Preamplifier	Agilent	11909A	12-1	03/03/2025	03/02/2026
Preamplifier	CD	PAP-1840-60	6041.6042	05/26/2025	05/25/2026
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Receiver	Keysight	N9038A	MY57290136	01-04-2025	01-03-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-14-2025	01-13-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-14-2025	01-13-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-12-2025	04-11-2026
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-12-2025	04-11-2026
Horn Antenna	ETS-LINDGREN	3117	57407	07-03-2024	07-02-2025
Preamplifier	EMCI	EMC001330	980563	03-03-2025	03-02-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-18-2024	07-17-2025
Preamplifier	Tonscend	EMC051845SE	980380	12-05-2024	12-04-2025
Communication test set	R&S	CMW500	102898	01-04-2025	01-03-2026
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	03-31-2025	03-30-2026
RSE Automatic test software	JS Tonscend	JS36-RSE	V4.0.0.0	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

5 Radio Technical Requirements Specification


5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:	Please see Internal photos
The antenna is FPC antenna. The best case gain of the antenna 0 is 2.7dBi. The best case gain of the antenna 1 is 1.54dBi.	

5.2 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50

* Decreases with the logarithm of the frequency.

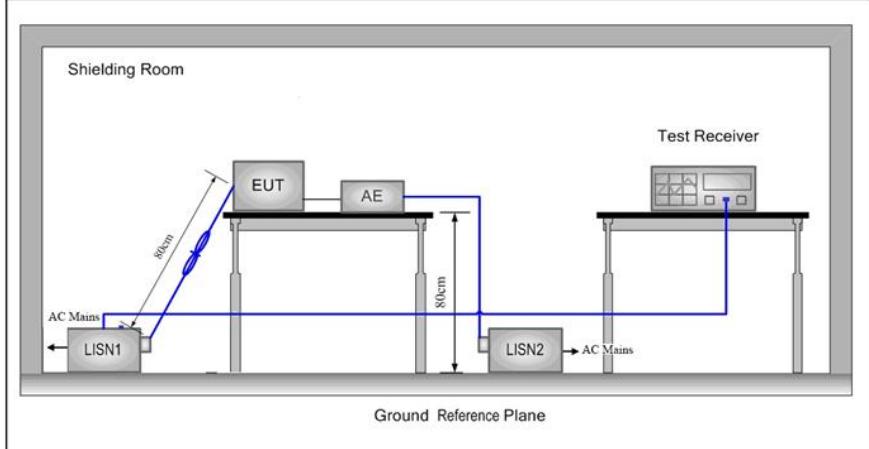
Test Setup:	
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to

	ANSI C63.10: 2013 on conducted measurement.
Test Mode:	All modes were tested, only the worst case was recorded in the report.
Test Results:	Pass



Measurement Data


Live line:

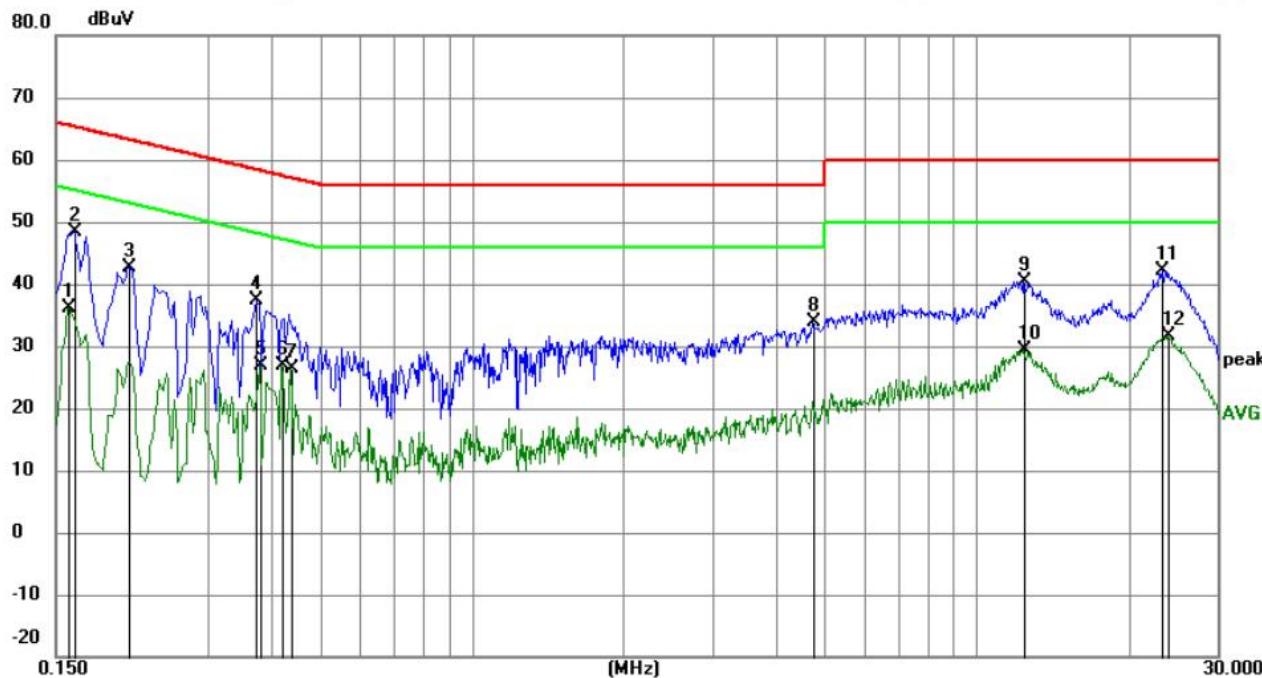

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.1590	25.98	10.27	36.25	55.52	-19.27	AVG	
2	*	0.1635	38.13	10.26	48.39	65.28	-16.89	QP	
3		0.2085	32.53	10.20	42.73	63.26	-20.53	QP	
4		0.3750	27.27	10.10	37.37	58.39	-21.02	QP	
5		0.3795	16.89	10.10	26.99	48.29	-21.30	AVG	
6		0.4200	16.78	10.09	26.87	47.45	-20.58	AVG	
7		0.4380	16.18	10.09	26.27	47.10	-20.83	AVG	
8		4.7445	23.90	10.07	33.97	56.00	-22.03	QP	
9		12.4215	30.54	9.91	40.45	60.00	-19.55	QP	
10		12.4215	19.57	9.91	29.48	50.00	-20.52	AVG	
11		23.3070	32.28	9.81	42.09	60.00	-17.91	QP	
12		23.9865	21.74	9.81	31.55	50.00	-18.45	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

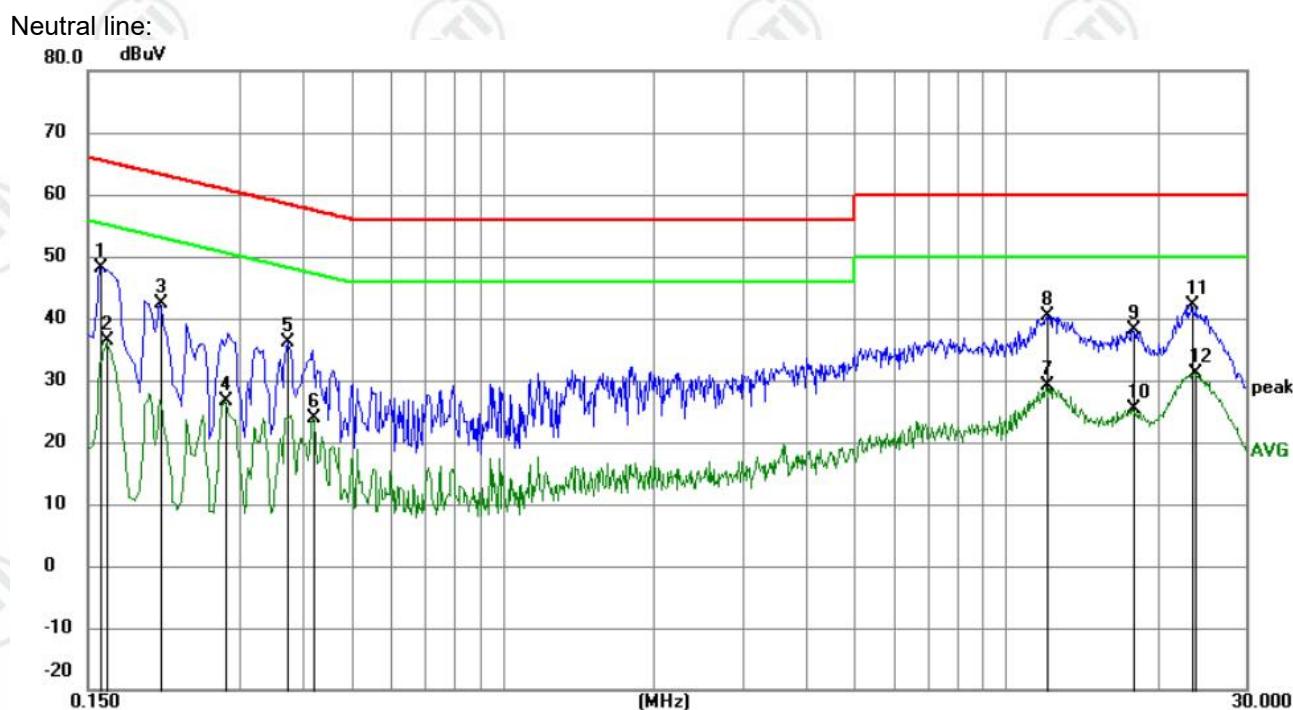


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1590	37.88	10.27	48.15	65.52	-17.37	QP	
2		0.1635	26.09	10.26	36.35	55.28	-18.93	AVG	
3		0.2085	32.20	10.20	42.40	63.26	-20.86	QP	
4		0.2805	16.46	10.15	26.61	50.80	-24.19	AVG	
5		0.3750	25.96	10.10	36.06	58.39	-22.33	QP	
6		0.4200	13.75	10.09	23.84	47.45	-23.61	AVG	
7		12.0075	19.20	9.91	29.11	50.00	-20.89	AVG	
8		12.1020	30.35	9.91	40.26	60.00	-19.74	QP	
9		17.8575	28.40	9.83	38.23	60.00	-21.77	QP	
10		17.8575	15.64	9.83	25.47	50.00	-24.53	AVG	
11		23.3880	32.41	9.81	42.22	60.00	-17.78	QP	
12		23.7930	21.23	9.81	31.04	50.00	-18.96	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power

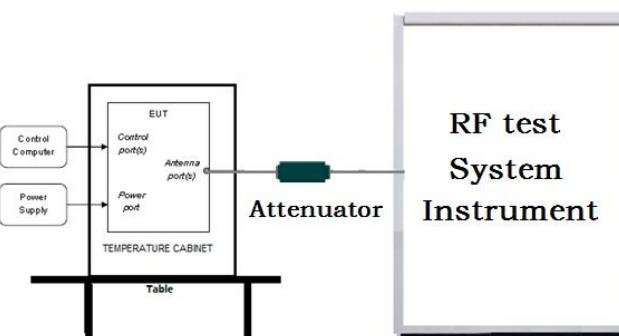Test Requirement:	47 CFR Part 15C Section 15.407 (a)												
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E												
Test Setup:													
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report. 												
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> $\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device </td> </tr> <tr> <td>5250-5350</td> <td>$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$</td> </tr> <tr> <td>5470-5725</td> <td>$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$</td> </tr> <tr> <td>5725-5850</td> <td>$\leq 1W(30dBm)$</td> </tr> <tr> <td>Remark:</td> <td> * Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. </td> </tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	$\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device	5250-5350	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$	5470-5725	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$	5725-5850	$\leq 1W(30dBm)$	Remark:	* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.
Frequency band (MHz)	Limit												
5150-5250	$\leq 1W(30dBm)$ for master device $\leq 250mW(24dBm)$ for client device												
5250-5350	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$												
5470-5725	$\leq 250mW(24dBm)$ for client device or $11dBm+10\log B^*$												
5725-5850	$\leq 1W(30dBm)$												
Remark:	* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.												
Test Mode:	Transmitting mode with modulation												
Test Results:	Refer to Appendix A												


5.4 6dB Emission Bandwidth

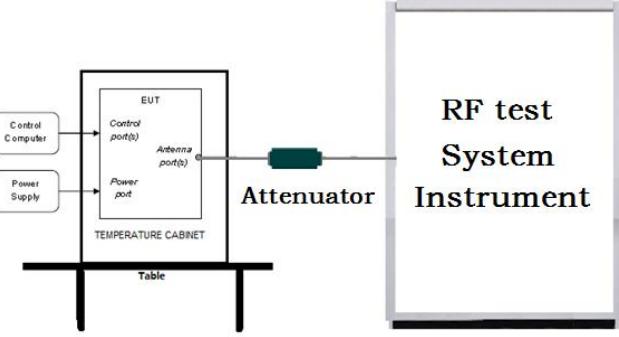Test Requirement:	47 CFR Part 15C Section 15.407 (e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Limit:	≥ 500 kHz
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A


5.5 26dB Emission Bandwidth and 99% Occupied Bandwidth

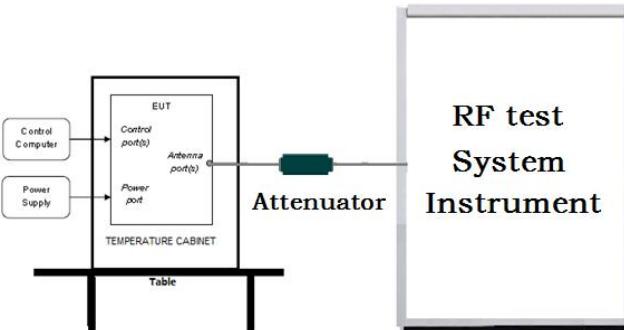Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. 4. Measure and record the results in the test report.
Limit:	No restriction limits
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A

5.6 Maximum Power Spectral Density



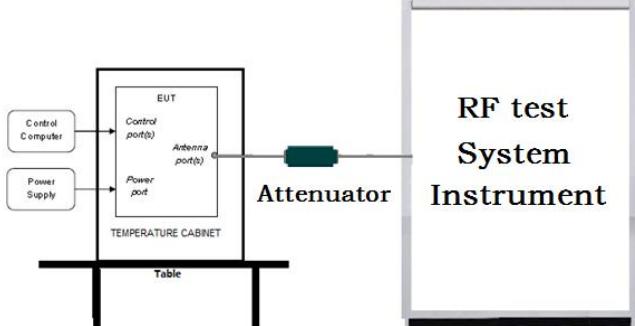
Test Requirement:	47 CFR Part 15C Section 15.407 (a)												
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F												
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>												
Test Procedure:	<ol style="list-style-type: none"> 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW \geq 3*RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 												
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> \leq17dBm in 1MHz for master device \leq11dBm in 1MHz for client device </td> </tr> <tr> <td>5250-5350</td> <td>\leq11dBm in 1MHz for client device</td> </tr> <tr> <td>5470-5725</td> <td>\leq11dBm in 1MHz for client device</td> </tr> <tr> <td>5725-5850</td> <td>\leq30dBm in 500kHz</td> </tr> <tr> <td>Remark:</td> <td>The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.</td> </tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	\leq 17dBm in 1MHz for master device \leq 11dBm in 1MHz for client device	5250-5350	\leq 11dBm in 1MHz for client device	5470-5725	\leq 11dBm in 1MHz for client device	5725-5850	\leq 30dBm in 500kHz	Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.
Frequency band (MHz)	Limit												
5150-5250	\leq 17dBm in 1MHz for master device \leq 11dBm in 1MHz for client device												
5250-5350	\leq 11dBm in 1MHz for client device												
5470-5725	\leq 11dBm in 1MHz for client device												
5725-5850	\leq 30dBm in 500kHz												
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.												
Test Mode:	Transmitting mode with modulation												
Test Results:	Refer to Appendix A												

5.7 Frequency Stability

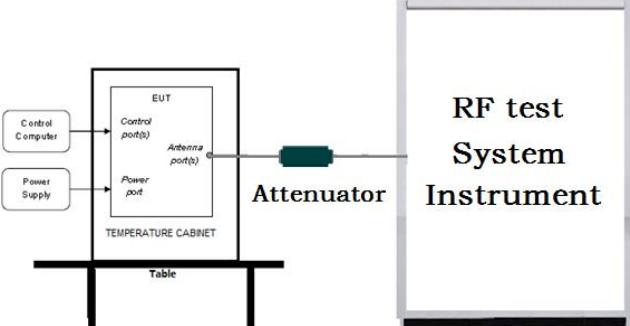Test Requirement:	47 CFR Part 15C Section 15.407 (g)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. 2. Turn the EUT on and couple its output to a spectrum analyzer. 3. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. 4. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. 5. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A

5.8 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing				

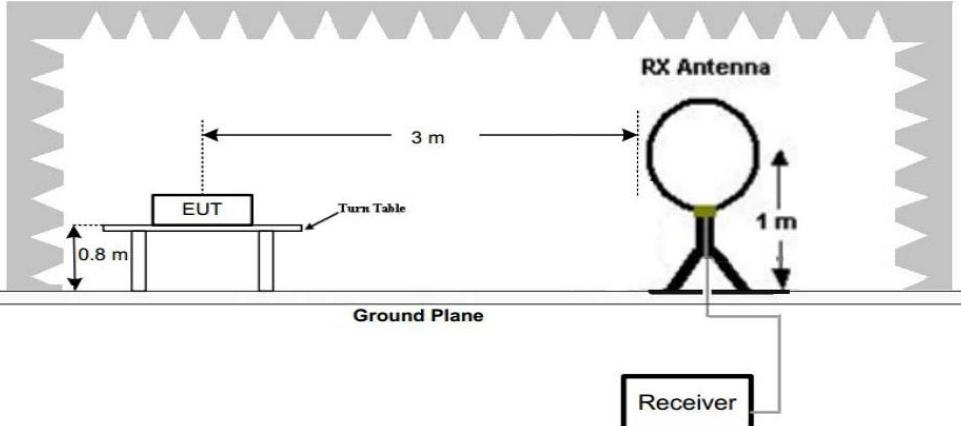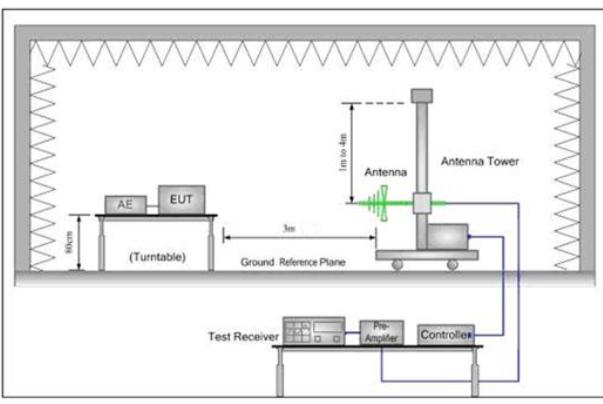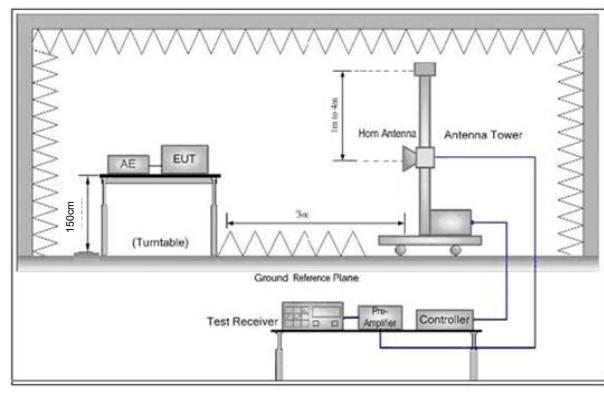	<p>an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p> <p>Note:</p> <p>(i) $EIRP = ((E^*d)^2) / 30$ where: • E is the field strength in V/m; • d is the measurement distance in meters; • EIRP is the equivalent isotropically radiated power in watts.</p> <p>(ii) Working in dB units, the above equation is equivalent to: $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$</p> <p>(iii) Or, if d is 3 meters: $EIRP[dBm] = E[dB\mu V/m] - 95.2$</p>
Test Setup:	
	<p>Figure 1. Below 30MHz</p>
	 
	<p>Figure 2. 30MHz to 1GHz</p> <p>Figure 3. Above 1 GHz</p>
Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:</p>


	<p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel and the highest channel</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Remark: During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 6Mbps for 802.11 a was recorded in the report.


Horizontal:

Test Graph

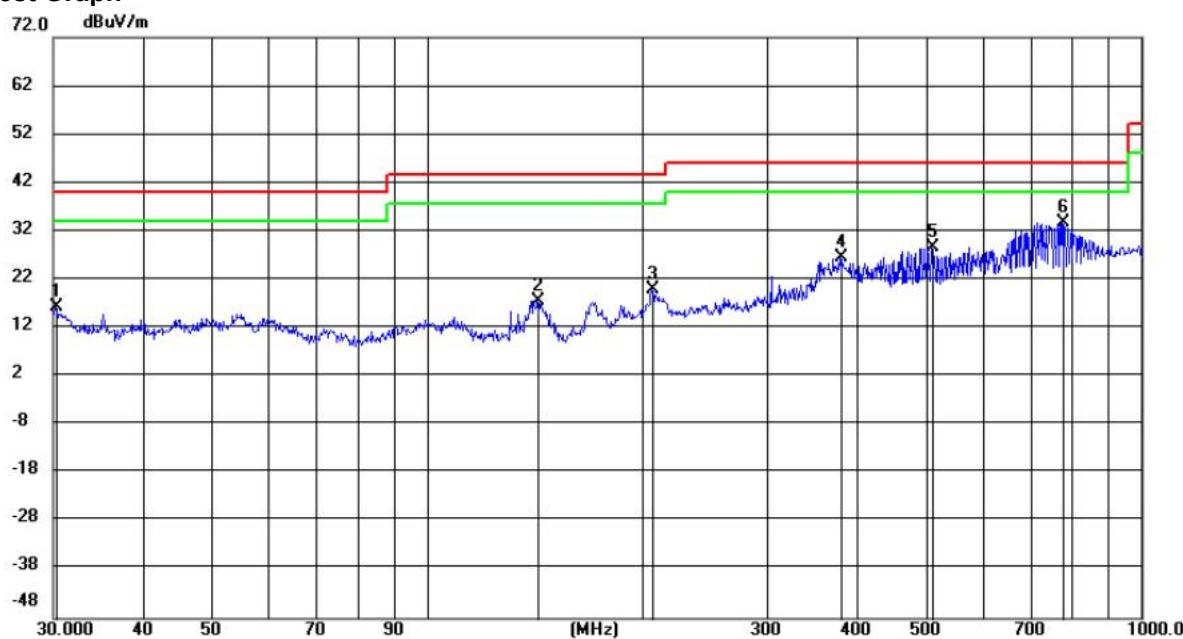

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table			
			Level	Factor	ment							
			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		30.2747	4.09	12.37	16.46	40.00	-23.54	QP	199	17		
2		143.3260	7.16	10.42	17.58	43.50	-25.92	QP	199	79		
3		206.5785	6.84	13.03	19.87	43.50	-23.63	QP	199	89		
4		378.6506	7.55	18.94	26.49	46.00	-19.51	QP	100	240		
5		509.9541	7.62	21.06	28.68	46.00	-17.32	QP	199	226		
6	*	776.1970	9.11	24.77	33.88	46.00	-12.12	QP	100	24		

Vertical:

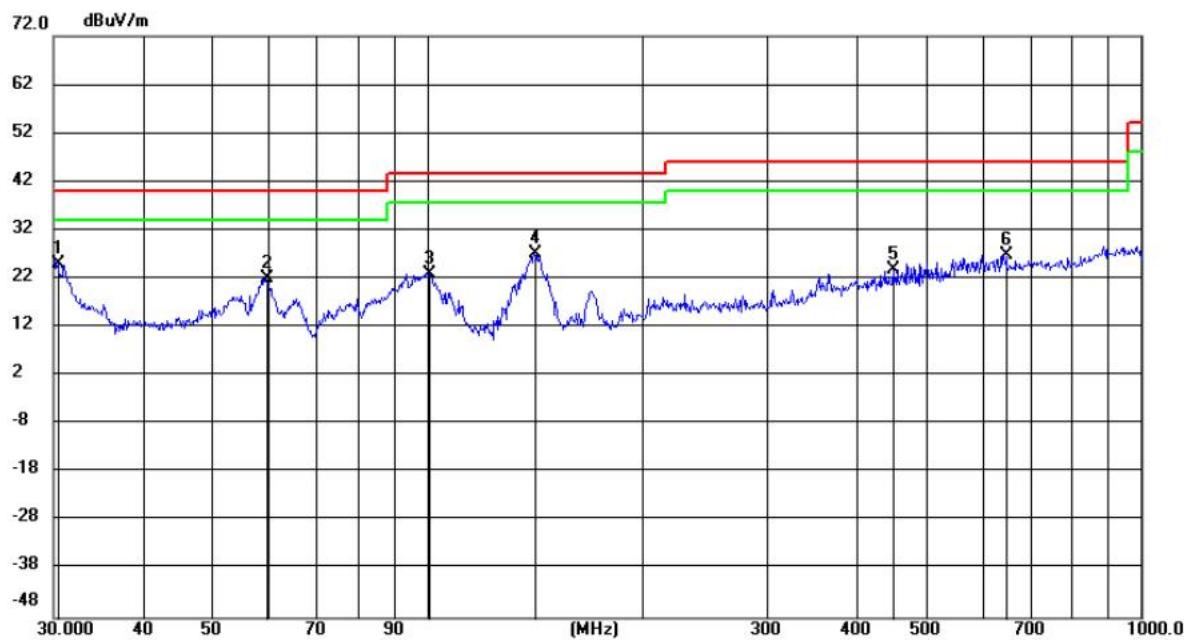Test Graph


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	30.4932	12.74	12.38	25.12	40.00	-14.88	QP	100	143	
2		59.6180	8.58	13.38	21.96	40.00	-18.04	QP	200	122	
3		100.5983	9.82	13.27	23.09	43.50	-20.41	QP	100	80	
4		141.7765	16.73	10.43	27.16	43.50	-16.34	QP	100	80	
5		450.2658	3.57	20.20	23.77	46.00	-22.23	QP	100	249	
6		645.1195	3.21	23.75	26.96	46.00	-19.04	QP	100	91	

Transmitter Emission above 1GHz

Remark: During the test, the Radiates Emission above 1G was performed in all modes, only the worst case ant1 and ant2 transmit simultaneously was recorded in the report.

MIMO:

Mode:			802.11 n(HT20) Transmitting			Channel:		5180MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1460.2584	13.13	35.45	48.58	74.00	25.42	PASS	Horizontal	PK
2	2166.7067	15.60	35.10	50.70	74.00	23.30	PASS	Horizontal	PK
3	2909.0164	17.87	35.00	52.87	74.00	21.13	PASS	Horizontal	PK
4	7723.6612	-1.81	46.79	44.98	74.00	29.02	PASS	Horizontal	PK
5	10386.0443	1.86	46.40	48.26	74.00	25.74	PASS	Horizontal	PK
6	13256.5878	6.17	43.96	50.13	74.00	23.87	PASS	Horizontal	PK
7	1425.717	12.96	35.28	48.24	74.00	25.76	PASS	Vertical	PK
8	1926.6771	14.82	34.60	49.42	74.00	24.58	PASS	Vertical	PK
9	2683.0673	17.33	35.27	52.60	74.00	21.40	PASS	Vertical	PK
10	7609.2305	-1.66	47.51	45.85	74.00	28.15	PASS	Vertical	PK
11	10333.7167	1.95	45.84	47.79	74.00	26.21	PASS	Vertical	PK
12	13259.463	6.17	43.96	50.13	74.00	23.87	PASS	Vertical	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		5200MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1466.6387	13.20	35.86	49.06	74.00	24.94	PASS	Horizontal	PK
2	2128.8652	15.54	35.44	50.98	74.00	23.02	PASS	Horizontal	PK
3	3438.1375	19.41	33.60	53.01	74.00	20.99	PASS	Horizontal	PK
4	8355.6178	-1.17	48.25	47.08	74.00	26.92	PASS	Horizontal	PK
5	10141.0821	1.77	46.13	47.90	74.00	26.10	PASS	Horizontal	PK
6	12352.0676	4.72	44.39	49.11	74.00	24.89	PASS	Horizontal	PK
7	1435.6174	13.05	35.39	48.44	74.00	25.56	PASS	Vertical	PK
8	2096.0838	15.26	35.77	51.03	74.00	22.97	PASS	Vertical	PK
9	3221.6489	18.57	34.60	53.17	74.00	20.83	PASS	Vertical	PK
10	7052.0276	-3.27	48.46	45.19	74.00	28.81	PASS	Vertical	PK
11	10596.5048	2.11	46.35	48.46	74.00	25.54	PASS	Vertical	PK
12	13320.991	6.32	43.40	49.72	74.00	24.28	PASS	Vertical	PK

Mode:		802.11 n(HT20) Transmitting				Channel:		5240MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1333.9734	12.43	35.92	48.35	74.00	25.65	PASS	Horizontal	PK
2	1921.3969	14.90	34.81	49.71	74.00	24.29	PASS	Horizontal	PK
3	2847.4139	17.49	34.94	52.43	74.00	21.57	PASS	Horizontal	PK
4	7660.408	-1.84	47.21	45.37	74.00	28.63	PASS	Horizontal	PK
5	11267.5634	2.42	45.91	48.33	74.00	25.67	PASS	Horizontal	PK
6	14994.8997	9.59	41.75	51.34	74.00	22.66	PASS	Horizontal	PK
7	1371.1548	12.80	36.04	48.84	74.00	25.16	PASS	Vertical	PK
8	2076.063	15.10	35.37	50.47	74.00	23.53	PASS	Vertical	PK
9	2792.4117	17.39	34.97	52.36	74.00	21.64	PASS	Vertical	PK
10	8354.4677	-1.19	48.48	47.29	74.00	26.71	PASS	Vertical	PK
11	10564.3032	1.94	45.73	47.67	74.00	26.33	PASS	Vertical	PK
12	13747.0874	7.23	43.39	50.62	74.00	23.38	PASS	Vertical	PK

Mode:		802.11 n(HT40) Transmitting				Channel:		5190MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1399.096	12.83	35.88	48.71	74.00	25.29	PASS	Horizontal	PK
2	2014.6806	14.78	35.52	50.30	74.00	23.70	PASS	Horizontal	PK
3	2824.093	17.36	35.27	52.63	74.00	21.37	PASS	Horizontal	PK
4	8318.2409	-1.09	47.41	46.32	74.00	27.68	PASS	Horizontal	PK
5	10821.9161	1.99	46.03	48.02	74.00	25.98	PASS	Horizontal	PK
6	14632.0566	9.42	42.06	51.48	74.00	22.52	PASS	Horizontal	PK
7	1417.3567	13.03	35.10	48.13	74.00	25.87	PASS	Vertical	PK
8	1774.651	14.49	34.99	49.48	74.00	24.52	PASS	Vertical	PK
9	2533.4613	16.72	35.38	52.10	74.00	21.90	PASS	Vertical	PK
10	8466.0233	-0.74	47.52	46.78	74.00	27.22	PASS	Vertical	PK
11	11256.0628	2.43	47.05	49.48	74.00	24.52	PASS	Vertical	PK
12	14954.0727	9.26	42.00	51.26	74.00	22.74	PASS	Vertical	PK

Mode:		802.11 n(HT40) Transmitting				Channel:		5230MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1394.9158	12.83	35.78	48.61	74.00	25.39	PASS	Horizontal	PK
2	1802.5921	14.39	35.15	49.54	74.00	24.46	PASS	Horizontal	PK
3	2556.1222	16.74	35.12	51.86	74.00	22.14	PASS	Horizontal	PK
4	8085.9293	-1.61	47.18	45.57	74.00	28.43	PASS	Horizontal	PK
5	10755.2128	2.13	45.99	48.12	74.00	25.88	PASS	Horizontal	PK
6	14527.4014	8.61	41.89	50.50	74.00	23.50	PASS	Horizontal	PK
7	1447.2779	13.08	35.71	48.79	74.00	25.21	PASS	Vertical	PK
8	2175.947	15.62	35.03	50.65	74.00	23.35	PASS	Vertical	PK
9	2818.5927	17.34	34.71	52.05	74.00	21.95	PASS	Vertical	PK
10	8150.9075	-1.08	47.74	46.66	74.00	27.34	PASS	Vertical	PK
11	10559.128	1.92	45.77	47.69	74.00	26.31	PASS	Vertical	PK
12	13045.5523	6.35	43.80	50.15	74.00	23.85	PASS	Vertical	PK

Mode:		802.11 ac(VHT80) Transmitting				Channel:		5210MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1455.8582	13.10	35.18	48.28	74.00	25.72	PASS	Horizontal	PK
2	2124.245	15.46	35.48	50.94	74.00	23.06	PASS	Horizontal	PK
3	3056.4223	18.32	35.17	53.49	74.00	20.51	PASS	Horizontal	PK
4	8380.344	-0.84	48.03	47.19	74.00	26.81	PASS	Horizontal	PK
5	11847.1924	3.06	45.99	49.05	74.00	24.95	PASS	Horizontal	PK
6	14904.6202	9.35	42.23	51.58	74.00	22.42	PASS	Horizontal	PK
7	1428.3571	12.93	35.90	48.83	74.00	25.17	PASS	Vertical	PK
8	1926.8971	14.81	34.77	49.58	74.00	24.42	PASS	Vertical	PK
9	2933.2173	17.87	35.15	53.02	74.00	20.98	PASS	Vertical	PK
10	7594.8547	-1.71	47.38	45.67	74.00	28.33	PASS	Vertical	PK
11	11294.0147	2.40	46.16	48.56	74.00	25.44	PASS	Vertical	PK
12	14385.9443	9.12	41.09	50.21	74.00	23.79	PASS	Vertical	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		5745MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1485.6986	13.28	35.03	48.31	74.00	25.69	PASS	Horizontal	PK
2	2008.2508	14.83	35.06	49.89	74.00	24.11	PASS	Horizontal	PK
3	2540.154	16.88	34.80	51.68	74.00	22.32	PASS	Horizontal	PK
4	7674.6116	-1.81	47.00	45.19	74.00	28.81	PASS	Horizontal	PK
5	10790.5527	1.98	45.57	47.55	74.00	26.45	PASS	Horizontal	PK
6	13564.5376	7.48	42.64	50.12	74.00	23.88	PASS	Horizontal	PK
7	1365.7866	12.72	36.24	48.96	74.00	25.04	PASS	Vertical	PK
8	1882.8383	14.61	34.26	48.87	74.00	25.13	PASS	Vertical	PK
9	2708.4708	17.23	35.34	52.57	74.00	21.43	PASS	Vertical	PK
10	7697.6132	-1.75	47.72	45.97	74.00	28.03	PASS	Vertical	PK
11	9942.5628	1.73	45.40	47.13	74.00	26.87	PASS	Vertical	PK
12	14403.3269	9.15	41.41	50.56	74.00	23.44	PASS	Vertical	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		5785MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1432.3432	12.89	35.69	48.58	74.00	25.42	PASS	Horizontal	PK
2	1985.1485	14.83	35.50	50.33	74.00	23.67	PASS	Horizontal	PK
3	3025.8526	18.16	35.20	53.36	74.00	20.64	PASS	Horizontal	PK
4	7607.9072	-1.66	47.97	46.31	74.00	27.69	PASS	Horizontal	PK
5	9725.5817	1.13	46.62	47.75	74.00	26.25	PASS	Horizontal	PK
6	13779.9853	7.11	43.34	50.45	74.00	23.55	PASS	Horizontal	PK
7	1480.198	13.13	35.05	48.18	74.00	25.82	PASS	Vertical	PK
8	1944.9945	14.88	34.82	49.70	74.00	24.30	PASS	Vertical	PK
9	2897.6898	17.77	34.57	52.34	74.00	21.66	PASS	Vertical	PK
10	7514.3676	-2.44	48.30	45.86	74.00	28.14	PASS	Vertical	PK
11	9727.8819	1.12	46.47	47.59	74.00	26.41	PASS	Vertical	PK
12	11820.2547	2.58	46.45	49.03	74.00	24.97	PASS	Vertical	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		5825MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1313.5314	12.48	35.36	47.84	74.00	26.16	PASS	Horizontal	PK
2	1850.385	14.47	35.10	49.57	74.00	24.43	PASS	Horizontal	PK
3	2528.6029	16.80	34.81	51.61	74.00	22.39	PASS	Horizontal	PK
4	6974.5983	-3.09	48.79	45.70	74.00	28.30	PASS	Horizontal	PK
5	9238.7159	0.47	46.41	46.88	74.00	27.12	PASS	Horizontal	PK
6	13825.2217	7.13	43.03	50.16	74.00	23.84	PASS	Horizontal	PK
7	1394.3894	12.79	35.79	48.58	74.00	25.42	PASS	Vertical	PK
8	2174.3674	15.64	34.94	50.58	74.00	23.42	PASS	Vertical	PK
9	3047.3047	18.00	34.91	52.91	74.00	21.09	PASS	Vertical	PK
10	8921.2948	-0.09	46.14	46.05	74.00	27.95	PASS	Vertical	PK
11	11265.151	2.43	46.31	48.74	74.00	25.26	PASS	Vertical	PK
12	14210.114	8.28	41.83	50.11	74.00	23.89	PASS	Vertical	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		5755MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1404.2904	12.89	35.68	48.57	74.00	25.43	PASS	Horizontal	PK
2	1803.0803	14.26	34.82	49.08	74.00	24.92	PASS	Horizontal	PK
3	2534.6535	16.86	34.48	51.34	74.00	22.66	PASS	Horizontal	PK
4	6968.4646	-3.02	48.31	45.29	74.00	28.71	PASS	Horizontal	PK
5	9622.8415	1.22	45.29	46.51	74.00	27.49	PASS	Horizontal	PK
6	13385.1257	6.89	42.98	49.87	74.00	24.13	PASS	Horizontal	PK
7	1488.4488	13.36	35.49	48.85	74.00	25.15	PASS	Vertical	PK
8	2000.5501	14.85	35.01	49.86	74.00	24.14	PASS	Vertical	PK
9	2933.4433	17.97	34.52	52.49	74.00	21.51	PASS	Vertical	PK
10	7767.3845	-1.95	48.20	46.25	74.00	27.75	PASS	Vertical	PK
11	9745.5164	1.10	46.48	47.58	74.00	26.42	PASS	Vertical	PK
12	14359.624	9.01	41.45	50.46	74.00	23.54	PASS	Vertical	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		5795MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1431.7932	12.88	35.57	48.45	74.00	25.55	PASS	Horizontal	PK
2	1861.9362	14.63	34.40	49.03	74.00	24.97	PASS	Horizontal	PK
3	2941.6942	17.85	35.35	53.20	74.00	20.80	PASS	Horizontal	PK
4	8319.4213	-1.10	47.78	46.68	74.00	27.32	PASS	Horizontal	PK
5	9641.2428	1.18	45.56	46.74	74.00	27.26	PASS	Horizontal	PK
6	13822.9215	7.12	43.36	50.48	74.00	23.52	PASS	Horizontal	PK
7	1455.4455	13.02	36.20	49.22	74.00	24.78	PASS	Vertical	PK
8	1980.198	14.84	35.45	50.29	74.00	23.71	PASS	Vertical	PK
9	3083.0583	18.14	35.21	53.35	74.00	20.65	PASS	Vertical	PK
10	8846.1564	-0.25	46.54	46.29	74.00	27.71	PASS	Vertical	PK
11	12455.097	3.43	45.97	49.40	74.00	24.60	PASS	Vertical	PK
12	14909.3606	9.33	41.65	50.98	74.00	23.02	PASS	Vertical	PK

Mode:			802.11 ac(VHT80) Transmitting			Channel:		5775MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1580.308	13.71	35.12	48.83	74.00	25.17	PASS	Horizontal	PK
2	2331.1331	15.95	35.63	51.58	74.00	22.42	PASS	Horizontal	PK
3	3083.6084	18.16	34.94	53.10	74.00	20.90	PASS	Horizontal	PK
4	8345.4897	-1.23	47.83	46.60	74.00	27.40	PASS	Horizontal	PK
5	11249.8167	2.44	46.75	49.19	74.00	24.81	PASS	Horizontal	PK
6	13887.3258	7.84	42.67	50.51	74.00	23.49	PASS	Horizontal	PK
7	1357.5358	12.64	35.69	48.33	74.00	25.67	PASS	Vertical	PK
8	1676.0176	14.15	35.49	49.64	74.00	24.36	PASS	Vertical	PK
9	2440.5941	16.38	35.80	52.18	74.00	21.82	PASS	Vertical	PK
10	7759.7173	-1.92	47.42	45.50	74.00	28.50	PASS	Vertical	PK
11	10247.7165	1.93	46.09	48.02	74.00	25.98	PASS	Vertical	PK
12	13159.7106	6.12	43.41	49.53	74.00	24.47	PASS	Vertical	PK

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.9 Radiated Emission which fall in the restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated				

	<p>emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p> <p>Note:</p> <p>(i) $EIRP = ((E^*d)^2) / 30$ where: • E is the field strength in V/m; • d is the measurement distance in meters; • EIRP is the equivalent isotropically radiated power in watts.</p> <p>(ii) Working in dB units, the above equation is equivalent to: $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$</p> <p>(iii) Or, if d is 3 meters: $EIRP[dBm] = E[dB\mu V/m] - 95.2$</p>
Test Setup:	

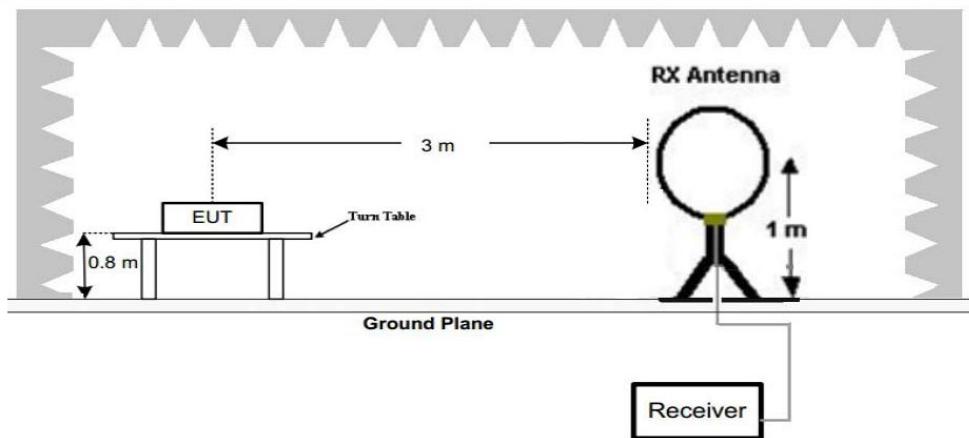


Figure 1. Below 30MHz

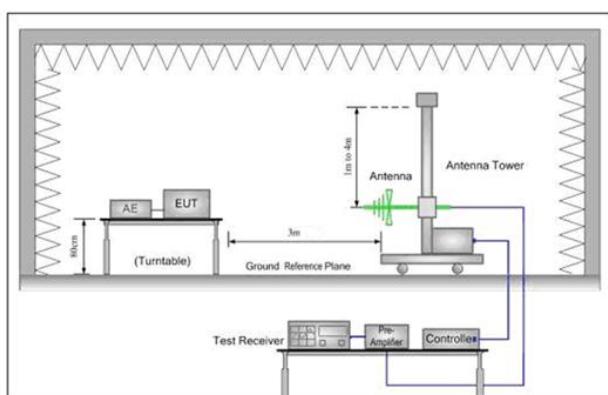


Figure 2. 30MHz to 1GHz

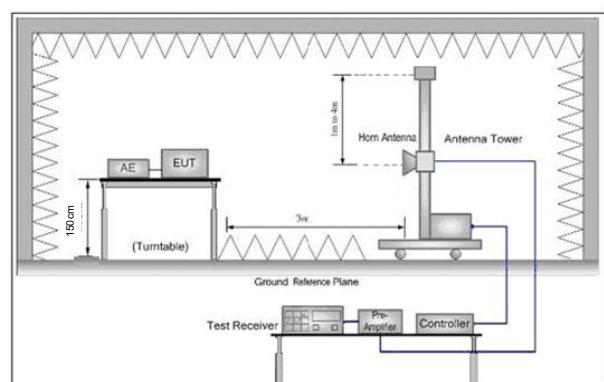



Figure 3. Above 1 GHz

Test Procedure:	<p>j. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p>
-----------------	--

	<p>Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>k. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>l. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>m. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>n. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>o. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>p. Test the EUT in the lowest channel, the Highest channel</p> <p>q. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>r. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Test Data:


EUT_Name		Test_Model	
Test_Mode	802.11 a Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

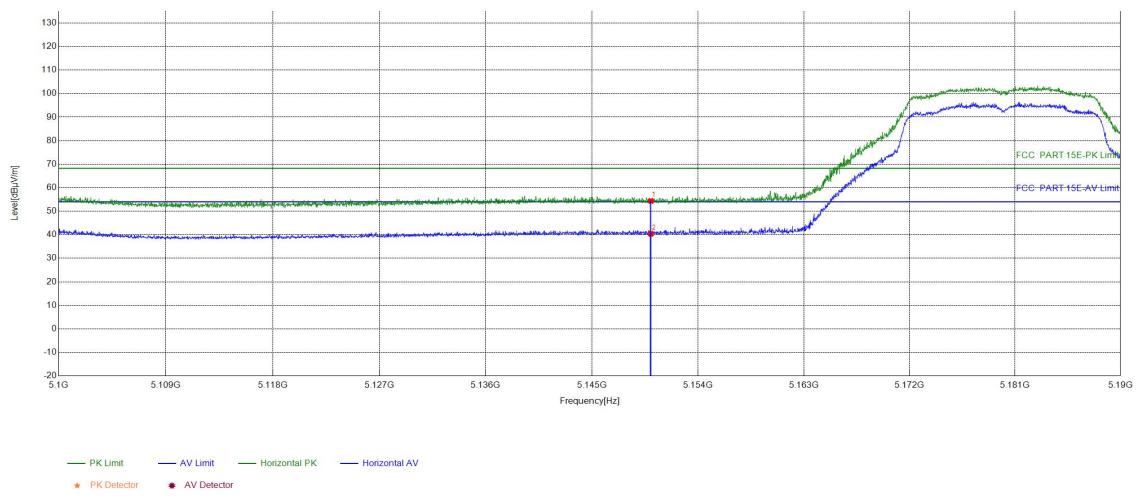Test Graph

Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	30.41	54.39	68.20	13.81	PASS	Horizontal	PK
2	5150	23.98	16.43	40.41	54.00	13.59	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 a Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

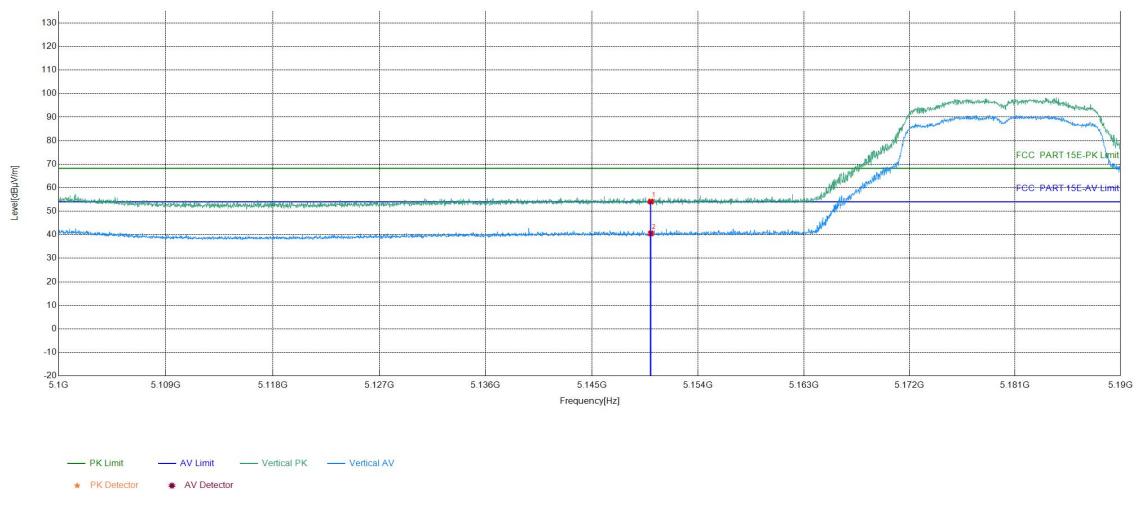Test Graph




Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	30.13	54.11	68.20	14.09	PASS	Vertical	PK
2	5150	23.98	16.58	40.56	54.00	13.44	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

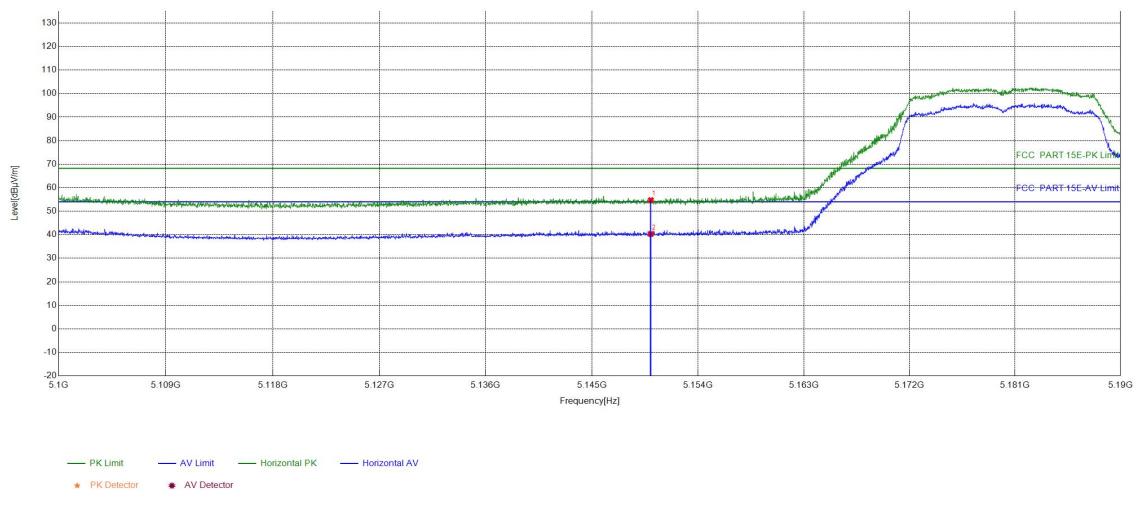


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	30.74	54.72	68.20	13.48	PASS	Horizontal	PK
2	5150	23.98	16.32	40.30	54.00	13.70	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

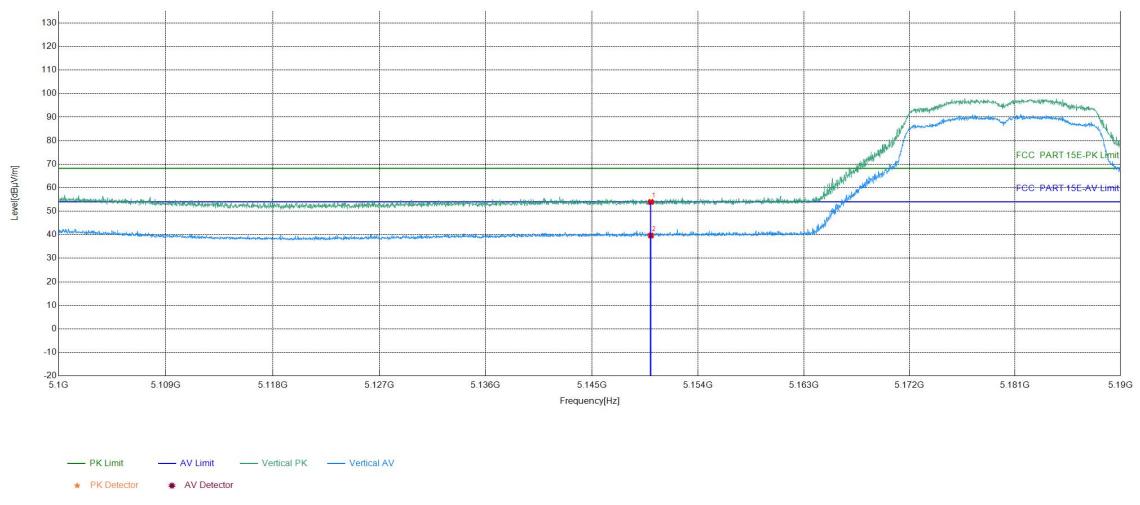


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	29.96	53.94	68.20	14.26	PASS	Vertical	PK
2	5150	23.98	15.68	39.66	54.00	14.34	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

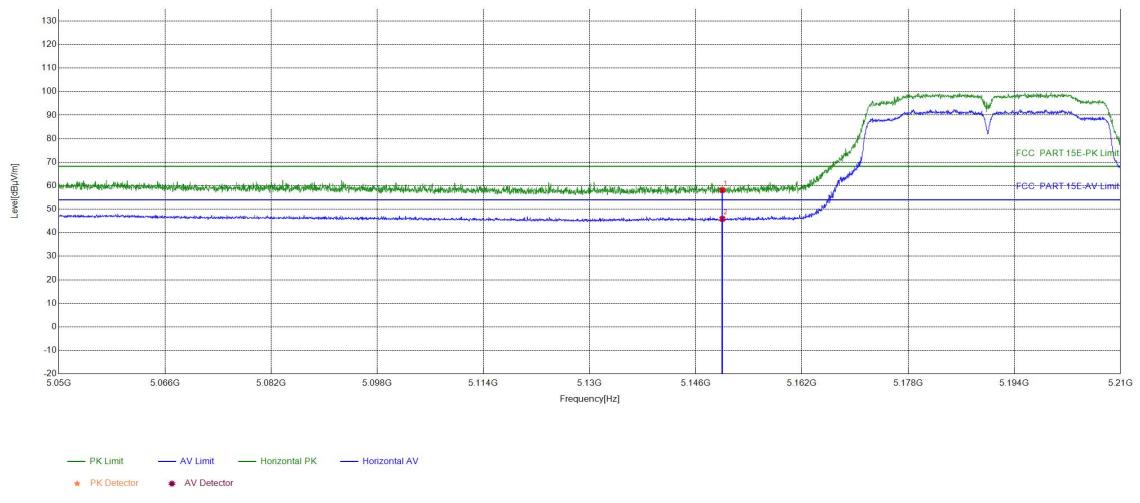


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	34.03	58.11	68.20	10.09	PASS	Horizontal	PK
2	5150	24.08	21.81	45.89	54.00	8.11	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

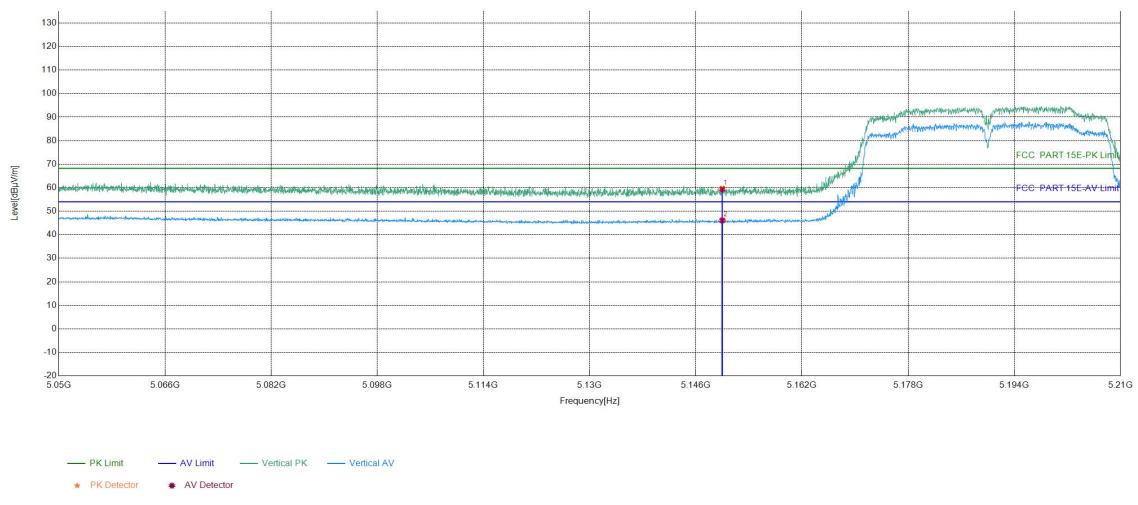


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	35.36	59.44	68.20	8.76	PASS	Vertical	PK
2	5150	24.08	22.00	46.08	54.00	7.92	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ac(VHT20) Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

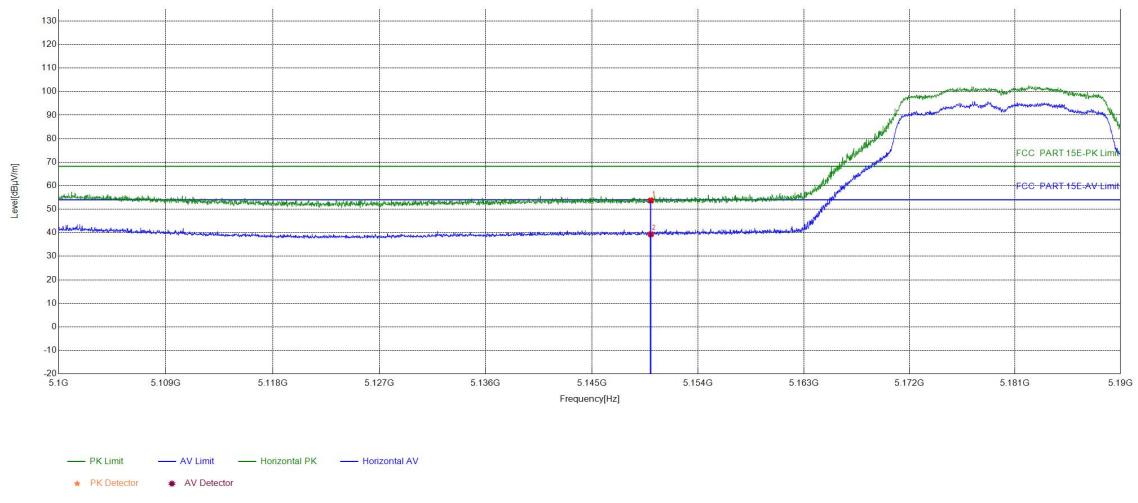


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	29.72	53.70	68.20	14.50	PASS	Horizontal	PK
2	5150	23.98	15.36	39.34	54.00	14.66	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ac(VHT20) Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

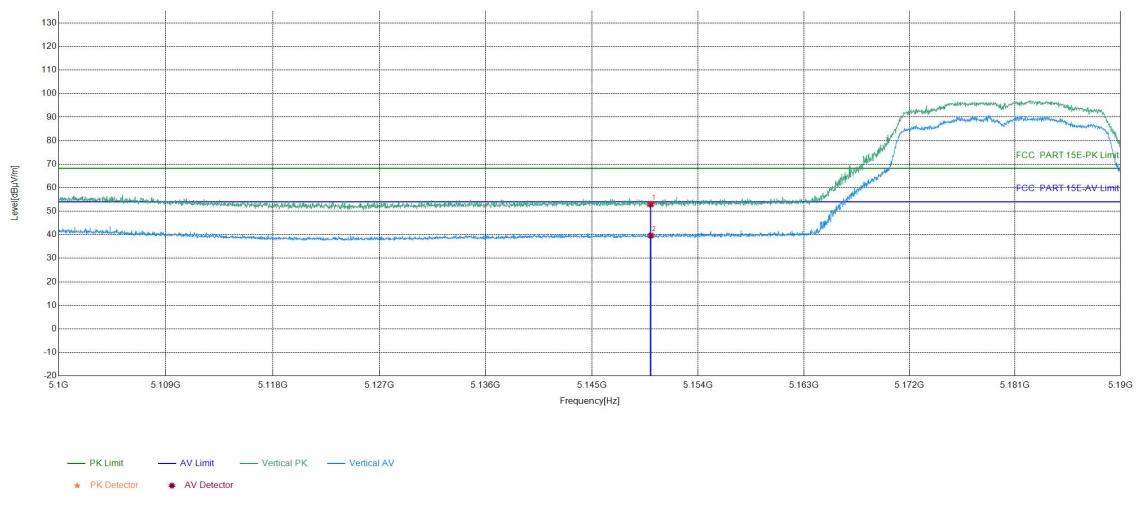


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	28.92	52.90	68.20	15.30	PASS	Vertical	PK
2	5150	23.98	15.65	39.63	54.00	14.37	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ac(VHT40) Transmitting	Test_Frequency	5190MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

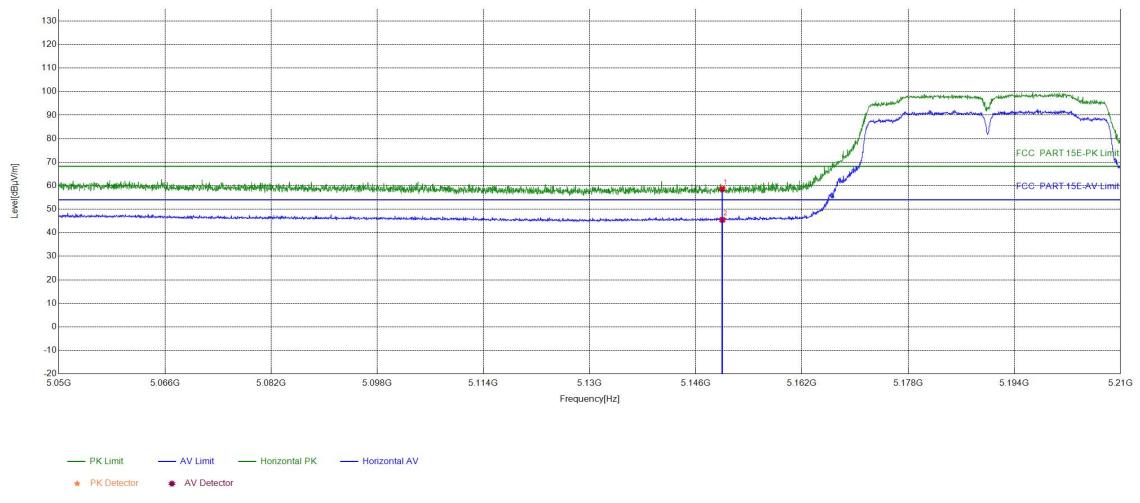


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	34.57	58.65	68.20	9.55	PASS	Horizontal	PK
2	5150	24.08	21.43	45.51	54.00	8.49	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ac(VHT40) Transmitting	Test_Frequency	5190MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

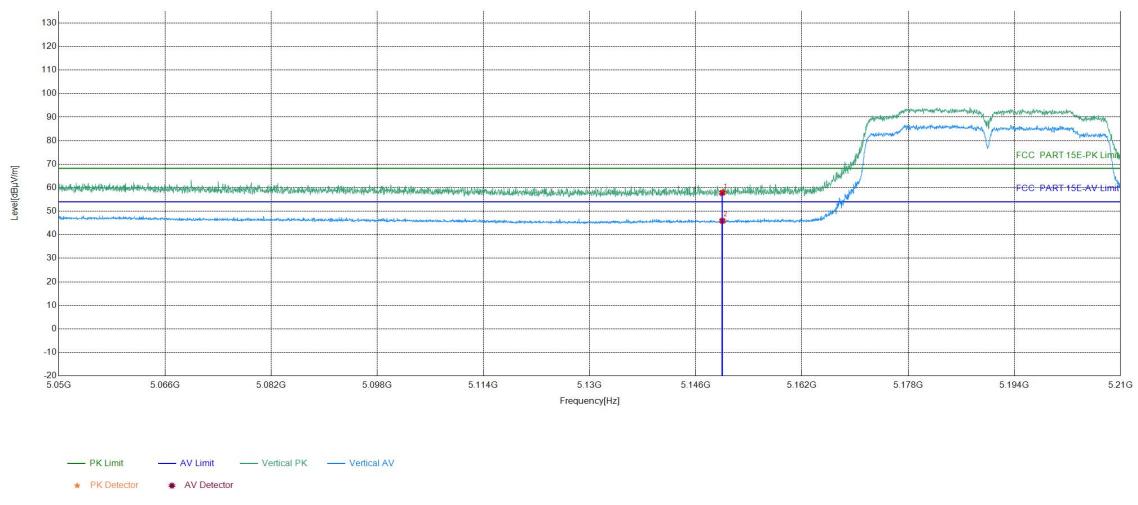


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	33.78	57.86	68.20	10.34	PASS	Vertical	PK
2	5150	24.08	21.84	45.92	54.00	8.08	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5210MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

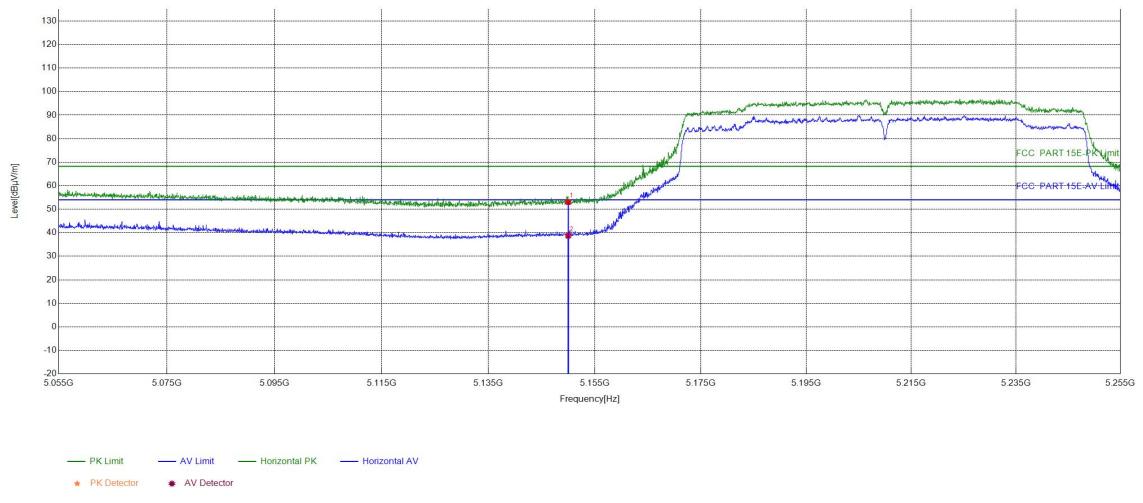


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	28.93	53.01	68.20	15.19	PASS	Horizontal	PK
2	5150	24.08	14.63	38.71	54.00	15.29	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5210MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

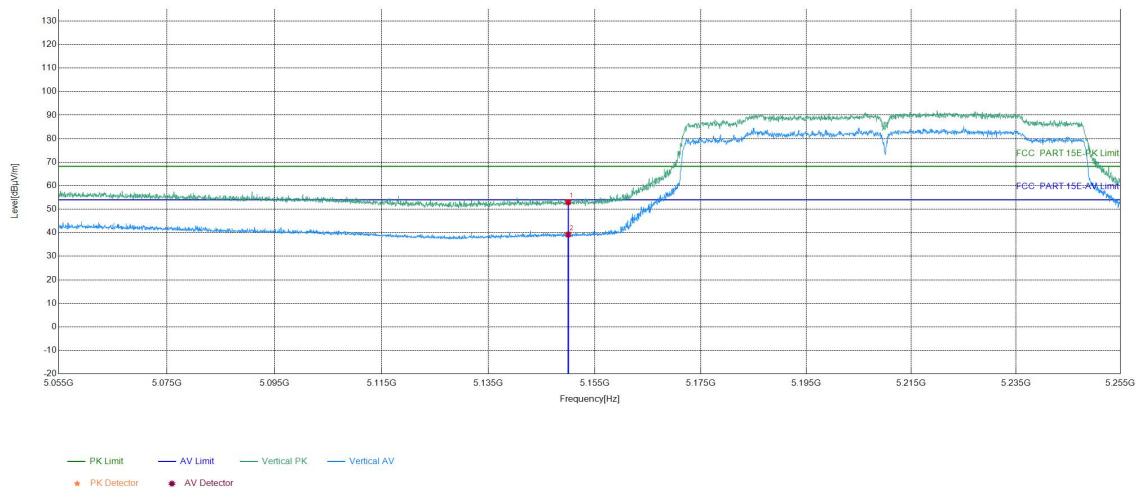


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	28.91	52.99	68.20	15.21	PASS	Vertical	PK
2	5150	24.08	15.17	39.25	54.00	14.75	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

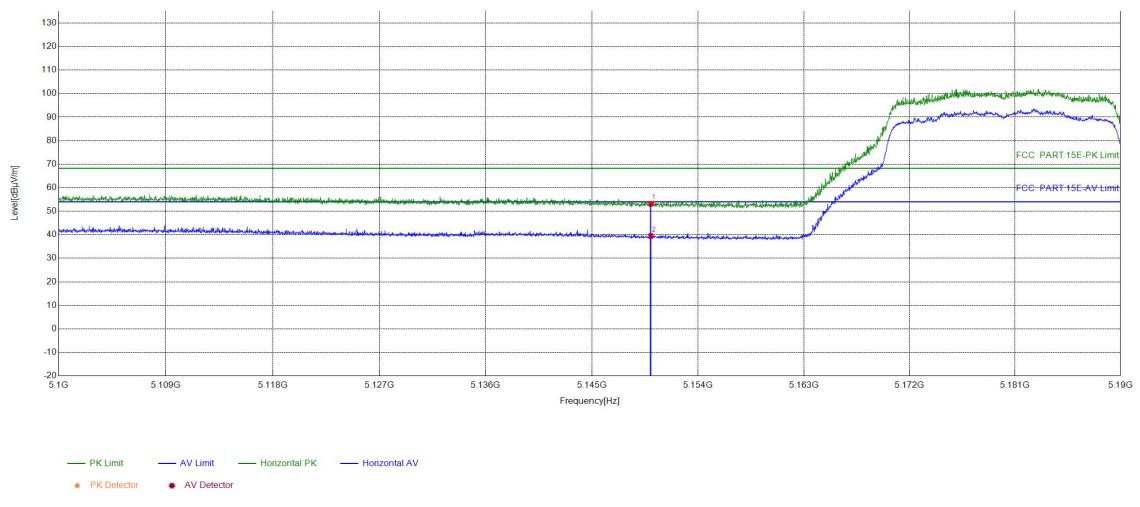


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	29.19	53.17	68.20	15.03	PASS	Horizontal	PK
2	5150	23.98	15.50	39.48	54.00	14.52	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	5180MHz
Tset_Engineer	chenjun	Test_Date	2025/06/25
Remark			

Test Graph

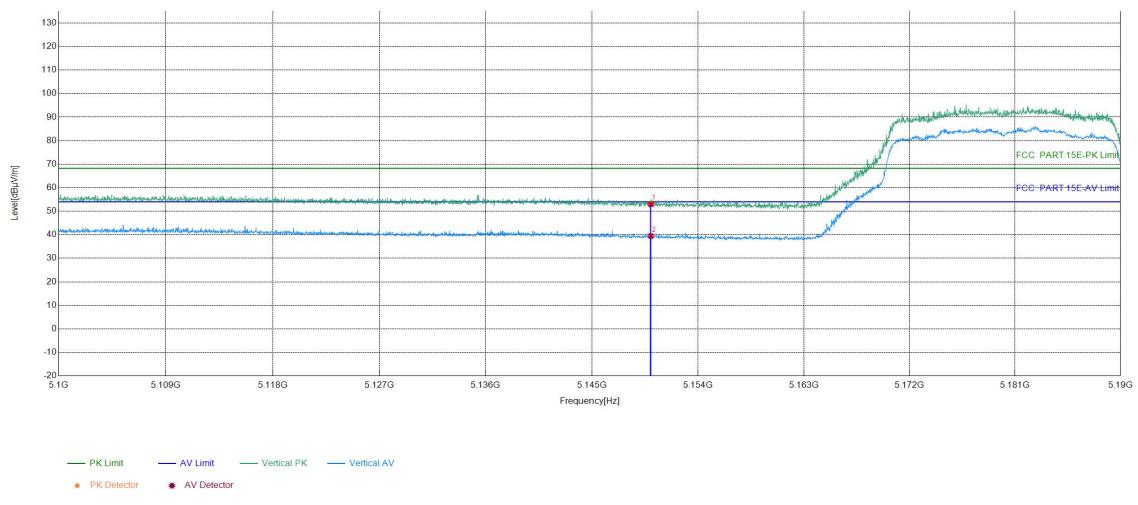

Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	28.97	52.95	68.20	15.25	PASS	Vertical	PK
2	5150	23.98	15.47	39.45	54.00	14.55	PASS	Vertical	AV