



**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 2**

TEST REPORT

For

CHAMPe Bingo Handset

MODEL NUMBER: VK7

FCC ID: 2AUX7-VK7

IC: 25598-VK7

REPORT NUMBER: 4789391992-3

ISSUE DATE: March 25, 2020

Prepared for

**Estone Technology LTD
2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road, Bao'an, Shenzhen,
China.**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake
Hi-Tech Development Zone Dongguan, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|---------------|------------|
| V0 | 03/25/2020 | Initial Issue | |

| Summary of Test Results | | | |
|-------------------------|---|---|--------------|
| Clause | Test Items | FCC/ISED Rules | Test Results |
| 1 | 6dB Bandwidth and 99% Occupied Bandwidth | FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7 | Pass |
| 2 | Conducted Output Power | FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d) | Pass |
| 3 | Power Spectral Density | FCC Part 15.247 (e) RSS-247 Clause 5.2 (b) | Pass |
| 4 | Conducted Bandedge and Spurious Emission | FCC Part 15.247 (d) RSS-247 Clause 5.5 | Pass |
| 5 | Radiated Bandedge and Spurious Emission | FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 | Pass |
| 6 | Conducted Emission Test For AC Power Port | FCC Part 15.207 RSS-GEN Clause 8.8 | Pass |
| 7 | Antenna Requirement | FCC Part 15.203 RSS-GEN Clause 6.8 | Pass |

Note: This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

TABLE OF CONTENTS

| | |
|---|----|
| 1. ATTESTATION OF TEST RESULTS..... | 6 |
| 2. TEST METHODOLOGY | 7 |
| 3. FACILITIES AND ACCREDITATION..... | 7 |
| 4. CALIBRATION AND UNCERTAINTY | 8 |
| 4.1. MEASURING INSTRUMENT CALIBRATION | 8 |
| 4.2. MEASUREMENT UNCERTAINTY | 8 |
| 5. EQUIPMENT UNDER TEST | 9 |
| 5.1. DESCRIPTION OF EUT | 9 |
| 5.2. MAXIMUM OUTPUT POWER..... | 9 |
| 5.3. CHANNEL LIST..... | 9 |
| 5.4. TEST CHANNEL CONFIGURATION..... | 9 |
| 5.5. THE WORSE CASE POWER SETTING PARAMETER..... | 10 |
| 5.6. THE WORSE CASE CONFIGURATIONS..... | 10 |
| 5.7. DESCRIPTION OF AVAILABLE ANTENNAS | 10 |
| 5.8. DESCRIPTION OF TEST SETUP | 11 |
| 5.9. MEASURING INSTRUMENT AND SOFTWARE USED | 12 |
| 6. MEASUREMENT METHODS..... | 14 |
| 7. ANTENNA PORT TEST RESULTS | 15 |
| 7.1. ON TIME AND DUTY CYCLE | 15 |
| 7.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH..... | 18 |
| 7.2.1. 802.11b MODE..... | 19 |
| 7.2.2. 802.11g MODE..... | 23 |
| 7.2.3. 802.11n HT20 MODE | 27 |
| 7.3. CONDUCTED OUTPUT POWER | 31 |
| 7.3.1. 802.11b MODE..... | 32 |
| 7.3.2. 802.11g MODE..... | 32 |
| 7.3.3. 802.11n HT20 MODE | 32 |
| 7.4. POWER SPECTRAL DENSITY | 33 |
| 7.4.1. 802.11b MODE..... | 34 |
| 7.4.2. 802.11g MODE..... | 36 |
| 7.4.3. 802.11n HT20 MODE | 38 |
| 7.5. CONDUCTED BANDEdge AND SPURIOUS EMISSIONS | 40 |
| 7.5.1. 802.11b MODE..... | 42 |
| 7.5.2. 802.11g MODE..... | 45 |
| 7.5.3. 802.11n HT20 MODE | 48 |



| | |
|---|------------|
| 8. RADIATED TEST RESULTS | 51 |
| 8.1. <i>RESTRICTED BANDEdge</i> | 57 |
| 8.1.1. 802.11b MODE..... | 57 |
| 8.1.2. 802.11g MODE..... | 64 |
| 8.1.3. 802.11n HT20 MODE | 72 |
| 8.2. <i>SPURIOUS EMISSIONS (3~18GHz)</i> | 80 |
| 8.2.1. 802.11b MODE..... | 80 |
| 8.2.2. 802.11g MODE..... | 86 |
| 8.2.3. 802.11n HT20 MODE | 92 |
| 8.3. <i>SPURIOUS EMISSIONS (1~3GHz)</i> | 98 |
| 8.3.1. 802.11b MODE..... | 98 |
| 8.3.2. 802.11g MODE..... | 104 |
| 8.3.3. 802.11n HT20 MODE | 110 |
| 8.4. <i>WORST-CASE CO-LOCATION</i> | 116 |
| 8.4.1. BT GFSK MODE AND 802.11n HT20 MODE | 116 |
| 8.6. <i>SPURIOUS EMISSIONS (18~26GHz)</i> | 124 |
| 8.6.1. 802.11b MODE..... | 124 |
| 8.7. <i>SPURIOUS EMISSIONS (0.03 ~ 1 GHz)</i> | 126 |
| 8.7.1. 802.11b MODE..... | 126 |
| 8.8. <i>SPURIOUS EMISSIONS BELOW 30M</i> | 128 |
| 8.8.1. 802.11b MODE..... | 128 |
| 9. AC POWER LINE CONDUCTED EMISSIONS | 131 |
| 9.1. 802.11g MODE..... | 132 |
| 10. ANTENNA REQUIREMENTS..... | 134 |

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Estone Technology LTD
Address: 2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road, Bao'an, Shenzhen, China.

Manufacturer Information

Company Name: Estone Technology LTD
Address: 2F, Building No.1, Jia'an Industrial Park, No.2 Long Chang Road, Bao'an, Shenzhen, China.

EUT Description

EUT Name: CHAMPe Bingo Handset
Model: VK7
Sample Status: Normal
Sample ID: 2916641
Sample Received Date: February 27, 2020
Date of Tested: February 28~March 25, 2020

| APPLICABLE STANDARDS | |
|------------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 FCC PART 15 SUBPART C | PASS |
| ISED RSS-247 Issue 2 | PASS |
| ISED RSS-GEN Issue 5 | PASS |

Prepared By:



Kebo Zhang
Project Engineer

Checked By:



Shawn Wen
Laboratory Leader

Approved By:



Stephen Guo
Laboratory Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

| | |
|---------------------------|--|
| Accreditation Certificate | <p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Delcaration of Conformity (DoC) and Certification rules</p> <p>ISED(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p> |
|---------------------------|--|

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Item | Uncertainty |
|---|---|
| Conduction emission | 3.62dB |
| Radiation Emission test(include Fundamental emission) (9kHz-30MHz) | 2.2dB |
| Radiation Emission test(include Fundamental emission) (30MHz-1GHz) | 4.00dB |
| Radiation Emission test (1GHz to 26GHz)(include Fundamental emission) | 5.78dB (1GHz-18Gz) 5.23dB (18GHz-26Gz) |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

| | |
|---------------------|---|
| EUT Name | CHAMPe Bingo Handset |
| Model | VK7 |
| Radio Technology | IEEE802.11b/g/n HT20 |
| Operation frequency | IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz |
| Modulation | IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) |
| Power Supply | DC 3.7V |

5.2. MAXIMUM OUTPUT POWER

| Number of Transmit Chains (NTX) | IEE Std. 802.11 | Frequency (MHz) | Channel Number | Max AVG Conducted Power (dBm) |
|---------------------------------|------------------|-----------------|----------------|-------------------------------|
| 1 | IEEE 802.11b | 2412-2462 | 1-11[11] | 17.38 |
| 1 | IEEE 802.11g | 2412-2462 | 1-11[11] | 15.01 |
| 1 | IEEE 802.11nHT20 | 2412-2462 | 1-11[11] | 15.51 |

5.3. CHANNEL LIST

| Channel List for 802.11b/g/n (20 MHz) | | | | | | | |
|---------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1 | 2412 | 4 | 2427 | 7 | 2442 | 10 | 2457 |
| 2 | 2417 | 5 | 2432 | 8 | 2447 | 11 | 2462 |
| 3 | 2422 | 6 | 2437 | 9 | 2452 | / | / |

5.4. TEST CHANNEL CONFIGURATION

| Test Mode | Test Channel | Frequency |
|-----------------------|------------------------------------|---------------------------|
| WiFi TX(802.11b) | CH1,CH6,CH11/ Low, Middle, High | 2412MHz, 2437MHz, 2462MHz |
| WiFi TX(802.11g) | CH1,CH6,CH11/ Low, Middle, High | 2412MHz, 2437MHz, 2462MHz |
| WiFi TX(802.11n HT20) | CH1,CH6,CH11/ Low, Middle, High | 2412MHz, 2437MHz, 2462MHz |

5.5. THE WORSE CASE POWER SETTING PARAMETER

| The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band | | | | |
|--|-------------------------|----------------------------|------|-------|
| Test Software | | Ampak RFTestTool | | |
| Modulation Mode | Transmit Antenna Number | Test Channel Power Setting | | |
| | | NCB: 20MHz | | |
| | | CH 1 | CH 6 | CH 11 |
| 802.11b | 1 | 67 | 66 | 66 |
| 802.11g | 1 | 59 | 59 | 49 |
| 802.11n HT20 | 1 | 59 | 62 | 48 |

5.6. THE WORSE CASE CONFIGURATIONS

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20 mode: MCS0

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

| Antenna | Frequency (MHz) | Antenna Type | MAX Antenna Gain (dBi) |
|---------|-----------------|--------------|------------------------|
| 1 | 2412-2462 | PCB Antenna | -0.98 |

| Test Mode | Transmit and Receive Mode | Description |
|---|--|--|
| IEEE 802.11b | <input checked="" type="checkbox"/> 1TX, 1RX | ANT 1 can be used as transmitting/receiving antenna. |
| IEEE 802.11g | <input checked="" type="checkbox"/> 1TX, 1RX | ANT 1 can be used as transmitting/receiving antenna. |
| IEEE 802.11n HT20 | <input checked="" type="checkbox"/> 1TX, 1RX | ANT 1 can be used as transmitting/receiving antenna. |
| Note: 1. BT&WLAN 2.4G and BT&WLAN 5G can transmit simultaneously, WLAN 2.4G and WLAN 5G can't transmit simultaneously. (declared by client) | | |

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Item | Equipment | Brand Name | Model Name | Remarks |
|------|-----------|------------|-----------------|---|
| 1 | Adapter | / | PS30D120K2000UD | Input: AC 120-240V 50/60Hz 0.8A Output: DC 12V/2A |

I/O CABLES

| Cable No | Port | Connector Type | Cable Type | Cable Length(m) | Remarks |
|----------|------|----------------|------------|-----------------|---------|
| / | / | / | / | / | / |


ACCESSORIES

| Item | Accessory | Brand Name | Model Name | Description |
|------|-----------|------------|------------|-------------|
| / | / | / | / | / |

TEST SETUP

The EUT can work in engineering mode with a software.

SETUP DIAGRAM FOR TESTS

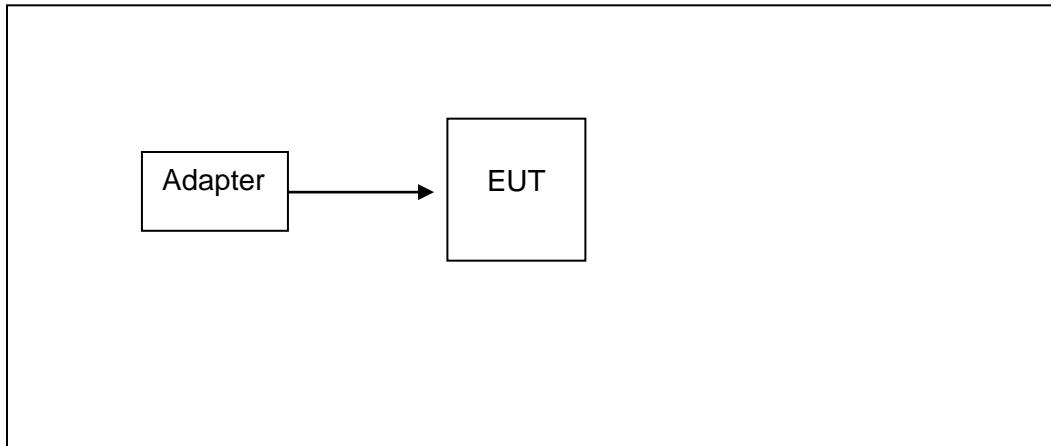



5.9. MEASURING INSTRUMENT AND SOFTWARE USED

| Conducted Emissions | | | | | | | | |
|-------------------------------------|---|--------------|-------------------------------------|---------------|--------------|--------------|--|--|
| Instrument | | | | | | | | |
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. | | |
| <input checked="" type="checkbox"/> | EMI Test Receiver | R&S | ESR3 | 101961 | Dec.05,2019 | Dec.05,2020 | | |
| <input checked="" type="checkbox"/> | Two-Line V-Network | R&S | ENV216 | 101983 | Dec.05,2019 | Dec.05,2020 | | |
| <input checked="" type="checkbox"/> | Artificial Mains Networks | Schwarzbeck | NSLK 8126 | 8126465 | Dec.05,2019 | Dec.05,2020 | | |
| Software | | | | | | | | |
| Used | Description | | Manufacturer | Name | Version | | | |
| <input checked="" type="checkbox"/> | Test Software for Conducted disturbance | | Farad | EZ-EMC | Ver. UL-3A1 | | | |
| Radiated Emissions | | | | | | | | |
| Instrument | | | | | | | | |
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. | | |
| <input checked="" type="checkbox"/> | MXE EMI Receiver | KESIGHT | N9038A | MY56400 036 | Dec.06,2019 | Dec.06,2020 | | |
| <input checked="" type="checkbox"/> | Hybrid Log Periodic Antenna | TDK | HLP-3003C | 130960 | Sep.17, 2018 | Sep.17, 2021 | | |
| <input checked="" type="checkbox"/> | Preamplifier | HP | 8447D | 2944A090 99 | Dec.05,2019 | Dec.05,2020 | | |
| <input checked="" type="checkbox"/> | EMI Measurement Receiver | R&S | ESR26 | 101377 | Dec.05,2019 | Dec.05,2020 | | |
| <input checked="" type="checkbox"/> | Horn Antenna | TDK | HRN-0118 | 130939 | Sep.17, 2018 | Sep.17, 2021 | | |
| <input checked="" type="checkbox"/> | High Gain Horn Antenna | Schwarzbeck | BBHA-9170 | 691 | Aug.11, 2018 | Aug.11, 2021 | | |
| <input checked="" type="checkbox"/> | Preamplifier | TDK | PA-02-0118 | TRS-305-00066 | Dec.05,2019 | Dec.05,2020 | | |
| <input checked="" type="checkbox"/> | Preamplifier | TDK | PA-02-2 | TRS-307-00003 | Dec.05,2019 | Dec.05,2020 | | |
| <input checked="" type="checkbox"/> | Loop antenna | Schwarzbeck | 1519B | 00008 | Jan.07, 2019 | Jan.07, 2022 | | |
| <input checked="" type="checkbox"/> | Band Reject Filter | Wainwright | WRCJV8-2350-2400-2483.5-2533.5-40SS | 4 | Dec.05,2019 | Dec.05,2020 | | |
| <input checked="" type="checkbox"/> | High Pass Filter | Wi | WHKX10-2700-3000-18000-40SS | 23 | Dec.05,2019 | Dec.05,2020 | | |
| Software | | | | | | | | |
| Used | Description | | Manufacturer | Name | Version | | | |
| <input checked="" type="checkbox"/> | Test Software for Radiated disturbance | | Farad | EZ-EMC | Ver. UL-3A1 | | | |



| Other instruments | | | | | | |
|-------------------------------------|------------------------------|--------------|-----------|------------|-------------|-------------|
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
| <input checked="" type="checkbox"/> | Spectrum Analyzer | Keysight | N9030A | MY55410512 | Dec.06,2019 | Dec.06,2020 |
| <input checked="" type="checkbox"/> | Power sensor, Power Meter | R&S | OSP120 | 100921 | Dec.06,2019 | Dec.06,2020 |

6. MEASUREMENT METHODS

| No. | Test Item | KDB Name | Section |
|-----|---|---|-----------------|
| 1 | 6dB Bandwidth | KDB 558074 D01 15.247 Meas Guidance v05r02 | 8.2 |
| 2 | Peak Output Power | KDB 558074 D01 15.247 Meas Guidance v05r02 | 8.3.1.3/8.3.2.3 |
| 3 | Power Spectral Density | KDB 558074 D01 15.247 Meas Guidance v05r02 | 8.4 |
| 4 | Out-of-band emissions in non-restricted bands | KDB 558074 D01 15.247 Meas Guidance v05r02 | 8.5 |
| 5 | Out-of-band emissions in restricted bands | KDB 558074 D01 15.247 Meas Guidance v05r02 | 8.6 |
| 6 | Band-edge | KDB 558074 D01 15.247 Meas Guidance v05r02 | 8.7 |
| 7 | Conducted Emission Test For AC Power Port | ANSI C63.10-2013 | 6.2 |
| 8 | 99% Bandwidth | ANSI C63.10-2013 | 6.9.3 |

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



TEST ENVIRONMENT

| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 25.4°C | Relative Humidity | 61% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.7V |

RESULTS

| Mode | On Time (msec) | Period (msec) | Duty Cycle x (Linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/T Minimum VBW (KHz) | Final setting For VBW (KHz) |
|-------|----------------|---------------|-----------------------|----------------|-----------------------------------|-----------------------|-----------------------------|
| 11b | 8.42 | 8.45 | 0.9964 | 99.64% | 0.0157 | 0.12 | 0.01 |
| 11g | 1.395 | 1.435 | 0.9721 | 97.21% | 0.1229 | 0.72 | 1.0 |
| 11n20 | 1.31 | 1.35 | 0.9704 | 97.04% | 0.1305 | 0.76 | 1.0 |



Note:


Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

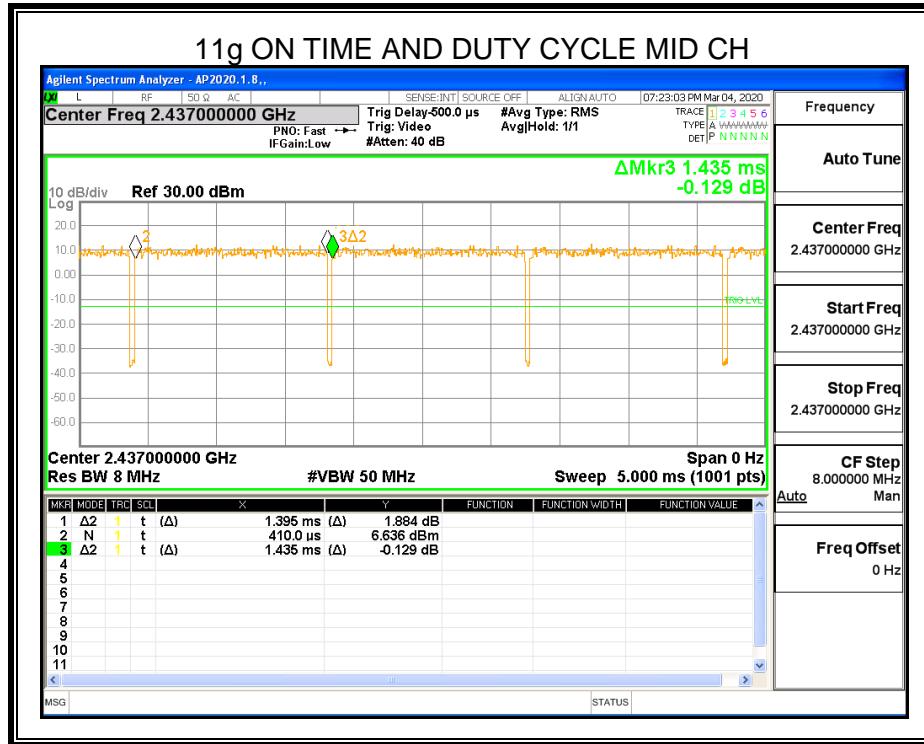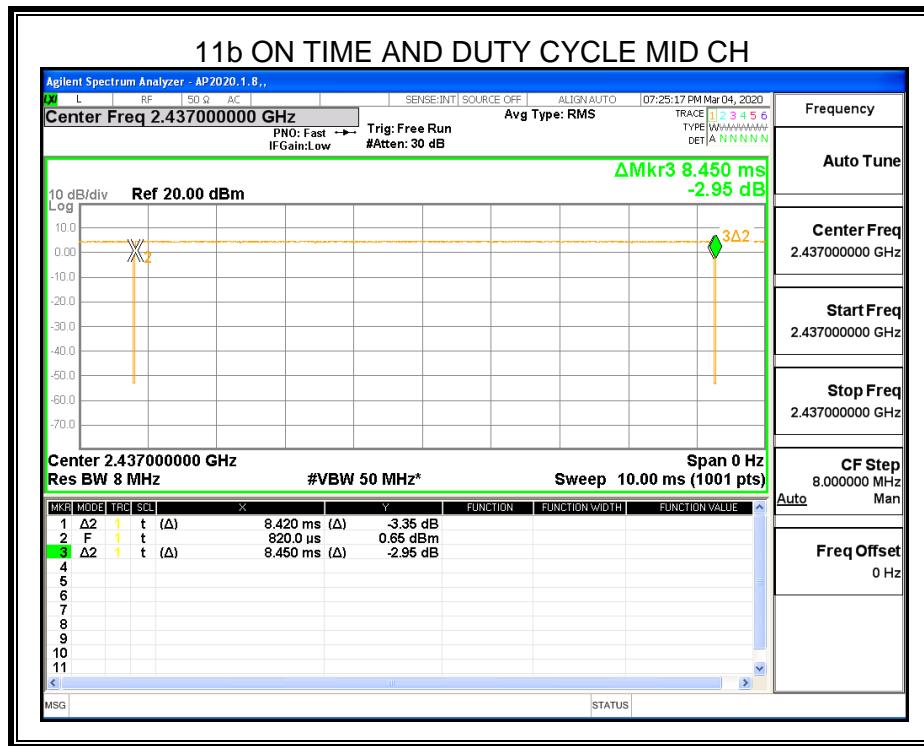

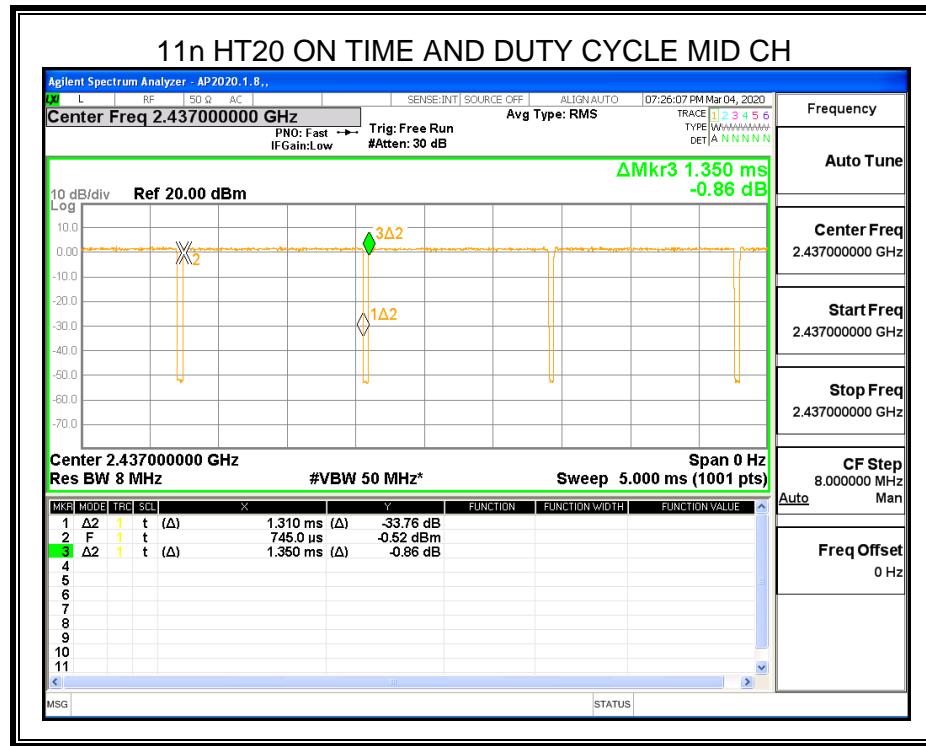

7.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

| CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2 | | | |
|--|------------------------|------------------------------|-----------------------|
| Section | Test Item | Limit | Frequency Range (MHz) |
| CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a) | 6 dB Bandwidth | $\geq 500\text{KHz}$ | 2400-2483.5 |
| ISED RSS-Gen Clause 6.7 | 99% Occupied Bandwidth | For reporting purposes only. | 2400-2483.5 |


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

| | |
|------------------|--|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | For 6dB Bandwidth :100K For 99% Occupied Bandwidth :1% to 5% of the occupied bandwidth |
| VBW | For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Occupied Bandwidth : approximately $3 \times \text{RBW}$ |
| Trace | Max hold |
| Sweep | Auto couple |

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

TEST SETUP

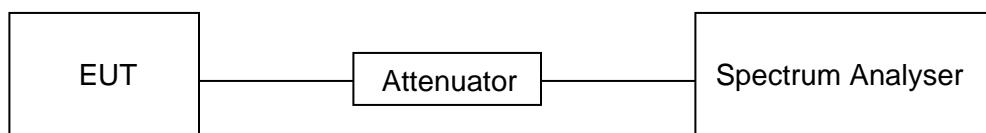


TEST ENVIRONMENT



| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 25.4°C | Relative Humidity | 61% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.7V |



RESULTS


7.2.1. 802.11b MODE

| Channel | 6dB bandwidth (MHz) | 99% bandwidth (MHz) | Limit (kHz) | Result |
|---------|---------------------|---------------------|-------------|--------|
| Low | 8.2 | 12.216 | ≥500 | Pass |
| Middle | 9.16 | 12.223 | ≥500 | Pass |
| High | 8.12 | 12.223 | ≥500 | Pass |

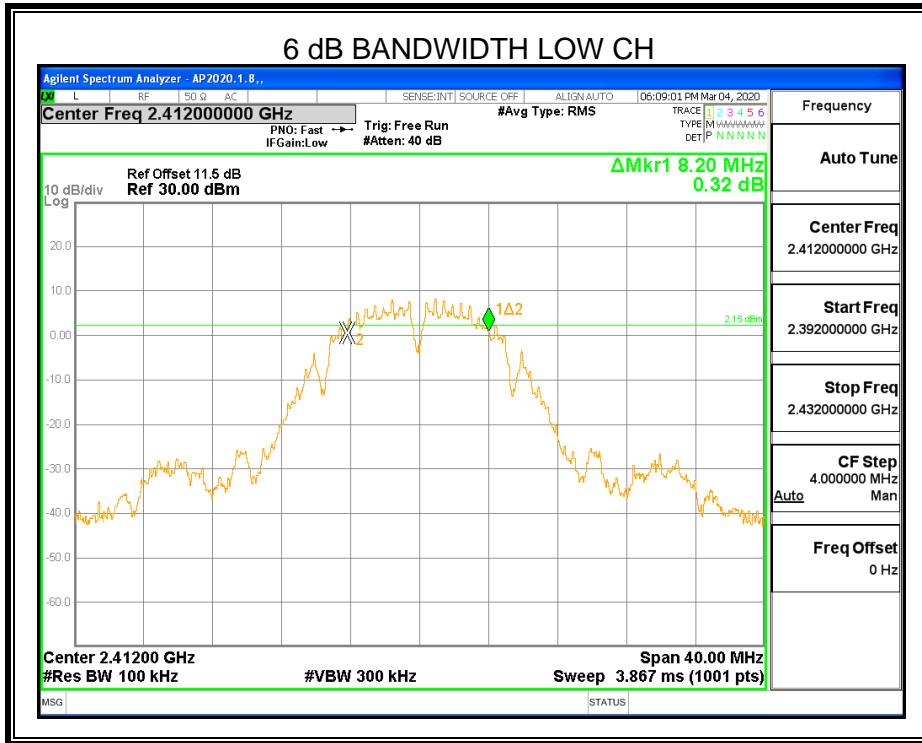

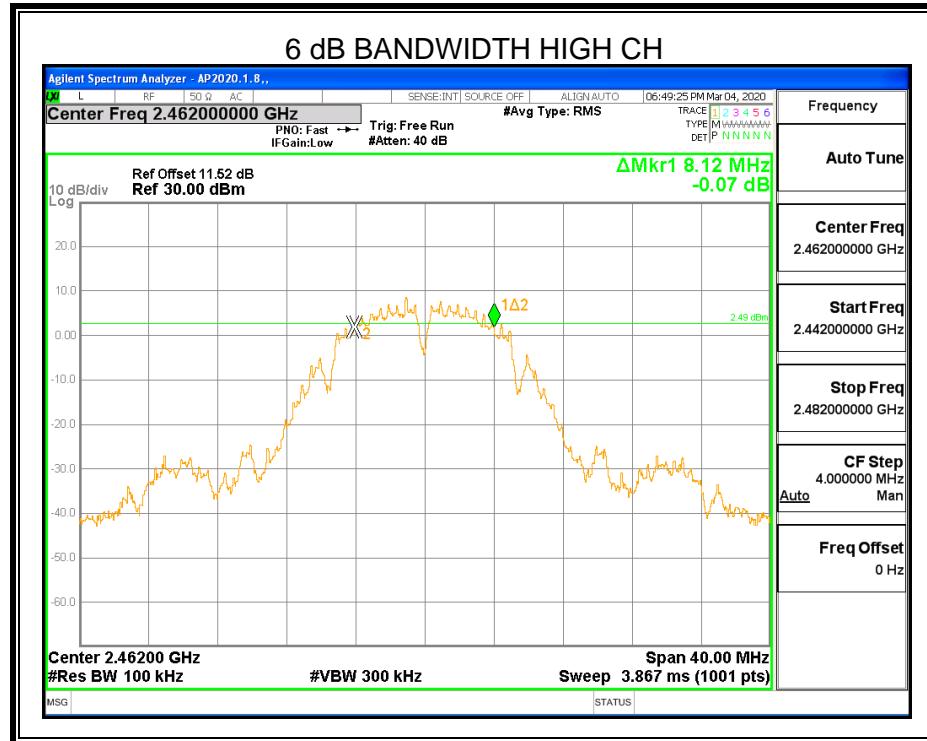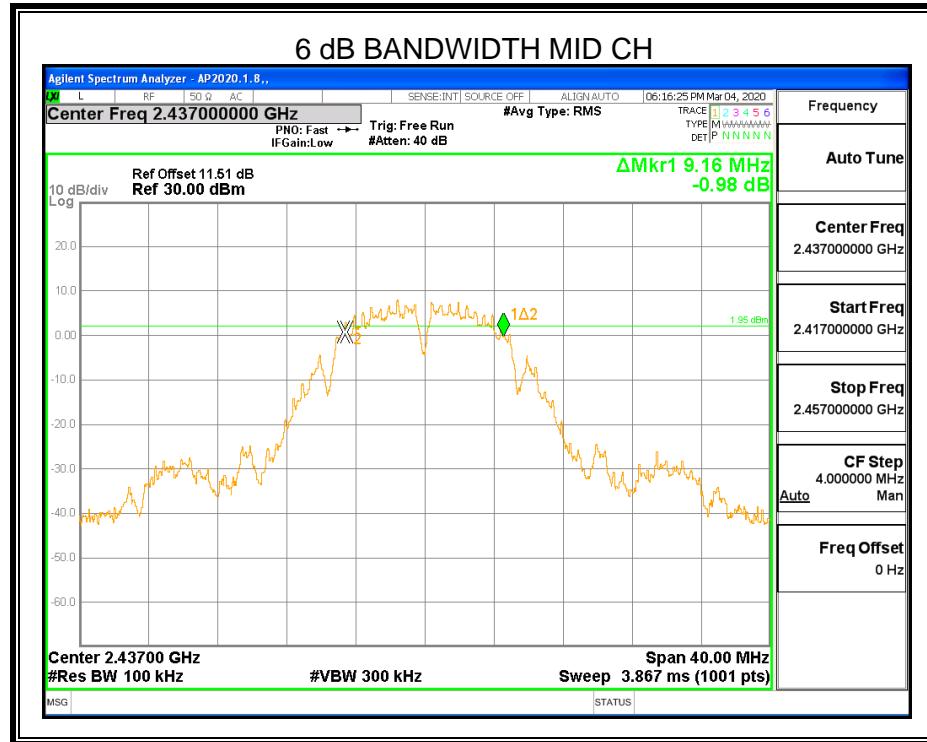


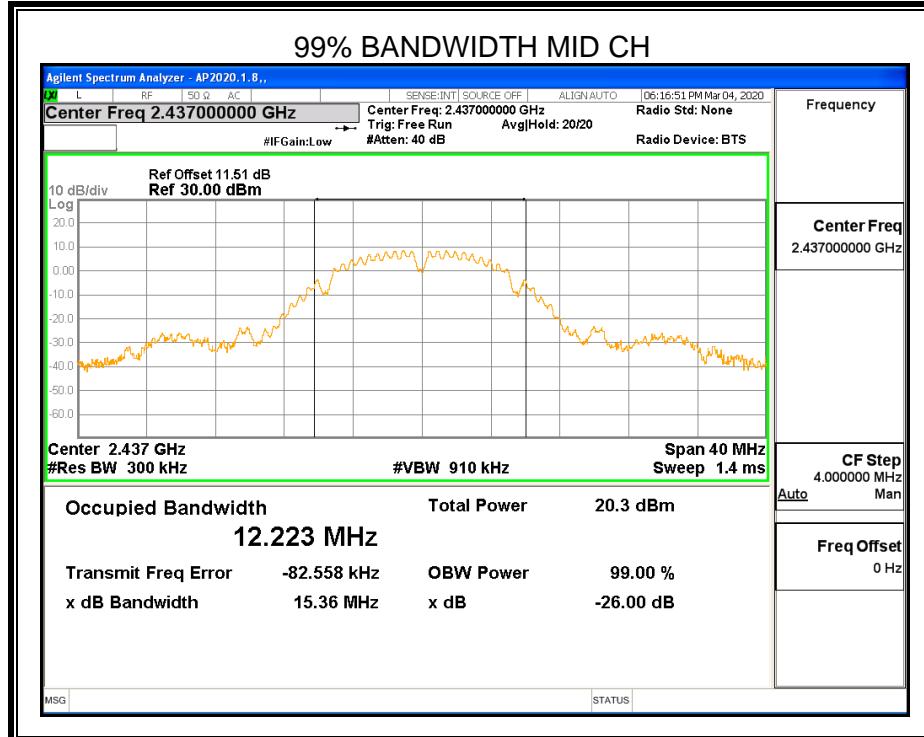
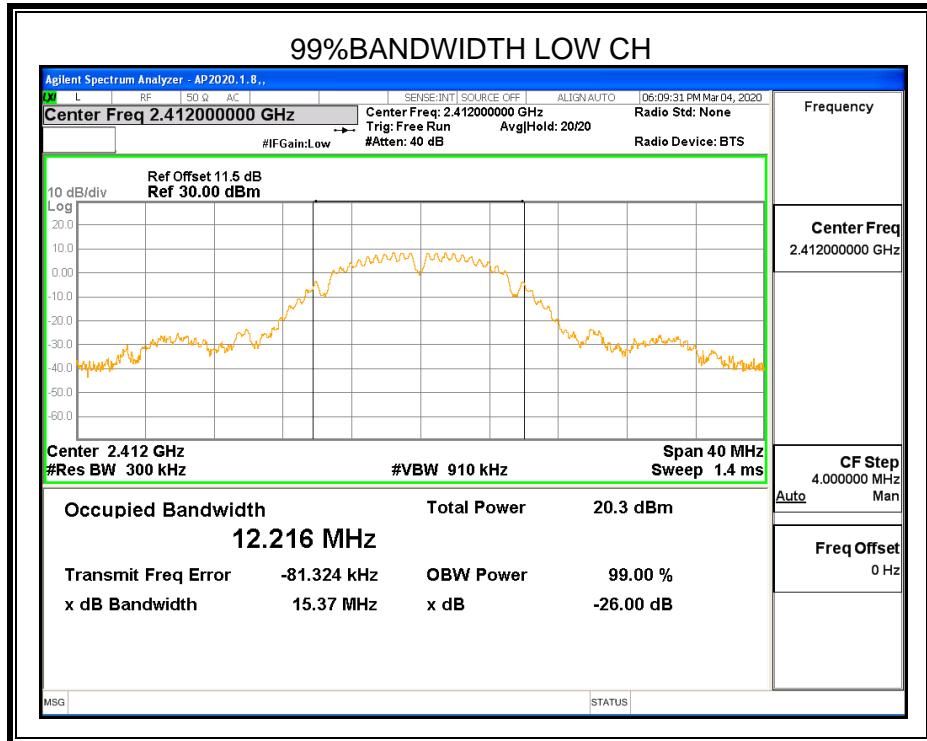



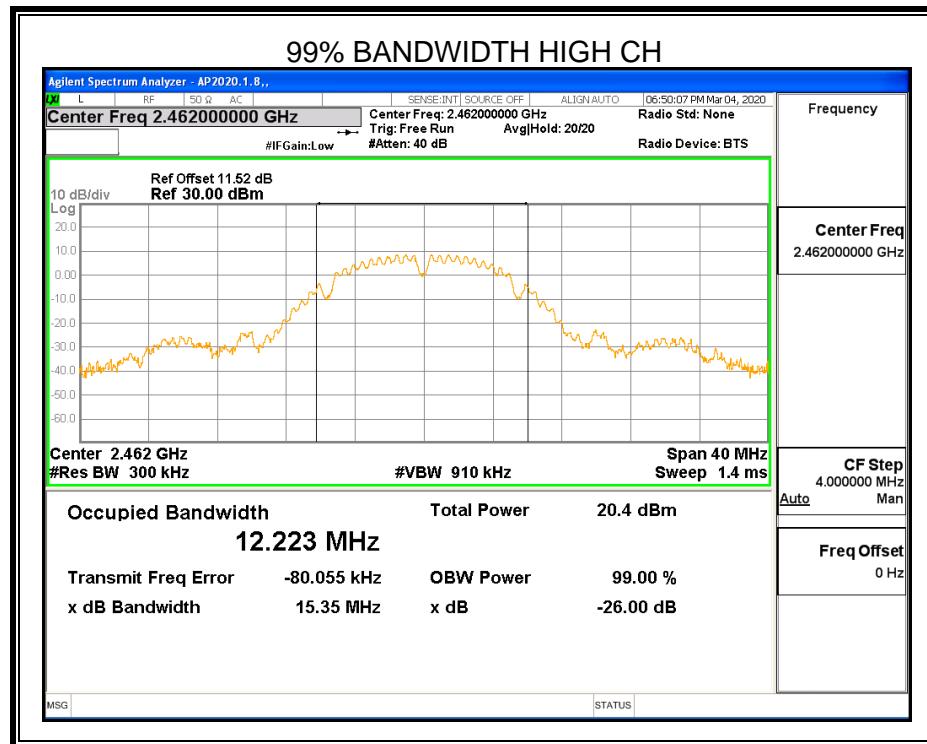



7.2.2. 802.11g MODE

| Channel | 6dB bandwidth (MHz) | 99% bandwidth (MHz) | Limit (kHz) | Result |
|---------|---------------------|---------------------|-------------|--------|
| Low | 16.4 | 16.751 | ≥500 | Pass |
| Middle | 16.4 | 16.661 | ≥500 | Pass |
| High | 16.4 | 16.708 | ≥500 | Pass |

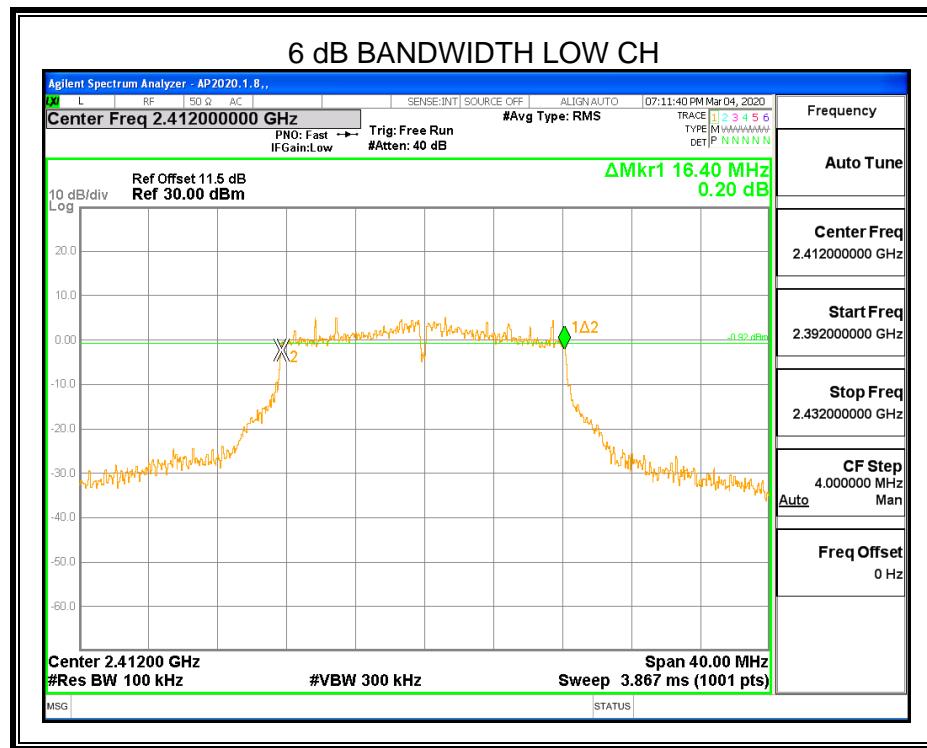

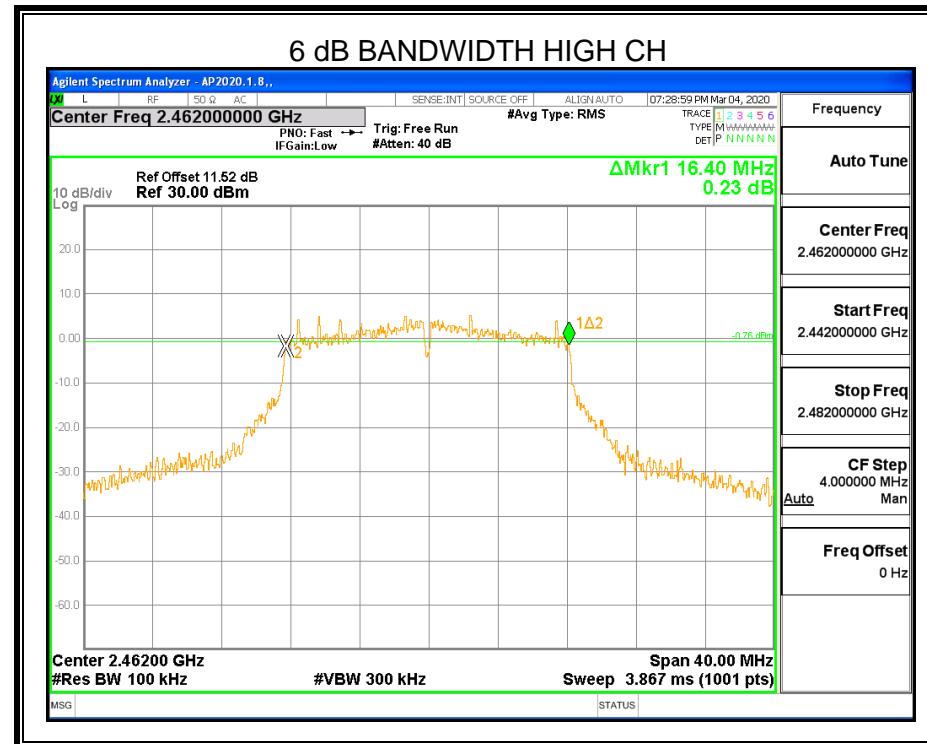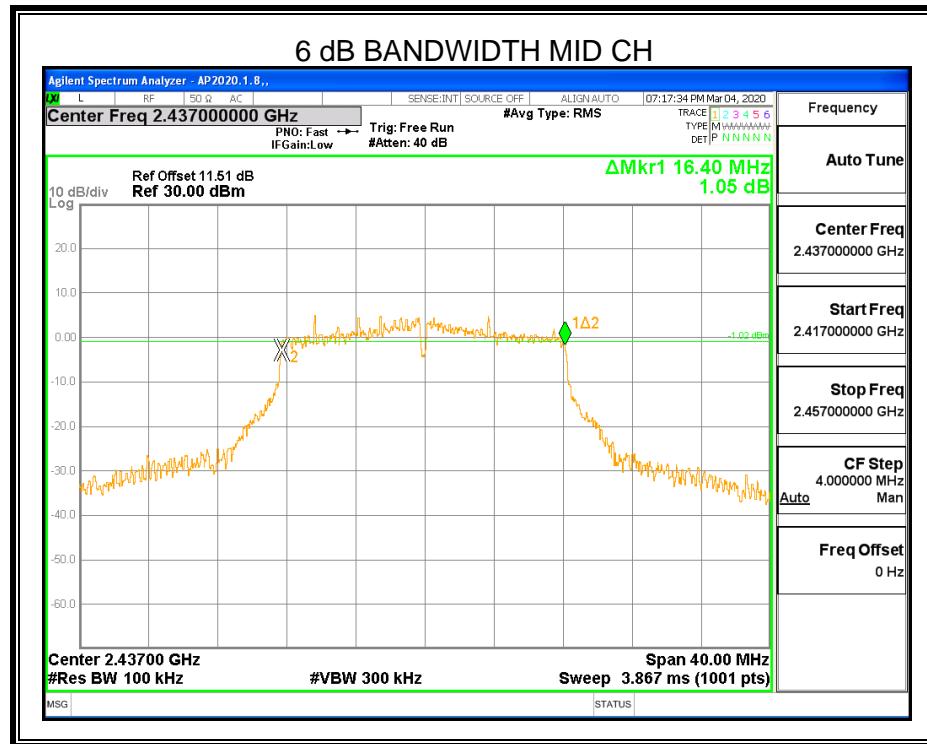


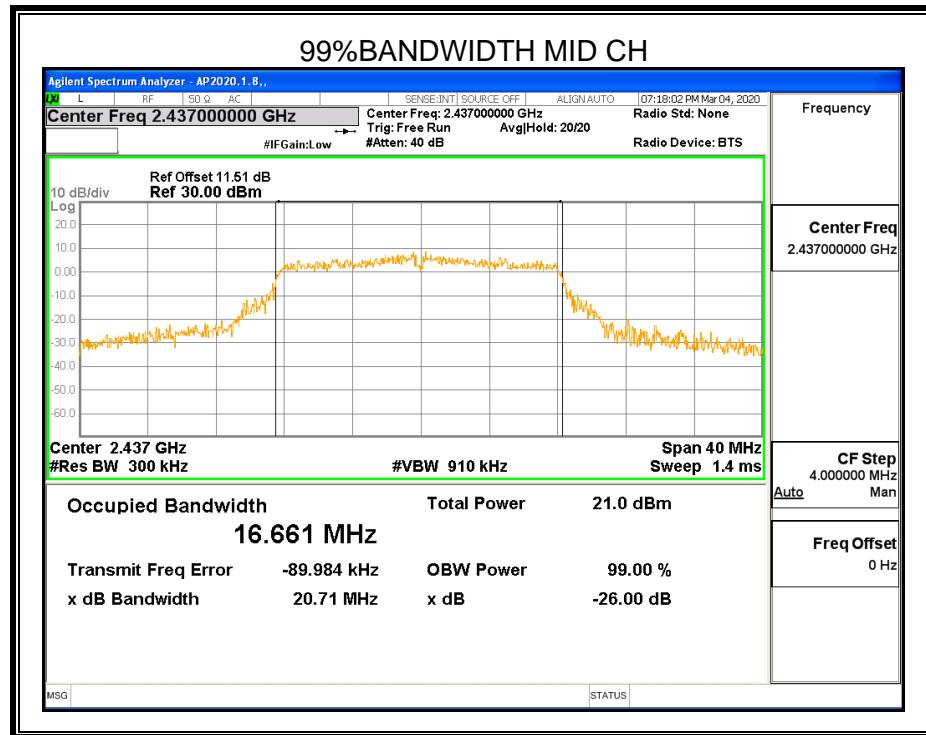
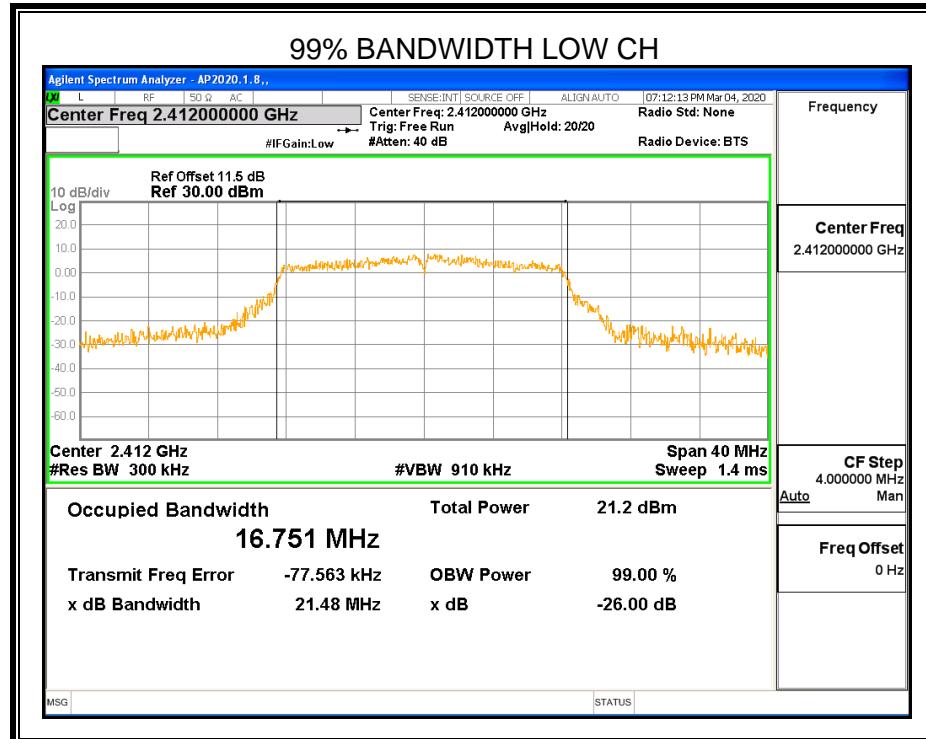



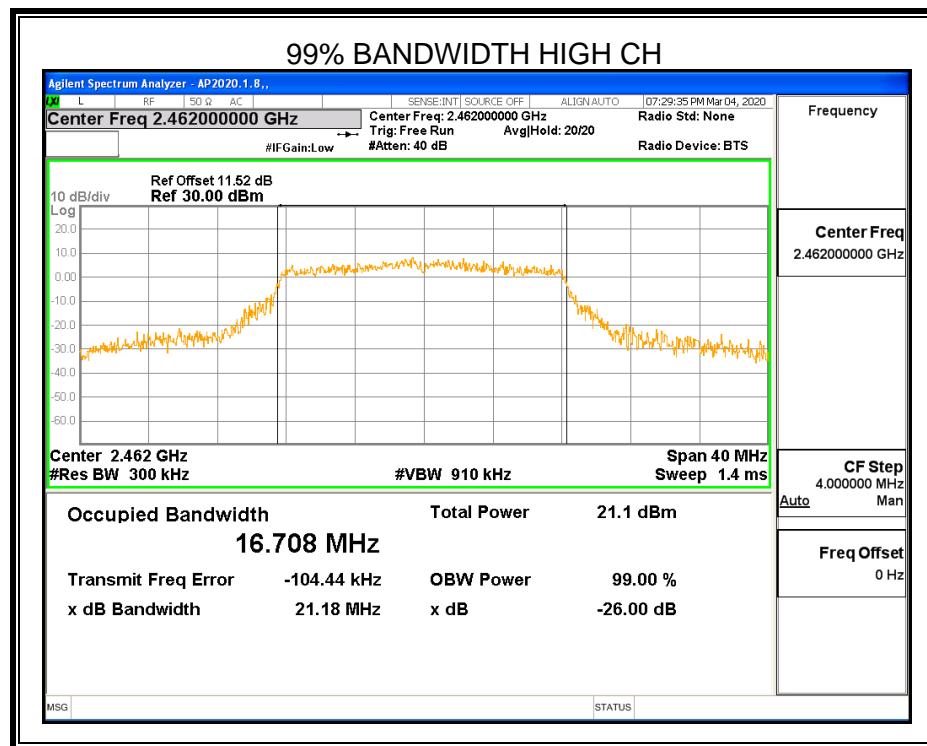



7.2.3. 802.11n HT20 MODE

| Channel | 6dB bandwidth (MHz) | 99% bandwidth (MHz) | Limit (kHz) | Result |
|---------|---------------------|---------------------|-------------|--------|
| Low | 17.36 | 17.727 | ≥500 | Pass |
| Middle | 17.12 | 17.738 | ≥500 | Pass |
| High | 17.68 | 17.820 | ≥500 | Pass |

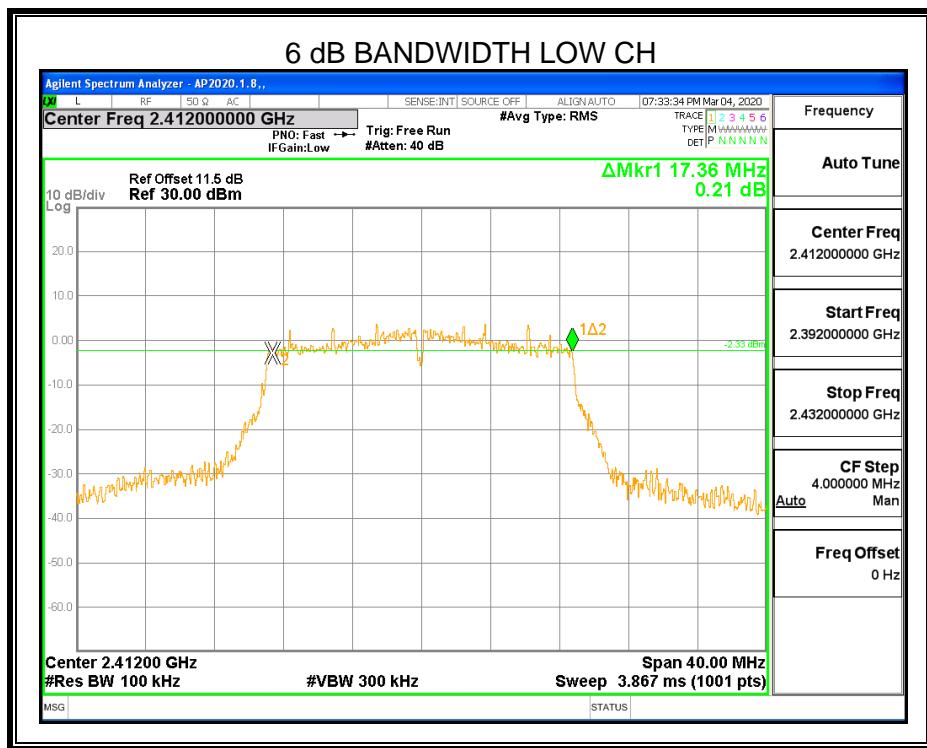

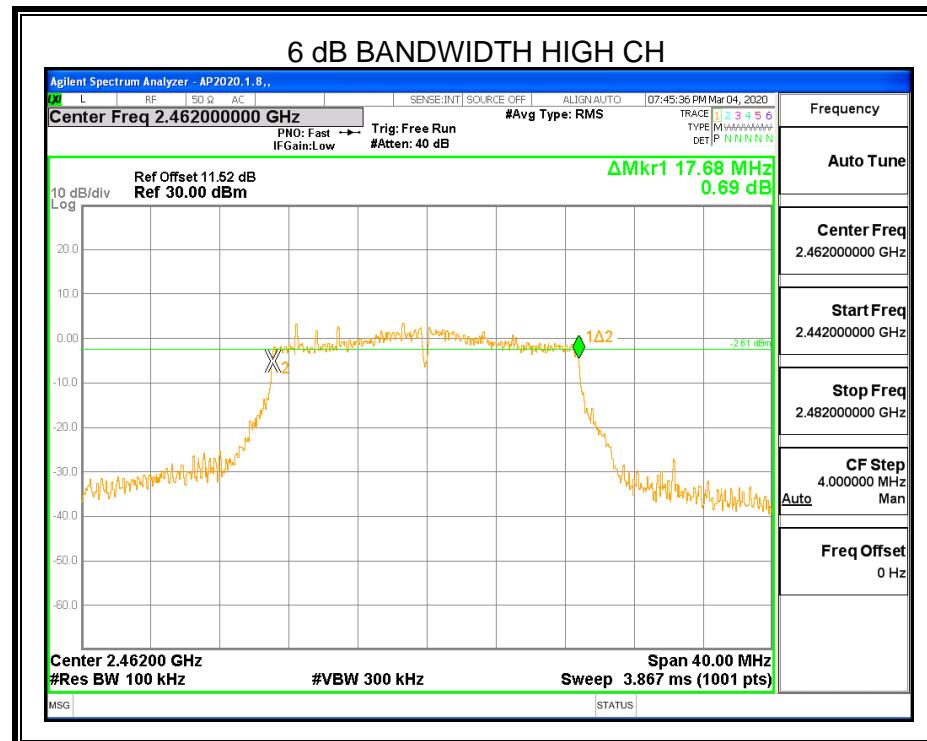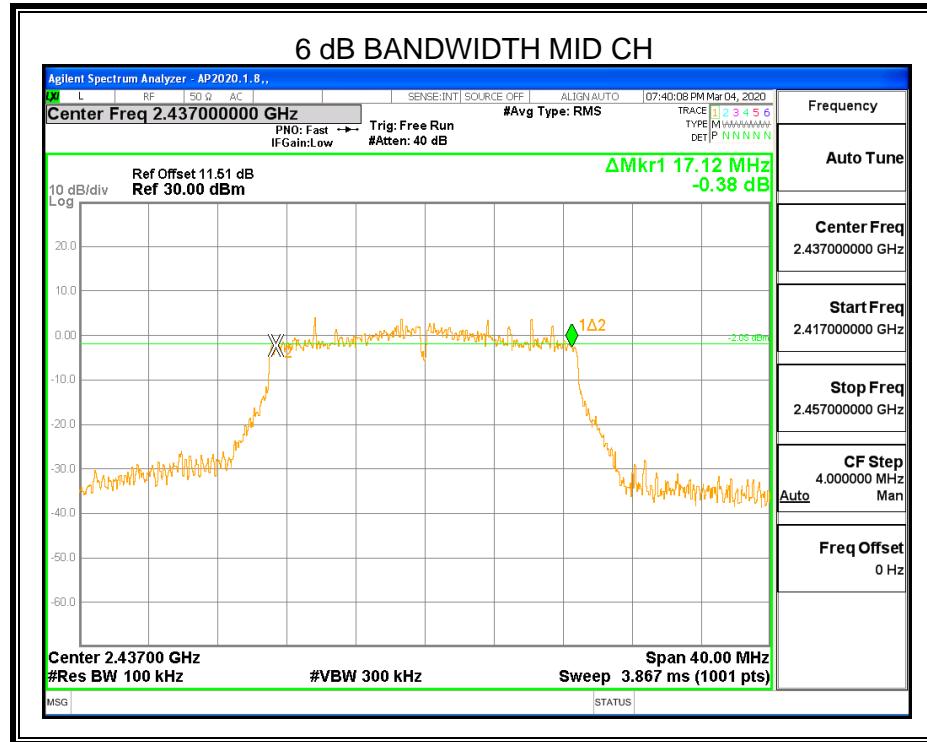

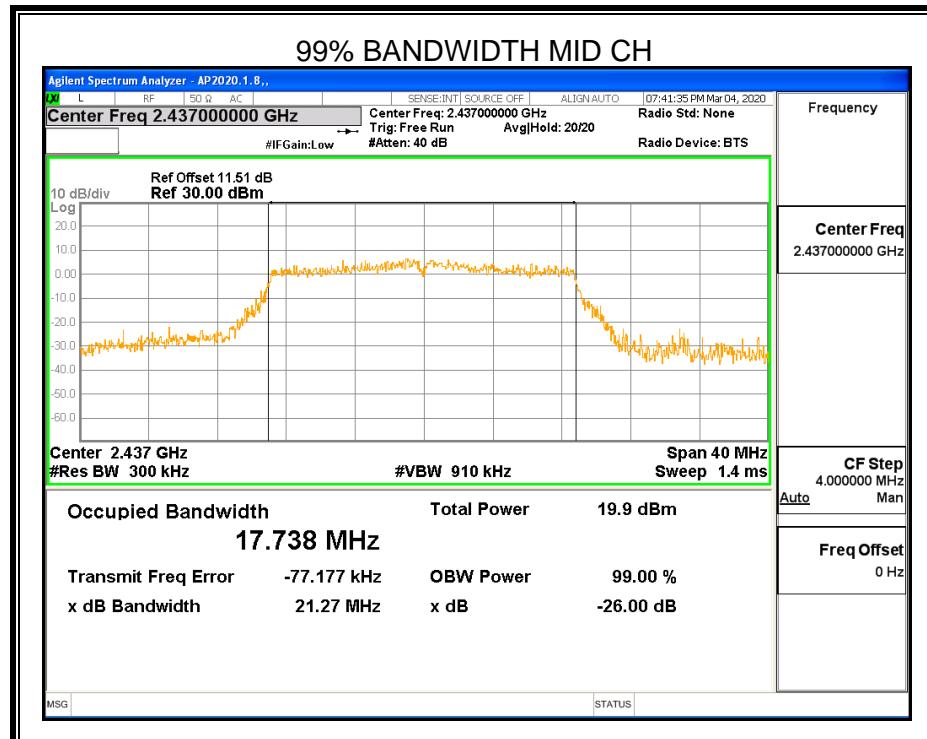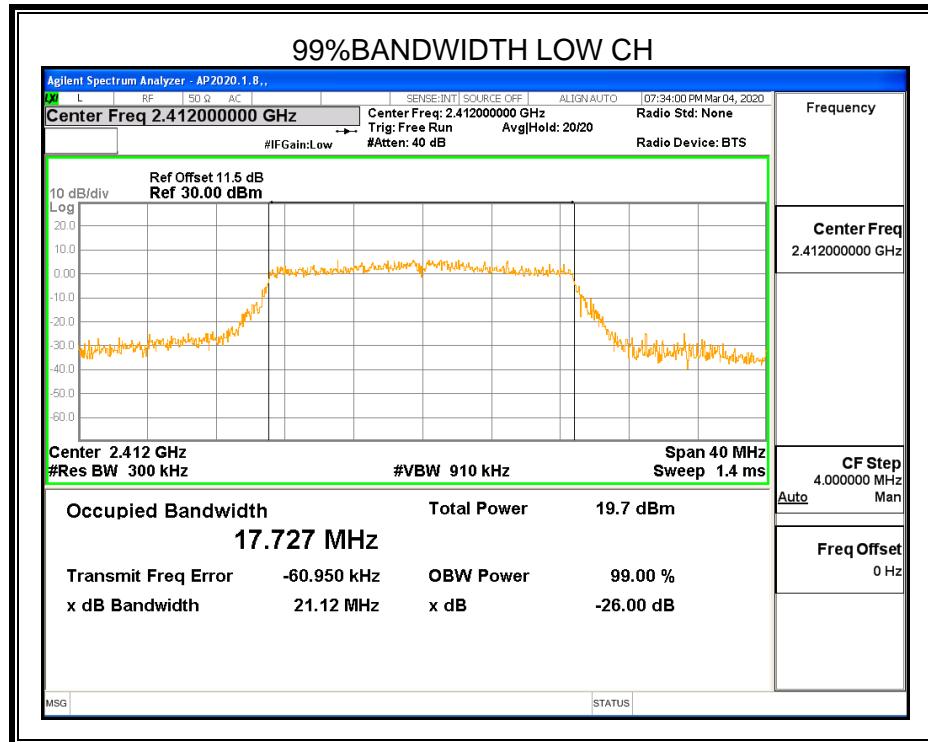

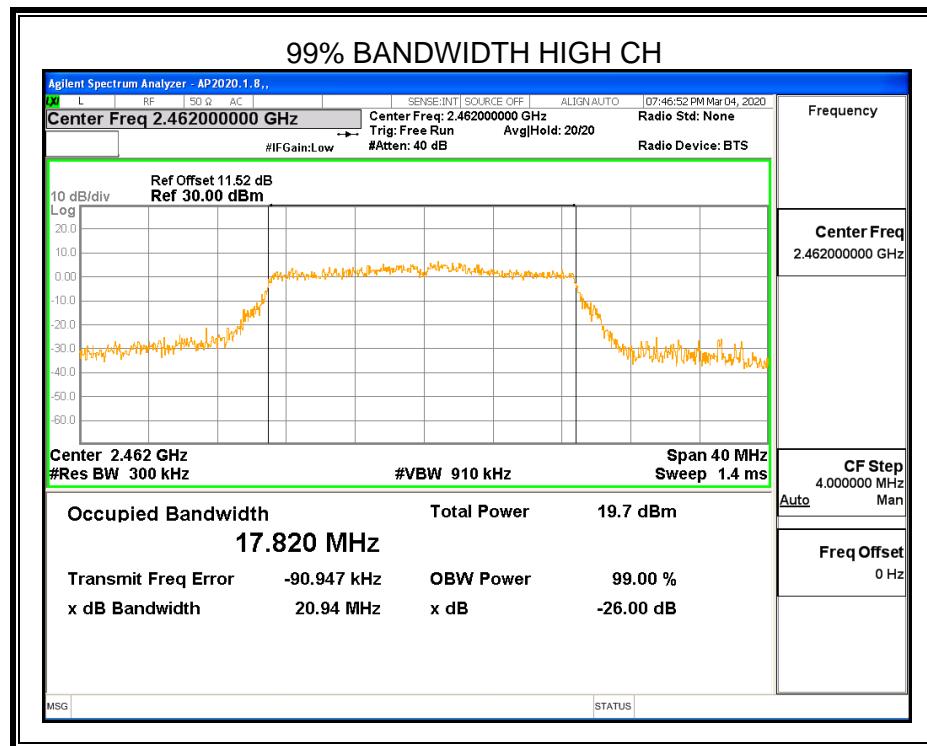

7.3. CONDUCTED OUTPUT POWER

LIMITS

| CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2 | | | |
|--|--------------|-----------------|-----------------------|
| Section | Test Item | Limit | Frequency Range (MHz) |
| CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d) | Output Power | 1 watt or 30dBm | 2400-2483.5 |

TEST PROCEDURE


Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.

Measure the power of each channel.

AVG Detector use for AVG result.

TEST SETUP

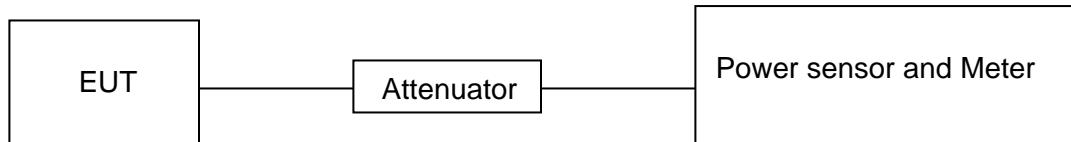

TEST ENVIRONMENT

| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 25.3°C | Relative Humidity | 61% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.7V |

RESULTS**7.3.1. 802.11b MODE**

| Test Channel | Maximum Conducted Output Power(AV) | LIMIT |
|--------------|------------------------------------|-------|
| | (dBm) | dBm |
| Low | 17.16 | 30 |
| Middle | 17.03 | 30 |
| High | 17.38 | 30 |

7.3.2. 802.11g MODE

| Test Channel | Maximum Conducted Output Power(AV) | LIMIT |
|--------------|------------------------------------|-------|
| | (dBm) | dBm |
| Low | 15.01 | 30 |
| Middle | 14.73 | 30 |
| High | 13.05 | 30 |

7.3.3. 802.11n HT20 MODE

| Test Channel | Maximum Conducted Output Power(AV) | LIMIT |
|--------------|------------------------------------|-------|
| | (dBm) | dBm |
| Low | 15.34 | 30 |
| Middle | 15.51 | 30 |
| High | 12.38 | 30 |

7.4. POWER SPECTRAL DENSITY

LIMITS

| CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2 | | | |
|--|------------------------|-------------|-----------------------|
| Section | Test Item | Limit | Frequency Range (MHz) |
| CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b) | Power Spectral Density | 8 dBm/3 kHz | 2400-2483.5 |

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

| | |
|------------------|--|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ |
| VBW | $\geq 3 \times \text{RBW}$ |
| Span | $1.5 \times \text{DTS bandwidth}$ |
| Trace | Max hold |
| Sweep time | Auto couple. |

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

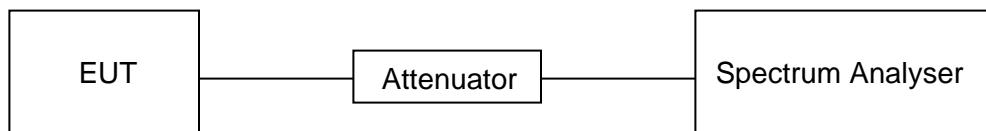


TEST ENVIRONMENT



| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 25.4°C | Relative Humidity | 61% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.7V |

RESULTS

7.4.1. 802.11b MODE


| Test Channel | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|--------------|-----------------------------------|------------------|--------|
| Low | -6.06 | 8 | PASS |
| Middle | -5.56 | 8 | PASS |
| High | -5.85 | 8 | PASS |


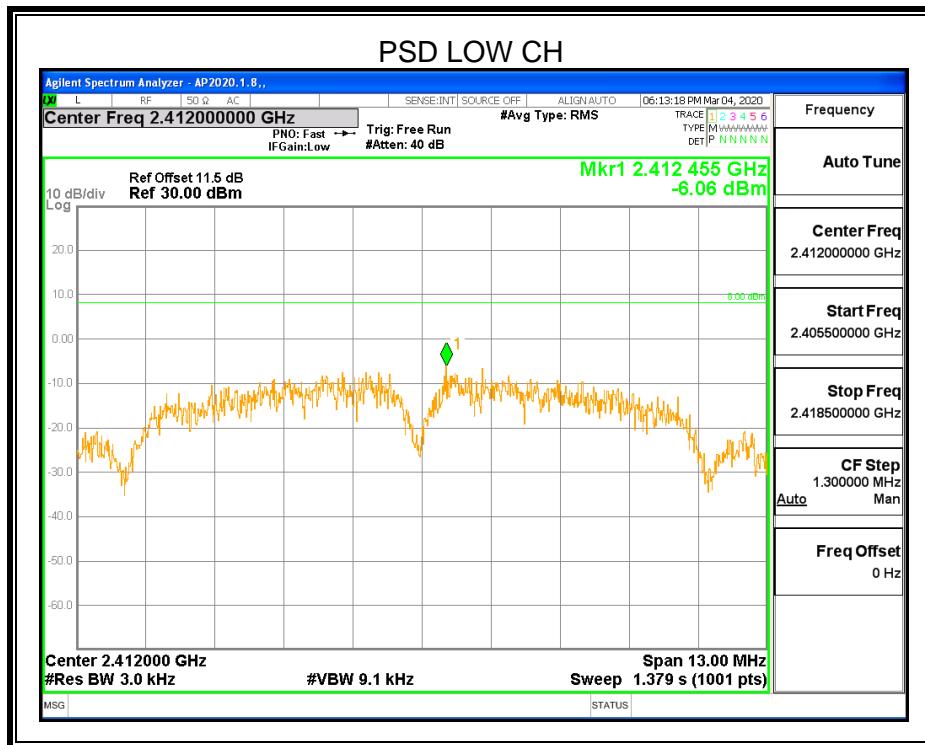


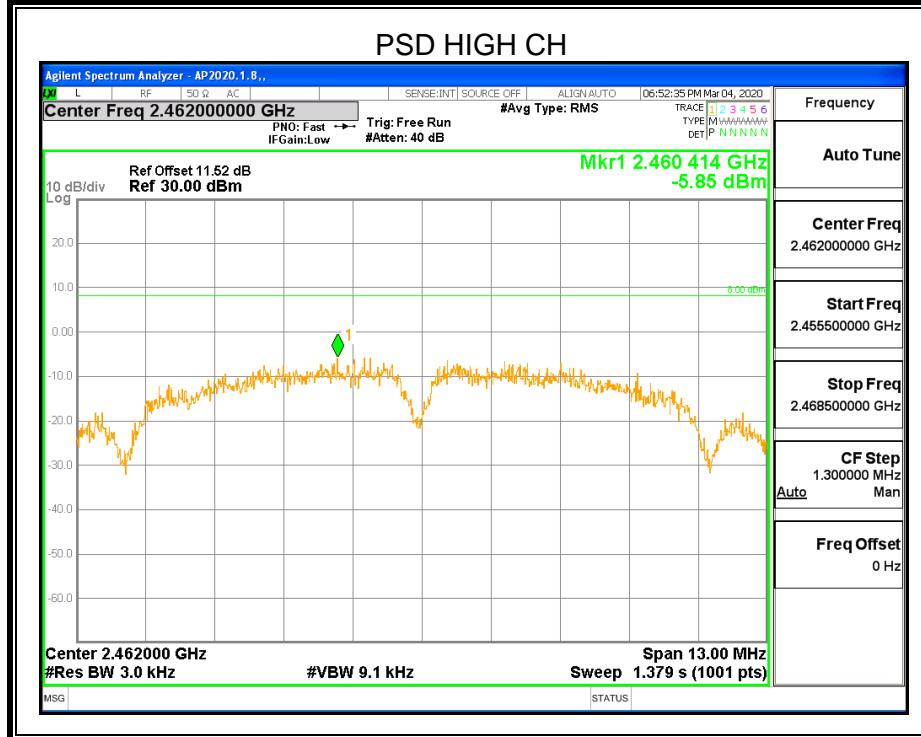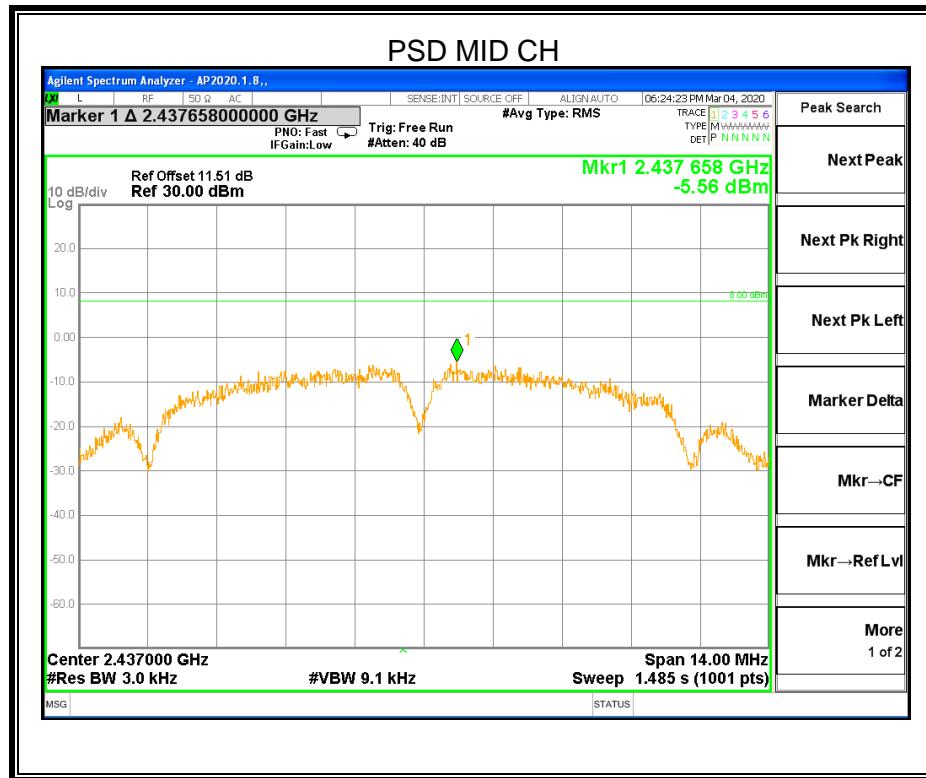

7.4.2. 802.11g MODE


| Test Channel | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|--------------|-----------------------------------|------------------|--------|
| Low | -6.13 | 8 | PASS |
| Middle | -7.16 | 8 | PASS |
| High | -8.00 | 8 | PASS |


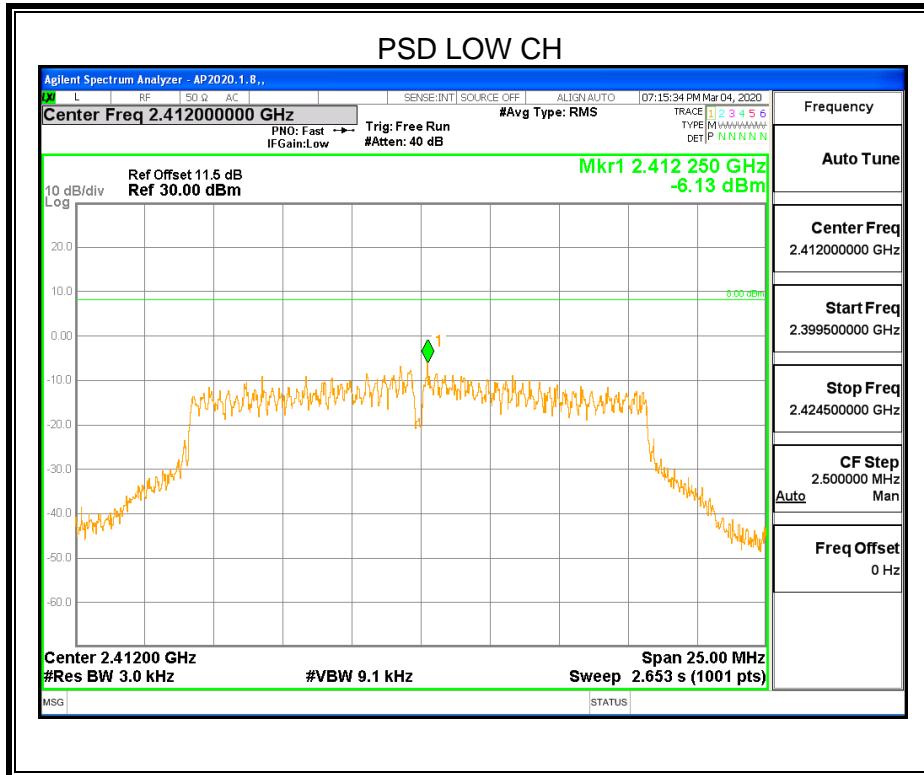


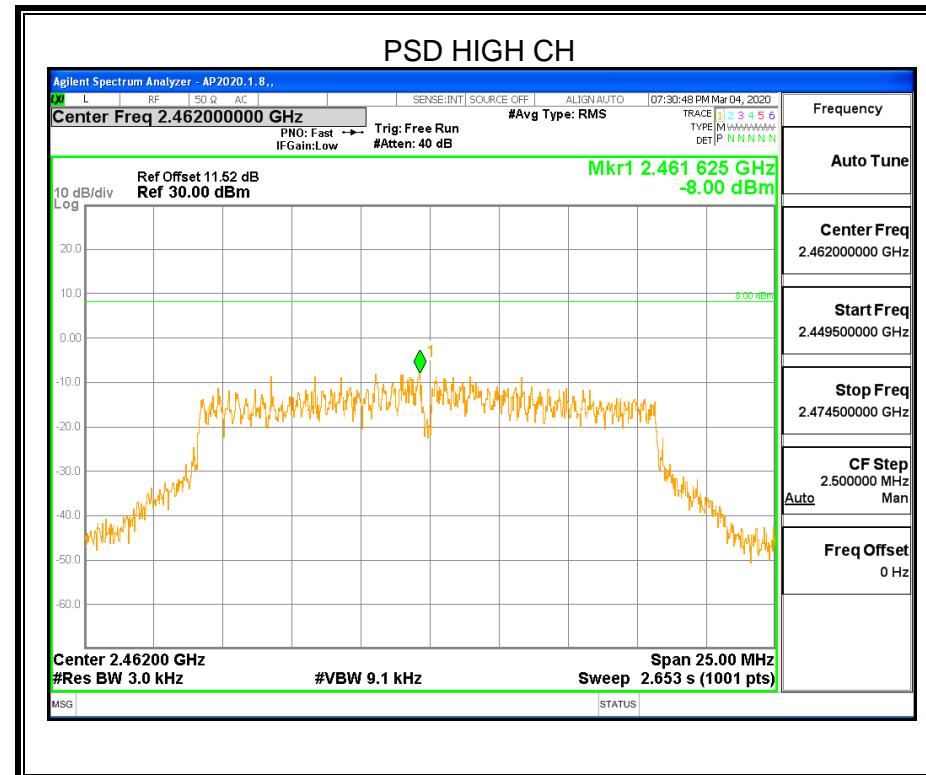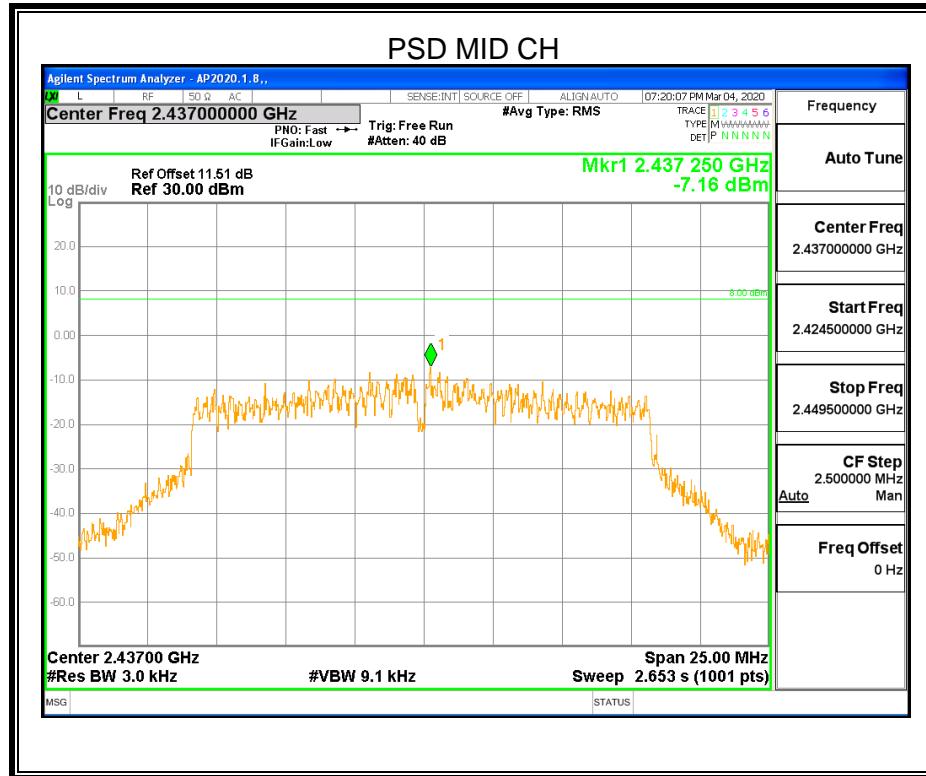

7.4.3. 802.11n HT20 MODE

| Test Channel | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|--------------|-----------------------------------|------------------|--------|
| Low | -7.93 | 8 | PASS |
| Middle | -9.82 | 8 | PASS |
| High | -9.87 | 8 | PASS |

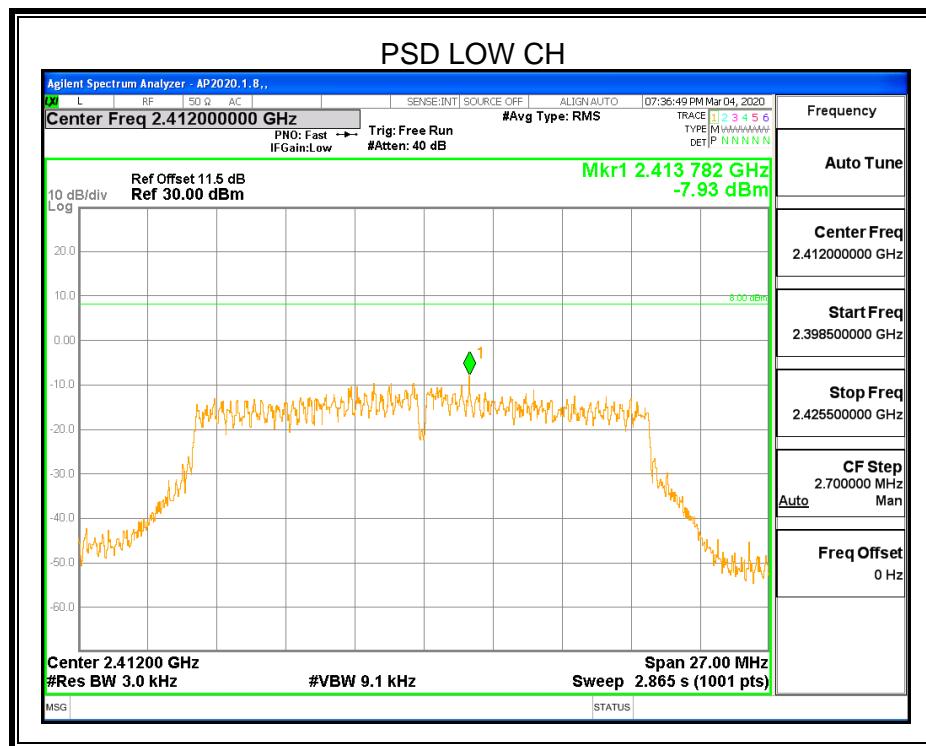

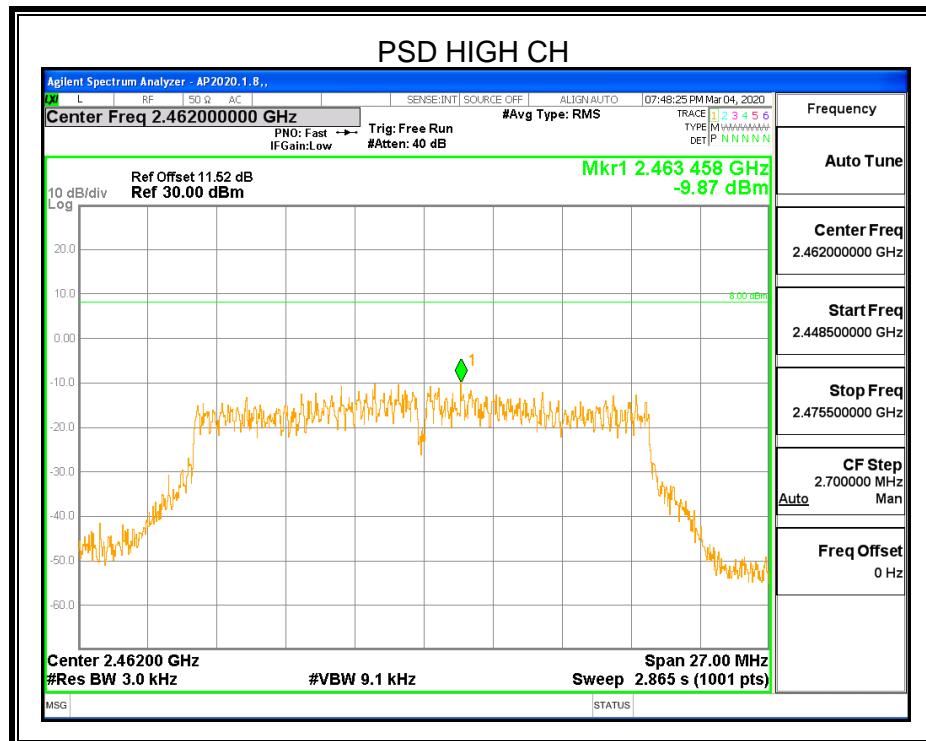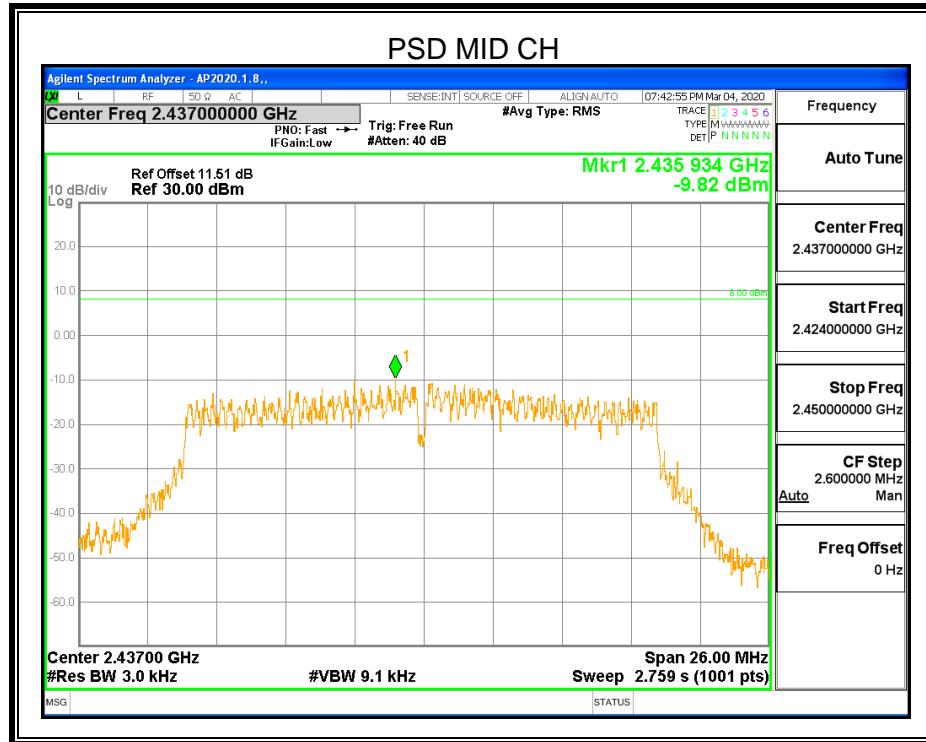

7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

| CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2 | | |
|--|---|---|
| Section | Test Item | Limit |
| CFR 47 FCC §15.247 (d) ISED RSS-247 5.5 | Conducted Bandedge and Spurious Emissions | at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power |

Notes: The display line is placed at -20dBc but all emissions outside of the band meet the -30dBc limit.

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

| | |
|------------------|--|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | 100kHz |
| VBW | $\geq 3 \times$ RBW |
| Span | 1.5 x DTS bandwidth |
| Trace | Max hold |
| Sweep time | Auto couple. |

Use the peak marker function to determine the maximum PSD level.

| | |
|--------------------|---|
| Span | Set the center frequency and span to encompass frequency range to be measured |
| Detector | Peak |
| RBW | 100K |
| VBW | $\geq 3 \times$ RBW |
| measurement points | \geq span/RBW |
| Trace | Max hold |
| Sweep time | Auto couple. |

Use the peak marker function to determine the maximum amplitude level.

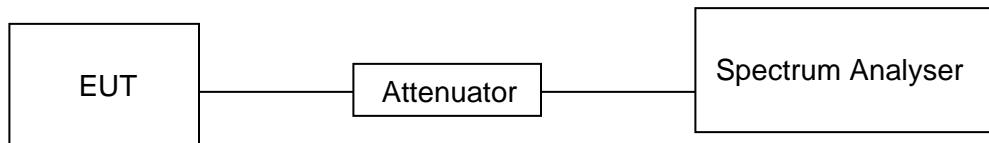
TEST SETUP**TEST ENVIRONMENT**

| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 25.4°C | Relative Humidity | 61% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.7V |


RESULTS

7.5.1. 802.11b MODE


LOW CH BANDEDGE

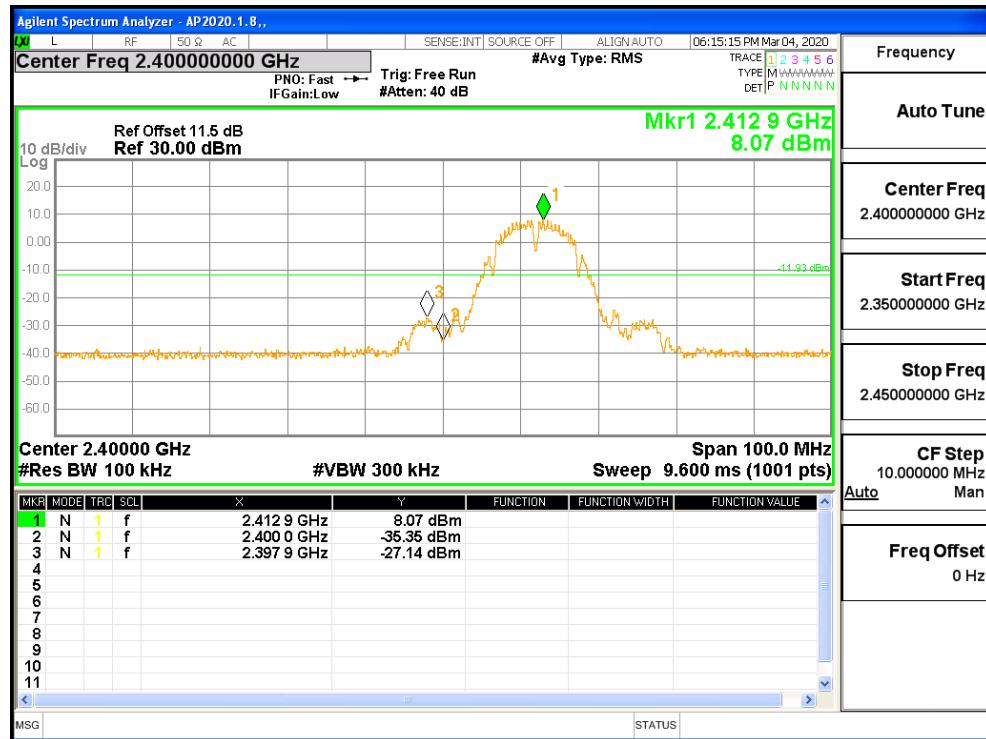


LOW CH SPURIOUS EMISSIONS 30M-26G

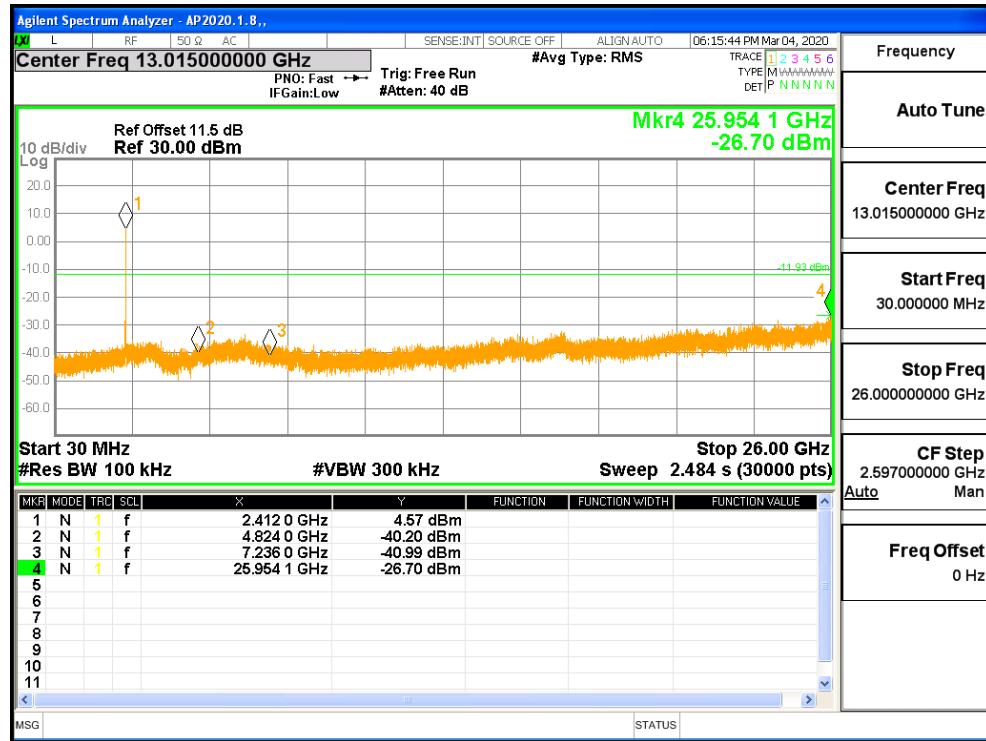


MID CH SPURIOUS EMISSIONS REFERENCE

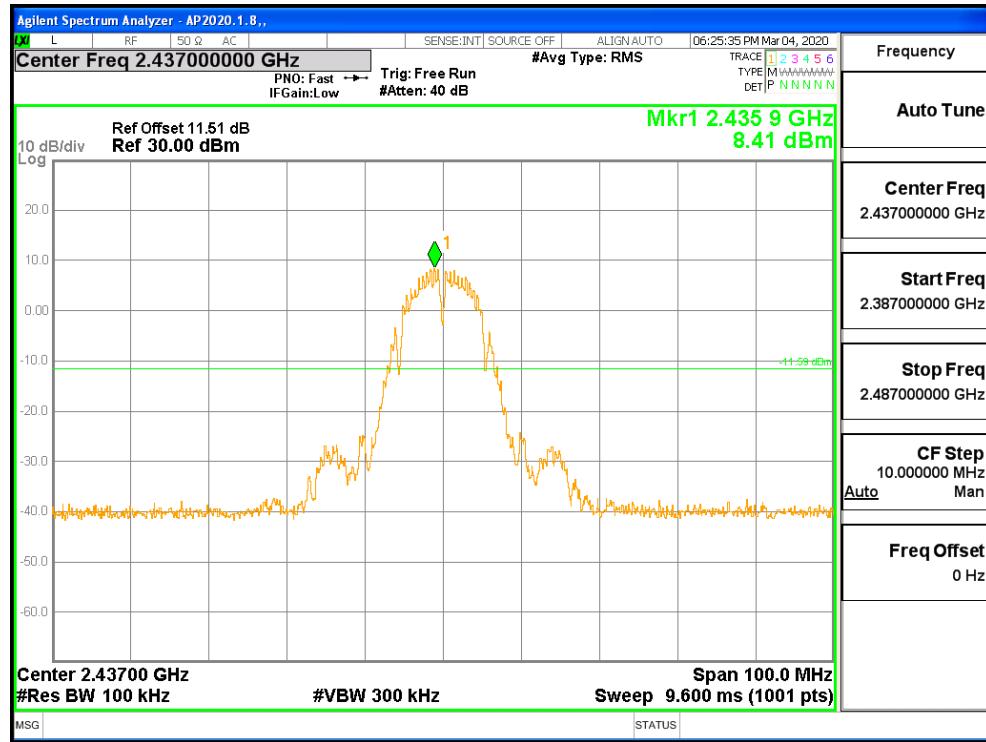


MID CH SPURIOUS EMISSIONS 30M-26G

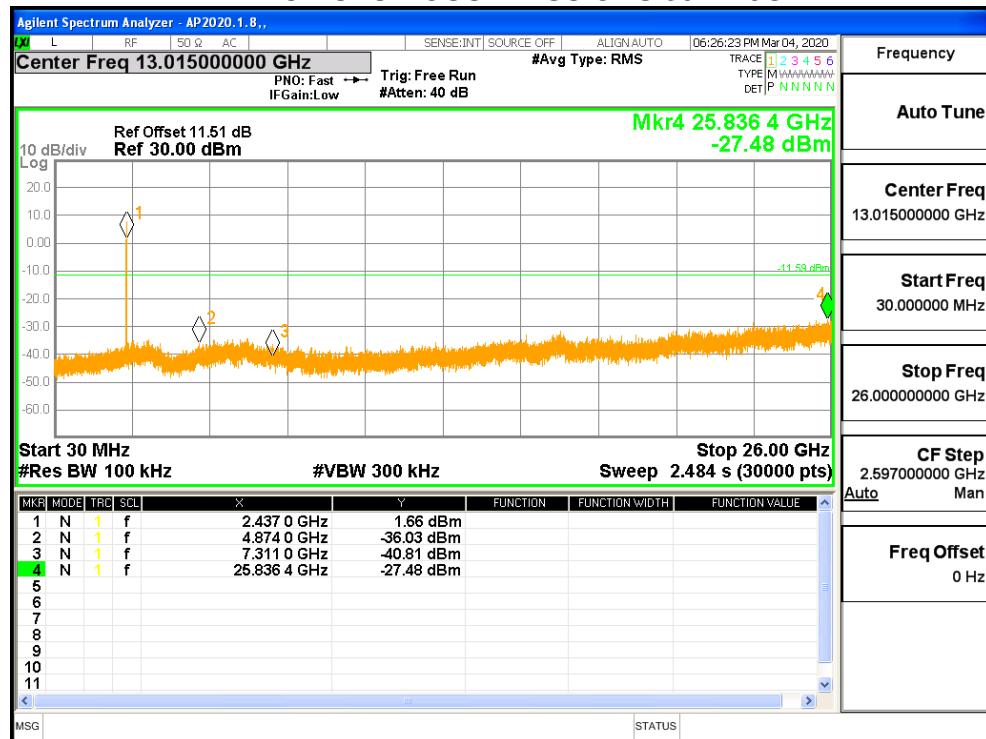

HIGH CH BANDEDGE

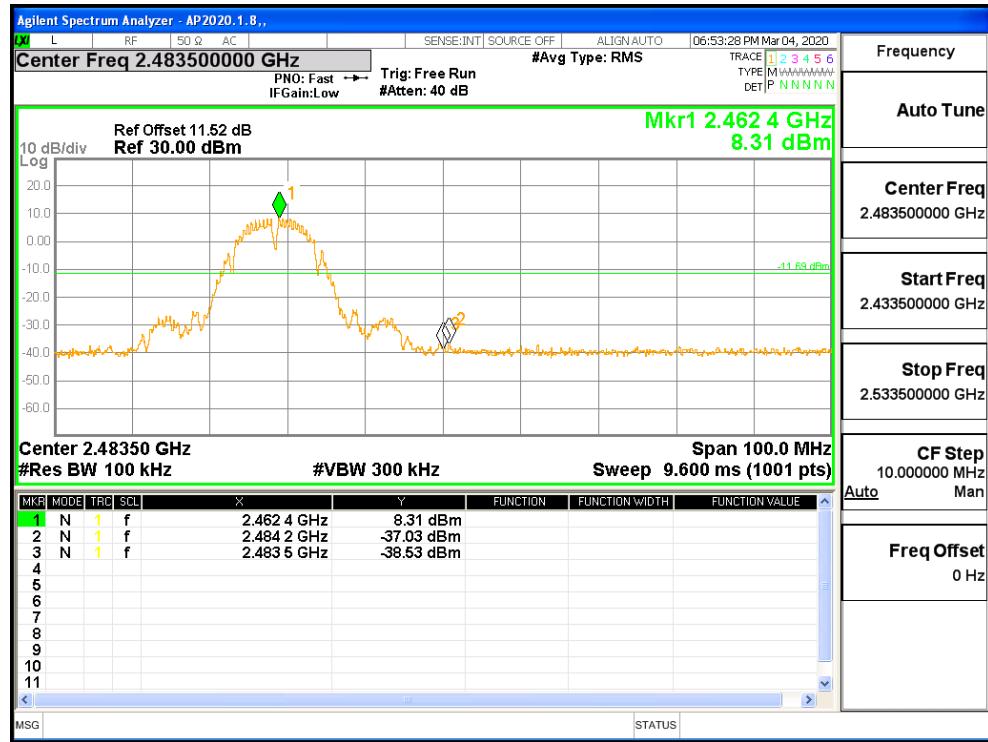


HIGH CH SPURIOUS EMISSIONS 30M-26G

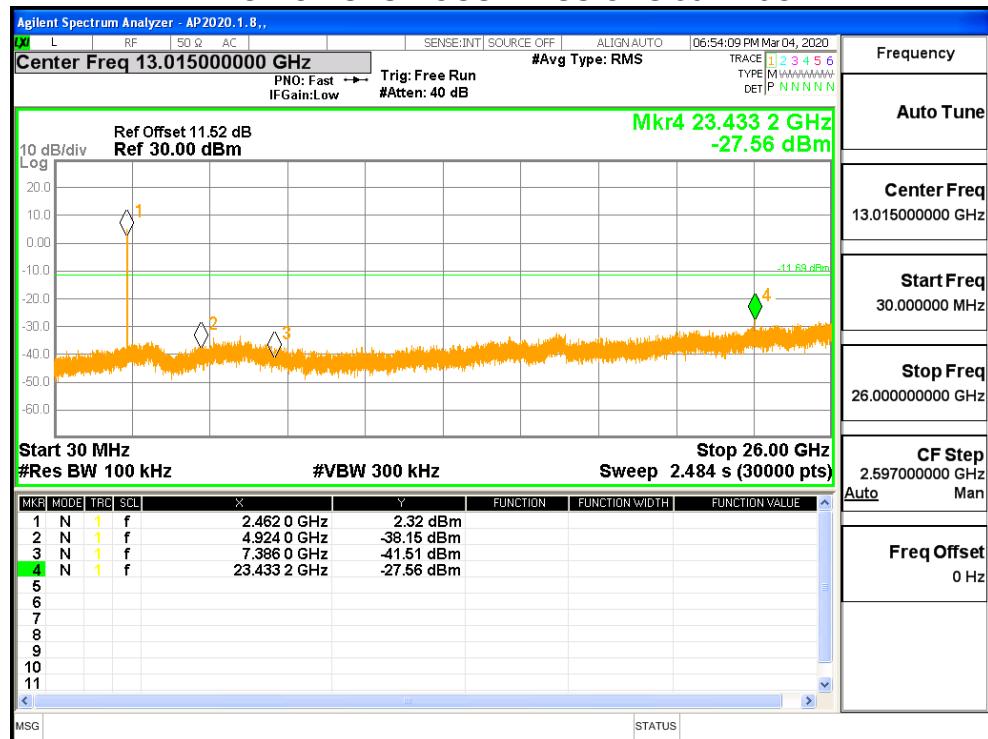


7.5.2. 802.11g MODE


LOW CH BANDEDGE

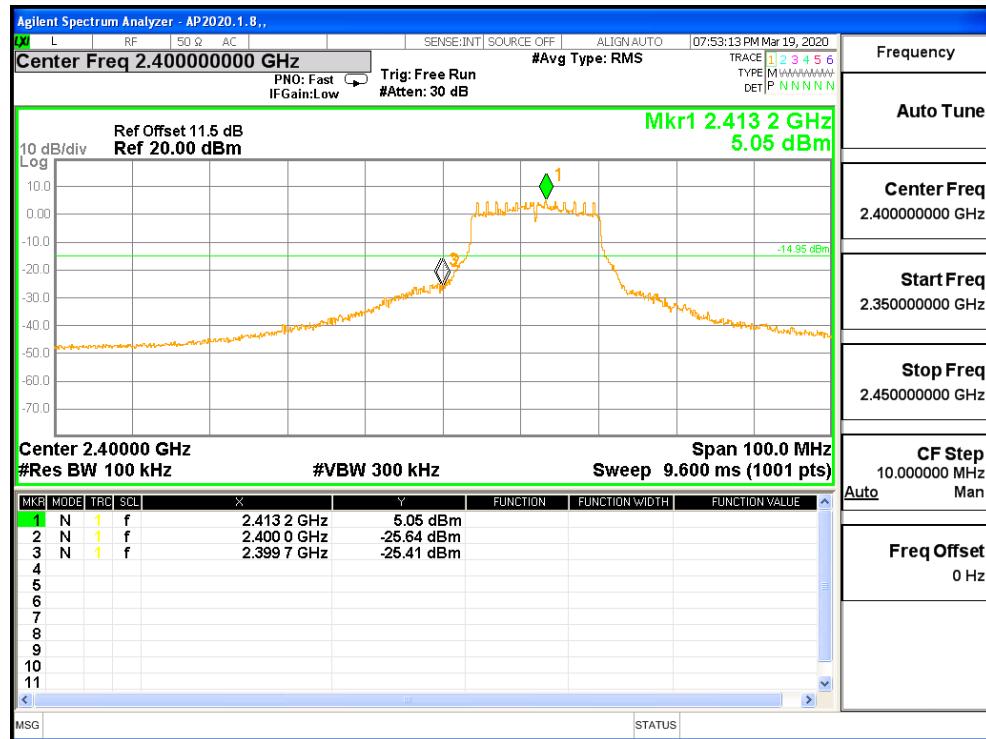


LOW CH SPURIOUS EMISSIONS 30M-26G

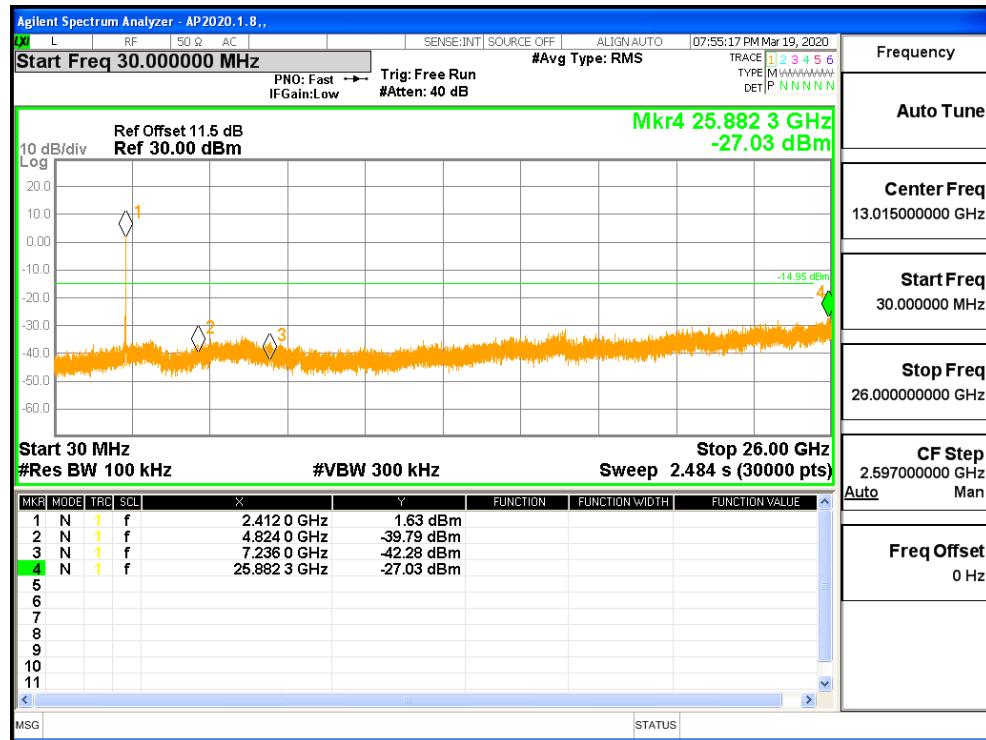


MID CH SPURIOUS EMISSIONS REFERENCE

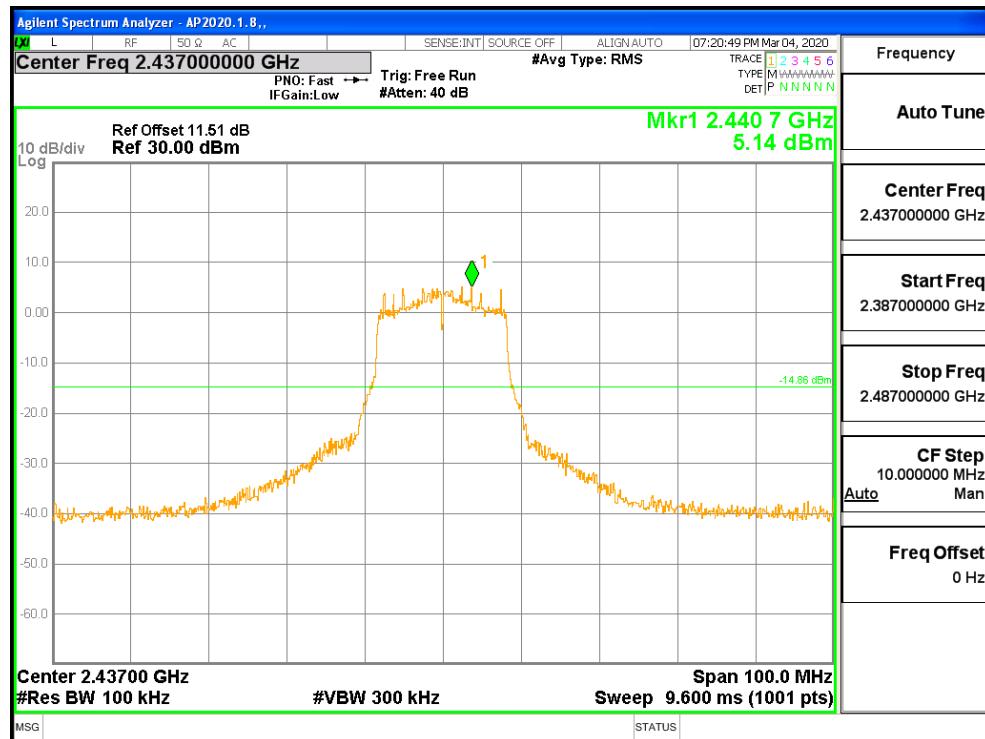


MID CH SPURIOUS EMISSIONS 30M-26G

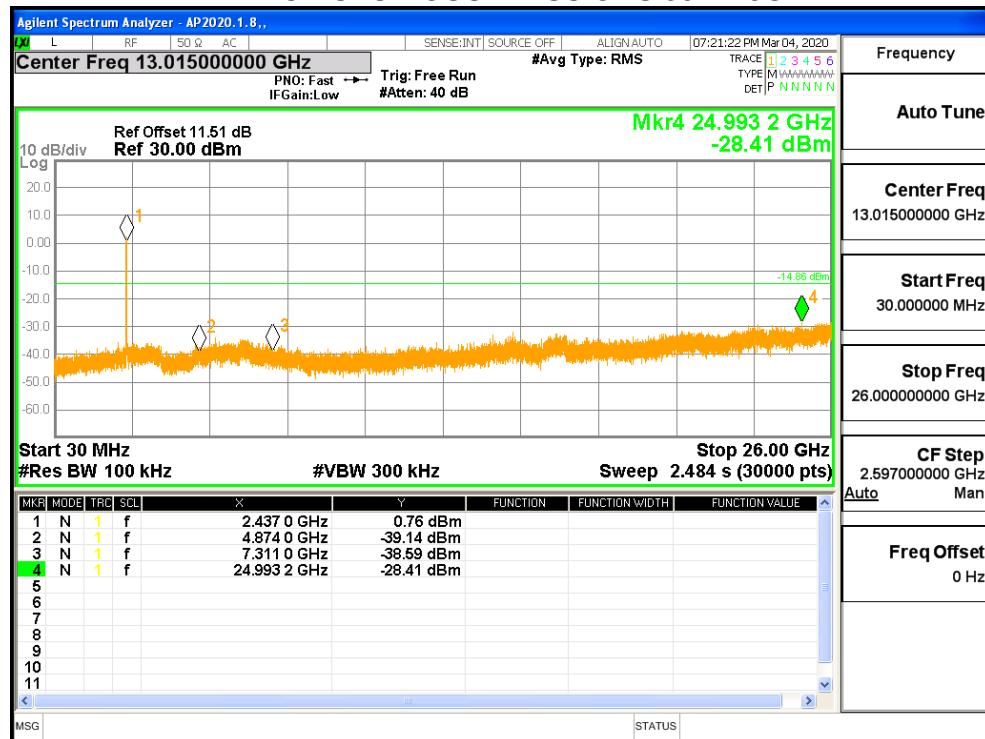

HIGH CH BANDEDGE

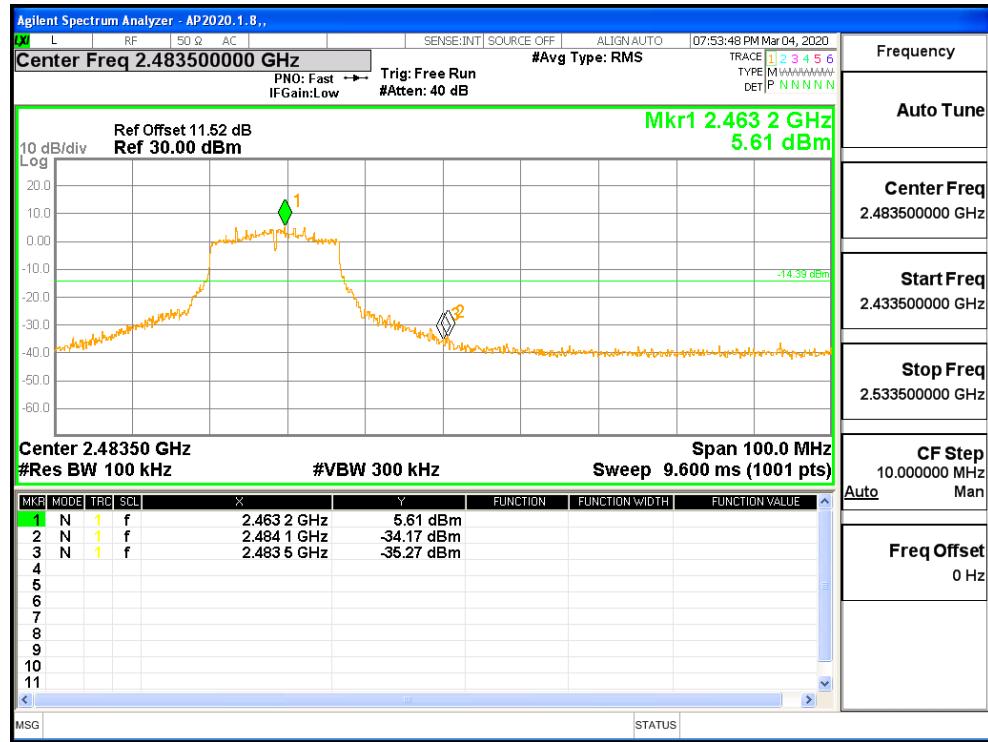


HIGH CH SPURIOUS EMISSIONS 30M-26G

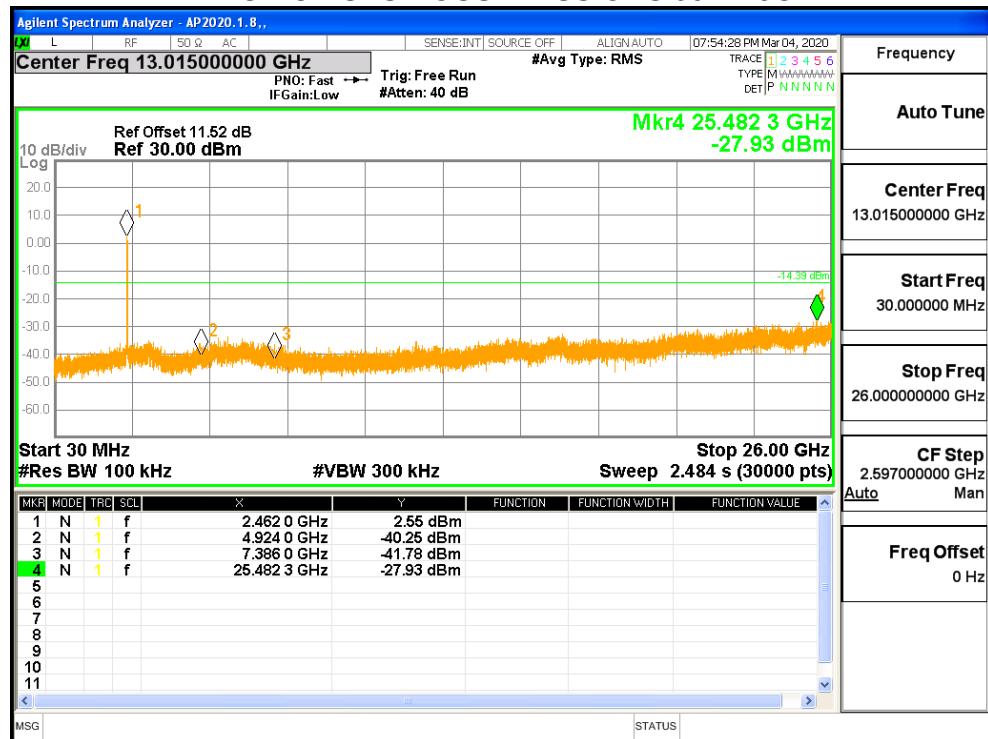


7.5.3. 802.11n HT20 MODE


LOW CH BANDEDGE

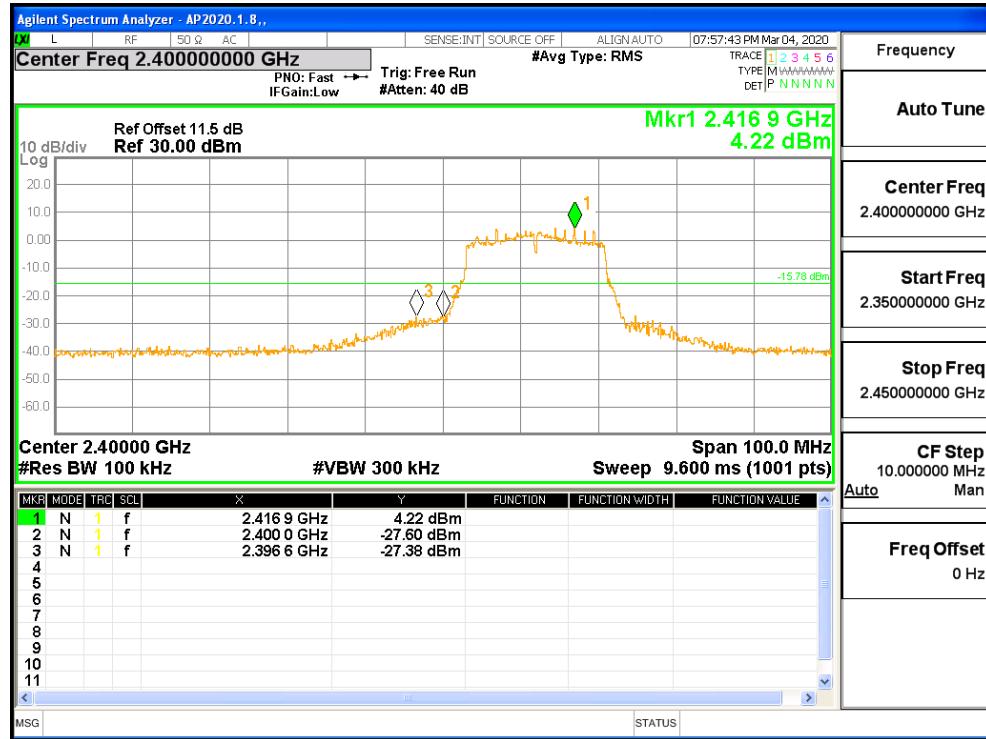


LOW CH SPURIOUS EMISSIONS 30M-26G

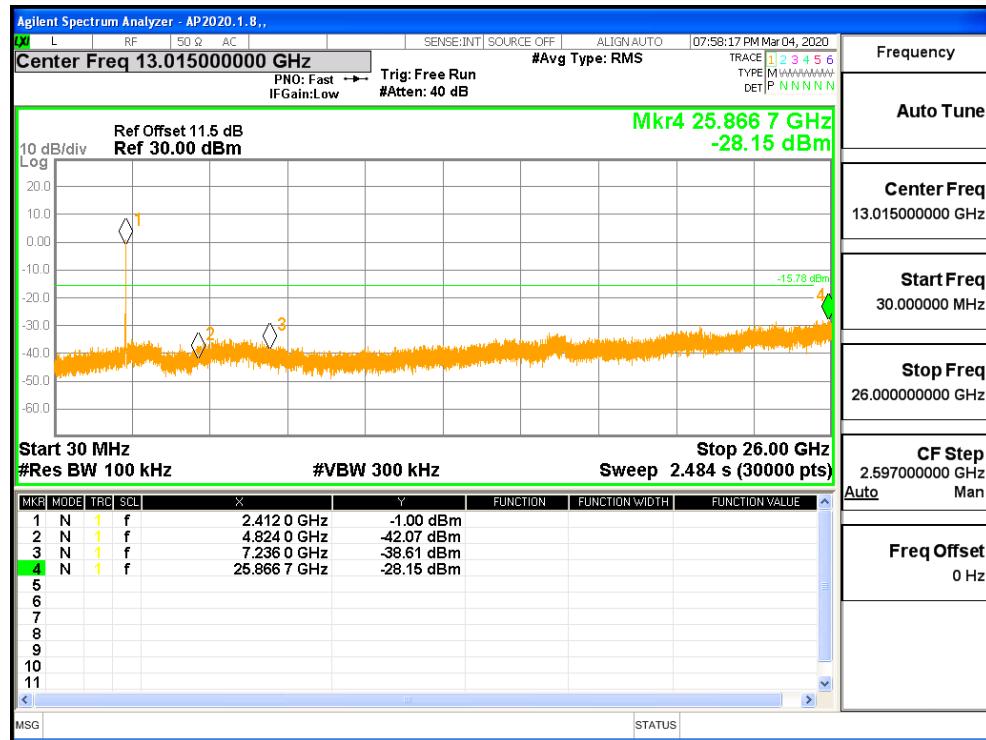


MID CH SPURIOUS EMISSIONS REFERENCE

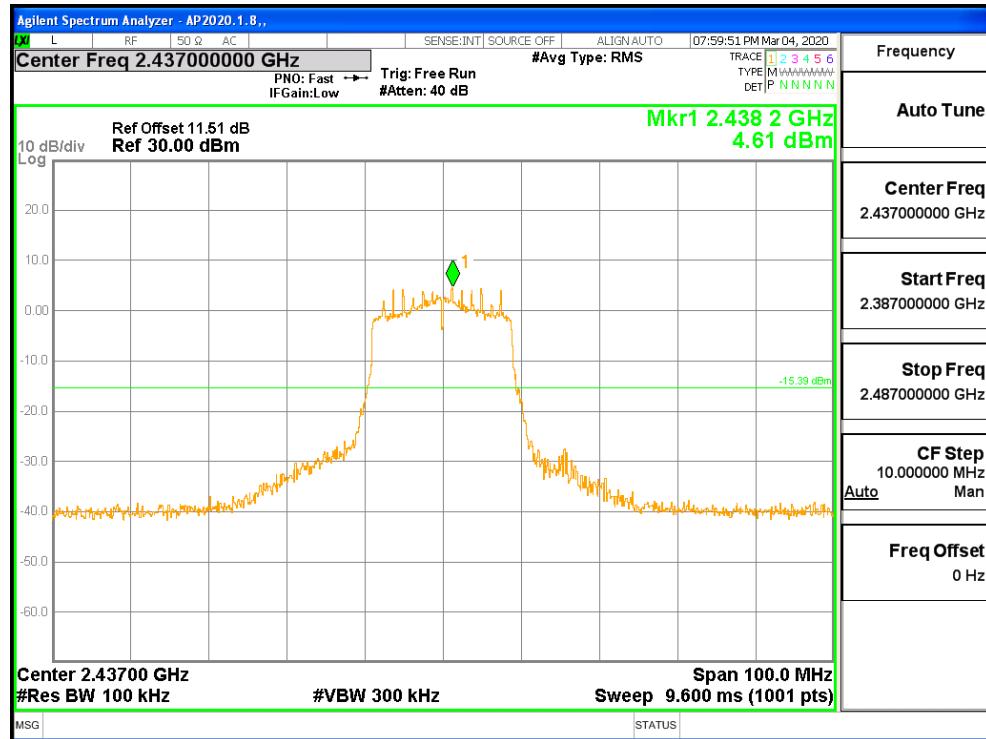


MID CH SPURIOUS EMISSIONS 30M-26G

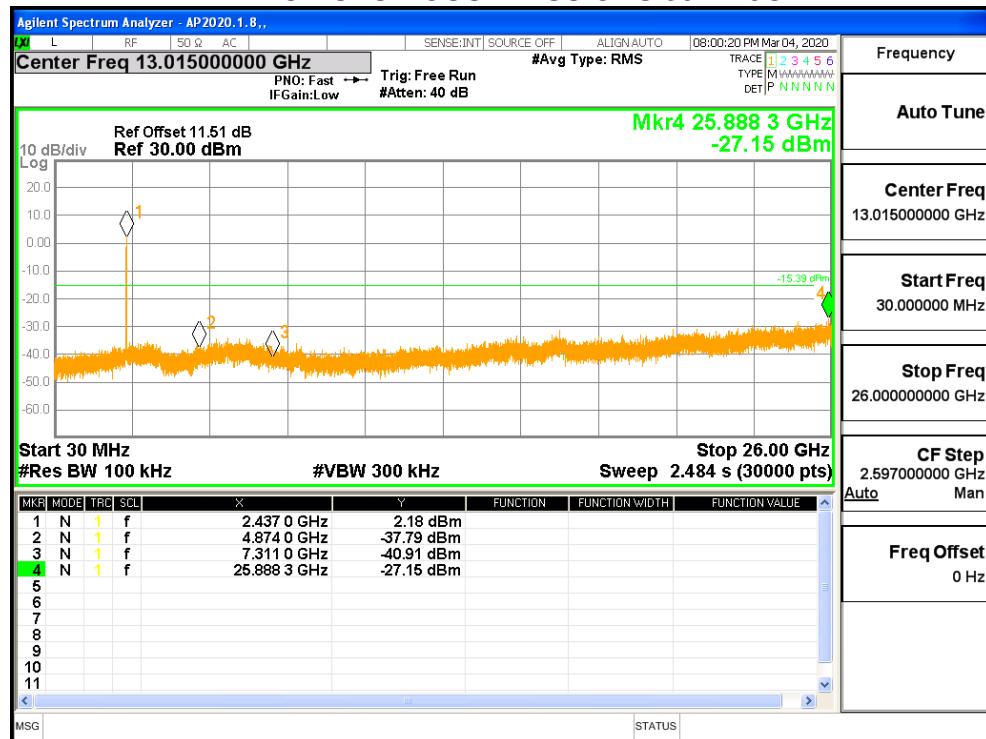

HIGH CH BANDEDGE

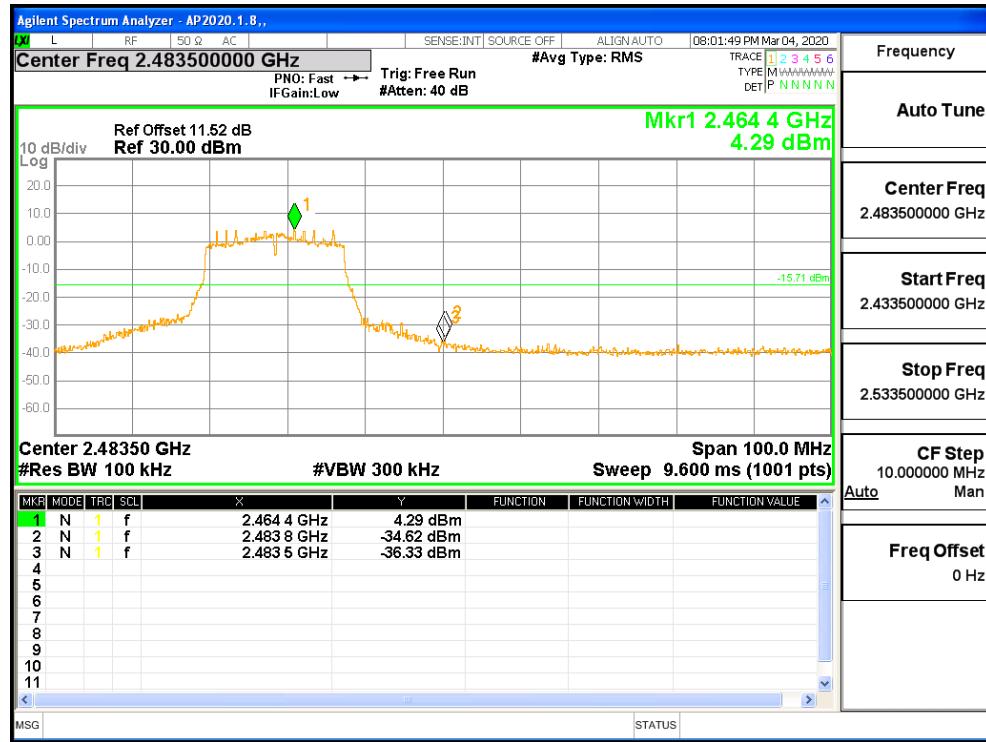

HIGH CH SPURIOUS EMISSIONS 30M-26G

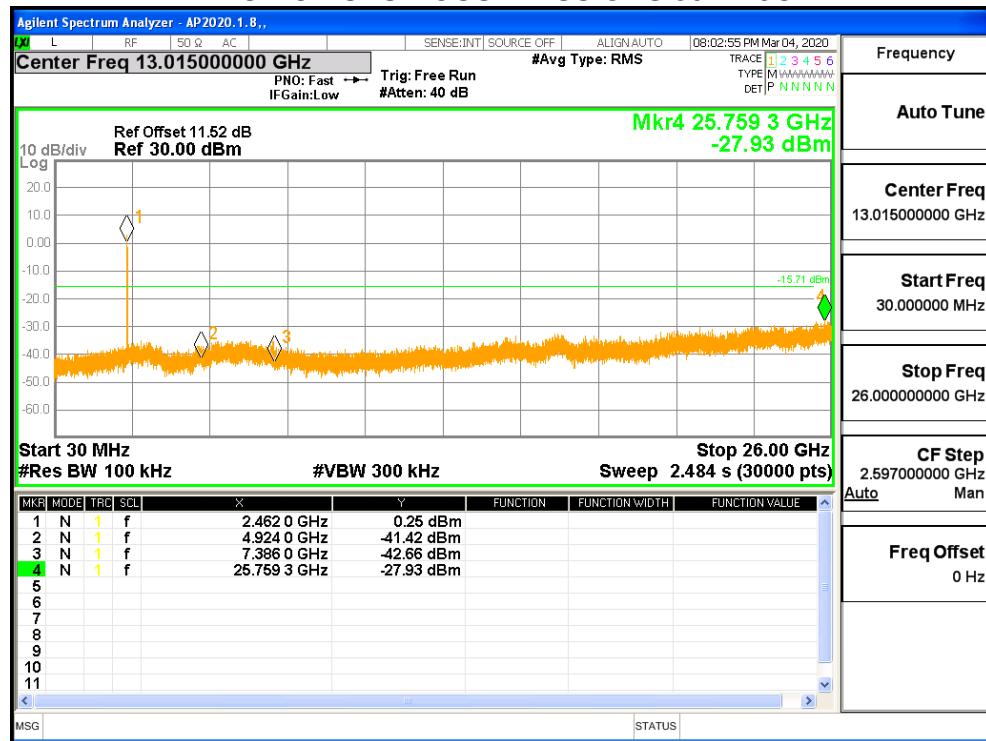

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209

Please refer to ISED RSS-GEN Clause 8.9 (Transmitter)

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| 960~1000 | 500 | 3 |

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

| Frequency (MHz) | dB(uV/m) (at 3 meters) | |
|-----------------|------------------------|---------|
| | Peak | Average |
| Above 1000 | 74 | 54 |

IC Restricted bands please refer to ISED RSS-GEN Clause 8.10


FCC Restricted bands of operation:

| MHz | MHz | MHz | GHz |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| ¹ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (²) |
| 13.36-13.41 | | | |

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

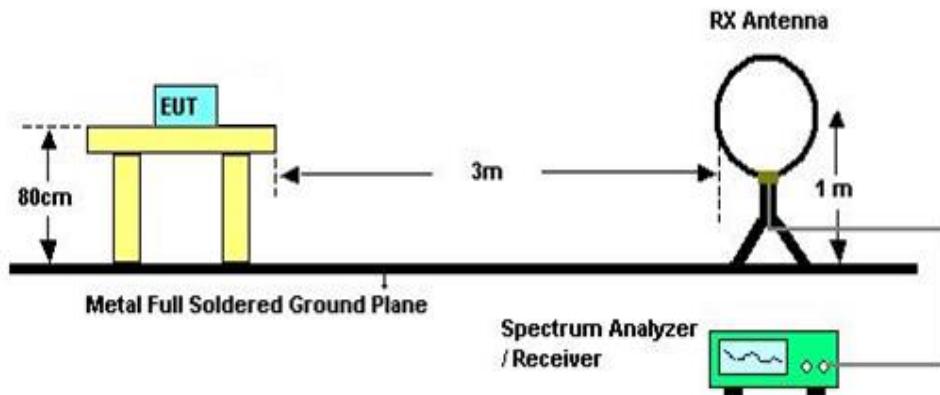


The setting of the spectrum analyser

| | |
|----------|--|
| RBW | 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz) |
| VBW | 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz) |
| Sweep | Auto |
| Detector | Peak/QP/ Average |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1G

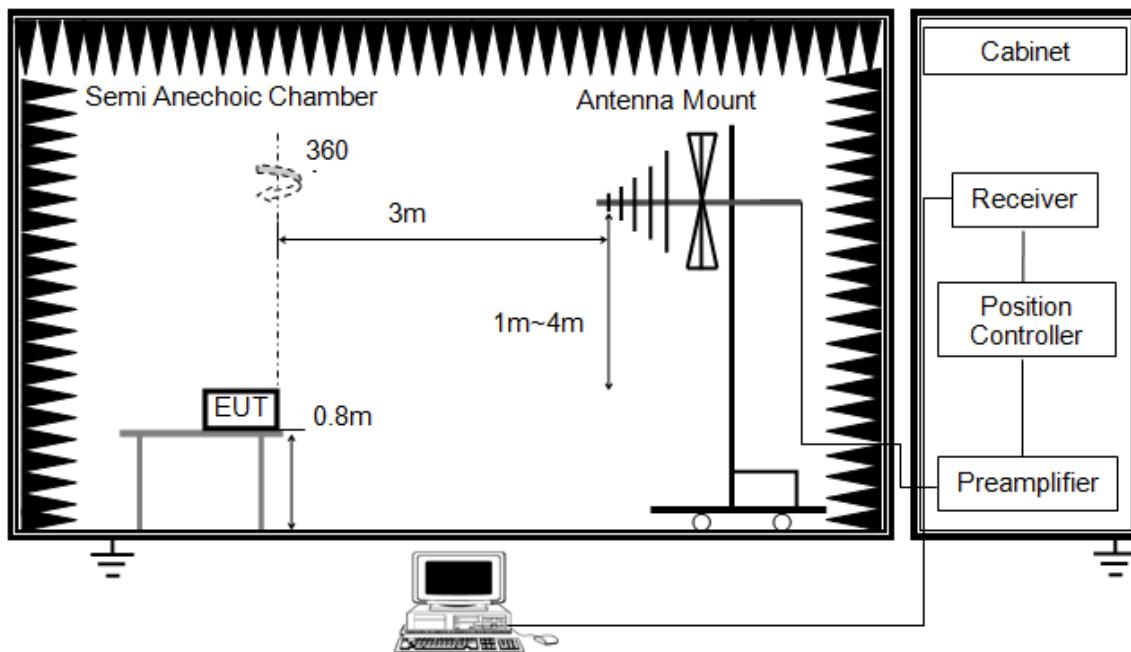


The setting of the spectrum analyser

| | |
|----------|----------|
| RBW | 120kHz |
| VBW | 300kHz |
| Sweep | Auto |
| Detector | Peak/QP |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

ABOVE 1G

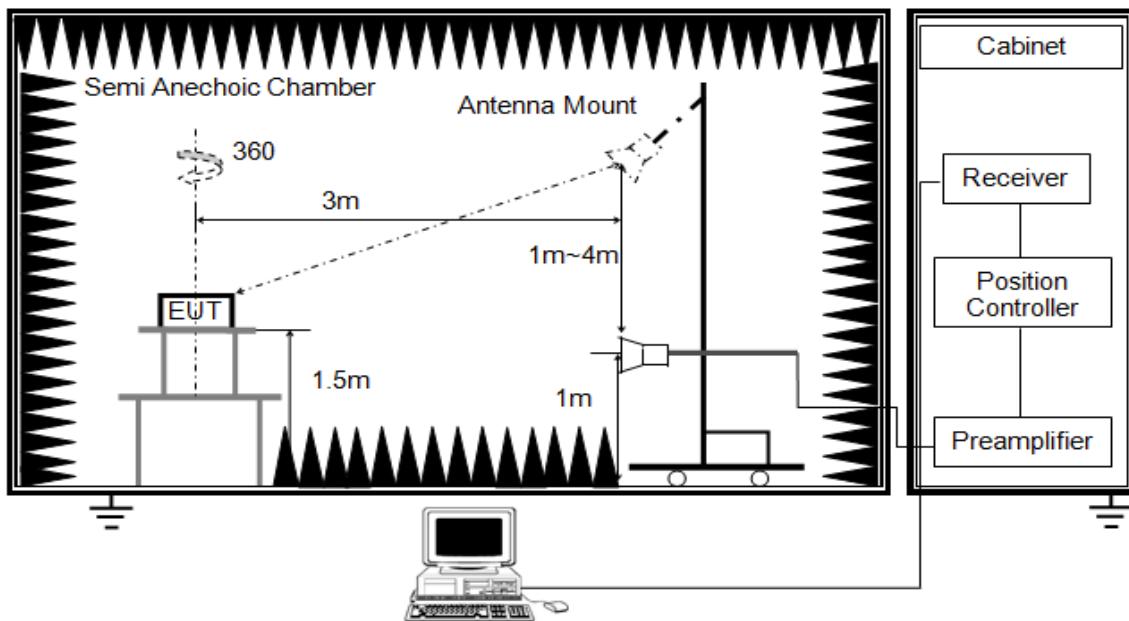


The setting of the spectrum analyser

| | |
|----------|-------------------------------|
| RBW | 1M |
| VBW | PEAK: 3MHz AVG: see note 6 |
| Sweep | Auto |
| Detector | Peak |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

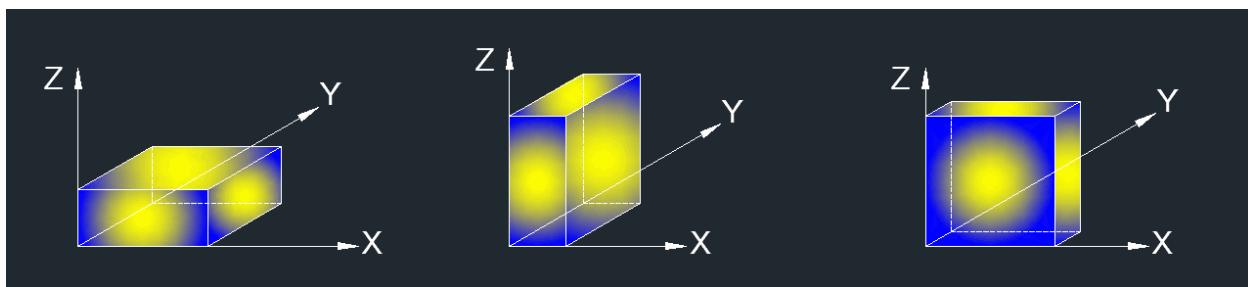

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: All the EUT's emissions had been evaluated for simultaneous transmission with the other WIFI 2.4GHz, WIFI 5GHz and BT&BLE transmitter and there were no any additional or worse emissions found. The worst case data has been recorded in the WIFI test report. (4789391992-3/-4).

TEST ENVIRONMENT


| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 23.1°C | Relative Humidity | 57% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.7V |

8.1. RESTRICTED BANDEDGE

8.1.1. 802.11b MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

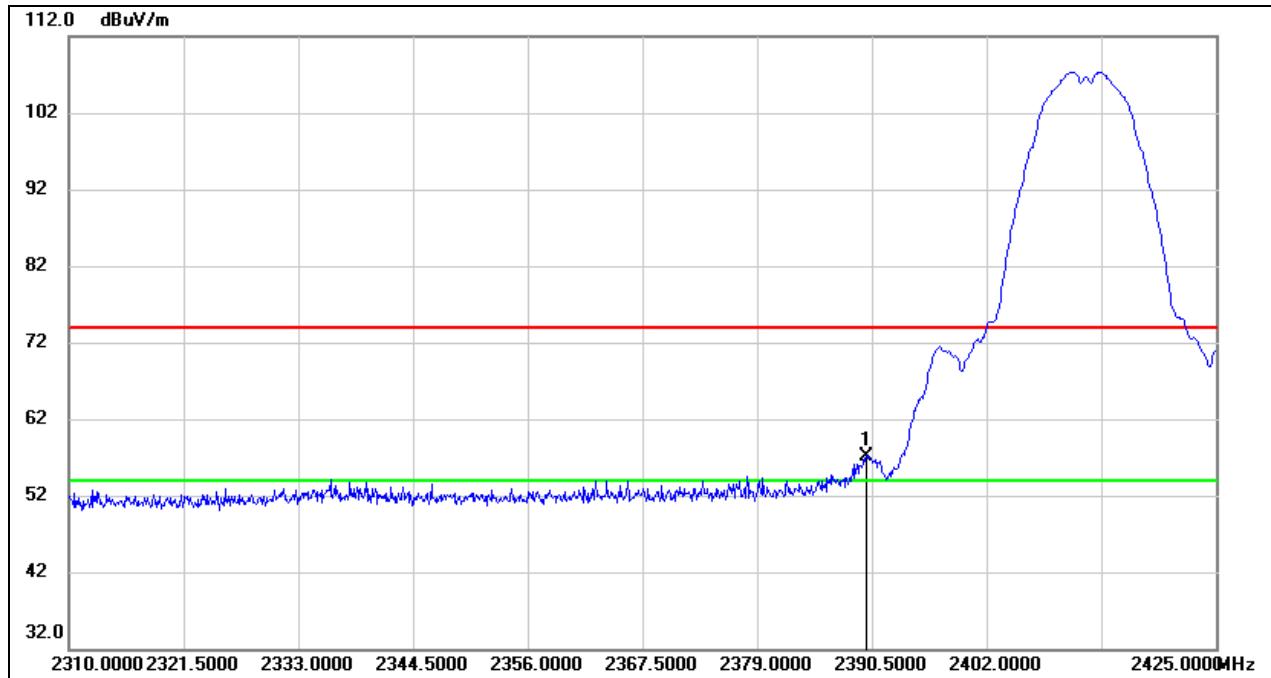

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 2390.000 | 24.18 | 32.94 | 57.12 | 74.00 | -16.88 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

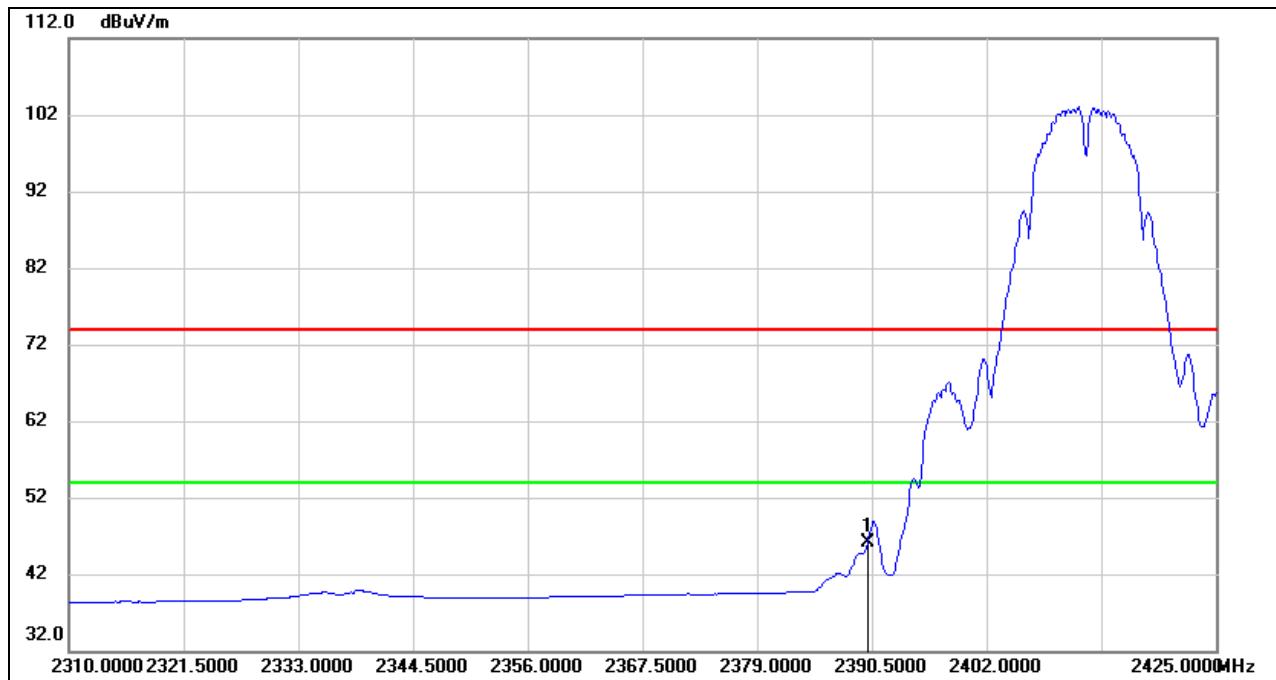


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2390.000 | 13.07 | 32.94 | 46.01 | 54.00 | -7.99 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

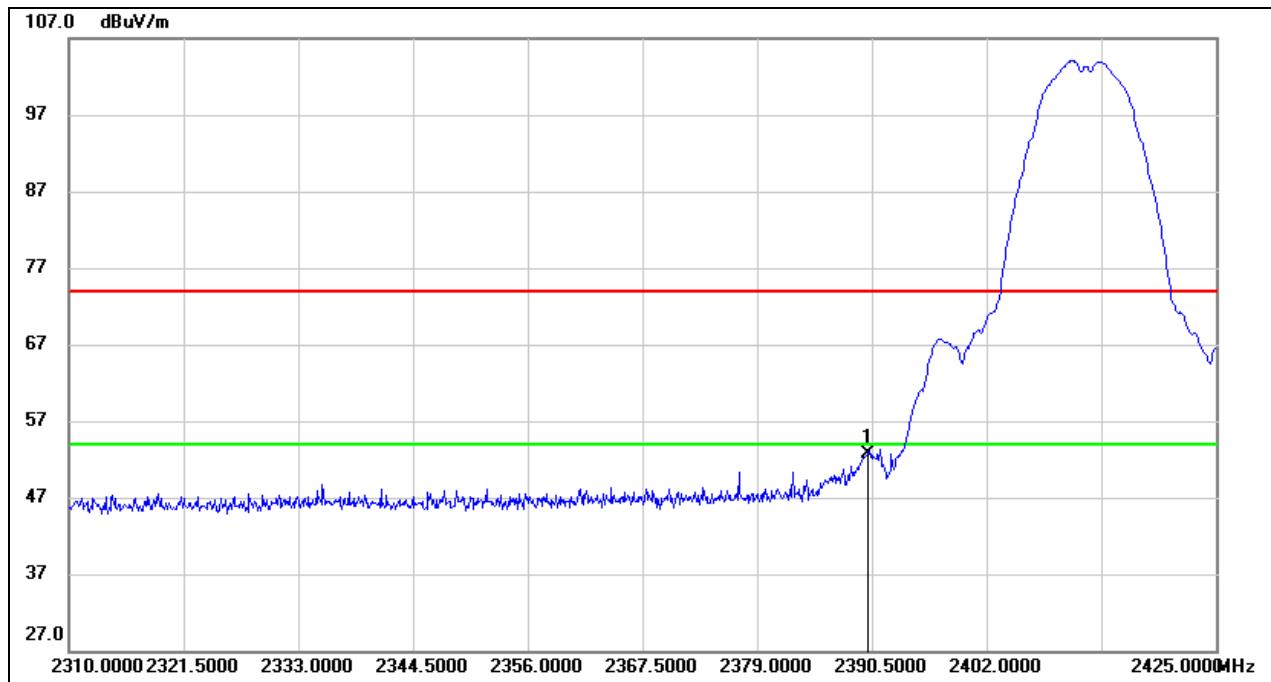RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**PEAK**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2390.000 | 19.71 | 32.94 | 52.65 | 74.00 | -21.35 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

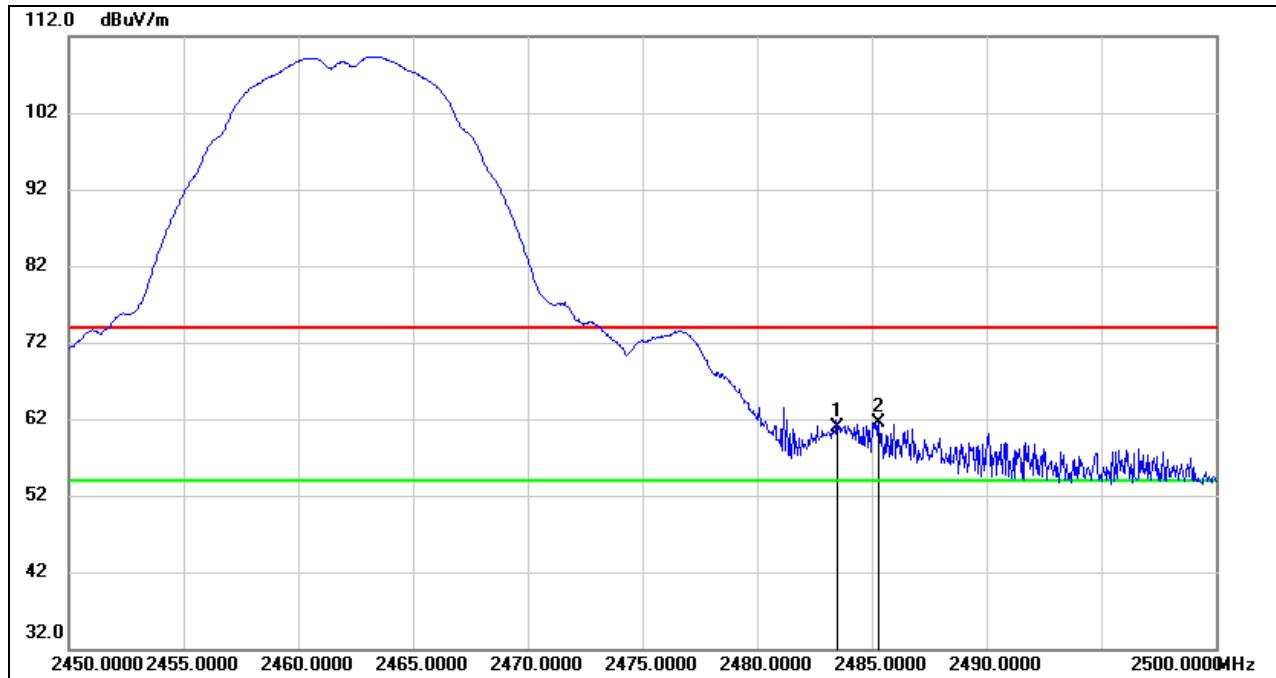RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 27.33 | 33.58 | 60.91 | 74.00 | -13.09 | peak |
| 2 | 2485.300 | 27.94 | 33.59 | 61.53 | 74.00 | -12.47 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

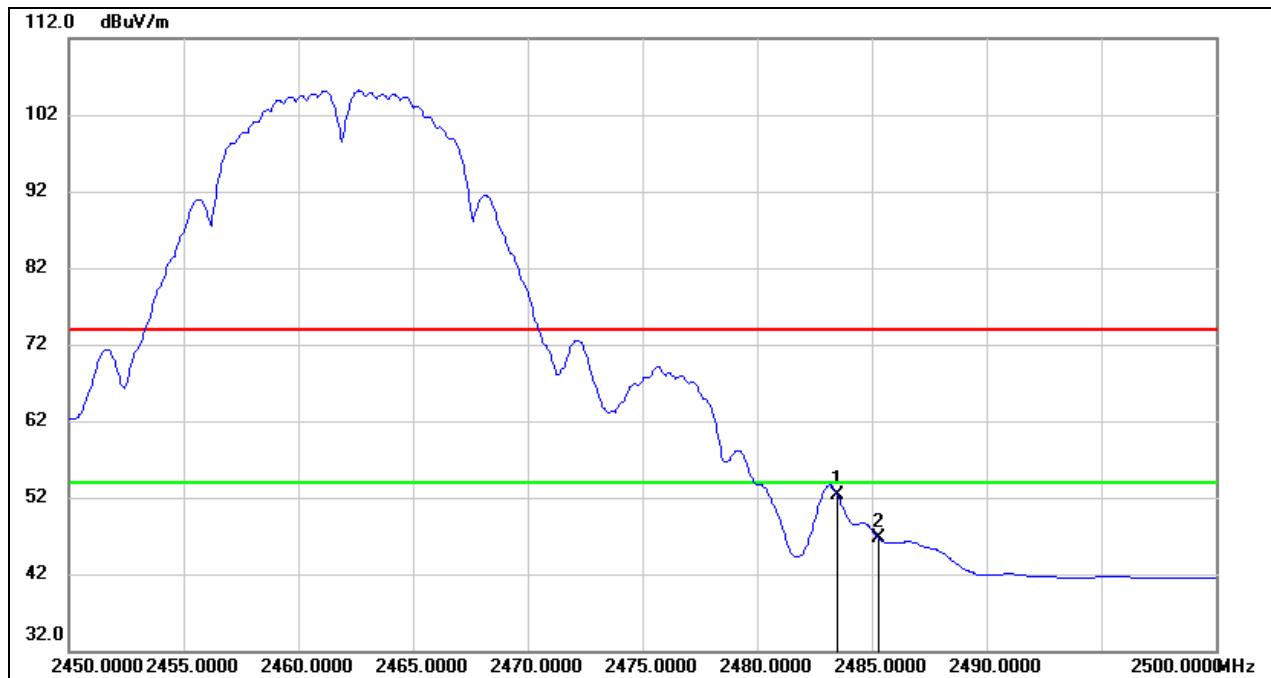

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 18.79 | 33.58 | 52.37 | 54.00 | -1.63 | AVG |
| 2 | 2485.300 | 13.06 | 33.59 | 46.65 | 54.00 | -7.35 | AVG |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

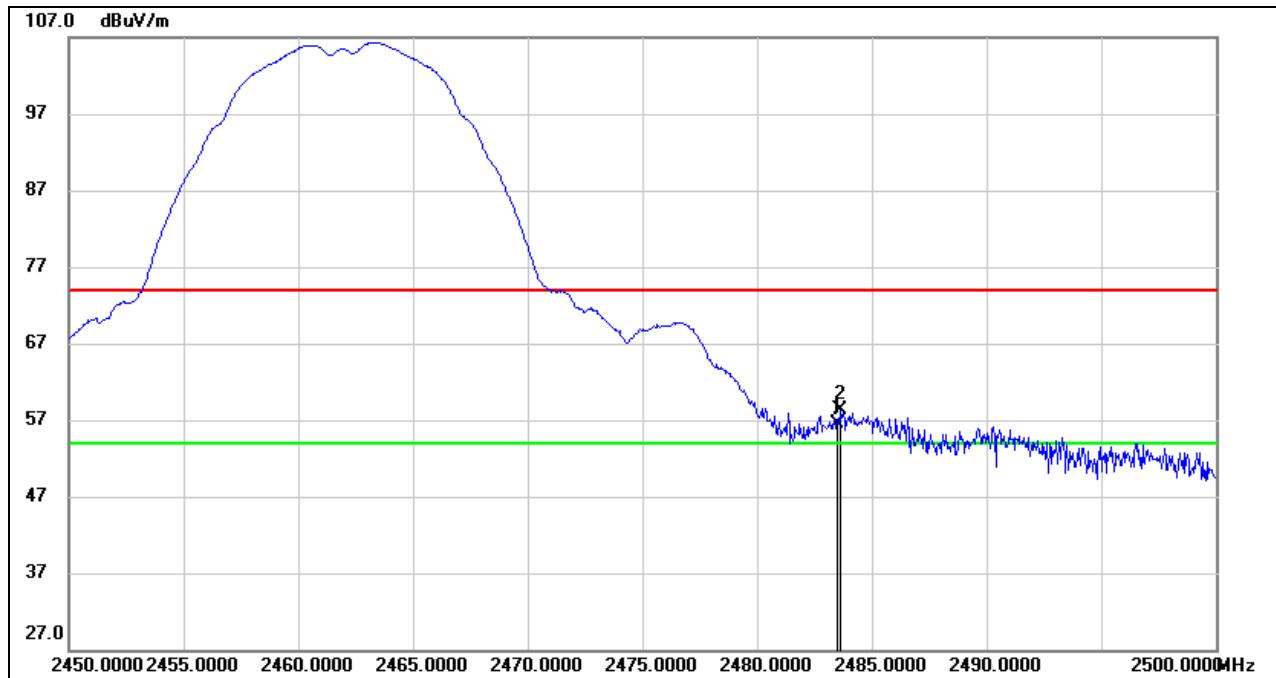RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)PEAK

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 23.01 | 33.58 | 56.59 | 74.00 | -17.41 | peak |
| 2 | 2483.600 | 24.68 | 33.58 | 58.26 | 74.00 | -15.74 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

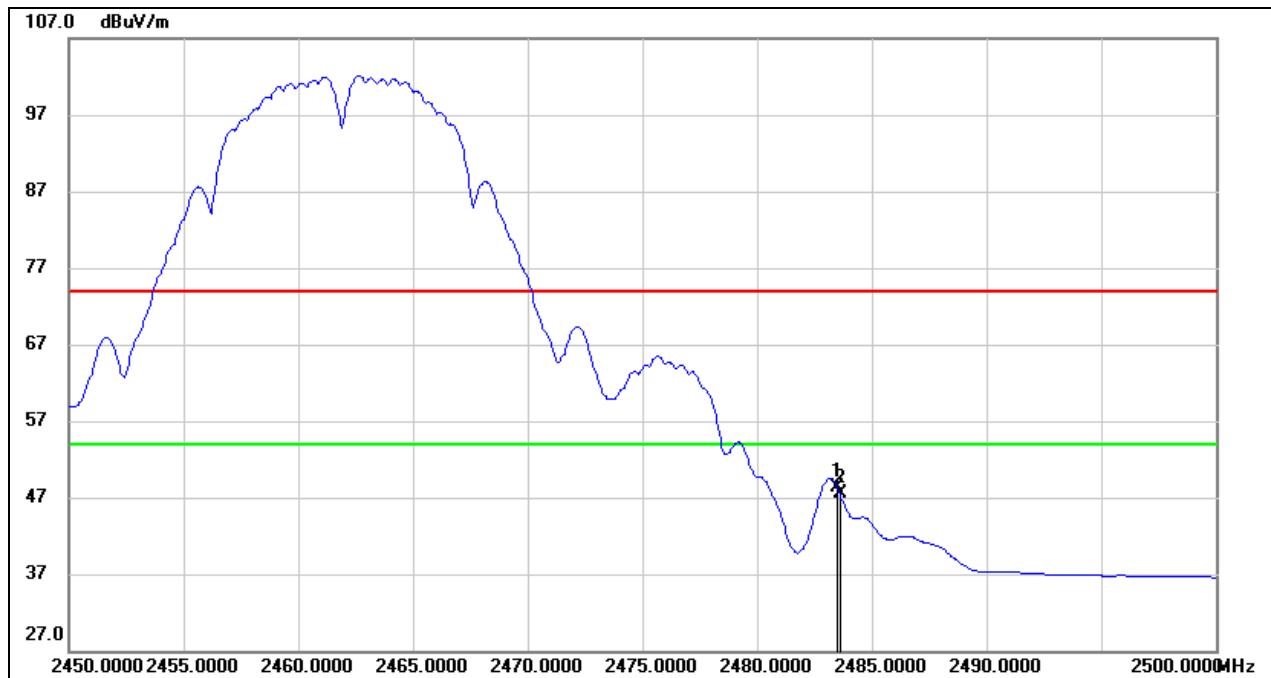

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 2483.500 | 14.66 | 33.58 | 48.24 | 54.00 | -5.76 | AVG |
| 2 | 2483.600 | 13.98 | 33.58 | 47.56 | 54.00 | -6.44 | AVG |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.1.2. 802.11g MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

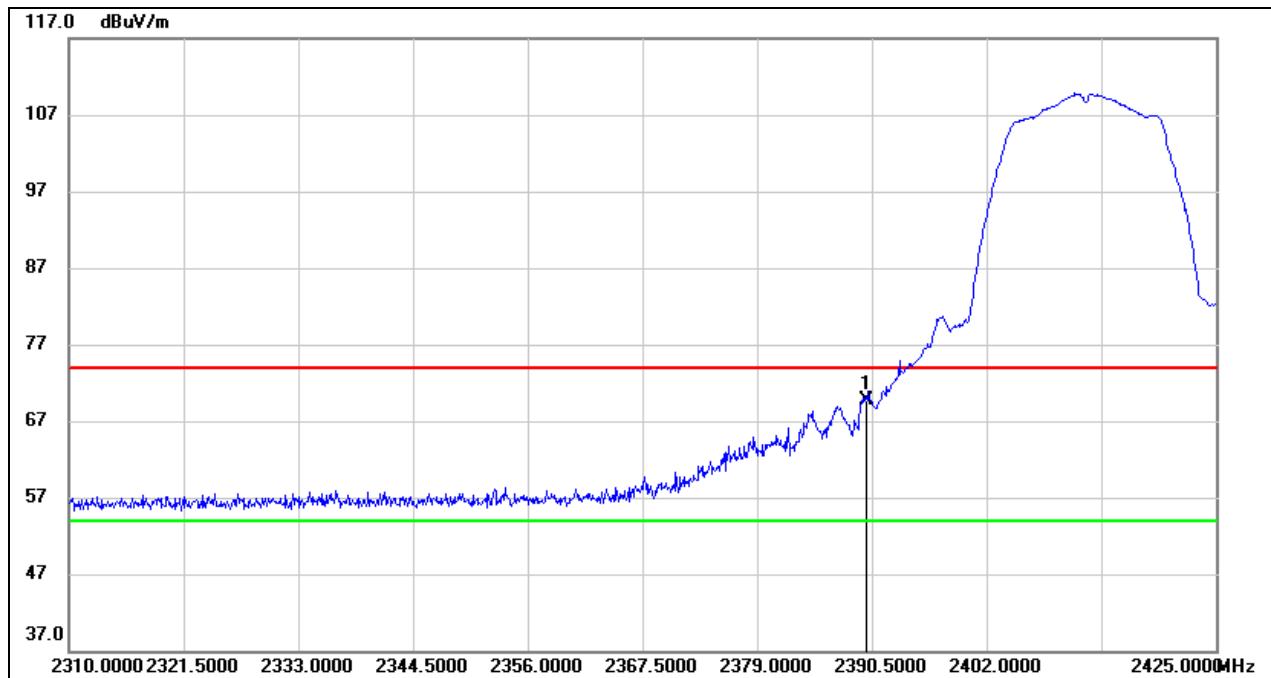

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2390.000 | 36.70 | 32.94 | 69.64 | 74.00 | -4.36 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

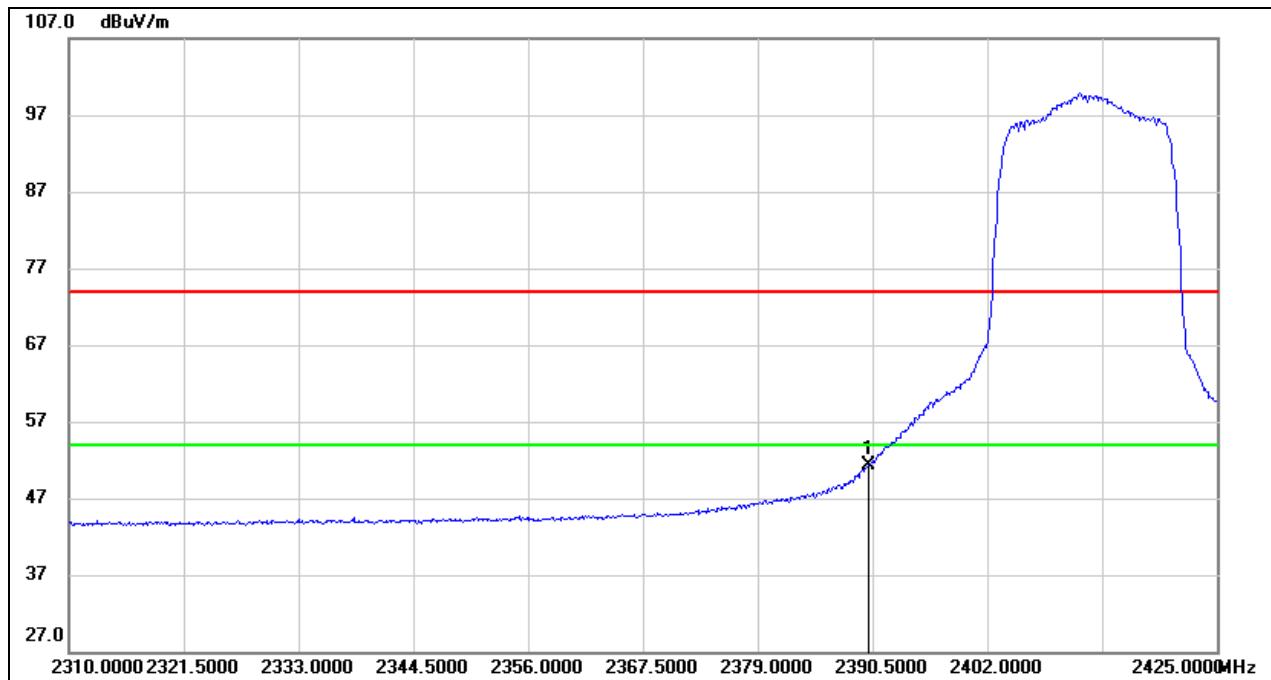

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2390.000 | 18.38 | 32.94 | 51.32 | 54.00 | -2.68 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

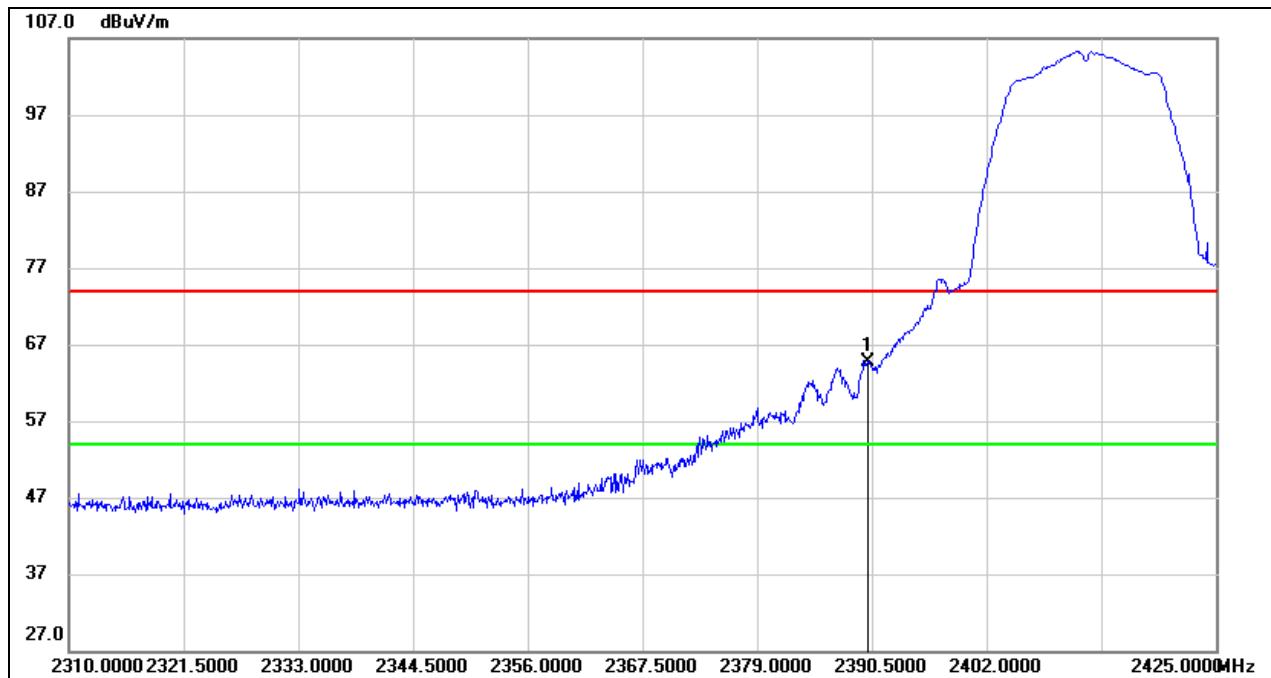
RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**PEAK**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2390.000 | 31.72 | 32.94 | 64.66 | 74.00 | -9.34 | peak |

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

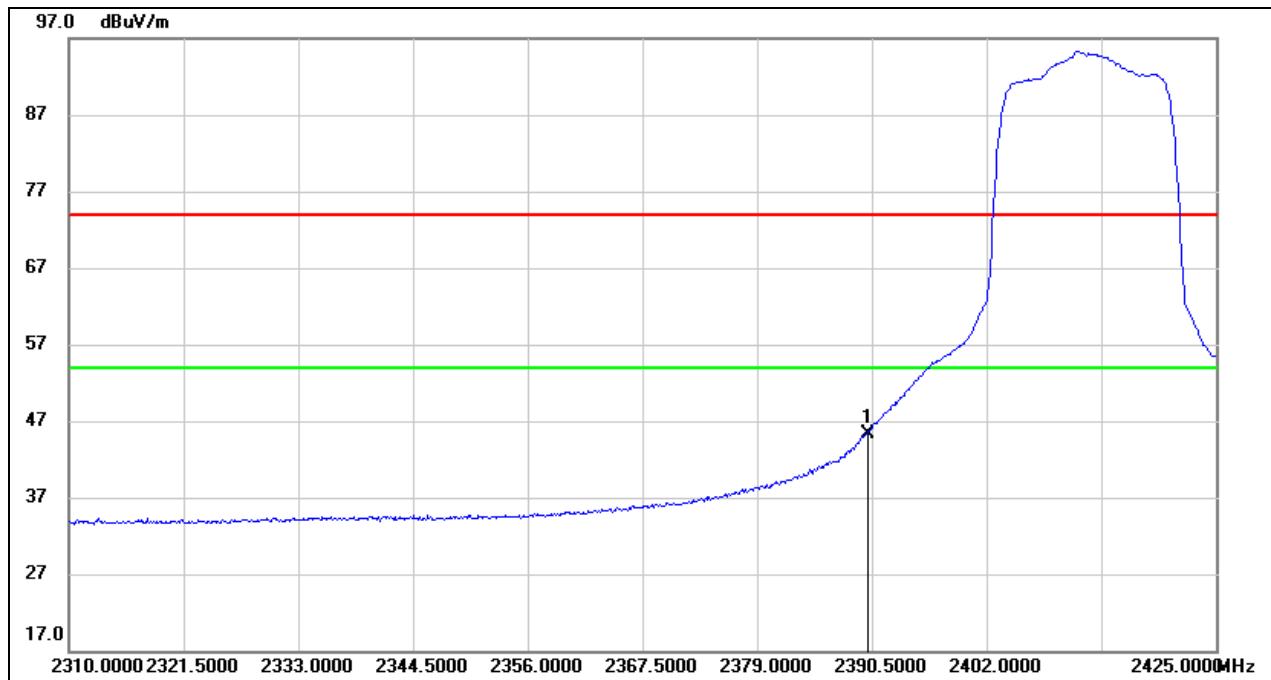

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2390.000 | 12.39 | 32.94 | 45.33 | 54.00 | -8.67 | AVG |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

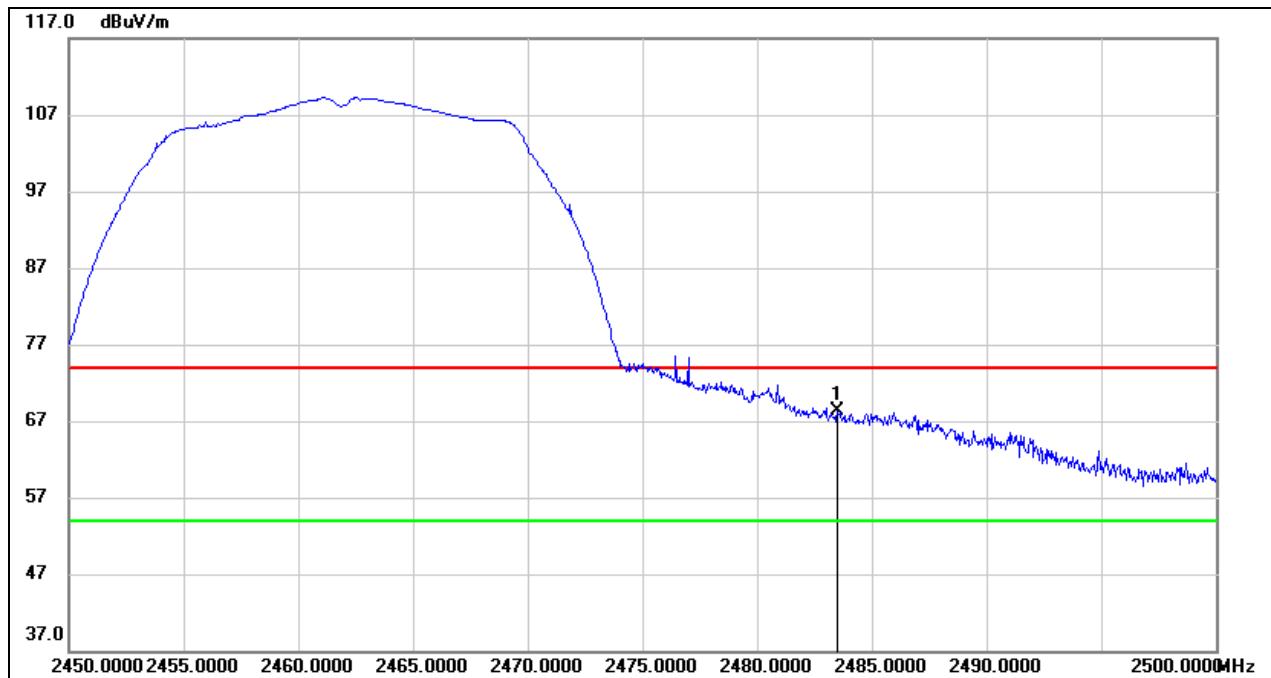RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**PEAK**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 34.65 | 33.58 | 68.23 | 74.00 | -5.77 | peak |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

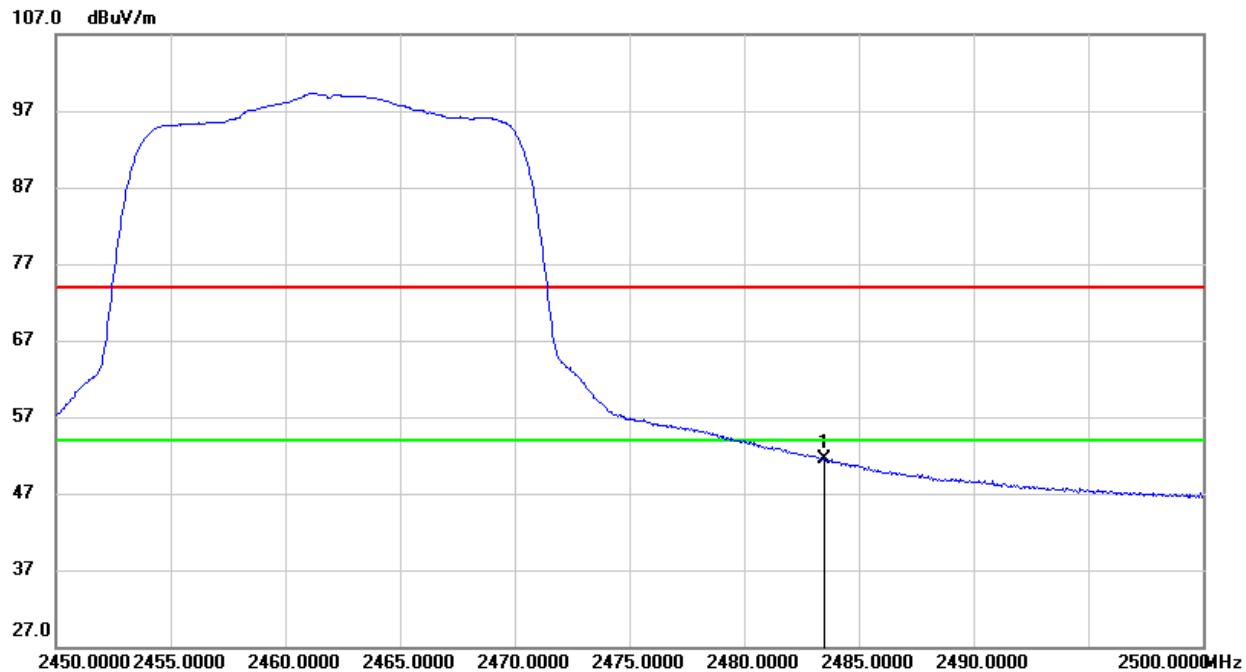AVG


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 18.02 | 33.58 | 51.60 | 54.00 | -2.40 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

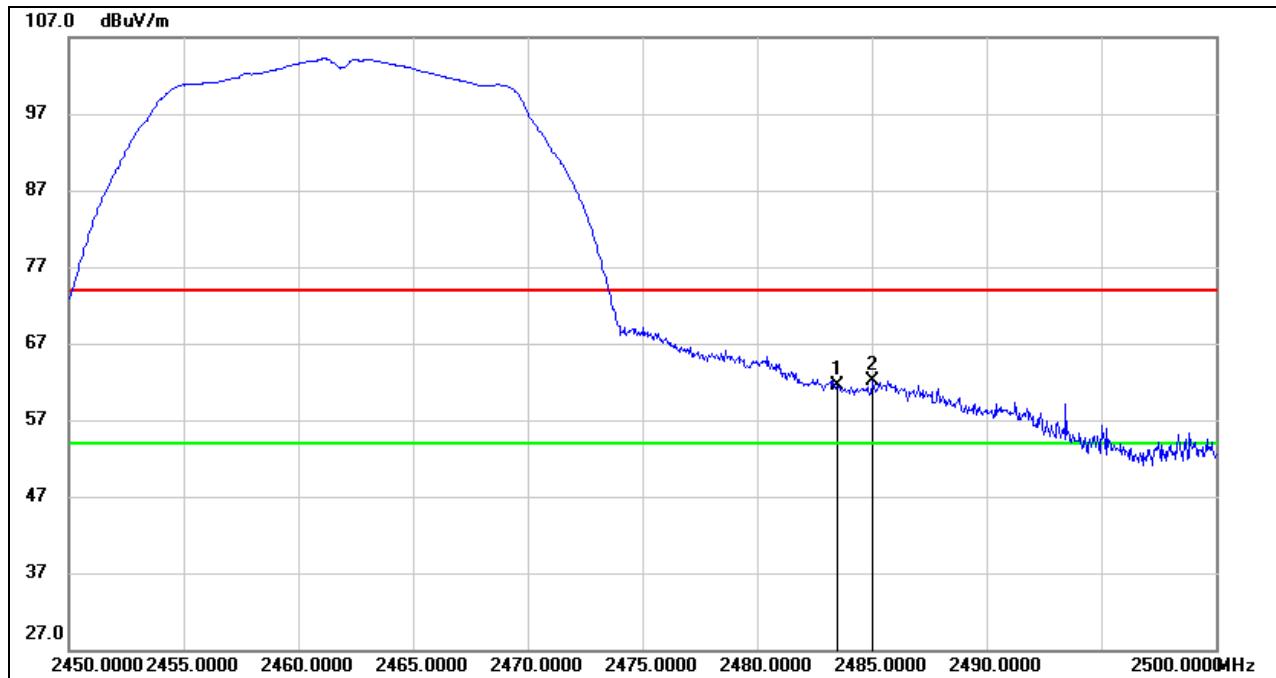RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**PEAK**

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 27.90 | 33.58 | 61.48 | 74.00 | -12.52 | peak |
| 2 | 2485.050 | 28.47 | 33.59 | 62.06 | 74.00 | -11.94 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

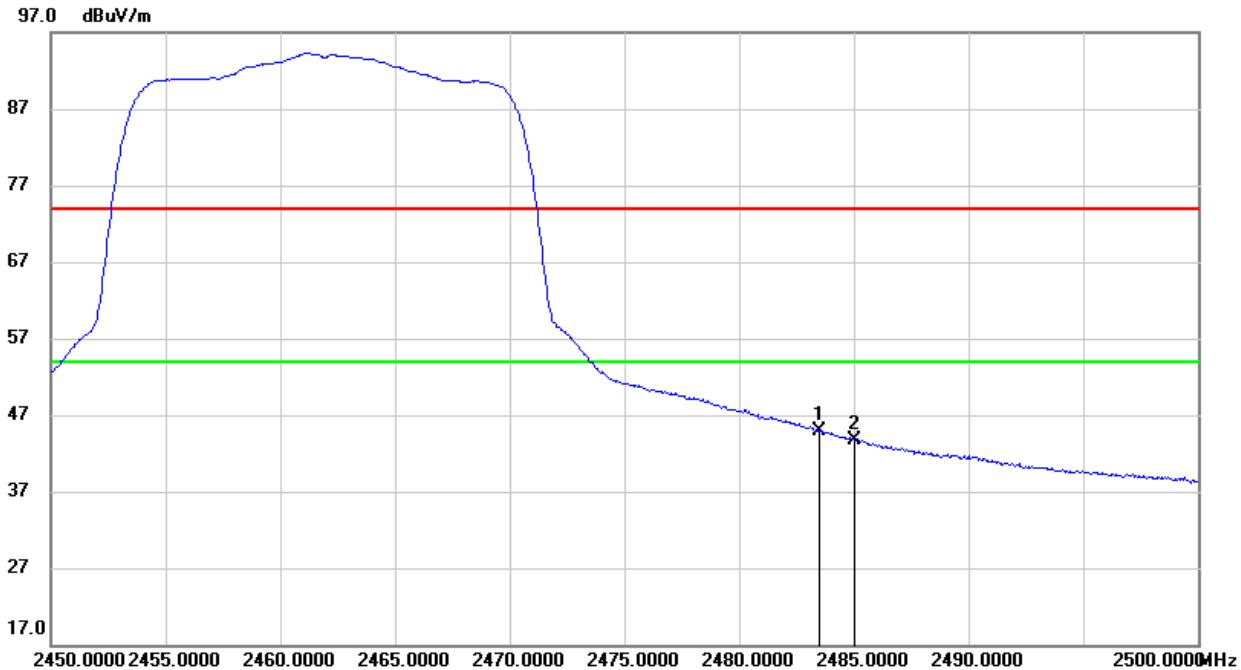AVG

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 2483.500 | 11.26 | 33.58 | 44.84 | 54.00 | -9.16 | AVG |
| 2 | 2485.050 | 10.19 | 33.59 | 43.78 | 54.00 | -10.22 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


8.1.3. 802.11n HT20 MODE

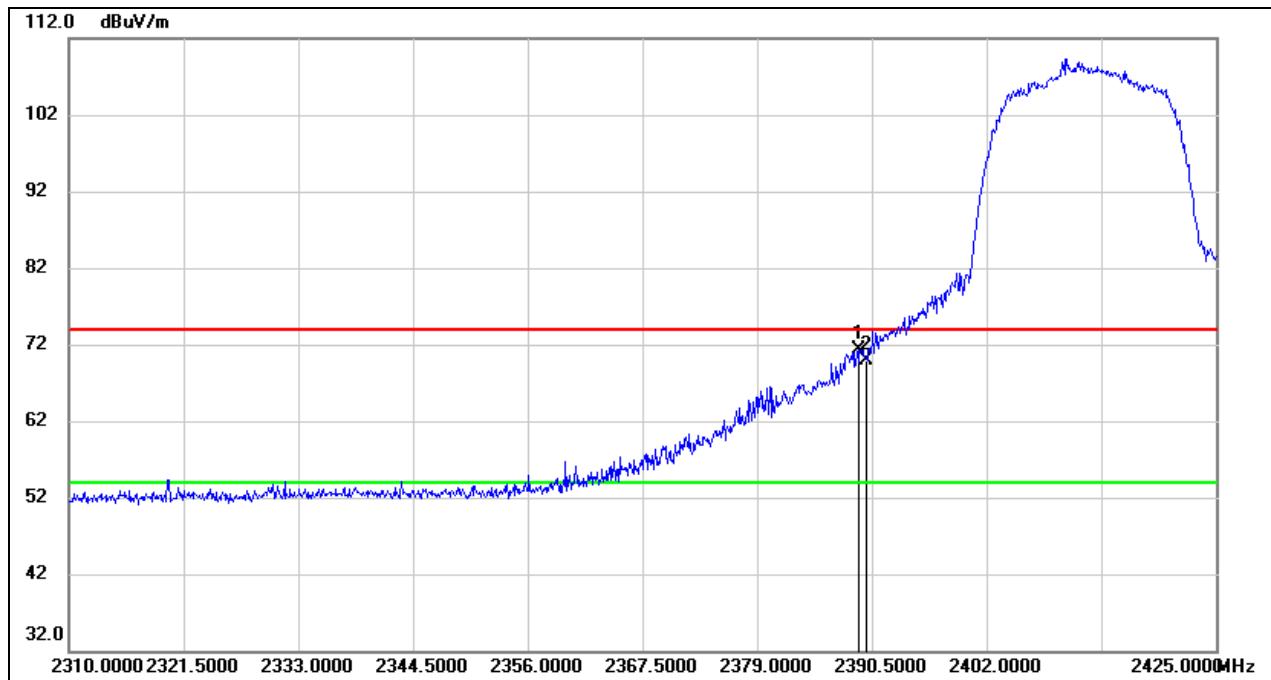RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)PEAK

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2389.235 | 38.41 | 32.94 | 71.35 | 74.00 | -2.65 | peak |
| 2 | 2390.000 | 37.04 | 32.94 | 69.98 | 74.00 | -4.02 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


AVG

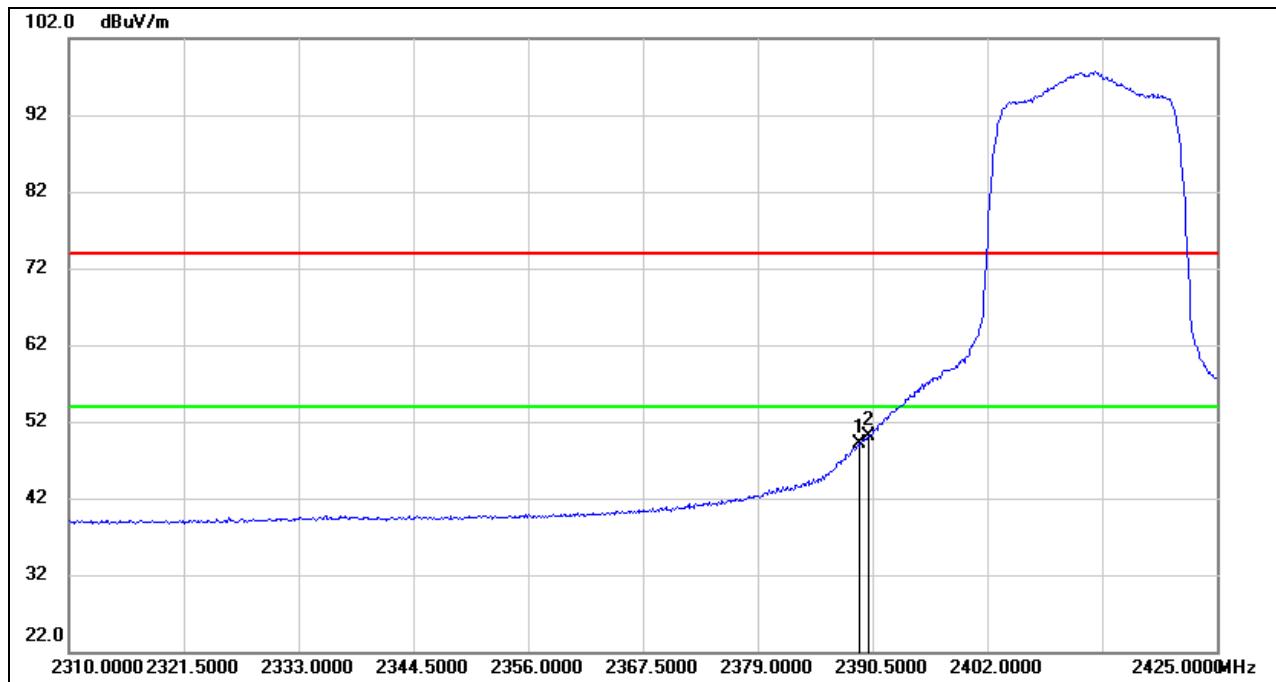

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 2389.235 | 16.13 | 32.94 | 49.07 | 54.00 | -4.93 | AVG |
| 2 | 2390.000 | 17.19 | 32.94 | 50.13 | 54.00 | -3.87 | AVG |

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

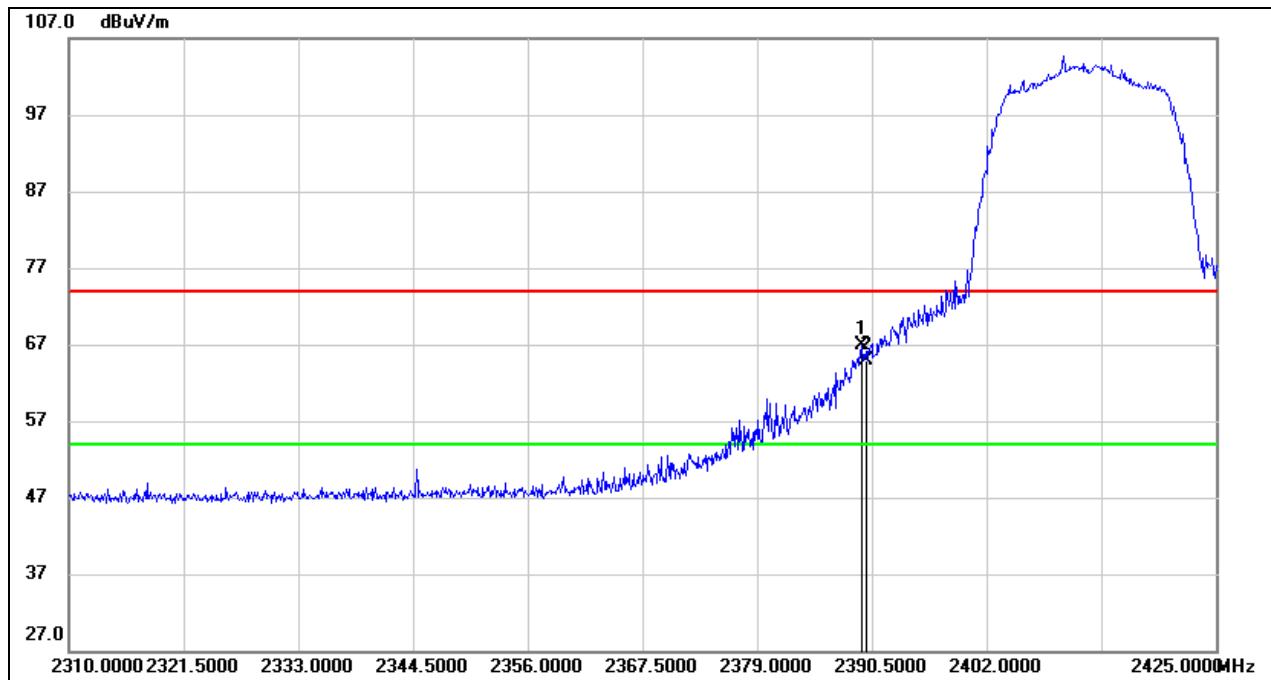RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)PEAK

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2389.465 | 34.06 | 32.94 | 67.00 | 74.00 | -7.00 | peak |
| 2 | 2390.000 | 31.87 | 32.94 | 64.81 | 74.00 | -9.19 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


AVG

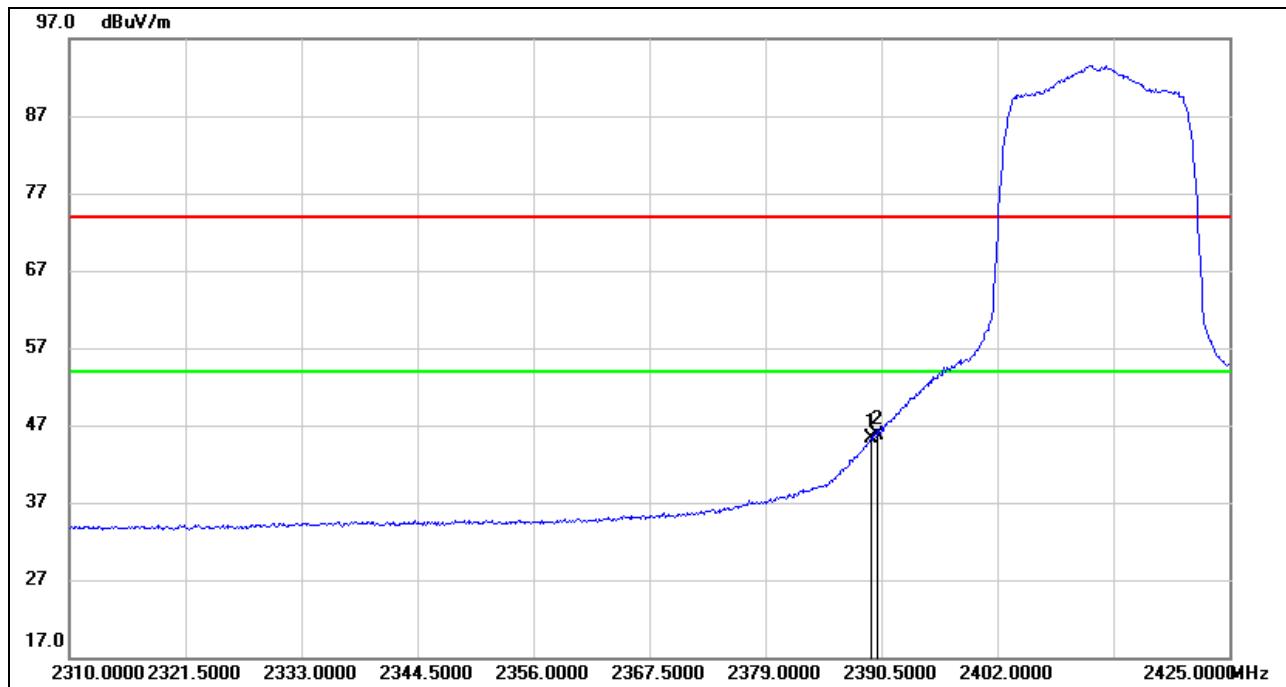

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 2389.465 | 12.30 | 32.94 | 45.24 | 54.00 | -8.76 | AVG |
| 2 | 2390.000 | 12.80 | 32.94 | 45.74 | 54.00 | -8.26 | AVG |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

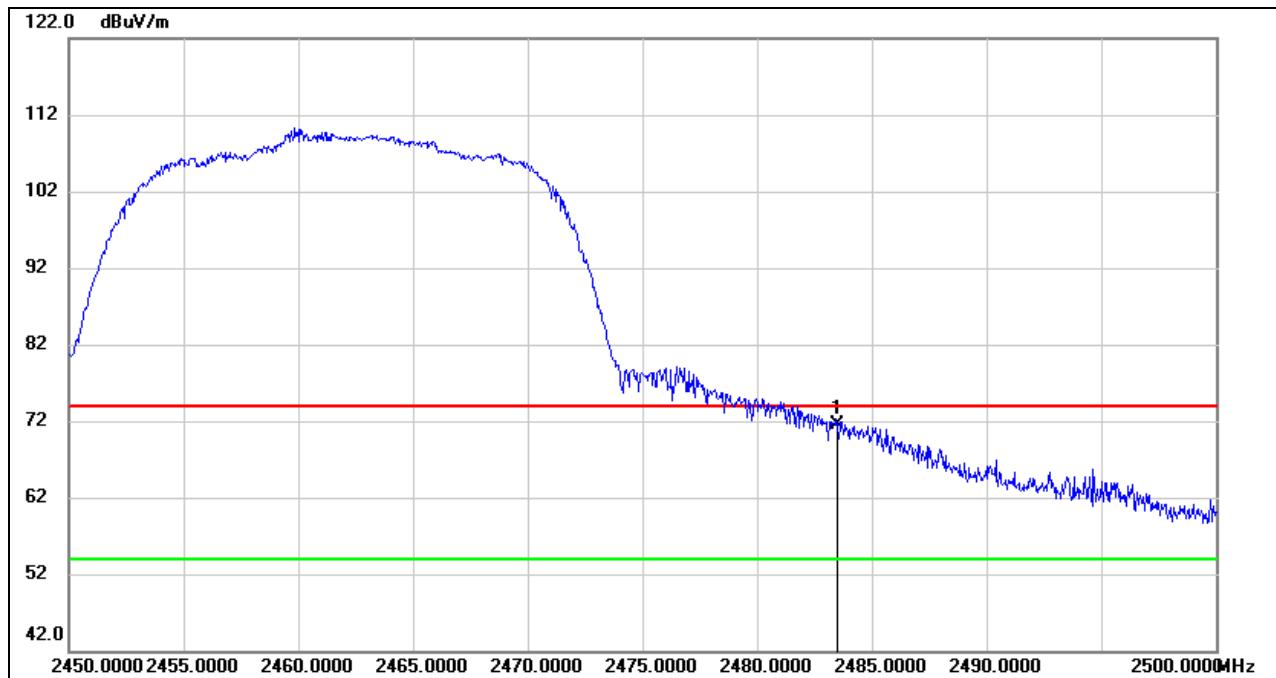RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)PEAK


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 37.93 | 33.58 | 71.51 | 74.00 | -2.49 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

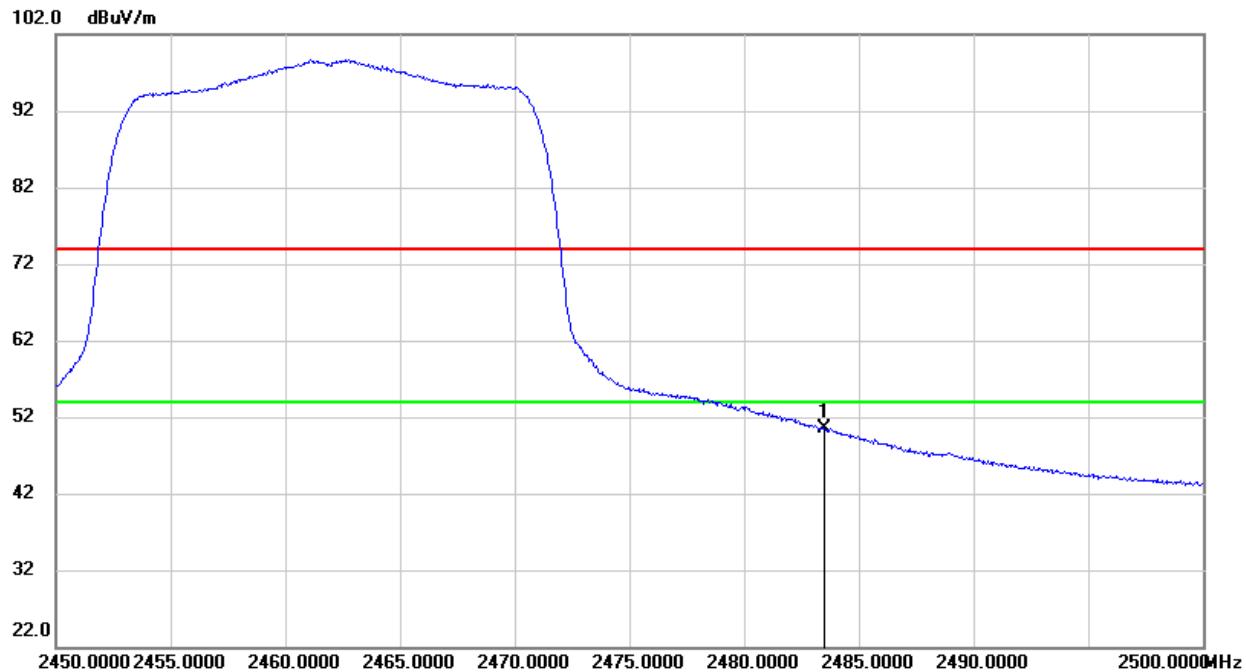AVG


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 16.86 | 33.58 | 50.44 | 54.00 | -3.56 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

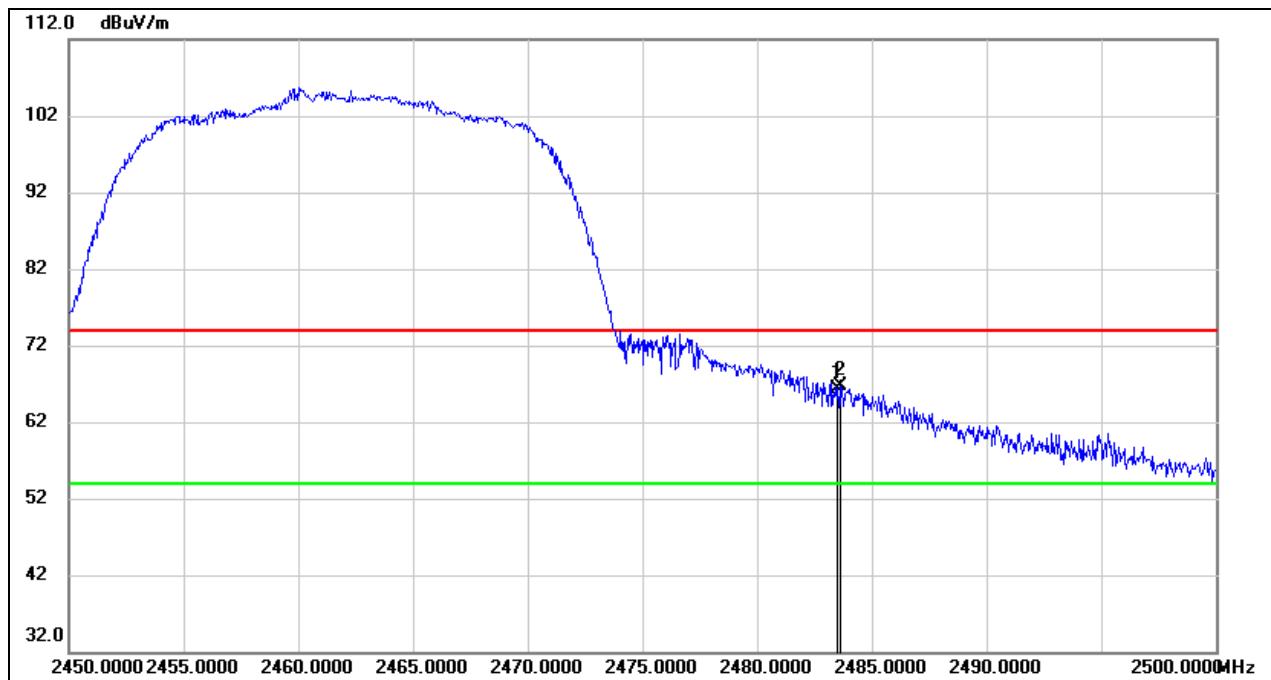RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)PEAK

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2483.500 | 32.70 | 33.58 | 66.28 | 74.00 | -7.72 | peak |
| 2 | 2483.600 | 33.03 | 33.58 | 66.61 | 74.00 | -7.39 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

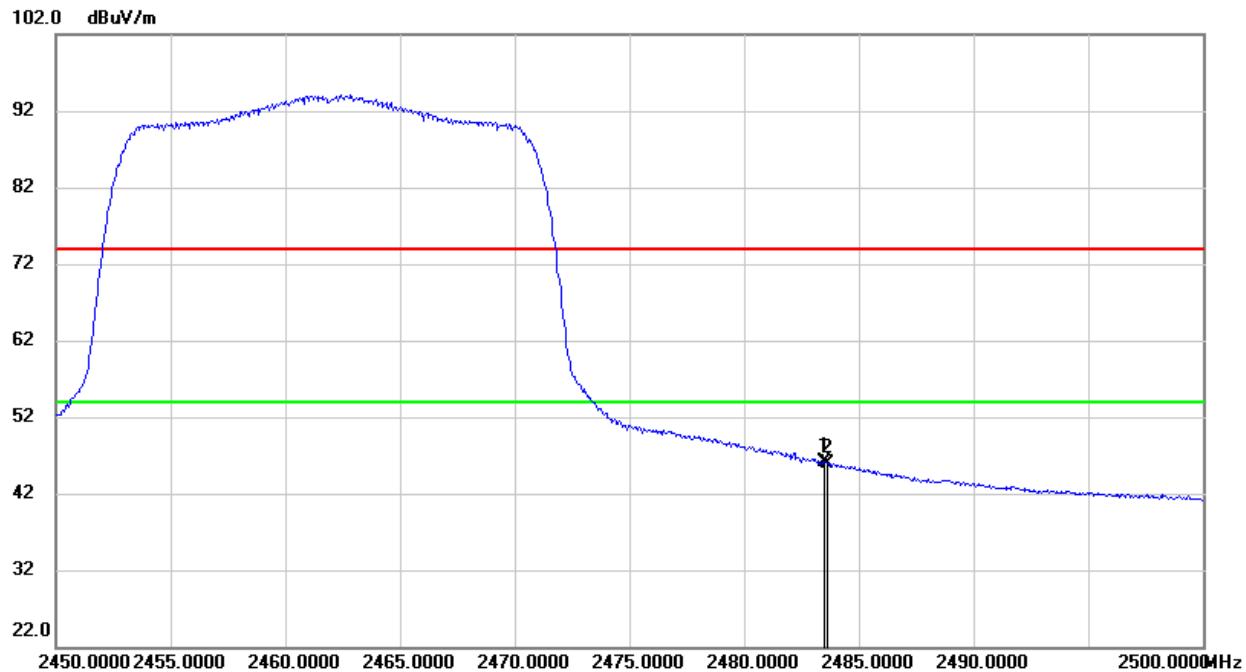AVG


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 2483.500 | 12.46 | 33.58 | 46.04 | 54.00 | -7.96 | AVG |
| 2 | 2483.600 | 12.33 | 33.58 | 45.91 | 54.00 | -8.09 | AVG |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.2. SPURIOUS EMISSIONS (3~18GHz)

8.2.1. 802.11b MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

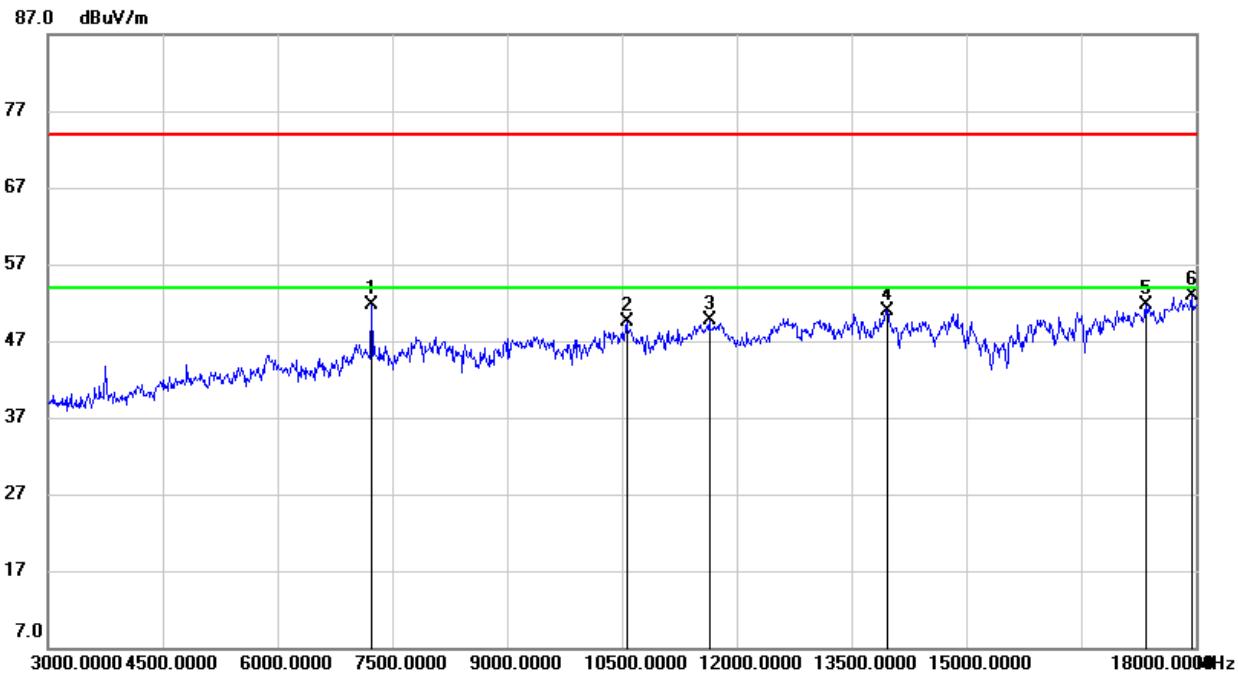

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7230.000 | 45.89 | 5.89 | 51.78 | 74.00 | -22.22 | peak |
| 2 | 10560.000 | 37.80 | 11.73 | 49.53 | 74.00 | -24.47 | peak |
| 3 | 11640.000 | 36.54 | 13.09 | 49.63 | 74.00 | -24.37 | peak |
| 4 | 13965.000 | 34.86 | 16.09 | 50.95 | 74.00 | -23.05 | peak |
| 5 | 17340.000 | 30.16 | 21.61 | 51.77 | 74.00 | -22.23 | peak |
| 6 | 17940.000 | 29.60 | 23.39 | 52.99 | 74.00 | -21.01 | peak |

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

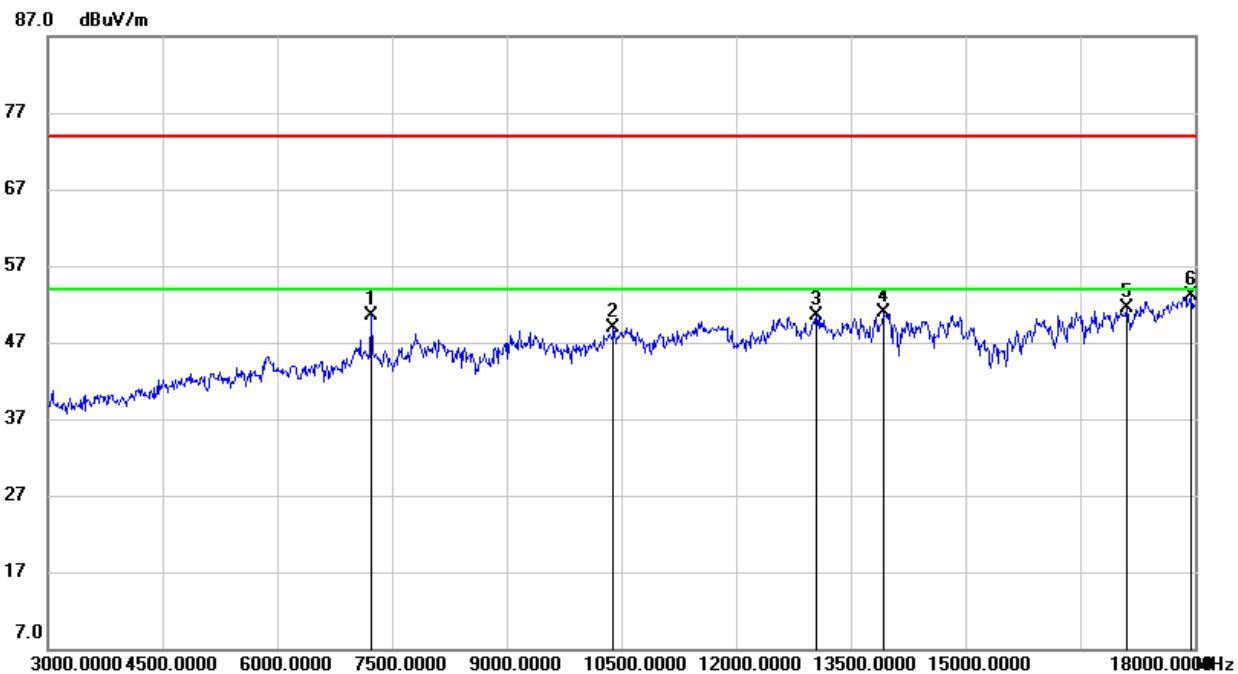HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7230.000 | 44.55 | 5.89 | 50.44 | 74.00 | -23.56 | peak |
| 2 | 10395.000 | 37.96 | 10.98 | 48.94 | 74.00 | -25.06 | peak |
| 3 | 13050.000 | 35.42 | 15.07 | 50.49 | 74.00 | -23.51 | peak |
| 4 | 13920.000 | 34.78 | 16.17 | 50.95 | 74.00 | -23.05 | peak |
| 5 | 17100.000 | 30.81 | 20.64 | 51.45 | 74.00 | -22.55 | peak |
| 6 | 17955.000 | 29.66 | 23.41 | 53.07 | 74.00 | -20.93 | peak |

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

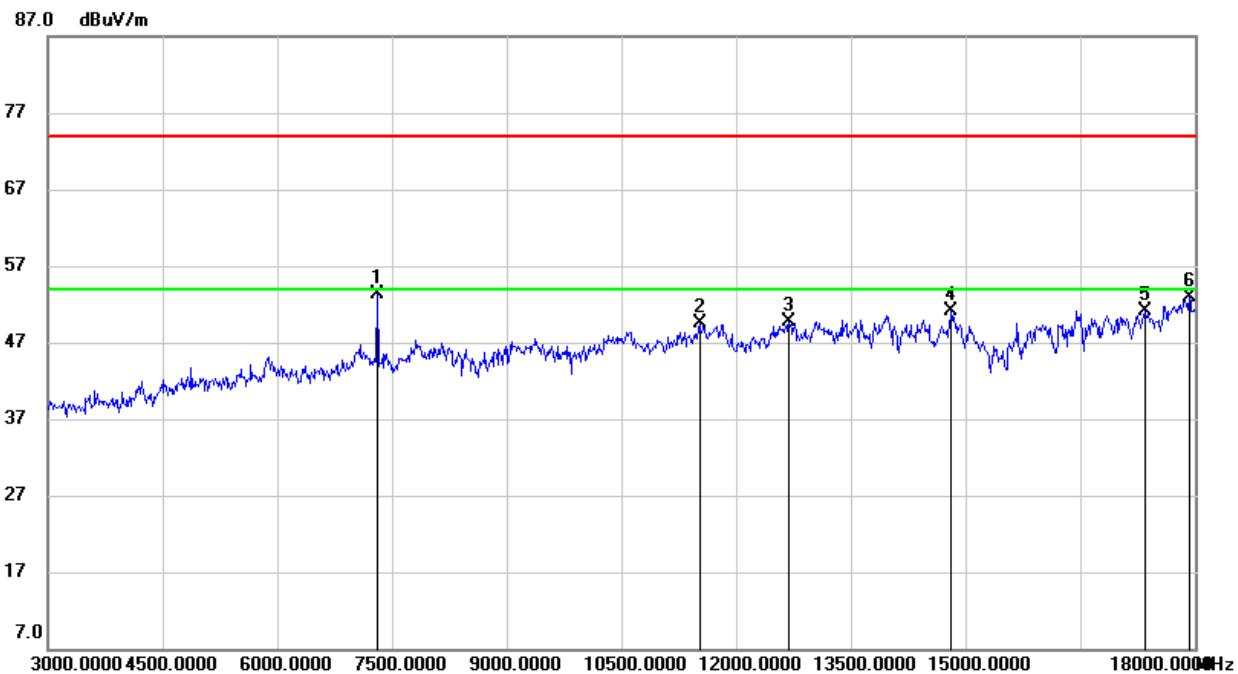HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7305.000 | 47.18 | 6.08 | 53.26 | 74.00 | -20.74 | peak |
| 2 | 11520.000 | 36.21 | 13.38 | 49.59 | 74.00 | -24.41 | peak |
| 3 | 12690.000 | 35.53 | 14.25 | 49.78 | 74.00 | -24.22 | peak |
| 4 | 14805.000 | 35.23 | 15.92 | 51.15 | 74.00 | -22.85 | peak |
| 5 | 17340.000 | 29.52 | 21.61 | 51.13 | 74.00 | -22.87 | peak |
| 6 | 17925.000 | 29.63 | 23.37 | 53.00 | 74.00 | -21.00 | peak |

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

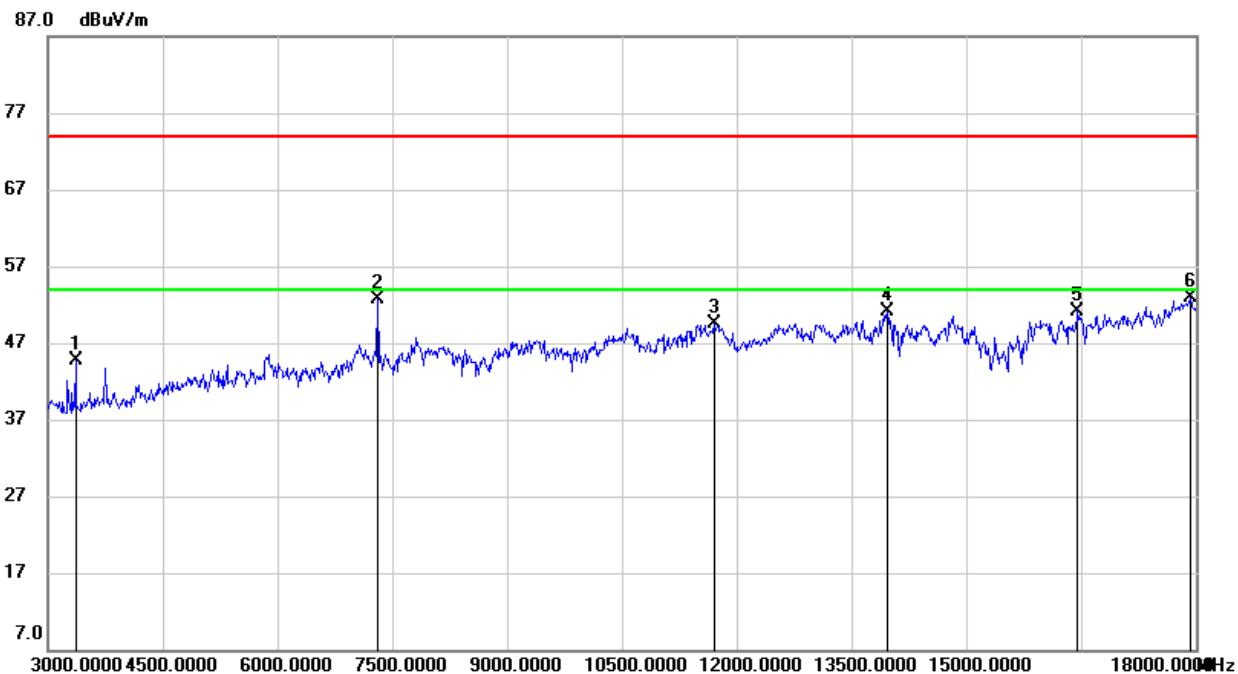HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 3360.000 | 48.98 | -4.33 | 44.65 | 74.00 | -29.35 | peak |
| 2 | 7305.000 | 46.66 | 6.08 | 52.74 | 74.00 | -21.26 | peak |
| 3 | 11700.000 | 36.65 | 12.95 | 49.60 | 74.00 | -24.40 | peak |
| 4 | 13965.000 | 35.02 | 16.09 | 51.11 | 74.00 | -22.89 | peak |
| 5 | 16455.000 | 32.20 | 19.00 | 51.20 | 74.00 | -22.80 | peak |
| 6 | 17925.000 | 29.47 | 23.37 | 52.84 | 74.00 | -21.16 | peak |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

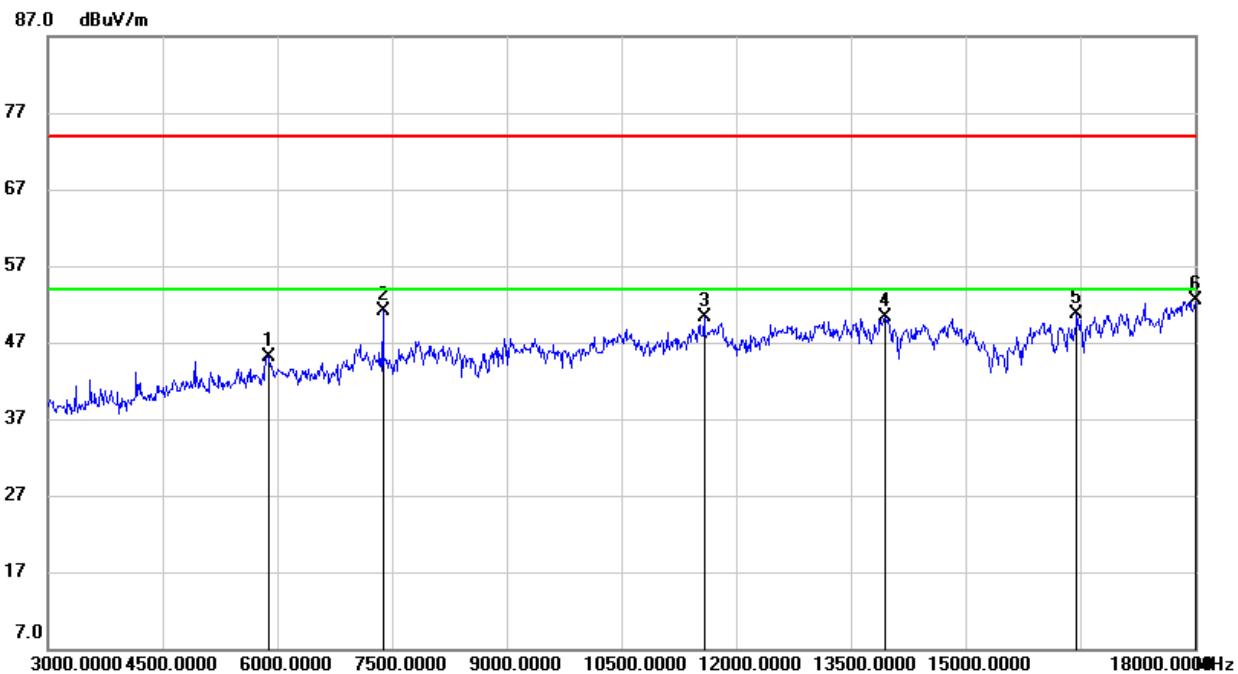HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 5895.000 | 40.21 | 4.86 | 45.07 | 74.00 | -28.93 | peak |
| 2 | 7380.000 | 44.72 | 6.41 | 51.13 | 74.00 | -22.87 | peak |
| 3 | 11580.000 | 36.99 | 13.23 | 50.22 | 74.00 | -23.78 | peak |
| 4 | 13950.000 | 34.12 | 16.11 | 50.23 | 74.00 | -23.77 | peak |
| 5 | 16455.000 | 31.79 | 19.00 | 50.79 | 74.00 | -23.21 | peak |
| 6 | 18000.000 | 29.03 | 23.46 | 52.49 | 74.00 | -21.51 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

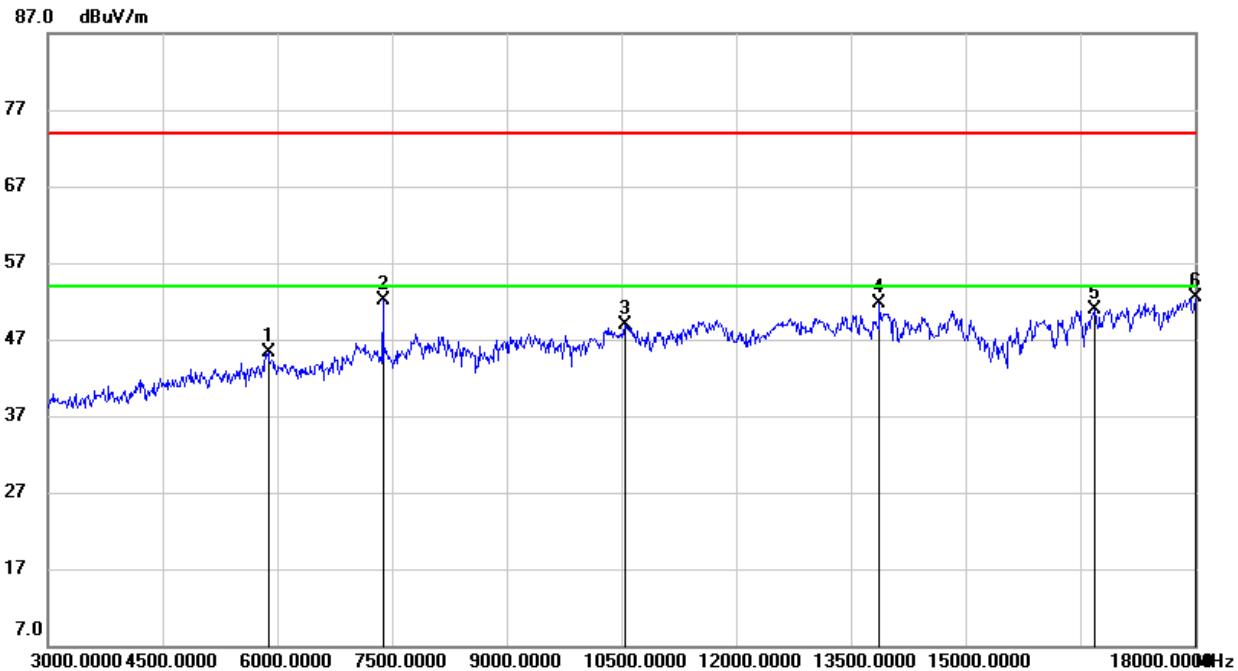HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 5880.000 | 40.78 | 4.59 | 45.37 | 74.00 | -28.63 | peak |
| 2 | 7380.000 | 45.63 | 6.41 | 52.04 | 74.00 | -21.96 | peak |
| 3 | 10545.000 | 37.28 | 11.64 | 48.92 | 74.00 | -25.08 | peak |
| 4 | 13875.000 | 35.20 | 16.44 | 51.64 | 74.00 | -22.36 | peak |
| 5 | 16680.000 | 30.99 | 19.84 | 50.83 | 74.00 | -23.17 | peak |
| 6 | 18000.000 | 28.99 | 23.46 | 52.45 | 74.00 | -21.55 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


8.2.2. 802.11g MODE

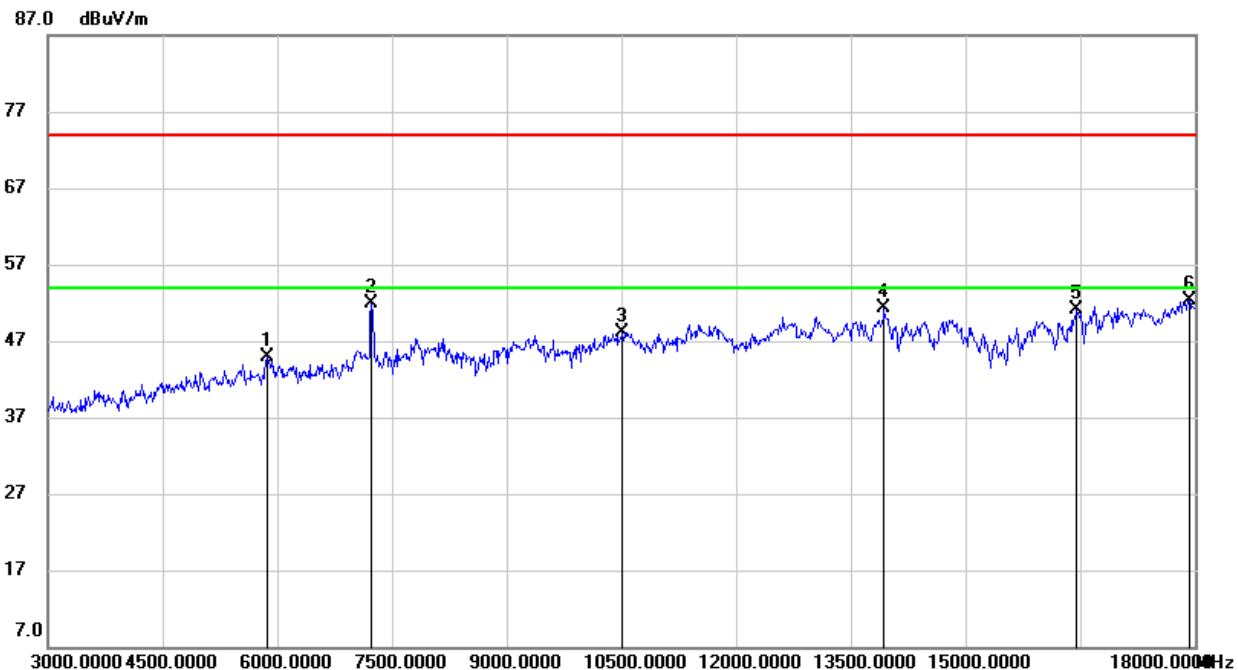HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 5865.000 | 40.67 | 4.30 | 44.97 | 74.00 | -29.03 | peak |
| 2 | 7230.000 | 45.95 | 5.89 | 51.84 | 74.00 | -22.16 | peak |
| 3 | 10515.000 | 36.73 | 11.47 | 48.20 | 74.00 | -25.80 | peak |
| 4 | 13935.000 | 35.14 | 16.15 | 51.29 | 74.00 | -22.71 | peak |
| 5 | 16455.000 | 32.01 | 19.00 | 51.01 | 74.00 | -22.99 | peak |
| 6 | 17925.000 | 28.93 | 23.37 | 52.30 | 74.00 | -21.70 | peak |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

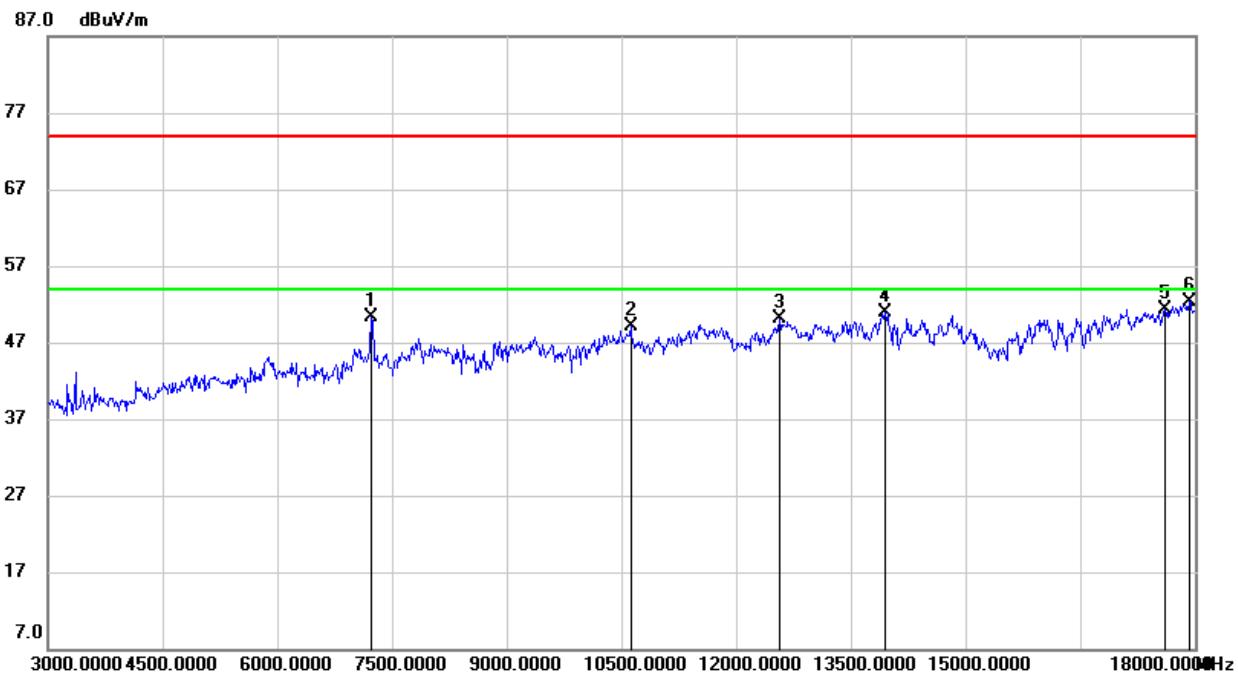HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7230.000 | 44.37 | 5.89 | 50.26 | 74.00 | -23.74 | peak |
| 2 | 10620.000 | 37.28 | 11.88 | 49.16 | 74.00 | -24.84 | peak |
| 3 | 12570.000 | 35.96 | 14.17 | 50.13 | 74.00 | -23.87 | peak |
| 4 | 13950.000 | 34.84 | 16.11 | 50.95 | 74.00 | -23.05 | peak |
| 5 | 17610.000 | 29.54 | 21.86 | 51.40 | 74.00 | -22.60 | peak |
| 6 | 17925.000 | 28.96 | 23.37 | 52.33 | 74.00 | -21.67 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

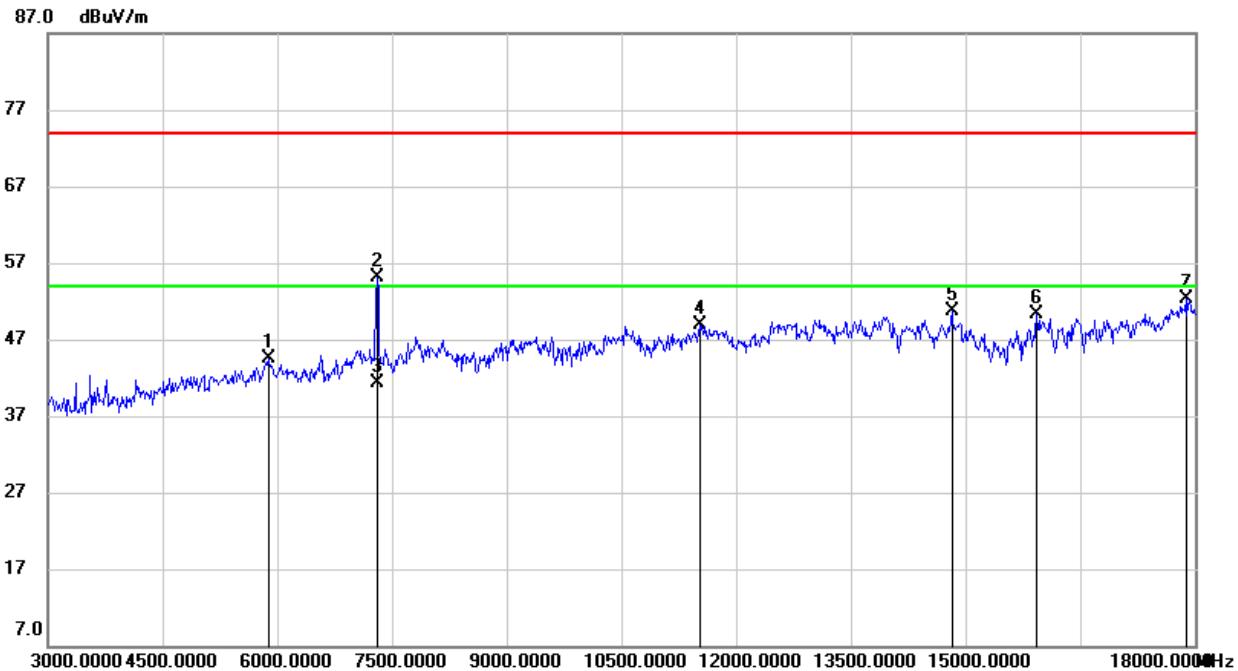HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 5880.000 | 39.99 | 4.59 | 44.58 | 74.00 | -29.42 | peak |
| 2 | 7311.000 | 48.98 | 6.11 | 55.09 | 74.00 | -18.91 | peak |
| 3 | 7311.000 | 35.22 | 6.11 | 41.33 | 54.00 | -12.67 | AVG |
| 4 | 11520.000 | 35.49 | 13.38 | 48.87 | 74.00 | -25.13 | peak |
| 5 | 14820.000 | 34.70 | 15.94 | 50.64 | 74.00 | -23.36 | peak |
| 6 | 15930.000 | 32.76 | 17.60 | 50.36 | 74.00 | -23.64 | peak |
| 7 | 17880.000 | 28.92 | 23.34 | 52.26 | 74.00 | -21.74 | peak |

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$ where: T_{on} is transmit duration.
5. For transmit duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

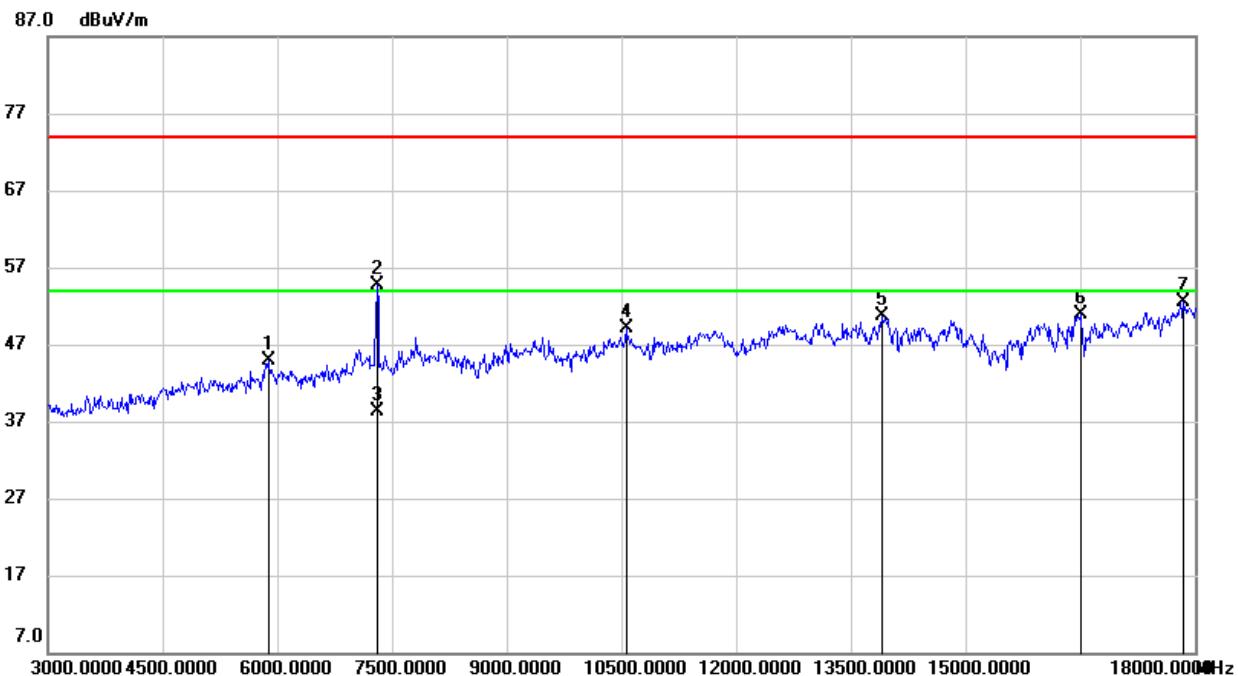HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dB _{uV}) | Correct (dB/m) | Result (dB _{uV/m}) | Limit (dB _{uV/m}) | Margin (dB) | Remark |
|-----|--------------------|--------------------------------|-------------------|---------------------------------|--------------------------------|----------------|--------|
| 1 | 5880.000 | 40.22 | 4.59 | 44.81 | 74.00 | -29.19 | peak |
| 2 | 7311.000 | 48.65 | 6.11 | 54.76 | 74.00 | -19.24 | peak |
| 3 | 7311.000 | 32.29 | 6.11 | 38.40 | 54.00 | -15.60 | AVG |
| 4 | 10560.000 | 37.41 | 11.73 | 49.14 | 74.00 | -24.86 | peak |
| 5 | 13905.000 | 34.45 | 16.20 | 50.65 | 74.00 | -23.35 | peak |
| 6 | 16500.000 | 31.65 | 19.19 | 50.84 | 74.00 | -23.16 | peak |
| 7 | 17850.000 | 29.12 | 23.32 | 52.44 | 74.00 | -21.56 | peak |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

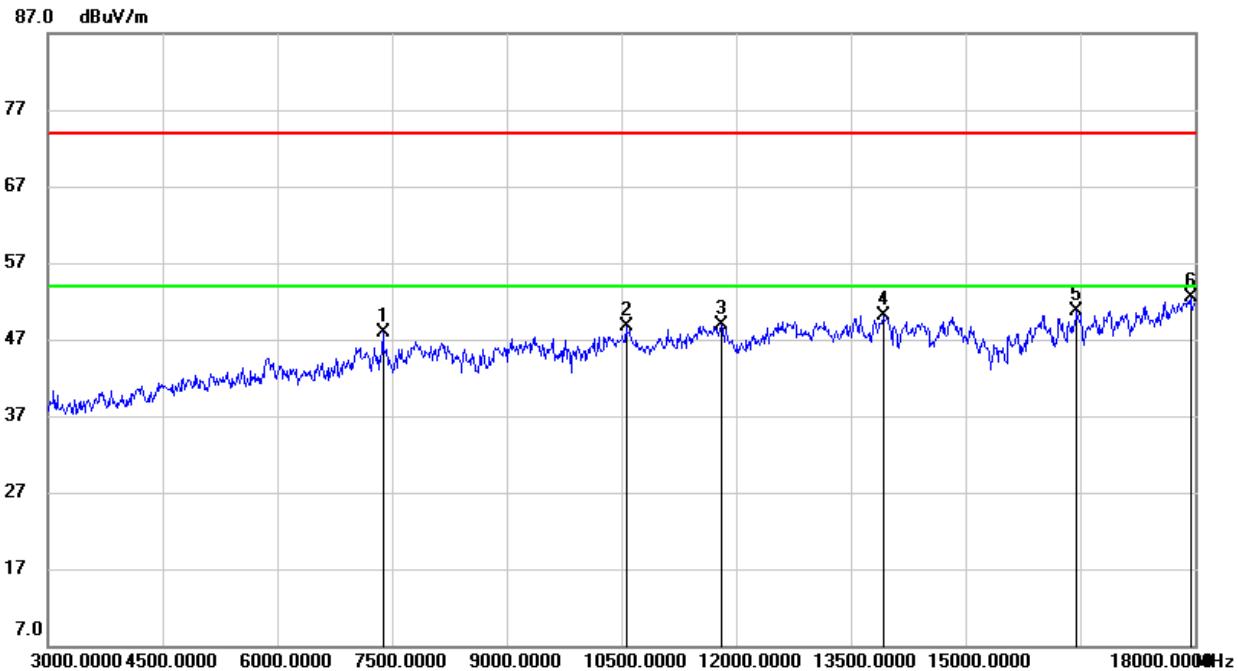HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7380.000 | 41.44 | 6.41 | 47.85 | 74.00 | -26.15 | peak |
| 2 | 10560.000 | 36.97 | 11.73 | 48.70 | 74.00 | -25.30 | peak |
| 3 | 11805.000 | 35.71 | 13.19 | 48.90 | 74.00 | -25.10 | peak |
| 4 | 13920.000 | 34.03 | 16.17 | 50.20 | 74.00 | -23.80 | peak |
| 5 | 16455.000 | 31.79 | 19.00 | 50.79 | 74.00 | -23.21 | peak |
| 6 | 17940.000 | 29.08 | 23.39 | 52.47 | 74.00 | -21.53 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

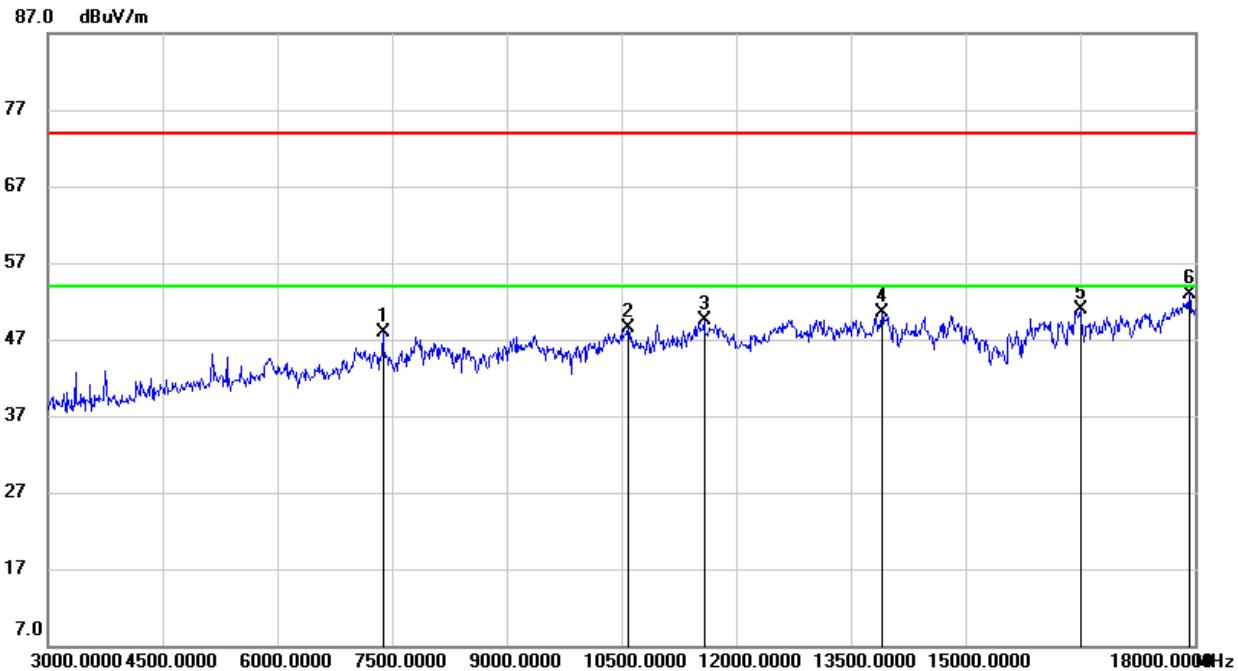HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7380.000 | 41.42 | 6.41 | 47.83 | 74.00 | -26.17 | peak |
| 2 | 10590.000 | 36.53 | 11.88 | 48.41 | 74.00 | -25.59 | peak |
| 3 | 11580.000 | 36.24 | 13.23 | 49.47 | 74.00 | -24.53 | peak |
| 4 | 13905.000 | 34.40 | 16.20 | 50.60 | 74.00 | -23.40 | peak |
| 5 | 16500.000 | 31.62 | 19.19 | 50.81 | 74.00 | -23.19 | peak |
| 6 | 17925.000 | 29.61 | 23.37 | 52.98 | 74.00 | -21.02 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


8.2.3. 802.11n HT20 MODE

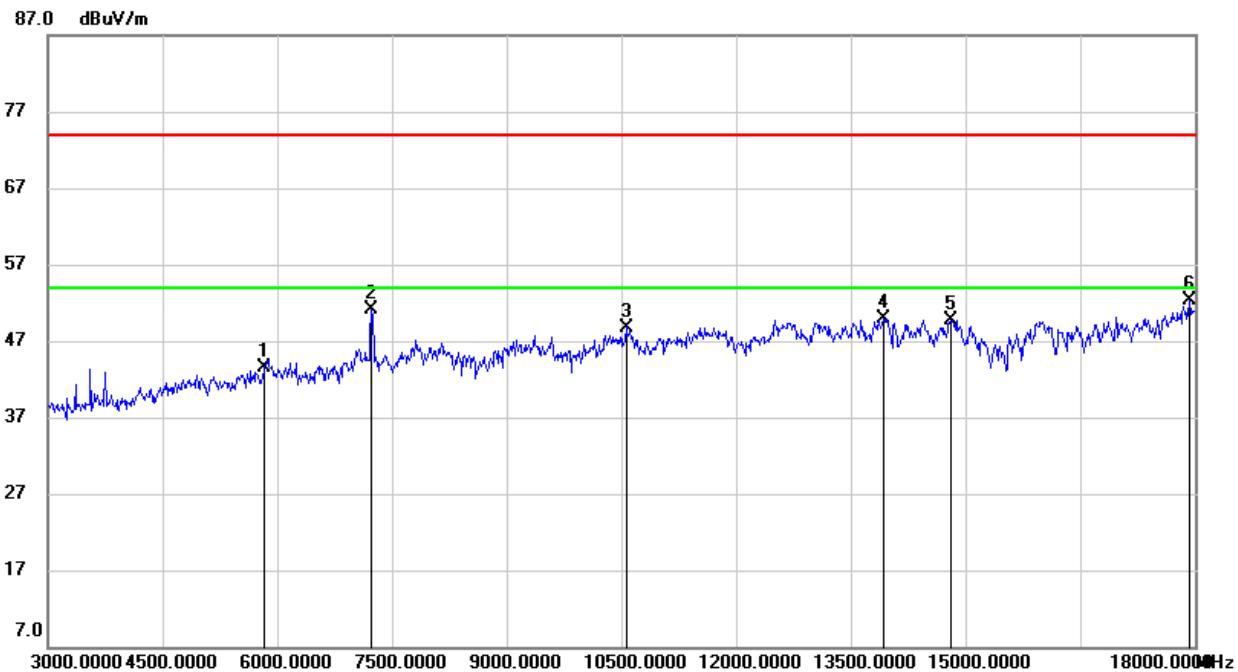HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 5835.000 | 39.74 | 3.74 | 43.48 | 74.00 | -30.52 | peak |
| 2 | 7230.000 | 45.30 | 5.89 | 51.19 | 74.00 | -22.81 | peak |
| 3 | 10560.000 | 37.07 | 11.73 | 48.80 | 74.00 | -25.20 | peak |
| 4 | 13935.000 | 33.82 | 16.15 | 49.97 | 74.00 | -24.03 | peak |
| 5 | 14805.000 | 33.84 | 15.92 | 49.76 | 74.00 | -24.24 | peak |
| 6 | 17925.000 | 28.96 | 23.37 | 52.33 | 74.00 | -21.67 | peak |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

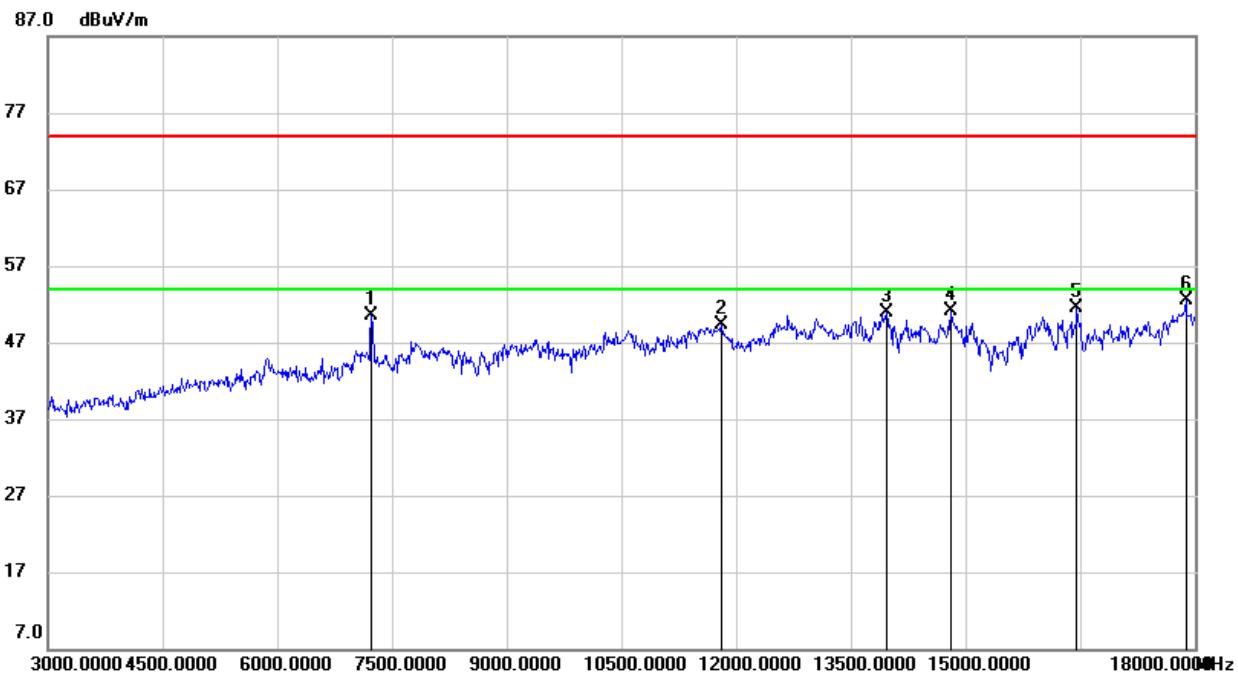HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7230.000 | 44.63 | 5.89 | 50.52 | 74.00 | -23.48 | peak |
| 2 | 11805.000 | 36.12 | 13.19 | 49.31 | 74.00 | -24.69 | peak |
| 3 | 13965.000 | 34.72 | 16.09 | 50.81 | 74.00 | -23.19 | peak |
| 4 | 14805.000 | 35.17 | 15.92 | 51.09 | 74.00 | -22.91 | peak |
| 5 | 16455.000 | 32.57 | 19.00 | 51.57 | 74.00 | -22.43 | peak |
| 6 | 17880.000 | 29.14 | 23.34 | 52.48 | 74.00 | -21.52 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

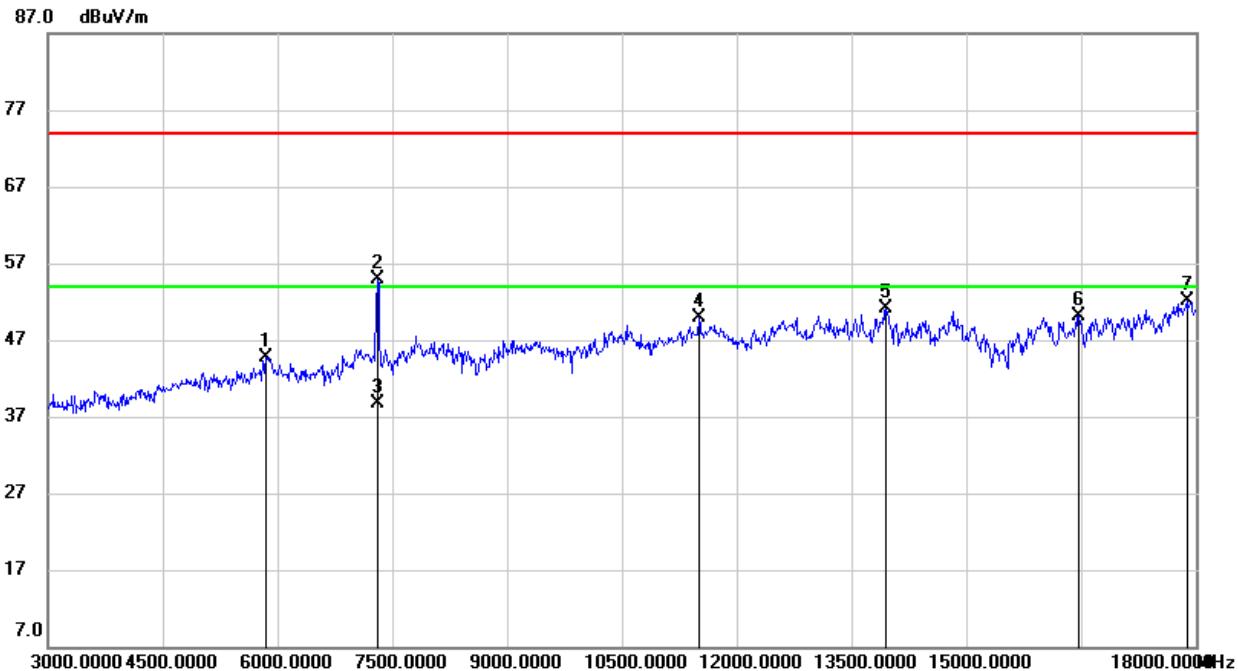HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 5850.000 | 40.78 | 4.02 | 44.80 | 74.00 | -29.20 | peak |
| 2 | 7311.000 | 48.82 | 6.11 | 54.93 | 74.00 | -19.07 | peak |
| 3 | 7311.000 | 32.57 | 6.11 | 38.68 | 54.00 | -15.32 | AVG |
| 4 | 11505.000 | 36.40 | 13.42 | 49.82 | 74.00 | -24.18 | peak |
| 5 | 13950.000 | 34.95 | 16.11 | 51.06 | 74.00 | -22.94 | peak |
| 6 | 16470.000 | 31.03 | 19.06 | 50.09 | 74.00 | -23.91 | peak |
| 7 | 17880.000 | 28.70 | 23.34 | 52.04 | 74.00 | -21.96 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

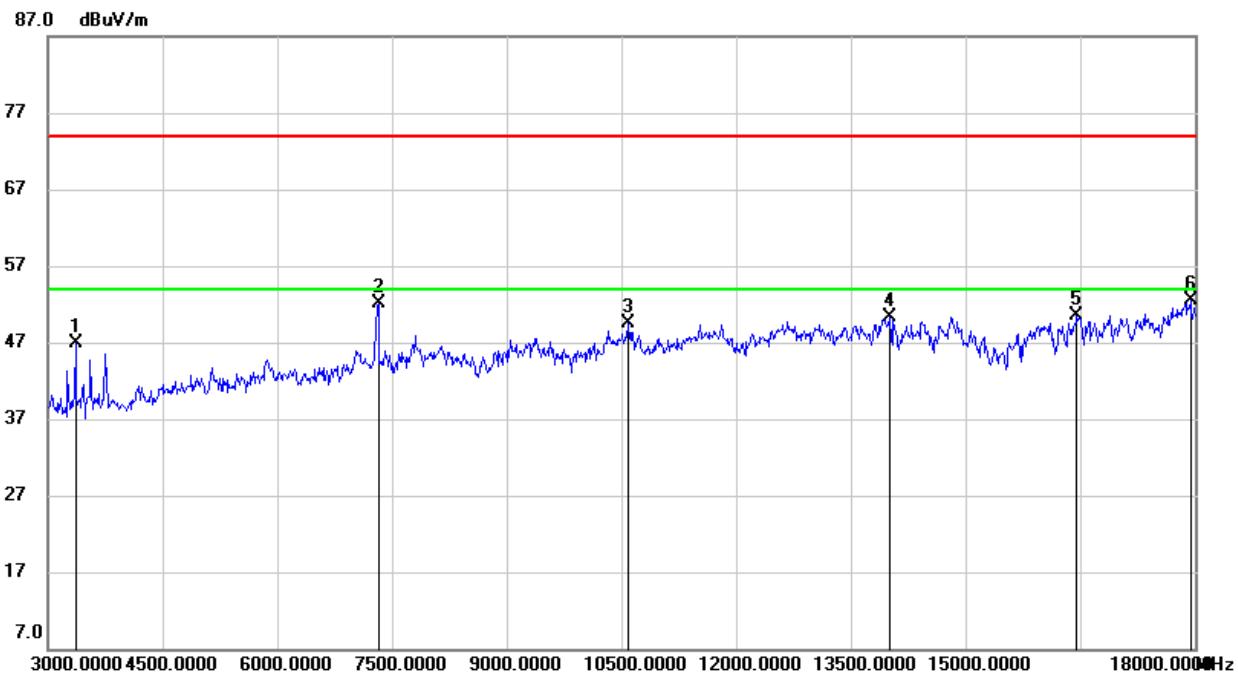HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3360.000 | 51.27 | -4.33 | 46.94 | 74.00 | -27.06 | peak |
| 2 | 7320.000 | 45.89 | 6.14 | 52.03 | 74.00 | -21.97 | peak |
| 3 | 10590.000 | 37.60 | 11.88 | 49.48 | 74.00 | -24.52 | peak |
| 4 | 14010.000 | 34.35 | 16.01 | 50.36 | 74.00 | -23.64 | peak |
| 5 | 16455.000 | 31.51 | 19.00 | 50.51 | 74.00 | -23.49 | peak |
| 6 | 17940.000 | 29.09 | 23.39 | 52.48 | 74.00 | -21.52 | peak |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

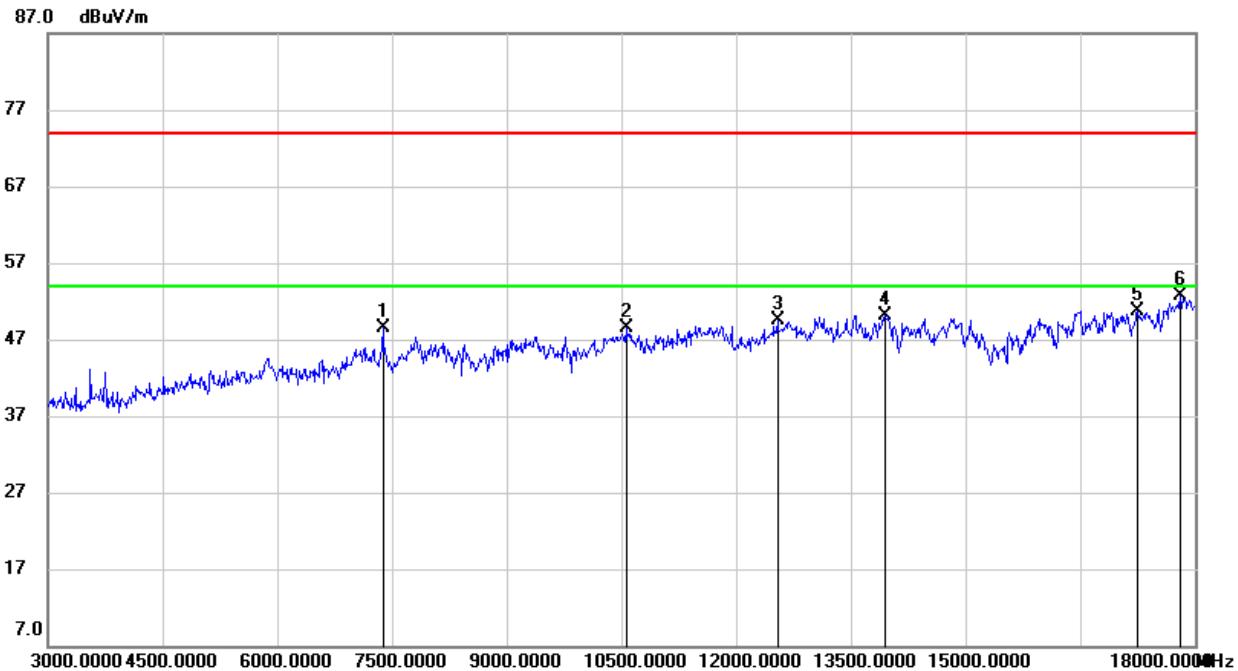HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7380.000 | 42.15 | 6.41 | 48.56 | 74.00 | -25.44 | peak |
| 2 | 10560.000 | 36.72 | 11.73 | 48.45 | 74.00 | -25.55 | peak |
| 3 | 12540.000 | 35.08 | 14.33 | 49.41 | 74.00 | -24.59 | peak |
| 4 | 13950.000 | 34.06 | 16.11 | 50.17 | 74.00 | -23.83 | peak |
| 5 | 17250.000 | 29.34 | 21.33 | 50.67 | 74.00 | -23.33 | peak |
| 6 | 17805.000 | 29.38 | 23.31 | 52.69 | 74.00 | -21.31 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

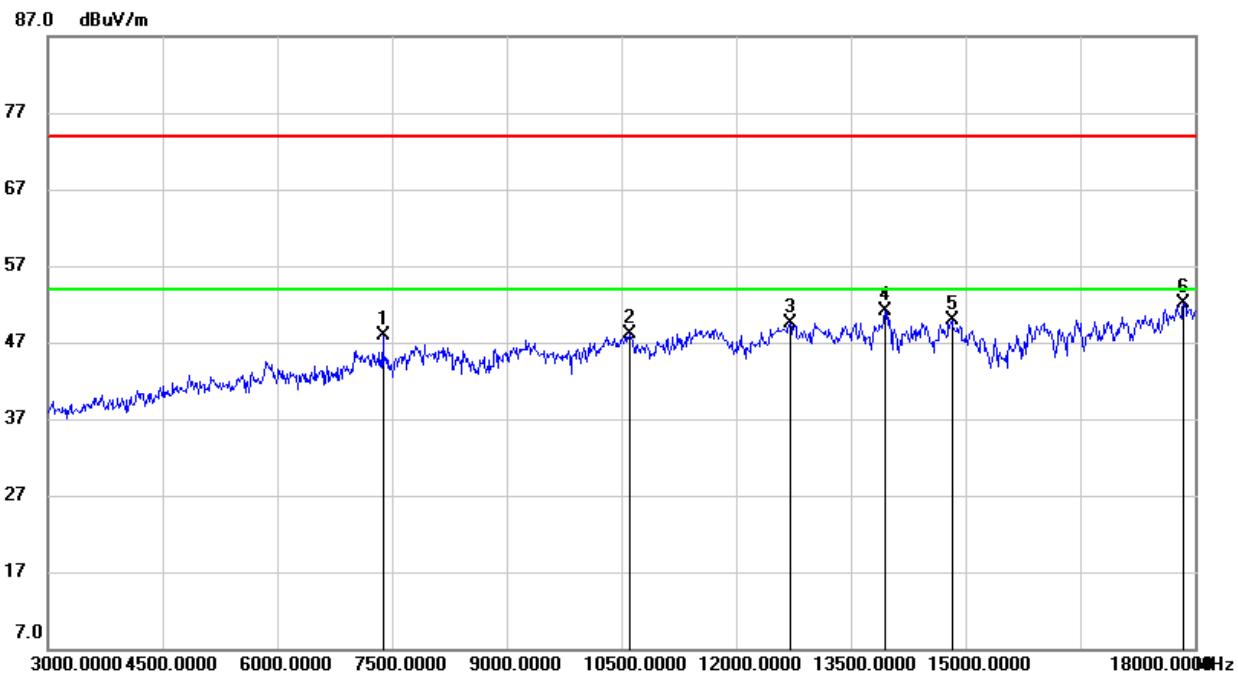HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 7380.000 | 41.47 | 6.41 | 47.88 | 74.00 | -26.12 | peak |
| 2 | 10605.000 | 36.23 | 11.93 | 48.16 | 74.00 | -25.84 | peak |
| 3 | 12705.000 | 35.14 | 14.35 | 49.49 | 74.00 | -24.51 | peak |
| 4 | 13950.000 | 35.06 | 16.11 | 51.17 | 74.00 | -22.83 | peak |
| 5 | 14820.000 | 33.98 | 15.94 | 49.92 | 74.00 | -24.08 | peak |
| 6 | 17850.000 | 28.73 | 23.32 | 52.05 | 74.00 | -21.95 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3. SPURIOUS EMISSIONS (1~3GHz)

8.3.1. 802.11b MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

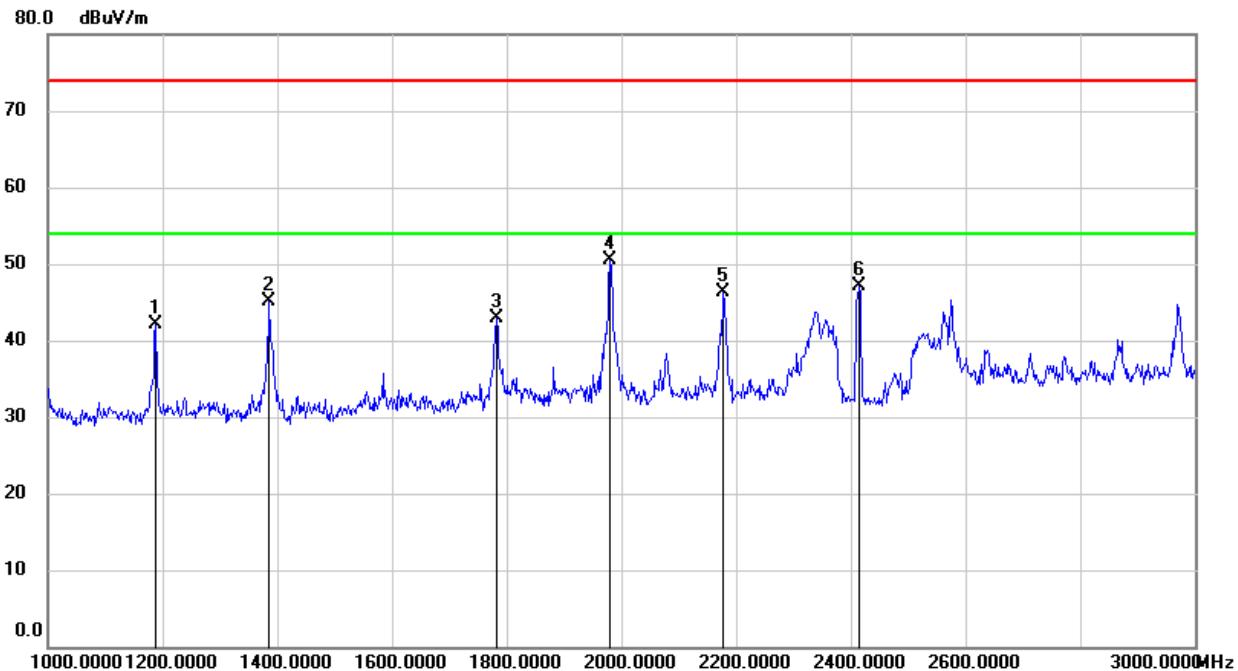

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1188.000 | 55.44 | -13.37 | 42.07 | 74.00 | -31.93 | peak |
| 2 | 1386.000 | 58.14 | -13.05 | 45.09 | 74.00 | -28.91 | peak |
| 3 | 1782.000 | 53.85 | -10.91 | 42.94 | 74.00 | -31.06 | peak |
| 4 | 1980.000 | 61.11 | -10.68 | 50.43 | 74.00 | -23.57 | peak |
| 5 | 2178.000 | 56.13 | -9.76 | 46.37 | 74.00 | -27.63 | peak |
| 6 | 2412.000 | 55.98 | -8.81 | 47.17 | / | / | fundamental |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

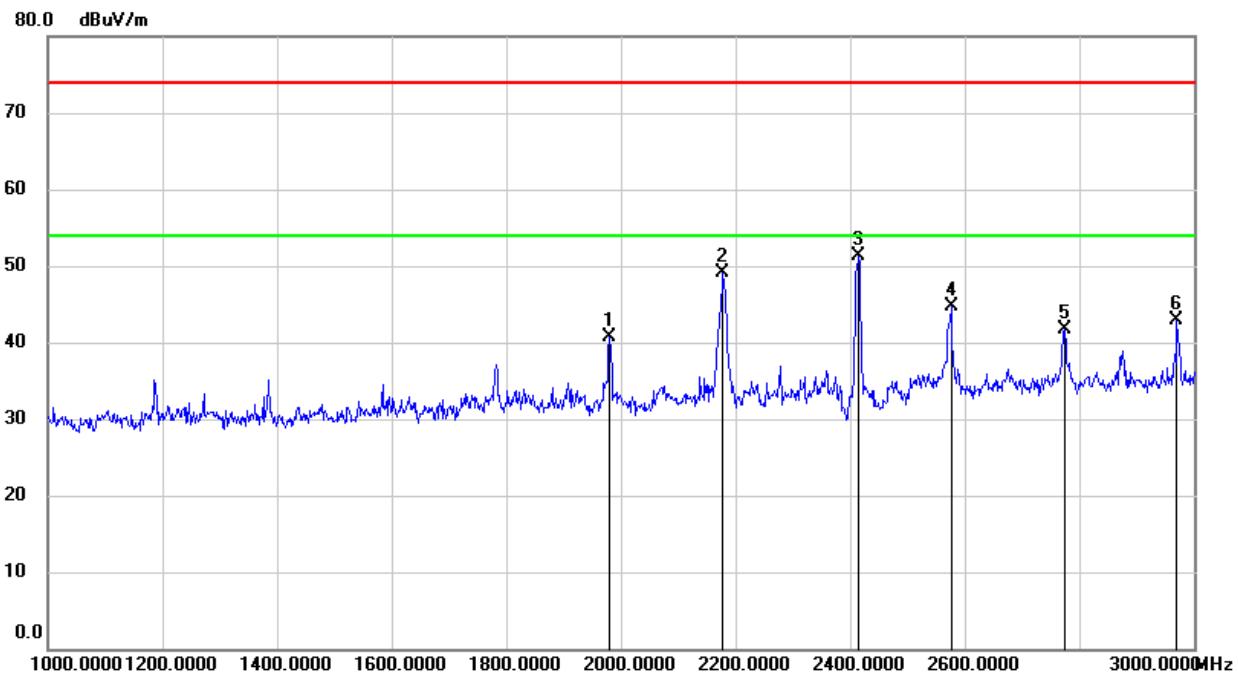HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1980.000 | 51.40 | -10.68 | 40.72 | 74.00 | -33.28 | peak |
| 2 | 2178.000 | 58.91 | -9.76 | 49.15 | 74.00 | -24.85 | peak |
| 3 | 2412.000 | 60.15 | -8.81 | 51.34 | / | / | fundamental |
| 4 | 2576.000 | 53.12 | -8.44 | 44.68 | 74.00 | -29.32 | peak |
| 5 | 2774.000 | 49.11 | -7.38 | 41.73 | 74.00 | -32.27 | peak |
| 6 | 2970.000 | 49.35 | -6.42 | 42.93 | 74.00 | -31.07 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

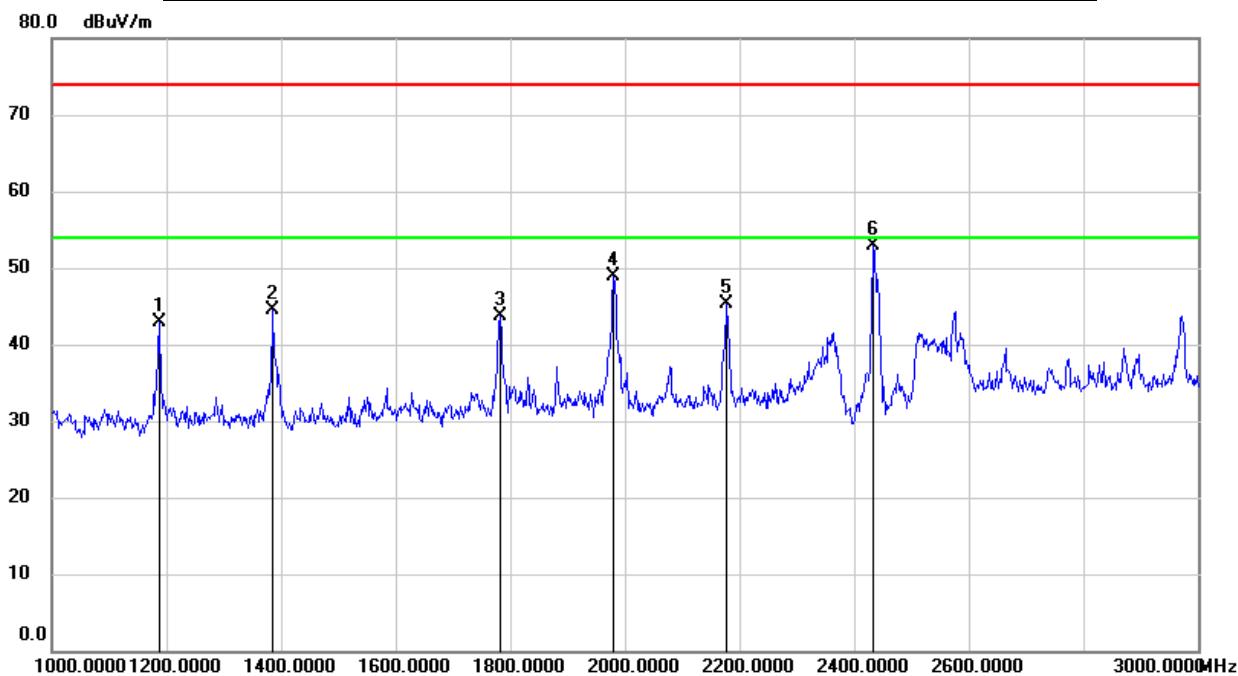HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1188.000 | 56.26 | -13.37 | 42.89 | 74.00 | -31.11 | peak |
| 2 | 1386.000 | 57.61 | -13.05 | 44.56 | 74.00 | -29.44 | peak |
| 3 | 1782.000 | 54.59 | -10.91 | 43.68 | 74.00 | -30.32 | peak |
| 4 | 1980.000 | 59.54 | -10.68 | 48.86 | 74.00 | -25.14 | peak |
| 5 | 2176.000 | 55.14 | -9.76 | 45.38 | 74.00 | -28.62 | peak |
| 6 | 2437.000 | 61.56 | -8.65 | 52.91 | / | / | fundamental |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

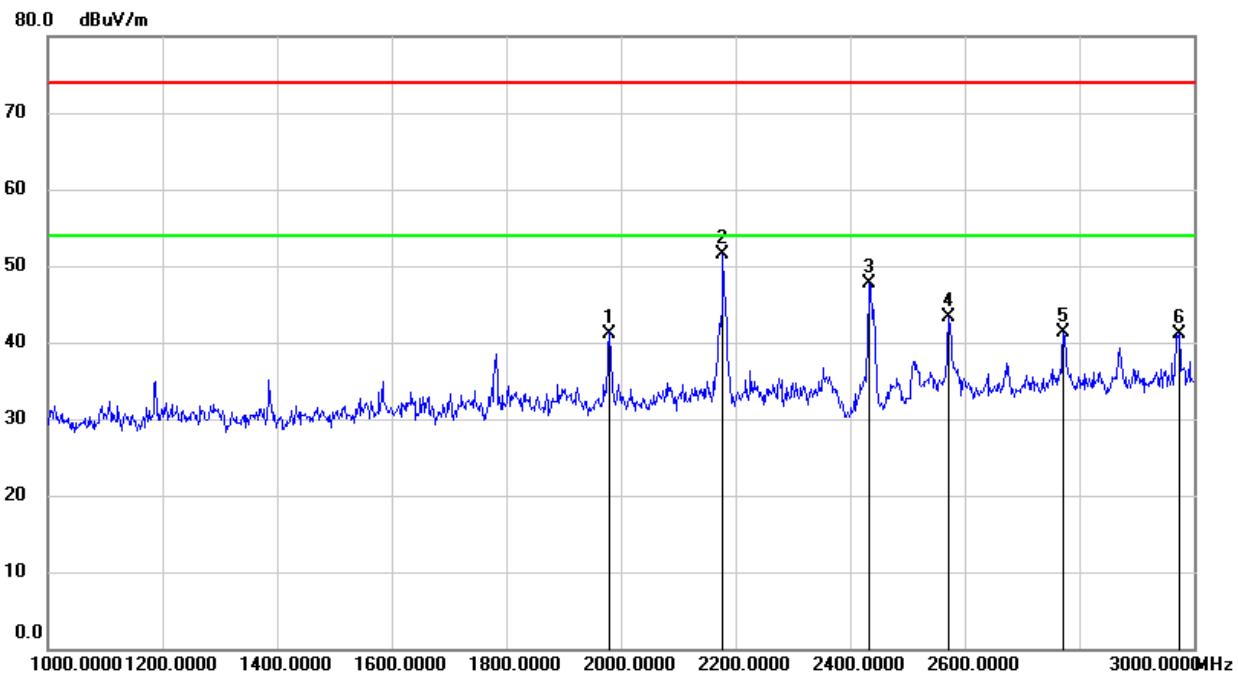HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1980.000 | 51.88 | -10.68 | 41.20 | 74.00 | -32.80 | peak |
| 2 | 2178.000 | 61.29 | -9.76 | 51.53 | 74.00 | -22.47 | peak |
| 3 | 2437.000 | 56.26 | -8.65 | 47.61 | / | / | fundamental |
| 4 | 2572.000 | 51.65 | -8.42 | 43.23 | 74.00 | -30.77 | peak |
| 5 | 2772.000 | 48.70 | -7.39 | 41.31 | 74.00 | -32.69 | peak |
| 6 | 2974.000 | 47.47 | -6.39 | 41.08 | 74.00 | -32.92 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

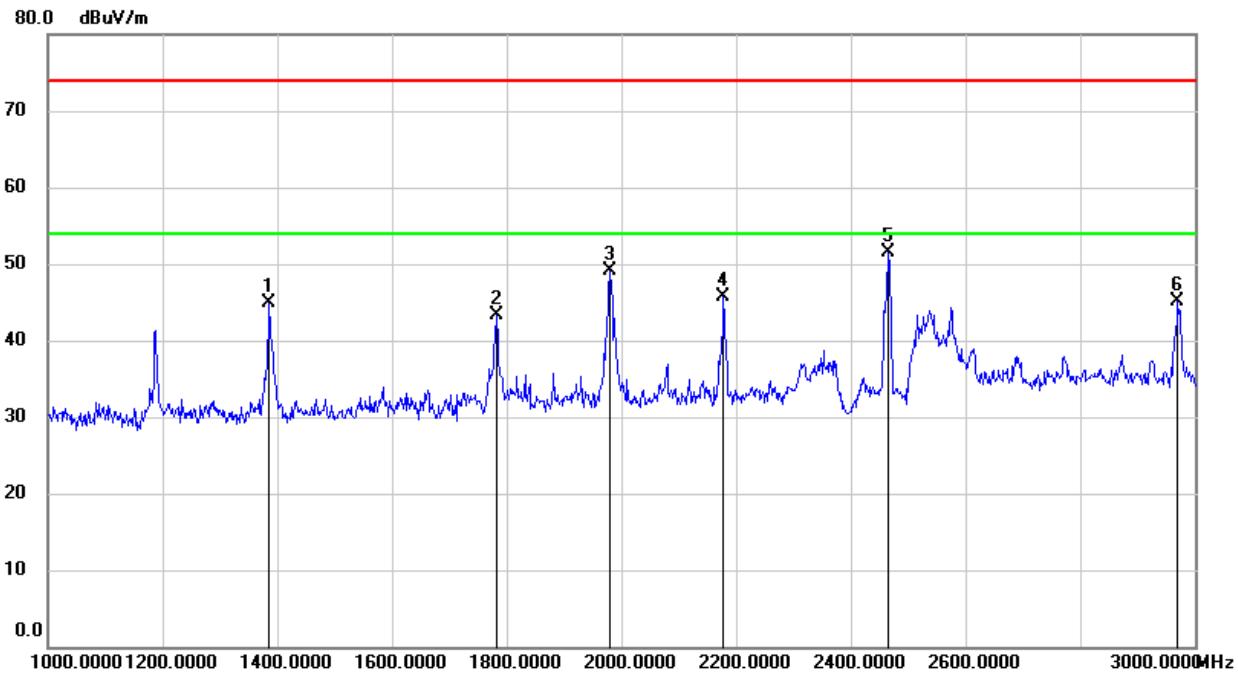HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1386.000 | 58.00 | -13.05 | 44.95 | 74.00 | -29.05 | peak |
| 2 | 1782.000 | 54.29 | -10.91 | 43.38 | 74.00 | -30.62 | peak |
| 3 | 1980.000 | 59.80 | -10.68 | 49.12 | 74.00 | -24.88 | peak |
| 4 | 2178.000 | 55.51 | -9.76 | 45.75 | 74.00 | -28.25 | peak |
| 5 | 2462.000 | 59.95 | -8.36 | 51.59 | / | / | fundamental |
| 6 | 2970.000 | 51.44 | -6.42 | 45.02 | 74.00 | -28.98 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

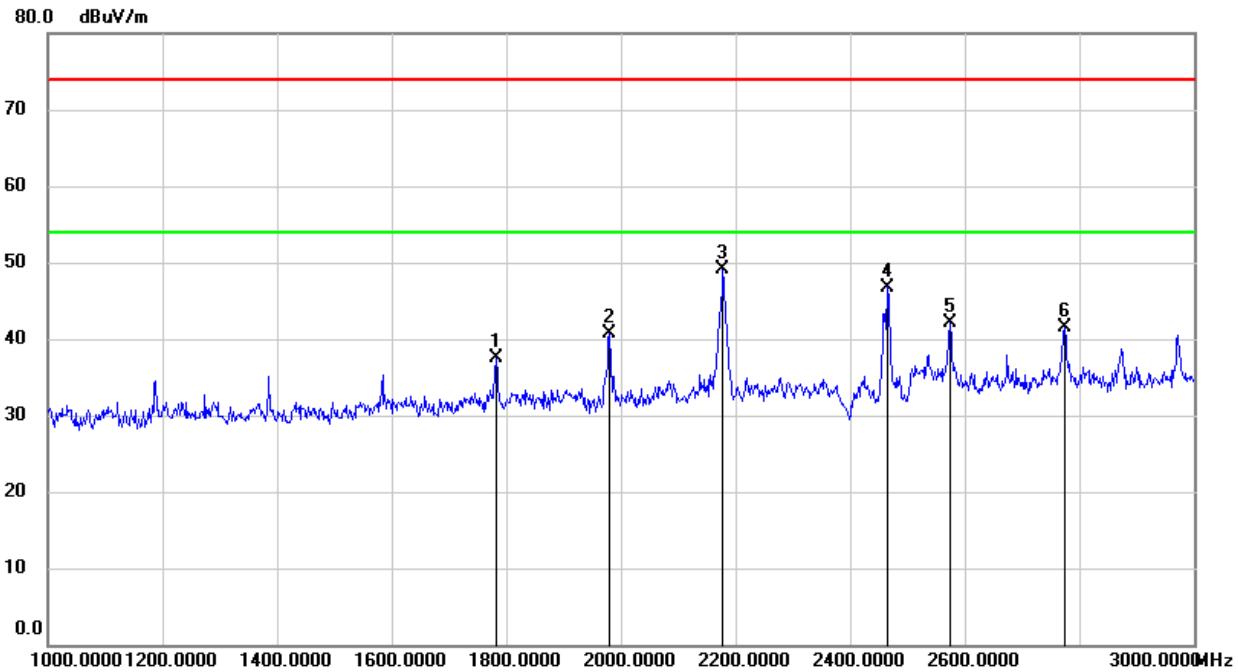HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1 | 1782.000 | 48.43 | -10.91 | 37.52 | 74.00 | -36.48 | peak |
| 2 | 1980.000 | 51.35 | -10.68 | 40.67 | 74.00 | -33.33 | peak |
| 3 | 2178.000 | 58.78 | -9.76 | 49.02 | 74.00 | -24.98 | peak |
| 4 | 2462.000 | 55.16 | -8.36 | 46.80 | / | / | fundamental |
| 5 | 2574.000 | 50.59 | -8.43 | 42.16 | 74.00 | -31.84 | peak |
| 6 | 2774.000 | 48.91 | -7.38 | 41.53 | 74.00 | -32.47 | peak |

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.2. 802.11g MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

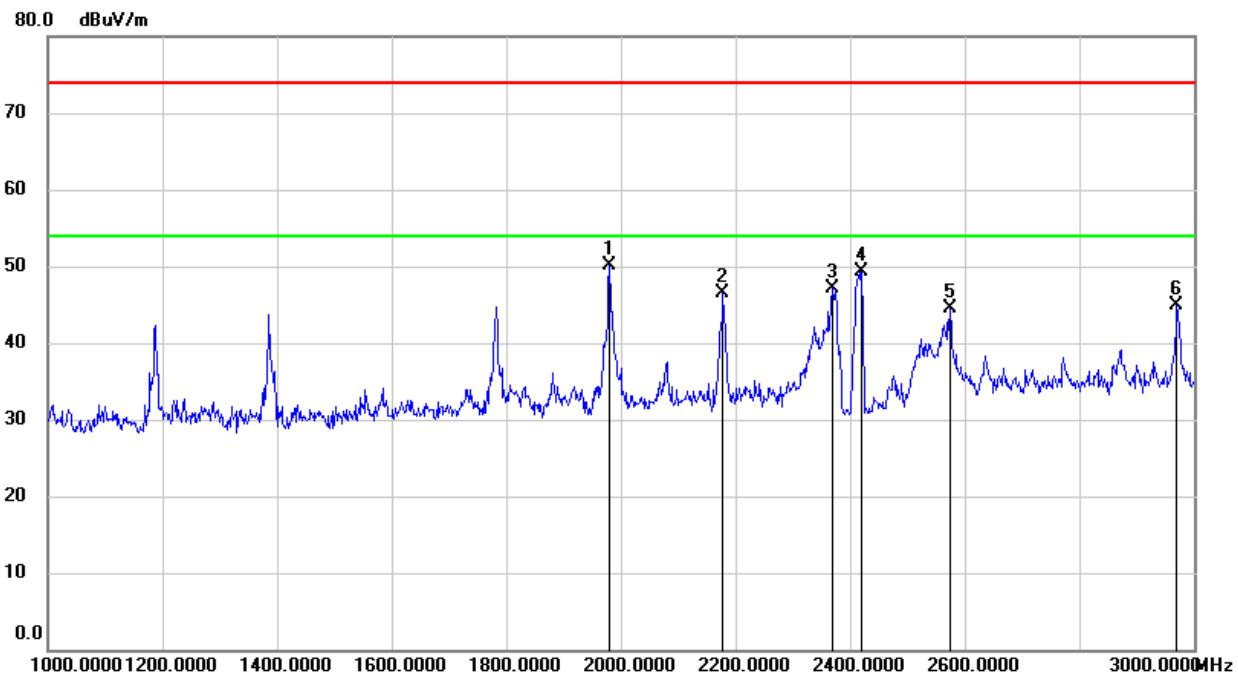

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1980.000 | 60.81 | -10.68 | 50.13 | 74.00 | -23.87 | peak |
| 2 | 2178.000 | 56.26 | -9.76 | 46.50 | 74.00 | -27.50 | peak |
| 3 | 2370.000 | 56.27 | -9.07 | 47.20 | 74.00 | -26.80 | peak |
| 4 | 2412.000 | 58.04 | -8.76 | 49.28 | / | / | fundamental |
| 5 | 2574.000 | 52.97 | -8.43 | 44.54 | 74.00 | -29.46 | peak |
| 6 | 2970.000 | 51.28 | -6.42 | 44.86 | 74.00 | -29.14 | peak |

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

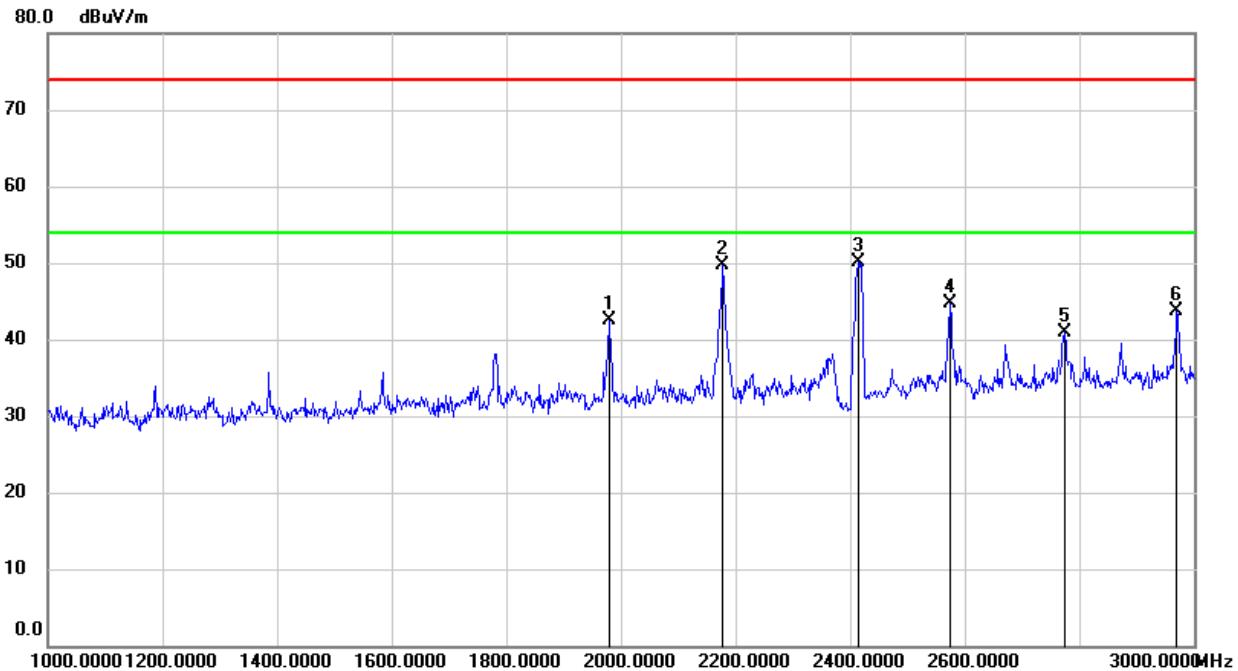HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1980.000 | 53.13 | -10.68 | 42.45 | 74.00 | -31.55 | peak |
| 2 | 2178.000 | 59.41 | -9.76 | 49.65 | 74.00 | -24.35 | peak |
| 3 | 2412.000 | 58.98 | -8.81 | 50.17 | / | / | fundamental |
| 4 | 2574.000 | 53.17 | -8.43 | 44.74 | 74.00 | -29.26 | peak |
| 5 | 2774.000 | 48.26 | -7.38 | 40.88 | 74.00 | -33.12 | peak |
| 6 | 2970.000 | 50.05 | -6.42 | 43.63 | 74.00 | -30.37 | peak |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

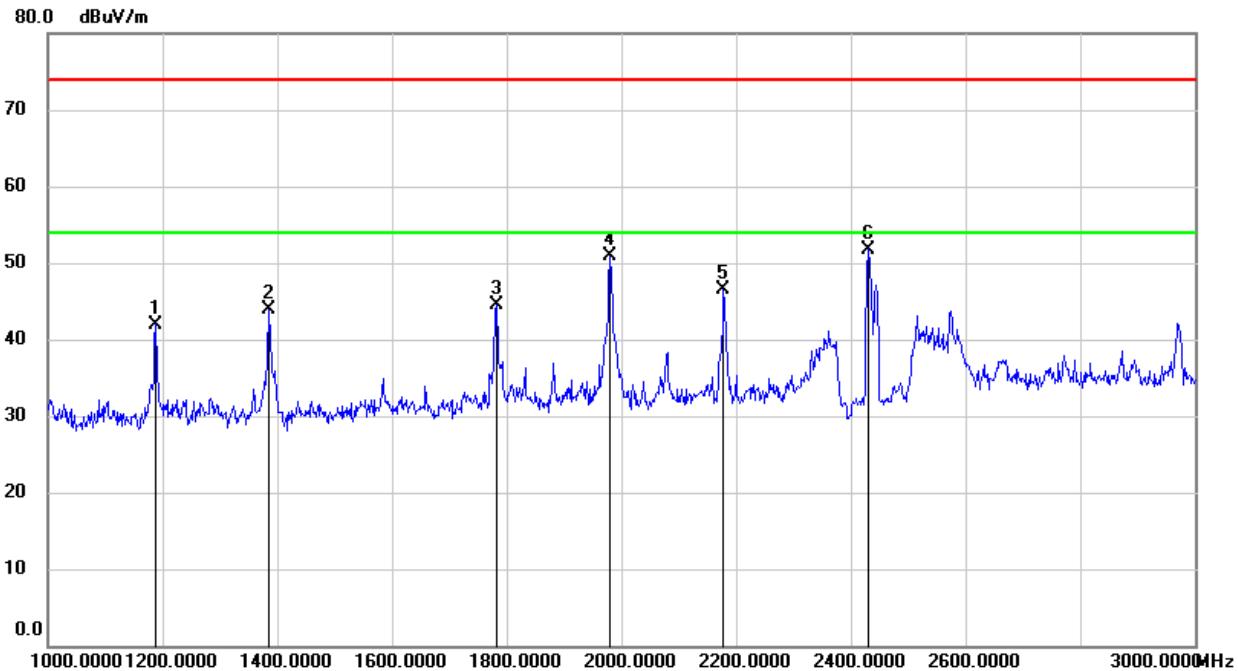HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1188.000 | 55.37 | -13.37 | 42.00 | 74.00 | -32.00 | peak |
| 2 | 1384.000 | 56.93 | -13.05 | 43.88 | 74.00 | -30.12 | peak |
| 3 | 1782.000 | 55.38 | -10.91 | 44.47 | 74.00 | -29.53 | peak |
| 4 | 1980.000 | 61.53 | -10.68 | 50.85 | 74.00 | -23.15 | peak |
| 5 | 2178.000 | 56.31 | -9.76 | 46.55 | 74.00 | -27.45 | peak |
| 6 | 2437.000 | 60.48 | -8.68 | 51.80 | / | / | fundamental |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

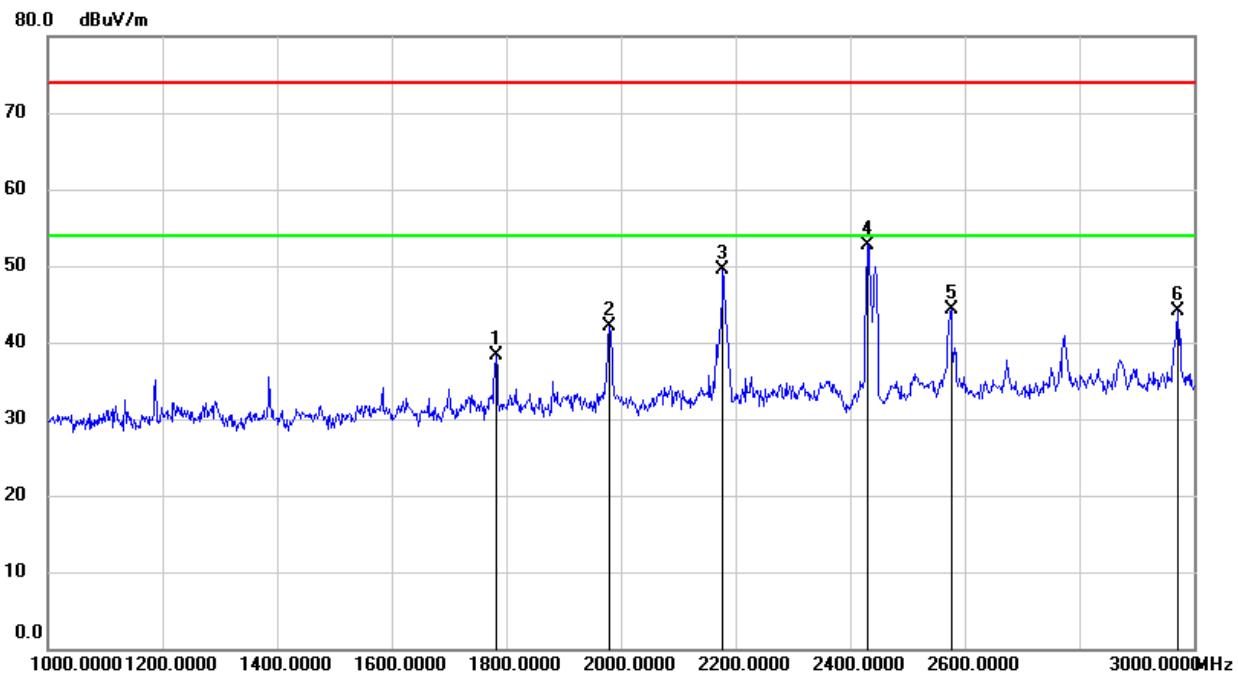HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1782.000 | 49.21 | -10.91 | 38.30 | 74.00 | -35.70 | peak |
| 2 | 1980.000 | 52.72 | -10.68 | 42.04 | 74.00 | -31.96 | peak |
| 3 | 2178.000 | 59.35 | -9.76 | 49.59 | 74.00 | -24.41 | peak |
| 4 | 2437.000 | 61.31 | -8.68 | 52.63 | / | / | fundamental |
| 5 | 2576.000 | 52.68 | -8.44 | 44.24 | 74.00 | -29.76 | peak |
| 6 | 2972.000 | 50.50 | -6.40 | 44.10 | 74.00 | -29.90 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

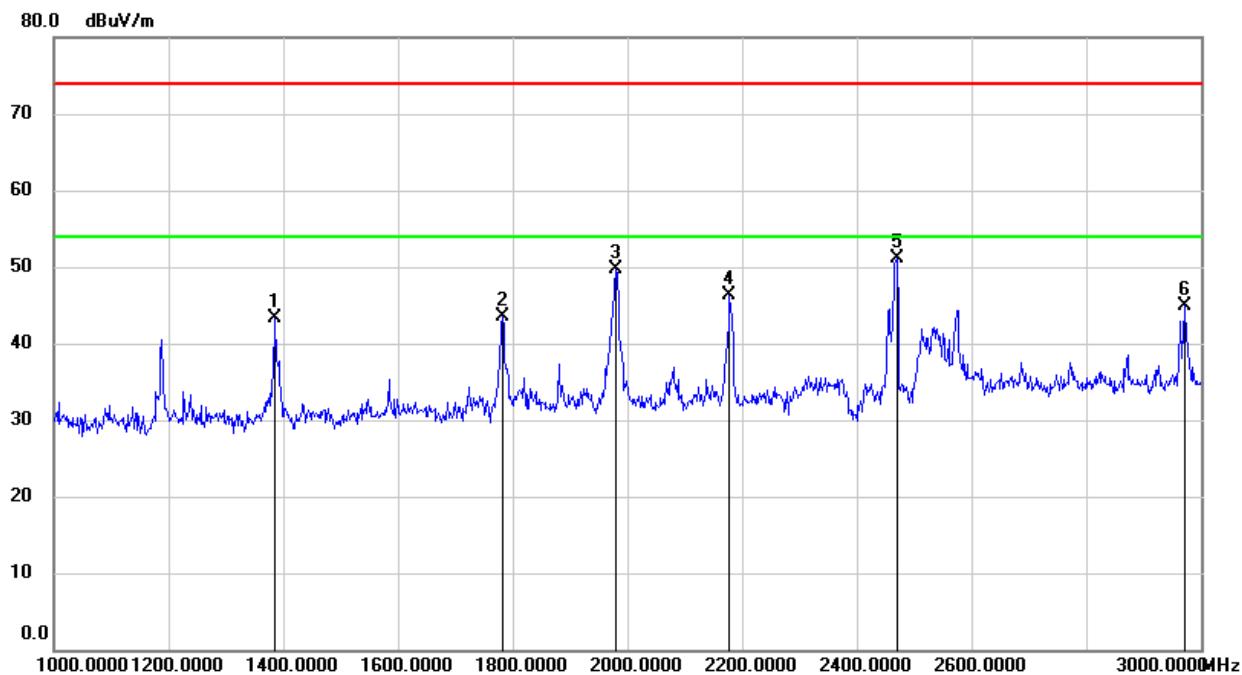HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1386.000 | 56.29 | -13.05 | 43.24 | 74.00 | -30.76 | peak |
| 2 | 1782.000 | 54.37 | -10.91 | 43.46 | 74.00 | -30.54 | peak |
| 3 | 1980.000 | 60.41 | -10.68 | 49.73 | 74.00 | -24.27 | peak |
| 4 | 2178.000 | 56.06 | -9.76 | 46.30 | 74.00 | -27.70 | peak |
| 5 | 2462.000 | 59.44 | -8.33 | 51.11 | / | / | fundamental |
| 6 | 2972.000 | 51.30 | -6.40 | 44.90 | 74.00 | -29.10 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

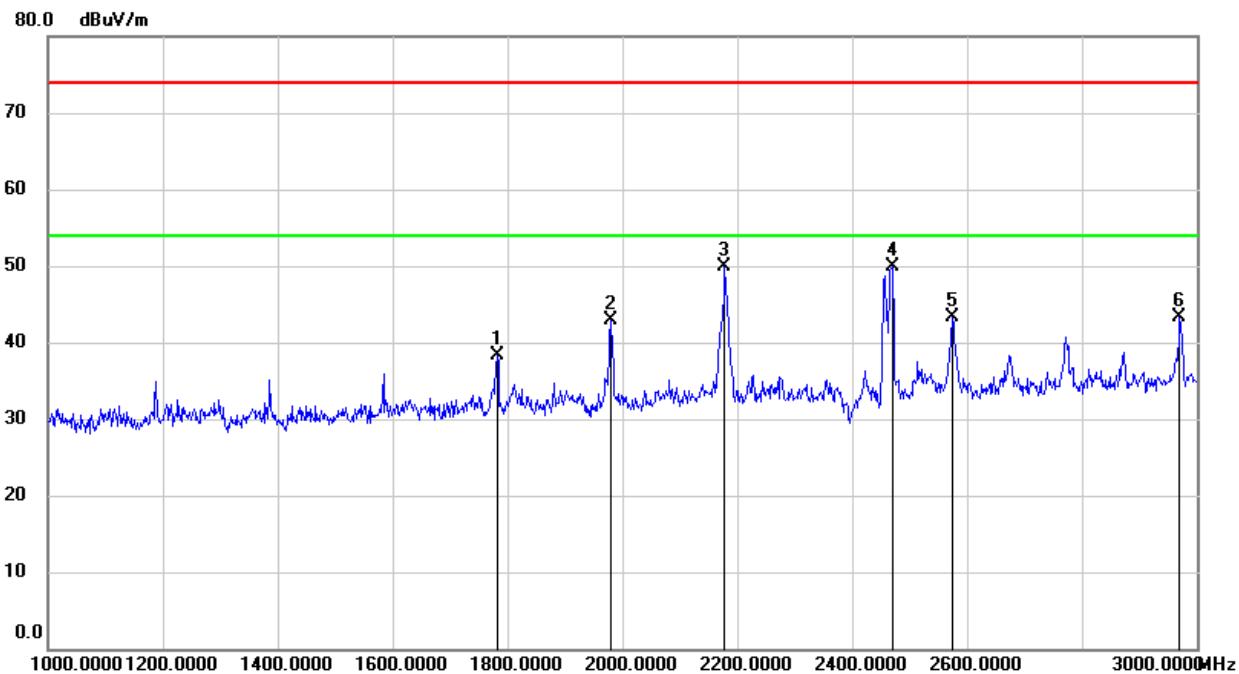
HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1782.000 | 49.20 | -10.91 | 38.29 | 74.00 | -35.71 | peak |
| 2 | 1980.000 | 53.65 | -10.68 | 42.97 | 74.00 | -31.03 | peak |
| 3 | 2178.000 | 59.69 | -9.76 | 49.93 | 74.00 | -24.07 | peak |
| 4 | 2462.000 | 58.29 | -8.33 | 49.96 | / | / | fundamental |
| 5 | 2574.000 | 51.72 | -8.43 | 43.29 | 74.00 | -30.71 | peak |
| 6 | 2970.000 | 49.65 | -6.42 | 43.23 | 74.00 | -30.77 | peak |

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


8.3.3. 802.11n HT20 MODE

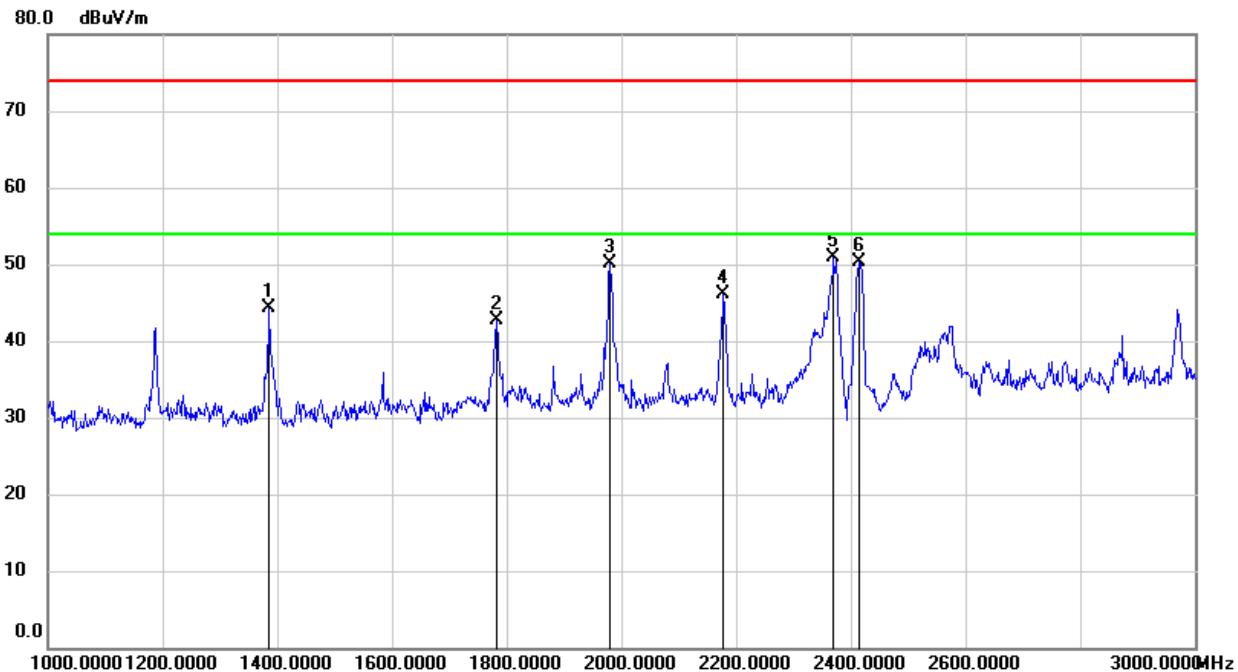HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1386.000 | 57.26 | -13.05 | 44.21 | 74.00 | -29.79 | peak |
| 2 | 1782.000 | 53.66 | -10.91 | 42.75 | 74.00 | -31.25 | peak |
| 3 | 1980.000 | 60.86 | -10.68 | 50.18 | 74.00 | -23.82 | peak |
| 4 | 2178.000 | 55.85 | -9.76 | 46.09 | 74.00 | -27.91 | peak |
| 5 | 2370.000 | 60.02 | -9.07 | 50.95 | 74.00 | -23.05 | peak |
| 6 | 2412.000 | 59.11 | -8.81 | 50.30 | / | / | fundamental |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

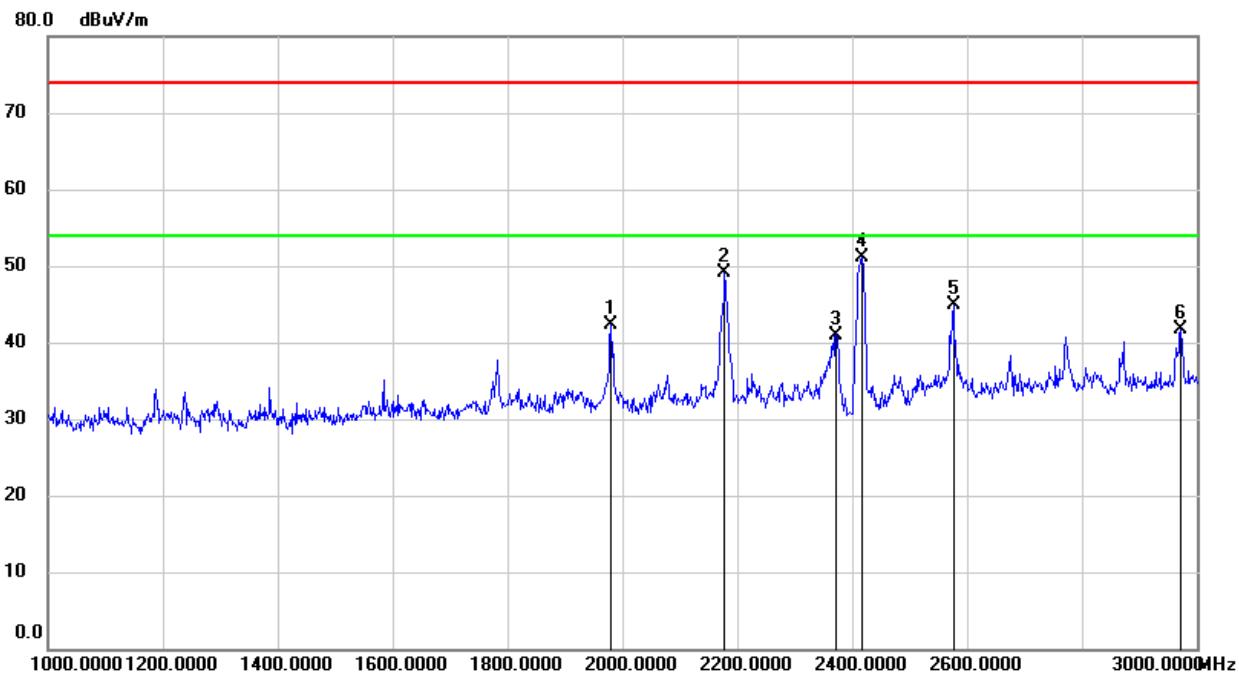HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1980.000 | 53.03 | -10.68 | 42.35 | 74.00 | -31.65 | peak |
| 2 | 2178.000 | 58.95 | -9.76 | 49.19 | 74.00 | -24.81 | peak |
| 3 | 2372.000 | 50.06 | -9.06 | 41.00 | 74.00 | -33.00 | peak |
| 4 | 2412.000 | 59.97 | -8.80 | 51.17 | / | / | fundamental |
| 5 | 2576.000 | 53.37 | -8.44 | 44.93 | 74.00 | -29.07 | peak |
| 6 | 2972.000 | 48.16 | -6.40 | 41.76 | 74.00 | -32.24 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

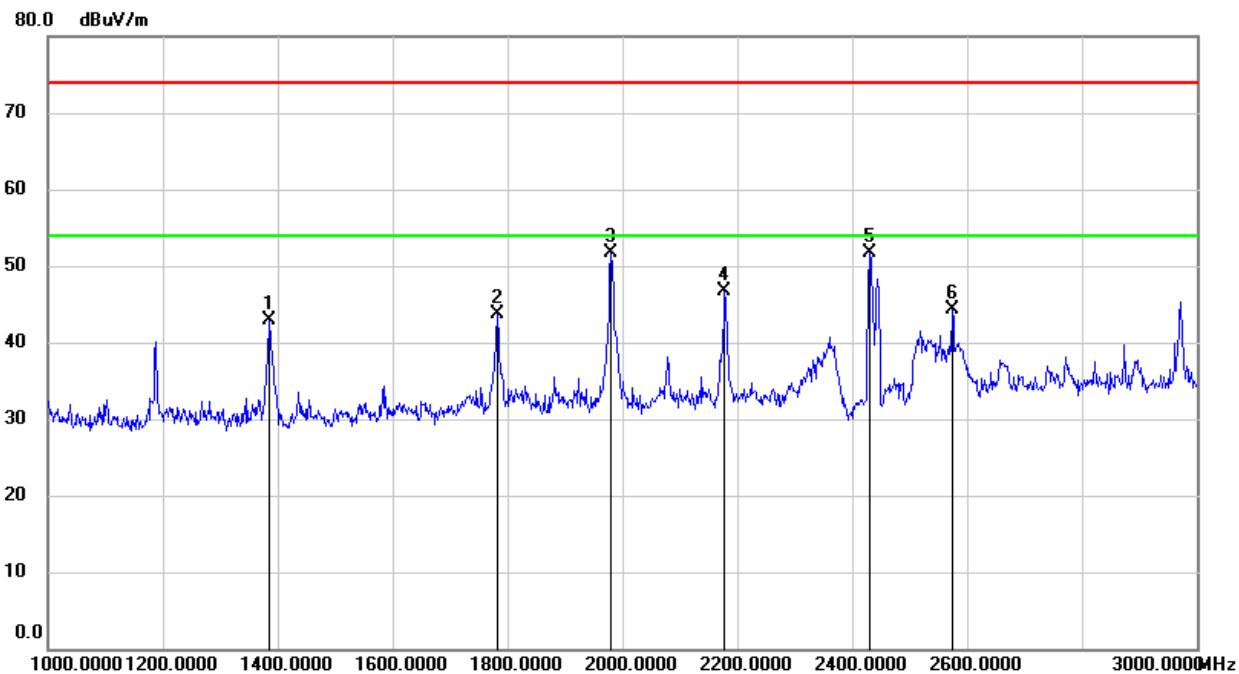HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1 | 1386.000 | 55.91 | -13.05 | 42.86 | 74.00 | -31.14 | peak |
| 2 | 1782.000 | 54.54 | -10.91 | 43.63 | 74.00 | -30.37 | peak |
| 3 | 1980.000 | 62.33 | -10.68 | 51.65 | 74.00 | -22.35 | peak |
| 4 | 2178.000 | 56.38 | -9.76 | 46.62 | 74.00 | -27.38 | peak |
| 5 | 2437.000 | 60.34 | -8.68 | 51.66 | / | / | fundamental |
| 6 | 2574.000 | 52.70 | -8.43 | 44.27 | 74.00 | -29.73 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

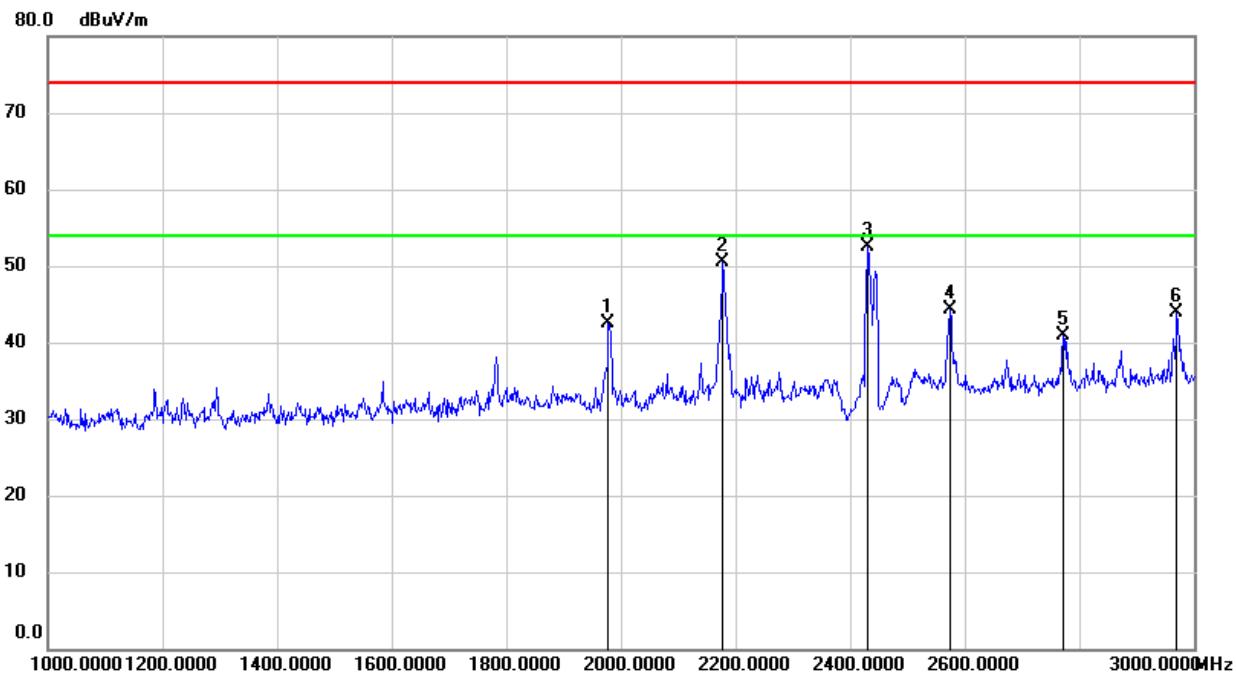HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1978.000 | 53.08 | -10.67 | 42.41 | 74.00 | -31.59 | peak |
| 2 | 2178.000 | 60.29 | -9.76 | 50.53 | 74.00 | -23.47 | peak |
| 3 | 2437.000 | 61.28 | -8.68 | 52.60 | / | / | fundamental |
| 4 | 2574.000 | 52.75 | -8.43 | 44.32 | 74.00 | -29.68 | peak |
| 5 | 2772.000 | 48.24 | -7.39 | 40.85 | 74.00 | -33.15 | peak |
| 6 | 2970.000 | 50.35 | -6.42 | 43.93 | 74.00 | -30.07 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

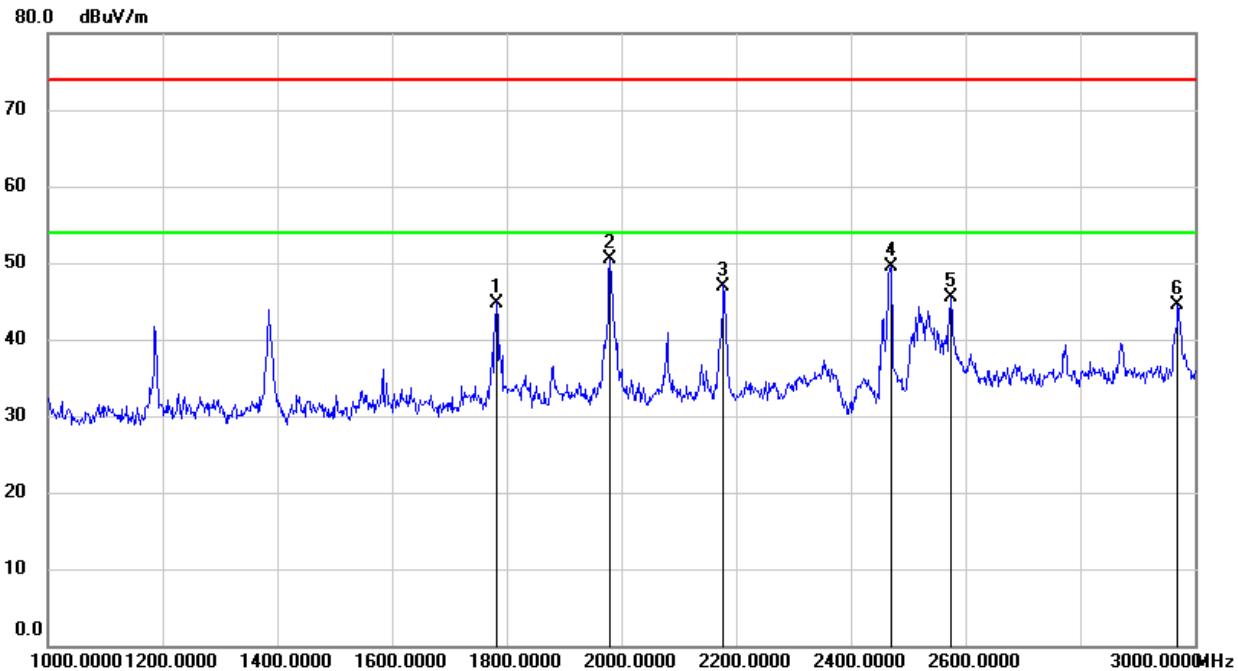HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1782.000 | 55.71 | -10.91 | 44.80 | 74.00 | -29.20 | peak |
| 2 | 1980.000 | 61.14 | -10.68 | 50.46 | 74.00 | -23.54 | peak |
| 3 | 2178.000 | 56.76 | -9.76 | 47.00 | 74.00 | -27.00 | peak |
| 4 | 2462.000 | 57.80 | -8.33 | 49.47 | / | / | fundamental |
| 5 | 2574.000 | 54.03 | -8.43 | 45.60 | 74.00 | -28.40 | peak |
| 6 | 2970.000 | 50.90 | -6.42 | 44.48 | 74.00 | -29.52 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

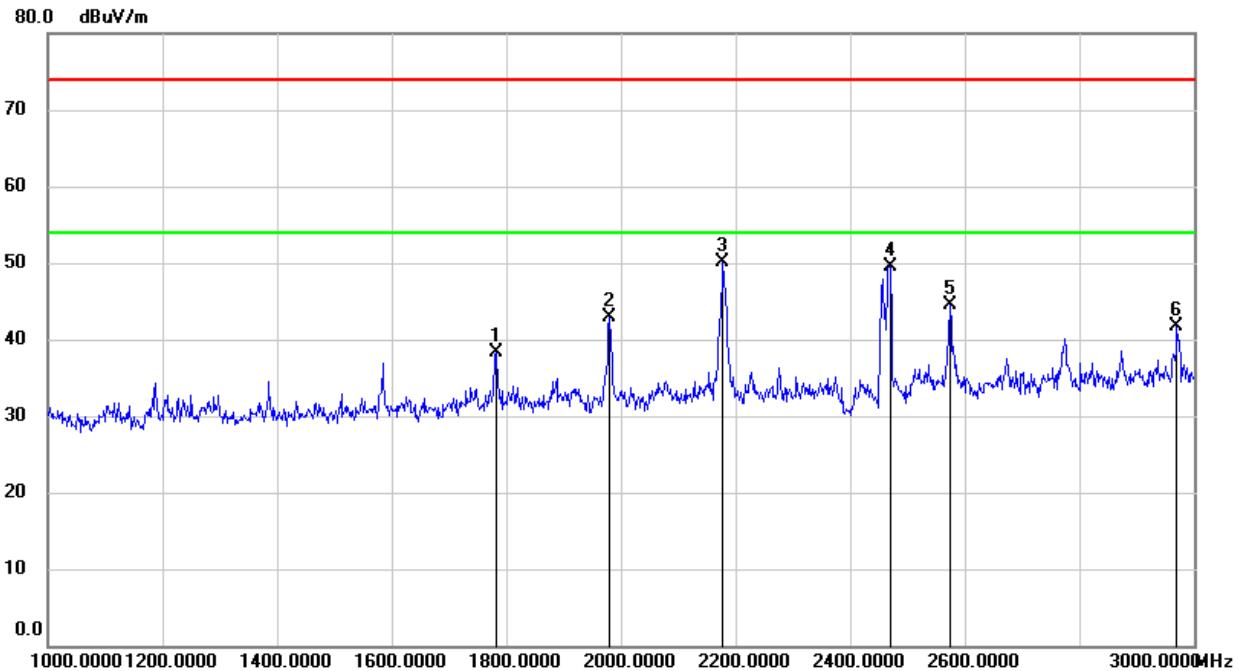HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1782.000 | 49.28 | -10.91 | 38.37 | 74.00 | -35.63 | peak |
| 2 | 1980.000 | 53.55 | -10.68 | 42.87 | 74.00 | -31.13 | peak |
| 3 | 2178.000 | 59.91 | -9.76 | 50.15 | 74.00 | -23.85 | peak |
| 4 | 2462.000 | 57.86 | -8.33 | 49.53 | / | / | fundamental |
| 5 | 2574.000 | 52.86 | -8.43 | 44.43 | 74.00 | -29.57 | peak |
| 6 | 2970.000 | 48.20 | -6.42 | 41.78 | 74.00 | -32.22 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.4. WORST-CASE CO-LOCATION


8.4.1. BT GFSK MODE AND 802.11n HT20 MODE (TRANSMIT SIMULTANEOUSLY)

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

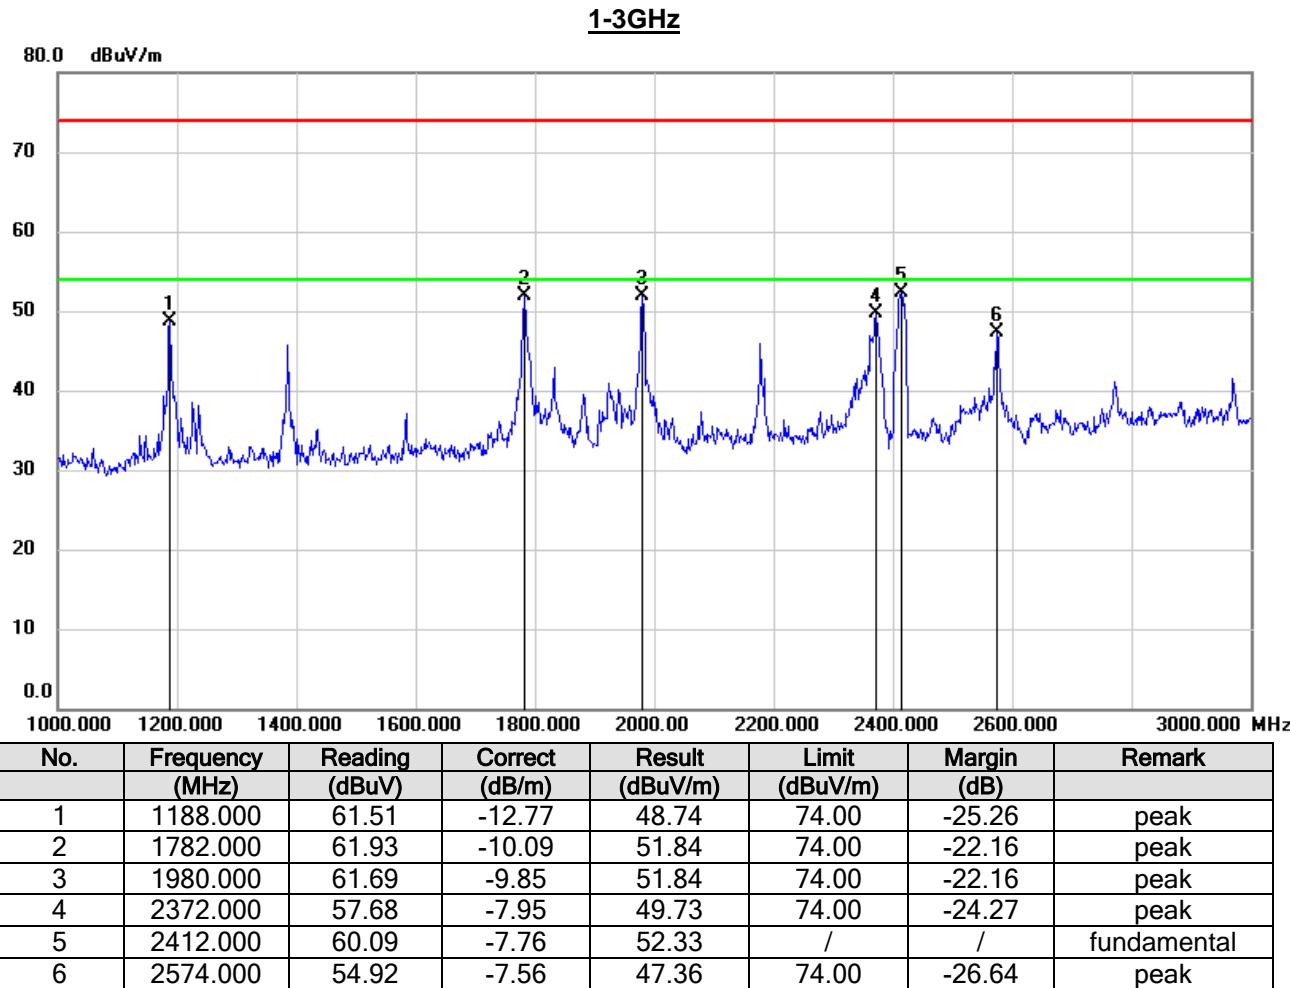

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

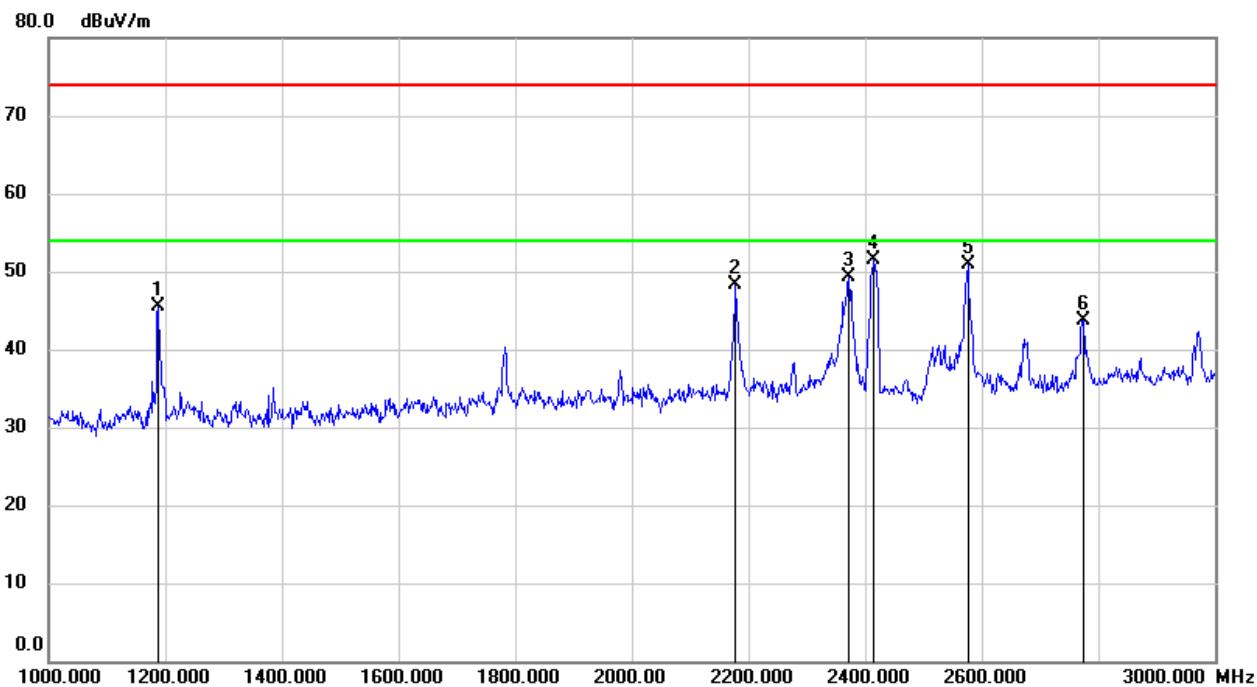SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)1-3GHz

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|-------------|
| 1 | 1188.000 | 58.20 | -12.77 | 45.43 | 74.00 | -28.57 | peak |
| 2 | 2178.000 | 57.08 | -8.78 | 48.30 | 74.00 | -25.70 | peak |
| 3 | 2372.000 | 57.20 | -7.95 | 49.25 | 74.00 | -24.75 | peak |
| 4 | 2412.000 | 59.21 | -7.76 | 51.45 | / | / | fundamental |
| 5 | 2576.000 | 58.42 | -7.57 | 50.85 | 74.00 | -23.15 | peak |
| 6 | 2774.000 | 50.09 | -6.33 | 43.76 | 74.00 | -30.24 | peak |


Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

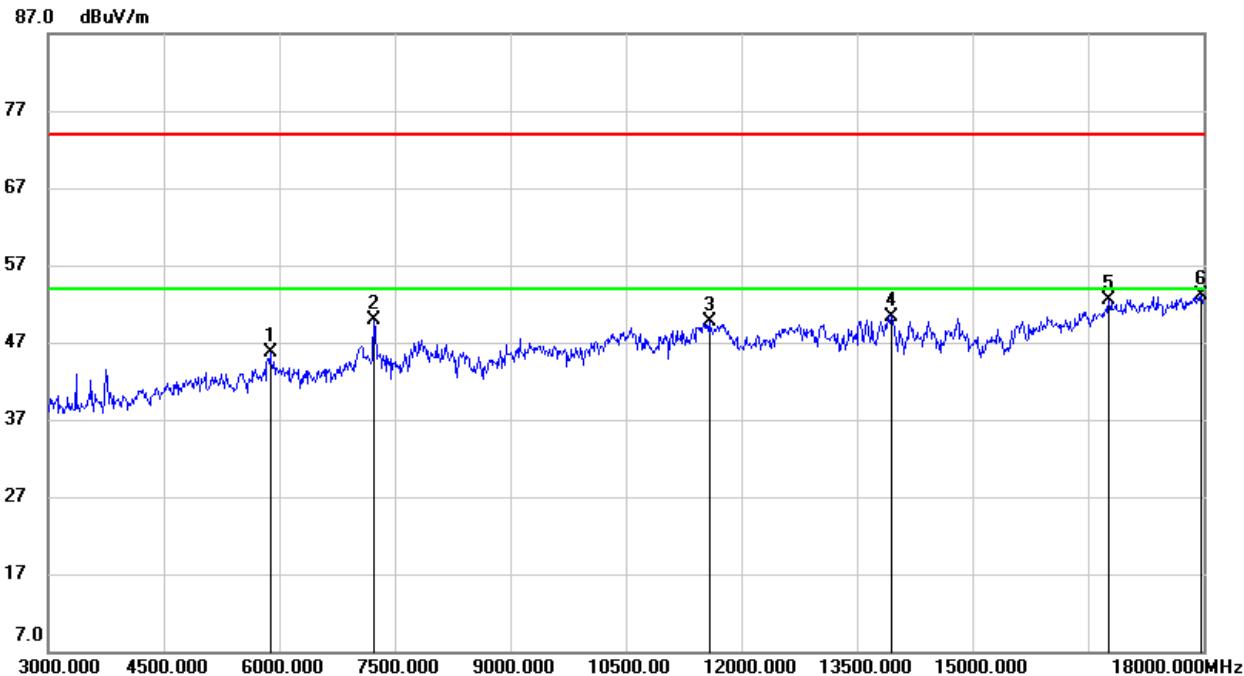SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)3-18GHz

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 5880.000 | 41.16 | 4.59 | 45.75 | 74.00 | -28.25 | peak |
| 2 | 7230.000 | 44.02 | 5.89 | 49.91 | 74.00 | -24.09 | peak |
| 3 | 11580.000 | 36.52 | 13.23 | 49.75 | 74.00 | -24.25 | peak |
| 4 | 13950.000 | 34.29 | 16.11 | 50.40 | 74.00 | -23.60 | peak |
| 5 | 16770.000 | 32.56 | 19.95 | 52.51 | 74.00 | -21.49 | peak |
| 6 | 17970.000 | 29.69 | 23.42 | 53.11 | 74.00 | -20.89 | peak |


Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

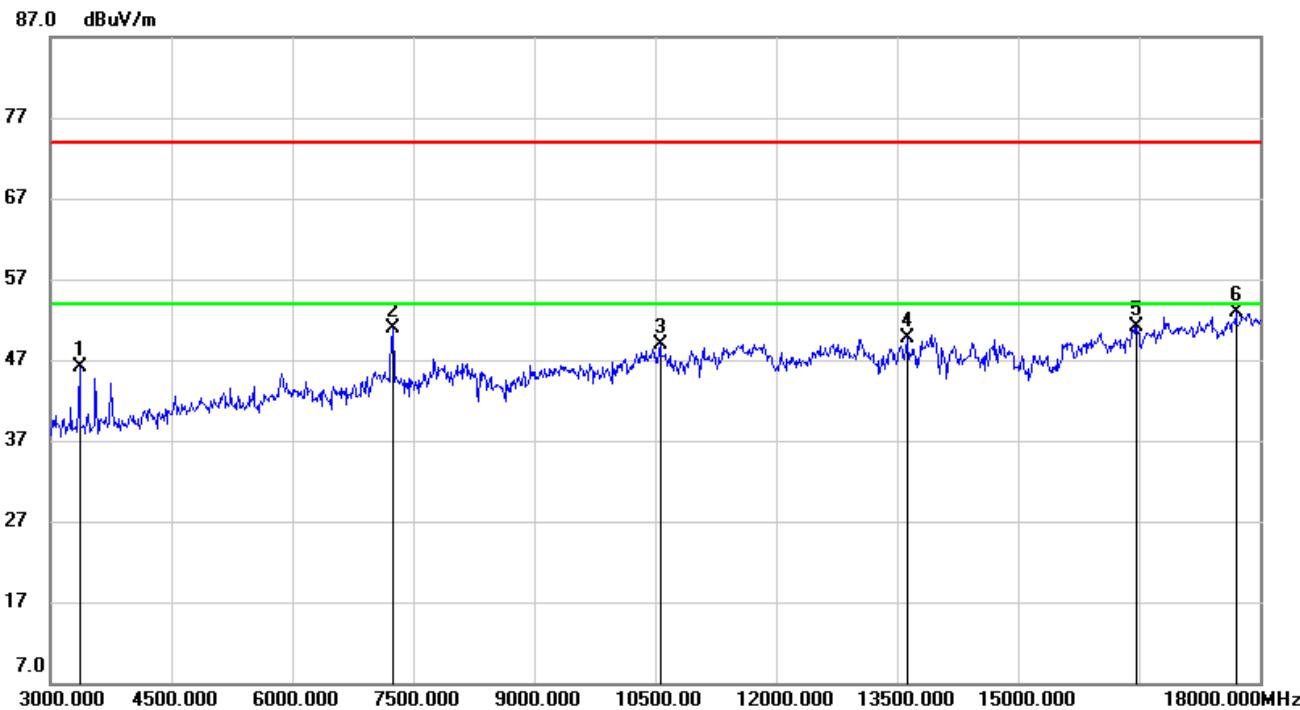SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)3-18GHz

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 3360.000 | 50.37 | -4.33 | 46.04 | 74.00 | -27.96 | peak |
| 2 | 7245.000 | 45.07 | 5.92 | 50.99 | 74.00 | -23.01 | peak |
| 3 | 10560.000 | 37.23 | 11.73 | 48.96 | 74.00 | -25.04 | peak |
| 4 | 13620.000 | 33.69 | 15.99 | 49.68 | 74.00 | -24.32 | peak |
| 5 | 16470.000 | 32.03 | 19.06 | 51.09 | 74.00 | -22.91 | peak |
| 6 | 17700.000 | 30.48 | 22.43 | 52.91 | 74.00 | -21.09 | peak |


Note:

1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

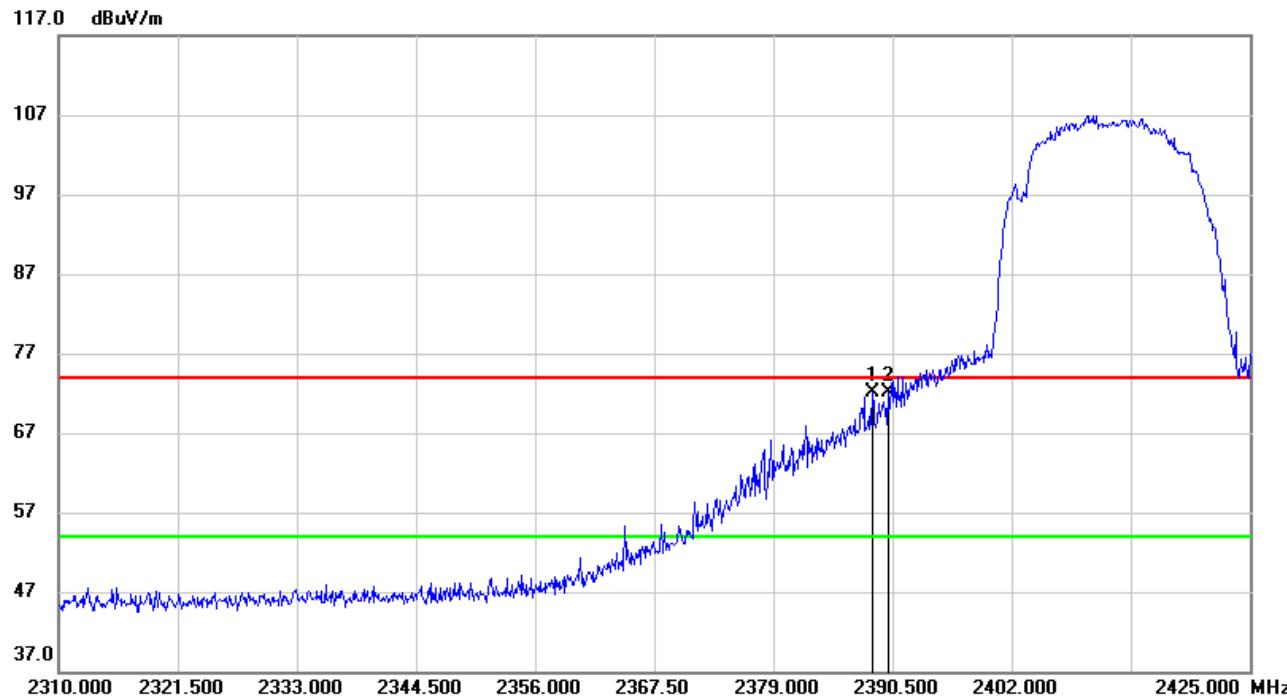RESTRICTED BANDEDGE (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)PEAK

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2388.545 | 39.19 | 32.94 | 72.13 | 74.00 | -1.87 | peak |
| 2 | 2390.000 | 39.14 | 32.94 | 72.08 | 74.00 | -1.92 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

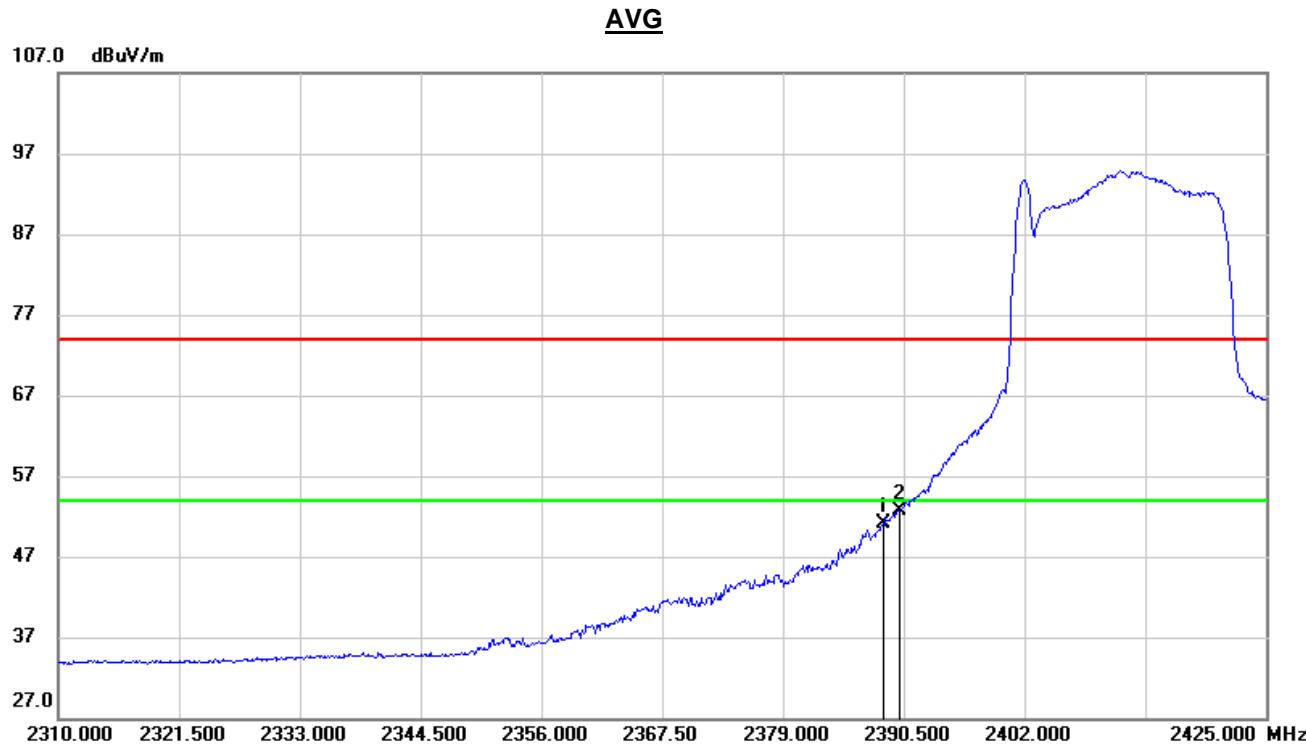

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2388.545 | 18.16 | 32.94 | 51.10 | 54.00 | -2.90 | AVG |
| 2 | 2390.000 | 19.78 | 32.94 | 52.72 | 54.00 | -1.28 | AVG |


Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$ where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

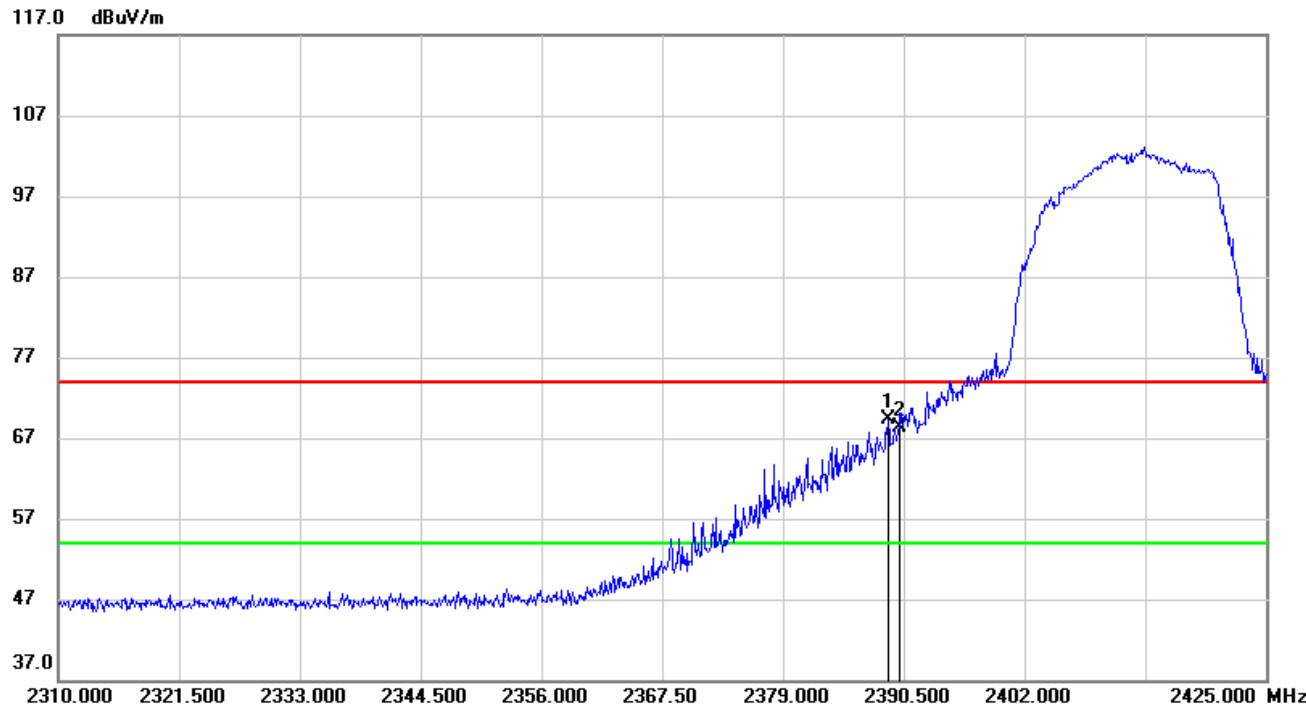RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)PEAK

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 2389.005 | 36.43 | 32.94 | 69.37 | 74.00 | -4.63 | peak |
| 2 | 2390.000 | 35.45 | 32.94 | 68.39 | 74.00 | -5.61 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

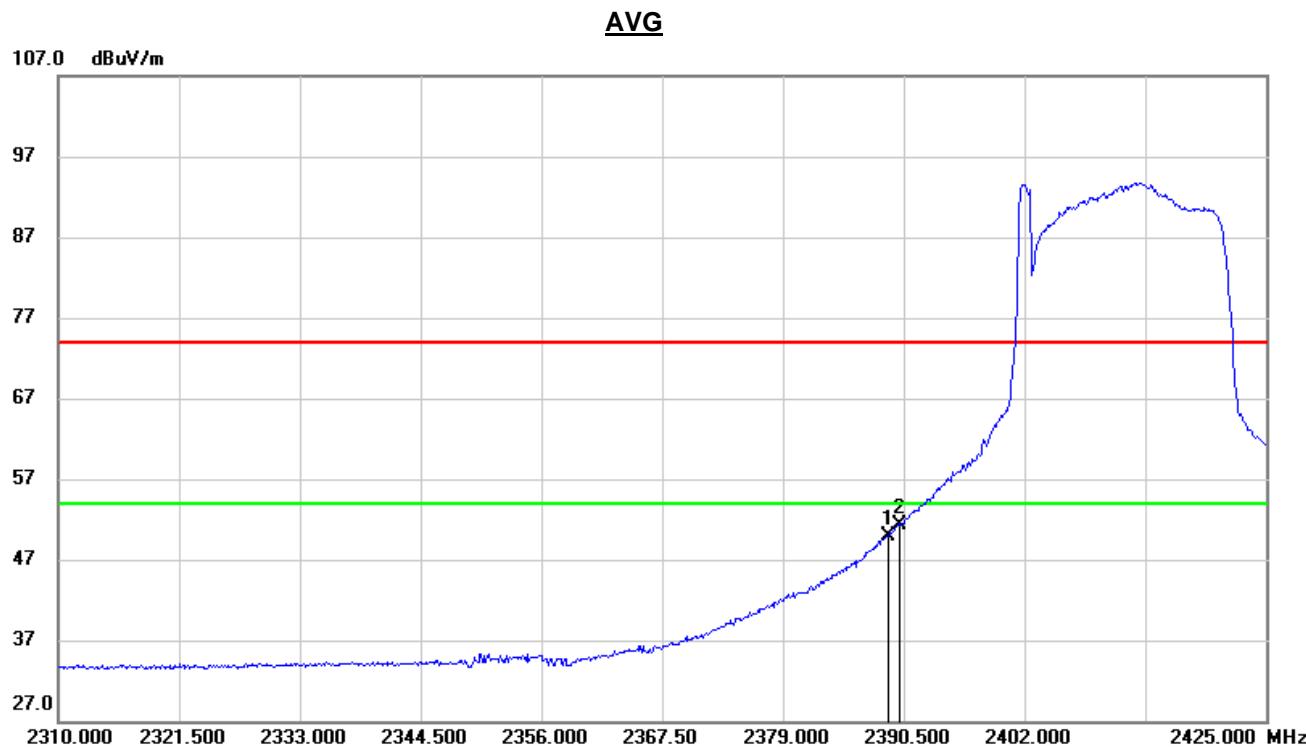

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 2389.005 | 16.90 | 32.94 | 49.84 | 54.00 | -4.16 | AVG |
| 2 | 2390.000 | 18.39 | 32.94 | 51.33 | 54.00 | -2.67 | AVG |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: VBW=1/Ton where: ton is transmit duration.
4. For transmit duration, please refer to clause 7.1.
5. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: All the test modes and combination have been considered. Only the worst data record in the report.

8.6. SPURIOUS EMISSIONS (18~26GHz)


8.6.1. 802.11b MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

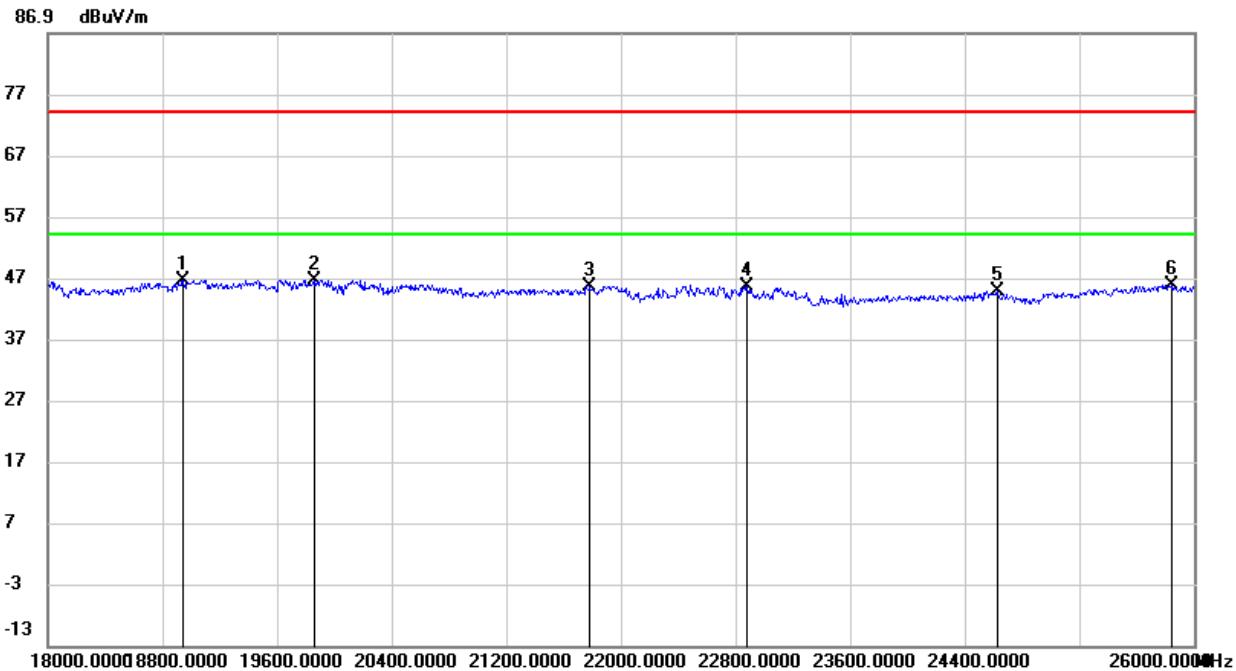

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 18944.000 | 51.44 | -4.89 | 46.55 | 74.00 | -27.45 | peak |
| 2 | 19856.000 | 50.97 | -4.35 | 46.62 | 74.00 | -27.38 | peak |
| 3 | 21784.000 | 51.46 | -5.82 | 45.64 | 74.00 | -28.36 | peak |
| 4 | 22880.000 | 51.13 | -5.67 | 45.46 | 74.00 | -28.54 | peak |
| 5 | 24624.000 | 47.15 | -2.27 | 44.88 | 74.00 | -29.12 | peak |
| 6 | 25848.000 | 47.59 | -1.76 | 45.83 | 74.00 | -28.17 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

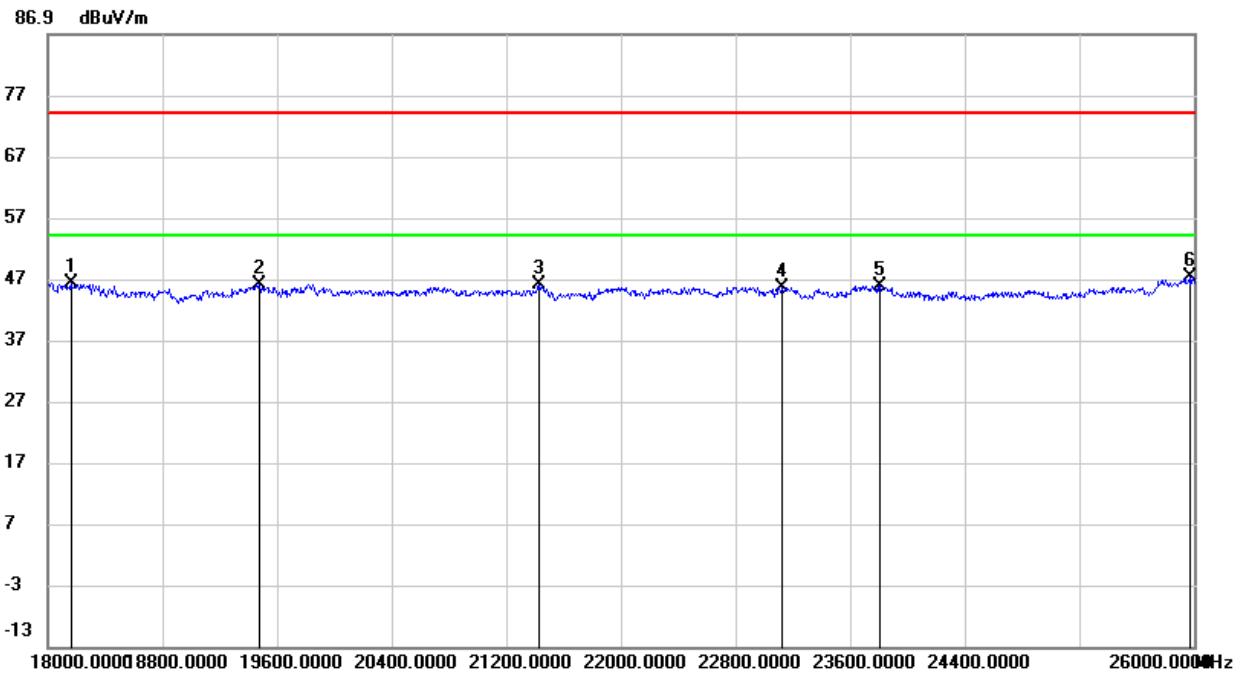SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 18160.000 | 50.47 | -4.19 | 46.28 | 74.00 | -27.72 | peak |
| 2 | 19472.000 | 50.93 | -4.82 | 46.11 | 74.00 | -27.89 | peak |
| 3 | 21424.000 | 51.74 | -5.69 | 46.05 | 74.00 | -27.95 | peak |
| 4 | 23128.000 | 51.08 | -5.43 | 45.65 | 74.00 | -28.35 | peak |
| 5 | 23808.000 | 50.30 | -4.48 | 45.82 | 74.00 | -28.18 | peak |
| 6 | 25968.000 | 49.60 | -2.31 | 47.29 | 74.00 | -26.71 | peak |


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.

Note: All the test modes have been tested, only the worst data record in the report.

8.7. SPURIOUS EMISSIONS (0.03 ~ 1 GHz)


8.7.1. 802.11b MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

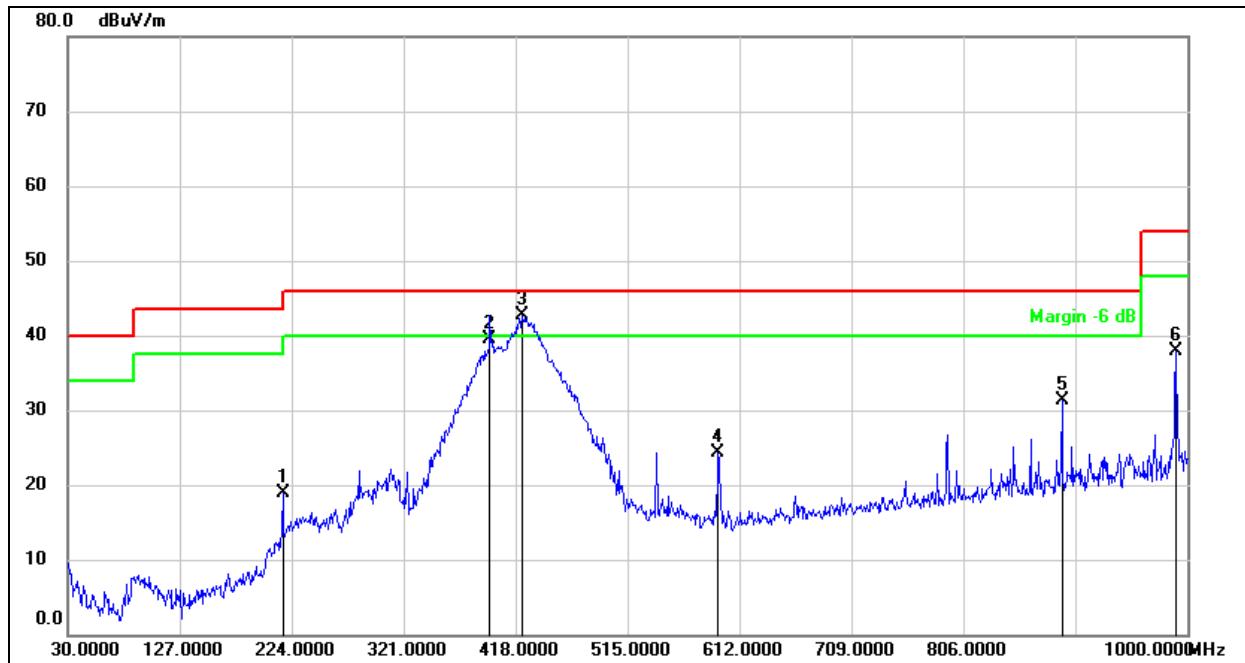

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1 | 216.2400 | 35.77 | -16.82 | 18.95 | 46.00 | -27.05 | QP |
| 2 | 395.6900 | 52.32 | -12.85 | 39.47 | 46.00 | -6.53 | QP |
| 3 | 423.8200 | 54.92 | -12.27 | 42.65 | 46.00 | -3.35 | QP |
| 4 | 593.5700 | 33.44 | -9.05 | 24.39 | 46.00 | -21.61 | QP |
| 5 | 891.3600 | 35.56 | -4.33 | 31.23 | 46.00 | -14.77 | QP |
| 6 | 990.3000 | 41.06 | -3.07 | 37.99 | 54.00 | -16.01 | QP |

Note: 1. Result Level = Read Level + Correct Factor.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

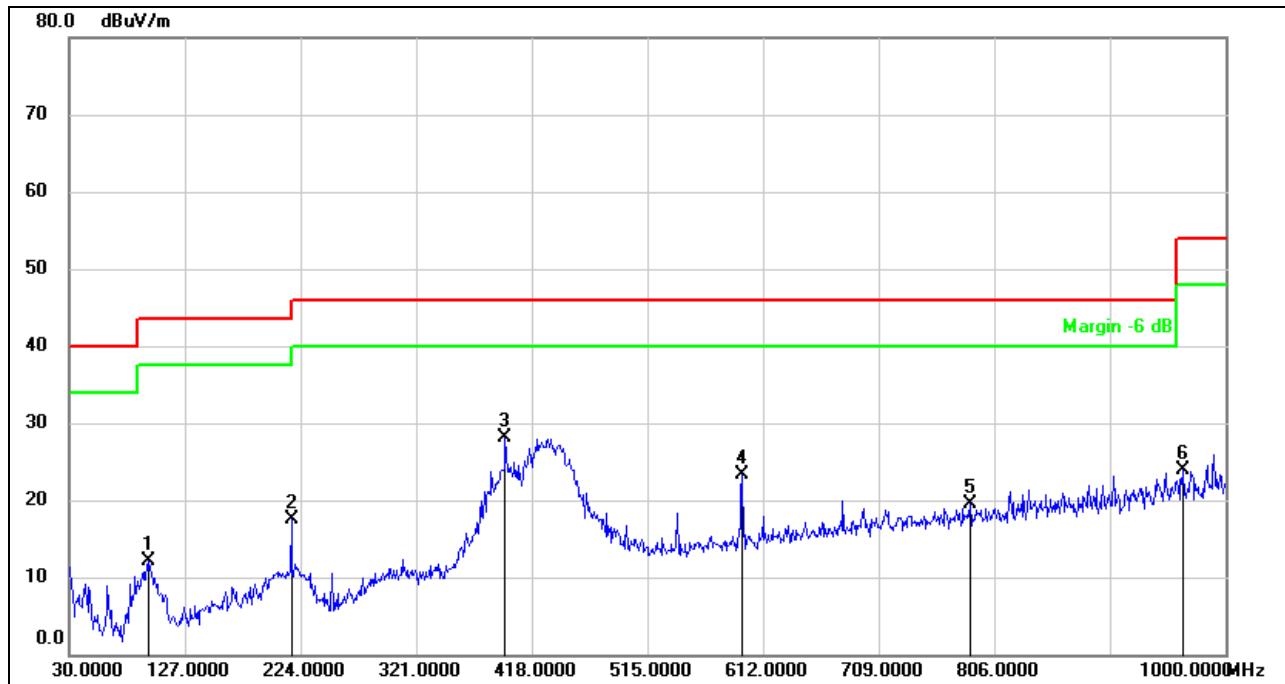SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1 | 96.9300 | 33.56 | -21.49 | 12.07 | 43.50 | -31.43 | QP |
| 2 | 216.2400 | 34.32 | -16.82 | 17.50 | 46.00 | -28.50 | QP |
| 3 | 395.6900 | 40.97 | -12.85 | 28.12 | 46.00 | -17.88 | QP |
| 4 | 594.5400 | 32.27 | -9.03 | 23.24 | 46.00 | -22.76 | QP |
| 5 | 785.6300 | 25.41 | -5.86 | 19.55 | 46.00 | -26.45 | QP |
| 6 | 964.1100 | 27.37 | -3.45 | 23.92 | 54.00 | -30.08 | QP |

Note: 1. Result Level = Read Level + Correct Factor.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the test modes have been tested, only the worst data record in the report.

8.8. SPURIOUS EMISSIONS BELOW 30M

8.8.1. 802.11b MODE

SPURIOUS EMISSIONS (LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)


9kHz~ 150kHz

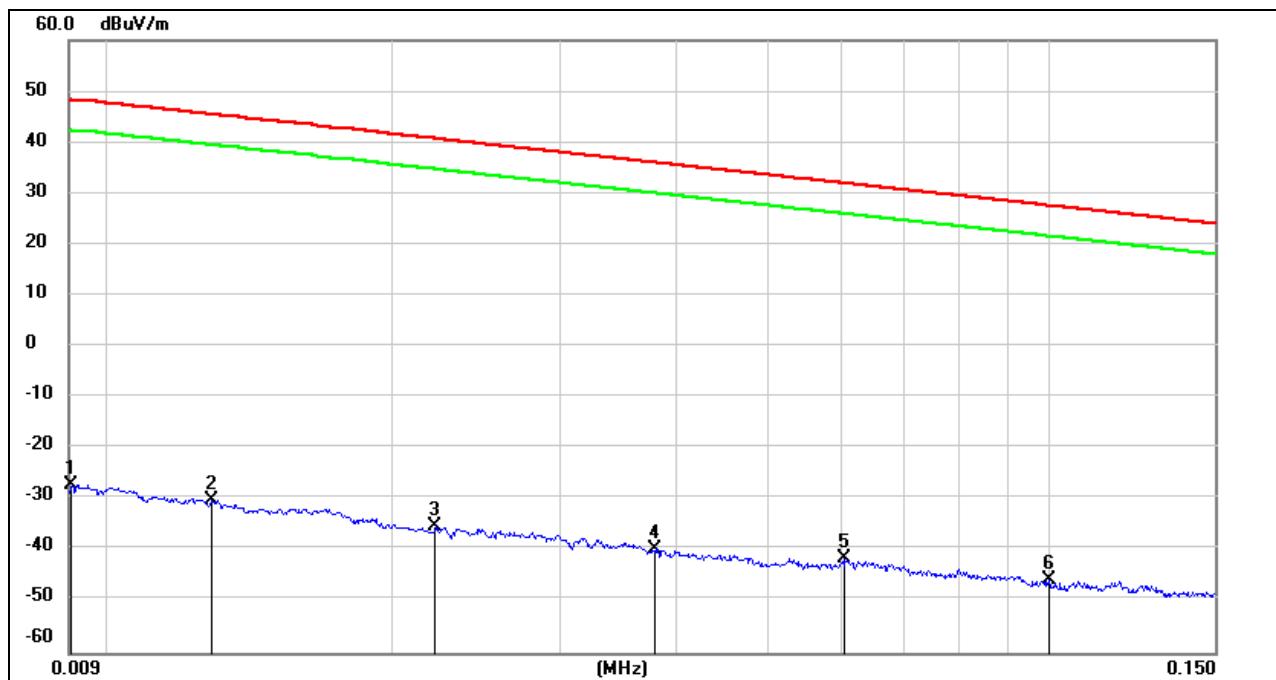

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | FCC Result (dBuV/m) | FCC Limit (dBuV/m) | ISED Result (dBuA/m) | ISED Limit (dBuA/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|--------------------------|----------------------------|---------------------------|----------------|--------|
| 1 | 0.0091 | 74.08 | -101.33 | -27.25 | 48.28 | -78.75 | -3.22 | -75.53 | peak |
| 2 | 0.0128 | 71.37 | -101.38 | -30.01 | 45.46 | -81.51 | -6.04 | -75.47 | peak |
| 3 | 0.0221 | 66.13 | -101.35 | -35.22 | 40.71 | -86.72 | -10.79 | -75.93 | peak |
| 4 | 0.0379 | 61.57 | -101.42 | -39.85 | 36.03 | -91.35 | -15.47 | -75.88 | peak |
| 5 | 0.0604 | 59.92 | -101.52 | -41.60 | 31.98 | -93.10 | -19.52 | -73.58 | peak |
| 6 | 0.1000 | 56.17 | -101.80 | -45.63 | 27.60 | -97.13 | -23.9 | -73.23 | peak |

Note:


1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}(120\pi) = \text{dBuV/m} - 51.5$.

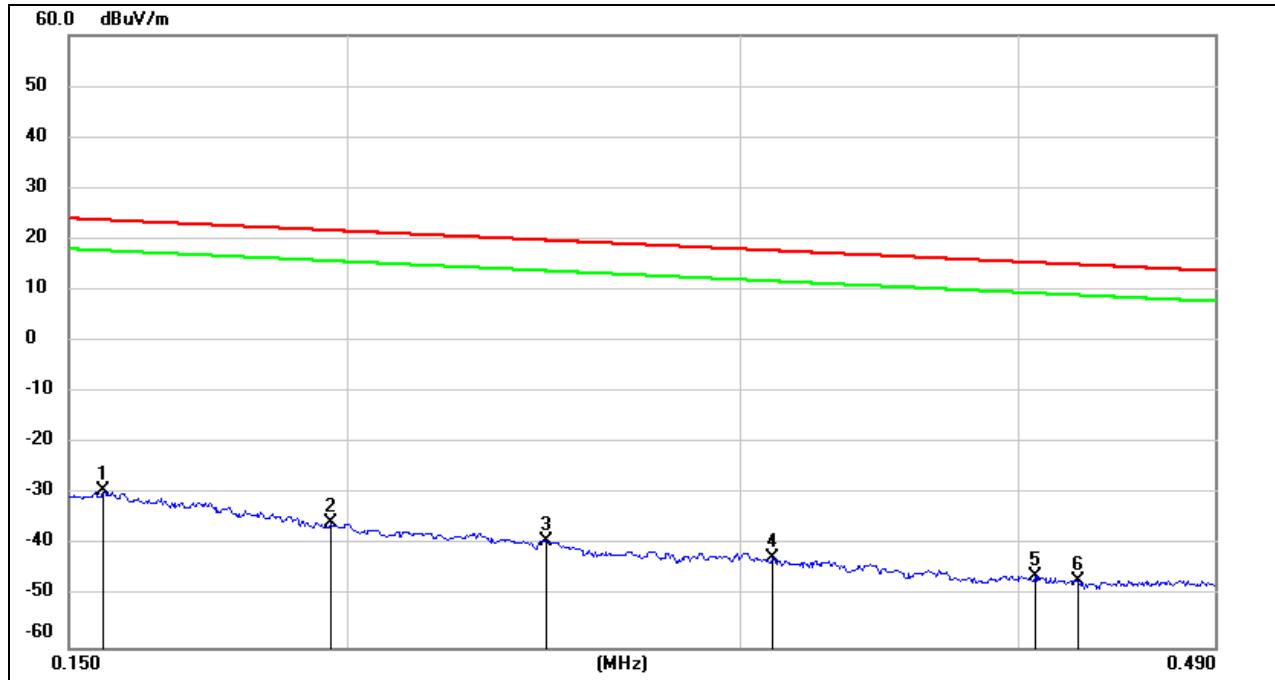150kHz ~ 490kHz

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | FCC Result (dBuV/m) | FCC Limit (dBuV/m) | ISED Result (dBuA/m) | ISED Limit (dBuA/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|--------------------------|----------------------------|---------------------------|----------------|--------|
| 1 | 0.1554 | 72.25 | -101.65 | -29.40 | 23.77 | -80.9 | -27.73 | -53.17 | peak |
| 2 | 0.1965 | 66.19 | -101.71 | -35.52 | 21.73 | -87.02 | -29.77 | -57.25 | peak |
| 3 | 0.2459 | 62.64 | -101.80 | -39.16 | 19.79 | -90.66 | -31.71 | -58.95 | peak |
| 4 | 0.3104 | 59.36 | -101.86 | -42.50 | 17.76 | -94.00 | -33.74 | -60.26 | peak |
| 5 | 0.4066 | 56.02 | -101.96 | -45.94 | 15.42 | -97.44 | -36.08 | -61.36 | peak |
| 6 | 0.4248 | 55.09 | -101.99 | -46.90 | 15.04 | -98.40 | -36.46 | -61.94 | peak |

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}(120\pi) = \text{dBuV/m} - 51.5$.

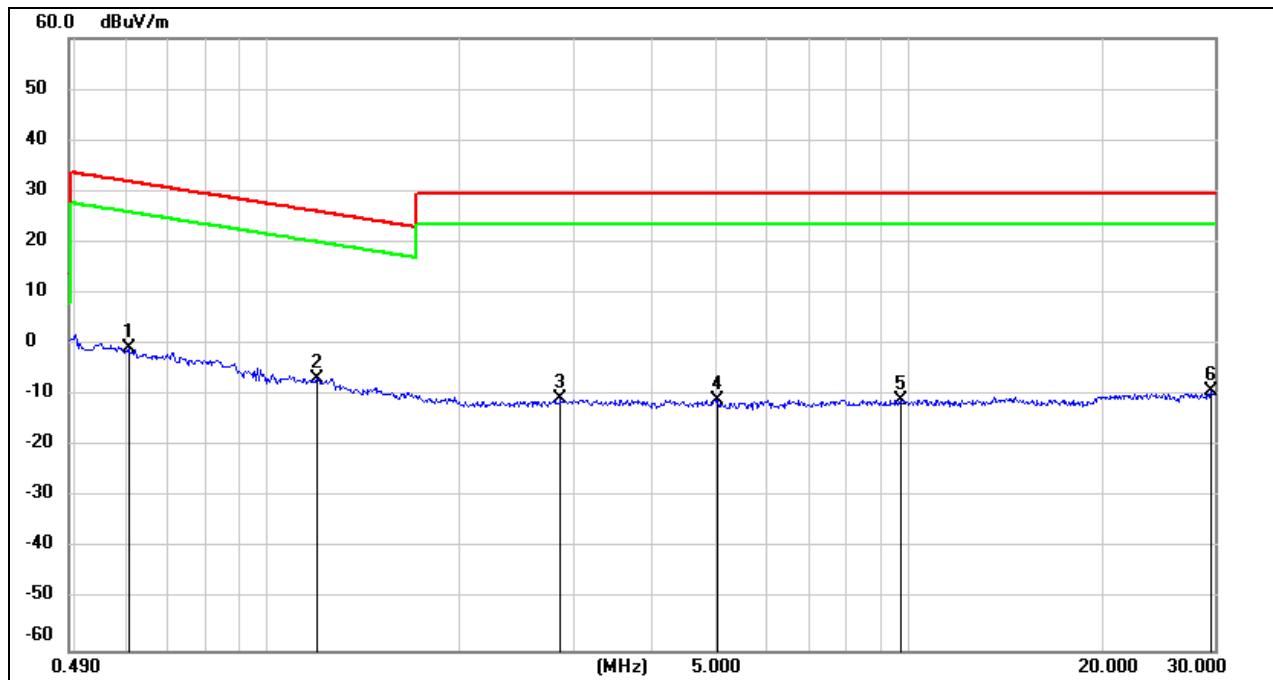490kHz ~ 30MHz

| No. | Frequency | Reading | Correct | FCC Result | FCC Limit | ISED Result | ISED Limit | Margin | Remark |
|-----|-----------|---------|---------|------------|-----------|-------------|------------|--------|--------|
| | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dBuA/m) | (dBuA/m) | (dB) | |
| 1 | 0.6078 | 61.48 | -62.09 | -0.61 | 31.93 | -52.11 | -19.57 | -32.54 | peak |
| 2 | 1.1915 | 55.57 | -62.18 | -6.61 | 26.08 | -58.11 | -25.42 | -32.69 | peak |
| 3 | 2.8628 | 50.82 | -61.61 | -10.79 | 29.54 | -62.29 | -21.96 | -40.33 | peak |
| 4 | 5.0345 | 50.52 | -61.49 | -10.97 | 29.54 | -62.47 | -21.96 | -40.51 | peak |
| 5 | 9.7263 | 49.94 | -60.84 | -10.90 | 29.54 | -62.40 | -21.96 | -40.44 | peak |
| 6 | 29.5868 | 50.72 | -60.01 | -9.29 | 29.54 | -60.79 | -21.96 | -38.83 | peak |

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
 4. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}(120\pi) = \text{dBuV/m} - 51.5$.

Note: All the test modes have been tested, only the worst data record in the report.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

| FREQUENCY (MHz) | Quasi-peak | Average |
|-----------------|------------|-----------|
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 56.00 | 46.00 |
| 5.0 -30.0 | 60.00 | 50.00 |

TEST SETUP AND PROCEDURE

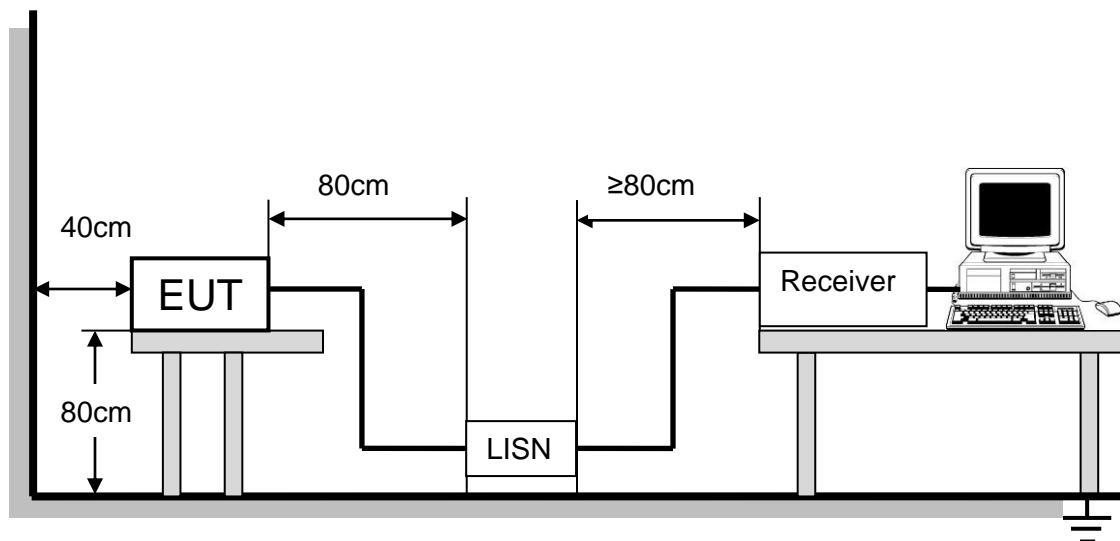


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


TEST ENVIRONMENT

| | | | |
|---------------------|--------|-------------------|---------|
| Temperature | 25.3°C | Relative Humidity | 55% |
| Atmosphere Pressure | 101kPa | Test Voltage | DC 3.7V |

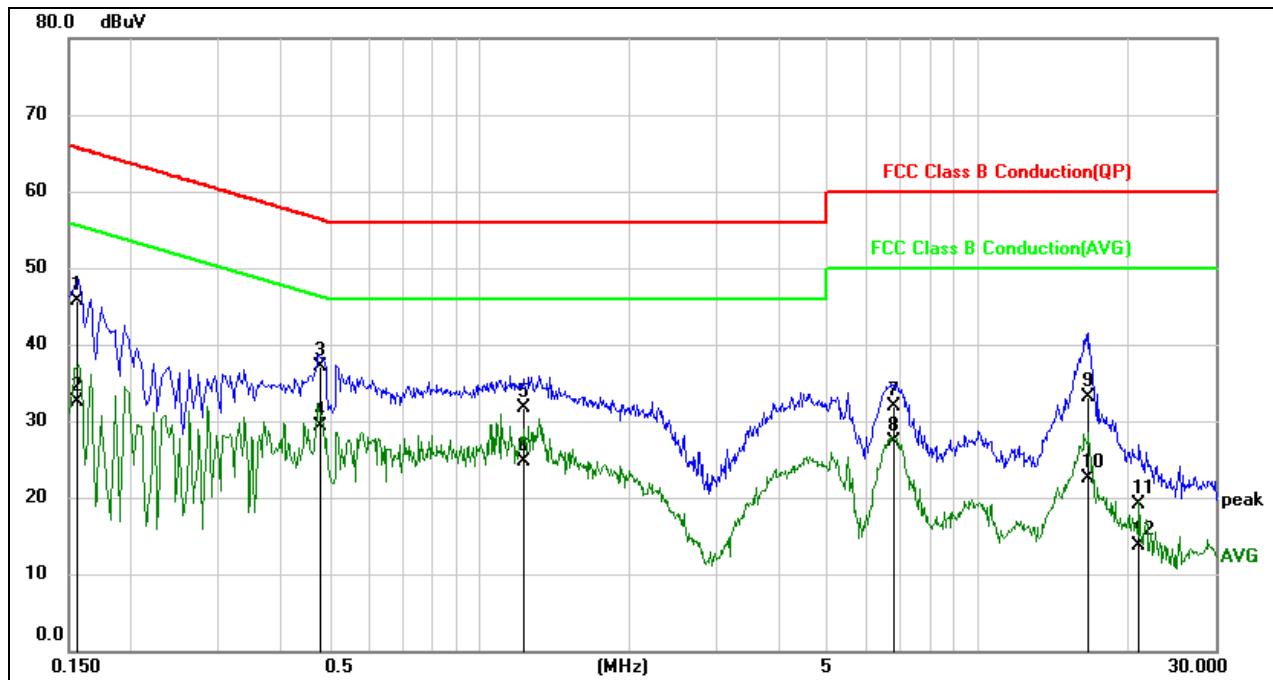TEST RESULTS**9.1. 802.11g MODE**LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|--------------|---------------|--------------|-------------|--------|
| 1 | 0.1556 | 36.05 | 9.60 | 45.65 | 65.70 | -20.05 | QP |
| 2 | 0.1556 | 22.83 | 9.60 | 32.43 | 55.70 | -23.27 | AVG |
| 3 | 0.4796 | 27.45 | 9.60 | 37.05 | 56.35 | -19.30 | QP |
| 4 | 0.4796 | 19.76 | 9.60 | 29.36 | 46.35 | -16.99 | AVG |
| 5 | 1.2256 | 22.18 | 9.61 | 31.79 | 56.00 | -24.21 | QP |
| 6 | 1.2256 | 15.13 | 9.61 | 24.74 | 46.00 | -21.26 | AVG |
| 7 | 6.7484 | 22.23 | 9.71 | 31.94 | 60.00 | -28.06 | QP |
| 8 | 6.7484 | 17.54 | 9.71 | 27.25 | 50.00 | -22.75 | AVG |
| 9 | 16.6749 | 23.05 | 10.01 | 33.06 | 60.00 | -26.94 | QP |
| 10 | 16.6749 | 12.46 | 10.01 | 22.47 | 50.00 | -27.53 | AVG |
| 11 | 21.0921 | 8.97 | 10.21 | 19.18 | 60.00 | -40.82 | QP |
| 12 | 21.0921 | 3.57 | 10.21 | 13.78 | 50.00 | -36.22 | AVG |

Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

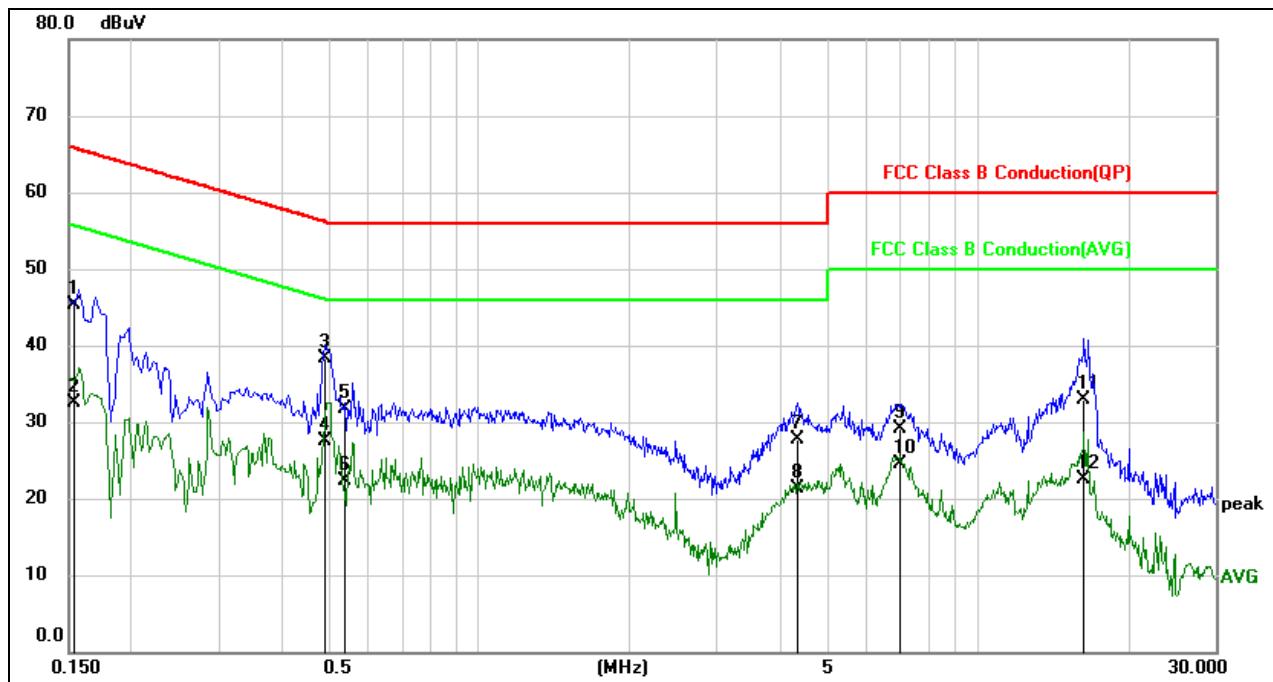LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1 | 0.1532 | 35.68 | 9.61 | 45.29 | 65.82 | -20.53 | QP |
| 2 | 0.1532 | 22.80 | 9.61 | 32.41 | 55.82 | -23.41 | AVG |
| 3 | 0.4907 | 28.64 | 9.60 | 38.24 | 56.16 | -17.92 | QP |
| 4 | 0.4907 | 17.86 | 9.60 | 27.46 | 46.16 | -18.70 | AVG |
| 5 | 0.5395 | 22.06 | 9.60 | 31.66 | 56.00 | -24.34 | QP |
| 6 | 0.5395 | 12.72 | 9.60 | 22.32 | 46.00 | -23.68 | AVG |
| 7 | 4.3563 | 18.10 | 9.66 | 27.76 | 56.00 | -28.24 | QP |
| 8 | 4.3563 | 11.56 | 9.66 | 21.22 | 46.00 | -24.78 | AVG |
| 9 | 6.9669 | 19.46 | 9.71 | 29.17 | 60.00 | -30.83 | QP |
| 10 | 6.9669 | 14.75 | 9.71 | 24.46 | 50.00 | -25.54 | AVG |
| 11 | 16.3731 | 22.94 | 9.92 | 32.86 | 60.00 | -27.14 | QP |
| 12 | 16.3731 | 12.66 | 9.92 | 22.58 | 50.00 | -27.42 | AVG |

Note: 1. Result = Reading +Correct Factor.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All test modes have been tested, only the worst data record in the report.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT