



TEST REPORT

Applicant Name : Hangzhou Roombanker Technology Co., Ltd.
Address : A#801 Wantong center, Hangzhou, China
Report Number: SH1220303-07083E-00A
FCC ID: 2AUXBDSGW-210B

Test Standard (s)

FCC PART 15.247

Sample Description

Product: HNT Indoor Hotspot Miner
Trademark: N/A
Tested Model: DSGW-210B
Date Received: 2022-03-03
Date of Test: 2022-03-08 to 2022-03-21
Report Date: 2022-03-30

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ting Lü
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
FCC §15.203 - ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP	16
TEST PROCEDURE	16
TRANSD FACTOR & MARGIN CALCULATION	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
FACTOR& MARGIN CALCULATION	23
TEST DATA	23
FCC §15.247(a) (2) – 6dB EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(d) – 100kHz BANDWIDTH OF FREQUENCY BAND EDGE	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST DATA	49
FCC §15.247(e)- POWER SPECTRAL DENSITY	50
APPLICABLE STANDARD	50

TEST PROCEDURE	50
TEST DATA	50
APPENDIX Wi-Fi.....	51
APPENDIX A: 6dB EMISSION BANDWIDTH.....	51
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	58
APPENDIX D: POWER SPECTRAL DENSITY	59
APPENDIX E: BAND EDGE MEASUREMENTS.....	66
APPENDIX F: DUTY CYCLE	70
APPENDIX BLE.....	73
APPENDIX A: 6dB EMISSION BANDWIDTH.....	73
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	75
APPENDIX D: POWER SPECTRAL DENSITY	77
APPENDIX E: BAND EDGE MEASUREMENTS.....	79
APPENDIX F: DUTY CYCLE	80

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	HNT Indoor Hotspot Miner
Trademark	N/A
Tested Model	DSGW-210B
Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	BLE: 6.5 dBm Wi-Fi: 22.58 dBm(802.11b), 21.64 dBm(802.11g) 20.15 dBm(802.11n20), 19.51 dBm(802.11n40)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	Wi-Fi: FPC Antenna: 3.19 dBi (provided by the applicant) BLE: FPC Antenna: 3.87 dBi (provided by the applicant)
Voltage Range	DC 5.0V from adapter
Sample serial number	SH1220303-07083E-RF-S1
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz- 18GHz	4.98dB
	18GHz- 26.5GHz	5.06dB
	26.5GHz- 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

802.11n-HT40 mode was tested with Channel 3, 6 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Software “putty”* was used to test provided by manufacturer and power level as below:

Item	Mode	Channel (MHz)	Data Rate (Mbps)	Power Level*
Wi-Fi	802.11 b	2412	1	45
		2437		42
		2462		40
	802.11 g	2412	6	45
		2437		45
		2462		42
	802.11 n20	2412	MCS0	42
		2437		42
		2462		40
	802.11 n40	2422	MCS0	40
		2437		40
		2452		40
BLE 1M	Default	Default	Default	80

The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	T430	Unknown
HUAWEI	Wireless ADSL Router	WS5100	Unknown
SanDisk	USB Disk	Unknown	Unknown
HUAWEI	Adapter	HW-100400C00C A38L1K1810009	Unknown

External I/O Cable


Cable Description	Length(m)	From Port	To
Power Cable	1.0	EUT	Adapter
Network cable	5.0	EUT	Router
Network cable	1.0	Notebook	Router

Block Diagram of Test Setup

For conducted emission:

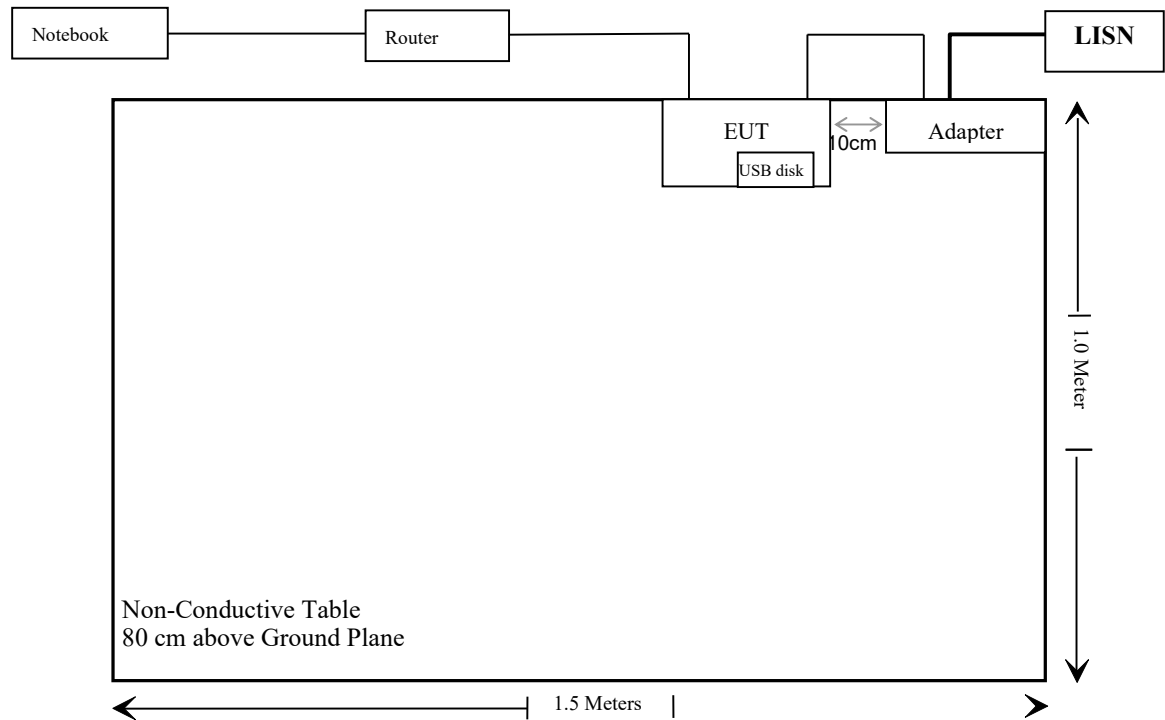

For Radiated Emission:

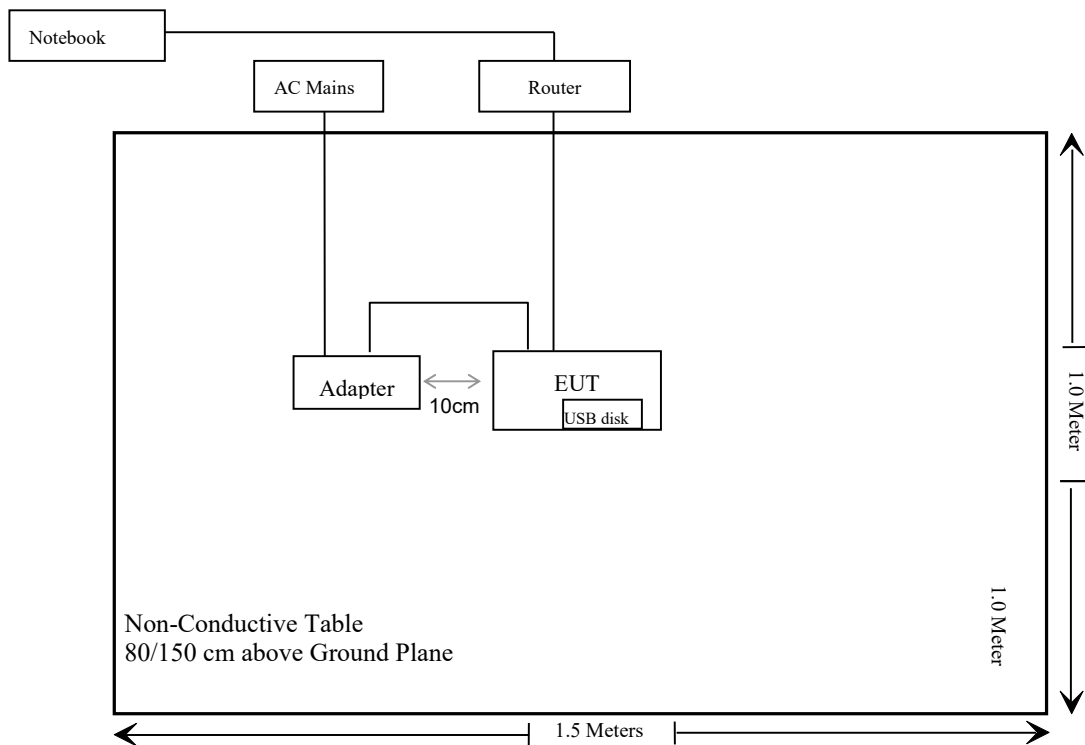

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i), §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/02/03	2023/02/02
R & S	L.I.S.N.	ENV216	101314	2021/12/25	2022/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2021/12/25	2022/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2021/12/25	2022/12/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2021/12/25	2022/12/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2021/05/18	2022/05/17
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/12/25	2022/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2021/11/28	2022/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/24	2022/12/23
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/25	2022/12/24
Unknown	RF Coaxial Cable	N-5m	No.3	2021/12/25	2022/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2021/12/25	2022/12/24
Unknown	RF Coaxial Cable	N-10m	No.7	2021/11/09	2022/11/08
Unknown	RF Coaxial Cable	N-2m	No.8	2021/11/09	2022/11/08
Radiated Emission Test Software: EZ EMC V 1.1.4.2					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101495	2021/12/24	2022/12/23
WEINSCHL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Roombanker	RF Cable	RoombankerC 01	C01	Each Time	N/A

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**Applicable Standard**

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result**Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For worst case:

Frequency (MHz)	Maximum Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	3.87	2.44	6.5	4.47	20	0.0022	1
2412-2462	3.19	2.09	23.0	199.53	20	0.0830	1
902.3-914.9	2.44	1.75	22.5	177.83	20	0.0619	0.6
923.3-927.5	2.44	1.75	27.0	501.19	20	0.1745	0.61

Note: 1. The tune up conducted power was declared by the applicant.
2. The BLE and Wi-Fi and LoRa can transmit at the same time.

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.083/1 + 0.1745/0.61 + 0.0022/1 = 0.3713 < 1$$

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two FPC antennas used arrangement for BLE/Wi-Fi, one FPC antenna used arrangement for 2.4G Wi-Fi, which was used a unique coupling and the antenna gain is 3.19 dBi, the other FPC antenna used arrangement for BLE, which was used a unique coupling and the antenna gain is 3.87 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

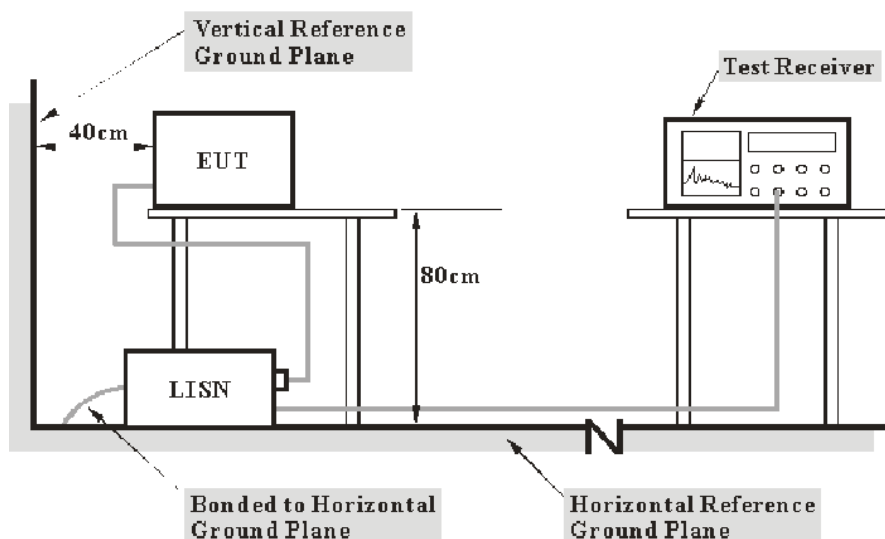

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23°C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa


The testing was performed by Bin Duanon 2022-03-08.

EUT operation mode: 2.4G Wi-Fi transmitting (Worst case as below)


AC 120V/60 Hz, Line

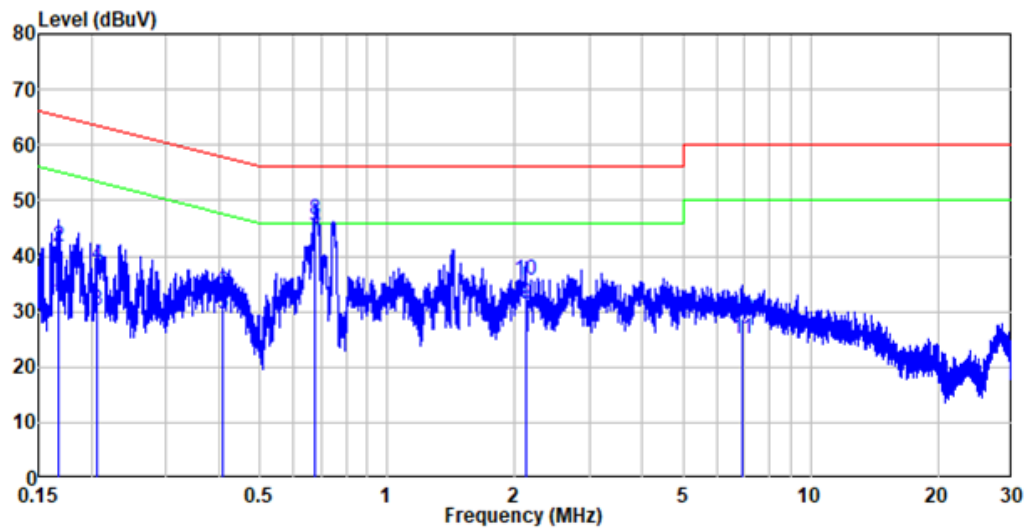

No.	Frequency	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.168	9.80	21.77	31.57	55.06	-23.49	Average
2	0.168	9.80	31.79	41.59	65.06	-23.47	QP
3	0.206	9.80	20.24	30.04	53.37	-23.33	Average
4	0.206	9.80	28.44	38.24	63.37	-25.13	QP
5	0.410	9.80	19.78	29.58	47.65	-18.07	Average
6	0.410	9.80	23.67	33.47	57.65	-24.18	QP
7	0.678	9.81	33.46	43.27	46.00	-2.73	Average
8	0.678	9.81	36.62	46.43	56.00	-9.57	QP
9	2.123	9.82	21.71	31.53	46.00	-14.47	Average
10	2.123	9.82	25.74	35.56	56.00	-20.44	QP
11	6.882	9.97	14.97	24.94	50.00	-25.06	Average
12	6.882	9.97	18.77	28.74	60.00	-31.26	QP

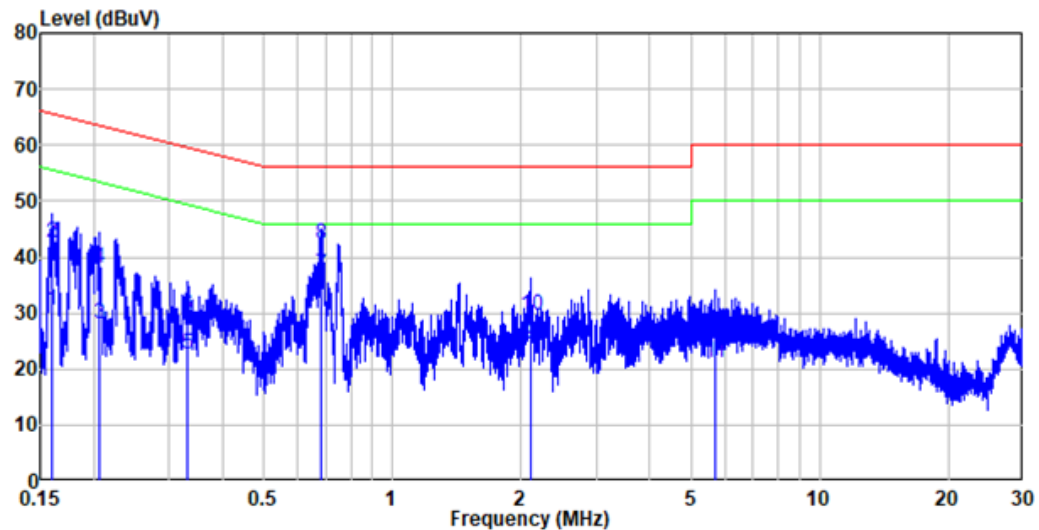
AC 120V/60 Hz, Neutral

No.	Frequency	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	9.80	20.75	30.55	55.44	-24.89	Average
2	0.160	9.80	32.88	42.68	65.44	-22.76	QP
3	0.207	9.80	18.17	27.97	53.34	-25.37	Average
4	0.207	9.80	28.13	37.93	63.34	-25.41	QP
5	0.331	9.80	12.81	22.61	49.44	-26.83	Average
6	0.331	9.80	19.87	29.67	59.44	-29.77	QP
7	0.684	9.81	27.09	36.90	46.00	-9.10	Average
8	0.684	9.81	32.30	42.11	56.00	-13.89	QP
9	2.107	9.82	14.58	24.40	46.00	-21.60	Average
10	2.107	9.82	19.66	29.48	56.00	-26.52	QP
11	5.713	9.86	11.17	21.03	50.00	-28.97	Average
12	5.713	9.86	16.34	26.20	60.00	-33.80	QP

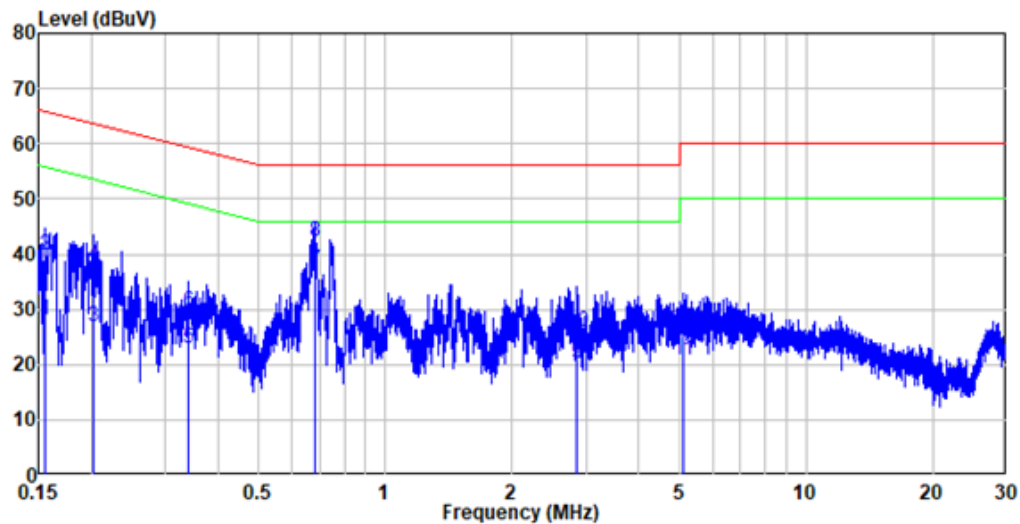Wi-Fi & BLE & LoRa Transmitting simultaneously test:**AC 120V/60 Hz, Line**

No.	Frequency	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	9.80	18.27	28.07	55.70	-27.63	Average
2	0.156	9.80	30.13	39.93	65.70	-25.77	QP
3	0.203	9.80	17.07	26.87	53.49	-26.62	Average
4	0.203	9.80	28.15	37.95	63.49	-25.54	QP
5	0.341	9.80	13.27	23.07	49.18	-26.11	Average
6	0.341	9.80	19.89	29.69	59.18	-29.49	QP
7	0.682	9.81	27.18	36.99	46.00	-9.01	Average
8	0.682	9.81	32.46	42.27	56.00	-13.73	QP
9	2.843	9.83	10.47	20.30	46.00	-25.70	Average
10	2.843	9.83	16.02	25.85	56.00	-30.15	QP
11	5.112	9.85	11.06	20.91	50.00	-29.09	Average
12	5.112	9.85	16.57	26.42	60.00	-33.58	QP

AC 120V/60 Hz, Neutral

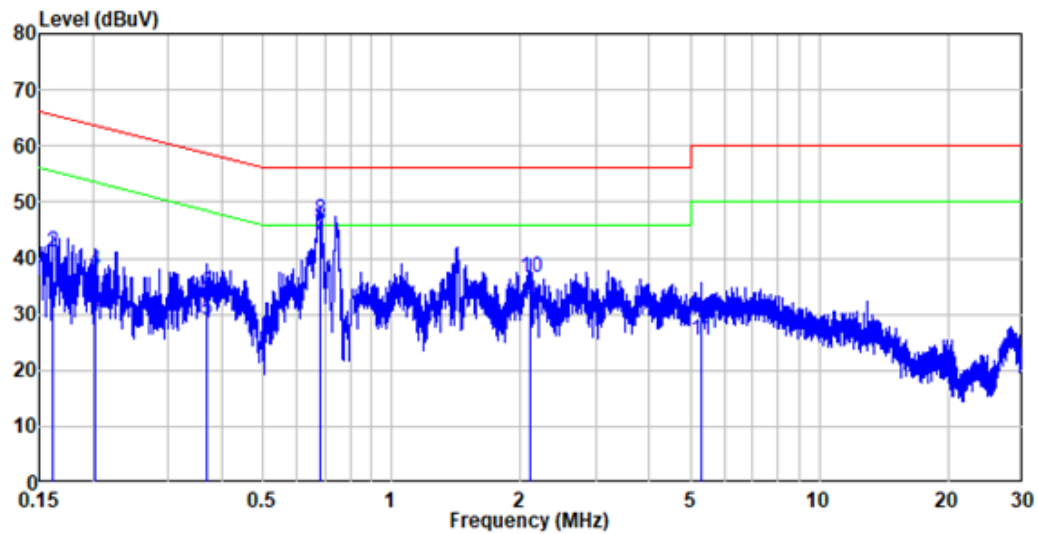

No.	Frequency	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.162	9.80	21.47	31.27	55.37	-24.10	Average
2	0.162	9.80	31.13	40.93	65.37	-24.44	QP
3	0.203	9.80	20.48	30.28	53.49	-23.21	Average
4	0.203	9.80	27.96	37.76	63.49	-25.73	QP
5	0.371	9.80	19.16	28.96	48.47	-19.51	Average
6	0.371	9.80	24.15	33.95	58.47	-24.52	QP
7	0.682	9.81	34.29	44.10	46.00	-1.90	Average
8	0.682	9.81	37.10	46.91	56.00	-9.09	QP
9	2.112	9.82	22.92	32.74	46.00	-13.26	Average
10	2.112	9.82	26.67	36.49	56.00	-19.51	QP
11	5.291	9.90	15.51	25.41	50.00	-24.59	Average
12	5.291	9.90	19.24	29.14	60.00	-30.86	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

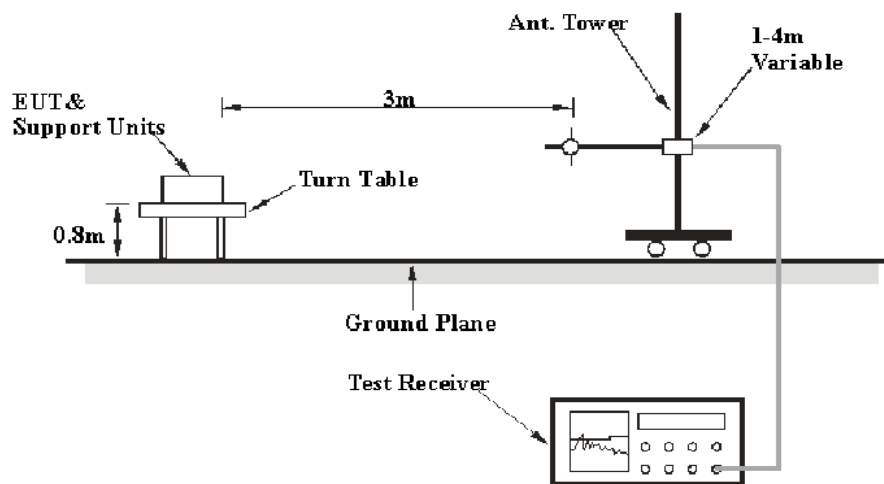

Above 1GHz:

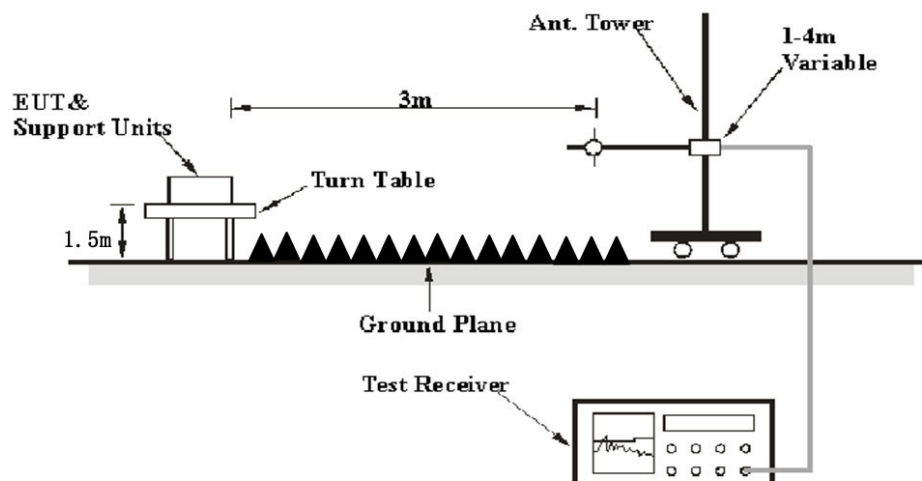

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor& Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor/Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Result/Corrected Amplitude} - \text{Limit} \\ \text{Result/Corrected Amplitude} &= \text{Read Level/Reading} + \text{Factor/Correct Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23~24°C
Relative Humidity:	48~49%
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2022-03-15 for below 1GHz and 2022-03-16 for above 1GHz.


EUT operation mode: Transmitting

(Scan with BLE, 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 mode at X axis, Y axis, Z axis, the worst case is at Z axis)

30MHz-1GHz (Worst case):


Wi-Fi: 802.11B mode, Middle Channel

Horizontal

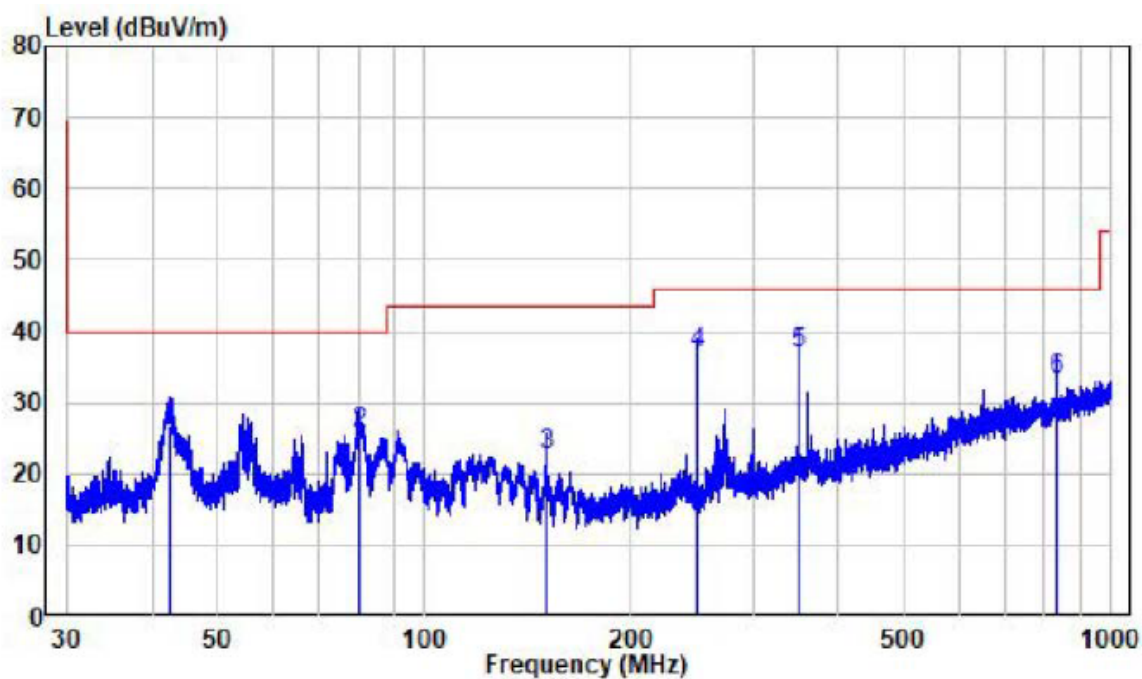


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.451	-10.00	36.83	26.83	40.00	-13.17	QP
2	80.010	-16.79	42.50	25.71	40.00	-14.29	QP
3	150.011	-15.27	37.91	22.64	43.50	-20.86	QP
4	249.972	-10.74	47.53	36.79	46.00	-9.21	QP
5	350.016	-7.31	44.28	36.97	46.00	-9.03	QP
6	834.048	0.17	33.17	33.34	46.00	-12.66	QP

Vertical

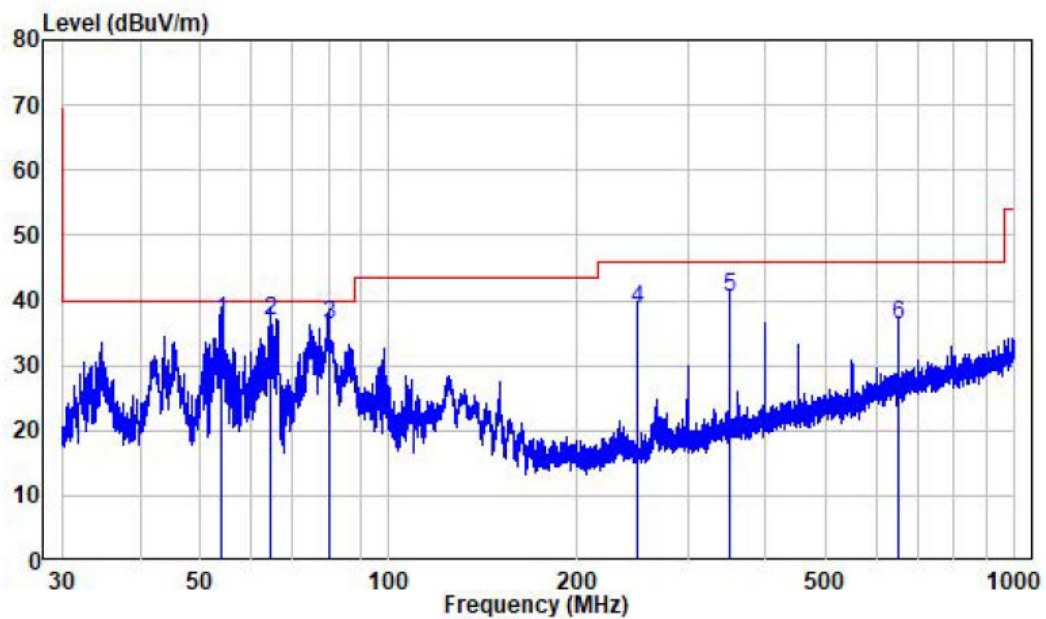


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	53.905	-10.33	47.14	36.81	40.00	-3.19	QP
2	64.801	-12.44	49.24	36.80	40.00	-3.20	QP
3	80.010	-16.79	53.12	36.33	40.00	-3.67	QP
4	249.972	-10.74	49.50	38.76	46.00	-7.24	QP
5	350.016	-7.31	47.75	40.44	46.00	-5.56	QP
6	650.229	-1.72	37.90	36.18	46.00	-9.82	QP

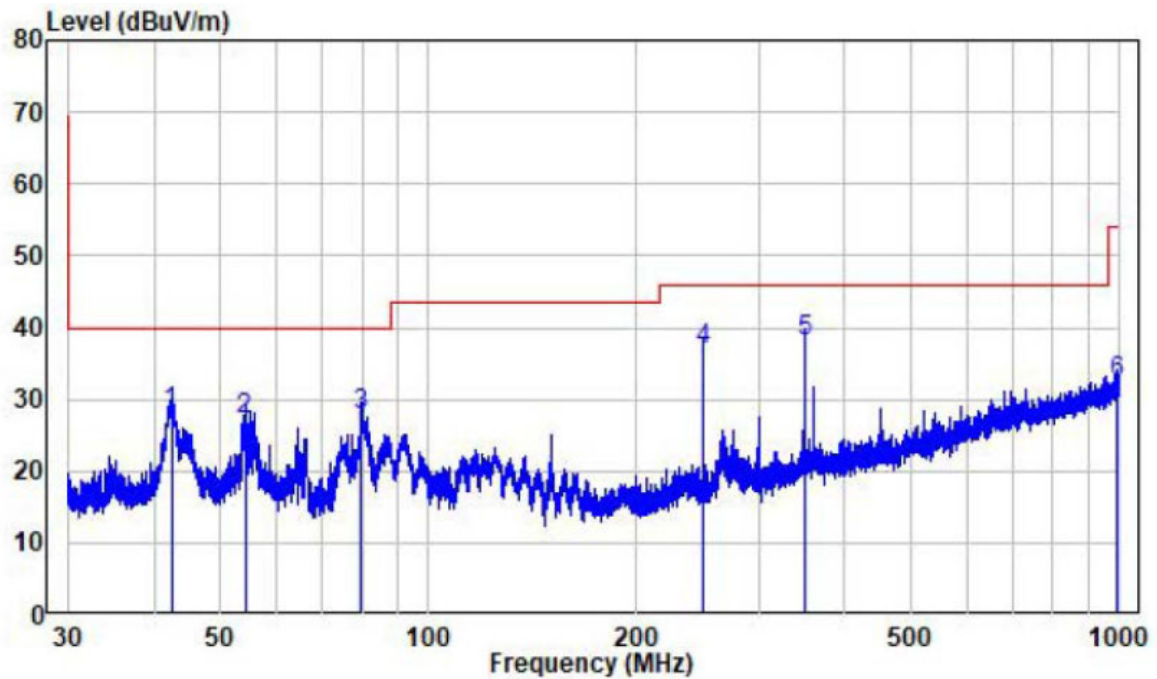
BLE (1M), High Channel:**Horizontal**

	Freq Factor		Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.376	-10.00	38.16	28.16	40.00	-11.84	QP
2	54.166	-10.34	37.65	27.31	40.00	-12.69	QP
3	79.975	-16.79	44.50	27.71	40.00	-12.29	QP
4	249.972	-10.74	47.46	36.72	46.00	-9.28	QP
5	350.016	-7.31	45.29	37.98	46.00	-8.02	QP
6	989.536	2.80	29.36	32.16	54.00	-21.84	QP


Vertical

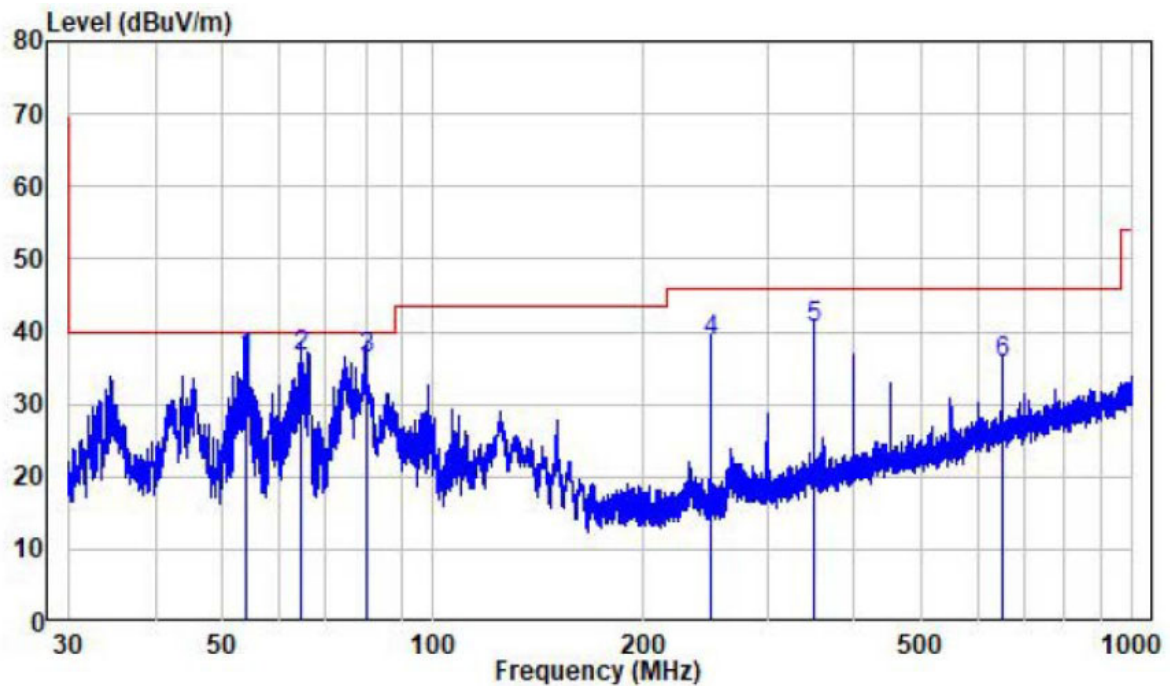

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	53.858	-10.32	46.56	36.24	40.00	-3.76	QP
2	64.773	-12.43	49.02	36.59	40.00	-3.41	QP
3	80.010	-16.79	53.05	36.26	40.00	-3.74	QP
4	249.972	-10.74	49.28	38.54	46.00	-7.46	QP
5	350.016	-7.31	47.69	40.38	46.00	-5.62	QP
6	650.229	-1.72	37.49	35.77	46.00	-10.23	QP

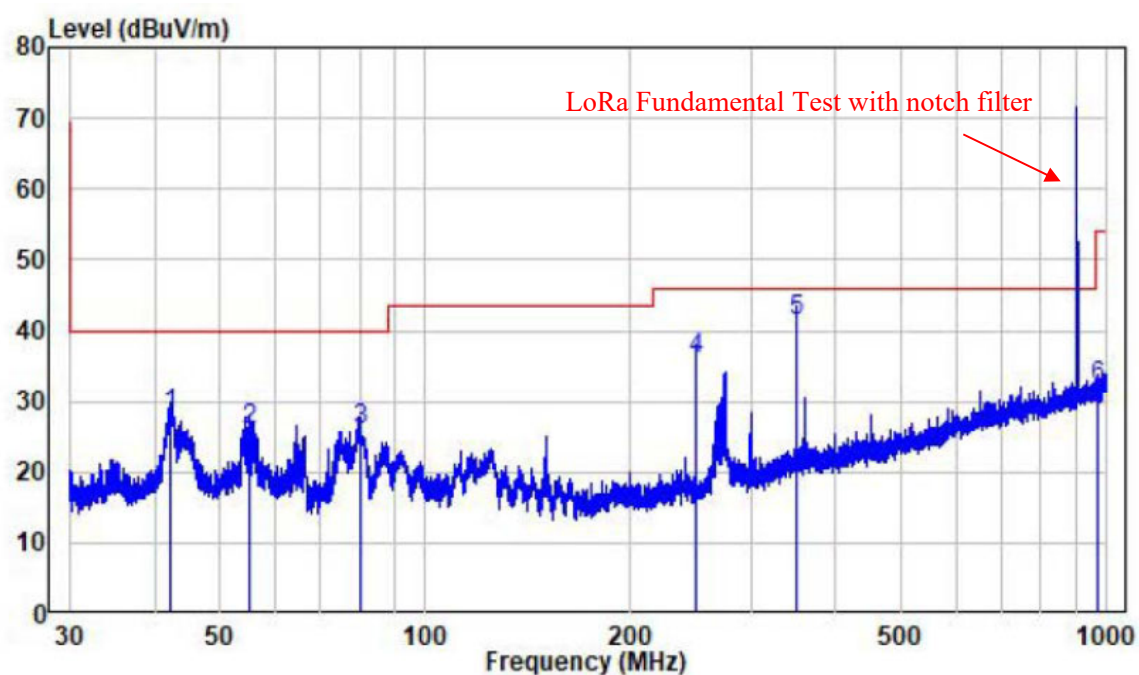Wi-Fi & BLE & LoRa Transmitting simultaneously test:

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.228	-10.01	38.02	28.01	40.00	-11.99	QP
2	55.293	-10.26	36.26	26.00	40.00	-14.00	QP
3	80.010	-16.79	42.67	25.88	40.00	-14.12	QP
4	249.972	-10.74	46.67	35.93	46.00	-10.07	QP
5	350.016	-7.31	48.76	41.45	46.00	-4.55	QP
6	971.911	2.43	29.43	31.86	54.00	-22.14	QP

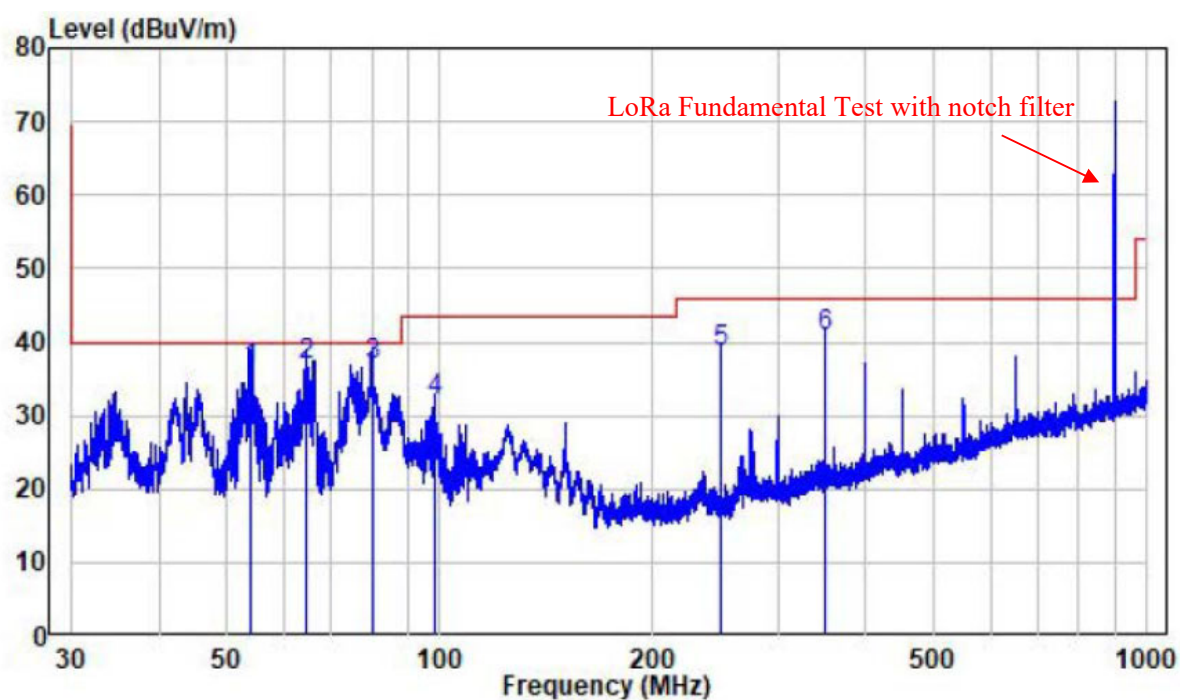

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	53.835	-10.32	46.40	36.08	40.00	-3.92	QP
2	64.773	-12.43	49.33	36.90	40.00	-3.10	QP
3	80.010	-16.79	53.69	36.90	40.00	-3.10	QP
4	98.400	-12.16	44.17	32.01	43.50	-11.49	QP
5	249.972	-10.74	49.48	38.74	46.00	-7.26	QP
6	350.016	-7.31	47.94	40.63	46.00	-5.37	QP

1-18 GHz:**BLE:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
BLE 1M Low channel									
2310	50.69	PK	190	1.5	H	-7.24	43.45	74	-30.55
2310	41.83	AV	190	1.5	H	-7.24	34.59	54	-19.41
2310	50.65	PK	353	2	V	-7.24	43.41	74	-30.59
2310	41.75	AV	353	2	V	-7.24	34.51	54	-19.49
2390	51.13	PK	344	2	H	-7.22	43.91	74	-30.09
2390	42.10	AV	344	2	H	-7.24	34.86	54	-19.14
2390	51.07	PK	152	1.7	V	-7.22	43.85	74	-30.15
2390	42.03	AV	152	1.7	V	-7.22	34.81	54	-19.19
7206	51.32	PK	245	1.8	H	2.70	54.02	74	-19.98
7206	46.18	AV	245	1.8	H	2.70	48.88	54	-5.12
7206	53.35	PK	171	2.2	V	2.70	56.05	74	-17.95
7206	48.26	AV	171	2.2	V	2.70	50.96	54	-3.04
BLE 1M Middle channel									
7320	52.96	PK	303	1.6	H	3.31	54.56	74	-19.44
7320	46.97	AV	303	1.6	H	3.31	48.57	54	-5.43
7320	54.63	PK	151	2.1	V	3.31	56.73	74	-17.27
7320	48.67	AV	151	2.1	V	3.31	50.77	54	-3.23
BLE 1M High channel									
2483.5	51.78	PK	210	1.6	H	-7.20	44.58	74	-29.42
2483.5	42.91	AV	210	1.6	H	-7.20	35.71	54	-18.29
2483.5	50.41	PK	151	2.2	V	-7.20	43.21	74	-30.79
2483.5	41.82	AV	151	2.2	V	-7.20	34.62	54	-19.38
2500	52.15	PK	225	1.4	H	-7.18	44.97	74	-29.03
2500	43.06	AV	225	1.4	H	-7.18	35.88	54	-18.12
2500	51.30	PK	287	1.7	V	-7.18	44.12	74	-29.88
2500	42.55	AV	287	1.7	V	-7.18	35.37	54	-18.63
7440	52.57	PK	3	1.5	H	3.53	56.1	74	-17.90
7440	46.77	AV	3	1.5	H	3.53	50.3	54	-3.70
7440	53.95	PK	325	2.2	V	3.53	57.48	74	-16.52
7440	47.88	AV	325	2.2	V	3.53	51.41	54	-2.59

Wi-Fi:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11B Low channel									
2310	50.43	PK	150	1.8	H	-7.24	43.19	74	-30.81
2310	41.81	AV	150	1.8	H	-7.24	34.57	54	-19.43
2310	50.36	PK	45	2.2	V	-7.24	43.12	74	-30.88
2310	41.58	AV	45	2.2	V	-7.24	34.34	54	-19.66
2390	50.84	PK	36	1.5	H	-7.22	43.62	74	-30.38
2390	41.96	AV	36	1.5	H	-7.22	34.74	54	-19.26
2390	50.76	PK	150	1.7	V	-7.22	43.54	74	-30.46
2390	41.78	AV	150	1.7	V	-7.22	34.56	54	-19.44
4824	55.19	PK	260	2.1	H	-3.52	51.67	74	-22.33
4824	52.37	AV	260	2.1	H	-3.52	48.85	54	-5.15
4824	56.97	PK	61	1.6	V	-3.52	53.45	74	-20.55
4824	53.94	AV	61	1.6	V	-3.52	50.42	54	-3.58
802.11B Middle channel									
4874	54.92	PK	171	1.8	H	-3.42	51.5	74	-22.5
4874	53.52	AV	171	1.8	H	-3.42	50.10	54	-3.90
4874	55.23	PK	230	2.1	V	-3.42	51.81	74	-22.19
4874	54.51	AV	230	2.1	V	-3.42	51.09	54	-2.91
802.11B High channel									
2483.5	52.26	PK	194	2.2	H	-7.20	45.06	74	-28.94
2483.5	43.11	AV	194	2.2	H	-7.20	35.91	54	-18.09
2483.5	51.77	PK	36	1.6	V	-7.20	44.57	74	-29.43
2483.5	42.18	AV	36	1.6	V	-7.20	34.98	54	-19.02
2500	50.63	PK	331	1.8	H	-7.18	43.45	74	-30.55
2500	41.93	AV	331	1.8	H	-7.18	34.75	54	-19.25
2500	50.52	PK	67	1.5	V	-7.18	43.34	74	-30.66
2500	41.69	AV	67	1.5	V	-7.18	34.51	54	-19.49
4924	52.53	PK	258	1.8	H	-3.16	49.37	74	-24.63
4924	51.14	AV	258	1.8	H	-3.16	47.98	54	-6.02
4924	55.23	PK	67	2.4	V	-3.16	52.07	74	-21.93
4924	54.03	AV	67	2.4	V	-3.16	50.87	54	-3.13
802.11G Low channel									
2310	50.38	PK	105	2	H	-7.24	43.14	74	-30.86
2310	41.75	AV	105	2	H	-7.24	34.51	54	-19.49
2310	50.27	PK	336	1.6	V	-7.24	43.03	74	-30.97
2310	41.69	AV	336	1.6	V	-7.24	34.45	54	-19.55
2390	66.39	PK	190	1.7	H	-7.22	59.17	74	-14.83
2390	58.73	AV	190	1.7	H	-7.22	51.51	54	-2.49
2390	63.58	PK	351	1.5	V	-7.22	56.36	74	-17.64
2390	56.09	AV	351	1.5	V	-7.22	48.87	54	-5.13
4824	48.49	PK	110	1.3	H	-3.52	44.97	74	-29.03
4824	39.76	AV	110	1.3	H	-3.52	36.24	54	-17.76
4824	48.90	PK	180	2.1	V	-3.52	45.38	74	-28.62
4824	40.49	AV	180	2.1	V	-3.52	36.97	54	-17.03

802.11G Middle channel									
4874	49.27	PK	197	1.4	H	-3.42	45.85	74	-28.15
4874	40.58	AV	197	1.4	H	-3.42	37.16	54	-16.84
4874	48.45	PK	110	1.9	V	-3.42	45.03	74	-28.97
4874	40.30	AV	110	1.9	V	-3.42	36.88	54	-17.12
802.11G High channel									
2483.5	66.42	PK	110	1.5	H	-7.20	59.22	74	-14.78
2483.5	57.42	AV	110	1.5	H	-7.20	50.22	54	-3.78
2483.5	63.87	PK	357	1.6	V	-7.20	56.67	74	-17.33
2483.5	54.84	AV	357	1.6	V	-7.20	47.64	54	-6.36
2500	51.56	PK	240	1.2	H	-7.18	44.38	74	-29.62
2500	42.17	AV	240	1.2	H	-7.20	34.97	54	-19.03
2500	51.49	PK	15	1.8	V	-7.18	44.31	74	-29.69
2500	41.88	AV	15	1.8	V	-7.20	34.68	54	-19.32
4924	48.44	PK	78	1.4	H	-3.16	45.28	74	-28.72
4924	39.61	AV	78	1.4	H	-3.16	36.45	54	-17.55
4924	48.76	PK	156	1.7	V	-3.16	45.6	74	-28.4
4924	39.80	AV	156	1.7	V	-3.16	36.64	54	-17.36
802.11N20 Low channel									
2310	50.48	PK	332	1.5	H	-7.24	43.24	74	-30.76
2310	42.19	AV	332	1.5	H	-7.24	34.95	54	-19.05
2310	50.35	PK	115	1.7	V	-7.24	43.11	74	-30.89
2310	41.88	AV	115	1.7	V	-7.24	34.64	54	-19.36
2390	66.05	PK	266	1.9	H	-7.22	58.83	74	-15.17
2390	56.98	AV	266	1.9	H	-7.22	49.76	54	-4.24
2390	63.44	PK	50	2.2	V	-7.22	56.22	74	-17.78
2390	54.57	AV	50	2.2	V	-7.22	47.35	54	-6.65
4824	48.50	PK	331	1.8	H	-3.52	44.98	74	-29.02
4824	40.63	AV	331	1.8	H	-3.52	37.11	54	-16.89
4824	48.54	PK	68	2.3	V	-3.52	45.02	74	-28.98
4824	40.89	AV	68	2.3	V	-3.52	37.37	54	-16.63
802.11N20 Middle channel									
4874	48.78	PK	310	1.3	H	-3.42	45.36	74	-28.64
4874	39.09	AV	310	1.3	H	-3.42	35.67	54	-18.33
4874	49.24	PK	255	1.8	V	-3.42	45.82	74	-28.18
4874	39.47	AV	255	1.8	V	-3.42	36.05	54	-17.95
802.11N20 High channel									
2483.5	64.84	PK	210	2.2	H	-7.20	57.64	74	-16.36
2483.5	57.47	AV	210	2.2	H	-7.20	50.27	54	-3.73
2483.5	62.07	PK	359	1.5	V	-7.20	54.87	74	-19.13
2483.5	54.59	AV	359	1.5	V	-7.20	47.39	54	-6.61
2500	50.93	PK	250	2.5	H	-7.18	43.75	74	-30.25
2500	42.29	AV	250	2.5	H	-7.18	35.11	54	-18.89
2500	50.74	PK	115	2.1	V	-7.18	43.56	74	-30.44
2500	42.25	AV	115	2.1	V	-7.18	35.07	54	-18.93
4924	48.31	PK	324	1.6	H	-3.16	45.15	74	-28.85
4924	39.47	AV	324	1.6	H	-3.16	36.31	54	-17.69
4924	48.41	PK	69	1.9	V	-3.16	45.25	74	-28.75
4924	39.59	AV	69	1.9	V	-3.16	36.43	54	-17.57

802.11N40 Low channel									
2310	50.48	PK	105	2.4	H	-7.24	43.24	74	-30.76
2310	42.22	AV	105	2.4	H	-7.24	34.98	54	-19.02
2310	50.40	PK	89	1.5	V	-7.24	43.16	74	-30.84
2310	41.79	AV	89	1.5	V	-7.24	34.55	54	-19.45
2390	64.56	PK	26	1.4	H	-7.22	57.34	74	-16.66
2390	57.00	AV	26	1.4	H	-7.22	49.78	54	-4.22
2390	61.78	PK	314	1.3	V	-7.22	54.56	74	-19.44
2390	53.91	AV	314	1.3	V	-7.22	46.69	54	-7.31
4844	48.65	PK	187	1.6	H	-3.54	45.11	74	-28.89
4844	39.10	AV	187	1.6	H	-3.54	35.56	54	-18.44
4844	48.67	PK	94	1.8	V	-3.54	45.13	74	-28.87
4844	39.83	AV	94	1.8	V	-3.54	36.29	54	-17.71
802.11N40 Middle channel									
4874	48.73	PK	96	1.4	H	-3.42	45.31	74	-28.69
4874	39.61	AV	96	1.4	H	-3.42	36.19	54	-17.81
4874	49.22	PK	68	1.8	V	-3.42	45.8	74	-28.20
4874	40.25	AV	68	1.8	V	-3.42	36.83	54	-17.17
802.11N40 High channel									
2483.5	62.01	PK	280	2.3	H	-7.20	54.81	74	-19.19
2483.5	56.66	AV	280	2.3	H	-7.20	49.46	54	-4.54
2483.5	59.69	PK	344	1.9	V	-7.20	52.49	74	-21.51
2483.5	55.07	AV	344	1.9	V	-7.20	47.87	54	-6.13
2500	51.74	PK	311	1.8	H	-7.18	44.56	74	-29.44
2500	42.44	AV	311	1.8	H	-7.18	35.26	54	-18.74
2500	51.23	PK	277	1.5	V	-7.18	44.05	74	-29.95
2500	42.32	AV	277	1.5	V	-7.18	35.14	54	-18.86
4904	48.61	PK	189	1.6	H	-3.26	45.35	74	-28.65
4904	39.83	AV	189	1.6	H	-3.26	36.57	54	-17.43
4904	48.85	PK	91	1.7	V	-3.26	45.59	74	-28.41
4904	40.33	AV	91	1.7	V	-3.26	37.07	54	-16.93

Wi-Fi & BLE & LoRa Transmitting simultaneously test:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
Wi-Fi &BLE& LoRa Transmitting simultaneously									
4924	55.46	PK	164	2.2	H	-3.16	52.30	74	-21.70
4924	53.96	AV	164	2.2	H	-3.16	50.80	54	-3.20
4924	55.85	PK	258	1.7	V	-3.16	52.69	74	-21.31
4924	53.26	AV	258	1.7	V	-3.16	50.10	54	-3.90

Note:

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude–Limit


The other spurious emission which is in the noise floor level was not recorded.

1-18 GHz (Worst case):


**Pre-scan plots
802.11 b Middle Channel
Horizontal**

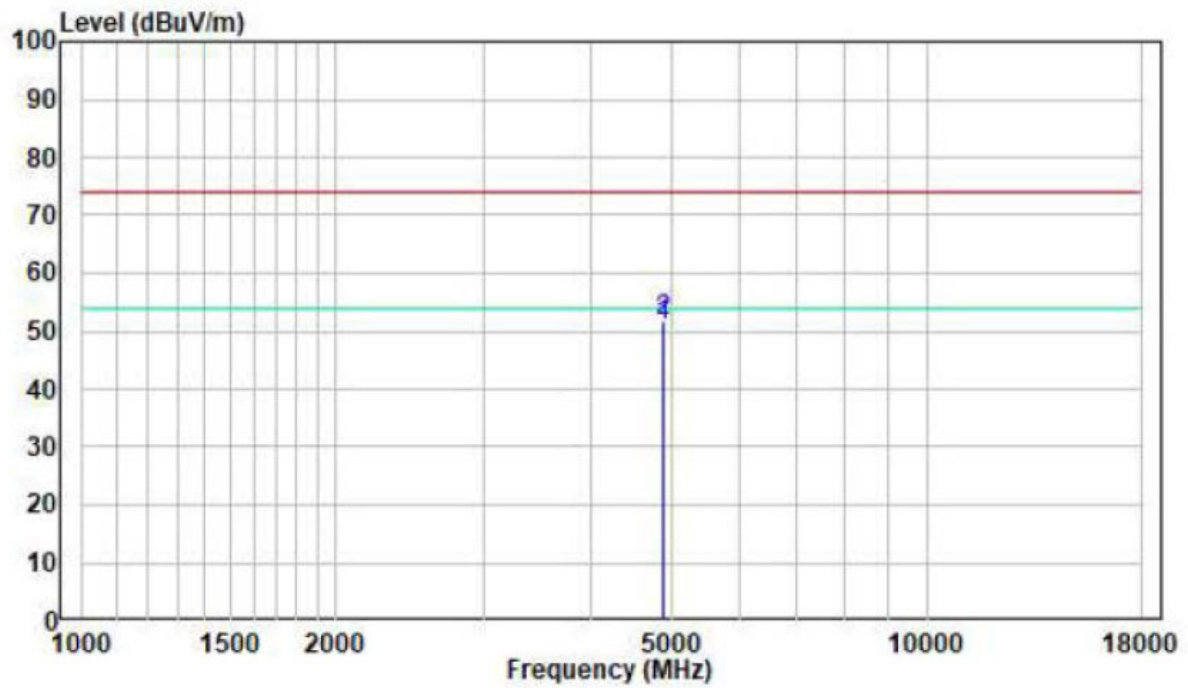


Vertical

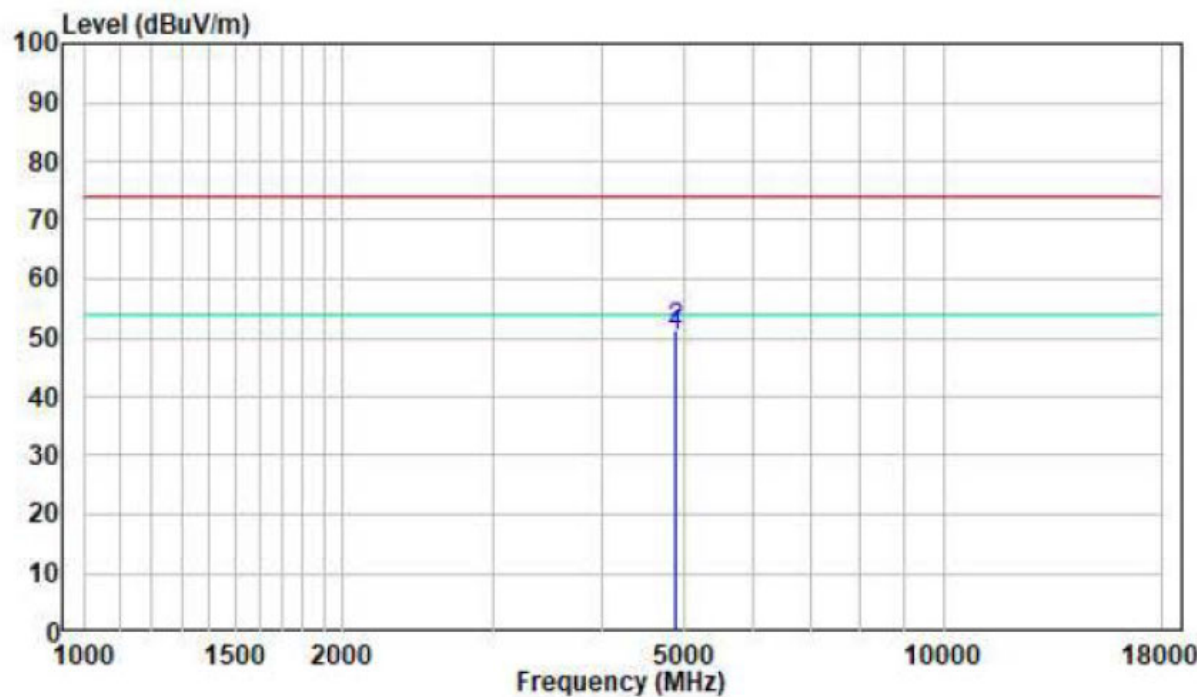

BLE High Channel
Horizontal

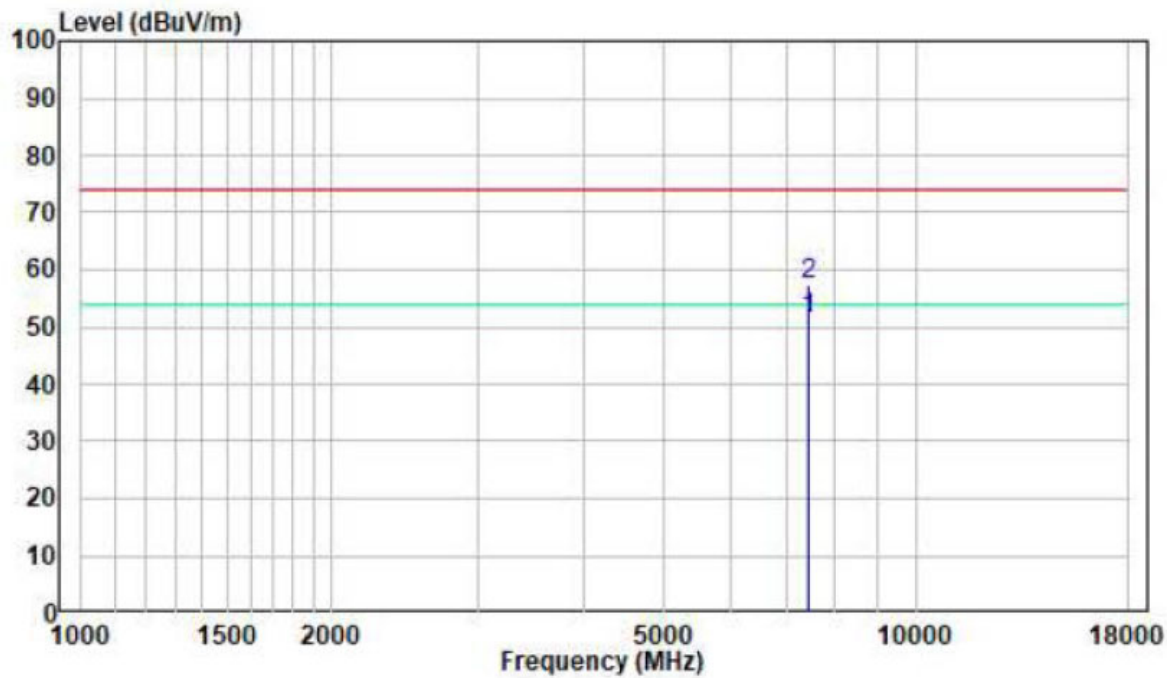


Vertical

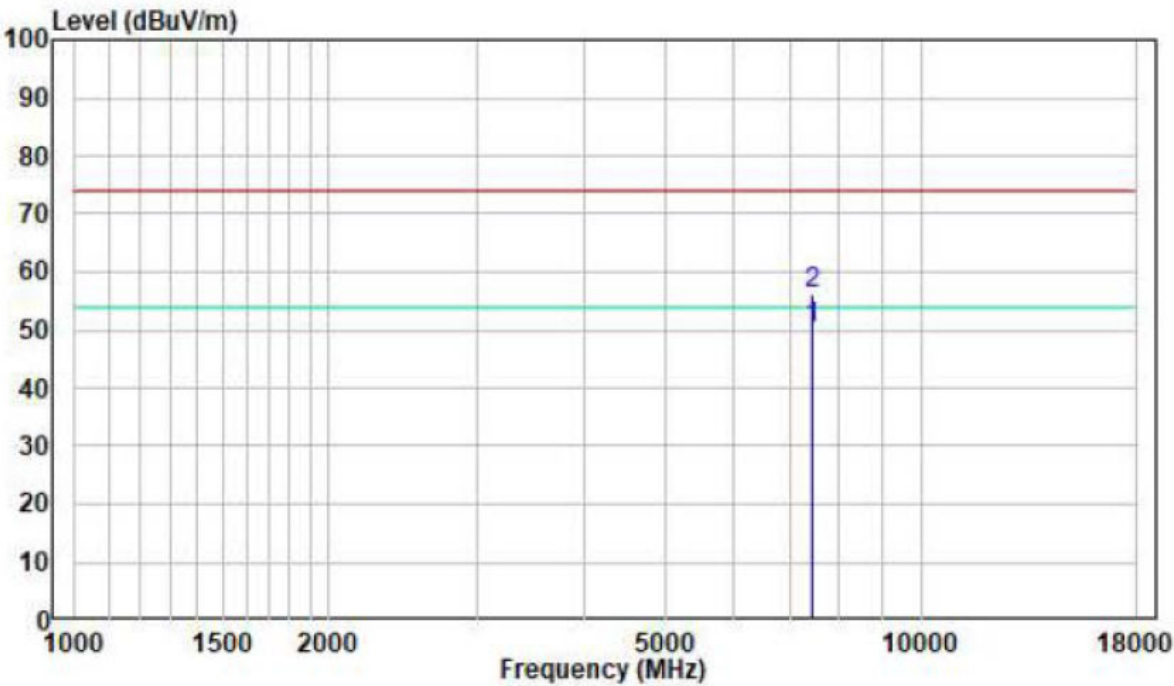


Wi-Fi & BLE & LoRa Transmitting simultaneously test:

Horizontal

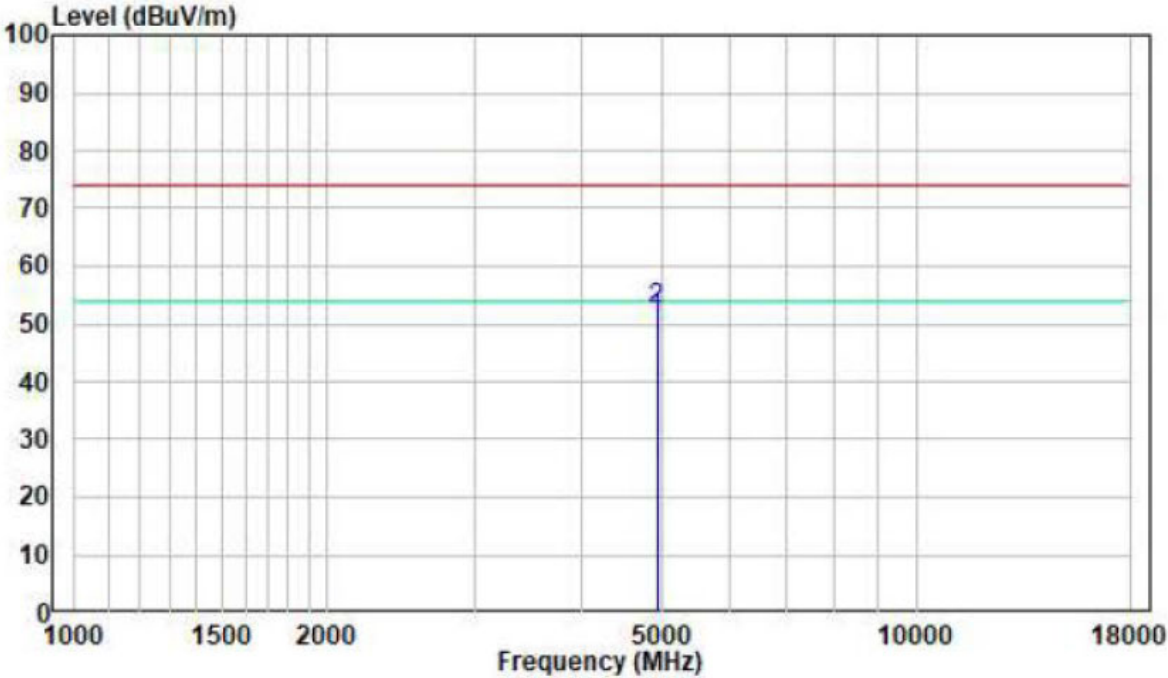

Vertical

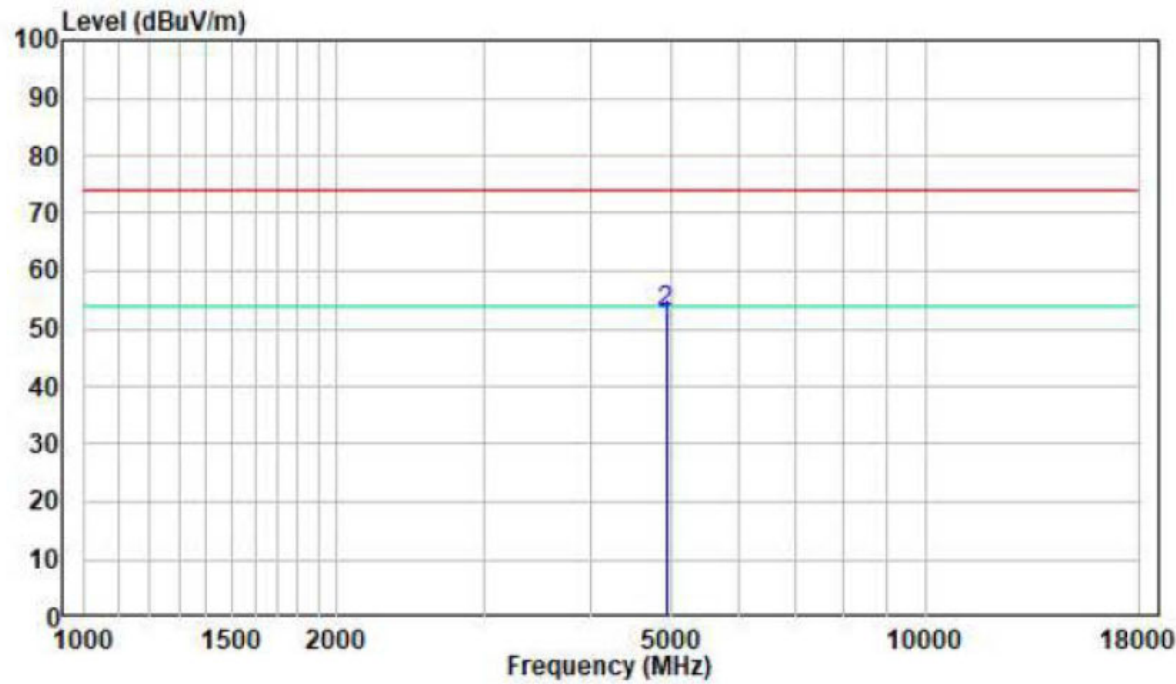

18-25 GHz (Worst case):

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
BLE 1M High channel									
23685	47.58	PK	190	1.5	H	11.11	58.69	74	-15.31
23685	35.86	AV	190	1.5	H	11.11	46.97	54	-7.03
23685	47.1	PK	353	1.5	V	11.11	58.21	74	-15.79
23685	35.24	AV	353	1.5	V	11.11	46.35	54	-7.65
802.11B Middle channel									
23642	47.25	PK	190	1.5	H	10.96	58.21	74	-15.79
23642	35.39	AV	190	1.5	H	10.96	46.35	54	-7.65
23642	47.64	PK	353	1.7	V	10.96	58.6	74	-15.4
23642	35.36	AV	353	1.7	V	10.96	46.32	54	-7.68
Wi-Fi & BLE & LoRa Transmitting simultaneously									
23691	47.86	PK	190	1.6	H	11.13	58.99	74	-15.01
23691	35.2	AV	190	1.6	H	11.13	46.33	54	-7.67
23691	47.5	PK	353	1.5	V	11.13	58.63	74	-15.37
23691	35.11	AV	353	1.5	V	11.13	46.24	54	-7.76

Note:

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude–Limit


The other spurious emission which is in the noise floor level was not recorded.

18 -25GHz (Worst case):


Pre-scan plots
802.11 b Middle Channel
Horizontal

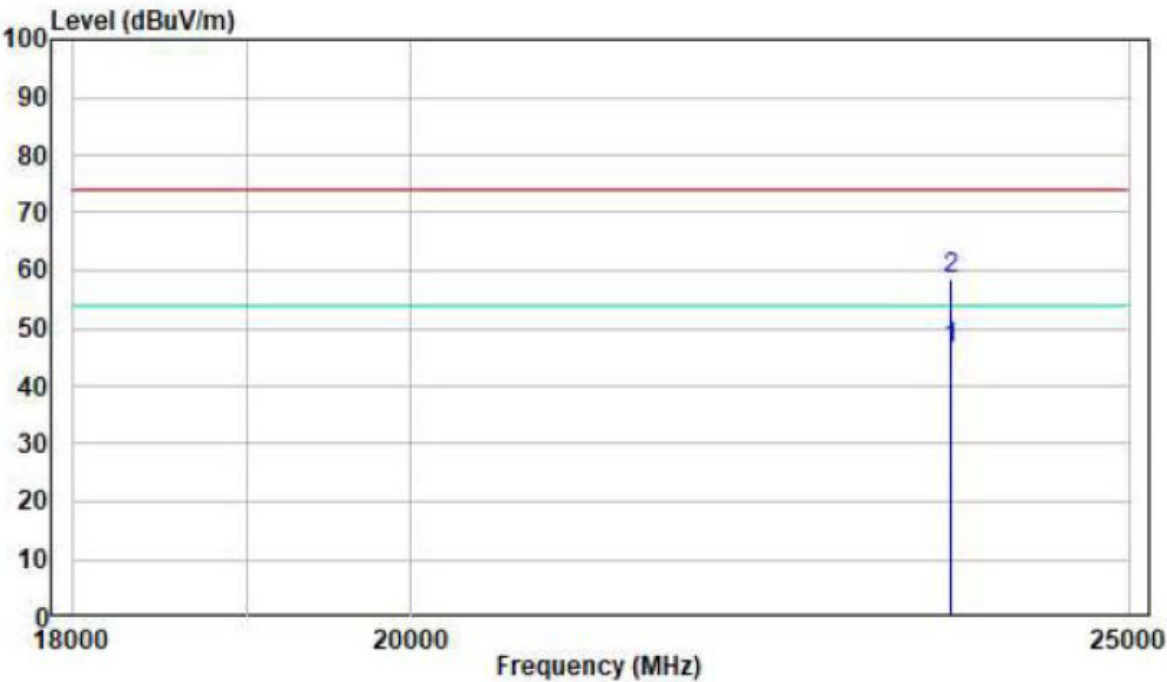


Vertical

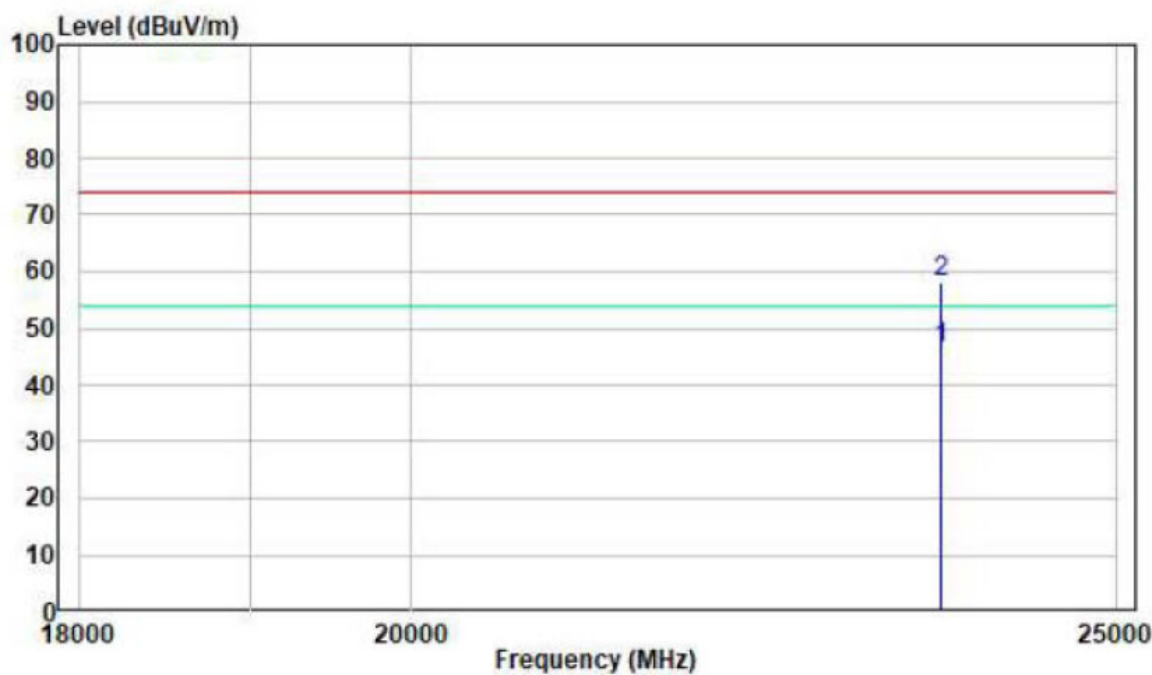

BLE High Channel
Horizontal

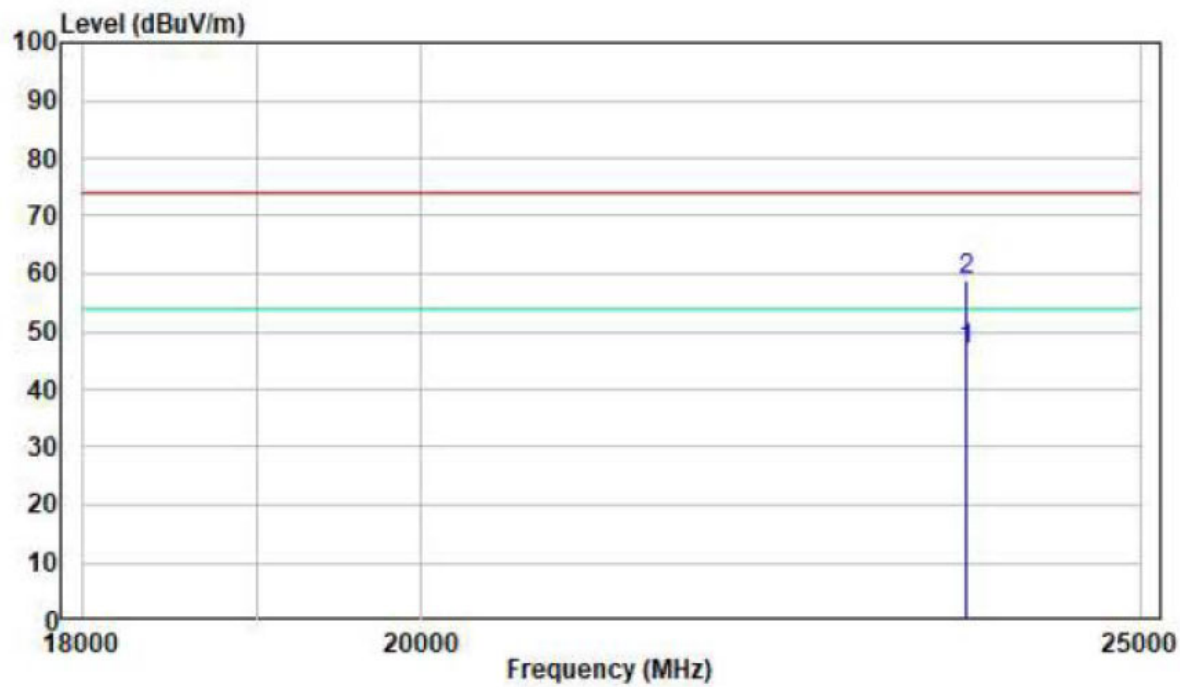


Vertical

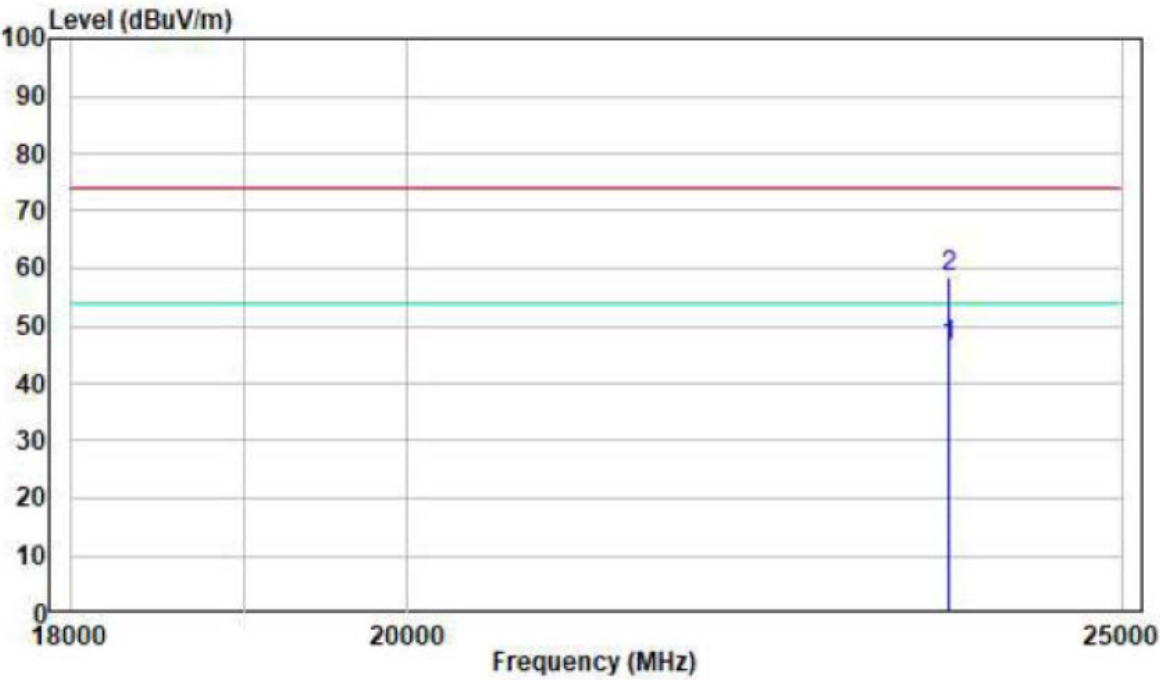


Wi-Fi & BLE & LoRa Transmitting simultaneously test:

Horizontal

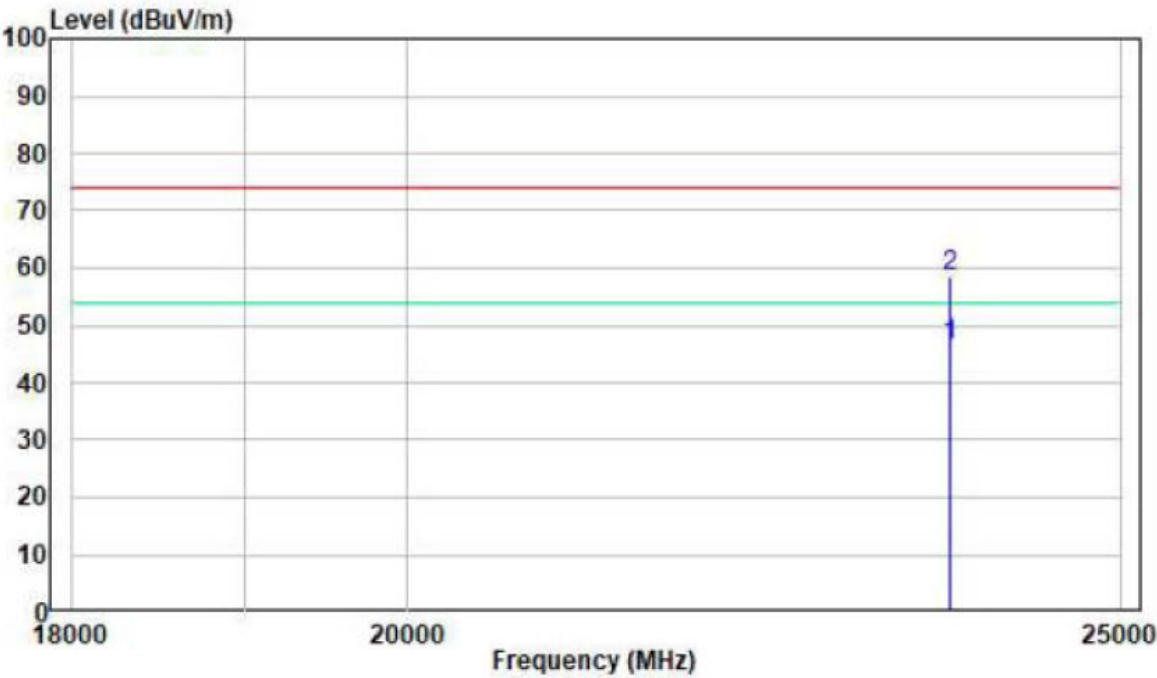

Vertical

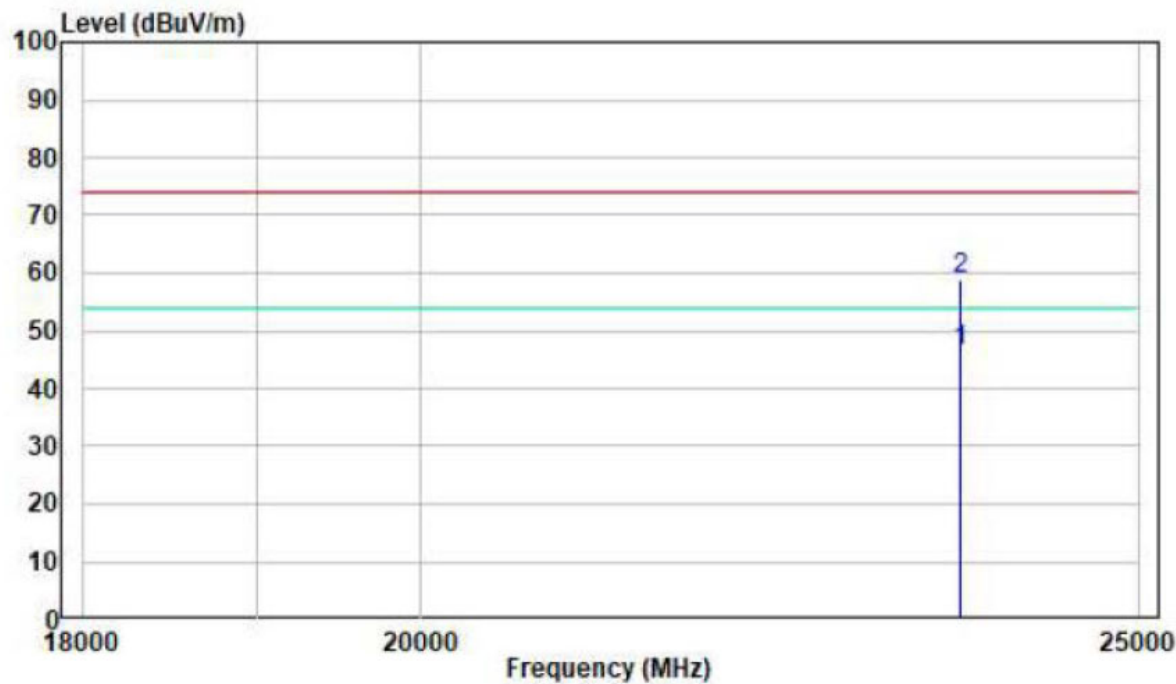


FCC §15.247(a) (2) – 6dB EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	22~26°C
Relative Humidity:	48~56%
ATM Pressure:	101.0 kPa

The testing was performed by Black Dingon 2022-03-10 for Wi-Fi and 2022-03-11 for BLE.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	22~26°C
Relative Humidity:	48~56%
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2022-03-10 for Wi-Fi and 2022-03-11 for BLE.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(d) – 100kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	22~26°C
Relative Humidity:	48~56%
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2022-03-10 for Wi-Fi and 2022-03-11 for BLE.

EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:

Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(e)- POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	22~26°C
Relative Humidity:	48~56%
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2022-03-10 for Wi-Fi and 2022-03-11 for BLE.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

APPENDIX Wi-Fi


Appendix A: 6dB Emission Bandwidth

Test Result

Test Mode	Channel [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	2412	10.19	0.5	PASS
	2437	10.19	0.5	PASS
	2462	10.19	0.5	PASS
11G	2412	16.38	0.5	PASS
	2437	16.38	0.5	PASS
	2462	16.39	0.5	PASS
11N20SISO	2412	17.48	0.5	PASS
	2437	17.54	0.5	PASS
	2462	17.60	0.5	PASS
11N40SISO	2422	36.12	0.5	PASS
	2437	36.01	0.5	PASS
	2452	36.12	0.5	PASS


Test Graphs

11B_Ant1_2412

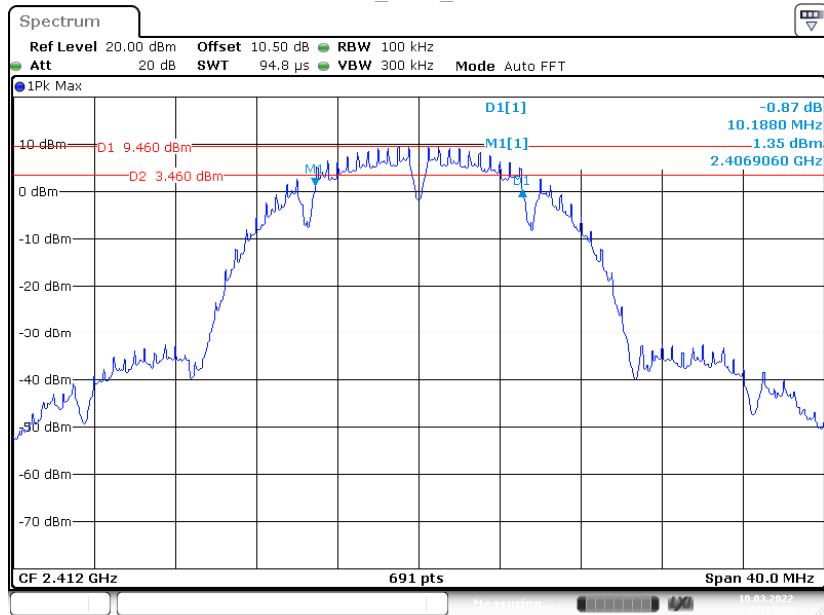


Date: 10. MAR.2022 17:15:08

11B_Ant1_2437

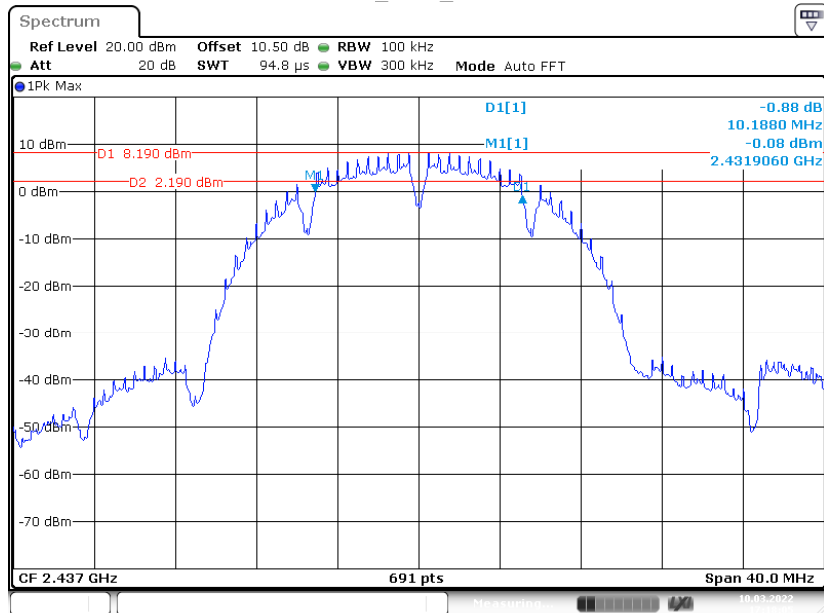


Date: 10. MAR.2022 17:18:05

11B_Ant1_2462

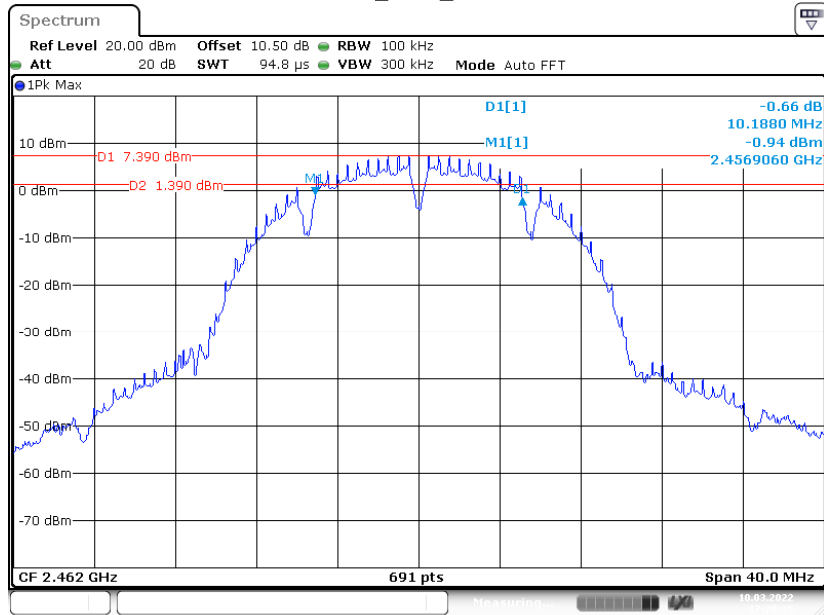


Date: 10.MAR.2022 17:20:35

11G_Ant1_2412

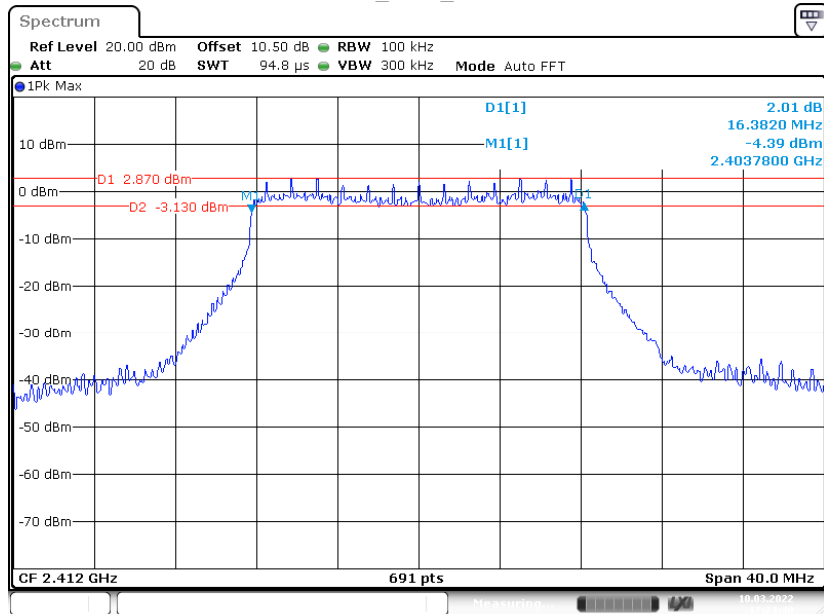


Date: 10.MAR.2022 17:24:40

11G_Ant1_2437

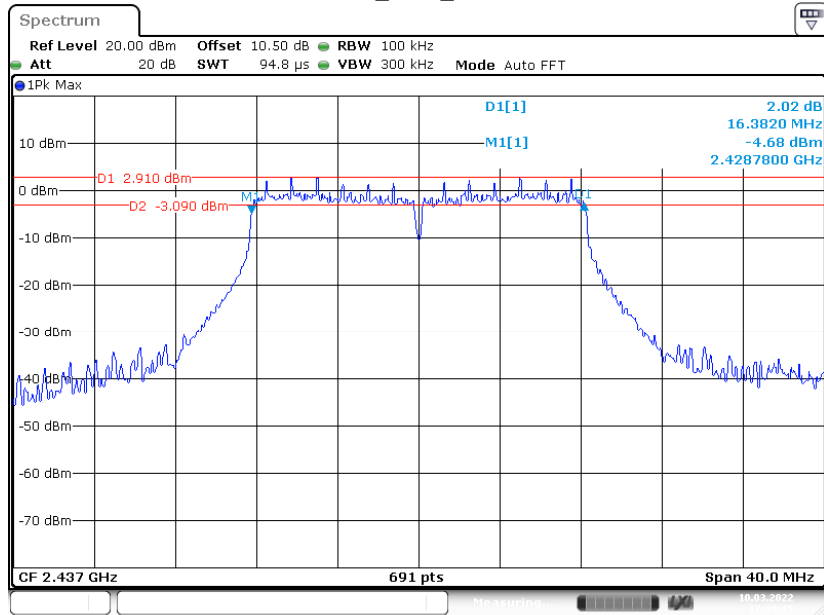


Date: 10.MAR.2022 17:29:14

11G_Ant1_2462

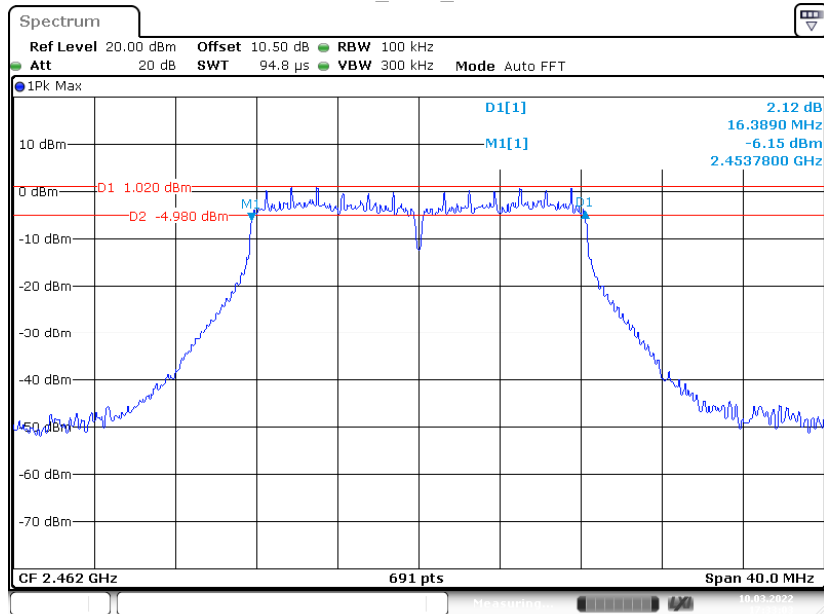


Date: 10.MAR.2022 17:33:03

11N20_Ant1_2412

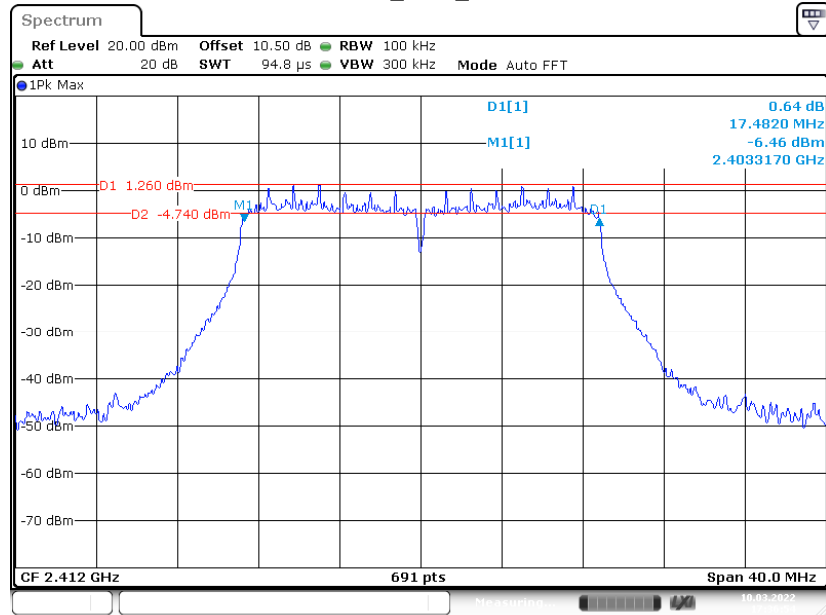


Date: 10.MAR.2022 17:36:54

11N20_Ant1_2437

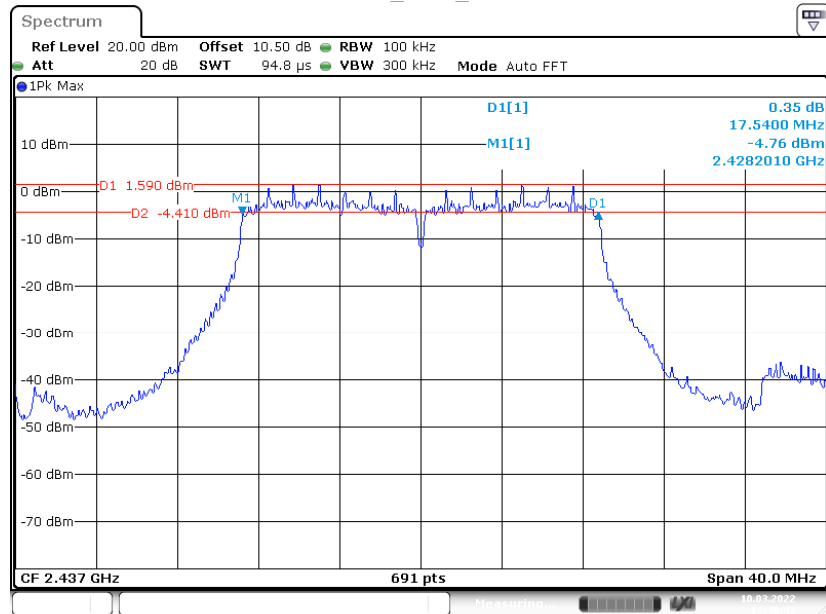


Date: 10.MAR.2022 17:40:43

11N20_Ant1_2462

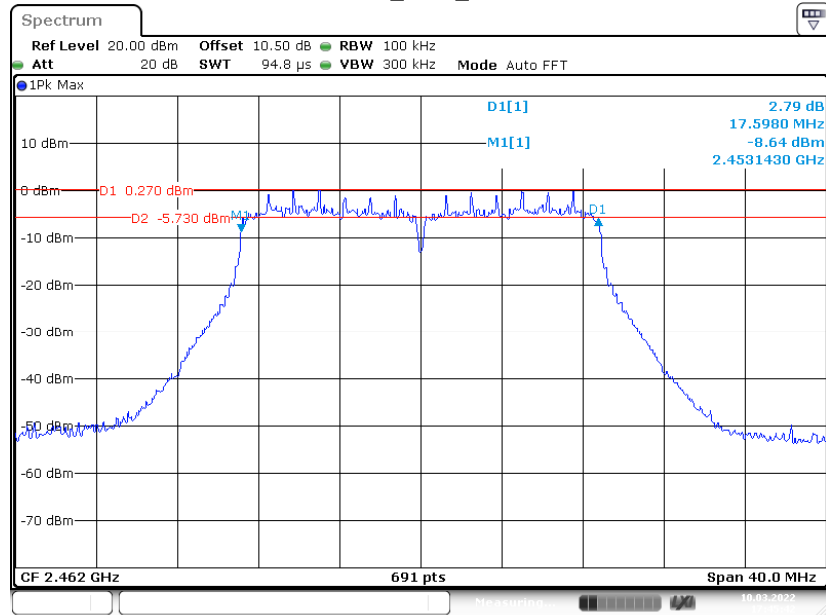


Date: 10.MAR.2022 17:45:43

11N40_Ant1_2422

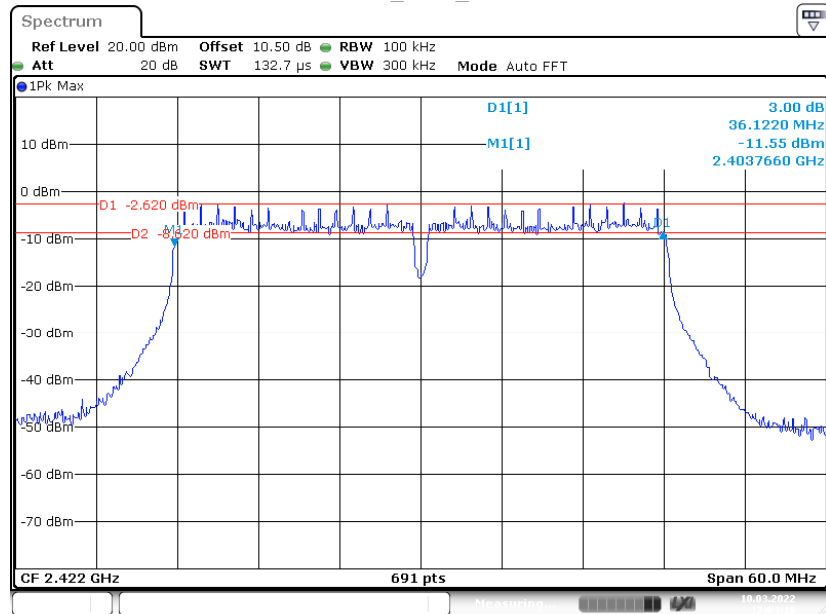


Date: 10.MAR.2022 17:04:18

11N40_Ant1_2437

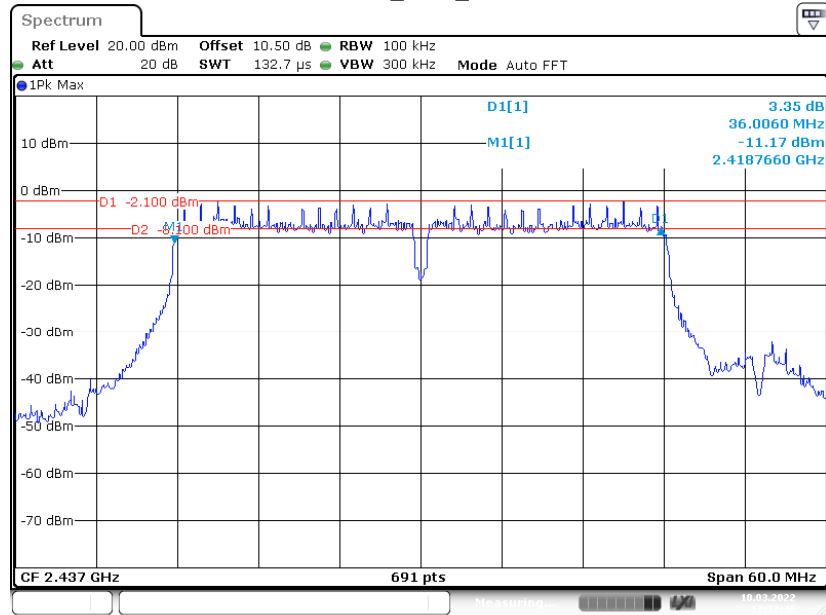

Date: 10.MAR.2022 17:12:46

11N40_Ant1_2452

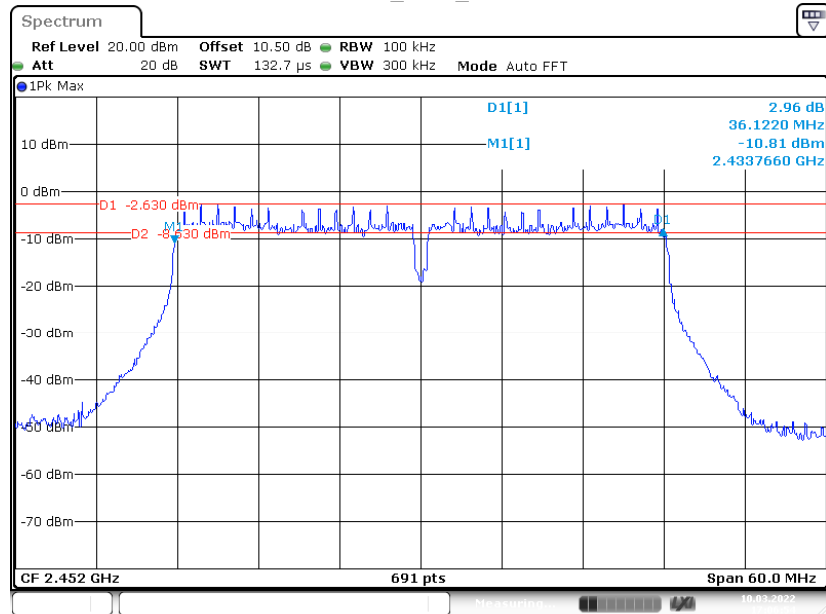

Date: 10.MAR.2022 17:06:54

Appendix C: Maximum conducted output power**Test Result**


Test Mode	Channel	Result [dBm]	Limit [dBm]	Verdict
11B	2412	22.58	<=30	PASS
	2437	21.02	<=30	PASS
	2462	20.24	<=30	PASS
11G	2412	21.47	<=30	PASS
	2437	21.64	<=30	PASS
	2462	20.17	<=30	PASS
11N20SISO	2412	20.14	<=30	PASS
	2437	20.15	<=30	PASS
	2462	19.22	<=30	PASS
11N40SISO	2422	19.49	<=30	PASS
	2437	19.51	<=30	PASS
	2452	19.23	<=30	PASS

Appendix D: Power spectral density**Test Result**

Test Mode	Channel	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	2412	-2.91	<=8	PASS
	2437	-4.78	<=8	PASS
	2462	-5.39	<=8	PASS
11G	2412	-11.01	<=8	PASS
	2437	-10.72	<=8	PASS
	2462	-12.71	<=8	PASS
11N20SISO	2412	-12.34	<=8	PASS
	2437	-11.24	<=8	PASS
	2462	-13.67	<=8	PASS
11N40SISO	2422	-15.99	<=8	PASS
	2437	-15.88	<=8	PASS
	2452	-16.57	<=8	PASS


Test Graphs

11B_Ant1_2412

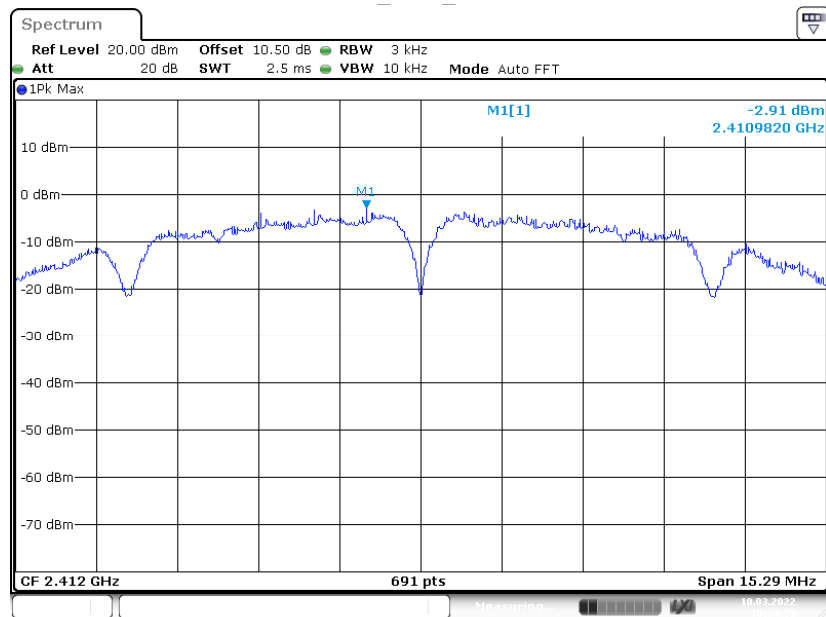


Date: 10. MAR. 2022 18:34:35

11B_Ant1_2437

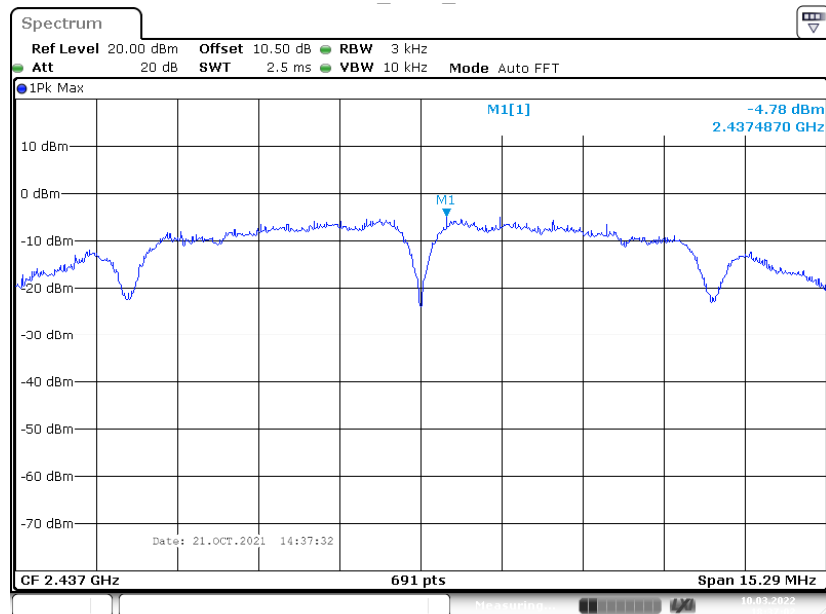


Date: 10. MAR. 2022 18:37:02

11B_Ant1_2462

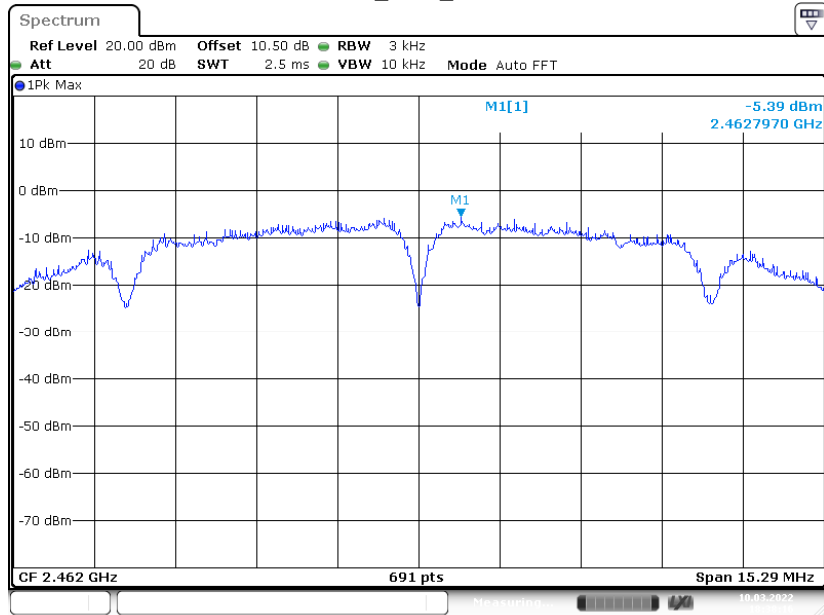


Date: 10.MAR.2022 18:38:16

11G_Ant1_2412

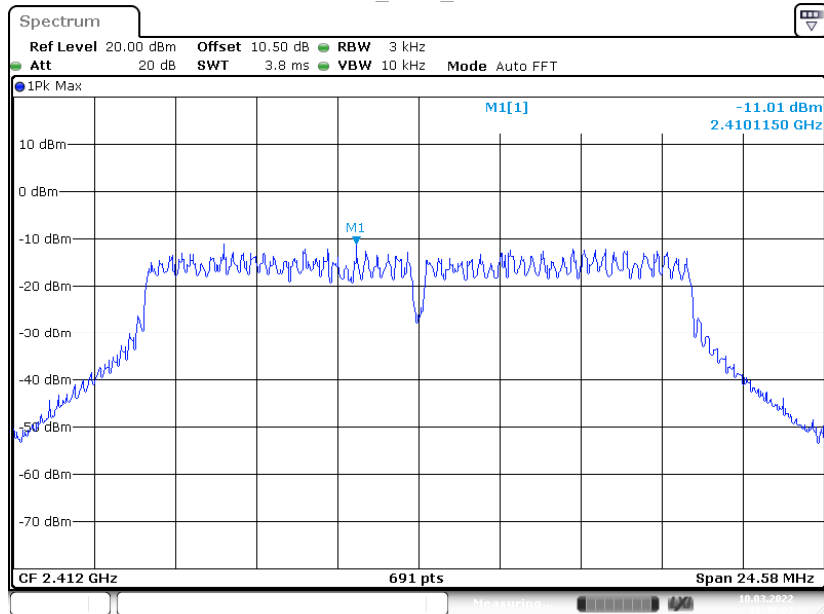


Date: 10.MAR.2022 18:40:02

11G_Ant1_2437

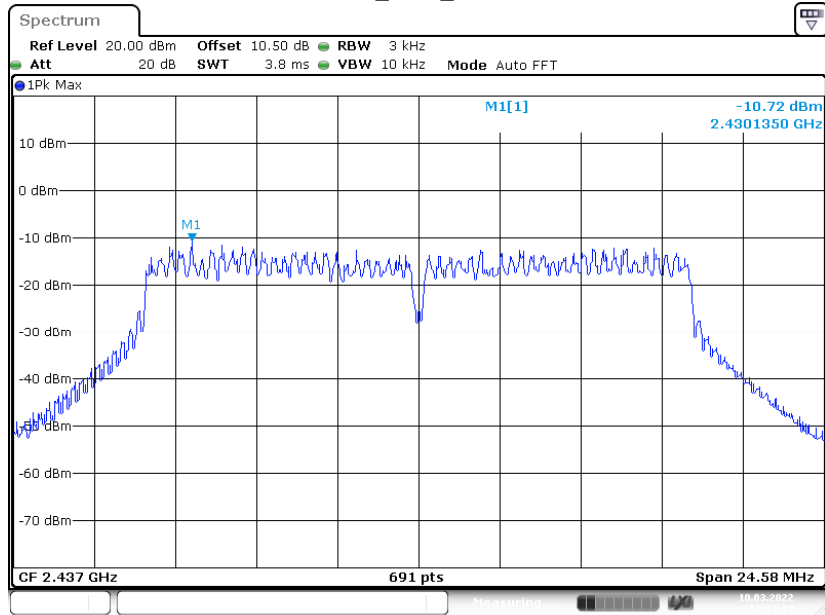


Date: 10.MAR.2022 18:41:12

11G_Ant1_2462

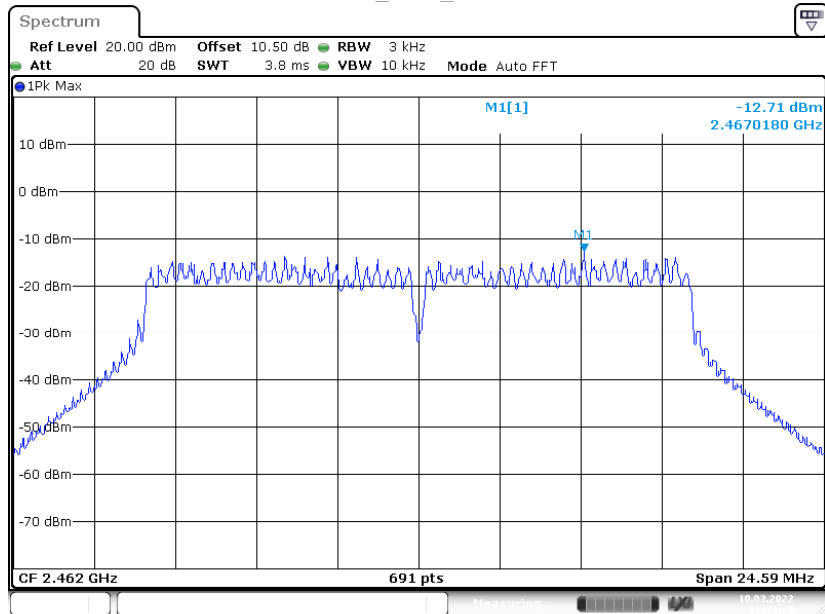


Date: 10.MAR.2022 18:42:39

11N20SISO_Ant1_2412

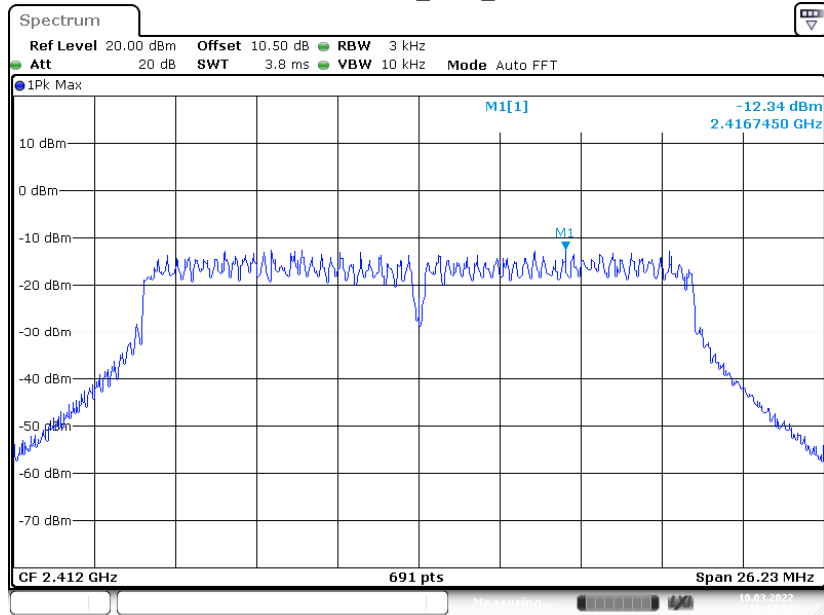


Date: 10.MAR.2022 18:43:51

11N20SISO_Ant1_2437

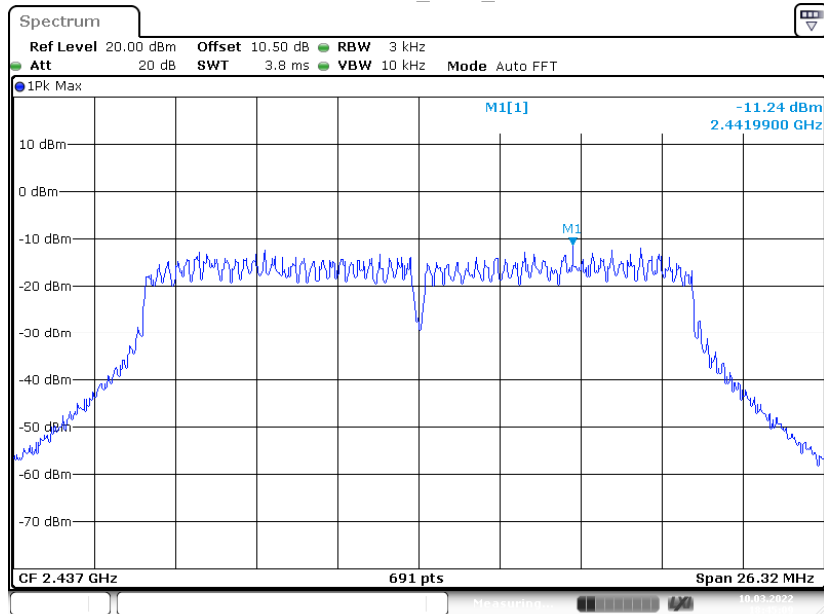


Date: 10.MAR.2022 18:45:09

11N20SISO_Ant1_2462

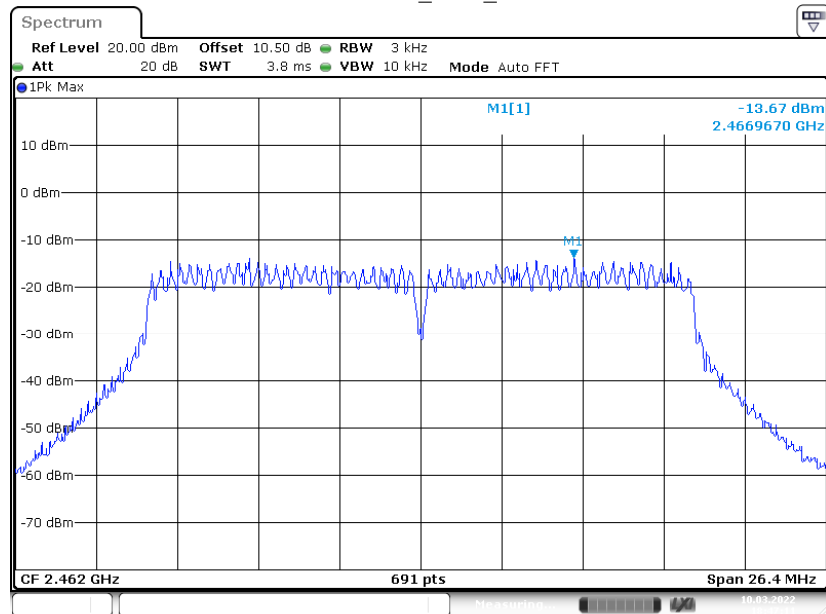


Date: 10.MAR.2022 18:47:12

11N40SISO_Ant1_2422

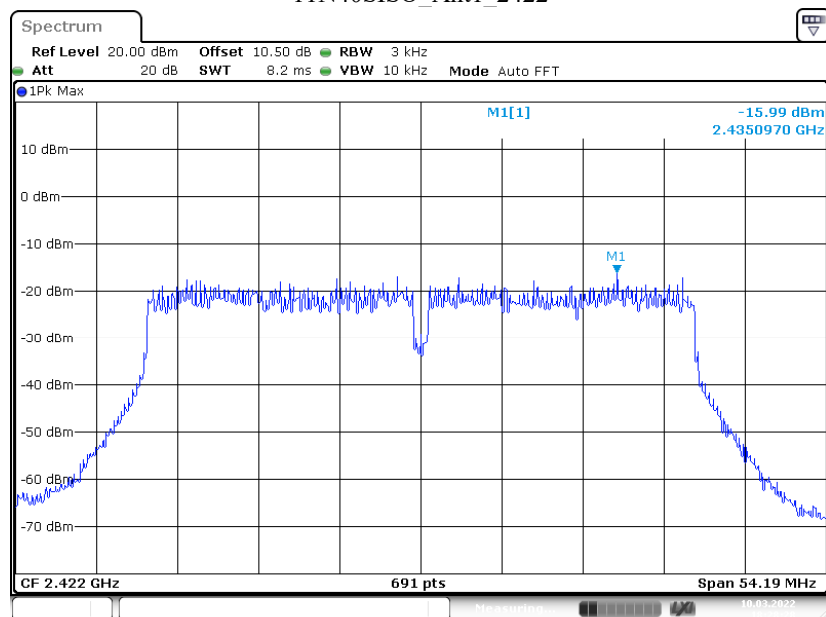


Date: 10.MAR.2022 18:28:28

11N40SISO_Ant1_2437

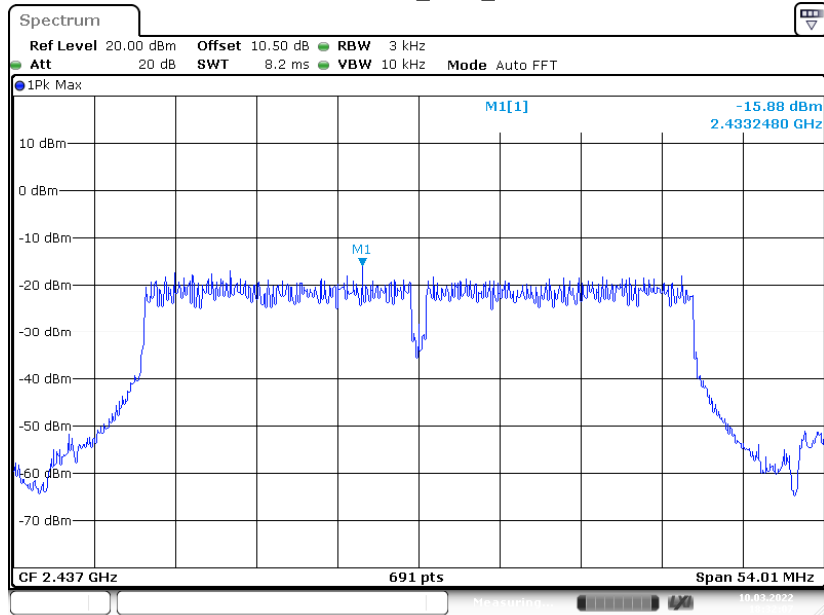

Date: 10.MAR.2022 18:32:07

11N40SISO_Ant1_2452

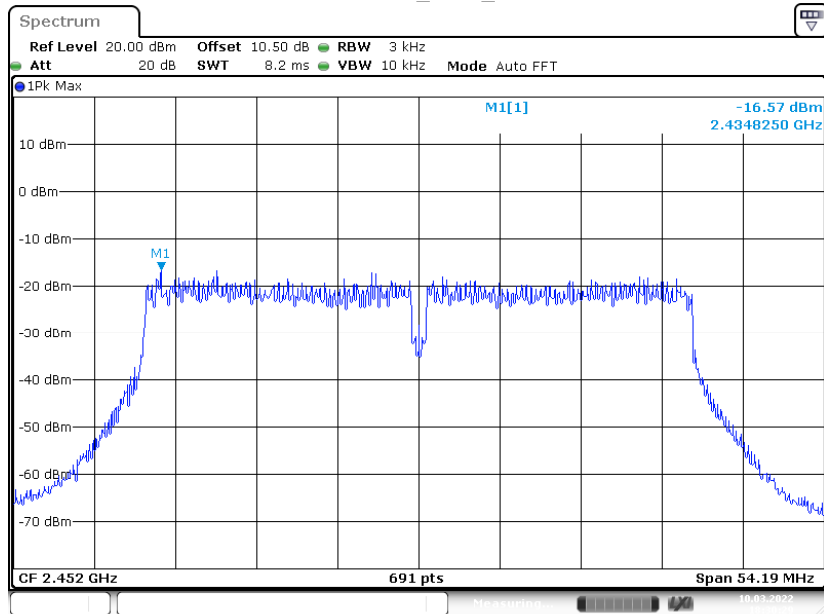


Date: 10.MAR.2022 18:30:29


Appendix E: Band edge measurements

Test Graphs


11B_Ant1_Low_2412

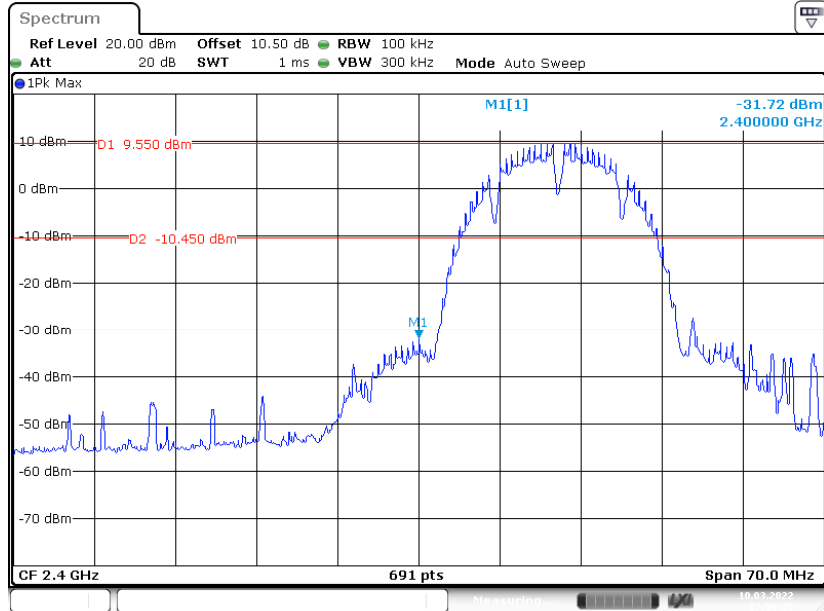

11B_Ant1_High_2462

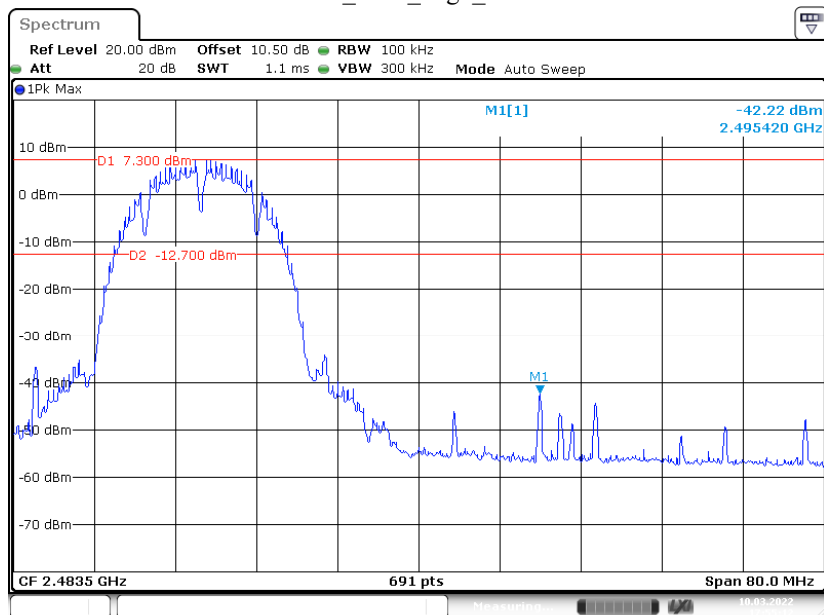


11G_Ant1_Low_2412

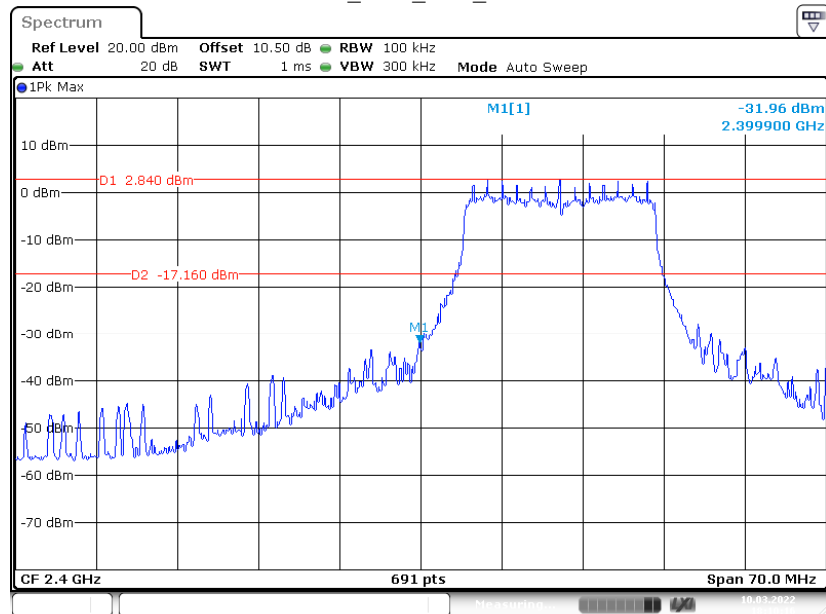


Date: 10.MAR.2022 18:10:16

11G_Ant1_High_2462

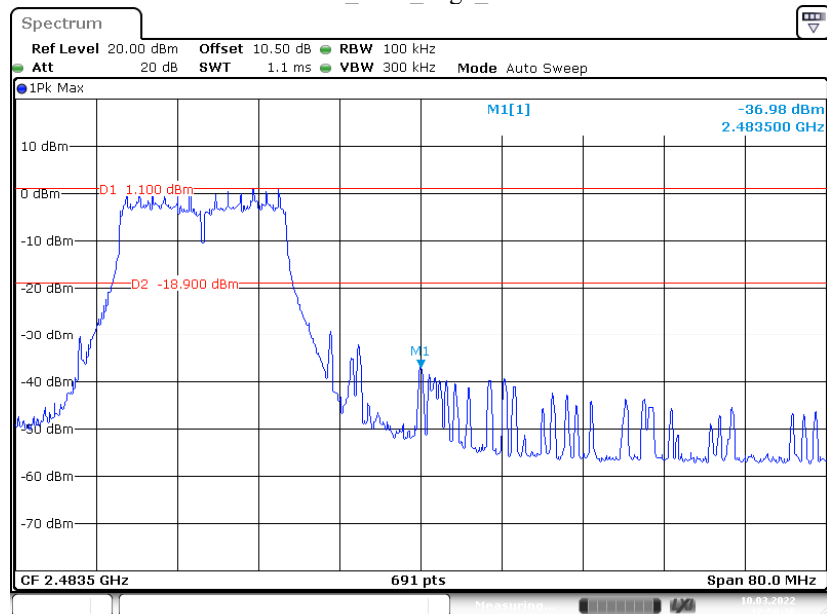


Date: 10.MAR.2022 17:59:36

11N20SISO_Ant1_Low_2412

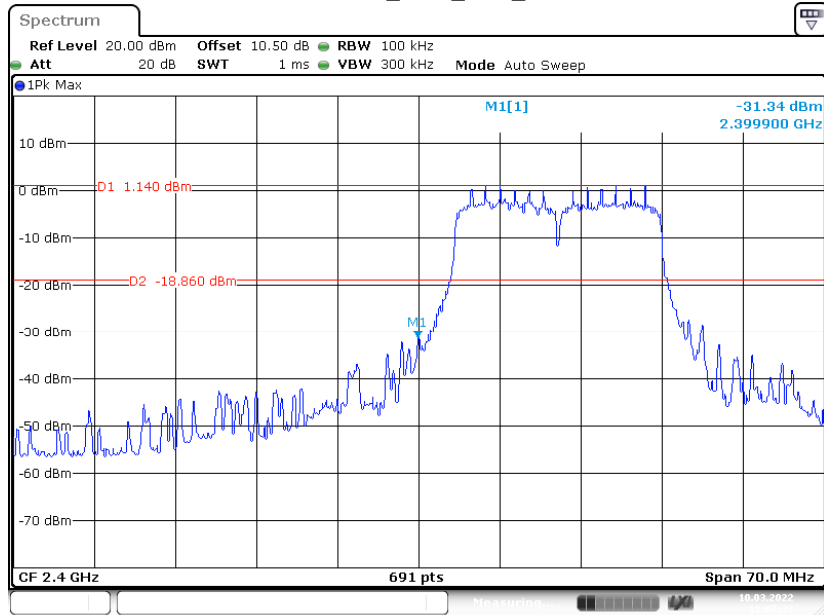


Date: 10.MAR.2022 18:07:34

11N20SISO_Ant1_High_2462

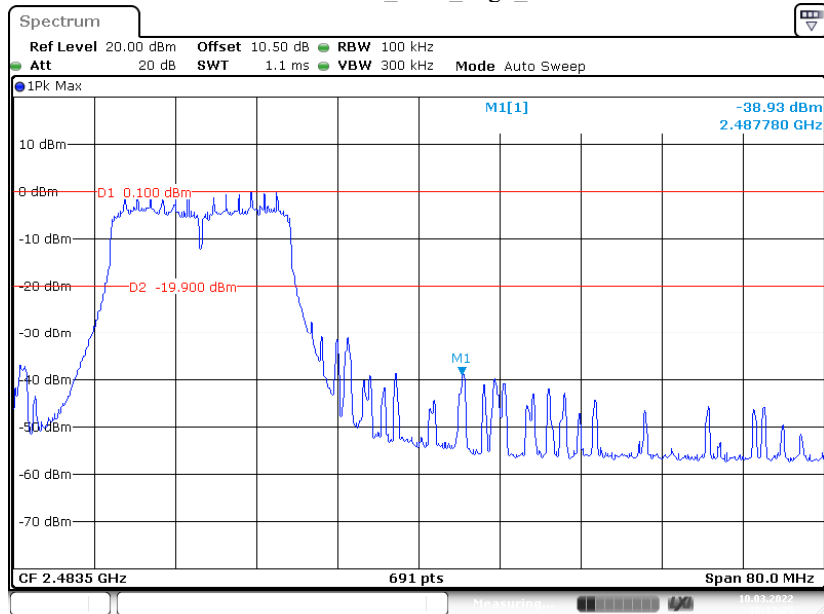


Date: 10.MAR.2022 18:13:25

11N40SISO_Ant1_Low_2422

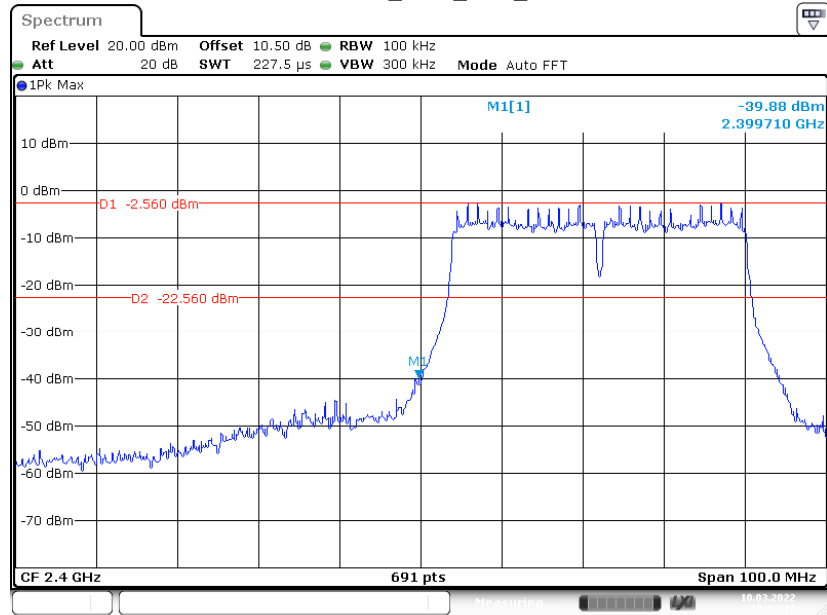

Date: 10.MAR.2022 18:23:18

11N40SISO_Ant1_High_2452

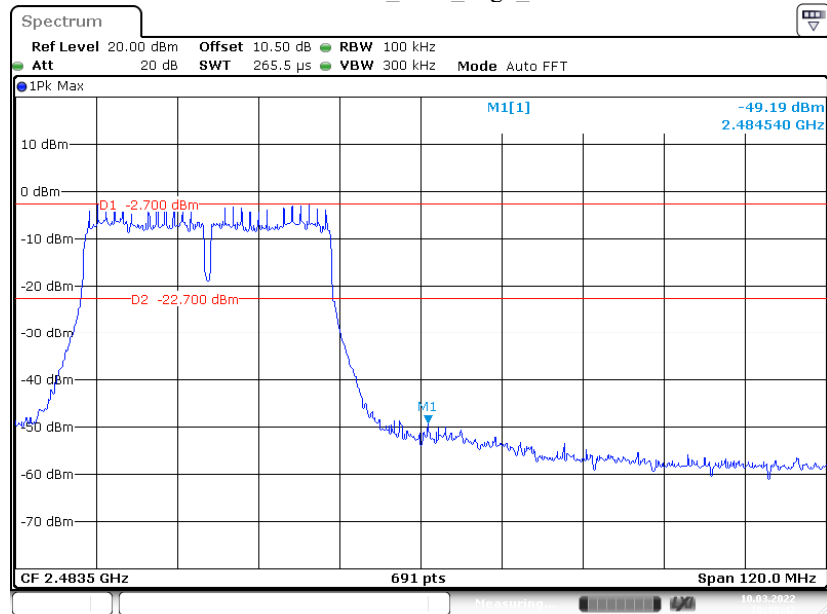


Date: 10.MAR.2022 18:19:42

Appendix F: Duty Cycle**Test Result**

Test Mode	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	2437	100	100	100
11G	2437	2.089	2.119	98.58
11N20SISO	2437	1.961	2.02	97.08
11N40SISO	2437	0.964	0.983	98.08


Test Graphs

11B_Ant1_2437

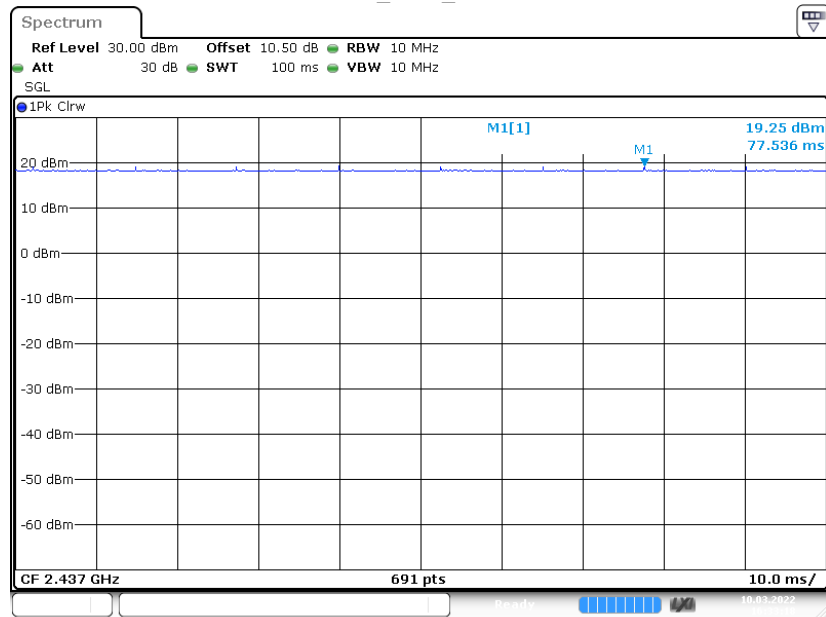


Date: 10. MAR.2022 16:33:19

11G_Ant1_2437

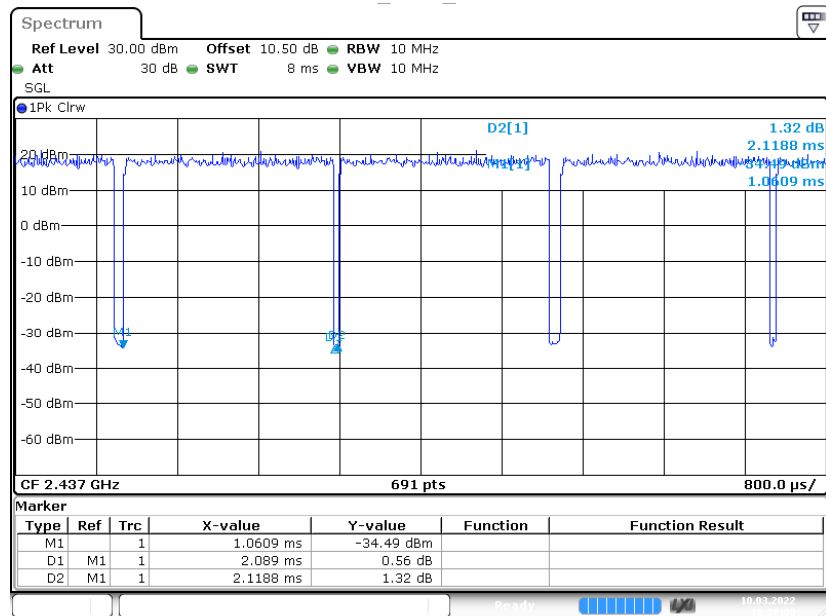


Date: 10. MAR.2022 16:28:00

11N20SISO_Ant1_2437

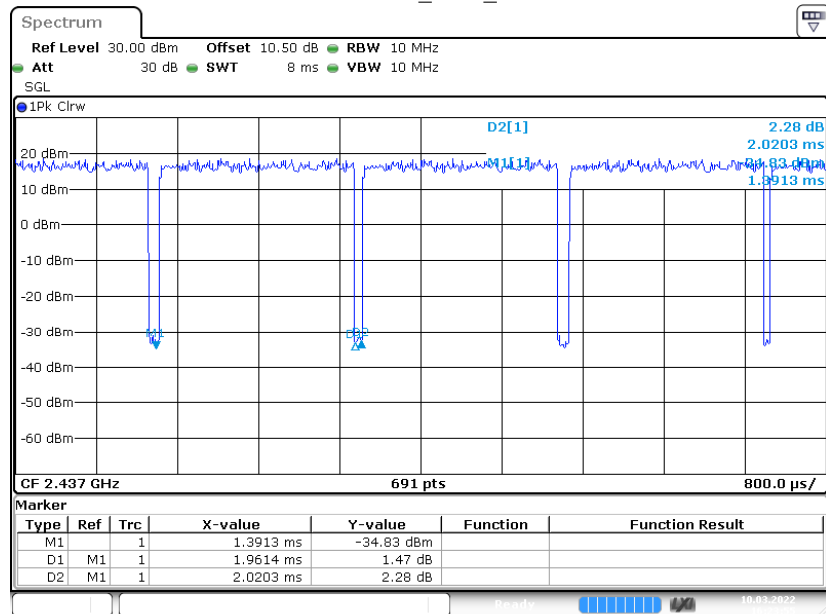

Date: 10.MAR.2022 16:23:56

11N40SISO Ant1 2437

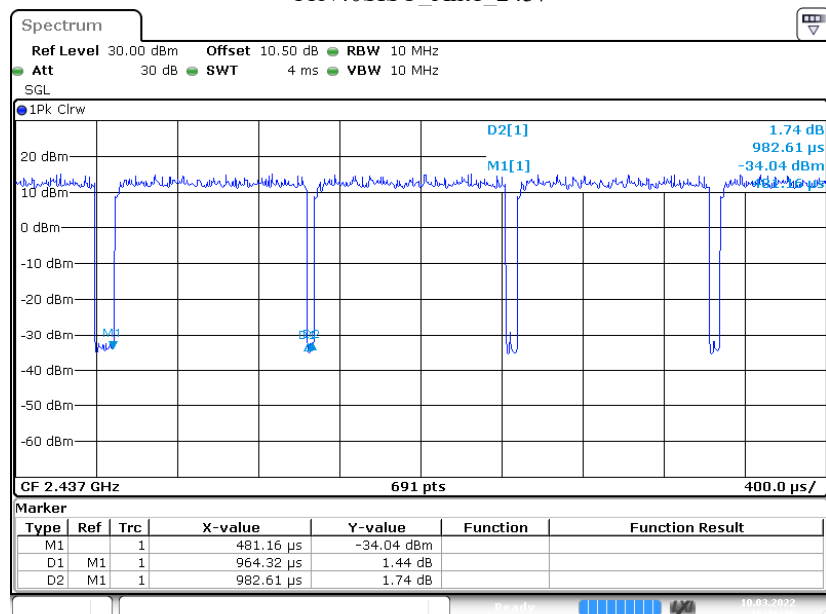

Date: 10.MAR.2022 16:26:21


APPENDIX BLE

Appendix A: 6dB Emission Bandwidth

Test Result


Test Mode	Antenna	Channel	DTS BW [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.703	0.5	PASS
		2440	0.703	0.5	PASS
		2480	0.703	0.5	PASS

Test Graphs

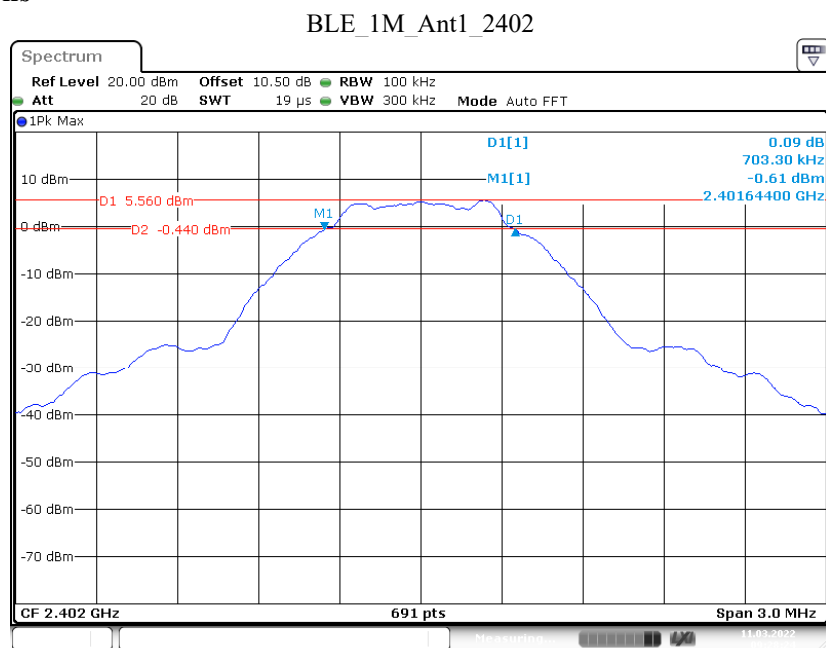


Date: 11.MAR.2022 09:28:24

BLE_1M_Ant1_2440

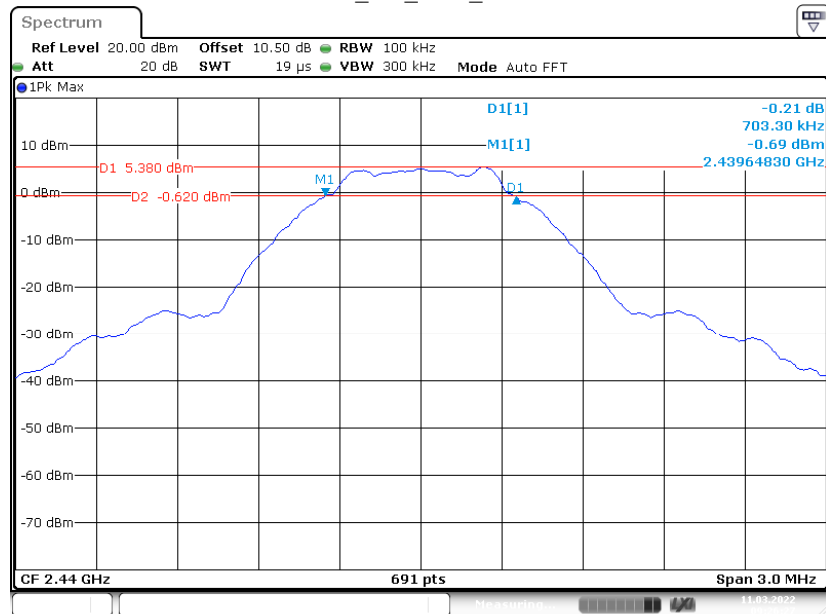

Date: 11.MAR.2022 09:26:28


BLE_1M_Ant1_2480

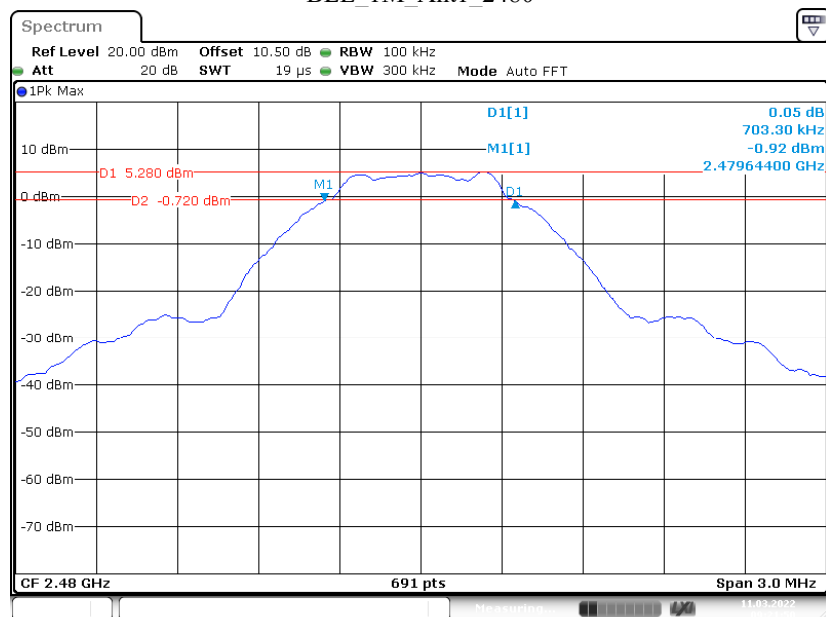

Date: 11.MAR.2022 09:21:50


Appendix C: Maximum conducted output power**Test Result**

Test Mode	Channel	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	2402	6.50	<=30	PASS
	2440	6.20	<=30	PASS
	2480	6.05	<=30	PASS

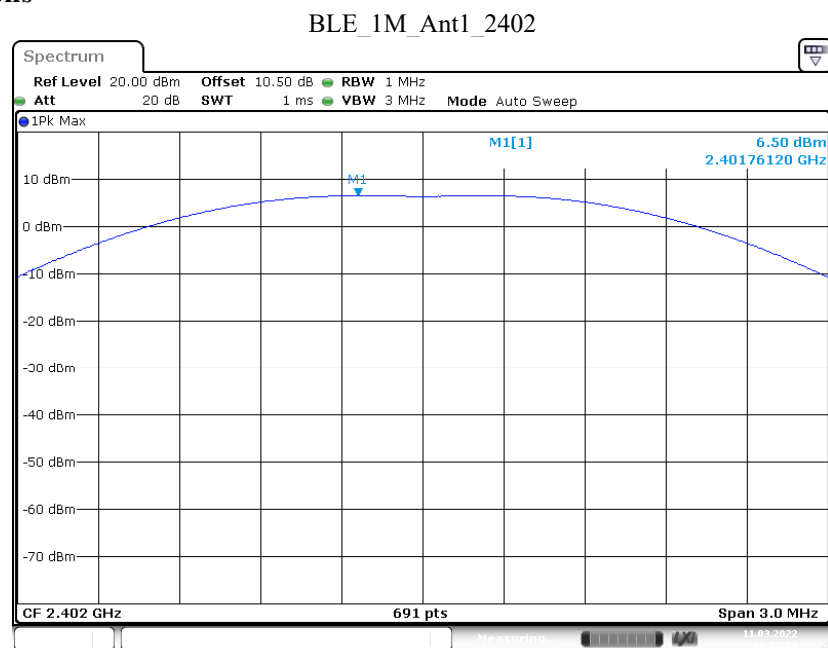Test Graphs


Date: 11.MAR.2022 09:12:40

BLE_1M_Ant1_2440

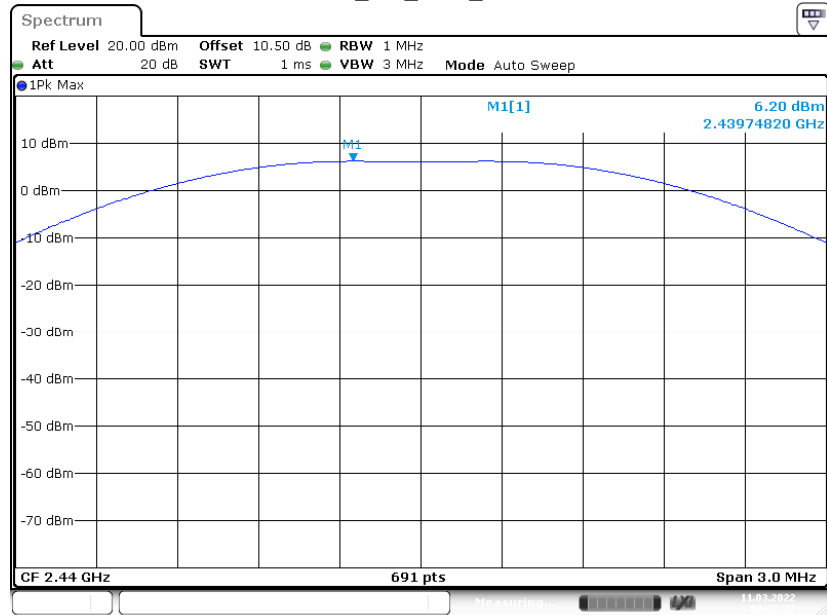

Date: 11.MAR.2022 09:17:27


BLE_1M_Ant1_2480

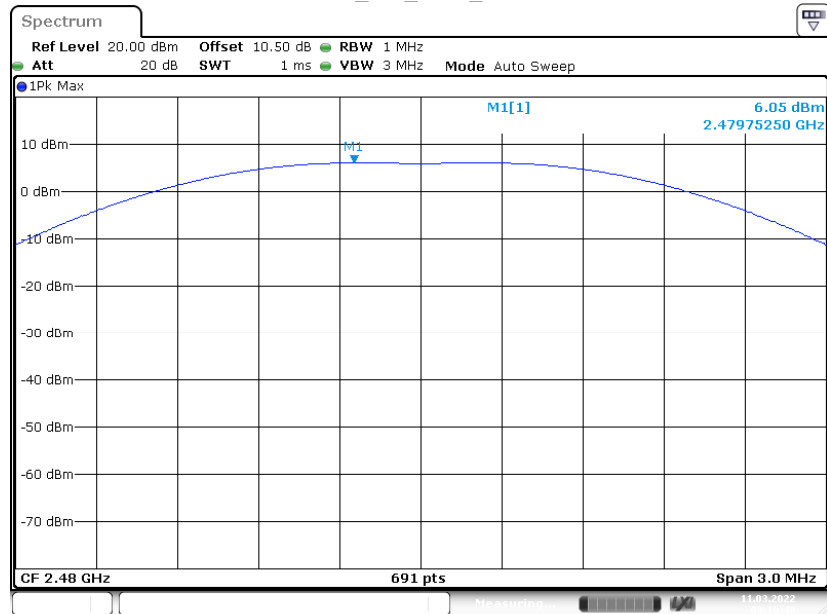


Date: 11.MAR.2022 09:19:49

Appendix D: Power spectral density**Test Result**

Test Mode	Channel	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	2402	-9.74	<=8	PASS
	2440	-9.94	<=8	PASS
	2480	-10.03	<=8	PASS

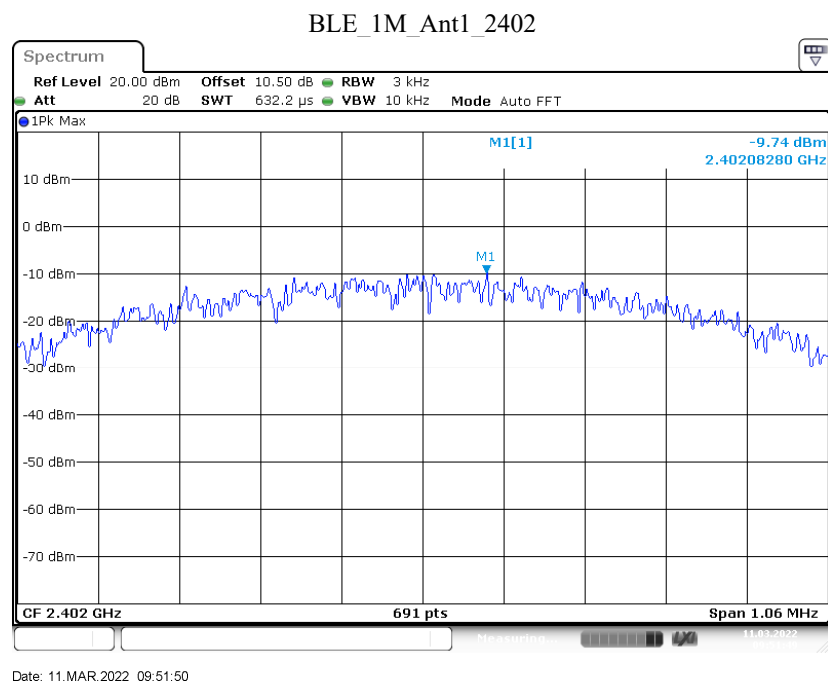
Test Graphs

BLE_1M_Ant1_2440

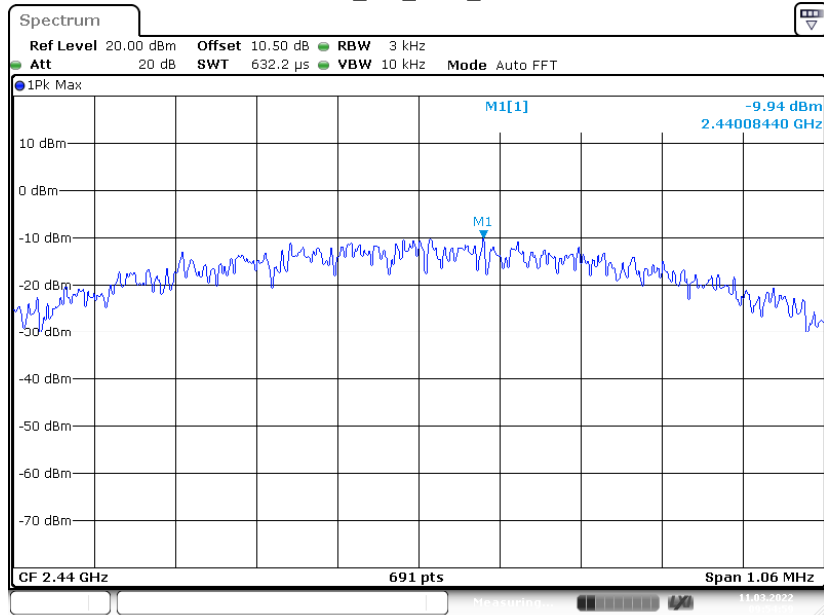

Date: 11.MAR.2022 09:54:59

BLE_1M_Ant1_2480

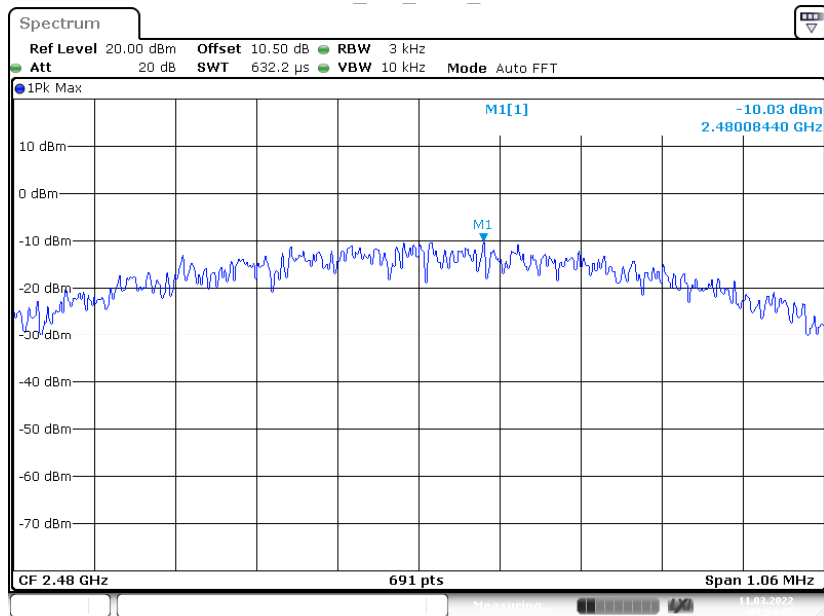


Date: 11.MAR.2022 09:54:06

Appendix E: Band edge measurements


Test Graphs

BLE_1M_Ant1_Low_2402

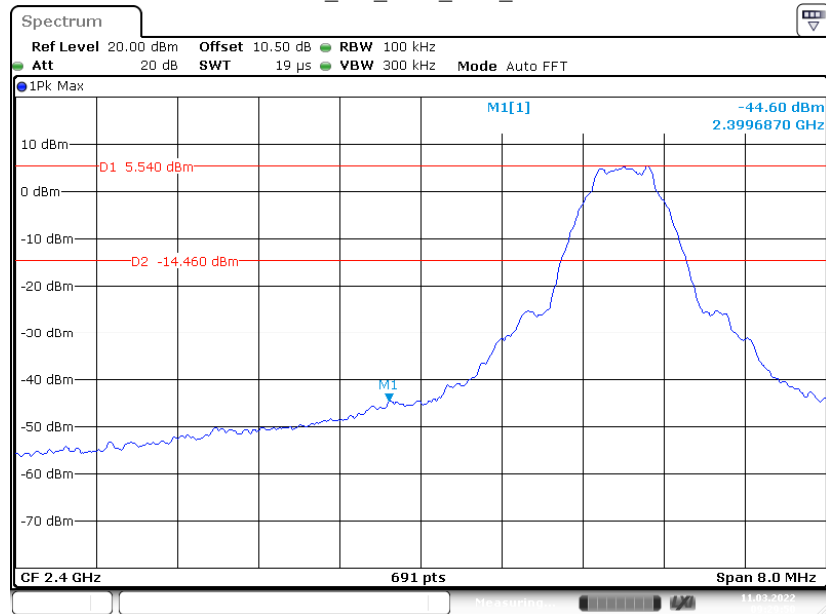

Date: 11.MAR.2022 09:29:50

BLE_1M_Ant1_High_2480

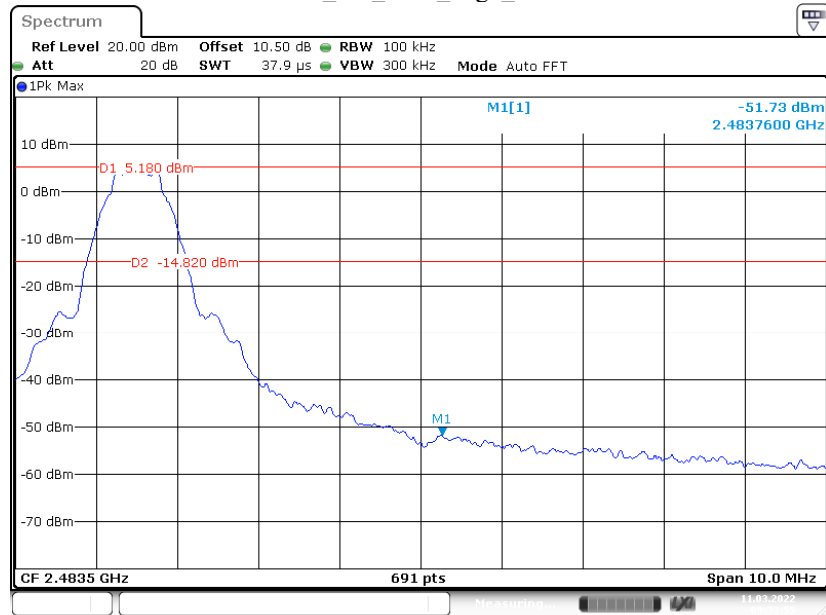


Date: 11.MAR.2022 09:33:55

Appendix F: Duty Cycle

Test Result

Test Mode	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	2440	100	100	100

Test Graphs

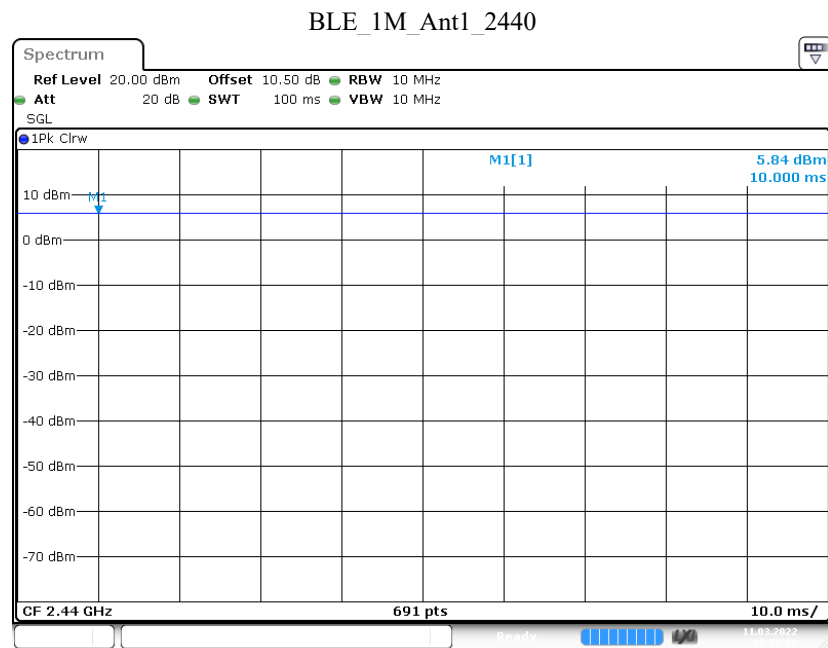

Date: 11.MAR.2022 09:58:22

***** END OF REPORT *****