



MEASUREMENT REPORT

FCC PART 15.209

FCC ID: 2AUXNWCP2

Applicant: A-Champs Ltd.

Product: Interactive Training System

Model No.: WCP2

FCC Classification: Part 15 Low Power Transmitter Below 1705 kHz
(DCD)

FCC Rule Part(s): Part15 Subpart C (Section 15.209)

Test Procedure(s): ANSI C63.10-2013

Test Date: February 25 ~ August 22, 2021

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2102RSU069-U1	Rev. 01	Initial Report	12-11-2021	Invalid
2102RSU069-U1	Rev. 02	Revise Typo Error in Section 5.4.5	06-29-2022	Valid

CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Testing Facility	4
1.4. Product Information	5
1.5. Test Mode	5
1.6. Test Environment Condition	5
1.7. Description of Test Configuration	6
1.8. Test System Details	6
1.9. Labeling Requirements	6
2. ANTENNA REQUIREMENTS	7
3. TEST EQUIPMENT CALIBRATION DATE	8
4. MEASUREMENT UNCERTAINTY	10
5. TEST RESULT	11
5.1. Summary	11
5.2. Conducted Emission	12
5.2.1. Test Limit	12
5.2.2. Test Setup	12
5.2.3. Test Result	13
5.3. General Radiated Emission	17
5.3.1. Test Limit	17
5.3.2. Test Procedure Used	17
5.3.3. Test Setup	18
5.3.4. Test Result	19
5.4. 20dB Spectrum Bandwidth Measurement	21
5.4.1. Test Limit	21
5.4.2. Test Procedure Used	21
5.4.3. Test Setting	21
5.4.4. Test Setup	21
5.4.5. Test Result	22
6. CONCLUSION	24
Appendix A - Test Setup Photograph	25
Appendix B - EUT Photograph	26

1.1. Applicant

22/F., Bupa Centre, 141 Connaught Road West, HONG KONG, P.R.China

A-Champs Ltd.

22/F., Bupa Centre, 141 Connaught Road West, HONG KONG, P.R.China

☒	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐R-20025 ☐G-20034 ☐C-20020 ☐T-20020 ☐R-20141 ☐G-20134 ☐C-20103 ☐T-20104
☐	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Interactive Training System
Model No.	WPC2
Operation Frequency	110 kHz ~ 148 kHz
Operating temperature	0 ~ 50 °C
Accessory	
Adapter	Model: ST190 Input: AC 100-240V Max 600MA Output: 5V DC, 4A
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Test Mode

Test Mode	Mode 1: Standby Mode
	Mode 2: Charge and Communicate with the 20W Wireless Charger Receiver


Note: The 20W Wireless Charger Receiver is provided by the manufacturer and it can control the EUT to be at the maximum output power state.

1.6. Test Environment Condition

Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~ 75%RH

1.7. Description of Test Configuration

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

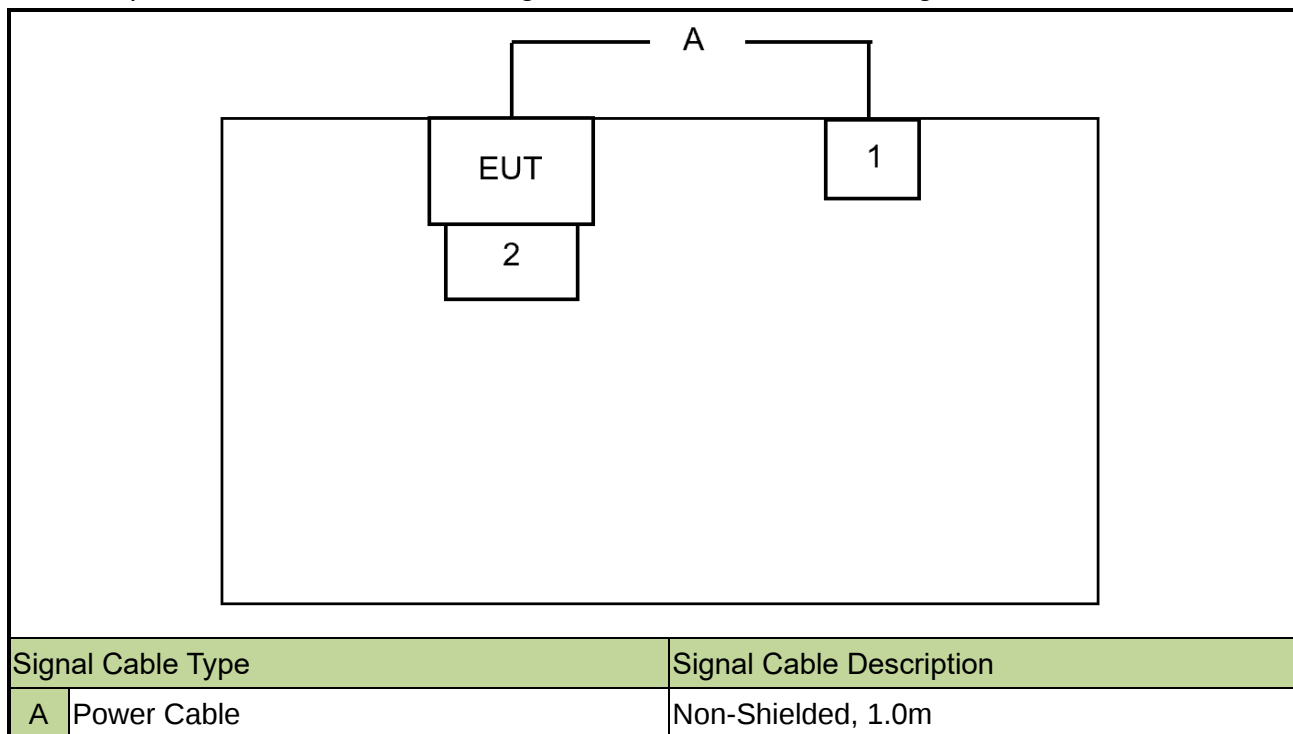

1.8. Test System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.
1 AC/DC Adapter	Blue Power TECHNOLOGY CO. LIMITED	ST190
2 Wireless Charger Receiver	CONVENIENT POWER	CPS510ATE-01(T60)

1.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the unit is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

3. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission (SIP-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2022/6/8
Power Analyzer	California Instruments	PACS-1	MRTSUE06010	1 year	2022/1/3
AC Power Source	California Instruments	3001IX-208-CTS	MRTSUE06011	1 year	2022/1/3
ISN	R&S	ENY81	MRTSUE06608	1 year	2022/6/7
ISN	R&S	ENY81-CA6	MRTSUE06609	1 year	2022/6/7
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2022/6/24
Four-Line V-Network	R&S	ENV432	MRTSUE06614	1 year	2021/10/20
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2021/12/3
CDNE	Schwarzbeck	CDNE M2	MRTSUE06934	1 year	2022/3/9
CDNE	Schwarzbeck	CDNE M3	MRTSUE06935	1 year	2022/3/9
50 Ω to 150 Ω Adapter	Schwarzbeck	SR100-6W	MRTSUE06936	1 year	2022/3/9
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	/	/

Transmitter Spurious Emissions and Receiver Spurious Emissions (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/1/12
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021/12/24
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/6/24
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/9
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2021/11/23
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/9/26
Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2022/8/5
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/6/24
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2021/11/25
Thermohygrometer	testo	608-H1	MRTSUE06620	1 year	2021/12/3
Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2022/1/14
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2022/8/26
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/3/9

Transmitter Spurious Emissions and Receiver Spurious Emissions (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2022/6/9
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/1/12
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/6/24
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2021/11/26
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2021/11/23
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/9/26
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/9/13
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/6/24
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2021/11/25
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2021/12/3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2022/1/14
Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2022/1/14
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2022/8/26
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021/12/24
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2022/3/9

Software	Version	Function
EMI Software	V3	EMI Test Software

4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~6GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~6GHz: 6.40dB

5. TEST RESULT

5.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 5.2
15.209	General Field Strength Limits	FCC Part 15.209 limits	Radiated	Pass	Section 5.3
15.215(c)	20dB Bandwidth	20 dB bandwidth of the emission in the specific band		Pass	Section 5.4

Note:

All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

5.2. Conducted Emission


5.2.1. Test Limit

FCC 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

5.2.2. Test Setup

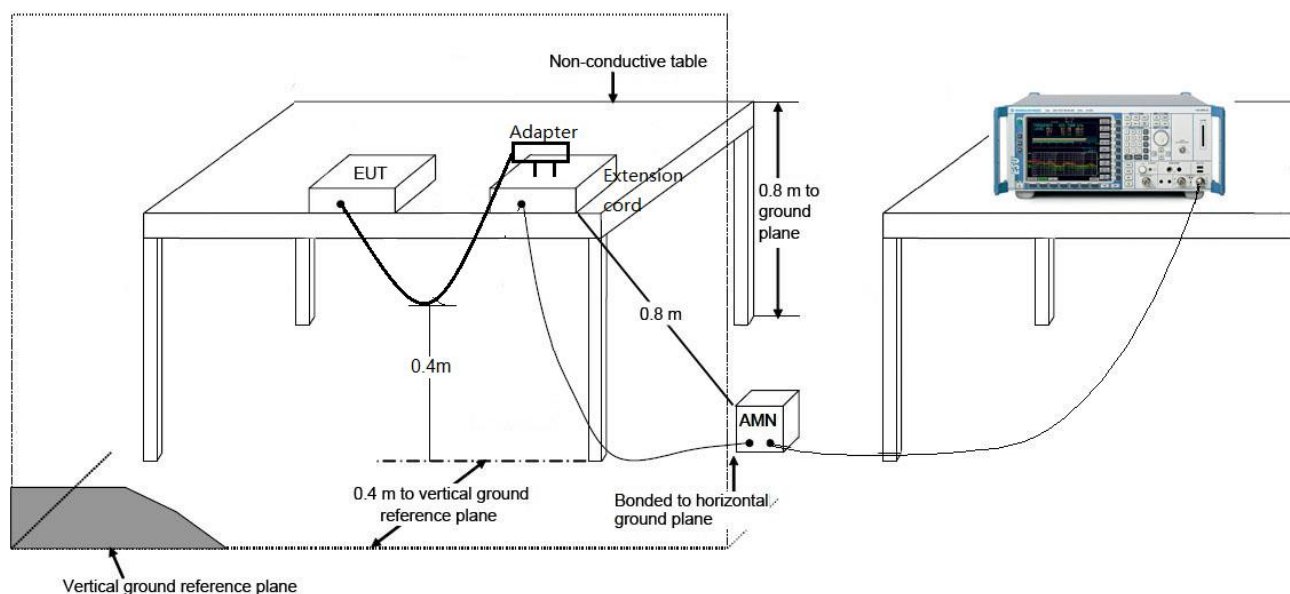

5.2.3.Test Result

Site: SIP-SR2	Time: 2021/02/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kyrie Xie
Probe: SIP-SR2-ENV216_101684_With Connect	Polarity: Line
EUT: Interactive Training System	Power: AC 120V/60Hz
Test Mode: Mode 1	

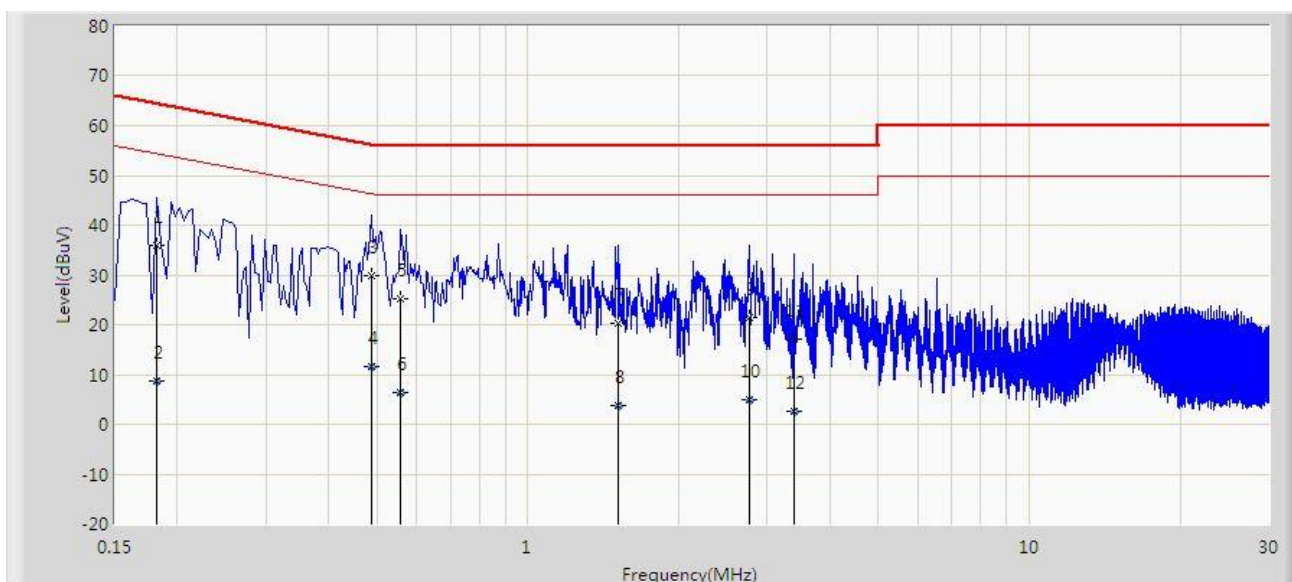


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.182	35.872	26.413	-28.521	64.394	9.460	QP
2			0.182	8.829	-0.631	-45.565	54.394	9.460	AV
3		*	0.486	29.985	20.426	-26.251	56.236	9.559	QP
4			0.486	11.732	2.174	-34.503	46.236	9.559	AV
5			0.558	25.311	15.751	-30.689	56.000	9.560	QP
6			0.558	6.476	-3.084	-39.524	46.000	9.560	AV
7			1.514	20.156	10.586	-35.844	56.000	9.570	QP
8			1.514	3.799	-5.771	-42.201	46.000	9.570	AV
9			2.758	21.319	11.723	-34.681	56.000	9.596	QP
10			2.758	5.053	-4.543	-40.947	46.000	9.596	AV
11			3.394	17.189	7.512	-38.811	56.000	9.677	QP
12			3.394	2.635	-7.042	-43.365	46.000	9.677	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Time: 2021/02/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kyrie Xie
Probe: SIP-SR2-ENV216_101684_With Connect	Polarity: Neutral
EUT: Interactive Training System	Power: AC 120V/60Hz
Test Mode: Mode 1	

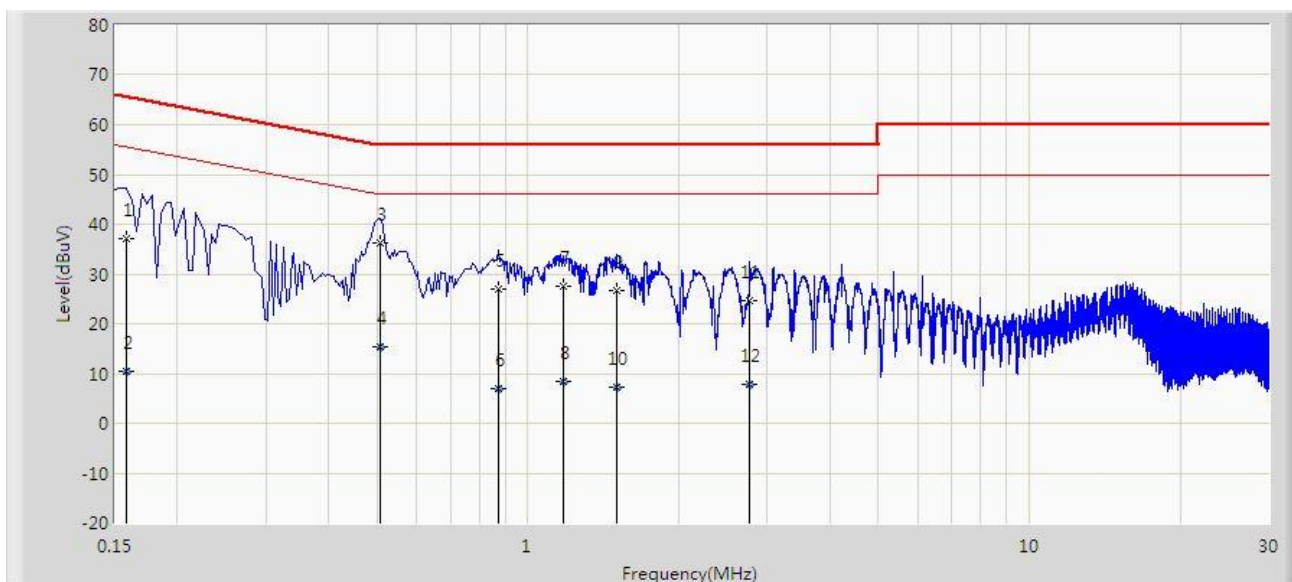


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	37.216	27.784	-28.353	65.568	9.432	QP
2			0.158	10.563	1.131	-45.006	55.568	9.432	AV
3		*	0.506	36.220	26.680	-19.780	56.000	9.540	QP
4			0.506	15.432	5.892	-30.568	46.000	9.540	AV
5			0.874	26.833	17.295	-29.167	56.000	9.537	QP
6			0.874	7.020	-2.518	-38.980	46.000	9.537	AV
7			1.174	27.449	17.907	-28.551	56.000	9.542	QP
8			1.174	8.323	-1.218	-37.677	46.000	9.542	AV
9			1.506	26.660	17.105	-29.340	56.000	9.555	QP
10			1.506	7.309	-2.246	-38.691	46.000	9.555	AV
11			2.762	24.732	15.154	-31.268	56.000	9.578	QP
12			2.762	7.694	-1.883	-38.306	46.000	9.578	AV

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Time: 2021/02/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kyrie Xie
Probe: SIP-SR2-ENV216_101684_With Connect	Polarity: Line
EUT: Interactive Training System	Power: AC 120V/60Hz
Test Mode: Mode 2	

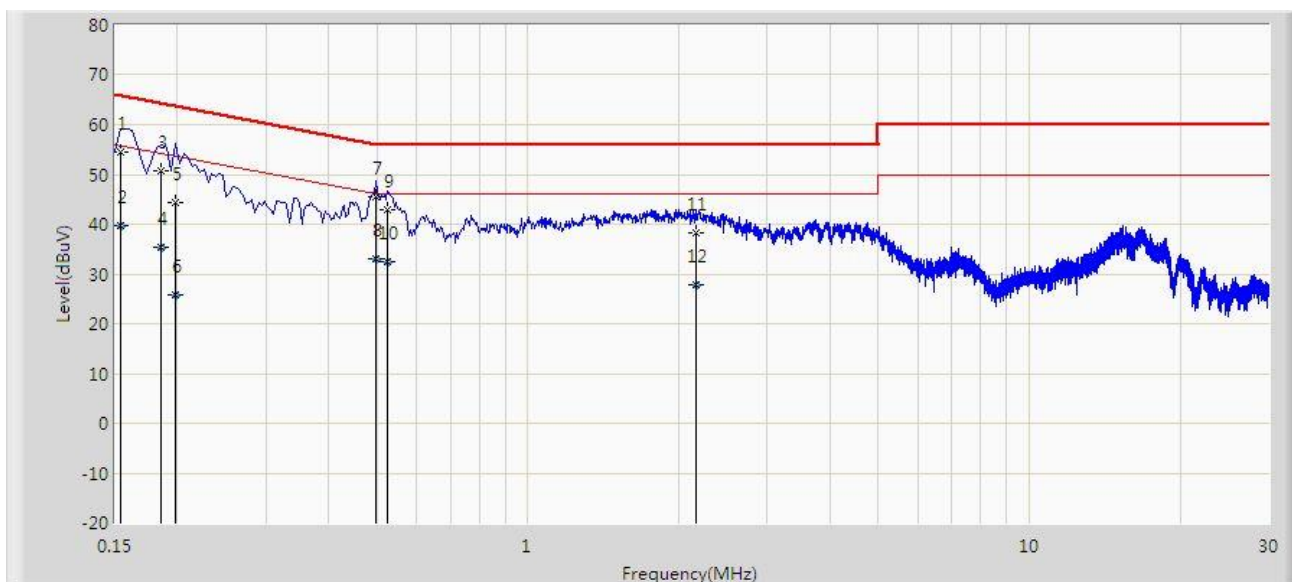


No.	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	54.352	44.900	-11.430	65.781	9.452	QP
2			0.154	39.752	30.300	-16.030	55.781	9.452	AV
3			0.186	50.781	41.316	-13.432	64.213	9.465	QP
4			0.186	35.360	25.894	-18.854	54.213	9.465	AV
5			0.198	44.286	34.802	-19.408	63.694	9.483	QP
6			0.198	25.877	16.393	-27.817	53.694	9.483	AV
7		*	0.498	45.619	36.060	-10.414	56.033	9.559	QP
8			0.498	33.117	23.558	-12.916	46.033	9.559	AV
9			0.526	43.025	33.465	-12.975	56.000	9.560	QP
10			0.526	32.424	22.864	-13.576	46.000	9.560	AV
11			2.166	38.378	28.802	-17.622	56.000	9.576	QP
12			2.166	27.838	18.262	-18.162	46.000	9.576	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Time: 2021/02/25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kyrie Xie
Probe: SIP-SR2-ENV216_101684_With Connect	Polarity: Neutral
EUT: Interactive Training System	Power: AC 120V/60Hz
Test Mode: Mode 2	

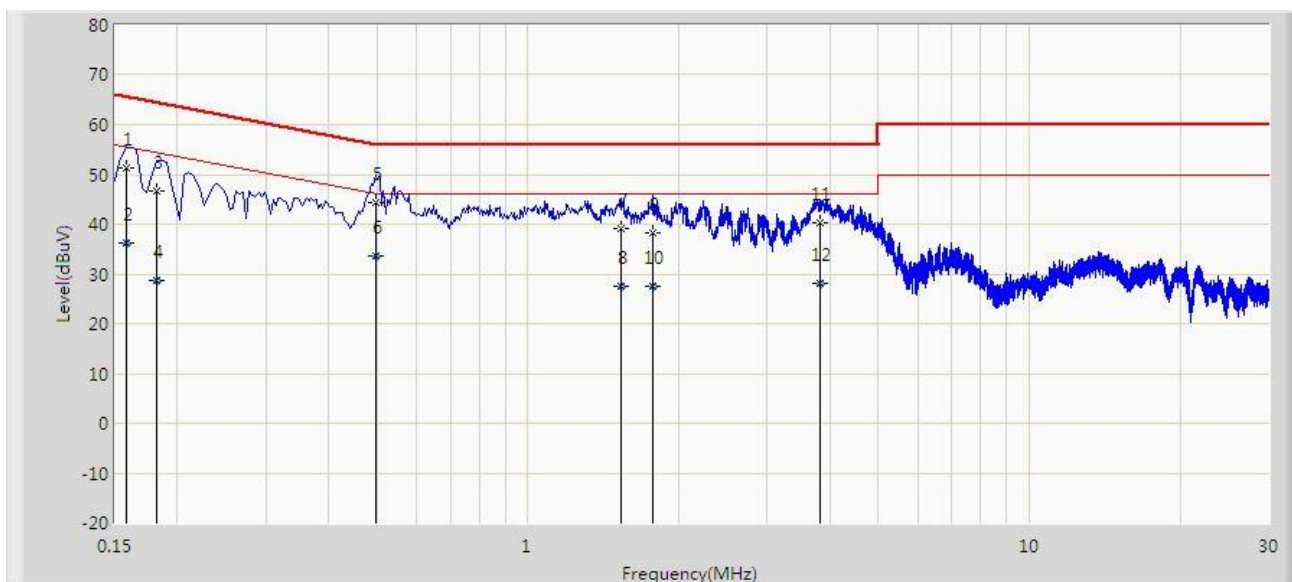

No.	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	51.400	41.968	-14.168	65.568	9.432	QP
2			0.158	36.369	26.937	-19.200	55.568	9.432	AV
3			0.182	46.691	37.252	-17.703	64.394	9.440	QP
4			0.182	28.601	19.162	-25.792	54.394	9.440	AV
5		*	0.498	44.462	34.923	-11.571	56.033	9.539	QP
6			0.498	33.484	23.945	-12.549	46.033	9.539	AV
7			1.538	39.080	29.525	-16.920	56.000	9.555	QP
8			1.538	27.674	18.119	-18.326	46.000	9.555	AV
9			1.774	38.342	28.785	-17.658	56.000	9.558	QP
10			1.774	27.487	17.929	-18.513	46.000	9.558	AV
11			3.822	40.186	30.524	-15.814	56.000	9.662	QP
12			3.822	28.165	18.502	-17.835	46.000	9.662	AV

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

5.3. General Radiated Emission

5.3.1. Test Limit

FCC Part 15.209 Limit		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 80	100	3
80 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3
Note 1: The lower limit shall apply at the transition frequency. Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system. Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m).		

5.3.2. Test Procedure Used


ANSI C63.10:2013 - Section 6.3 (General Requirements)

ANSI C63.10:2013 - Section 6.4 (Standard test method below 30MHz)


ANSI C63.10:2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

5.3.3. Test Setup

Below 30MHz Test Setup:

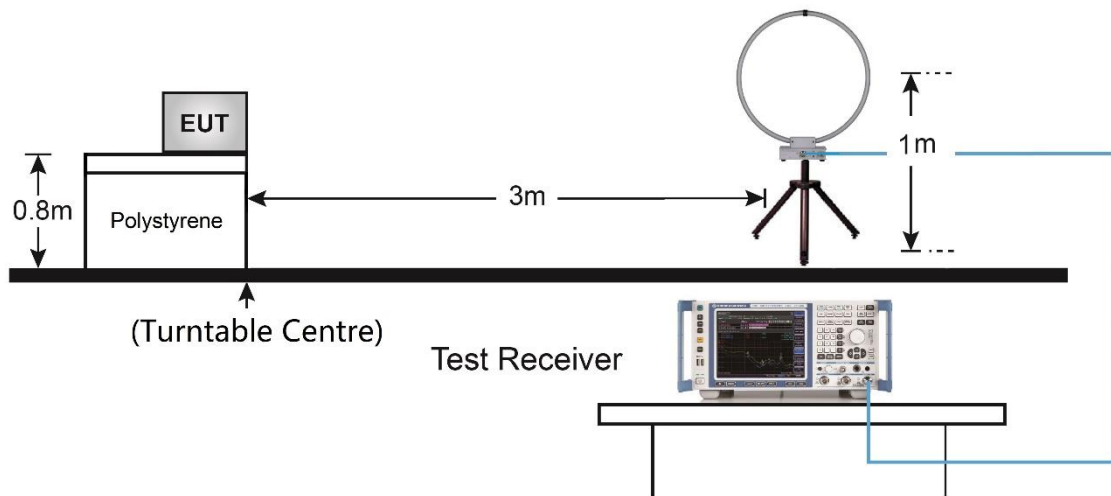

30MHz ~ 1GHz Test Setup:

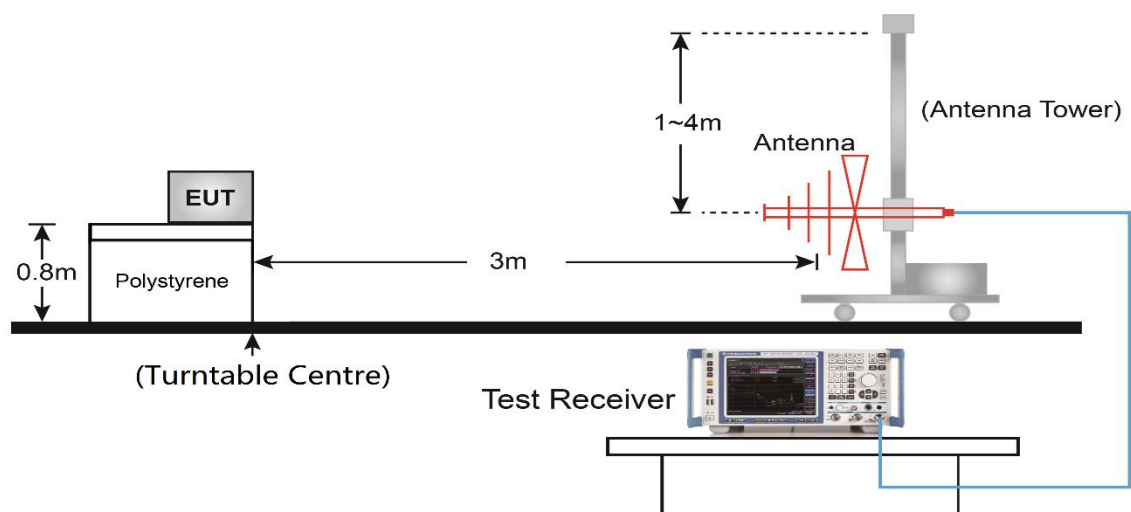

5.3.4. Test Result

Product	Interactive Training System	Test Site	SIP-AC1
Test Engineer	White Wang	Test Date	2021/03/16
Test Mode	Mode 1		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Fundamental Radiated Emission							
0.146	56.01	20.24	76.25	104.32	-28.07	Peak	Face On
0.146	43.40	20.24	63.64	104.32	-40.68	Peak	Face Off
Radiated Spurious Emission							
0.150	41.03	20.24	61.27	104.08	-42.81	Peak	Face On
0.284	29.57	19.44	49.01	98.54	-49.53	Peak	Face On
0.434	31.87	19.44	51.31	94.85	-43.55	Peak	Face On
0.210	21.03	19.95	40.98	101.16	-60.18	Peak	Face Off
0.359	17.34	19.44	36.78	96.50	-59.72	Peak	Face Off
0.434	16.62	19.44	36.06	94.85	-58.79	Peak	Face Off
99.840	18.35	13.36	31.71	43.50	-11.79	Peak	Horizontal
122.635	14.56	15.56	30.12	43.50	-13.39	Peak	Horizontal
175.985	11.23	16.80	28.03	43.50	-15.47	Peak	Horizontal
234.185	15.88	16.00	31.88	46.00	-14.11	Peak	Horizontal
283.655	17.20	18.11	35.31	46.00	-10.70	QP	Horizontal
293.355	17.30	18.23	35.53	46.00	-10.47	QP	Horizontal
41.809	20.30	17.74	38.04	40.00	-1.96	QP	Vertical
58.615	12.36	17.43	29.79	40.00	-10.21	Peak	Vertical
70.740	15.05	15.35	30.40	40.00	-9.60	Peak	Vertical
221.090	18.23	14.70	32.93	46.00	-13.07	Peak	Vertical
244.855	15.21	16.70	31.91	46.00	-14.09	Peak	Vertical
280.745	12.91	18.01	30.92	46.00	-15.08	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)							

Product	Interactive Training System	Test Site	SIP-AC1
Test Engineer	White Wang	Test Date	2021/03/16
Test Mode	Mode 2		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Fundamental Radiated Emission							
0.135	47.55	20.30	67.85	105.00	-37.15	Peak	Face On
0.135	47.57	20.30	67.87	105.00	-37.12	Peak	Face Off
Radiated Spurious Emission							
0.15	25.28	20.29	45.57	104.08	-58.52	Peak	Face On
0.165	36.06	20.27	56.33	103.26	-46.92	Peak	Face On
0.404	30.59	19.31	49.90	95.48	-45.57	Peak	Face On
0.15	22.99	20.29	43.28	104.08	-60.80	Peak	Face Off
0.195	33.05	20.17	53.22	101.80	-48.58	Peak	Face Off
0.374	27.35	19.33	46.68	96.15	-49.47	Peak	Face Off
50.370	0.56	17.67	18.23	40.00	-21.77	Peak	Horizontal
64.920	0.52	16.39	16.91	40.00	-23.09	Peak	Horizontal
146.885	-0.16	17.96	17.80	43.50	-25.70	Peak	Horizontal
373.865	2.63	20.02	22.65	46.00	-23.34	Peak	Horizontal
424.305	1.93	21.29	23.22	46.00	-22.78	Peak	Horizontal
746.830	1.90	27.57	29.47	46.00	-16.54	Peak	Horizontal
42.610	0.21	17.70	17.91	40.00	-22.09	Peak	Vertical
57.160	1.04	17.26	18.30	40.00	-21.70	Peak	Vertical
161.435	0.17	17.86	18.03	43.50	-25.47	Peak	Vertical
387.445	2.46	20.32	22.78	46.00	-23.22	Peak	Vertical
536.825	3.59	23.46	27.05	46.00	-18.96	Peak	Vertical
812.305	2.91	27.89	30.80	46.00	-15.21	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)							

5.4. 20dB Spectrum Bandwidth Measurement

5.4.1. Test Limit

N/A


5.4.2. Test Procedure Used

ANSI C63.10:2013 Clause 6.9.2

5.4.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set the spectrum span range to overlap the nominal center frequency
3. Set RBW = 1% ~ 5% of the OBW
4. $VBW \geq 3 \times RBW$
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. Allow the trace to stabilize.


5.4.4. Test Setup

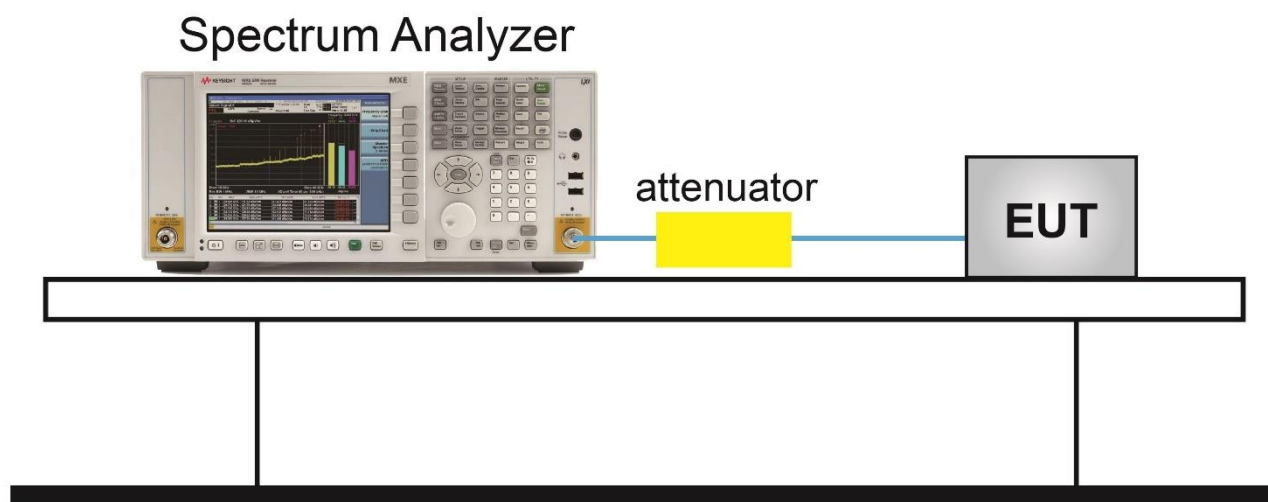

5.4.5. Test Result


Product	Interactive Training System	Test Site	SIP-AC3
Test Engineer	Chase Zhu	Test Date	2021/08/21
Test Mode	Mode 1		

Frequency Range	20dB Bandwidth (Hz)
110 kHz ~ 148 kHz	209

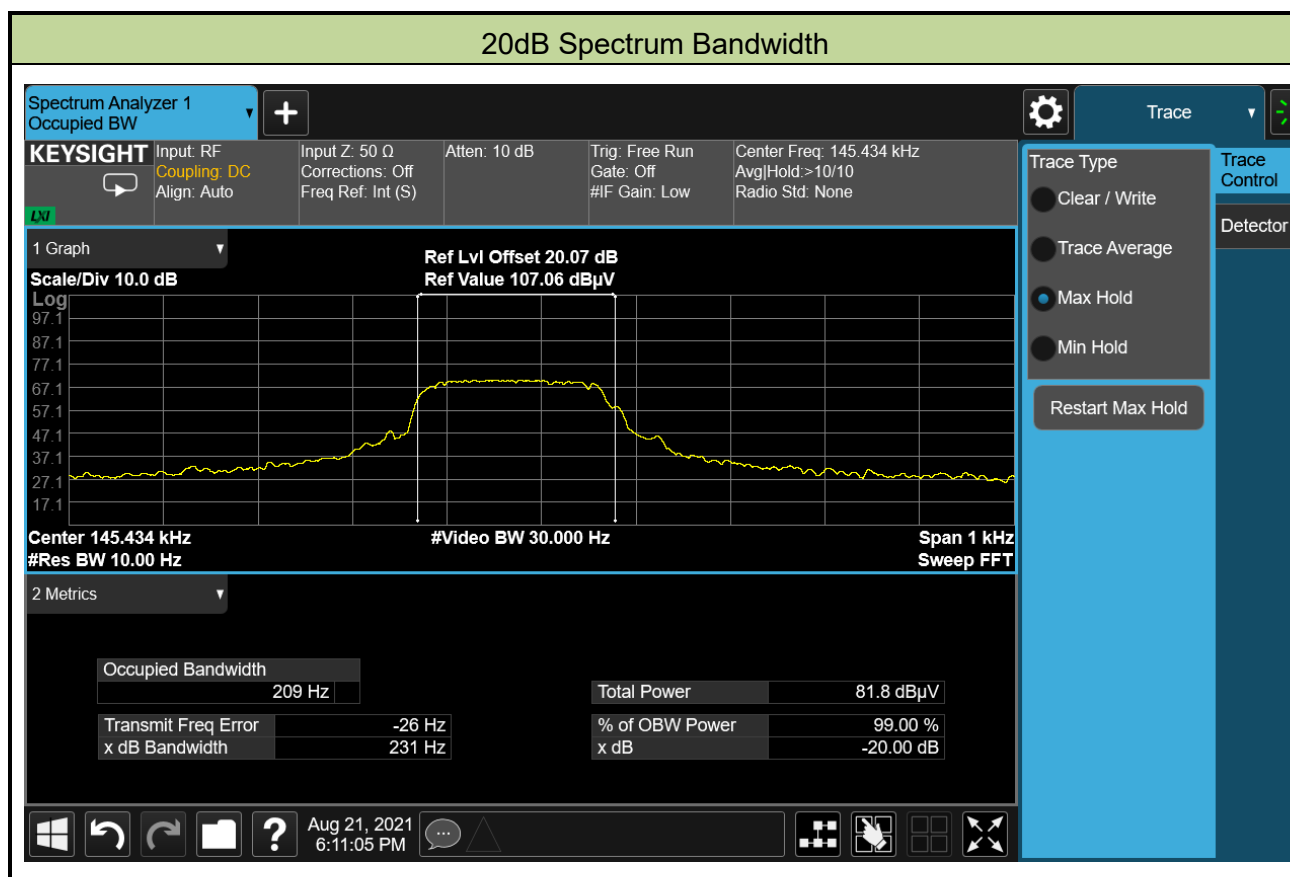

Product	Interactive Training System	Test Site	SIP-AC3
Test Engineer	Chase Zhu	Test Date	2021/08/21
Test Mode	Mode 2		

Frequency Range	20dB Bandwidth (Hz)
110 kHz ~ 148 kHz	212

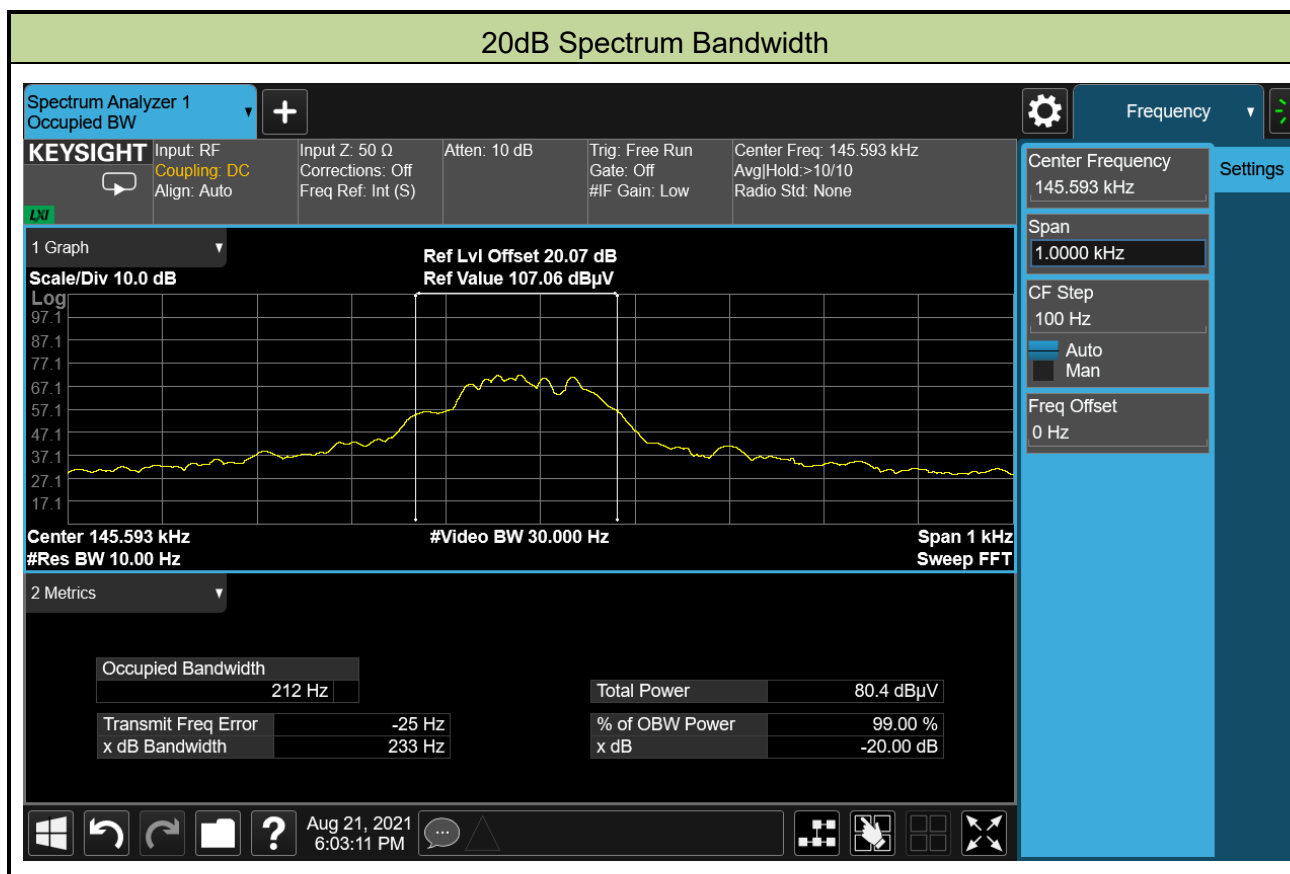

6. CONCLUSION

The data collected relate only the item(s) tested and show that the unit is compliance with Part 15C of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2102RSU069-UT” file.

Appendix B - EUT Photograph

Refer to “2102RSU069-UE” file.