

Test Report 19-1-0097801T04a



Deutsche
Akkreditierungsstelle
D-PL-12047-01-01
D-PL-12047-01-03
D-PL-12047-01-04

Number of pages: 16 **Date of Report:** 2020-May-12

Testing company: CETECOM GmbH
Im Teelbruch 116
45219 Essen Germany
Tel. + 49 (0) 20 54 / 95 19-0
Fax: + 49 (0) 20 54 / 95 19-150

Applicant: Robert Bosch GmbH

Test Object / Tested Device(s): BUI350

Listing FCC ID: 2AUXS-NYON350 **ISED:** 25847-NYON350

Testing has been carried out in accordance with:

FCC Regulations
Part 15.107
Part 15.109

ISED Regulations
ICES-003, Issue 6

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".

Test Results: ☒ **The EUT complies with the requirements in respect of selected parameters subject to the test.**
The test results relate only to devices specified in this document

Signatures:

Dipl.-Ing. Christian Lorenz
Senior Test Manager
Authorization of test report

B.Sc. Hicham Laayouni
Test manager
Responsible of test report

1	General information	5
1.1	Disclaimer and Notes	5
1.1	Summary of Test Results	6
1.2	Summary of Test Methods	6
2	Administrative Data	7
2.1	Identification of the Testing Laboratory	7
2.2	General limits for environmental conditions	7
2.3	Test Laboratories sub-contracted	7
2.4	Organizational Items	7
2.5	Applicant's details	7
2.6	Manufacturer's details	7
2.7	EUT: Type, S/N etc. and short descriptions used in this test report	8
2.8	Auxiliary Equipment (AE): Type, S/N etc. and short descriptions	8
2.9	Connected cables	8
2.10	EUT set-ups	8
2.11	EUT operation modes	8
3	Equipment under test (EUT)	9
3.1	General Data of Main EUT as Declared by Applicant	9
3.2	Modifications on Test sample	9
4	Measurements	10
4.1	Radiated field strength emissions 30 MHz – 1 GHz	10
4.1.1	Description of the general test setup and methodology, see below example:	10
	Schematic:	10
	Testing method:	10
	Formula:	11
4.1.2	Limit	11
4.1.3	Result	11
4.2	Radiated field strength emissions above 1 GHz	12
4.2.1	Description of the general test setup and methodology, see below example:	12
	Schematic:	12
	Testing method:	12
	Formula:	13
4.2.2	Limit	13
4.2.3	Result	13
4.3	Results from external laboratory	14
4.4	Opinions and interpretations	14
5	Equipment lists	14
6	Measurement Uncertainty valid for conducted/radiated measurements	16



7 Versions of test reports (change history)16

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	CETECOM_TR19_1_0097801T04a_A1	6
Annex 2	Internal photographs of EUT	To be provided by customer	--
Annex 3	External photographs of EUT	CETECOM_TR19_1_0097801T04a_A3	5
Annex 4	Test set-up photographs	CETECOM_TR19_1_0097801T04a_A4	4
The listed attachments are separate documents.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.1. Summary of Test Results

Test case	Reference in FCC ☒	Reference in ISED ☒	Reference in RSS-GEN ☐	Remark	Result
Radiated field strength emissions 30 MHz – 1 GHz	§15.109 §15.33 §15.35	ICES-003, Issue 6	RSS-Gen., Issue 5 Chapter 8.9, Chapter 7.3	--	PASSED
Radiated field strength emissions above 1 GHz	§15.109 §15.33 §15.35	ICES-003, Issue 6	RSS-Gen., Issue 5 Chapter 8.9, Chapter 7.3	--	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the CETECOM Laboratory.

1.2. Summary of Test Methods

Test case	Test method
Radiated field strength emissions 30 MHz – 1 GHz	ANSI C63.4-2014 chapter 8.2.3
Radiated field strength emissions above 1 GHz	ANSI C63.4-2014 chapter 8.3

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Volker Wittmann
Accreditation scope:	DAkkS Webpage
Test location:	CETECOM GmbH; Im Teelbruch 116; 45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:	--
---------------	----

2.4 Organizational Items

Order No.:	1
Responsible test manager:	B.Sc. Hicham Laayouni
Receipt of EUT:	2019-Sep-16
Date(s) of test:	2019-Sep-16 – 2020-Apr-14
Version of template:	13.02

2.5 Applicant's details

Applicant's name:	Robert Bosch GmbH
Address:	Robert-Bosch-Platz 1 70839 Gerlingen-Schillerhöhe Germany
Contact Person:	Uwe Feuchter (CM-CI2/EEB)
Contact Person's Email:	uwe.feuchter@de.bosch.com

2.6 Manufacturer's details

Manufacturer's name:	Robert Bosch GmbH
Address:	Robert-Bosch-Platz 1 70839 Gerlingen Germany

2.7 EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	PMT Sample No.	EUT	Type	S/N	HW status	SW status
EUT 1	19-1-00978S01	BUI350	--	--	0.8.2.0	0.197.5.0

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

Short description*)	PMT Sample No.	Auxiliary Equipment	Type	S/N	HW status	SW status
AE 1	19-1-00978S14	Bracket with power supply	--	--	--	--
AE 2	19-1-00978S13	vector CAN Interface	VN1610	--	--	--
AE 3	19-1-00978S11	HP ZBook 15 G3	XS05EC	CND62592S9	--	--
AE 4	19-1-02039S03	Bicycle Handlebar	V7161	--	--	--
AE 5	Micro USB cable	Type B cable	--	--	--	--

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.9 Connected cables

Cable short description*)	Cable type	Connectors	Length
CAB 1	USB cable	--	--

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.10 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
1	EUT 1 + AE 1 + AE 2 + AE 3 + AE 4 + AE 5	--

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.11 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
1	USB Traffic + CAN Simulation	USB Traffic was generated via Iperf connected to the USB port of the EUT, which is an ethernet port with a static IP. CANoe was installed on AE 3. CAN simulation was executed from laptop to monitor bus statistics like error frame rates and bus-load.

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Product name	BUI350		
Kind of product	E-Bike computer with Navigation		
Firmware	☐ for normal use	☒ Special version for test execution	
Comments on firmware	For USB traffic an iperf server was running on the EUT. For CAN simulation no special firmware is needed on the EUT.		
	☐ AC Mains	--	
	☒ DC Mains	12 V DC	
	☒ Battery	Lithium Ion battery	
Operational conditions	T _{nom} =20 °C	T _{min} =-10 °C	T _{max} =50 °C
EUT sample type	Pre-Production		
Weight	--		
Size	--		
Interfaces/Ports	--		
For further details refer Applicants Declaration & following technical documents			

3.2 Modifications on Test sample

Additions/deviations or exclusions	--
------------------------------------	----


4 Measurements

4.1 Radiated field strength emissions 30 MHz – 1 GHz

4.1.1 Description of the general test setup and methodology, see below example:

Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the regulatory commissions.

Schematic:

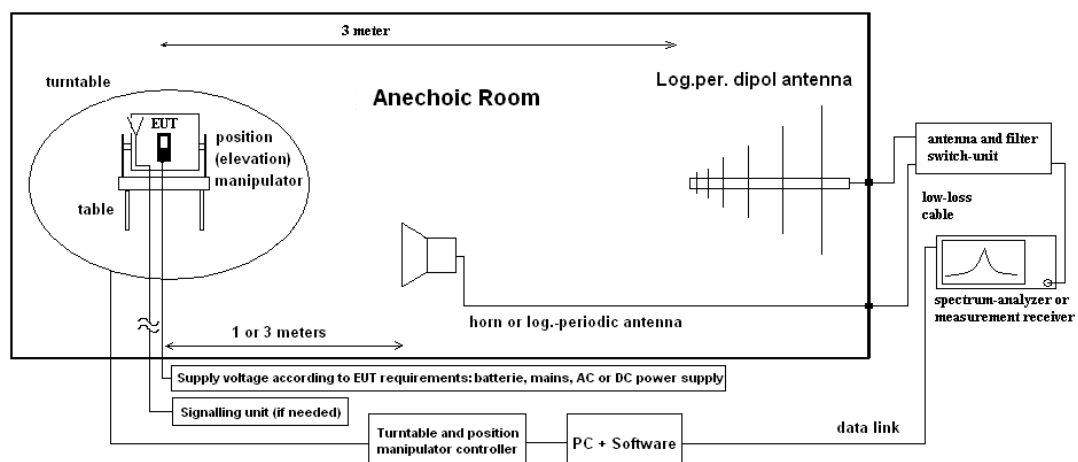

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.1.2 Limit

Frequency Range [MHz]	Class B ☒ (3 meters)		Class A ☐ (10 meters)		Detector	RBW / VBW [kHz]
	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]		
30 - 88	100	40.0	90	39.0	Quasi peak	100 / 300
88 - 216	150	43.5	150	43.5	Quasi peak	100 / 300
216 - 960	200	46.0	210	46.4	Quasi peak	100 / 300
960 - 1000	500	54.0	300	49.5	Quasi peak	100 / 300

4.1.3 Result

Diagram	Set up	Op. Mode	Maximum Level [dB $\mu\text{V/m}$] Frequency Range 30 – 1000 MHz	Result
3.01	1	1	No peaks found	Passed
3.02	1	1	No peaks found	Passed


Remark: for more informations and graphical plot see annex A1 **CETECOM_TR19_1_0097801T04a_A1**

4.2 Radiated field strength emissions above 1 GHz

4.2.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

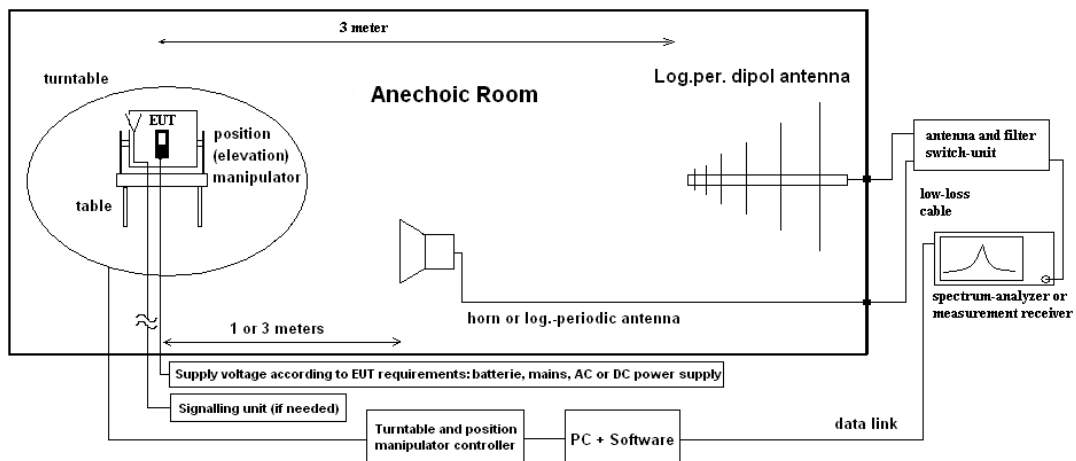

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions or three axis scan for portable/small equipment.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + A_F + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

A_F = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

4.2.2 Limit

Radiated emissions limits (3 meters)				
Frequency Range [MHz]	Limit [$\mu\text{V}/\text{m}$]	Limit [$\text{dB}\mu\text{V}/\text{m}$]	Detector	RBW / VBW [kHz]
Above 1000	500	54	Average	1000 / 3000
Above 1000	5000	74	Peak	1000 / 3000

4.2.3 Result

Diagram	Set up	Op. Mode	Maximum Level [$\text{dB}\mu\text{V}/\text{m}$] Frequency Range 1 – 18 GHz	Result
4.01	1	1	53.63	Passed

Remark: for more informations and graphical plot see annex A1 **CETECOM_TR19_1_0097801T04a_A1**

4.3 Results from external laboratory

None

-

4.4 Opinions and interpretations

None

-

5 Equipment lists

ID	Description	Manufacturer	SerNo	Cal Date
120904	FAC1 - Radiated Emissions			
20720	EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	V10.50	
20020	Horn Antenna 3115 (Subst 1)	EMCO Elektronik GmbH	9107-3699	19.07.2021
20549	Log.Per-Antenna HL025	Rohde & Schwarz Messgerätebau GmbH	1000060	31.07.2021
20700	PC ctc662012 [FAC]	Dell Inc.		
20262	Power Meter NRV-S	Rohde & Schwarz Messgerätebau GmbH	825770/0010	15.05.2020
20357	power sensor NRV-Z1	Rohde & Schwarz Messgerätebau GmbH	861761/002	21.05.2021
20338	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	
20484	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	
20287	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-35-10P	Miteq Inc.	379418	
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	23.05.2021
120901	SAC - Radiated Emission <1GHz			
25038	Loop Antenna (H-Field) HFH2- Z2	Rohde & Schwarz	879824/13	31.03.2020
20574	Biconilog Hybrid Antenna BTA-L	Frankonia	980026L	03.05.2022
20620	ESU 26	Rohde & Schwarz	100362	30.05.2020

ID	Description	Manufacturer	SerNo	Cal Date
20556	Thermo-/Hygrometer WS-9400	Conrad Electronic GmbH	-	

Tools used in 'P1M1'

6 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor k , such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%						Remarks
Conducted emissions (U _{CISPR})	-	9 kHz - 150 kHz 150 kHz - 30 MHz	4.0 dB 3.6 dB						-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB						Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--	-
		12.75 - 26.5 GHz	N/A	0.82	--	N/A	N/A	--	
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable
		2.8 GHz - 12.75 GHz	1.48	N/A	1.51	N/A	1.43	--	
		12.75 GHz – 18 GHz	1.81	N/A	1.83	N/A	1.77	--	
		18 GHz - 26.5 GHz	1.83	N/A	1.85	N/A	1.79	--	
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			1.0 dB						Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
	-		See above: 0.70 dB						Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm						-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.01dB						Magnetic field strength
		30 MHz - 1 GHz	5.83 dB						Electrical Field strength
		1 GHz - 18 GHz	4.91 dB						
		18-26.5 GHz	5.06 dB						

7 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2020-May-12
--	--	--
--	--	--

End Of Test Report